Appendix K Transportation Impact Study

Appendices

This page intentionally left blank.

IBI GROUP
18401 Von Karman Avenue – Suite 300
Irvine CA 92612 USA
tel 949 833 5588 fax 949 833 5511
ibigroup.com

Memorandum

To/Attention	Placeworks	**Date**	October 7, 2020
From	IBI Group	**Project No**	119772
cc			
Subject	Santa Ana General Plan Traffic Analysis Updates		

This memo summarizes changes made to the Traffic Analysis prepared in support of the Santa Ana General Plan DEIR. The traffic analysis was circulated among relevant stakeholders in order to solicit input regarding the proposed reclassifications and analysis methodology. The major changes incorporated into the traffic analysis based on the comments received are summarized below:

- Adjustment of volumes in northeast corner for select intersections along Grand Avenue and Tustin Avenue. Volume changes at the intersection of Tustin Avenue and Santa Clara Avenue were highlighted by the City of Tustin as being excessive. Volumes were adjusted at intersections 74-76 and 91-93 in order to improve trip balance.
- Language for LOS impacts and mitigations updated to better address improvements.
- Fair –share added for non-City of Santa Ana intersections.
- LOS worksheets for the 2045 WP AM were added; they were missing in original appendix.
- V/C and LOS updated for intersection #98 at Red Hill and Warner. An impact was caused as part of the update. Mitigation was developed.
- Additional roadway segments added to analysis.
- Mitigation measure for intersection #3 at Euclid Street and Edinger Avenue expanded.
- Mitigation measure for intersection #62 at Santa Ana Boulevard and Santiago Street modified.
- Mitigation at intersection #100 at Red Hill Avenue and Alton Parkway modified.
- Updates to Figure 2.1 through 2.7.

Santa Ana General Plan Update
Traffic Impact Study
FINAL Report

Prepared for:

City of Santa Ana
Public Works Agency
20 Civic Center Plaza, M-36
Santa Ana, CA 92701

By:

IBI Group
18401 Von Karman Ave, Suite 300
Irvine, CA 92612
(949) – 833 – 5588

October 2020

DOCUMENT HISTORY

Version	Date	Originator	Revisions By	Status
1	06/05/20	Y. Esquivel		Initial draft.
2	07/21/20	Y. Esquivel	Y. Esquivel	Draft revision.
3	08/24/20	Y. Esquivel	Y. Esquivel	Draft revision.
4	10/20/20	Y. Esquivel	Y. Esquivel	Final Draft.
5				
6				
7				
8				

Table of Contents

1.0 Introduction 1
1.1 Study Purpose 1
1.2 Report Organization 1
2.0 Project Description 4
2.1 Background 4
2.2 Study Area 4
2.3 Circulation Element Roadway Classifications 8
2.4 Scenario Summary 9
2.5 Existing Year (2020) 9
2.6 Future Year (2045) No Project 9
2.7 Future Year (2045) With Project 13
3.0 Analysis Methodology 17
3.1 Vehicle Miles traveled (VMT) Analysis 17
3.2 Roadway Level of Service Analysis 19
3.3 Intersection Level of Service Analysis 20
3.4 Intersection LOS and Significant Impact Criteria 23
3.5 Traffic Volumes 24
4.0 Existing Year (2020) Conditions 30
4.1 Existing Roadway Network 30
4.2 Study Intersection Geometry and Peak Hour Volumes 33
4.3 Existing Year (2020) Vehicle Miles Traveled (VMT) 42
4.4 Existing Year (2020) Roadway Segment Level of Service 42
4.5 Existing Year (2020) Intersection Level of Service 46
5.0 Future Year 2045 Forecast Modeling 50
5.1 Orange County Transportation Authority Model (OCTAM) 50
5.2 Peak Hour Forecasts 50
6.0 Future Year (2045) No Project 52
6.1 Future Year (2045) No Project Vehicle Miles Traveled (VMT) 61
6.2 Roadway Segment Level of Service 61
6.3 Intersection Level of Service 64
7.0 Future Year (2045) With Project 69
7.1 Future Year (2045) With Project Vehicle Miles Traveled (VMT) 78
7.2 Roadway Segment Level of Service 78
7.3 Intersection Level of Service 81
8.0 VMT and LOS Analysis 86
8.1 VMT Impact Analysis 86
8.2 Level of Service Assessment 87
9.0 Conclusions 107
9.1 VMT Impact Analysis 107
9.2 Intersection LOS Analysis 107
9.3 Roadway LOS 108

10.0 Appendices 109

- APPENDIX A – Lane Geometries 109
- APPENDIX B – Intersection Volumes 109
- APPENDIX C – OCTAM Volume Plots 109
- APPENDIX D – Analysis Worksheets 109
- APPENDIX E – Mitigation Worksheets 109
- APPENDIX F – VMT Calculations 109
- APPENDIX G – OCTAM 2045 Volume Comparison PlotS 109
- APPENDIX H - COUNTS 109

Page intentionally left blank

1.0 Introduction

1.1 STUDY PURPOSE

This traffic analysis report has been prepared in support of the General Plan Update (GPU) Draft Program Environmental Impact Report (PEIR) for the City of Santa Ana and to assess requested changes to the Orange County Transportation Authority's (OCTA) Master Plan of Arterial Highways (MPAH) by the City of Santa Ana. This traffic analysis report reviews existing and future traffic conditions under the current General Plan and with the proposed Land Use Element and Circulation Element Updates.

This report is used as part of the Program EIR prepared for the General Plan Update. The Program EIR includes the results and findings of this traffic study report and identifies the significant impacts of the proposed project. The draft Program EIR will be available to the public for review and comment.

1.2 REPORT ORGANIZATION

This report consists of 11 sections.

1.0 Introduction
2.0 Project Description
3.0 Circulation Element Roadway Classifications
4.0 Analysis Methodology
5.0 Existing Year (2020) Conditions
6.0 Future Year 2045 Forecast Modeling
7.0 Future Year (2045) No Project
8.0 Future Year (2045) With Project
9.0 Significant Impacts and Mitigation Measures
10.0 Conclusions
11.0 Appendices

Section 1 provides a brief introduction to the study area and report organization. Section 2 provides a summary of the project description, background history, and project alternatives. Section 3 describes the various roadway classifications within the Circulation Element. Section 4 includes the methodology utilized in the analysis and the referenced standards. The study area roadways and Existing Year (2020) intersection geometry, turning movement volumes, and level of service are presented in Section 5. The Future Year (2045) forecast modeling methodology is provided in Section 6. Section 7 describes the Future Year (2045) No Project condition and provides the roadway segment and intersection level of service results. Section 8 describes the Future Year (2045) With Project Network Alternative condition and provides the roadway segment and intersection level of service results. Section 9 presents the mitigation measures to address facilities operating at an unacceptable level of service. Findings and conclusions from this study are presented in Section 10. Appendices are provided in Section 11.

The City boundaries/project study area is shown in Exhibits 1.1 and 1.2.

Exhibit 1.1 Project Location


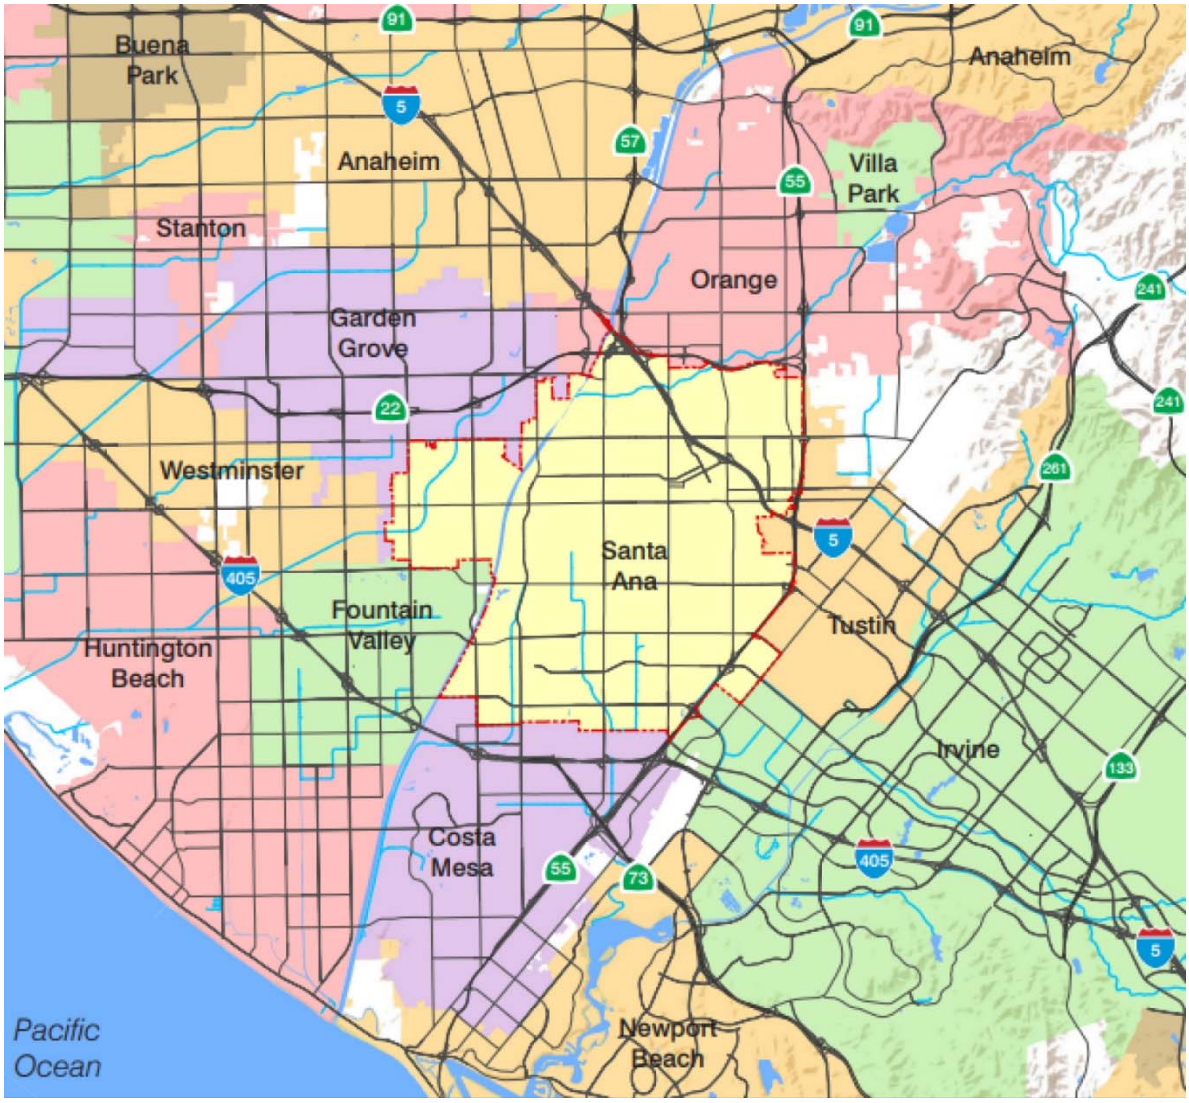


Exhibit 1.2 Project Study Area

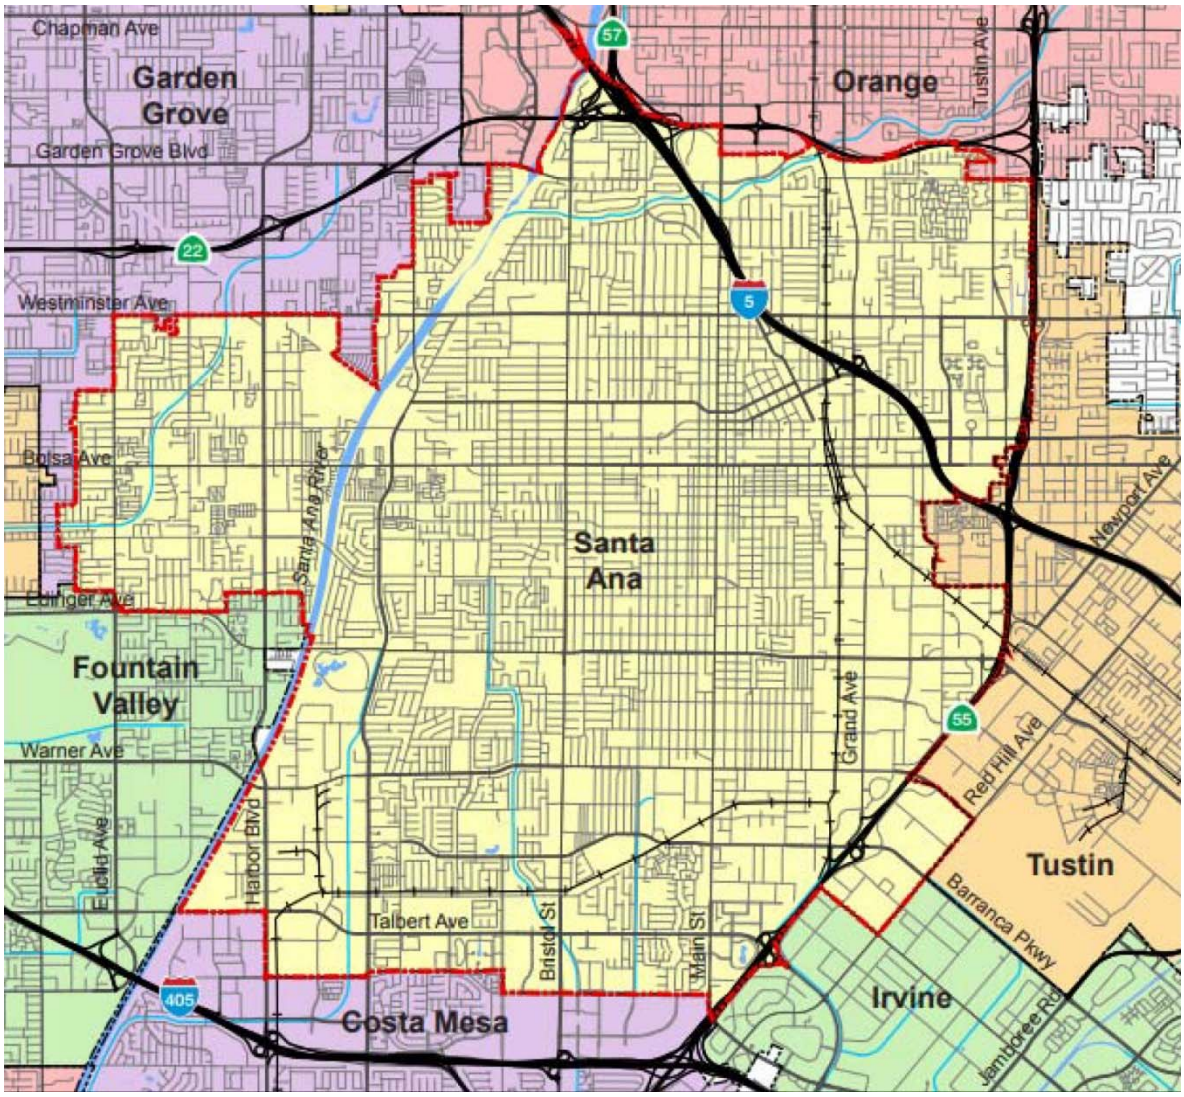

2.0 Project Description

This section provides an overview of the project background and traffic study for the General Plan Update. This section also includes a description of the land use and Circulation Element network derived throughout the public outreach and planning process.

2.1 BACKGROUND

The City of Santa Ana's General Plan is comprised of 16 elements, serving as the principal long-range policy and planning document guiding the development, conservation, and enhancement of the City. Each element contains goals and policies related to the physical development of the City. The General Plan was adopted by City Council in 1998 and has been partially amended several times since then. For this analysis, the Land Use and Circulation Elements are of particular interest.

The Land Use Element serves as a long-range guide for land use and development within the City. The primary objective is to manage future growth, minimize land use conflicts, and facilitate growth and development as part of the City's overall vision.

The Circulation Element of the Santa Ana General Plan serves as the City's primary guide for transportation planning. The Circulation Element focuses on roadways and other transportation modes including public transit, railroads, pedestrian and bicycle paths that provide a full range of travel options.

The most recent update to the City of Santa Ana Circulation Element was authorized by City Council in 2011. The project was initiated to update the Circulation Element in its entirety to include the following key components:

- A Complete Streets Policy compliant with the requirements of Assembly Bill (AB) 1358
- OC Streetcar – a proposed streetcar service that would link the Santa Ana Regional Transportation Center (SARTC) with the Civic Center and Garden Grove. The project is currently under construction (at the time this report was written).

Over the last six years, the draft Circulation Element has gone through significant changes, including a new vision, completion of the Santa Ana Safe Mobility Plan, changes to the policy framework and roadway designations, OCTA modeling updates, work by the City on two separate Complete Street studies, advancement of a fixed-guideway/streetcar system and BRT routes, and incorporation of Complete Street Principals.

The updates to both the Circulation Element and the EIR are based on a proposed new roadway network scenario, updated OCTA modeling and new modal split, work on the Bikeway Master Plan and Pedestrian Opportunity Area Plan, regulatory changes (e.g., air quality/GHG requirements per 2015 Climate Action Plan, SB743, etc.), integrating related plans (Safe Mobility Santa Ana Plan, and complete street plans (Downtown and Central Santa Ana Transit Zone plans).

2.2 STUDY AREA

As noted, the project consists of changes to both land uses and the transportation network within the City of Santa Ana. The study area was chosen such that the direct and indirect effects of the project could be assessed, within the City of Santa Ana as well as in the adjacent cities. Study intersections were developed based on the locations of the proposed changes as well as in consideration of input provided by OCTA, Caltrans, and neighboring cities during outreach for the Circulation Element Update. Prior to merging with the GPU, the CEU was in the process of evaluating various transportation network

scenarios. The transportation network proposed in this study is a result of those efforts. Study roadway segments and intersections are shown in Exhibit 2.1 and 2.2, respectively.

Exhibit 2.1 Study Intersections


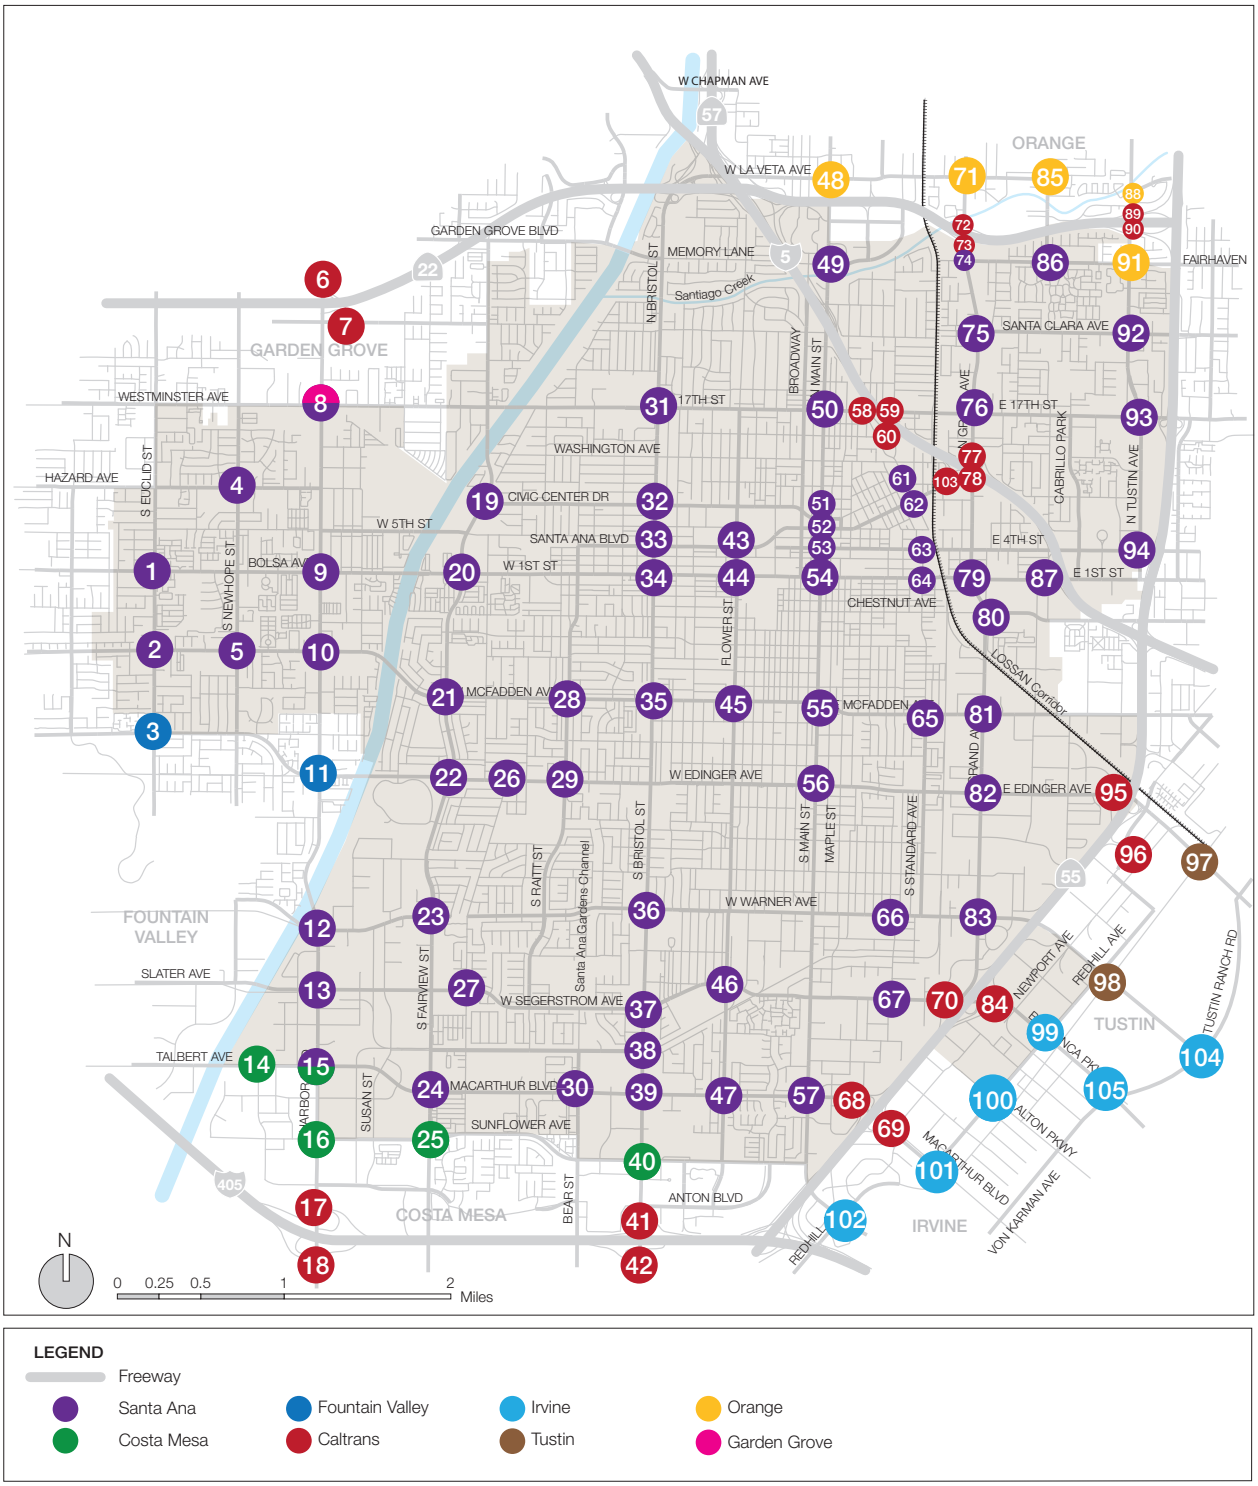


Exhibit 2.2 Study Roadway Segments

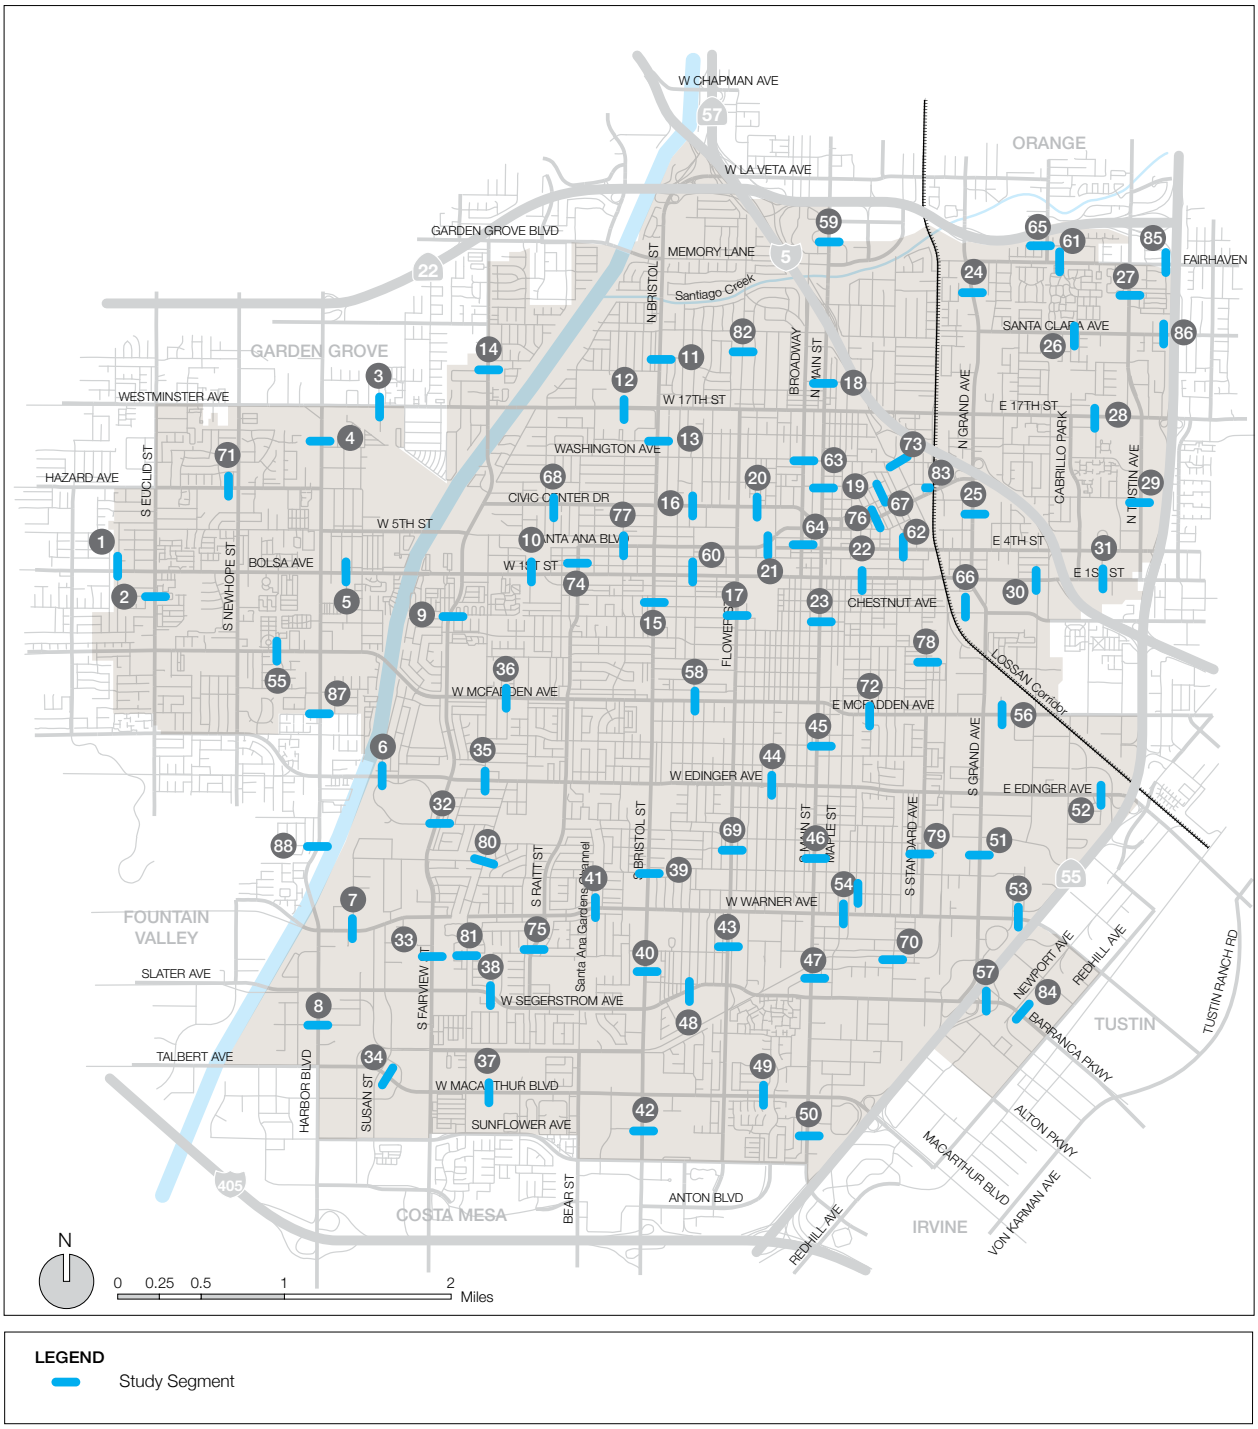

LEGEND

Study Segment

2.3 CIRCULATION ELEMENT ROADWAY CLASSIFICATIONS

The Circulation Element contains a Master Plan of Streets and Highways (MPSH) that uses a hierarchy of roadway classifications. Each roadway classification is described by size and function and has specific physical dimensions and characteristics. The MPSH contains regional arterials that connect to the countywide arterial network. OCTA's Master Plan of Arterial Highways (MPAH) is the County's planning document to ensure that the regional arterial highway network is maintained and developed in a coordinated manner between local jurisdictions to support mobility and future growth in the region. Consistency between the MPSH and MPAH is essential in order to maintain a functional regional arterial network and to receive funding from Measure M2 for street improvement projects.

Freeways

Freeways are multi-lane, limited-access, high-volume, high-speed roadways constructed for regional and interregional vehicular travel. Access to these facilities is restricted to interchange ramps at selected roadways along their route. Freeways are under the jurisdiction of the California Department of Transportation (Caltrans).

Principal Arterial

Typically, an eight-lane, divided roadway designed to accommodate between 45,000 to 67,500 vehicle trips daily. The typical right of way width is 144 feet.

Major Arterial

Generally consists of six-travel lanes, and is also divided. Typically, the right-of-way width for this type of roadway is 120 feet. A major arterial is designed to accommodate between 33,900 and 50,600 vehicle trips daily.

Primary Arterial

Generally consists of a four-lane, divided roadway. Typically, the right-of-way width is 100 feet. A primary arterial is designed to accommodate between 22,500 and 33,800 vehicle trips daily.

Secondary Arterial

Generally a four-lane, undivided roadway. The typical right-of-way width for this category of roadway is 80 feet. A secondary arterial is typically designed to accommodate between 15,000 and 22,500 vehicle trips daily.

Divided Collector Arterial

Generally a two-lane roadway with a continuous center two-way left-turn lane. The typical right-of-way width is 80 feet, for the purpose of allocating right-of-way to bicycle and pedestrian use. A divided collector arterial is designed to accommodate up to 22,000 vehicle trips per day.

Collector Street

A two-lane, undivided roadway. The right-of way width for this roadway classification is 60 feet. Collector Streets are also two-lane undivided roadways with a right-of-way width of 56 feet. A divided collector arterial is designed to accommodate up to 11,300 vehicle trips per day.

2.4 SCENARIO SUMMARY

This report presents the baseline analysis results for the existing year (2020) and future year (2045) baseline scenarios as well as future year (2045) project alternative scenario. These scenarios are listed below and described in the following sections:

- Existing Year (2020)
- Future Year (2045) No Project
- Future Year (2045) With Project – Proposed GPU

2.5 EXISTING YEAR (2020)

This scenario is representative of on-the-ground conditions for the transportation network and socio-economic makeup of the city for the year 2020. This scenario serves as a point of reference for future baseline and project alternative scenarios. The network and land use assumptions are as follows:

- The transportation network is reflective of configurations as of April 2020.
- Socio-economic data is representative of December 2019 conditions.


2.6 FUTURE YEAR (2045) NO PROJECT

This scenario serves as the baseline for future year (2045) analysis and consists of the following key assumptions:

- Transportation network and socio-economic data for OCTAM 5.0 Year 2045 Baseline scenario.
- Buildout of roadways consistent with the City of Santa Ana Master Plan of Streets and Highways map (MPSH) as shown in the Circulation Element (1998).
- Buildout of the Orange County Transportation Authority's (OCTA) Master Plan of Arterial Highways (MPAH)
- Freeway and transit improvements considered in the Preferred Alternative of OCTA's LRTP
    - OC Streetcar – The OC Streetcar Project is a proposed streetcar service that would travel between the Santa Ana Regional Transportation Center (SARTC) and Garden Grove. The streetcar is proposed to travel along an exclusive guideway or path on rails that are embedded in the pavement. The streetcar is proposed to travel primarily along Santa Ana Boulevard and along the Pacific Electric Right-of-Way.
    - Bus Rapid Transit (BRT) - These improvements include the Bus Rapid Transit projects along Harbor Boulevard, Bristol Street, and Westminster Avenue/17th Street.
- Modification of mode split for automobile, bicycle, and pedestrians to reflect new bicycle/pedestrian trips.

Exhibit 2.3 presents the current MPSH, which is consistent with the No Project Alternative. Exhibit 2.4 shows current MPAH designations. Exhibit 2.5 shows the Santa Ana Fixed Guideway (OC Streetcar) alignment.

Exhibit 2.3 Master Plan of Streets and Highways (MPSH)

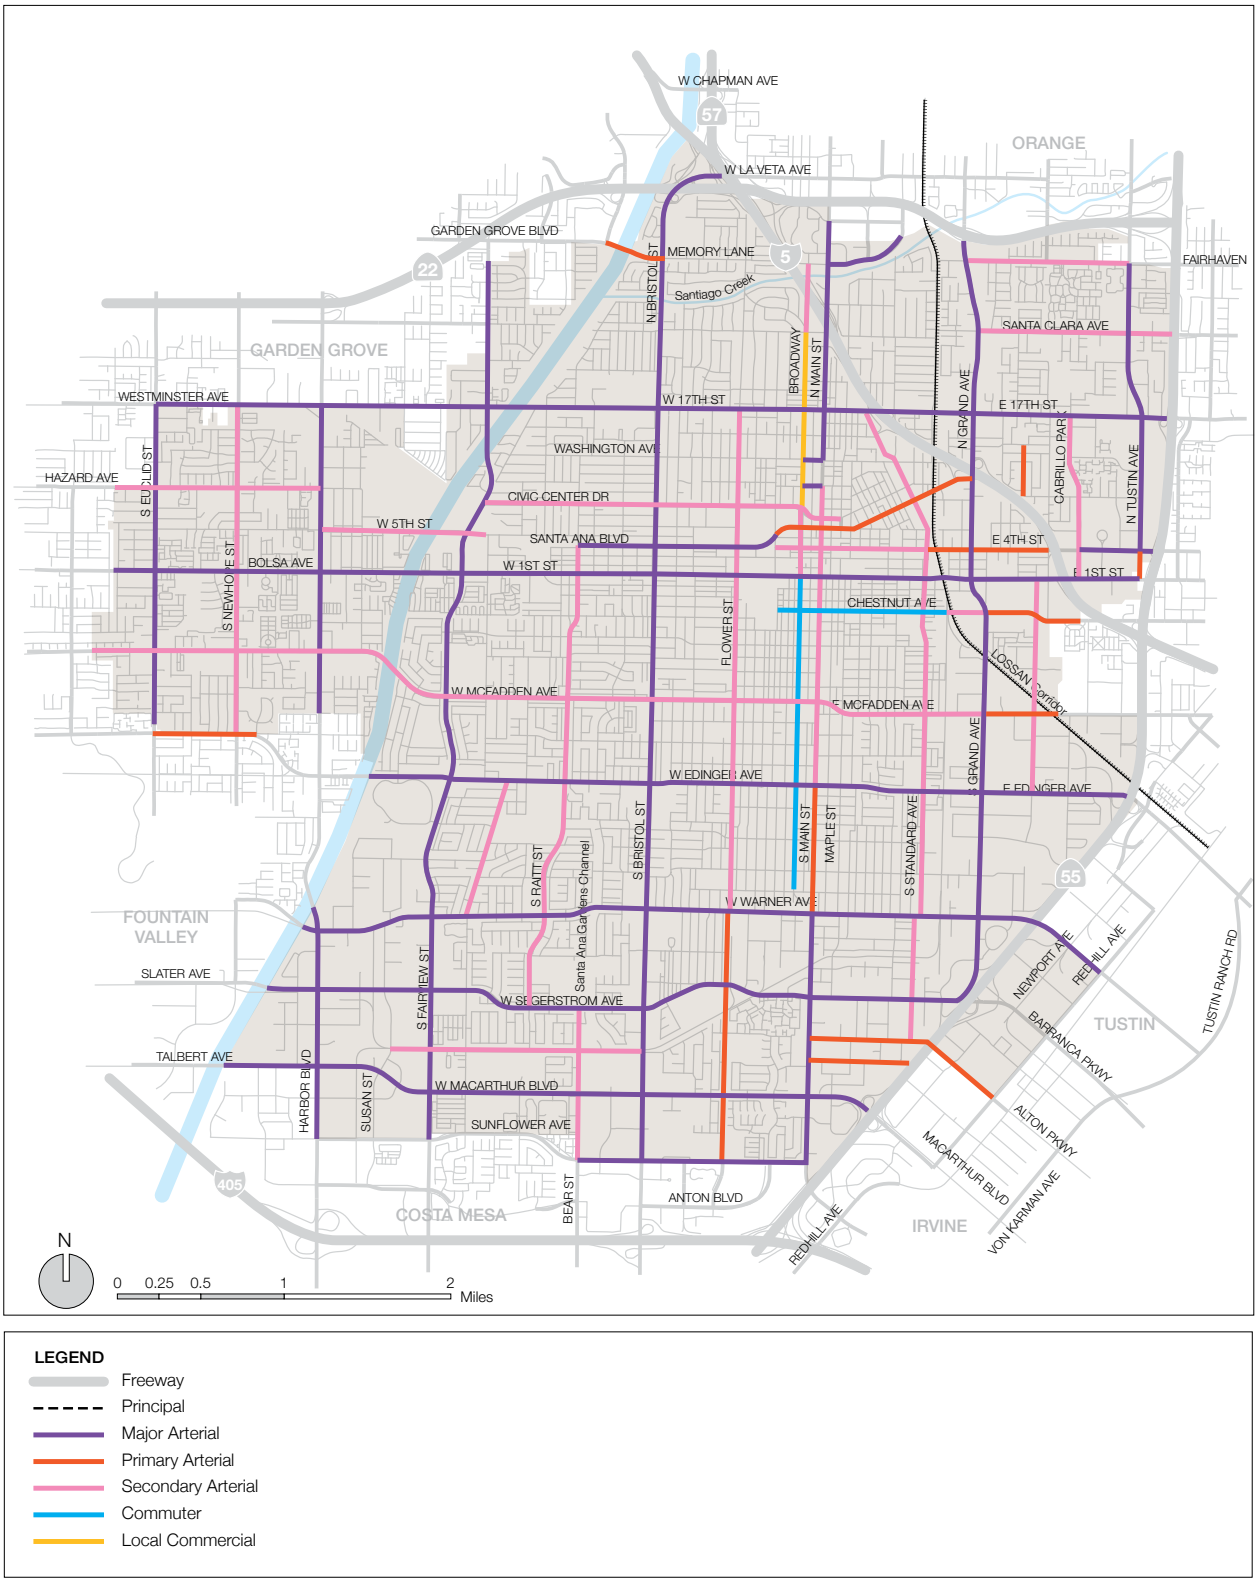

LEGEND

- Freeway
- Principal
- Major Arterial
- Primary Arterial
- Secondary Arterial
- Commuter
- Local Commercial

Exhibit 2.4 OCTA Master Plan of Arterial Highways (MPAH)



Exhibit 2.5 OC Streetcar Alignment



Source: Orange County Transportation Authority

2.7 FUTURE YEAR (2045) WITH PROJECT

This scenario is based on the Future Year (2045) No Project scenario, with modifications to both the transportation network and socio-economic data. Reclassifications to some roadways are proposed to facilitate the implementation of Complete Streets throughout the City as well as reconcile inconsistencies between the MPSH and MPAH. Additionally, this scenario considers the buildout of an updated Land Use Element for the General Plan.

The transportation network was developed through the evaluation of alternatives in the Circulation Element Update and in consideration of input provided by OCTA, Caltrans, and neighboring cities during outreach. This network is based on that of the No Project scenario, with the addition of the following modifications.

Classify the following streets as Divided Collector Arterials

- Santa Clara between Grand Avenue and SR-55 Freeway (currently Secondary)
- Flower Street between Warner Avenue and First Street (currently Secondary)
- Chestnut Avenue between Standard Avenue and East City Limit (currently Secondary/Primary)
- Raitt Street between Segerstrom and Santa Ana Boulevard (currently Secondary)
- Civic Center Drive between Fairview Street and Bristol Street (currently Secondary)
- Penn Way between I-5 on/off ramps and Washington Avenue (currently a secondary)
- Santiago Street between Washington Avenue and 6th Street (currently a secondary)
- Standard Avenue between 6th Street and Warner Avenue (currently a Secondary Arterial)
- Santa Ana Boulevard between French Street and Santiago Street (currently a Primary Arterial)
- Santa Ana Boulevard between Raitt and Flower (currently a Major)
- Cambridge Street between Fairhaven and SR-22 Freeway (currently Secondary)
- Hazard Avenue between Euclid and Harbor (currently Secondary)
- Halladay Avenue between Warner and Dyer (currently Secondary)
- McFadden Avenue between Harbor Blvd and Grand Ave (currently Secondary)
- Broadway between 1st and 17th (currently Secondary)
- 4th Street between French and Grand (currently Secondary/Primary)
- Fairhaven Avenue from Grand to Tustin (currently Secondary)

Classify the following streets as Primary Arterials

- Santa Ana Boulevard between Flower and Ross (currently a Major)
- 1st Street between Bristol Street and Tustin Avenue (currently Major)

Classify the following streets as Collector Arterials

- Civic Center Drive between French and Santiago (currently a Secondary Arterial)

Add the following streets to the MPAH as Divided Collector Arterials

- Greenville Street between Segerstrom Avenue and Warner Avenue

Add the following streets to the MPAH as Collector Streets

- Greenville Street between Edinger Avenue and Warner Avenue

Remove the following streets from the MPAH

- Flower Street between 17th Street and its northern terminus
- Logan Street between Civic Center Drive and Santa Ana Boulevard

Exhibit 2.6 presents the proposed street reclassifications. Exhibit 2.7 presents the With Project transportation network.


Exhibit 2.6 Proposed Arterial Roadway Reclassifications



LEGEND

- Freeway
- Classify as Primary Arterial
- Classify as Divided Collector Arterial
- Classify as Collector
- Classify as Local Street / Delete from MPAH Network

Exhibit 2.7 Proposed Santa Ana Circulation Element Transportation Network

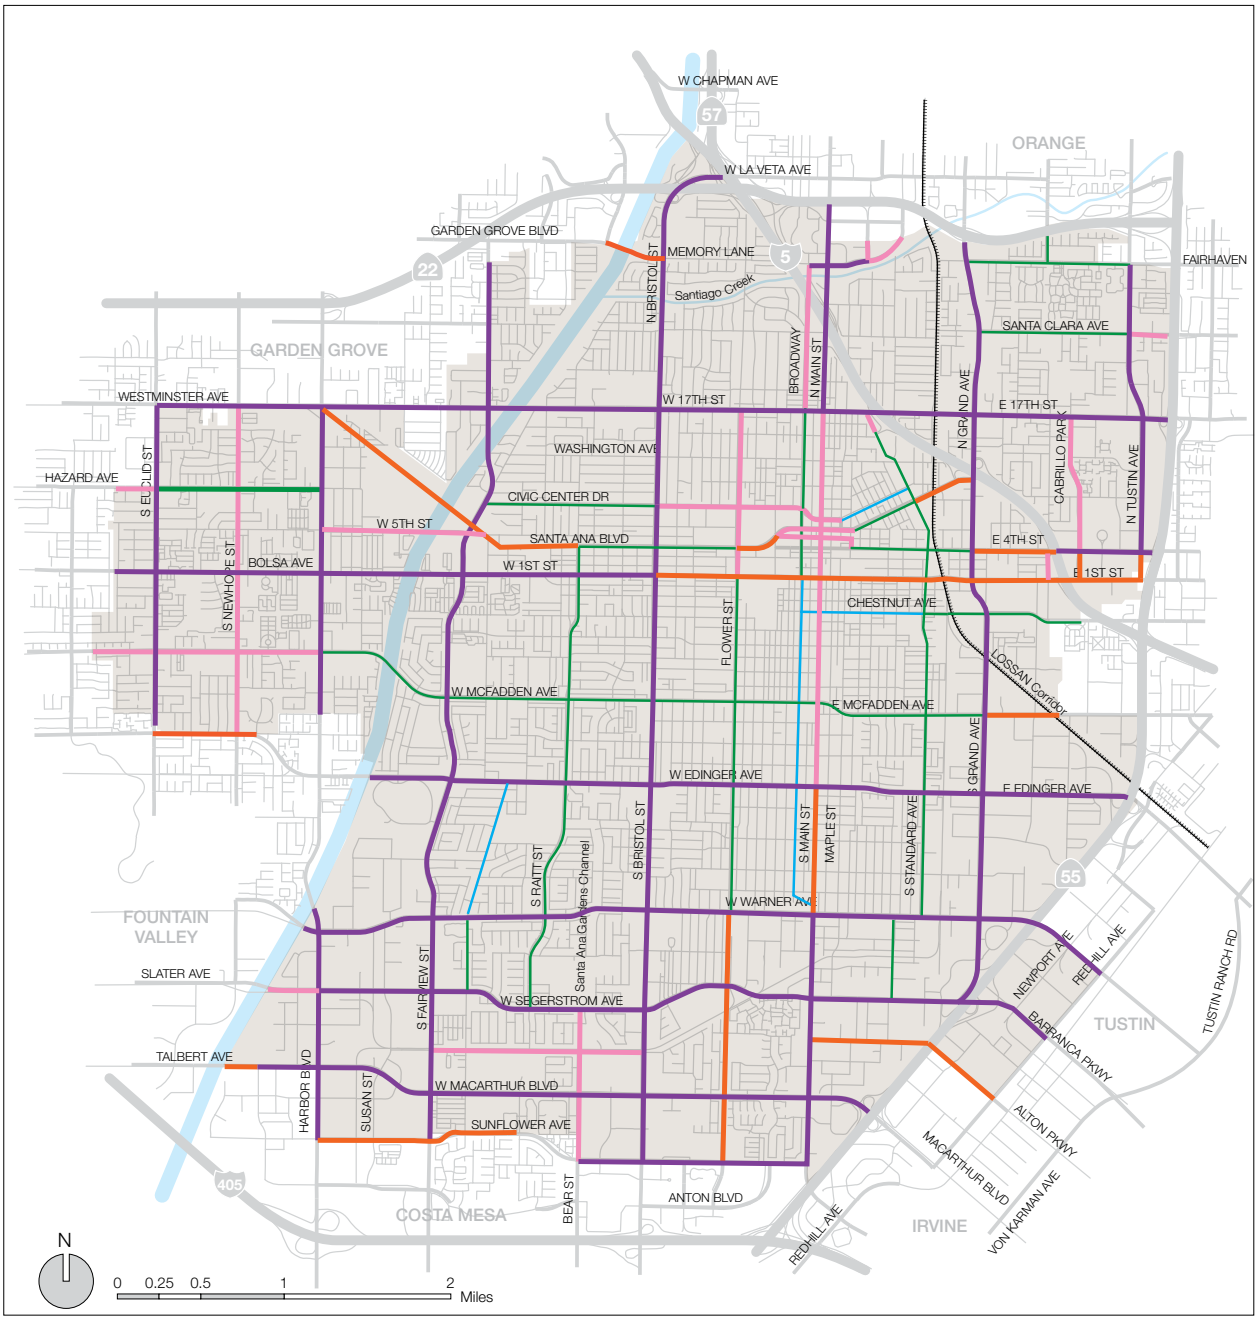

3.0 Analysis Methodology

The analysis methodology and impact criteria used in this analysis conform to the California Environmental Quality Act (CEQA) guidelines for a traffic impact analysis. CEQA identifies VMT as the preferred metric for identifying environmental impacts. Although VMT governs CEQA impacts, vehicle LOS is also assessed in order to address local operational performance and impacts. Additionally, roadway performance is assessed in order to monitor conformance with the Orange County Transportation Authority's (OCTA) Master Plan of Arterial Highways (MPAH) operational requirements.

Study intersections and roadway segments were assessed using the method specified by the City Santa Ana, Orange County Congestion Management Program (CMP) guidelines, and other governing agency guidelines. As such, intersections under the jurisdiction of the Cities of Santa Ana, Costa Mesa, Irvine, Tustin, Garden Grove, Fountain Valley, and Orange were assessed using the Intersection Capacity Utilization (ICU) method. Intersections under the jurisdiction of Caltrans were assessed using the Highway Capacity Manual 2000 method (HCM 2000).

3.1 VEHICLE MILES TRAVELED (VMT) ANALYSIS

The VMT analysis was prepared in conformance with the City of Santa Ana VMT Analysis Guidelines (VMT Guidelines; September 2019). The City's VMT Guidelines are based on the Office of Planning and Research's (OPR) Technical Advisory on Evaluating Transportation Impacts in CEQA (December 2018). A VMT analysis is to be conducted for land use and transportation projects that have the potential to increase the average VMT per service population (VMT/SP).

VMT is defined as the total miles traveled by vehicles (within a transportation network). Service population is described as the population generating the VMT of interest. A VMT analysis may be conducted for large-scale projects such as land use plans or individual transportation/development projects. For large-scale projects, it is appropriate to assess VMT impacts based on total VMT/SP. For individual projects, the VMT analysis may consider VMT and VMT/SP based on specific trip types (e.g. work-based trips) and the corresponding population which generates said VMT (e.g. employees).

VMT was generated with data from OCTAM 5.0 using the full-accounting, origin-destination (OD) methodology. The full-accounting, origin-destination methodology considers the VMT generated by all internal-internal (I-I), internal-external (I-X), and external-internal (X-I) trips. These trip types refer to trips that include an origin and/or destination within the study areas (City of Santa Ana and Orange County). For example, an internal-internal trip refers to a trip which begins in the City and also ends in the City; an internal-external trip refers to a trip which begins in the City but ends outside of the City; an external-internal trip refers to a trip which begins outside of the City but ends in the City. It should be noted that while the majority of trips are captured in their entirety, a small portion are cut off at the OCTAM 5.0 boundaries. Thus, while the number of trips to and from the City of Santa Ana which cross the model boundary are known at various locations along major access points (highways, freeways, etc.) the trip length past the OCTAM 5.0 boundary is not.

In order to account for the VMT generated by the portions of trips outside the model boundaries, trip length assumptions were developed. These assumptions are based on the destinations/attractions near the model boundary as well as likely attractions/destinations beyond the immediate developments near the boundary limits. For example, northbound and southbound trips along I-5 at the San Diego County Line were assigned a trip length of 20 miles past the model's southern boundary (the San Diego County Line). This assumption is intended to provide a general account for VMT which considers trips to various locations such as Camp Pendleton, the US-Mexico Border, and various cities within San Diego County. Trip lengths of zero (0) miles are assigned to those trips which are not considered to extend further than 5 miles past the OCTAM boundary; due to the approximate boundary of the model, it would not be appropriate to pursue such a level of accuracy. A summary of the trip length assumptions to/from major OCTAM 5.0 boundary access points is provided below:

- SR-101 near Ventura (20 miles)
- SR-150 near Ojai (0 miles)
- SR-33 near Ventura (0 miles)
- I-5 near Santa Clarita (50 miles)
- SR-14 near Santa Clarita (20 miles)
- I-15 north of I-215 (50 miles)
- I-10 near Banning (30 miles)
- SR-243 south of Banning (10 miles)
- SR-74 east of Hemet (20 miles)
- SR-79 near Temecula (20 miles)
- I-15 near Temecula (0 miles)
- I-5 at San Diego County Line (20 miles)

Due to the nature and scale of the proposed project, the analysis considers the total VMT and service population which consists of the aggregate of total employees and population within the study area. When aggregating employees and residents, an employee reduction factor was applied to account for overlaps in the two (employees who are also residents). Reduction factors were applied to both the City of Santa Ana and County of Orange employees then aggregated to the resident population. Reduction factors are based on employment data within the Southern California Association of Governments (SCAG) Local Profiles Reports (2019) for the City of Santa Ana and Orange County. The SCAG reports show that 20.8% of employees within the City are also residents of the City and that 65.3% of employees within the County are also residents of the County.

VMT and VMT/SP is provided for all scenarios. Existing year (2020) VMT, SP, and VMT/SP values were developed through linear interpolation of 2016 and 2045 baseline OCTAM scenarios. This method was chosen due to the availability of consistent VMT and socio-economic data (SED) used to derive VMT/SP. Although existing year (2020) SED is available, it does not have an accompanying VMT dataset since there is no baseline OCTAM roadway/highway network for existing year (2020) conditions. Therefore, the traffic study uses both interpolated VMT and SED based on OCTAM 2016 baseline and the 2045 forecasts to develop the existing year (2020) values.

Per the City of Santa Ana Traffic Impact Study Guidelines (2019), the project should be screened to determine the need for a full VMT analysis based on the following screening criteria. Firstly, two conditions should be considered:

- Does the project have the potential to reduce VMT/SP?
- Is the project consistent with the Regional Transportation Plan (RTP) / Sustainable Communities Strategy's (SCS)?

If both conditions are met, then a project may be precluded from a full VMT analysis if any of the following criteria are met:

- Projects which serve the local community and have the potential to reduce VMT, such as neighborhood K-12 schools and local-serving retail less than 50,000 square feet (Charter schools are excluded from this criteria.
- Projects that generate less than 110 net daily trips.
- Projects located within Transit Priority Areas (TPAs)
- Projects located in a low-VMT generating Traffic Analysis Zone (TAZ).
    - Proposed land use shall be consistent with the existing land use generating the low VMT/SP.
    - Proposed land use shall be consistent with the RTP/SCS assumptions or decreases VMT/SP compared to RTP/SCS.

The criteria above are presented in a compact manner. Detailed criteria descriptions and supporting material are provided in the City of Santa Ana Traffic Impact Study Guidelines (2019).

VMT impacts are assessed for the Future Year (2045) With Project scenario, based on changes from both the Existing Year (2020) and Future Year (2045) No Project scenarios. VMT impact thresholds for land use plans (such as General Plans and Specific Plans) are listed below:

- Project Level Impact
    - A project is considered to have a significant impact if the project VMT/SP (for the land use plan) exceeds 15% below the existing total daily VMT/SP for the County; or
- Cumulative Impact
    - A project is considered to have a significant impact if the project results in a negative effect on VMT/SP at the citywide level (City VMT/SP is higher with the project than without it.

Where an impact is identified, the project's VMT/SP should be mitigated to be at or less than 15% below the existing Countywide VMT/SP. Mitigation measures may include changes to the project, implementation of transportation demand management (TDM) measures, impact fees, a mitigation exchange, or any other measure approved by the City's Traffic Engineering Division and Planning Department.

3.2 ROADWAY LEVEL OF SERVICE ANALYSIS

Roadway performance was assessed based on the volume-to-capacity (V/C) ratio, as specified in the Santa Ana Circulation Element (1998). The V/C ratio is calculated by dividing the roadway volume by the capacity of the roadway. Roadway capacities are presented in Table 3-1 and resemble those presented in the Santa Ana Circulation Element. The Santa Ana Circulation Element, however, does not provide roadway capacities for the Divided Collector and five-lane divided arterial roadway types. Capacities for the Divided Collector roadway were taken from the Orange County Master Plan of Arterial and Highways (OC MPAH); capacities for the five-lane divided arterial roadway were developed by averaging the capacities of the Major and Primary Arterial roadway types. The capacities shown

correspond to the maximum volume that can be experienced in order to achieve the corresponding level of service (LOS). Therefore, a volume greater than that listed in the column labeled "LOS E" will result in LOS F. The minimum level of service for roadways in the City of Santa Ana is LOS D, per the Circulation Element (1998). The OC MPAH suggests a minimum LOS of C be maintained for roadways, with the intent of maintaining LOS D through intersections. Descriptions of operation and the range of volume-to-capacity ratios for each LOS grade are presented in Table 3-2.

Table 3-1 Roadway Capacity and LOS

CLASSIFICATION	LANES	LOS A	LOS B	LOS C	LOS D	LOS E
Principal Arterial	8D	45,000	52,500	60,000	67,500	75,000
Major Arterial	6D	33,900	39,400	45,000	50,600	56,300
Major / Primary Arterial	5D	28,200	32,850	37,500	42,200	46,900
Primary Arterial	4D	22,500	26,300	30,000	33,800	37,500
Secondary Arterial	4U	15,000	17,500	20,000	22,500	25,000
Divided Collector	2D	9,000	12,000	15,000	20,000	22,000
Collector	2U	7,500	8,800	10,000	11,300	12,500

Sources: City of Santa Ana, General Plan – Circulation Element (1998); Orange County Master Plan of Arterials and Highways (2017).

3.3 INTERSECTION LEVEL OF SERVICE ANALYSIS

Study intersections were assessed using the methodology described in the governing agency's traffic impact analysis guidelines. As such, intersections were assessed using the Intersection Capacity Utilization (ICU) methodology or the Highway Capacity Manual 2000 method (HCM 2000). A description of each as well as the level of service criteria is provided in the following sections.

3.3.1 ICU Methodology

Signalized intersections under the jurisdiction of the Cities of Santa Ana, Costa Mesa, Orange, Irvine, Tustin, and Fountain Valley were assessed using the ICU methodology. The ICU methodology is based on intersection V/C ratio. The V/C ratio value for each movement is the observed volume divided by the saturation flow volume. The intersection ICU value is the sum of the V/C values for the critical movement on each leg, where critical movements are the pairs of conflicting movements with the highest combined V/C values. ICU is expressed as a decimal value (e.g. 0.74), where 1.00 represents the saturated condition where the volume of traffic flow is equal to the capacity. LOS descriptions and their corresponding ranges of V/C ratios are provided in Table 3-2.

This study uses maximum saturation volumes of 1,600 vehicles per hour per lane (VPHPL) for turn lanes and 1,700 VPHPL for through lanes. A 5% loss time per cycle length was applied.

Table 3-2 ADT / ICU Level of Service Descriptions

LOS	V/C	Definition
A	0.00 – 0.60	Free Flow. Individual users are virtually unaffected by the presence of others in the traffic stream. Freedom to select desired speeds and to maneuver within the traffic stream is extremely high. The general level of comfort and convenience provided to the motorist, passenger, or pedestrian is excellent.
B	0.61 – 0.70	Stable flow. The presence of other users in the traffic stream begins to be noticeable. Freedom to select desired speeds is relatively unaffected, but there is a slight decline in the freedom to maneuver within the traffic stream with LOS A. The general level of comfort and convenience provided is somewhat less than that of LOS A, because the presence of others in the traffic stream begins to affect individual behavior.
C	0.71 – 0.80	Stable flow. This LOS marks the beginning of the range of flow in which the operation of individual users becomes significantly affected by interactions with others in the traffic stream. The selection of speed is affected by the presence of others, and maneuvering within the traffic stream requires substantial vigilance on the part of the user. The general level of comfort and convenience declines noticeably at this level.
D	0.81 – 0.90	High density, but stable flow. Speed and freedom to maneuver are severely restricted, and the drive or pedestrian experiences a generally poor level of comfort and convenience. Small increases in traffic flow will generally cause operational problems at this level.
E	0.91 – 1.00	Operating conditions at or near the capacity level. All speeds are reduced to a slow but relatively uniform value. Freedom to maneuver within the traffic stream is extremely difficult, and generally accomplished by forcing a vehicle or pedestrian to "give way" to accommodate such maneuvers. Comfort and convenience levels are extremely poor, and drivers or pedestrian frustration is generally high. Operations at this level are usually unstable because small increases in flow or minor variations within the stream will cause a breakdown.
F	> 1.00	Forced or breakdown flow. This condition exists wherever the amount of traffic approaching a point exceeds the amount which can traverse that point. Queues form up behind such locations as arrival flow exceeds discharge flow.

Source: City of Santa Ana, General Plan – Circulation Element, 1998

3.3.2 Highway Capacity Manual (HCM) Methodology

Study intersections that are Caltrans operated intersections were evaluated using the Highway Capacity Manual 2000 (HCM 2000) Operations methodology consistent with Caltrans guidelines. Chapter 16 of the Highway Capacity Manual (HCM) 2000 contains the operations methodology for signalized intersections, which evaluates LOS based on controlled delay per vehicle. Controlled delay is defined as the portion of the total delay attributed to the traffic signal operation including deceleration delay, queue move-up time, stopped delay, and final acceleration delay. Consistent with HCM 2000 methodology the maximum saturation flow rate for intersections analyzed using HCM 2000 is 1,900 VPHPL. The relationship between controlled delay per vehicle and LOS for signalized intersections is summarized in Table 3-3.

Table 3-3 HCM 2000 Level of Service Descriptions

LOS	Description of Traffic Conditions	Delay (sec/veh)
A	Insignificant delays: no approach phase is fully utilized and no vehicle waits longer than one red indication.	≤ 10
B	Minimal delays: an occasional approach phase is fully utilized. Drivers begin to feel restricted.	> 10 – 20
C	Acceptable delays: major approach phase may become fully utilized. Most drivers feel somewhat restricted.	> 20 – 35
D	Tolerable delays: drivers may wait through more than one red indication. Queues may develop but dissipate rapidly, without excessive delays.	> 35 – 55
E	Significant delays: volumes approaching capacity. Vehicles may wait through several cycles and long vehicle queues form upstream.	> 55 – 80
F	Excessive delays: represents conditions at capacity, with extremely long delays. Queues may block upstream intersections.	> 80

Source: Highway Capacity Manual, Transportation Research Board, 2000.

Unsignalized intersections were evaluated using the methodology described in Chapter 17 of the HCM. The criteria for unsignalized intersections have different threshold values than do those for signalized intersections because drivers expect signalized intersections to carry higher traffic volumes, so higher levels of control delay are acceptable. The relationship between controlled delay per vehicle and LOS for unsignalized intersections is summarized in Table 3-4.

Table 3-4 Level of Service for Unsignalized Intersections

LOS	Control Delay (sec/veh)
A	≤ 10
B	> 10 – 15
C	> 15 – 25
D	> 25 – 35
E	> 35 – 50
F	> 50

Source: Highway Capacity Manual, Transportation Research Board, 2000. Exhibit 17-22

The intersection Level of Service analysis for this report was performed using TRAFFIX software. TRAFFIX is a network-based interactive computer program that enables calculation of levels of service at signalized and unsignalized intersections for multiple locations and scenarios. TRAFFIX also calculates signal timing (green times and cycle lengths) and maximum queue lengths to assist in evaluating signalized intersections.

3.4 INTERSECTION LOS AND SIGNIFICANT IMPACT CRITERIA

3.4.1 Cities of Santa Ana, Costa Mesa, Fountain Valley, and Orange

The minimum LOS for intersections in the Cities of Santa Ana, Costa Mesa, and Fountain Valley is LOS D. Impacts are considered significant if:

- An intersection degrades from an acceptable LOS (LOS D or better) to an unacceptable LOS (LOS E or F) during the peak hours; or
- The project increases traffic demand at the study intersection by 1% of capacity (0.01) if the intersection already operates at an unacceptable level (LOS E or F).

3.4.2 City of Tustin

The minimum LOS for intersections in the City of Tustin is LOS D. Significant impacts are not explicitly outlined, but the preservation of the minimum LOS with and without the project is required. Therefore, a significant impact can be assumed to occur if:

- An intersection is expected to operate at an unacceptable LOS (LOS E or F) in the With Project scenario; an effort to return the intersection LOS to an acceptable level is to be made.

3.4.3 City of Irvine

The minimum LOS for intersections in the City of Irvine is LOS D. Impacts are considered significant if:

- An intersection degrades from an acceptable LOS (LOS D or better) to an unacceptable LOS (LOS E or F) during the peak hours; or
- An intersection is operating at an unacceptable LOS (LOS E or F) and experiences an increase in V/C of 0.02 or more.

3.4.4 Orange County Congestion Management Program

The minimum LOS for intersections part of the Orange County Congestion Management Program (OC CMP) establishes LOS E as the minimum level of operation for CMP roadways (freeways and Smart Streets). Impacts are considered significant if:

- An intersection degrades from an acceptable LOS (LOS E or better) to an unacceptable LOS (LOS F) during the peak hours; or
- The project increases traffic demand at the study intersection by 10% of capacity (0.10) if the intersection already operates at an unacceptable level (LOS F)

OC CMP intersections included in this analysis are:

- INT 6 – Harbor Boulevard and SR-22 WB Off-Ramp / Banner Drive
- INT 9 – Harbor Boulevard and 1st Street
- INT 12 – Harbor Boulevard and Warner Avenue
- INT 17 – Harbor Boulevard and I-405 NB Off-Ramp
- INT 18 – Harbor Boulevard and I-405 SB Off-Ramp
- INT 87 – Mabury Street and 1st Street
- INT 95 – SR-55 SB Ramps / Auto Mall Drive and Edinger Avenue

3.4.5 Caltrans

The minimum LOS for Caltrans intersections is LOS C. Impacts are considered significant if:

- An intersection degrades from an acceptable LOS (LOS C or better) to an unacceptable LOS (LOS D or worse) during the peak hours; or
- Any increase in delay is expected at an intersection already operating at an unacceptable LOS.

3.5 TRAFFIC VOLUMES

This study assesses both roadway and intersection performance for all existing and future year scenarios. Roadway and intersection counts were utilized to determine existing year (2020) average daily traffic (ADT) on study roadway segments and peak hour turning movement counts at study intersections. To determine future year (2045) volumes, an annual growth rate applied to existing traffic volumes was developed through the Orange County Transportation Analysis Model (OCTAM). The traffic volume development procedure is further detailed in the following sections.

3.5.1 Traffic Count Data

Roadway ADT was taken from the City of Santa Ana count database, with counts conducted in September and October 2019. A compound annual growth rate of 1% was applied to the ADT volumes to bring them to levels consistent with those expected in the year 2020.

Intersection turning movement volumes are provided by recent count data and supplemented with historical count data. Updated traffic counts for the year 2020 were in the process of being scheduled and conducted when widespread closures of schools, businesses, and other facilities were ordered due to the onset of the COVID-19 pandemic, disrupting normal traffic patterns. As a result, updated counts were only partially conducted and were supplemented with historic count data. Where they were able to be conducted, updated counts were conducted during the morning peak period (6:00 AM to 9:00 AM) and the afternoon peak period (4:00 PM to 7:00 PM). The AM and PM peak hour analyses are based on the hour of highest total intersection volume during the morning and afternoon peak periods. A compound annual growth rate (CAGR) of 1% was applied to the volumes for traffic counts conducted prior to 2020 to bring them to levels consistent with those expected in the year 2020. The CAGR 1% was selected based on comparisons of historical ADT data for various locations throughout the City. An inventory of intersection count data is provided in Table 3-5.

3.5.2 Travel Demand Forecasting

The horizon year 2045 volumes were derived based on existing peak hour count data and forecast link volumes obtained from the Orange County Transportation Analysis Model (OCTAM) version 5.0. OCTAM 5.0 is the accepted sub-regional model for forecasting travel demand in Orange County, and is based on socioeconomic data from Orange County Projections 2018. Growth factors for each intersection approach and departure were interpolated from OCTAM forecast for the 2016 and 2045 baseline scenarios. These growth factors were then applied to existing counts to forecast future turning movement volumes. OCTAM 5.0 was recently updated by OCTA and this traffic analysis update utilizes this new TransCad version of the model.

Table 3-5 Intersection Count Inventory

ID	INTERSECTION	COUNT YEAR
1	Euclid Street and Bolsa Avenue	2019
2	Euclid Street and McFadden Avenue	2016
3	Euclid Street and Edinger Avenue	2019
4	Newhope Street and Hazard Avenue	2016
5	Newhope Street and McFadden Avenue	2016
6	Harbor Boulevard and SR-22 WB Off-Ramp / Banner Drive	2016
7	Trask Avenue and SR-22 EB On-Ramp	2013
8	Harbor Boulevard and Westminster Avenue	2019
9	Harbor Boulevard and 1st Street	2019
10	Harbor Boulevard and McFadden Avenue	2016
11	Harbor Boulevard and Edinger Avenue	2019
12	Harbor Boulevard and Warner Avenue	2019
13	Harbor Boulevard and Segerstrom Avenue	2016
14	Hyland Avenue / OCTA Bus Base and MacArthur Boulevard	2016
15	Harbor Boulevard and MacArthur Boulevard	2019
16	Harbor Boulevard and Sunflower Avenue	2016
17	Harbor Boulevard and I-405 NB Off-Ramp	2019
18	Harbor Boulevard and I-405 SB Off-Ramp	2019
19	Fairview Street and Civic Center Drive	2016
20	Fairview Street and 1st Street	2018
21	Fairview Street and McFadden Avenue	2016
22	Fairview Street and Edinger Avenue	2019
23	Fairview Street and Warner Avenue	2016
24	Fairview Street and MacArthur Boulevard	2019
25	Fairview Road and Sunflower Avenue	2016
26	Greenville Street and Edinger Avenue	2017
27	Greenville Street and Segerstrom Avenue	2017
28	Raitt Street and McFadden Avenue	2016
29	Raitt Street and Edinger Avenue	2016
30	Bear Street and MacArthur Boulevard	2017
31	Bristol Street and 17th Street	2019
32	Bristol Street and Civic Center Drive	2016

ID	INTERSECTION	COUNT YEAR
33	Bristol Street and Santa Ana Boulevard	2016
34	Bristol Street and 1st Street	2019
35	Bristol Street and McFadden Avenue	2017
36	Bristol Street and Warner Avenue	2019
37	Bristol Street and Segerstrom Avenue	2016
38	Bristol Street and Alton Avenue	2017
39	Bristol Street and MacArthur Boulevard	2017
40	Bristol Street and Sunflower Avenue	2016
41	Bristol Street and I-405 NB Ramps	2018
42	Bristol Street and I-405 SB Ramps	2018
43	Flower Street and Santa Ana Boulevard	2016
44	Flower Street and 1st Street	2017
45	Flower Street and McFadden Avenue	2016
46	Flower Street and Segerstrom Avenue	2016
47	Flower Street and MacArthur Boulevard	2016
48	Main Street and La Veta Avenue	2018
49	Main Street and Mainplace Drive / Memory Lane	2019
50	Main Street and 17th Street	2019
51	Main Street and Civic Center Drive	2016
52	Main Street and Santa Ana Boulevard	2016
53	Main Street and 4th Street	2016
54	Main Street and 1st Street	2019
55	Main Street and McFadden Avenue	2016
56	Main Street and Edinger Avenue	2019
57	Main Street and MacArthur Boulevard	2019
58	Penn Way and 17th Street	2017
59	Santiago Street / I-5 NB Ramps and 17th Street	2016
60	Penn Way and I-5 SB Ramps	2017
61	Santiago Street and Civic Center Drive	2017
62	Santiago Street and Santa Ana Boulevard	2016
63	Standard Avenue and 4th Street	-
64	Standard Avenue and 1st Street	2017
65	Standard Avenue and McFadden Avenue	2018

ID	INTERSECTION	COUNT YEAR
66	Halladay Street and Warner Avenue	2016
67	Halladay Street and Dyer Road	2019
68	SR-55 SB Ramps and MacArthur Boulevard	2019
69	SR-55 NB Ramps and MacArthur Boulevard	2019
70	SR-55 SB Ramps and Dyer Road	2019
71	Glassell Street and La Veta Avenue	2016
72	Glassell Street and SR-22 WB Ramps	2016
73	Glassell Street / Grand Avenue and SR-22 EB Ramps	2016
74	Grand Avenue and Fairhaven Avenue	2016
75	Grand Avenue and Santa Clara Avenue	2017
76	Grand Avenue and 17th Street	2019
77	Grand Avenue and I-5 NB Ramps	2017
78	Grand Avenue and Santa Ana Boulevard	2017
79	Grand Avenue and 1st Street	2019
80	Grand Avenue and Chestnut Avenue	2016
81	Grand Avenue and McFadden Avenue	2016
82	Grand Avenue and Edinger Avenue	2019
83	Grand Avenue and Warner Avenue	2019
84	SR-55 NB Ramps and Dyer Road	2019
85	Cambridge Street and La Veta Avenue	2016
86	Cambridge Street and Fairhaven Avenue	2020
87	Mabury Street and 1st Street	2020
88	Tustin Street and La Veta Avenue	2020
89	Tustin Street and SR-22 WB On-Ramp	2020
90	Tustin Street and SR-22 EB Off-Ramp / Seba Avenue	2020
91	Tustin Street and Fairhaven Avenue	2020
92	Tustin Avenue and Santa Clara Avenue	2020
93	Tustin Avenue and 17th Street	2020
94	Tustin Avenue and 4th Street	2020
95	SR-55 SB Ramps / Auto Mall Drive and Edinger Avenue	2020
96	SR-55 NB Ramps / Del Amo Avenue and Newport Avenue	2020
97	Red Hill Avenue and Edinger Avenue	2020
98	Red Hill Avenue and Warner Avenue	2020

ID	INTERSECTION	COUNT YEAR
99	Red Hill Avenue and Barranca Parkway	2020
100	Red Hill Avenue and Alton Parkway	2020
101	Red Hill Avenue and MacArthur Boulevard	2020
102	Red Hill Avenue and Main Street	2020
103	I-5 SB Ramps and Santa Ana Boulevard	2017
104	Tustin Ranch Road and Warner Avenue	2020
105	Von Karman Avenue and Barranca Parkway	2020

4.0 Existing Year (2020) Conditions

The project study area includes arterial roadways and signalized intersections in the vicinity of the project corridor. Descriptions of geometrical features and intersection level of service analysis results for the year 2020 are included in this section.

4.1 EXISTING ROADWAY NETWORK

Selected arterials that are located in the vicinity of the project corridor are described in this section. Items of note include existing geometry, pedestrian and bicycle facilities, and adjacent land uses.

Euclid Street is classified as a Major Arterial that travels north and south through the study area. Within the study area, there are three travel lanes in each direction with a striped center median functioning as a two-way left-turn lane. Euclid Street is five lanes (2 northbound and 3 southbound) south of Davit Avenue. The posted speed limit is 45 miles per hour. On-street parking is not permitted and no bike facilities are provided. OCTA provides service along this corridor via Route 37 at approximately 30 minute headways.

Newhope Street is classified as a Secondary Arterial that travels north and south on the west end of Santa Ana. Within the study area, there are two travel lanes in each direction with a striped center median functioning as a two-way left-turn lane. The posted speed limit is 40 miles per hour. On-street parking is generally not permitted north of McFadden Avenue, except between 1st Street and 5th Street. Class II bike lanes were recently implemented between Westminster Avenue and McFadden Avenue. There are currently no bus routes that serve this corridor.

Hazard Avenue is classified as a Secondary Arterial that travels east and west through the study area. Within the study area, there are two travel lanes in each direction with a striped center median functioning as a two-way left-turn lane. Hazard Avenue transitions to a Divided Collector west of Harbor Boulevard, and Undivided Collector east of Harbor Boulevard. Limited on-street parking is permitted adjacent to Rosita Park. The posted speed limit is 35 miles per hour and 25 miles per hour near the school zone. No bus routes or bike facilities are provided along this corridor.

McFadden Avenue is classified as a Secondary Arterial (between Euclid Street and Grand Avenue) and a Primary Arterial (east of Grand Avenue) that travels east and west through the study area. Within the study area, there are two travel lanes in each direction with a striped center median functioning as a two-way left-turn lane and a raised, landscaped median on occasion. McFadden Avenue narrows to a two-lane undivided roadway between Bristol Street and Standard Avenue. The posted speed limit is 30-45 miles per hour. On-street parking is permitted along parts of the corridor. Bike lanes are provided west of Harbor Boulevard. OCTA provides service along this corridor via Route 66 and Route 145 at approximately 15-45 minute headways.

Harbor Boulevard is classified as a Major Arterial that travels north and south through the study area. Within the study area, there are three travel lanes in each direction with a raised, landscaped median. The posted speed limit is 40-45 miles per hour. On-street parking is not permitted and limited bike facilities are provided. OCTA provides service along this corridor via Route 43 and Route 543 at approximately 15-20 minute headways.

Fairview Avenue is classified as a Major Arterial that travels north and south through the study area. Within the study area, there are three lanes in each direction with a raised, landscaped median. Fairview Avenue transitions to a five-lane divided roadway then a Primary Arterial north of Civic Center Drive. The posted speed limit is 45 miles per hour. On-street parking is not permitted and bike facilities are not provided. OCTA provides service along this corridor via Route 47 at approximately 15 minute headways.

Civic Center Drive is classified as a Secondary Arterial that travels east and west through the study area. Within the study area, Civic Center Drive is a four-lane undivided roadway; Civic Center Drive becomes a four-lane divided with bike facilities east of Bristol Street until Broadway. It is a four-lane

divided road until Minter Street and then becomes a two-lane undivided. The posted speed limit is 35 miles per hour, unless otherwise noted to be 25 miles per hour in a school zone. On-street parking is allowed along some sections of Civic Center Drive. On-street parking is permitted along certain segments. There are some bike lanes or bike routes provided along this roadway. OCTA provides service along this corridor via Routes 83, 145, and 862 with headways of approximately 30 minutes for each route.

MacArthur Boulevard is classified as a Major Arterial that travels east and west through the study area. Within the study area, there are three travel lanes in each direction with a raised, landscaped median. MacArthur Boulevard is classified as a Primary Arterial west of Hyland Avenue. The posted speed limit is 40 miles per hour. On-street parking is not permitted throughout the corridor and there are currently no bike facilities provided. OCTA operates four bus routes along this corridor via Routes 53, 55, 76 and 173. Headways range between every 10 minutes for Route 53, 30 minutes for Route 55, 60 minutes for Route 76, and 45 minutes for Route 173.

Raitt Street is classified as a Secondary Arterial that travels north and south through the study area. Between MacArthur Boulevard and Edinger Avenue, Raitt Street is a four-lane divided roadway. Between Edinger Avenue and Myrtle Street, Raitt Street is a four-lane undivided roadway. Then from Myrtle Street to 1st Street it is a two-lane divided roadway. Between First Street and Washington Avenue, Raitt Street narrows down to a two-lane undivided roadway. The speed limit is limited to 25 miles per hour in school zones and 35-40 miles per hour outside of the school zone. On-street parking is permitted along the west side of the street between McFadden Avenue and Edinger Avenue and on both sides of the street north of McFadden Avenue to Richland Avenue. Currently bike facilities are not provided along this roadway. OCTA operates Route 145 approximately every 45 minutes during peak operation.

1st Street is classified as a Major Arterial that travels east and west through the study area. Within the study area, there are three lanes in each direction with a raised, landscaped median. The posted speed limit is 40 miles per hour. On-street parking is not permitted along this corridor. There are currently no bike lanes or bike routes provided. OCTA provides service along this corridor via Route 64 at approximately 15 minute headways.

Bristol Street is classified as a Major Arterial that travels north and south through the study area. Within the study area, there are three travel lanes in each direction with a raised, landscaped median. The posted speed limit is 40 miles per hour. Bikeways exist between 17th Street and Edinger Avenue. On-street parking is not permitted along this corridor. OCTA provides service along this corridor via Route 57 at approximately 30 minute headways.

17th Street/ Westminster Avenue is classified as a Major Arterial traveling east and west through the northern region in Santa Ana. There are three lanes in each direction divided by a center median. The posted speed limit is 40 miles per hour. On-street parking is not permitted and there are currently no bike facilities provided along the corridor. Several OCTA bus routes serve this corridor, including Routes 51 and 60 with approximately 15-20 minute headways.

Santa Ana Boulevard is classified as a Major Arterial (between Raitt Street and Ross Street) and a Primary Arterial (between Ross Street and Grand Avenue). The roadway fluctuates between a four-lane undivided roadway (Raitt Street to Flower Street), six-lane divided roadway (Flower Street to Ross Street and Santiago Street to Grand Avenue), and a three-lane one-way roadway (Ross Street to French Street). On-street parking is permitted along certain segments of the corridor. There are currently no bike lanes or bike routes provided. The posted speed limit is 35 miles per hour. Several OCTA bus routes serve this corridor, including Routes 83, 145, and 206 with approximately 30-45 minute headways.

Segerstrom Avenue is classified as a Major Arterial that travels east and west through the study area. Segerstrom Avenue is a six-lane divided roadway between Susan Street and Harbor Boulevard and a four-lane divided roadway along the rest of the corridor. The posted speed limit is 40 miles per hour.

On-street parking is not permitted and there are currently no bike facilities provided along this corridor. There are currently no transit services that operate along Segerstrom Avenue within the study area.

Memory Lane is classified as a Major Arterial that travels east and west through the study area. There are three travel lanes in each direction with a raised, landscaped median. The posted speed limit is 40 miles per hour. On-street parking is not permitted along this roadway. Class II bike lanes are provided between Bristol Street and Flower Street. OCTA provides service along this corridor via Route 453 at approximately 30 minute headways.

Tustin Avenue is classified as a Major Arterial that travels north and south parallel to the SR-55 Freeway. There are three travel lanes in each direction with a striped center median. The posted speed limit is 40 miles per hour. On-street parking is not permitted and bike lanes are not available along Tustin Avenue. Two OCTA bus routes operate along Tustin Avenue. Routes 60 and 71 operate at frequencies of 45 minutes and 1 hour respectively.

Warner Avenue is classified as a Major Arterial that travels east and west through the study area. Within the study area, Warner Avenue is a four-lane undivided roadway. The posted speed limit is 40-45 miles per hour. On-street parking is not permitted and there are currently limited bike lanes provided along the corridor. There are two OCTA bus routes that serve Warner Avenue in the study area. Routes 72 and 463 operate with headways at approximately 20-60 minutes.

Edinger Avenue is classified as a Major Arterial that travels east and west through the study area. The roadway is a four-lane divided roadway between Euclid Street and Main Street and six-lane divided roadway between Main Street and SR-55 freeway. The posted speed limit is 40 miles per hour. On-street parking is not permitted throughout most of the corridor, with the exception of the eastbound direction between Main Street and Maple Street; and between Cedar Street and Evergreen Street. There are bike facilities provided along parts of the corridor. OCTA provides service along Edinger Avenue via Route 70 at approximately 30 minute headways.

Flower Street is classified as a Collector Street (north of 17th Street), Secondary Arterial (between 17th Street and Warner Avenue), and Primary Arterial (south of Warner Avenue) that travels north and south through the study area. The roadway fluctuates between a two-lane divided roadway (Warner Avenue to First Street and 17th Street to Memory Lane) and a four-lane divided roadway (Sunflower Avenue to Warner Avenue and First Street to 17th Street). On-street parking is permitted along residential areas. There are currently no bike facilities provided along the corridor. OCTA provides service along this corridor via Route 51 at approximately 30 minute headways.

Main Street is classified as a Major Arterial (north of Washington Avenue and south of Warner Avenue), Secondary Arterial (between Washington Avenue to Edinger Avenue), and a Primary Arterial (between Edinger Avenue and Warner Avenue) that travels north and south through the study area. There are two travel lanes in each direction, with a striped center median operating as a two-way left-turn lane. The posted speed limit is 35-40 miles per hour. Parking is permitted on the east side of the street between Goetz Avenue and Dyer Road, and prohibited on Main Street through the rest of the study area. South of Dyer Road, Main Street widens to a six-lane facility with a center two-way left-turn lane. OCTA provides service along this corridor via Route 53 at approximately 20 minute headways.

Grand Avenue is classified as a Major Arterial that travels north and south through the study area. From the SR-55 freeway to the northern study area boundary, Grand Avenue is a six-lane major arterial with a center two-way left-turn lane. Approximately 900 feet north of Warner Avenue, Grand Avenue narrows to two lanes in the southbound direction, and the third southbound lane is restored about 300 feet north of Warner Avenue. South of the SR-55 freeway, Grand Avenue has two northbound and three southbound lanes divided by a landscaped median. Parking is not permitted and there are currently no bike lanes or bike routes along Grand Avenue. The posted speed limit is 45 miles per hour. OCTA provides service along this corridor via Route 59 at approximately 30 minute headways.

4.2 STUDY INTERSECTION GEOMETRY AND PEAK HOUR VOLUMES

Intersections were selected in consultation with the City of Santa Ana based on expected traffic impacts and vehicle volumes. The existing study intersection lane geometries are provided in the Appendix. Year 2020 AM peak hour turning movement volumes are shown in Table 4-1, and the PM peak hour volumes are shown in Table 4-2.

Table 4-1 Existing Year 2020 Volumes – AM Peak Hour

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
1	Euclid Street and Bolsa Avenue	124	1044	179	207	1844	104	218	811	153	184	586	188
2	Euclid Street and McFadden Avenue	145	1100	131	137	1906	158	227	463	287	166	368	140
3	Euclid Street and Edinger Avenue	134	845	72	127	1842	169	172	753	460	100	609	111
4	Newhope Street and Hazard Avenue	98	738	105	91	1341	123	78	199	147	51	170	68
5	Newhope Street and McFadden Avenue	110	491	173	119	1183	110	135	492	160	176	449	100
6	Harbor Boulevard and SR-22 WB Off-Ramp / Banner Drive	70	1274	0	0	1354	18	74	0	121	836	44	117
7	Trask Avenue and SR-22 EB On-Ramp	0	0	0	0	0	0	651	815	0	0	738	138
8	Harbor Boulevard and Westminster Avenue	178	1173	251	212	1663	95	176	927	33	212	574	156
9	Harbor Boulevard and 1st Street	117	935	202	227	1914	124	140	932	181	245	621	145
10	Harbor Boulevard and McFadden Avenue	104	1059	101	182	1919	64	167	435	130	190	430	123
11	Harbor Boulevard and Edinger Avenue	103	772	146	183	2105	61	107	644	323	221	491	204
12	Harbor Boulevard and Warner Avenue	115	701	178	457	2059	123	97	1385	364	151	792	134
13	Harbor Boulevard and Segerstrom Avenue	111	791	50	171	2299	86	88	737	297	117	362	82
14	Hyland Avenue / OCTA Bus Base and MacArthur Boulevard	69	3	19	8	2	19	7	1953	775	64	490	20
15	Harbor Boulevard and MacArthur Boulevard	128	898	92	316	1820	126	126	1141	344	133	443	132
16	Harbor Boulevard and Sunflower Avenue	217	1107	205	246	2324	57	9	109	42	130	166	94
17	Harbor Boulevard and I-405 NB Off-Ramp	0	1567	0	0	2327	0	0	0	0	508	0	894
18	Harbor Boulevard and I-405 SB Off-Ramp	0	1729	0	0	1504	0	385	0	429	0	0	0
19	Fairview Street and Civic Center Drive	6	1278	414	243	1402	6	6	23	23	300	9	155
20	Fairview Street and 1st Street	157	1206	227	241	1401	161	214	1233	191	163	732	245
21	Fairview Street and McFadden Avenue	121	1294	173	142	1727	125	221	522	120	194	500	40
22	Fairview Street and	188	831	116	215	1503	127	237	657	176	421	553	110

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
	Edinger Avenue												
23	Fairview Street and Warner Avenue	215	952	125	205	1628	119	69	1010	301	307	926	300
24	Fairview Street and MacArthur Boulevard	248	771	89	307	1546	173	125	1019	150	235	494	140
25	Fairview Road and Sunflower Avenue	185	1071	163	204	1738	111	49	322	65	306	256	132
26	Greenville Street and Edinger Avenue	186	0	251	0	0	0	0	960	234	172	915	0
27	Greenville Street and Segerstrom Avenue	47	193	78	154	472	160	33	739	118	164	662	76
28	Raitt Street and McFadden Avenue	62	570	90	100	762	104	116	704	90	172	542	97
29	Raitt Street and Edinger Avenue	188	501	181	152	716	85	165	1008	145	117	916	54
30	Bear Street and MacArthur Boulevard	81	280	119	199	756	300	97	1663	114	70	1180	100
31	Bristol Street and 17th Street	192	988	167	335	1376	181	324	963	156	359	824	273
32	Bristol Street and Civic Center Drive	123	1087	96	318	1284	80	149	755	93	121	401	83
33	Bristol Street and Santa Ana Boulevard	65	1419	197	137	1507	41	83	403	35	96	240	41
34	Bristol Street and 1st Street	183	1278	162	275	1133	160	206	1268	128	108	813	119
35	Bristol Street and McFadden Avenue	118	1054	53	161	1571	162	275	472	232	155	432	50
36	Bristol Street and Warner Avenue	192	862	159	386	1307	148	206	1149	286	188	860	146
37	Bristol Street and Segerstrom Avenue	65	725	136	283	1011	119	189	913	84	122	554	71
38	Bristol Street and Alton Avenue	9	628	47	227	1571	36	190	117	244	41	87	31
39	Bristol Street and MacArthur Boulevard	92	478	120	326	1419	148	192	1394	283	191	910	132
40	Bristol Street and Sunflower Avenue	94	461	136	245	1388	104	114	942	381	246	400	138
41	Bristol Street and I-405 NB Ramps	0	1489	191	0	1967	8	0	0	34	121	73	665
42	Bristol Street and I-405 SB Ramps	113	1108	0	0	985	847	573	0	524	0	0	0
43	Flower Street and Santa Ana Boulevard	87	811	118	168	568	76	114	710	81	101	323	135
44	Flower Street and 1st Street	139	602	159	175	554	58	165	1514	60	209	861	123
45	Flower Street and McFadden Avenue	60	438	38	66	367	53	51	581	44	64	432	58
46	Flower Street and Segerstrom Avenue	63	331	73	98	544	120	155	1065	297	74	546	60
47	Flower Street and MacArthur Boulevard	22	142	73	163	352	264	165	1879	80	54	909	58
48	Main Street and La Veta Avenue	84	579	300	198	1034	173	350	495	215	316	276	230
49	Main Street and Mainplace Drive / Memory Lane	28	764	250	32	1244	260	148	233	16	198	226	15

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
50	Main Street and 17th Street	128	760	163	195	1086	70	116	1225	61	325	1300	19
51	Main Street and Civic Center Drive	138	901	79	59	1042	159	90	545	99	43	566	34
52	Main Street and Santa Ana Boulevard	68	1083	0	0	1107	98	0	0	0	61	848	65
53	Main Street and 4th Street	0	977	23	0	1098	27	0	93	14	0	114	28
54	Main Street and 1st Street	116	596	60	88	882	65	119	1393	147	88	1097	61
55	Main Street and McFadden Avenue	89	838	42	175	1364	27	42	396	43	140	373	107
56	Main Street and Edinger Avenue	109	617	67	228	1052	55	75	971	131	122	709	87
57	Main Street and MacArthur Boulevard	54	311	264	645	848	192	240	1393	252	146	435	218
58	Penn Way and 17th Street	43	0	217	0	0	0	0	1238	631	214	1722	0
59	Santiago Street / I-5 NB Ramps and 17th Street	768	35	22	57	0	295	99	1040	376	0	1245	20
60	Penn Way and I-5 SB Ramps	0	158	140	799	165	0	0	0	0	179	0	100
61	Santiago Street and Civic Center Drive	206	143	20	5	303	74	121	46	246	72	66	13
62	Santiago Street and Santa Ana Boulevard	24	71	56	311	161	133	48	474	14	108	807	271
63	Standard Avenue and 4th Street	-	-	-	-	-	-	-	-	-	-	-	-
64	Standard Avenue and 1st Street	108	191	119	12	231	25	86	1317	214	64	1012	12
65	Standard Avenue and McFadden Avenue	74	284	128	220	531	37	17	589	71	138	366	82
66	Halladay Street and Warner Avenue	43	0	100	0	0	0	0	1283	145	160	607	0
67	Halladay Street and Dyer Road	11	18	49	183	37	39	41	1375	10	115	626	101
68	SR-55 SB Ramps and MacArthur Boulevard	0	0	0	961	0	870	0	1441	1027	0	1275	145
69	SR-55 NB Ramps and MacArthur Boulevard	908	0	976	0	0	0	0	1609	796	0	517	244
70	SR-55 SB Ramps and Dyer Road	221	26	505	50	242	60	35	1338	285	408	647	108
71	Glassell Street and La Veta Avenue	263	412	125	17	358	79	38	195	375	236	249	6
72	Glassell Street and SR-22 WB Ramps	500	561	0	0	743	346	0	0	0	285	5	426
73	Glassell Street / Grand Avenue and SR-22 EB Ramps	0	818	218	280	733	0	258	0	1012	0	0	0
74	Grand Avenue and Fairhaven Avenue	18	737	106	174	1444	32	99	60	59	254	28	229
75	Grand Avenue and Santa Clara Avenue	66	463	119	290	1418	319	143	233	48	120	231	211
76	Grand Avenue and 17th Street	163	476	327	286	1198	235	224	835	106	309	807	88
77	Grand Avenue and I-5 NB Ramps	0	831	480	58	1869	0	0	0	0	456	0	126
78	Grand Avenue and	71	1003	51	141	1166	1029	263	217	428	5	373	34

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
	Santa Ana Boulevard												
79	Grand Avenue and 1st Street	213	751	35	99	1432	174	332	793	225	247	867	99
80	Grand Avenue and Chestnut Avenue	53	737	163	149	1788	49	60	419	110	118	347	216
81	Grand Avenue and McFadden Avenue	171	722	108	237	1590	155	186	601	182	117	420	106
82	Grand Avenue and Edinger Avenue	47	472	92	224	1146	224	319	1332	128	151	579	126
83	Grand Avenue and Warner Avenue	169	510	218	199	574	194	256	914	359	88	388	131
84	SR-55 NB Ramps and Dyer Road	557	0	456	0	0	0	0	1533	613	0	719	433
85	Cambridge Street and La Veta Avenue	160	204	0	0	480	245	117	0	187	0	0	0
86	Cambridge Street and Fairhaven Avenue	0	0	0	515	0	166	80	216	0	0	247	192
87	Mabury Street and 1st Street	10	0	244	238	141	533	0	1062	11	46	701	0
88	Tustin Street and La Veta Avenue	8	333	96	74	1452	4	9	11	35	447	2	69
89	Tustin Street and SR-22 WB On-Ramp	656	610	0	0	1395	833	0	0	0	0	0	0
90	Tustin Street and SR-22 EB Off-Ramp / Seba Avenue	0	996	5	22	1349	0	244	24	1051	6	0	43
91	Tustin Street and Fairhaven Avenue	89	514	90	235	2026	40	68	258	444	306	338	442
92	Tustin Avenue and Santa Clara Avenue	73	397	74	127	2600	82	101	255	186	118	244	122
93	Tustin Avenue and 17th Street	111	198	236	602	1737	19	187	738	126	488	770	188
94	Tustin Avenue and 4th Street	48	245	219	664	845	262	114	676	28	103	579	376
95	SR-55 SB Ramps / Auto Mall Drive and Edinger Avenue	421	63	498	50	30	8	28	1104	408	399	940	123
96	SR-55 NB Ramps / Del Amo Avenue and Newport Avenue	227	60	38	14	344	504	253	153	146	8	223	4
97	Red Hill Avenue and Edinger Avenue	81	299	85	226	960	450	190	611	130	224	1085	152
98	Red Hill Avenue and Warner Avenue	56	339	46	19	891	179	202	343	253	98	349	62
99	Red Hill Avenue and Barranca Parkway	127	316	104	199	876	115	118	710	281	578	645	126
100	Red Hill Avenue and Alton Parkway	174	512	321	251	1141	183	9	28	28	223	189	106
101	Red Hill Avenue and MacArthur Boulevard	64	569	10	208	537	492	1248	645	106	23	223	571
102	Red Hill Avenue and Main Street	162	556	361	67	313	108	139	1309	254	154	309	73
103	I-5 SB Ramps and Santa Ana Boulevard	0	0	0	367	0	36	323	554	0	0	1130	330
104	Tustin Ranch Road and Warner Avenue	0	0	0	265	0	33	18	238	0	0	1717	395

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
105	Von Karman Avenue and Barranca Parkway	107	142	85	119	1164	509	130	488	163	769	1263	39

Table 4-2 Existing Year 2020 Volumes – PM Peak Hour

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
1	Euclid Street and Bolsa Avenue	159	1477	119	185	1053	199	212	678	106	217	909	217
2	Euclid Street and McFadden Avenue	175	1426	92	110	1354	164	183	419	185	127	532	246
3	Euclid Street and Edinger Avenue	526	1572	112	122	803	204	161	622	186	91	840	136
4	Newhope Street and Hazard Avenue	116	1281	50	49	1038	124	108	214	131	32	202	58
5	Newhope Street and McFadden Avenue	202	1084	190	164	733	142	81	496	72	107	589	168
6	Harbor Boulevard and SR-22 WB Off-Ramp / Banner Drive	88	1992	0	0	1519	49	93	0	78	593	80	170
7	Trask Avenue and SR-22 EB On-Ramp	0	0	0	0	0	0	838	628	0	0	606	57
8	Harbor Boulevard and Westminster Avenue	276	1374	325	207	1430	165	187	667	32	230	797	181
9	Harbor Boulevard and 1st Street	287	1480	164	278	1218	164	188	766	145	230	1073	175
10	Harbor Boulevard and McFadden Avenue	167	1716	125	298	1273	115	214	520	65	211	506	146
11	Harbor Boulevard and Edinger Avenue	282	1773	214	283	822	75	134	564	100	140	813	271
12	Harbor Boulevard and Warner Avenue	774	3713	279	274	1525	182	241	1707	390	260	2700	862
13	Harbor Boulevard and Segerstrom Avenue	299	1881	60	91	1027	91	111	552	181	99	1074	390
14	Hyland Avenue / OCTA Bus Base and MacArthur Boulevard	1201	7	70	12	4	14	36	891	160	25	2350	12
15	Harbor Boulevard and MacArthur Boulevard	588	1519	88	213	1073	176	140	489	181	87	1467	276
16	Harbor Boulevard and Sunflower Avenue	178	1771	263	112	1393	42	67	182	189	254	533	199
17	Harbor Boulevard and I-405 NB Off-Ramp	0	1529	0	0	2475	0	0	0	0	701	0	1132
18	Harbor Boulevard and I-405 SB Off-Ramp	0	1861	0	0	2147	0	157	0	722	0	0	0
19	Fairview Street and Civic Center Drive	5	1430	402	144	1338	0	2	5	4	438	0	162
20	Fairview Street and 1st Street	149	1094	99	203	1264	251	215	870	151	159	1204	186
21	Fairview Street and McFadden Avenue	159	1462	127	155	1257	196	244	659	163	158	545	134
22	Fairview Street and Edinger Avenue	188	1793	110	198	616	151	230	703	188	373	789	173
23	Fairview Street and Warner Avenue	217	1728	161	188	951	96	197	955	148	188	1108	240
24	Fairview Street and MacArthur Boulevard	243	1672	91	171	955	88	280	731	246	179	1365	239
25	Fairview Road and Sunflower Avenue	201	1806	393	144	1196	83	203	430	95	265	664	173

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
26	Greenville Street and Edinger Avenue	327	0	218	0	0	0	0	982	200	95	1128	0
27	Greenville Street and Segerstrom Avenue	57	476	36	61	200	61	108	823	47	27	1037	148
28	Raitt Street and McFadden Avenue	58	835	130	45	474	76	126	747	65	88	742	102
29	Raitt Street and Edinger Avenue	190	816	229	111	384	96	139	961	137	86	972	87
30	Bear Street and MacArthur Boulevard	200	962	251	112	271	82	97	910	94	93	1673	266
31	Bristol Street and 17th Street	236	1148	191	243	1293	220	336	750	136	284	1069	362
32	Bristol Street and Civic Center Drive	200	1399	73	136	1250	128	190	534	63	169	723	82
33	Bristol Street and Santa Ana Boulevard	75	1524	87	105	1402	53	59	163	38	233	371	100
34	Bristol Street and 1st Street	286	1235	182	206	1115	252	189	1062	136	217	1330	126
35	Bristol Street and McFadden Avenue	213	1566	85	84	1171	270	262	512	102	97	504	59
36	Bristol Street and Warner Avenue	309	1157	211	251	838	163	193	868	153	173	1021	299
37	Bristol Street and Segerstrom Avenue	179	1322	233	92	843	176	200	716	57	119	1074	54
38	Bristol Street and Alton Avenue	43	1681	158	119	896	56	75	105	195	91	150	29
39	Bristol Street and MacArthur Boulevard	335	1428	260	223	821	129	357	796	169	265	1536	290
40	Bristol Street and Sunflower Avenue	645	1363	220	201	750	215	293	573	222	263	1012	322
41	Bristol Street and I-405 NB Ramps	0	2094	183	0	2148	20	0	0	194	357	306	1184
42	Bristol Street and I-405 SB Ramps	127	1555	0	0	1506	880	740	0	331	0	0	0
43	Flower Street and Santa Ana Boulevard	124	754	62	104	530	48	134	386	63	146	510	151
44	Flower Street and 1st Street	132	625	149	170	466	135	139	1217	101	210	1415	147
45	Flower Street and McFadden Avenue	42	567	35	46	352	57	64	478	19	48	595	85
46	Flower Street and Segerstrom Avenue	120	843	80	66	369	106	158	786	83	75	1258	81
47	Flower Street and MacArthur Boulevard	133	634	74	85	205	197	209	994	63	62	1989	177
48	Main Street and La Veta Avenue	307	938	439	145	911	235	296	422	189	257	513	206
49	Main Street and Mainplace Drive / Memory Lane	90	945	179	51	1055	139	293	325	87	185	151	73
50	Main Street and 17th Street	197	1019	222	173	757	117	221	1237	73	178	1089	72
51	Main Street and Civic Center Drive	89	1126	94	61	995	63	159	881	105	38	384	39
52	Main Street and Santa Ana Boulevard	54	1229	0	0	1083	53	0	0	0	65	656	85
53	Main Street and 4th Street	0	1055	50	0	1037	47	0	98	55	0	181	46

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
54	Main Street and 1st Street	169	826	72	175	671	143	120	1214	90	114	1275	89
55	Main Street and McFadden Avenue	146	1147	71	134	908	66	78	345	42	85	480	216
56	Main Street and Edinger Avenue	99	1050	48	122	609	83	127	752	84	97	1296	134
57	Main Street and MacArthur Boulevard	488	1169	321	283	368	278	298	613	59	198	1570	456
58	Penn Way and 17th Street	848	0	414	0	0	0	0	1590	513	123	1440	0
59	Santiago Street / I-5 NB Ramps and 17th Street	345	46	18	51	0	133	120	1099	722	0	1525	41
60	Penn Way and I-5 SB Ramps	0	363	238	550	127	0	0	0	0	175	0	150
61	Santiago Street and Civic Center Drive	97	299	30	13	187	48	266	76	269	14	19	18
62	Santiago Street and Santa Ana Boulevard	36	133	84	297	120	61	71	649	20	73	492	187
63	Standard Avenue and 4th Street	-	-	-	-	-	-	-	-	-	-	-	-
64	Standard Avenue and 1st Street	185	367	119	19	189	23	177	1218	129	91	1148	21
65	Standard Avenue and McFadden Avenue	169	667	82	137	300	52	53	351	60	117	712	206
66	Halladay Street and Warner Avenue	169	0	352	0	0	0	2	926	93	141	1121	0
67	Halladay Street and Dyer Road	41	180	208	114	15	32	150	1298	9	45	1451	116
68	SR-55 SB Ramps and MacArthur Boulevard	0	0	0	288	0	697	0	1167	1040	0	1532	602
69	SR-55 NB Ramps and MacArthur Boulevard	641	0	426	0	0	0	0	711	731	0	1501	1081
70	SR-55 SB Ramps and Dyer Road	319	10	240	103	226	110	65	1523	207	556	991	64
71	Glassell Street and La Veta Avenue	472	490	160	15	499	37	82	268	461	155	280	11
72	Glassell Street and SR-22 WB Ramps	557	910	0	0	878	255	0	0	0	201	7	357
73	Glassell Street / Grand Avenue and SR-22 EB Ramps	0	1202	307	381	681	0	229	4	503	0	0	0
74	Grand Avenue and Fairhaven Avenue	46	1214	243	222	894	82	79	45	33	255	48	181
75	Grand Avenue and Santa Clara Avenue	88	1185	246	220	868	220	159	194	36	136	244	260
76	Grand Avenue and 17th Street	246	877	221	270	582	128	346	886	149	300	1107	201
77	Grand Avenue and I-5 NB Ramps	0	1297	1001	48	1164	0	0	0	0	143	0	172
78	Grand Avenue and Santa Ana Boulevard	167	1888	31	34	750	532	328	200	316	20	134	97
79	Grand Avenue and 1st Street	165	1261	38	120	706	282	277	918	91	151	941	173
80	Grand Avenue and Chestnut Avenue	140	1050	182	149	664	112	93	285	62	107	333	194
81	Grand Avenue and McFadden Avenue	202	1150	198	138	626	168	128	476	83	86	686	151

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
82	Grand Avenue and Edinger Avenue	242	1397	121	165	408	229	201	868	70	74	1333	173
83	Grand Avenue and Warner Avenue	242	873	193	146	471	217	342	656	142	151	964	316
84	SR-55 NB Ramps and Dyer Road	188	0	51	0	0	0	0	1339	681	0	1545	965
85	Cambridge Street and La Veta Avenue	191	266	0	0	196	181	219	0	144	0	0	0
86	Cambridge Street and Fairhaven Avenue	0	0	0	219	0	76	141	246	0	0	273	340
87	Mabury Street and 1st Street	25	0	256	207	88	390	0	1512	24	40	549	0
88	Tustin Street and La Veta Avenue	46	1033	245	90	801	15	13	5	20	183	5	112
89	Tustin Street and SR-22 WB On-Ramp	532	1529	0	0	711	365	0	0	0	0	0	0
90	Tustin Street and SR-22 EB Off-Ramp / Seba Avenue	0	1547	4	52	707	0	458	41	581	28	0	67
91	Tustin Street and Fairhaven Avenue	239	1275	113	327	862	99	80	180	147	94	208	196
92	Tustin Avenue and Santa Clara Avenue	163	789	121	183	1444	100	61	192	113	125	157	148
93	Tustin Avenue and 17th Street	216	926	476	346	371	37	444	872	118	229	753	419
94	Tustin Avenue and 4th Street	55	598	194	459	339	124	180	642	33	88	596	367
95	SR-55 SB Ramps / Auto Mall Drive and Edinger Avenue	377	30	398	110	50	37	35	1258	354	385	1003	120
96	SR-55 NB Ramps / Del Amo Avenue and Newport Avenue	583	174	34	8	97	373	104	36	21	23	348	16
97	Red Hill Avenue and Edinger Avenue	159	1146	182	145	289	234	327	838	102	62	803	392
98	Red Hill Avenue and Warner Avenue	382	1308	150	58	223	283	222	603	94	25	525	69
99	Red Hill Avenue and Barranca Parkway	356	1339	345	185	313	147	203	753	99	127	966	282
100	Red Hill Avenue and Alton Parkway	27	1499	217	124	528	4	132	324	166	433	74	267
101	Red Hill Avenue and MacArthur Boulevard	125	809	10	286	594	1042	597	275	42	39	818	574
102	Red Hill Avenue and Main Street	416	897	242	74	538	292	198	705	191	279	1589	89
103	I-5 SB Ramps and Santa Ana Boulevard	0	0	0	278	0	61	561	634	0	0	668	183
104	Tustin Ranch Road and Warner Avenue	0	0	0	653	0	45	54	1795	0	0	548	236
105	Von Karman Avenue and Barranca Parkway	224	1290	281	67	343	236	560	1023	143	204	646	220

4.3 EXISTING YEAR (2020) VEHICLE MILES TRAVELED (VMT)

Table 4-3 presents the VMT analysis results for the existing year (2020) scenario. VMT calculations are based on the scenario parameters and methodology as described in Sections 2.5 and 3.1, respectively.

Table 4-3 Existing Year (2020) VMT Summary

	I – I VMT	I – X VMT	X – I VMT	Total VMT	Service Population	VMT/SP
City	697,779	5,356,504	5,352,841	11,407,124	507,924	22.5
County	48,242,429	25,463,887	25,637,825	99,344,141	3,834,949	25.9

SP = Service Population = Total Employees + Total Population. Reduction factor applied to Total Employees as noted in Section 3.1 and shown in Appendix F. I-I = Internal-Internal; I-X = Internal-External; X-I = External-Internal.

4.4 EXISTING YEAR (2020) ROADWAY SEGMENT LEVEL OF SERVICE

Table 4-4 includes the 24-hour count locations, volumes, and corresponding roadway segment level of service. The following study roadway segments currently operate at a deficient LOS:

- Segment 4 – Harbor Boulevard from Westminster Avenue/17th Street to Hazard Avenue
- Segment 11 – Bristol Street from 17th Street to Santa Clara Avenue
- Segment 13 – Bristol Street from 17th Street to Washington Avenue
- Segment 14 – Fairview Street from Trask Avenue to 17th Street
- Segment 17 – Flower Street from 1st Street to Bishop Street
- Segment 23 – Main Street from 1st Street to Bishop Street
- Segment 25 – Grand Avenue from Santa Ana Boulevard to 4th Street
- Segment 39 – Bristol Street from Edinger Avenue to Warner Avenue
- Segment 44 – Edinger Avenue from Flower Street to Main Street
- Segment 45 – Main Street from McFadden Avenue to Edinger Avenue
- Segment 57 – Dyer Road from Grand Avenue to Pullman Street
- Segment 58 – McFadden Avenue from Bristol Street to Flower Street
- Segment 72 – McFadden Avenue from Main Street to Standard Avenue
- Segment 88 – Harbor Boulevard from Edinger Avenue to Warner Avenue

Table 4-4 Existing Year (2020) Roadway Segment LOS

ID	Street	Segment	Lanes	ADT	LOS
1	1st Street	Euclid Street to Ward Street	6D	25,233	A
2	Euclid Street	1st Street to McFadden Avenue	6D	40,731	C
3	Westminster Avenue	Harbor Boulevard to Fairview Street	6D	30,459	A
4	Harbor Boulevard	Westminster Avenue/17th Street to Hazard Avenue	6D	54,137	E
5	1st Street	Harbor Boulevard to Jackson	6D	32,736	A
6	Edinger Avenue	Harbor Boulevard to Fairview Street	4D	27,838	C
7	Warner Avenue	Harbor Boulevard to Fairview Street	6D	31,945	A
8	Harbor Boulevard	Segerstrom Avenue to MacArthur Boulevard	6D	15,622	A
9	Fairview Street	1st Street to Willits Street	6D	42,605	C
10	1st Street	Sullivan Street to Raitt Street	6D	36,377	B
11	Bristol Street	17th Street to Santa Clara Avenue	4D	45,676	F
12	17th Street	College Avenue to Bristol Street	6D	37,345	B
13	Bristol Street	17th Street to Washington Avenue	4D	42,005	F
14	Fairview Street	Trask Avenue to 17th Street	4D	40,432	F
15	Bristol Street	1st Street to Bishop Street	6D	42,663	C
16	Civic Center Drive	Bristol Street to Flower Street	4D	17,589	A
17	Flower Street	1st Street to Bishop Street	2U	15,622	F
18	Main Street	17th Street to 20th Street	4D	32,044	D
19	Main Street	Washington Street to Civic Center Drive	4D	33,489	D
20	Civic Center Drive	Flower Street to Ross Street	4D	17,427	A
21	Santa Ana Boulevard	Flower Street to Ross Street	6D	14,689	A
22	1st Street	Main Street to Standard Avenue	6D	42,699	C
23	Main Street	1st Street to Bishop Street	4U	30,125	F
24	Grand Avenue	Santa Clara Avenue to Fairhaven Street	4D	30,206	D
25	Grand Avenue	Santa Ana Boulevard to 4th Street	4D	36,678	E
26	Santa Clara Avenue	Grand Avenue to Tustin Avenue	2U	10,585	D
27	Tustin Avenue	Santa Clara Avenue to Fairhaven Street	6D	35,410	B
28	17th Street	Cabrillo Park Drive to Tustin Avenue	4D	32,080	D
29	Tustin Avenue	Fruit Street to 4th Street	6D	25,174	A
30	1st Street	Grand Avenue to Elk Lane	6D	28,638	A
31	1st Street	Cabrillo Park Drive to Tustin Avenue	6D	22,083	A
32	Fairview Street	Edinger Avenue to Harvard Street	6D	37,524	B
33	Fairview Street	Warner Avenue to Segerstrom Avenue	6D	39,878	C
34	MacArthur Boulevard	Harbor Boulevard to Fairview Street	6D	26,235	A
35	Edinger Avenue	Fairview Street to Greenville Street	4D	29,115	C
36	McFadden Avenue	Fairview Street to Raitt Street	4D	20,997	A
37	MacArthur Boulevard	Fairview Street to Raitt Street	6D	28,809	A
38	Segerstrom Avenue	Fairview Street to Raitt Street	4D	19,326	A
39	Bristol Street	Edinger Avenue to Warner Avenue	4D	37,238	E
40	Bristol Street	Warner Avenue to Segerstrom Avenue	6D	38,007	B

ID	Street	Segment	Lanes	ADT	LOS
41	Warner Avenue	Raitt Street to Bristol Street	5D	34,555	C
42	Bristol Street	MacArthur Boulevard to Sunflower Avenue	6D	34,731	B
43	Flower Street	Warner Avenue to Segerstrom Avenue	4D	15,378	A
44	Edinger Avenue	Flower Street to Main Street	4D	36,534	E
45	Main Street	McFadden Avenue to Edinger Avenue	4U	28,622	F
46	Main Street	Edinger Avenue to Warner Avenue	4D	27,972	C
47	Main Street	Warner Avenue to Dyer Road	5D	30,484	B
48	Segerstrom Avenue	Bristol Street to Flower Street	4D	22,959	B
49	MacArthur Boulevard	Flower Street to Main Street	6D	37,946	B
50	Main Street	MacArthur Boulevard to Sunflower Avenue	6D	23,692	A
51	Grand Avenue	Edinger Avenue to Warner Avenue	6D	17,735	A
52	Edinger Avenue	Richie Street to Newport Avenue	6D	40,435	C
53	Warner Avenue	Grand Avenue to Red Hill Avenue	6D	22,435	A
54	Warner Avenue	Main Street to Standard Avenue	6D	27,391	A
55	McFadden Avenue	Newhope Street to Harbor Boulevard	4D	18,495	A
56	McFadden Avenue	Standard Avenue to Grand Avenue	4D	20,188	A
57	Dyer Road	Grand Avenue to Pullman Street	6D	51,084	E
58	McFadden Avenue	Bristol Street to Flower Street	2U	14,951	F
59	Main Street	La Veta Avenue to Memory Lane	6D	31,004	A
60	1st Street	Bristol Street to Flower Street	6D	39,006	B
61	Fairhaven Avenue	Grand Avenue to Tustin Avenue	4D	10,218	A
62	4th Street	French Street to Standard Avenue	2D	14,855	C
63	Broadway	17th Street to Civic Center Drive	4D	20,630	A
64	Broadway	Civic Center Drive to 1st Street	4U	16,005	B
65	Cambridge Street	SR-22 to Fairhaven Avenue	2U	- *	-
66	Chestnut Avenue	Standard Avenue to Lyon Street	4U	2,587	A
67	Civic Center Drive	French Street to Santiago Street	2U	10,266	D
68	Civic Center Drive	Fairview Road to Bristol Street	4U	13,772	A
69	Flower Street	Edinger Avenue to Warner Avenue	2U	10,964	D
70	Halladay Avenue	Warner Avenue to Dyer Road	2D	- *	-
71	Hazard Avenue	Euclid Street to Harbor Boulevard	4U	9,546	A
72	McFadden Avenue	Main Street to Standard Avenue	2U	16,064	F
73	Penn Way/Santiago Street	I-5 SB Ramps to Santa Ana Boulevard	4U	- *	-
74	Raitt Street	Santa Ana Boulevard to 1st Street	2U	9,978	C
75	Raitt Street	Warner Avenue to Segerstrom Avenue	4D	14,746	A
76	Santa Ana Boulevard	French Street to Santiago Street	2D	6,616	A
77	Santa Ana Boulevard	Raitt Street to Bristol Street	4U	4,236	A
78	Standard Avenue	Chestnut Avenue to McFadden Avenue	4U	12,871	A
79	Standard Avenue	Edinger Avenue to Warner Avenue	4U	12,852	A
80	Greenville Street	Edinger Avenue to Warner Avenue	2U	7,090	A
81	Greenville Street	Warner Avenue to Segerstrom Avenue	4D	8,578	A
82	Flower Street	17th Street to Northern Terminus	2D	11,155	B

ID	Street	Segment	Lanes	ADT	LOS
83	Logan Street	Civic Center Drive to Santa Ana Boulevard	2U	- *	-
84	Dyer Road	Pullman Street to Red Hill Avenue	6D	31,248	A
85	Fairhaven Avenue	Tustin Street to Yorba Street	4U	16,381	B
86	Santa Clara Avenue	Tustin Street to Yorba Street	2U	8,568	B
87	Harbor Boulevard	McFadden Avenue to Edinger Avenue	6D	49,281	D
88	Harbor Boulevard	Edinger Avenue to Warner Avenue	6D	52,363	E

Notes:
* Not available.
(1) ADT – Average Daily Traffic Volumes
(2) LOS – Level of Service
(3) #D – total number of lanes in both directions divided by raised or striped median; #U – total number of undivided lanes in both directions
(4) Roadway capacities shown in Table 3-1.
(5) Yellow and red shading indicates an unacceptable level of service.

4.5 EXISTING YEAR (2020) INTERSECTION LEVEL OF SERVICE

A summary of the AM and PM peak hour level of service analysis results for the existing year (2020) existing condition are included in Table 4-5. Intersections are general considered unacceptable if the level of service (LOS) is “E” or “F”. It should be noted that Caltrans and CMP intersection have a minimum acceptable LOS of C and E, respectively. The following intersections are forecast to have unacceptable level of service in the existing year (2020) condition:

- INT 2 – Euclid street and McFadden Avenue (City of Santa Ana)
- INT 12 – Harbor Boulevard and Warner Avenue (City of Santa Ana – CMP)
- INT 13 – Harbor Boulevard and Segerstrom Avenue (City of Santa Ana)
- INT 14 – Hyland Avenue and MacArthur Boulevard (City of Costa Mesa / City of Santa Ana)
- INT 37 – Bristol Street and Segerstrom Avenue (City of Santa Ana)
- INT 45 – Flower Street and McFadden Avenue (City of Santa Ana)
- INT 47 – Flower Street and MacArthur Boulevard (City of Santa Ana)
- INT 82 – Grand Avenue and Edinger Avenue (City of Santa Ana)
- INT 91 – Tustin Street and Fairhaven Avenue (City of Orange)

Table 4-5: Existing Year (2020) LOS Summary

ID	INTERSECTION	AM		PM	
		V/C or Delay	LOS	V/C or Delay	LOS
1	Euclid Street and Bolsa Avenue	0.85	D	0.87	D
2	Euclid Street and McFadden Avenue	0.91	E	0.83	D
3	Euclid Street and Edinger Avenue	0.86	D	0.79	C
4	Newhope Street and Hazard Avenue	0.71	C	0.64	B
5	Newhope Street and McFadden Avenue	0.83	D	0.84	D
6	Harbor Boulevard and SR-22 WB Off-Ramp / Banner Drive	27.4	C	23.6	C
7	Trask Avenue and SR-22 EB On-Ramp	11.5	B	12.4	B
8	Harbor Boulevard and Westminster Avenue	0.82	D	0.79	C
9	Harbor Boulevard and 1st Street	0.81	D	0.83	D
10	Harbor Boulevard and McFadden Avenue	0.79	C	0.81	D
11	Harbor Boulevard and Edinger Avenue	0.77	C	0.70	B
12	Harbor Boulevard and Warner Avenue	0.81	D	1.58	F
13	Harbor Boulevard and Segerstrom Avenue	0.98	E	0.90	D
14	Hyland Avenue / OCTA Bus Base and MacArthur Boulevard	0.61	B	0.92	E
15	Harbor Boulevard and MacArthur Boulevard	0.75	C	0.82	D
16	Harbor Boulevard and Sunflower Avenue	0.70	B	0.78	C
17	Harbor Boulevard and I-405 NB Off-Ramp	19.7	B	23.7	C
18	Harbor Boulevard and I-405 SB Off-Ramp	13.2	B	19.4	B
19	Fairview Street and Civic Center Drive	0.67	B	0.66	B
20	Fairview Street and 1st Street	0.87	D	0.88	D
21	Fairview Street and McFadden Avenue	0.79	C	0.80	C
22	Fairview Street and Edinger Avenue	0.75	C	0.81	D
23	Fairview Street and Warner Avenue	0.85	D	0.85	D
24	Fairview Street and MacArthur Boulevard	0.70	B	0.83	D
25	Fairview Road and Sunflower Avenue	0.71	C	0.71	C
26	Greenville Street and Edinger Avenue	0.56	A	0.59	A
27	Greenville Street and Segerstrom Avenue	0.73	C	0.69	B
28	Raitt Street and McFadden Avenue	0.72	C	0.72	C
29	Raitt Street and Edinger Avenue	0.85	D	0.86	D
30	Bear Street and MacArthur Boulevard	0.74	C	0.87	D
31	Bristol Street and 17th Street	0.73	C	0.69	B
32	Bristol Street and Civic Center Drive	0.83	D	0.83	D
33	Bristol Street and Santa Ana Boulevard	0.67	B	0.66	B
34	Bristol Street and 1st Street	0.75	C	0.78	C
35	Bristol Street and McFadden Avenue	0.75	C	0.75	C
36	Bristol Street and Warner Avenue	0.77	C	0.79	C
37	Bristol Street and Segerstrom Avenue	0.79	C	0.91	E
38	Bristol Street and Alton Avenue	0.56	A	0.69	B
39	Bristol Street and MacArthur Boulevard	0.74	C	0.81	D

ID	INTERSECTION	AM		PM	
		V/C or Delay	LOS	V/C or Delay	LOS
40	Bristol Street and Sunflower Avenue	0.64	B	0.69	B
41	Bristol Street and I-405 NB Ramps	19.1	B	28.2	C
42	Bristol Street and I-405 SB Ramps	22.3	C	18.4	B
43	Flower Street and Santa Ana Boulevard	0.60	A	0.57	A
44	Flower Street and 1st Street	0.80	C	0.75	C
45	Flower Street and McFadden Avenue	0.82	D	0.92	E
46	Flower Street and Segerstrom Avenue	0.77	C	0.90	D
47	Flower Street and MacArthur Boulevard	0.70	B	0.91	E
48	Main Street and La Veta Avenue	0.57	A	0.63	B
49	Main Street and Mainplace Drive / Memory Lane	0.49	A	0.47	A
50	Main Street and 17th Street	0.82	D	0.73	C
51	Main Street and Civic Center Drive	0.76	C	0.80	C
52	Main Street and Santa Ana Boulevard	0.67	B	0.61	B
53	Main Street and 4th Street	0.49	A	0.54	A
54	Main Street and 1st Street	0.76	C	0.80	C
55	Main Street and McFadden Avenue	0.90	D	0.85	D
56	Main Street and Edinger Avenue	0.83	D	0.85	D
57	Main Street and MacArthur Boulevard	0.74	C	0.78	C
58	Penn Way and 17th Street	11.2	B	20.7	C
59	Santiago Street / I-5 NB Ramps and 17th Street	31.2	C	19.5	B
60	Penn Way and I-5 SB Ramps	19.0	B	22.0	C
61	Santiago Street and Civic Center Drive	16.9	C	17.1	C
62	Santiago Street and Santa Ana Boulevard	0.55	A	0.57	A
63*	Standard Avenue and 4th Street	-	-	-	-
64	Standard Avenue and 1st Street	0.80	C	0.84	D
65	Standard Avenue and McFadden Avenue	0.61	B	0.68	B
66	Halladay Street and Warner Avenue	0.66	B	0.68	B
67	Halladay Street and Dyer Road	0.57	A	0.78	C
68	SR-55 SB Ramps and MacArthur Boulevard	19.8	B	17.3	B
69	SR-55 NB Ramps and MacArthur Boulevard	19.2	B	14.8	B
70	SR-55 SB Ramps and Dyer Road	23.7	C	25.7	C
71	Glassell Street and La Veta Avenue	0.60	A	0.62	B
72	Glassell Street and SR-22 WB Ramps	28.5	C	24.8	C
73	Glassell Street / Grand Avenue and SR-22 EB Ramps	27.0	C	26.5	C
74	Grand Avenue and Fairhaven Avenue	0.68	B	0.68	B
75	Grand Avenue and Santa Clara Avenue	0.89	D	0.75	C
76	Grand Avenue and 17th Street	0.80	C	0.83	D
77	Grand Avenue and I-5 NB Ramps	12.9	B	10.0	A
78	Grand Avenue and Santa Ana Boulevard	23.8	C	21.1	C
79	Grand Avenue and 1st Street	0.80	C	0.79	C

ID	INTERSECTION	AM		PM	
		V/C or Delay	LOS	V/C or Delay	LOS
80	Grand Avenue and Chestnut Avenue	0.71	C	0.62	B
81	Grand Avenue and McFadden Avenue	0.83	D	0.76	C
82	Grand Avenue and Edinger Avenue	0.76	C	0.91	E
83	Grand Avenue and Warner Avenue	0.53	A	0.70	B
84	SR-55 NB Ramps and Dyer Road	16.3	B	5.7	A
85	Cambridge Street and La Veta Avenue	17.3	C	12.5	B
86	Cambridge Street and Fairhaven Avenue	0.56	A	0.58	A
87	Mabury Street and 1st Street	28.3	C	26.1	C
88	Tustin Street and La Veta Avenue	0.52	A	0.44	A
89	Tustin Street and SR-22 WB On-Ramp	12.9	B	12.1	B
90	Tustin Street and SR-22 EB Off-Ramp / Seba Avenue	24.2	C	23.7	C
91	Tustin Street and Fairhaven Avenue	0.98	E	0.61	B
92	Tustin Avenue and Santa Clara Avenue	0.87	D	0.65	B
93	Tustin Avenue and 17th Street	0.75	C	0.72	C
94	Tustin Avenue and 4th Street	0.70	B	0.69	B
95	SR-55 SB Ramps / Auto Mall Drive and Edinger Avenue	24.4	C	25.1	C
96	SR-55 NB Ramps / Del Amo Avenue and Newport Avenue	24.0	C	27.4	C
97	Red Hill Avenue and Edinger Avenue	0.57	A	0.67	B
98	Red Hill Avenue and Warner Avenue	0.49	A	0.59	A
99	Red Hill Avenue and Barranca Parkway	0.58	A	0.56	A
100	Red Hill Avenue and Alton Parkway	0.52	A	0.67	B
101	Red Hill Avenue and MacArthur Boulevard	0.66	B	0.66	B
102	Red Hill Avenue and Main Street	0.67	B	0.77	C
103	I-5 SB Ramps and Santa Ana Boulevard	17.4	B	18.9	B
104	Tustin Ranch Road and Warner Avenue	0.48	A	0.61	B
105	Von Karman Avenue and Barranca Parkway	0.76	C	0.87	D

Notes: (1) LOS – Level of Service; (2) V/C – Volume to Capacity
*Intersection does not currently exist; assessed in future scenarios only.

5.0 Future Year 2045 Forecast Modeling

5.1 ORANGE COUNTY TRANSPORTATION AUTHORITY MODEL (OCTAM)

The Orange County Transportation Authority (OCTA) is responsible for regional transportation planning in Orange County. OCTA's role as the regional planning agency is to plan for and evaluate multi-modal transportation alternatives to support regional planning activities. The Orange County Transportation Authority Model (OCTAM) is OCTA's regional model that is based on the traditional four-step sequential modeling methodology with "feedback loops" procedures to insure internal modeling consistency. The model incorporates multi-modal analytical capabilities to analyze the following modes of travel: local and express bus transit, urban rail, commuter rail, toll roads, carpools, truck traffic, as well as non-motorized transportation which includes pedestrian and bicycle trips. The model responds to changes in land use types, household characteristics, transportation infrastructure, and travel costs such as transit fares, parking costs, tolls, and auto operating costs.

5.2 PEAK HOUR FORECASTS

The future year 2040 volumes were derived based on existing peak hour count data and forecast link volumes obtained from the Orange County Transportation Analysis Model (OCTAM 5.0). OCTAM 5.0 (TransCad) is the accepted sub-regional model for forecasting travel demand for Orange County. Growth factors for each intersection approach and departure were interpolated from OCTAM 5.0 link plots for the baseline 2016 and 2045 scenarios. These growth factors were then applied to existing counts to forecast future turning movement volumes at each of the study intersections.

5.2.1 Turning Movement Development

It should be noted that Intersection #63 (Standard Avenue and 4th Street) does not currently exist, but is assumed to be constructed in the future year (2045) scenarios. Turning movement volumes for this intersection were developed through use of a post-processor. Because this intersection may affect local travel patterns, turning movement volumes for two adjacent intersections were also developed using this method. These intersections are #62 (Santiago Street and Santa Ana Boulevard) and #64 (Standard Avenue and 1st Street).

The process of converting link level traffic volumes to turning movement volumes is called "post processing." The fundamental theory behind the post-processor is the belief that with proper calibration, travel demand models provide good forecasts at the link level. Turning level forecasts are obtainable from the model, but the reliability of the forecast breaks down at this level of detail, and the abstraction of reality into numerical methods becomes apparent. The frictionless nature of left and right turns in the travel demand model allow them to occur as easily as through movements, which does not represent a realistic situation.

IBI Group has developed a spreadsheet-based postprocessor that uses existing turning movement volumes or split percentages along with forecast link-level data to determine future turn movement volumes at selected intersections. For intersections where existing data is not available (#63), assumed split percentages of 50% for the through movements, 25% for the right turn movements, and 25% for the left turn movements are used.

The postprocessor generates another solution to the possible combination of turning movements at a given intersection. There are numerous approaches to post processing. The IBI Group postprocessor utilizes a procedure documented in Chapter 8 of the National Cooperative Highway Research Program Report 255. It uses an iterative process to balance the intersection throughput volumes, which provides the best combination of reasonable turning movement volumes and traceability of results. Most importantly, the model link volumes (especially the approach intersection volumes) are maintained

when using this methodology. The "post processing" method can be summarized into the following steps:

1. If existing peak hour turning movement volumes are not available, calculate a base set of turning volumes from the known/assumed splits and the peak hour approach link volumes.
2. Calculate the inbound and outbound volumes for each leg of the intersection from the initial set of turning volumes.
3. Multiply the inbound volumes by the ratio of the forecast inbound volume to the calculated inbound volume for each leg. The calculated inbound volumes should now match the forecast inbound volumes.
4. Multiply the new volumes by the ratio of the forecast outbound volume to the calculated outbound volume for each leg. The calculated outbound volumes should now match the forecast outbound volumes for each leg, but the calculated inbound volumes may no longer be equal to the forecast inbound volumes.
5. Compare the calculated approach and departure volumes with the forecast approach and departure volumes.
6. If the deviation is within the tolerance level, the solution is obtained.
7. If the deviation is not within the tolerance level, repeat steps 3 and 4.
8. Repeat this process until the tolerance is met.

5.2.2 Roadway Segment Forecasts

Forecast roadway segment volumes were also derived based on existing average daily traffic (ADT) volumes and forecast ADT link volumes obtained from OCTAM 5.0. Growth factors for each study roadway segment were interpolated from OCTAM 5.0 link plots for the 2016 and 2045 baseline scenarios. The growth factors were then applied to existing ADT counts to forecast future roadway segment ADT.

5.2.3 Santa Ana Fixed Guideway (OC Streetcar)

As described in Section 2.0 of this report, the OC Streetcar is a proposed streetcar service that would travel primarily along Santa Ana Boulevard and the Pacific Electric Right-of-Way (PEROW) between the Santa Ana Regional Transportation Center (SARTC) and Garden Grove (4 miles long). The streetcar is proposed to travel along an exclusive guideway or path on rails that are embedded in the pavement. The streetcar would adhere to the same signal operations as on-street automobiles for most locations where Transit Signal Priority is not implemented. Santa Ana Boulevard is reclassified between Raitt Street and Shelton Street from a four lane undivided roadway to a two lane roadway (divided with a center left turn lane or raised median with left turn pockets. The project also proposes to reconfigure portions of Santa Ana Boulevard between Raitt Street and SARTC to accommodate a bike lane on the north side of the street throughout the alignment as well as 14-inch high platforms. The Fixed Guideway service is proposed to run every 10 to 15 minutes from approximately 6:00 AM to 11:00 PM. Within OCTAM, the Fixed Guideway is modeled as ‘bus transit,’ which would translate to six extra trips assigned during the peak hour in the direction of operations.

In 2016, the OCTA Board conditionally approved the following additional MPAH amendments:

- Fourth Street from French Street to Grand Avenue – Secondary to Divided Collector
- Santa Ana Boulevard from Flower Street to Ross – Major to Primary
- Santa Ana Boulevard from French Street to Santiago Street – Primary to Divided Collector
- Santa Ana Boulevard from Raitt Street to Flower Streer – Major to Divided Collector

6.0 Future Year (2045) No Project

This scenario is used as the point of comparison for the network alternatives and consists of the key elements presented in Section 2.6.

This scenario will serve as a base for comparison and establish impacts of the proposed With Project network. The Future Year 2045 No Project intersection geometries are the same as existing. The future year 2045 No Project volumes for the AM peak hour are shown in Table 6-1 and the PM peak hour volumes are shown in Table 6-2.

Table 6-1 Future Year (2045) No Project Volumes – AM Peak Hour

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
1	Euclid Street and Bolsa Avenue	103	870	149	200	1785	101	252	937	177	190	606	194
2	Euclid Street and McFadden Avenue	162	1227	146	148	2062	171	255	521	323	151	335	127
3	Euclid Street and Edinger Avenue	127	801	68	168	2442	224	160	700	428	125	761	139
4	Newhope Street and Hazard Avenue	78	590	84	88	1302	119	108	276	204	119	397	159
5	Newhope Street and McFadden Avenue	77	342	120	122	1213	113	135	492	160	190	484	108
6	Harbor Boulevard and SR-22 WB Off-Ramp / Banner Drive	84	1534	0	0	1465	19	81	0	133	836	44	117
7	Trask Avenue and SR-22 EB On-Ramp	0	0	0	0	0	0	713	893	0	0	852	159
8	Harbor Boulevard and Westminster Avenue	178	1173	251	258	2021	115	192	1010	36	415	1124	306
9	Harbor Boulevard and 1st Street	95	756	163	236	1989	129	138	919	178	196	497	116
10	Harbor Boulevard and McFadden Avenue	104	1059	101	190	2004	67	177	462	138	138	311	89
11	Harbor Boulevard and Edinger Avenue	103	772	146	204	2349	68	123	743	373	191	424	176
12	Harbor Boulevard and Warner Avenue	109	665	169	429	1933	116	101	1440	379	138	723	122
13	Harbor Boulevard and Segerstrom Avenue	107	759	48	169	2274	85	82	689	278	140	434	98
14	Hyland Avenue / OCTA Bus Base and MacArthur Boulevard	86	4	24	8	2	19	7	1934	767	68	517	21
15	Harbor Boulevard and MacArthur Boulevard	131	920	94	295	1701	118	131	1183	357	128	427	127
16	Harbor Boulevard and Sunflower Avenue	221	1128	209	233	2204	54	13	153	59	139	178	101
17	Harbor Boulevard and I-405 NB Off-Ramp	0	1915	0	0	1978	0	0	0	0	399	0	702
18	Harbor Boulevard and I-405 SB Off-Ramp	0	1963	0	0	1253	0	475	0	529	0	0	0
19	Fairview Street and Civic Center Drive	7	1569	508	332	1915	8	7	25	25	100	3	52
20	Fairview Street and 1st Street	200	1538	289	245	1426	164	200	1153	179	120	539	181

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
21	Fairview Street and McFadden Avenue	141	1510	202	154	1878	136	221	522	120	147	380	30
22	Fairview Street and Edinger Avenue	200	883	123	223	1558	132	361	1002	268	421	553	110
23	Fairview Street and Warner Avenue	222	981	129	194	1543	113	68	991	295	267	807	261
24	Fairview Street and MacArthur Boulevard	261	811	94	290	1460	163	121	984	145	235	494	140
25	Fairview Road and Sunflower Avenue	185	1071	163	191	1627	104	49	322	65	357	299	154
26	Greenville Street and Edinger Avenue	186	0	251	0	0	0	0	1821	444	153	813	0
27	Greenville Street and Segerstrom Avenue	47	193	78	154	472	160	46	1035	165	190	768	88
28	Raitt Street and McFadden Avenue	67	618	98	123	938	128	122	743	95	146	461	82
29	Raitt Street and Edinger Avenue	197	524	189	163	770	91	324	1980	285	122	954	56
30	Bear Street and MacArthur Boulevard	71	245	104	199	756	300	92	1581	108	62	1041	88
31	Bristol Street and 17th Street	251	1292	218	487	2001	263	324	963	156	368	845	280
32	Bristol Street and Civic Center Drive	133	1178	104	403	1628	101	165	836	103	127	421	87
33	Bristol Street and Santa Ana Boulevard	69	1502	209	153	1684	46	171	831	72	185	462	79
34	Bristol Street and 1st Street	205	1430	181	315	1298	183	200	1231	124	90	678	99
35	Bristol Street and McFadden Avenue	125	1117	56	204	1986	205	309	531	261	262	729	84
36	Bristol Street and Warner Avenue	221	993	183	600	2033	230	165	919	229	231	1058	180
37	Bristol Street and Segerstrom Avenue	70	778	146	283	1011	119	280	1354	125	134	607	78
38	Bristol Street and Alton Avenue	11	739	55	230	1591	36	164	101	211	41	87	31
39	Bristol Street and MacArthur Boulevard	102	531	133	329	1434	150	166	1203	244	159	758	110
40	Bristol Street and Sunflower Avenue	111	546	161	242	1370	103	112	926	375	295	480	166
41	Bristol Street and I-405 NB Ramps	0	1638	210	0	1918	8	0	0	36	145	87	796
42	Bristol Street and I-405 SB Ramps	125	1225	0	0	1030	886	696	0	636	0	0	0
43	Flower Street and Santa Ana Boulevard	100	936	136	214	723	97	211	1315	150	143	458	191
44	Flower Street and 1st Street	139	602	159	334	1058	111	148	1355	54	209	861	123
45	Flower Street and McFadden Avenue	70	511	44	118	655	95	112	1278	97	113	764	103
46	Flower Street and Segerstrom Avenue	86	451	100	98	544	120	223	1531	427	104	764	84
47	Flower Street and MacArthur Boulevard	26	170	88	167	361	270	151	1716	73	62	1049	67
48	Main Street and	105	724	375	198	1034	173	361	510	222	316	276	230

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
	La Veta Avenue												
49	Main Street and Mainplace Drive / Memory Lane	34	920	301	36	1386	290	185	291	20	132	151	10
50	Main Street and 17th Street	133	788	169	237	1322	85	127	1336	67	356	1425	21
51	Main Street and Civic Center Drive	142	925	81	55	970	148	120	727	132	43	566	34
52	Main Street and Santa Ana Boulevard	66	1050	0	0	1135	100	0	0	0	90	1250	96
53	Main Street and 4th Street	0	939	22	0	961	24	0	70	11	0	140	34
54	Main Street and 1st Street	103	532	54	77	772	57	106	1241	131	86	1072	60
55	Main Street and McFadden Avenue	93	874	44	162	1259	25	86	815	89	164	438	126
56	Main Street and Edinger Avenue	99	561	61	211	975	51	96	1248	168	108	630	77
57	Main Street and MacArthur Boulevard	51	295	250	539	709	160	230	1336	242	138	411	206
58	Penn Way and 17th Street	52	0	260	0	0	0	0	1341	684	214	1722	0
59	Santiago Street / I-5 NB Ramps and 17th Street	720	33	21	54	0	279	89	932	337	0	1245	20
60	Penn Way and I-5 SB Ramps	0	260	230	951	196	0	0	0	0	196	0	110
61	Santiago Street and Civic Center Drive	487	338	47	10	590	144	182	69	369	108	99	20
62	Santiago Street and Santa Ana Boulevard	188	611	303	409	972	253	118	732	99	297	699	258
63	Standard Avenue and 4th Street	191	473	248	431	604	332	298	624	219	250	550	340
64	Standard Avenue and 1st Street	45	631	312	123	901	41	161	1,959	121	194	1,282	120
65	Standard Avenue and McFadden Avenue	94	360	162	226	547	38	34	1178	142	150	397	89
66	Halladay Street and Warner Avenue	95	0	220	0	0	0	0	1833	207	260	986	0
67	Halladay Street and Dyer Road	15	24	65	450	91	96	46	1537	11	104	566	91
68	SR-55 SB Ramps and MacArthur Boulevard	0	0	0	998	0	903	0	1349	961	0	1187	135
69	SR-55 NB Ramps and MacArthur Boulevard	946	0	1017	0	0	0	0	1468	726	0	517	244
70	SR-55 SB Ramps and Dyer Road	286	34	654	50	242	60	37	1422	303	348	552	92
71	Glassell Street and La Veta Avenue	263	412	125	14	295	65	57	293	563	367	387	9
72	Glassell Street and SR-22 WB Ramps	511	574	0	0	1017	473	0	0	0	323	6	483
73	Glassell Street / Grand Avenue and SR-22 EB Ramps	0	918	245	373	977	0	270	0	1058	0	0	0
74	Grand Avenue and Fairhaven Avenue	21	840	121	207	1,718	38	99	60	59	213	24	192
75	Grand Avenue and Santa Clara Avenue	75	528	136	345	1,687	380	143	233	48	200	385	352
76	Grand Avenue and 17th Street	186	543	373	340	1,426	280	198	739	94	342	894	98

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
77	Grand Avenue and I-5 NB Ramps	0	1056	610	90	2893	0	0	0	0	507	0	140
78	Grand Avenue and Santa Ana Boulevard	49	694	35	202	1670	1473	268	221	436	6	475	43
79	Grand Avenue and 1st Street	208	732	34	99	1432	174	436	1041	295	216	759	87
80	Grand Avenue and Chestnut Avenue	53	737	163	161	1937	53	34	239	63	130	384	239
81	Grand Avenue and McFadden Avenue	181	764	114	249	1672	163	205	663	201	123	440	111
82	Grand Avenue and Edinger Avenue	47	472	92	243	1244	243	347	1447	139	189	724	158
83	Grand Avenue and Warner Avenue	142	429	184	183	528	178	333	1188	467	92	406	137
84	SR-55 NB Ramps and Dyer Road	610	0	499	0	0	0	0	1618	647	0	599	361
85	Cambridge Street and La Veta Avenue	185	235	0	0	480	245	273	0	436	0	0	0
86	Cambridge Street and Fairhaven Avenue	0	0	0	567	0	183	80	216	0	0	195	152
87	Mabury Street and 1st Street	6	0	157	248	147	554	0	1230	13	38	579	0
88	Tustin Street and La Veta Avenue	7	301	87	67	1307	4	9	11	35	307	1	47
89	Tustin Street and SR-22 WB On-Ramp	614	571	0	0	1171	699	0	0	0	0	0	0
90	Tustin Street and SR-22 EB Off-Ramp / Seba Avenue	0	953	5	17	1049	0	275	27	1182	6	0	43
91	Tustin Street and Fairhaven Avenue	101	586	103	280	2,411	48	84	317	546	416	460	601
92	Tustin Avenue and Santa Clara Avenue	83	453	84	151	3,094	98	335	847	618	160	332	166
93	Tustin Avenue and 17th Street	127	226	269	716	2,067	23	621	2,450	418	664	1,047	256
94	Tustin Avenue and 4th Street	80	408	365	601	765	237	126	748	31	125	704	457
95	SR-55 SB Ramps / Auto Mall Drive and Edinger Avenue	456	68	540	50	30	8	36	1426	527	510	1202	157
96	SR-55 NB Ramps / Del Amo Avenue and Newport Avenue	392	104	66	21	512	750	269	163	155	8	223	4
97	Red Hill Avenue and Edinger Avenue	101	374	106	195	828	388	397	1276	271	255	1234	173
98	Red Hill Avenue and Warner Avenue	68	414	56	20	935	188	273	464	342	120	427	76
99	Red Hill Avenue and Barranca Parkway	152	379	125	163	719	94	124	748	296	511	571	111
100	Red Hill Avenue and Alton Parkway	225	663	415	212	962	154	158	490	490	342	290	163
101	Red Hill Avenue and MacArthur Boulevard	83	742	13	186	481	441	1153	596	98	32	308	789
102	Red Hill Avenue and Main Street	201	691	449	56	261	90	139	1309	254	154	309	73
103	I-5 SB Ramps and Santa Ana Boulevard	0	0	0	382	0	38	332	569	0	0	1267	370

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
104	Tustin Ranch Road and Warner Avenue	0	0	0	141	0	18	27	357	0	0	2130	490
105	Von Karman Avenue and Barranca Parkway	401	533	319	104	1021	446	219	823	275	902	1482	46

Table 6-2 Future Year (2045) No Project Volumes – PM Peak Hour

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
1	Euclid Street and Bolsa Avenue	169	1569	126	152	866	164	212	678	106	209	877	209
2	Euclid Street and McFadden Avenue	242	1973	127	96	1179	143	207	475	210	114	479	221
3	Euclid Street and Edinger Avenue	539	1610	115	136	897	228	141	544	163	128	1181	191
4	Newhope Street and Hazard Avenue	105	1159	45	46	982	117	75	148	91	88	556	160
5	Newhope Street and McFadden Avenue	188	1009	177	140	625	121	61	372	54	104	574	164
6	Harbor Boulevard and SR-22 WB Off-Ramp / Banner Drive	109	2457	0	0	1801	58	102	0	86	576	78	165
7	Trask Avenue and SR-22 EB On-Ramp	0	0	0	0	0	0	927	695	0	0	786	74
8	Harbor Boulevard and Westminster Avenue	237	1178	279	254	1752	202	215	768	37	357	1238	281
9	Harbor Boulevard and 1st Street	290	1497	166	245	1073	145	179	730	138	199	929	151
10	Harbor Boulevard and McFadden Avenue	169	1737	127	256	1094	99	241	585	73	198	474	137
11	Harbor Boulevard and Edinger Avenue	254	1597	193	290	843	77	109	460	81	196	1138	379
12	Harbor Boulevard and Warner Avenue	762	3656	275	262	1457	174	217	1539	352	249	2589	827
13	Harbor Boulevard and Segerstrom Avenue	273	1717	55	87	986	87	118	585	192	117	1269	461
14	Hyland Avenue / OCTA Bus Base and MacArthur Boulevard	1201	7	70	12	4	14	36	891	160	25	2350	12
15	Harbor Boulevard and MacArthur Boulevard	558	1441	83	204	1028	169	140	489	181	81	1373	258
16	Harbor Boulevard and Sunflower Avenue	154	1532	228	114	1417	43	81	220	229	301	632	236
17	Harbor Boulevard and I-405 NB Off-Ramp	0	1529	0	0	2570	0	0	0	0	496	0	801
18	Harbor Boulevard and I-405 SB Off-Ramp	0	1881	0	0	2281	0	177	0	815	0	0	0
19	Fairview Street and Civic Center Drive	6	1690	475	192	1784	0	2	6	4	424	0	157
20	Fairview Street and 1st Street	169	1241	112	236	1468	291	193	781	136	140	1060	164
21	Fairview Street and McFadden Avenue	164	1507	131	191	1553	242	158	427	106	158	545	134
22	Fairview Street and Edinger Avenue	184	1759	108	204	635	156	205	628	168	650	1375	302
23	Fairview Street and Warner Avenue	213	1695	158	182	921	93	168	815	126	168	989	214
24	Fairview Street and MacArthur Boulevard	225	1550	84	171	955	88	240	627	211	167	1272	223
25	Fairview Road and Sunflower Avenue	192	1725	375	140	1162	81	262	555	123	227	569	148

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
26	Greenville Street and Edinger Avenue	293	0	195	0	0	0	0	1061	216	153	1811	0
27	Greenville Street and Segerstrom Avenue	50	414	31	52	171	52	127	967	55	37	1414	202
28	Raitt Street and McFadden Avenue	61	872	136	51	533	86	108	640	56	98	827	114
29	Raitt Street and Edinger Avenue	171	736	206	114	396	99	125	862	123	192	2171	194
30	Bear Street and MacArthur Boulevard	273	1314	343	115	278	84	80	753	78	67	1211	193
31	Bristol Street and 17th Street	375	1823	303	337	1794	305	238	530	96	311	1170	396
32	Bristol Street and Civic Center Drive	222	1550	81	159	1458	149	195	549	65	184	789	89
33	Bristol Street and Santa Ana Boulevard	84	1702	97	117	1558	59	155	428	100	392	624	168
34	Bristol Street and 1st Street	392	1693	250	223	1209	273	160	900	115	196	1204	114
35	Bristol Street and McFadden Avenue	224	1649	90	111	1554	358	245	478	95	209	1088	127
36	Bristol Street and Warner Avenue	316	1182	216	338	1128	219	176	791	140	251	1481	434
37	Bristol Street and Segerstrom Avenue	182	1347	237	101	927	194	224	803	64	145	1313	66
38	Bristol Street and Alton Avenue	43	1681	158	116	870	54	25	35	65	91	150	29
39	Bristol Street and MacArthur Boulevard	321	1369	249	233	858	135	335	746	158	236	1370	259
40	Bristol Street and Sunflower Avenue	651	1376	222	215	804	230	301	588	228	247	952	303
41	Bristol Street and I-405 NB Ramps	0	2094	183	0	2375	22	0	0	204	350	300	1162
42	Bristol Street and I-405 SB Ramps	128	1570	0	0	1611	942	740	0	331	0	0	0
43	Flower Street and Santa Ana Boulevard	198	1206	99	87	442	40	357	1029	168	186	649	192
44	Flower Street and 1st Street	224	1063	253	200	549	159	102	895	74	210	1415	147
45	Flower Street and McFadden Avenue	91	1234	76	46	352	57	124	928	37	93	1159	166
46	Flower Street and Segerstrom Avenue	122	859	82	84	469	135	203	1011	107	92	1545	99
47	Flower Street and MacArthur Boulevard	130	621	72	93	224	215	199	947	60	62	1989	177
48	Main Street and La Veta Avenue	347	1059	496	164	1031	266	327	466	209	282	563	226
49	Main Street and Mainplace Drive / Memory Lane	113	1186	225	52	1083	143	391	433	116	278	227	110
50	Main Street and 17th Street	197	1019	222	222	969	150	224	1256	74	199	1220	81
51	Main Street and Civic Center Drive	92	1169	98	52	853	54	239	1322	158	38	384	39
52	Main Street and Santa Ana Boulevard	51	1152	0	0	1083	53	0	0	0	92	924	120
53	Main Street and 4th Street	0	950	45	0	864	39	0	70	39	0	229	58

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
54	Main Street and 1st Street	152	745	65	146	559	119	116	1172	87	111	1244	87
55	Main Street and McFadden Avenue	132	1037	64	123	834	61	182	805	98	133	752	338
56	Main Street and Edinger Avenue	101	1069	49	129	646	88	118	698	78	102	1364	141
57	Main Street and MacArthur Boulevard	446	1067	293	265	345	260	313	643	62	193	1529	444
58	Penn Way and 17th Street	1113	0	543	0	0	0	0	1672	539	123	1440	0
59	Santiago Street / I-5 NB Ramps and 17th Street	330	44	17	50	0	130	114	1047	688	0	1564	42
60	Penn Way and I-5 SB Ramps	0	631	414	592	137	0	0	0	0	214	0	183
61	Santiago Street and Civic Center Drive	194	598	60	32	456	117	266	76	269	14	19	18
62	Santiago Street and Santa Ana Boulevard	135	833	236	378	639	103	164	673	87	255	546	347
63	Standard Avenue and 4th Street	251	543	214	254	428	297	302	477	201	233	648	351
64	Standard Avenue and 1st Street	109	724	259	142	679	47	168	1,279	65	264	1,888	116
65	Standard Avenue and McFadden Avenue	194	765	94	237	520	90	95	632	108	123	749	217
66	Halladay Street and Warner Avenue	338	0	704	0	0	0	2	868	87	272	2159	0
67	Halladay Street and Dyer Road	61	266	307	296	39	83	147	1271	9	51	1655	132
68	SR-55 SB Ramps and MacArthur Boulevard	0	0	0	299	0	724	0	1187	1058	0	1474	579
69	SR-55 NB Ramps and MacArthur Boulevard	620	0	412	0	0	0	0	711	731	0	1467	1056
70	SR-55 SB Ramps and Dyer Road	386	12	291	103	226	110	59	1379	187	566	1008	65
71	Glassell Street and La Veta Avenue	573	595	194	14	471	35	106	346	594	211	382	15
72	Glassell Street and SR-22 WB Ramps	660	1079	0	0	1007	293	0	0	0	251	9	446
73	Glassell Street / Grand Avenue and SR-22 EB Ramps	0	1450	370	461	824	0	229	4	503	0	0	0
74	Grand Avenue and Fairhaven Avenue	54	1,420	284	242	974	89	79	45	33	221	42	157
75	Grand Avenue and Santa Clara Avenue	103	1,386	288	240	946	240	114	139	26	157	282	300
76	Grand Avenue and 17th Street	288	1,026	259	294	634	140	321	823	138	279	1,031	187
77	Grand Avenue and I-5 NB Ramps	0	1855	1432	62	1501	0	0	0	0	151	0	182
78	Grand Avenue and Santa Ana Boulevard	185	2091	34	38	839	595	377	230	363	34	228	165
79	Grand Avenue and 1st Street	188	1435	43	113	667	266	326	1080	107	154	958	176
80	Grand Avenue and Chestnut Avenue	152	1142	198	161	716	121	70	214	47	139	433	252
81	Grand Avenue and McFadden Avenue	222	1264	218	153	696	187	122	454	79	96	762	168

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
82	Grand Avenue and Edinger Avenue	244	1411	122	203	501	281	182	787	63	93	1673	217
83	Grand Avenue and Warner Avenue	183	660	146	140	452	208	306	587	127	241	1539	504
84	SR-55 NB Ramps and Dyer Road	181	0	49	0	0	0	0	1183	602	0	1488	929
85	Cambridge Street and La Veta Avenue	235	327	0	0	206	191	375	0	247	0	0	0
86	Cambridge Street and Fairhaven Avenue	0	0	0	219	0	76	132	230	0	0	237	295
87	Mabury Street and 1st Street	23	0	233	195	83	367	0	1334	21	40	549	0
88	Tustin Street and La Veta Avenue	38	863	205	79	701	13	13	5	20	146	4	90
89	Tustin Street and SR-22 WB On-Ramp	466	1340	0	0	573	294	0	0	0	0	0	0
90	Tustin Street and SR-22 EB Off-Ramp / Seba Avenue	0	1416	4	40	550	0	440	39	558	28	0	67
91	Tustin Street and Fairhaven Avenue	280	1,492	132	356	940	108	89	200	163	100	220	208
92	Tustin Avenue and Santa Clara Avenue	191	923	142	199	1,574	109	72	227	133	133	166	157
93	Tustin Avenue and 17th Street	253	1,083	557	377	404	40	524	1,029	139	243	798	444
94	Tustin Avenue and 4th Street	28	299	97	459	339	124	208	743	38	118	798	491
95	SR-55 SB Ramps / Auto Mall Drive and Edinger Avenue	401	32	423	110	50	37	47	1677	472	468	1220	146
96	SR-55 NB Ramps / Del Amo Avenue and Newport Avenue	879	262	51	17	209	803	156	54	32	23	348	16
97	Red Hill Avenue and Edinger Avenue	204	1469	233	105	209	169	410	1051	128	90	1161	567
98	Red Hill Avenue and Warner Avenue	374	1281	147	79	304	385	246	668	104	76	1598	210
99	Red Hill Avenue and Barranca Parkway	338	1270	327	241	408	192	172	637	84	110	839	245
100	Red Hill Avenue and Alton Parkway	26	1458	211	122	519	4	434	1065	545	1299	222	801
101	Red Hill Avenue and MacArthur Boulevard	175	1133	14	315	654	1148	499	230	35	39	810	568
102	Red Hill Avenue and Main Street	436	941	254	88	640	348	200	714	193	277	1575	88
103	I-5 SB Ramps and Santa Ana Boulevard	0	0	0	304	0	67	765	865	0	0	621	170
104	Tustin Ranch Road and Warner Avenue	0	0	0	553	0	38	65	2154	0	0	856	369
105	Von Karman Avenue and Barranca Parkway	346	1992	434	80	407	280	765	1397	195	232	734	250

6.1 FUTURE YEAR (2045) NO PROJECT VEHICLE MILES TRAVELED (VMT)

Table 7-6 presents the VMT analysis results for the Future Year (2045) No Project scenario. VMT calculations are based on the scenario parameters and methodology as described in Sections 2.6 and 3.1, respectively.

Table 6-3 Future Year (2045) VMT Summary

	I – I VMT	I – X VMT	X – I VMT	Total VMT	Service Population	VMT/SP
City	692,704	5,737,798	5,733,292	12,163,794	534,238	22.8
County	52,994,916	29,554,879	29,660,308	112,210,103	4,221,830	26.6

SP = Service Population = Total Employees + Total Population. Reduction factor applied to Total Employees as noted in Section 3.1 and shown in Appendix F. I-I = Internal-Internal; I-X = Internal-External; X-I = External-Internal.

6.2 ROADWAY SEGMENT LEVEL OF SERVICE

A summary of the forecast roadway segment volumes and corresponding level of service results for the future year 2045 No Project condition is shown in Table 6-4. The following roadway segments are forecast to operate at a deficient LOS:

- Segment 8 – Harbor Boulevard from Segerstrom Avenue to MacArthur Boulevard
- Segment 23 – Main Street from 1st Street to Bishop Street
- Segment 39 – Bristol Street from Edinger Avenue to Warner Avenue
- Segment 43 – Flower Street from Warner Avenue to Segerstrom Avenue
- Segment 45 – Main Street from McFadden Avenue to Edinger Avenue
- Segment 52 – Edinger Avenue from Richie Street to Newport Avenue
- Segment 57 – Dyer Road from Grand Avenue to Pullman Street
- Segment 58 – McFadden Avenue from Bristol Street to Flower Street
- Segment 62 – Fourth Street from French Street to Standard Avenue
- Segment 63 – Broadway from 17th Street to Civic Center Drive
- Segment 72 – McFadden Avenue from Main Street to Standard Avenue
- Segment 73 – Penn Way/Santiago Street from I-5 SB Ramps to Santa Ana Boulevard
- Segment 74 – Raitt Street from Santa Ana Boulevard to 1st Street
- Segment 84 – Dyer Road from Pullman Street to Red Hill Avenue

Table 6-4 Future Year (2045) No Project Roadway Segment LOS

ID	Street	Segment	Lanes	ADT	LOS
1	1st Street	Euclid Street to Ward Street	6D	21,700	A
2	Euclid Street	1st Street to McFadden Avenue	6D	35,900	B
3	Westminster Avenue	Harbor Boulevard to Fairview Street	6D	25,400	A
4	Harbor Boulevard	Westminster Avenue/17th Street to Hazard Avenue	6D	41,100	C
5	1st Street	Harbor Boulevard to Jackson	6D	23,700	A
6	Edinger Avenue	Harbor Boulevard to Fairview Street	6D	23,300	A
7	Warner Avenue	Harbor Boulevard to Fairview Street	6D	28,500	A
8	Harbor Boulevard	Segerstrom Avenue to MacArthur Boulevard	6D	59,600	F
9	Fairview Street	1st Street to Willits Street	6D	38,800	B
10	1st Street	Sullivan Street to Raitt Street	6D	24,400	A
11	Bristol Street	17th Street to Santa Clara Avenue	6D	43,200	C
12	17th Street	College Avenue to Bristol Street	6D	30,800	A
13	Bristol Street	17th Street to Washington Avenue	6D	47,300	D
14	Fairview Street	Trask Avenue to 17th Street	6D	47,400	D
15	Bristol Street	1st Street to Bishop Street	6D	45,500	D
16	Civic Center Drive	Bristol Street to Flower Street	4U	18,400	C
17	Flower Street	1st Street to Bishop Street	4U	9,400	A
18	Main Street	17th Street to 20th Street	6D	40,800	C
19	Main Street	Washington Street to Civic Center Drive	4U	16,600	B
20	Civic Center Drive	Flower Street to Ross Street	4U	10,200	A
21	Santa Ana Boulevard	Flower Street to Ross Street	6D	22,200	A
22	1st Street	Main Street to Standard Avenue	6D	38,200	B
23	Main Street	1st Street to Bishop Street	4U	29,400	F
24	Grand Avenue	Santa Clara Avenue to Fairhaven Street	6D	31,200	A
25	Grand Avenue	Santa Ana Boulevard to 4th Street	6D	24,600	A
26	Santa Clara Avenue	Grand Avenue to Tustin Avenue	4U	10,800	A
27	Tustin Avenue	Santa Clara Avenue to Fairhaven Street	6D	23,400	A
28	17th Street	Cabrillo Park Drive to Tustin Avenue	6D	32,700	A
29	Tustin Avenue	Fruit Street to 4th Street	6D	22,100	A
30	1st Street	Grand Avenue to Elk Lane	6D	29,300	A
31	1st Street	Cabrillo Park Drive to Tustin Avenue	6D	15,600	A
32	Fairview Street	Edinger Avenue to Harvard Street	6D	46,200	D
33	Fairview Street	Warner Avenue to Segerstrom Avenue	6D	43,200	C
34	MacArthur Boulevard	Harbor Boulevard to Fairview Street	6D	33,500	A
35	Edinger Avenue	Fairview Street to Greenville Street	6D	20,400	A
36	McFadden Avenue	Fairview Street to Raitt Street	4U	20,000	D
37	MacArthur Boulevard	Fairview Street to Raitt Street	6D	29,700	A
38	Segerstrom Avenue	Fairview Street to Raitt Street	6D	26,300	A
39	Bristol Street	Edinger Avenue to Warner Avenue	6D	53,500	E
40	Bristol Street	Warner Avenue to Segerstrom Avenue	6D	45,100	D

ID	Street	Segment	Lanes	ADT	LOS
41	Warner Avenue	Raitt Street to Bristol Street	6D	22,600	A
42	Bristol Street	MacArthur Boulevard to Sunflower Avenue	6D	49,100	D
43	Flower Street	Warner Avenue to Segerstrom Avenue	4D	36,200	E
44	Edinger Avenue	Flower Street to Main Street	6D	23,200	A
45	Main Street	McFadden Avenue to Edinger Avenue	4U	25,100	F
46	Main Street	Edinger Avenue to Warner Avenue	5D	34,400	C
47	Main Street	Warner Avenue to Dyer Road	6D	36,700	B
48	Segerstrom Avenue	Bristol Street to Flower Street	6D	24,400	A
49	MacArthur Boulevard	Flower Street to Main Street	6D	35,400	B
50	Main Street	MacArthur Boulevard to Sunflower Avenue	6D	26,300	A
51	Grand Avenue	Edinger Avenue to Warner Avenue	6D	34,100	B
52	Edinger Avenue	Richie Street to Newport Avenue	6D	52,800	E
53	Warner Avenue	Grand Avenue to Red Hill Avenue	6D	31,800	A
54	Warner Avenue	Main Street to Standard Avenue	6D	22,700	A
55	McFadden Avenue	Newhope Street to Harbor Boulevard	4U	13,800	A
56	McFadden Avenue	Standard Avenue to Grand Avenue	4U	16,100	B
57	Dyer Road	Grand Avenue to Pullman Street	6D	73,900	F
58	McFadden Avenue	Bristol Street to Flower Street	4U	23,300	E
59	Main Street	La Veta Avenue to Memory Lane	8D	48,800	B
60	1st Street	Bristol Street to Flower Street	6D	26,600	A
61	Fairhaven Avenue	Grand Avenue to Tustin Avenue	4D	13,500	A
62	4th Street	French Street to Standard Avenue	4U	22,800	E
63	Broadway	17th Street to Civic Center Drive	4U	29,600	F
64	Broadway	Civic Center Drive to 1st Street	4U	12,200	A
65	Cambridge Street	SR-22 to Fairhaven Avenue	4U	9,200	A
66	Chestnut Avenue	Standard Avenue to Lyon Street	4U	11,900	A
67	Civic Center Drive	French Street to Santiago Street	4U	2,100	A
68	Civic Center Drive	Fairview Road to Bristol Street	4U	20,300	D
69	Flower Street	Edinger Avenue to Warner Avenue	4U	13,300	A
70	Halladay Avenue	Warner Avenue to Dyer Road	4U	22,100	D
71	Hazard Avenue	Euclid Street to Harbor Boulevard	4U	15,400	B
72	McFadden Avenue	Main Street to Standard Avenue	4U	24,700	E
73	Penn Way/Santiago Street	I-5 SB Ramps to Santa Ana Boulevard	4U	26,300	F
74	Raitt Street	Santa Ana Boulevard to 1st Street	4U	23,100	E
75	Raitt Street	Warner Avenue to Segerstrom Avenue	4U	20,000	D
76	Santa Ana Boulevard	French Street to Santiago Street	4D	16,500	A
77	Santa Ana Boulevard	Raitt Street to Bristol Street	6D	27,000	A
78	Standard Avenue	Chestnut Avenue to McFadden Avenue	4U	19,600	C
79	Standard Avenue	Edinger Avenue to Warner Avenue	4U	18,200	C
80	Greenville Street	Edinger Avenue to Warner Avenue	2U	6,600	A
81	Greenville Street	Warner Avenue to Segerstrom Avenue	4D	8,400	A
82	Flower Street	17th Street to Northern Terminus	2D	5,900	A

ID	Street	Segment	Lanes	ADT	LOS
83	Logan Street	Civic Center Drive to Santa Ana Boulevard	2U	- *	-
84	Dyer Road	Pullman Street to Red Hill Avenue	6D	58,000	F
85	Fairhaven Avenue	Tustin Street to Yorba Street	4U	17,214	B
86	Santa Clara Avenue	Tustin Street to Yorba Street	4U	9,004	A
87	Harbor Boulevard	McFadden Avenue to Edinger Avenue	6D	36,400	B
88	Harbor Boulevard	Edinger Avenue to Warner Avenue	6D	44,900	C

Notes:
* Not available.
(1) ADT – Average Daily Traffic Volumes
(2) LOS – Level of Service
(3) #D – total number of lanes in both directions divided by raised or striped median; #U – total number of undivided lanes in both directions.
(4) Roadway capacities shown in Table 3-1.

6.3 INTERSECTION LEVEL OF SERVICE

A summary of the AM and PM peak hour level of service analysis results for the Future Year (2045) No Project condition is provided in Table 6-5. Intersections are considered unacceptable if the level of service (LOS) is "E" or "F". It should be noted that Caltrans and CMP intersection have a minimum LOS of C and E, respectively. The following intersections are forecast to have unacceptable level of service in the Future Year (2045) No Project condition:

- INT 2 – Euclid Street and McFadden Avenue (City of Santa Ana)
- INT 3 – Euclid Street and Edinger Avenue (City of Fountain Valley)
- INT 8 – Harbor Boulevard and Westminster Avenue (City of Garden Grove / City of Santa Ana)
- INT 12 – Harbor Boulevard and Warner Avenue (City of Santa Ana – CMP)
- INT 13 – Harbor Boulevard and Segerstrom Avenue (City of Santa Ana)
- INT 14 – Hyland Avenue and MacArthur Boulevard (City of Costa Mesa)
- INT 22 – Fairview Street and Edinger Avenue (City of Santa Ana)
- INT 29 – Raitt Street and Edinger Avenue (City of Santa Ana)
- INT 32 – Bristol Street and Civic Center Drive (City of Santa Ana)
- INT 35 – Bristol Street and McFadden Avenue (City of Santa Ana)
- INT 36 – Bristol Street and Warner Avenue (City of Santa Ana)
- INT 44 – Flower Street and 1st Street (City of Santa Ana)
- INT 45 – Flower Street and McFadden Avenue (City of Santa Ana)
- INT 51 – Main Street and Civic Center Drive (City of Santa Ana)
- INT 52 – Main Street and Santa Ana Boulevard (City of Santa Ana)
- INT 55 – Main Street and McFadden Avenue (City of Santa Ana)
- INT 61 – Santiago Street and Civic Center Drive (City of Santa Ana)
- INT 62 – Santiago Street and Santa Ana Boulevard (City of Santa Ana)

- INT 63 – Standard Avenue and 4th Street (City of Santa Ana)
- INT 64 – Standard Avenue and 1st Street (City of Santa Ana)
- INT 66 – Halladay Street and Warner Avenue (City of Santa Ana)
- INT 67 – Halladay Street and Dyer Road (City of Santa Ana)
- INT 82 – Grand Avenue and Edinger Avenue (City of Santa Ana)
- INT 91 – Tustin Street and Fairhaven Avenue (City of Orange)
- INT 92 – Tustin Avenue and Santa Clara Avenue (City of Santa Ana)
- INT 93 – Tustin Avenue and 17th Street (City of Santa Ana)
- INT 96 – SR-55 NB Ramps / Del Amo Avenue and Newport Avenue (Caltrans)
- INT 100 – Red Hill Avenue and Alton Parkway (City of Irvine)
- INT 105 – Von Karman Avenue and Barranca Parkway (City of Irvine)

Table 6-5: Future Year (2045) No Project Intersection LOS Summary

ID	INTERSECTION	AM		PM	
		V/C or Delay	LOS	V/C or Delay	LOS
1	Euclid Street and Bolsa Avenue	0.86	D	0.86	D
2	Euclid Street and McFadden Avenue	0.98	E	0.90	D
3	Euclid Street and Edinger Avenue	0.99	E	0.89	D
4	Newhope Street and Hazard Avenue	0.78	C	0.72	C
5	Newhope Street and McFadden Avenue	0.83	D	0.78	C
6	Harbor Boulevard and SR-22 WB Off-Ramp / Banner Drive	28.4	C	24.2	C
7	Trask Avenue and SR-22 EB On-Ramp	12.0	B	13.6	B
8	Harbor Boulevard and Westminster Avenue	0.99	E	0.88	D
9	Harbor Boulevard and 1st Street	0.79	C	0.78	C
10	Harbor Boulevard and McFadden Avenue	0.79	C	0.81	D
11	Harbor Boulevard and Edinger Avenue	0.84	D	0.73	C
12	Harbor Boulevard and Warner Avenue	0.79	C	1.54	F
13	Harbor Boulevard and Segerstrom Avenue	0.97	E	0.92	E
14	Hyland Avenue / OCTA Bus Base and MacArthur Boulevard	0.61	B	0.92	E
15	Harbor Boulevard and MacArthur Boulevard	0.74	C	0.78	C
16	Harbor Boulevard and Sunflower Avenue	0.70	B	0.72	C
17	Harbor Boulevard and I-405 NB Off-Ramp	18.0	B	18.3	B
18	Harbor Boulevard and I-405 SB Off-Ramp	15.0	B	17.9	B
19	Fairview Street and Civic Center Drive	0.74	C	0.76	C
20	Fairview Street and 1st Street	0.86	D	0.90	D
21	Fairview Street and McFadden Avenue	0.80	C	0.78	C
22	Fairview Street and Edinger Avenue	0.86	D	0.92	E
23	Fairview Street and Warner Avenue	0.82	D	0.80	C
24	Fairview Street and MacArthur Boulevard	0.68	B	0.77	C
25	Fairview Road and Sunflower Avenue	0.70	B	0.72	C
26	Greenville Street and Edinger Avenue	0.77	C	0.60	A
27	Greenville Street and Segerstrom Avenue	0.84	D	0.78	C
28	Raitt Street and McFadden Avenue	0.78	C	0.76	C
29	Raitt Street and Edinger Avenue	0.99	E	0.99	E
30	Bear Street and MacArthur Boulevard	0.71	C	0.85	D
31	Bristol Street and 17th Street	0.87	D	0.82	D
32	Bristol Street and Civic Center Drive	0.94	E	0.91	E
33	Bristol Street and Santa Ana Boulevard	0.81	D	0.85	D
34	Bristol Street and 1st Street	0.77	C	0.83	D
35	Bristol Street and McFadden Avenue	0.96	E	1.03	F
36	Bristol Street and Warner Avenue	0.92	E	0.85	D
37	Bristol Street and Segerstrom Avenue	0.81	D	0.87	D
38	Bristol Street and Alton Avenue	0.55	A	0.63	B
39	Bristol Street and MacArthur Boulevard	0.70	B	0.77	C

ID	INTERSECTION	AM		PM	
		V/C or Delay	LOS	V/C or Delay	LOS
40	Bristol Street and Sunflower Avenue	0.65	B	0.69	B
41	Bristol Street and I-405 NB Ramps	20.8	C	28.5	C
42	Bristol Street and I-405 SB Ramps	23.9	C	18.3	B
43	Flower Street and Santa Ana Boulevard	0.81	D	0.86	D
44	Flower Street and 1st Street	0.93	E	0.88	D
45	Flower Street and McFadden Avenue	0.90	D	1.04	F
46	Flower Street and Segerstrom Avenue	0.78	C	0.87	D
47	Flower Street and MacArthur Boulevard	0.68	B	0.90	D
48	Main Street and La Veta Avenue	0.59	A	0.70	B
49	Main Street and Mainplace Drive / Memory Lane	0.51	A	0.56	A
50	Main Street and 17th Street	0.88	D	0.76	C
51	Main Street and Civic Center Drive	0.78	C	0.97	E
52	Main Street and Santa Ana Boulevard	0.93	E	0.79	C
53	Main Street and 4th Street	0.41	A	0.45	A
54	Main Street and 1st Street	0.68	B	0.74	C
55	Main Street and McFadden Avenue	0.89	D	0.93	E
56	Main Street and Edinger Avenue	0.80	C	0.87	D
57	Main Street and MacArthur Boulevard	0.68	B	0.75	C
58	Penn Way and 17th Street	12.2	B	25.5	C
59	Santiago Street / I-5 NB Ramps and 17th Street	30.0	C	19.0	B
60	Penn Way and I-5 SB Ramps	21.2	C	23.0	C
61	Santiago Street and Civic Center Drive	159.2	F	110.0	F
62	Santiago Street and Santa Ana Boulevard	1.04	F	1.02	F
63*	Standard Avenue and 4th Street	0.94	E	0.89	D
64	Standard Avenue and 1st Street	0.98	E	0.97	E
65	Standard Avenue and McFadden Avenue	0.85	D	0.83	D
66	Halladay Street and Warner Avenue	0.78	C	0.97	E
67	Halladay Street and Dyer Road	0.77	C	1.06	F
68	SR-55 SB Ramps and MacArthur Boulevard	19.9	B	17.8	B
69	SR-55 NB Ramps and MacArthur Boulevard	19.3	B	14.6	B
70	SR-55 SB Ramps and Dyer Road	25.7	C	26.5	C
71	Glassell Street and La Veta Avenue	0.80	C	0.74	C
72	Glassell Street and SR-22 WB Ramps	32.6	C	30.5	C
73	Glassell Street / Grand Avenue and SR-22 EB Ramps	30.6	C	31.6	C
74	Grand Avenue and Fairhaven Avenue	0.61	B	0.72	C
75	Grand Avenue and Santa Clara Avenue	0.84	D	0.81	D
76	Grand Avenue and 17th Street	0.79	C	0.86	D
77	Grand Avenue and I-5 NB Ramps	13.2	B	10.1	B
78	Grand Avenue and Santa Ana Boulevard	26.0	C	25.3	C
79	Grand Avenue and 1st Street	0.74	C	0.73	C

ID	INTERSECTION	AM		PM	
		V/C or Delay	LOS	V/C or Delay	LOS
80	Grand Avenue and Chestnut Avenue	0.70	B	0.69	B
81	Grand Avenue and McFadden Avenue	0.89	D	0.82	D
82	Grand Avenue and Edinger Avenue	0.84	D	1.00	E
83	Grand Avenue and Warner Avenue	0.61	B	0.83	D
84	SR-55 NB Ramps and Dyer Road	17.1	B	5.7	A
85	Cambridge Street and La Veta Avenue	31.6	D	19.7	C
86	Cambridge Street and Fairhaven Avenue	0.56	A	0.45	A
87	Mabury Street and 1st Street	27.4	C	27.1	C
88	Tustin Street and La Veta Avenue	0.45	A	0.38	A
89	Tustin Street and SR-22 WB On-Ramp	12.2	B	11.1	B
90	Tustin Street and SR-22 EB Off-Ramp / Seba Avenue	25.0	C	23.1	C
91	Tustin Street and Fairhaven Avenue	1.20	F	0.69	B
92	Tustin Avenue and Santa Clara Avenue	1.04	F	0.71	C
93	Tustin Avenue and 17th Street	0.91	E	0.80	C
94	Tustin Avenue and 4th Street	0.83	D	0.71	C
95	SR-55 SB Ramps / Auto Mall Drive and Edinger Avenue	25.2	C	25.5	C
96	SR-55 NB Ramps / Del Amo Avenue and Newport Avenue	25.4	C	39.1	D
97	Red Hill Avenue and Edinger Avenue	0.61	B	0.85	D
98	Red Hill Avenue and Warner Avenue	0.56	A	0.88	D
99	Red Hill Avenue and Barranca Parkway	0.55	A	0.54	A
100	Red Hill Avenue and Alton Parkway	0.86	D	1.18	F
101	Red Hill Avenue and MacArthur Boulevard	0.69	B	0.70	B
102	Red Hill Avenue and Main Street	0.72	C	0.81	D
103	I-5 SB Ramps and Santa Ana Boulevard	17.4	B	18.4	B
104	Tustin Ranch Road and Warner Avenue	0.52	A	0.65	B
105	Von Karman Avenue and Barranca Parkway	0.93	E	1.23	F

Notes: (1) LOS – Level of Service; (2) V/C – Volume to Capacity

7.0 Future Year (2045) With Project

This network alternative includes all the improvements listed in the No Project alternative, in addition to the improvements presented in Section 2.7.

Separate OCTAM 5.0 forecasts were produced for the With Project condition in order to understand traffic changes resulting from the proposed roadway improvements listed above. The Future Year (2045) With Project – AM and PM peak hour intersection turning movement volumes are shown in Tables 7-1 and 7-2.

Table 7-1 Future Year (2045) With Project Volumes – AM Peak Hour

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
1	Euclid Street and Bolsa Avenue	100	845	145	194	1725	97	194	721	136	190	606	194
2	Euclid Street and McFadden Avenue	156	1185	141	146	2031	168	227	463	287	106	234	89
3	Euclid Street and Edinger Avenue	127	801	68	180	2613	240	136	595	364	133	812	148
4	Newhope Street and Hazard Avenue	94	708	101	86	1262	116	17	44	33	17	57	23
5	Newhope Street and McFadden Avenue	77	342	120	116	1153	107	106	386	125	122	311	69
6	Harbor Boulevard and SR-22 WB Off-Ramp / Banner Drive	83	1508	0	0	1354	18	81	0	133	836	44	117
7	Trask Avenue and SR-22 EB On-Ramp	0	0	0	0	0	0	558	699	0	0	624	117
8	Harbor Boulevard and Westminster Avenue	159	1045	224	251	1970	113	173	910	32	406	1100	299
9	Harbor Boulevard and 1st Street	102	816	176	223	1876	122	118	788	153	229	580	135
10	Harbor Boulevard and McFadden Avenue	101	1026	98	179	1891	63	136	353	106	85	193	55
11	Harbor Boulevard and Edinger Avenue	95	713	135	212	2441	71	123	743	373	211	469	195
12	Harbor Boulevard and Warner Avenue	106	647	164	451	2034	122	100	1422	374	125	654	111
13	Harbor Boulevard and Segerstrom Avenue	107	759	48	173	2324	87	90	753	303	146	453	103
14	Hyland Avenue / OCTA Bus Base and MacArthur Boulevard	86	4	24	8	2	19	7	1915	760	82	626	26
15	Harbor Boulevard and MacArthur Boulevard	128	898	92	289	1662	115	133	1204	363	152	506	151
16	Harbor Boulevard and Sunflower Avenue	221	1128	209	242	2284	56	9	109	42	149	190	107
17	Harbor Boulevard and I-405 NB Off-Ramp	0	1915	0	0	2007	0	0	0	0	399	0	702
18	Harbor Boulevard and I-405 SB Off-Ramp	0	1993	0	0	1278	0	475	0	529	0	0	0
19	Fairview Street and Civic Center Drive	7	1435	465	314	1812	8	7	25	25	50	2	26
20	Fairview Street and 1st Street	196	1508	284	272	1579	181	170	977	151	180	809	271

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
21	Fairview Street and McFadden Avenue	138	1479	198	184	2242	162	92	216	50	93	240	19
22	Fairview Street and Edinger Avenue	212	935	131	225	1576	133	361	1002	268	463	608	121
23	Fairview Street and Warner Avenue	235	1039	136	205	1628	119	69	1010	301	277	836	271
24	Fairview Street and MacArthur Boulevard	280	870	100	269	1357	152	121	984	145	298	627	178
25	Fairview Road and Sunflower Avenue	182	1051	160	191	1627	104	44	286	58	357	299	154
26	Greenville Street and Edinger Avenue	140	0	188	0	0	0	0	1788	436	178	949	0
27	Greenville Street and Segerstrom Avenue	47	193	78	154	472	160	50	1127	180	210	847	97
28	Raitt Street and McFadden Avenue	34	309	49	69	528	72	52	313	40	60	190	34
29	Raitt Street and Edinger Avenue	85	228	82	80	376	45	330	2016	290	127	992	59
30	Bear Street and MacArthur Boulevard	61	210	89	192	728	289	99	1690	116	103	1735	147
31	Bristol Street and 17th Street	241	1241	210	449	1845	243	341	1015	164	386	886	293
32	Bristol Street and Civic Center Drive	129	1141	101	396	1597	100	80	404	50	145	481	100
33	Bristol Street and Santa Ana Boulevard	68	1482	206	172	1891	51	54	264	23	52	129	22
34	Bristol Street and 1st Street	208	1451	184	315	1298	183	206	1268	128	126	949	139
35	Bristol Street and McFadden Avenue	130	1159	58	228	2223	229	155	266	131	145	405	47
36	Bristol Street and Warner Avenue	221	993	183	643	2178	247	172	958	238	231	1058	180
37	Bristol Street and Segerstrom Avenue	70	778	146	283	1011	119	306	1480	136	157	712	91
38	Bristol Street and Alton Avenue	10	702	53	224	1551	36	190	117	244	41	87	31
39	Bristol Street and MacArthur Boulevard	95	491	123	319	1389	145	211	1531	311	191	910	132
40	Bristol Street and Sunflower Avenue	119	583	172	232	1316	99	135	1115	451	295	480	166
41	Bristol Street and I-405 NB Ramps	0	1638	210	0	2088	8	0	0	36	147	89	807
42	Bristol Street and I-405 SB Ramps	122	1195	0	0	1097	943	675	0	618	0	0	0
43	Flower Street and Santa Ana Boulevard	64	593	86	275	929	124	63	394	45	118	377	158
44	Flower Street and 1st Street	89	387	102	366	1158	121	107	983	39	161	664	95
45	Flower Street and McFadden Avenue	30	219	19	66	367	53	58	658	50	54	366	49
46	Flower Street and Segerstrom Avenue	86	451	100	98	544	120	237	1631	455	115	846	93
47	Flower Street and MacArthur Boulevard	26	170	88	163	352	264	163	1852	79	79	1329	85
48	Main Street and	123	844	438	161	843	141	350	495	215	334	291	243

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
	La Veta Avenue												
49	Main Street and Mainplace Drive / Memory Lane	35	955	313	27	1066	223	123	194	13	264	301	20
50	Main Street and 17th Street	156	929	199	225	1251	81	114	1203	60	369	1475	22
51	Main Street and Civic Center Drive	138	901	79	69	1222	186	75	454	83	52	679	41
52	Main Street and Santa Ana Boulevard	66	1050	0	0	1162	103	0	0	0	61	848	65
53	Main Street and 4th Street	0	1052	25	0	1098	27	0	93	14	0	105	26
54	Main Street and 1st Street	103	532	54	94	937	69	69	805	85	78	972	54
55	Main Street and McFadden Avenue	93	874	44	184	1434	28	44	419	46	97	259	74
56	Main Street and Edinger Avenue	104	589	64	239	1103	58	99	1288	174	149	867	106
57	Main Street and MacArthur Boulevard	60	344	292	539	709	160	230	1336	242	187	556	279
58	Penn Way and 17th Street	49	0	250	0	0	0	0	1279	652	236	1901	0
59	Santiago Street / I-5 NB Ramps and 17th Street	720	33	21	60	0	312	101	1062	384	0	1508	24
60	Penn Way and I-5 SB Ramps	0	192	170	837	173	0	0	0	0	170	0	95
61	Santiago Street and Civic Center Drive	318	221	31	6	335	82	212	81	431	126	116	23
62	Santiago Street and Santa Ana Boulevard	188	611	303	409	972	253	118	732	99	297	699	258
63	Standard Avenue and 4th Street	191	473	248	431	604	332	298	624	219	250	550	340
64	Standard Avenue and 1st Street	45	631	312	123	901	41	161	1959	121	194	1282	120
65	Standard Avenue and McFadden Avenue	44	170	77	123	297	21	21	736	89	81	214	48
66	Halladay Street and Warner Avenue	69	0	160	0	0	0	0	1772	200	210	797	0
67	Halladay Street and Dyer Road	16	26	71	155	31	33	54	1820	13	126	686	111
68	SR-55 SB Ramps and MacArthur Boulevard	0	0	0	998	0	903	0	1423	1014	0	1363	155
69	SR-55 NB Ramps and MacArthur Boulevard	965	0	1037	0	0	0	0	1503	744	0	591	279
70	SR-55 SB Ramps and Dyer Road	312	37	713	50	242	60	34	1282	273	418	663	111
71	Glassell Street and La Veta Avenue	292	458	139	13	274	60	57	293	563	380	401	10
72	Glassell Street and SR-22 WB Ramps	568	638	0	0	1017	473	0	0	0	247	4	369
73	Glassell Street / Grand Avenue and SR-22 EB Ramps	0	968	258	345	904	0	258	0	1012	0	0	0
74	Grand Avenue and Fairhaven Avenue	25	1,032	148	184	1,531	34	99	60	59	152	17	137
75	Grand Avenue and Santa Clara Avenue	92	648	167	307	1,503	338	179	291	60	140	270	246
76	Grand Avenue and 17th Street	228	666	458	303	1,270	249	246	915	116	401	1,047	114

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
77	Grand Avenue and I-5 NB Ramps	0	1145	662	104	3338	0	0	0	0	557	0	154
78	Grand Avenue and Santa Ana Boulevard	79	1119	57	231	1908	1684	242	200	394	5	407	37
79	Grand Avenue and 1st Street	186	655	31	121	1753	213	318	760	216	268	939	107
80	Grand Avenue and Chestnut Avenue	53	737	163	174	2086	57	64	449	118	81	237	148
81	Grand Avenue and McFadden Avenue	262	1104	165	294	1974	192	109	352	107	95	340	86
82	Grand Avenue and Edinger Avenue	65	649	127	253	1293	253	396	1654	159	170	651	142
83	Grand Avenue and Warner Avenue	187	564	241	204	589	199	314	1120	440	140	617	208
84	SR-55 NB Ramps and Dyer Road	637	0	521	0	0	0	0	1550	620	0	859	517
85	Cambridge Street and La Veta Avenue	185	235	0	0	480	245	195	0	312	0	0	0
86	Cambridge Street and Fairhaven Avenue	0	0	0	618	0	199	69	185	0	0	130	101
87	Mabury Street and 1st Street	5	0	122	276	164	618	0	922	10	46	701	0
88	Tustin Street and La Veta Avenue	9	365	105	48	944	3	9	11	35	279	1	43
89	Tustin Street and SR-22 WB On-Ramp	762	708	0	0	897	536	0	0	0	0	0	0
90	Tustin Street and SR-22 EB Off-Ramp / Seba Avenue	0	1213	6	13	779	0	252	25	1084	6	0	43
91	Tustin Street and Fairhaven Avenue	125	720	126	249	2,148	42	78	297	511	306	338	442
92	Tustin Avenue and Santa Clara Avenue	102	556	104	135	2,756	87	267	673	491	118	244	122
93	Tustin Avenue and 17th Street	155	277	330	638	1,841	20	494	1,948	333	488	770	188
94	Tustin Avenue and 4th Street	40	204	183	743	946	293	159	942	39	129	727	472
95	SR-55 SB Ramps / Auto Mall Drive and Edinger Avenue	456	68	540	50	30	8	34	1334	493	510	1202	157
96	SR-55 NB Ramps / Del Amo Avenue and Newport Avenue	413	109	69	20	497	728	269	163	155	8	223	4
97	Red Hill Avenue and Edinger Avenue	122	449	128	203	861	403	397	1276	271	250	1213	170
98	Red Hill Avenue and Warner Avenue	118	716	97	20	949	191	239	407	300	152	543	96
99	Red Hill Avenue and Barranca Parkway	184	458	151	184	809	106	126	758	300	522	583	114
100	Red Hill Avenue and Alton Parkway	235	693	434	233	1059	170	185	574	574	335	284	159
101	Red Hill Avenue and MacArthur Boulevard	83	742	13	205	529	485	1194	617	101	34	329	843
102	Red Hill Avenue and Main Street	201	691	449	78	365	126	139	1309	254	167	335	79
103	I-5 SB Ramps and Santa Ana Boulevard	0	0	0	382	0	38	287	492	0	0	1027	300

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
104	Tustin Ranch Road and Warner Avenue	0	0	0	174	0	22	27	357	0	0	2130	490
105	Von Karman Avenue and Barranca Parkway	375	497	298	98	960	420	247	928	310	917	1506	47

Table 7-2 Future Year (2045) With Project Volumes – PM Peak Hour

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
1	Euclid Street and Bolsa Avenue	165	1532	123	137	781	148	201	641	100	168	702	168
2	Euclid Street and McFadden Avenue	248	2020	130	87	1070	130	134	307	136	86	359	166
3	Euclid Street and Edinger Avenue	551	1648	117	136	897	228	121	467	140	119	1103	179
4	Newhope Street and Hazard Avenue	102	1129	44	45	954	114	33	66	40	8	51	15
5	Newhope Street and McFadden Avenue	188	1009	177	121	539	104	45	273	40	72	398	113
6	Harbor Boulevard and SR-22 WB Off-Ramp / Banner Drive	103	2324	0	0	1823	59	102	0	86	558	75	160
7	Trask Avenue and SR-22 EB On-Ramp	0	0	0	0	0	0	785	588	0	0	449	42
8	Harbor Boulevard and Westminster Avenue	222	1106	262	254	1752	202	227	808	39	294	1018	231
9	Harbor Boulevard and 1st Street	280	1446	160	240	1053	142	192	784	148	185	865	141
10	Harbor Boulevard and McFadden Avenue	182	1866	136	261	1114	101	147	358	45	63	151	43
11	Harbor Boulevard and Edinger Avenue	262	1645	199	283	822	75	109	460	81	188	1089	363
12	Harbor Boulevard and Warner Avenue	768	3685	277	250	1389	166	198	1399	320	253	2626	838
13	Harbor Boulevard and Segerstrom Avenue	275	1732	55	86	973	86	118	585	192	121	1308	475
14	Hyland Avenue / OCTA Bus Base and MacArthur Boulevard	1139	7	66	12	4	14	35	869	156	25	2320	12
15	Harbor Boulevard and MacArthur Boulevard	527	1362	79	206	1039	170	143	501	185	85	1429	269
16	Harbor Boulevard and Sunflower Avenue	156	1552	230	118	1464	44	85	230	239	282	592	221
17	Harbor Boulevard and I-405 NB Off-Ramp	0	1488	0	0	2570	0	0	0	0	513	0	828
18	Harbor Boulevard and I-405 SB Off-Ramp	0	1881	0	0	2254	0	181	0	833	0	0	0
19	Fairview Street and Civic Center Drive	6	1777	499	205	1903	0	2	6	4	164	0	61
20	Fairview Street and 1st Street	182	1339	121	236	1468	291	215	870	151	126	952	147
21	Fairview Street and McFadden Avenue	174	1596	139	195	1577	246	79	214	53	51	177	43
22	Fairview Street and Edinger Avenue	190	1810	111	198	616	151	205	628	168	639	1353	297
23	Fairview Street and Warner Avenue	211	1679	156	179	906	92	163	792	123	178	1049	227
24	Fairview Street and MacArthur Boulevard	228	1568	85	162	902	83	253	661	223	159	1210	212
25	Fairview Road and Sunflower Avenue	190	1705	371	138	1145	79	245	520	115	208	522	136

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
26	Greenville Street and Edinger Avenue	327	0	218	0	0	0	0	1178	240	155	1840	0
27	Greenville Street and Segerstrom Avenue	50	414	31	44	143	44	138	1049	60	39	1490	213
28	Raitt Street and McFadden Avenue	34	482	75	24	252	40	59	347	30	38	318	44
29	Raitt Street and Edinger Avenue	84	361	101	61	209	52	177	1226	175	195	2203	197
30	Bear Street and MacArthur Boulevard	262	1258	328	115	278	84	90	847	88	82	1475	235
31	Bristol Street and 17th Street	370	1801	300	347	1847	314	243	543	98	280	1055	357
32	Bristol Street and Civic Center Drive	214	1494	78	173	1589	163	130	366	43	149	635	72
33	Bristol Street and Santa Ana Boulevard	85	1722	98	120	1597	60	70	194	45	125	199	54
34	Bristol Street and 1st Street	434	1872	276	216	1169	264	259	1454	186	155	953	90
35	Bristol Street and McFadden Avenue	249	1833	99	116	1618	373	114	222	44	82	424	50
36	Bristol Street and Warner Avenue	312	1170	213	343	1144	223	159	715	126	282	1662	487
37	Bristol Street and Segerstrom Avenue	177	1309	231	98	894	187	279	998	79	156	1408	71
38	Bristol Street and Alton Avenue	43	1667	157	114	858	54	50	70	130	0	0	0
39	Bristol Street and MacArthur Boulevard	335	1428	260	237	871	137	357	796	169	247	1432	270
40	Bristol Street and Sunflower Avenue	687	1452	234	226	844	242	391	764	296	254	976	311
41	Bristol Street and I-405 NB Ramps	0	2235	195	0	2458	23	0	0	204	357	306	1184
42	Bristol Street and I-405 SB Ramps	135	1647	0	0	1657	968	740	0	331	0	0	0
43	Flower Street and Santa Ana Boulevard	215	1307	107	95	486	44	104	300	49	106	371	110
44	Flower Street and 1st Street	211	1000	238	140	383	111	135	1181	98	144	969	101
45	Flower Street and McFadden Avenue	54	734	45	26	201	33	56	422	17	43	532	76
46	Flower Street and Segerstrom Avenue	120	843	80	80	449	129	241	1198	126	101	1699	109
47	Flower Street and MacArthur Boulevard	116	553	65	97	233	224	264	1254	80	61	1967	175
48	Main Street and La Veta Avenue	310	948	444	191	1199	309	347	495	222	332	662	266
49	Main Street and Mainplace Drive / Memory Lane	102	1075	204	48	999	132	195	217	58	370	302	146
50	Main Street and 17th Street	239	1237	270	243	1062	164	174	975	58	187	1147	76
51	Main Street and Civic Center Drive	98	1234	103	63	1031	65	168	930	111	38	384	39
52	Main Street and Santa Ana Boulevard	56	1280	0	0	1108	54	0	0	0	65	656	85
53	Main Street and 4th Street	0	1108	53	0	951	43	0	112	63	0	157	40

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
54	Main Street and 1st Street	179	875	76	160	615	131	91	921	68	75	834	58
55	Main Street and McFadden Avenue	149	1169	72	138	933	68	78	345	42	71	400	180
56	Main Street and Edinger Avenue	111	1181	54	129	646	88	159	940	105	117	1569	162
57	Main Street and MacArthur Boulevard	488	1169	321	271	352	266	385	792	76	188	1488	432
58	Penn Way and 17th Street	795	0	388	0	0	0	0	1712	552	126	1480	0
59	Santiago Street / I-5 NB Ramps and 17th Street	375	50	20	55	0	142	128	1168	767	0	1622	44
60	Penn Way and I-5 SB Ramps	0	363	238	508	117	0	0	0	0	214	0	183
61	Santiago Street and Civic Center Drive	133	411	41	20	281	72	266	76	269	14	19	18
62	Santiago Street and Santa Ana Boulevard	135	833	236	378	639	103	164	673	87	255	546	347
63	Standard Avenue and 4th Street	251	543	214	254	428	297	302	477	201	233	648	351
64	Standard Avenue and 1st Street	109	724	259	142	679	47	168	1279	65	264	1888	116
65	Standard Avenue and McFadden Avenue	103	407	50	110	240	42	53	351	60	68	412	119
66	Halladay Street and Warner Avenue	200	0	417	0	0	0	2	955	96	287	2284	0
67	Halladay Street and Dyer Road	57	249	287	125	17	35	166	1433	10	52	1680	134
68	SR-55 SB Ramps and MacArthur Boulevard	0	0	0	321	0	777	0	1305	1163	0	1547	608
69	SR-55 NB Ramps and MacArthur Boulevard	726	0	483	0	0	0	0	764	785	0	1444	1040
70	SR-55 SB Ramps and Dyer Road	386	12	291	103	226	110	66	1544	210	507	904	58
71	Glassell Street and La Veta Avenue	573	595	194	15	499	37	112	367	631	225	407	16
72	Glassell Street and SR-22 WB Ramps	640	1045	0	0	1110	323	0	0	0	268	9	476
73	Glassell Street / Grand Avenue and SR-22 EB Ramps	0	1316	336	505	903	0	238	4	522	0	0	0
74	Grand Avenue and Fairhaven Avenue	50	1,311	262	242	974	89	79	45	33	153	29	109
75	Grand Avenue and Santa Clara Avenue	95	1,280	266	240	946	240	114	139	26	115	206	220
76	Grand Avenue and 17th Street	266	947	239	294	634	140	371	949	160	284	1,046	190
77	Grand Avenue and I-5 NB Ramps	0	2036	1571	67	1623	0	0	0	0	168	0	202
78	Grand Avenue and Santa Ana Boulevard	213	2411	40	44	964	684	370	226	356	44	295	213
79	Grand Avenue and 1st Street	195	1493	45	133	784	313	272	900	89	121	753	138
80	Grand Avenue and Chestnut Avenue	180	1352	234	149	664	112	47	143	31	91	283	165
81	Grand Avenue and McFadden Avenue	232	1320	227	176	800	215	64	238	42	96	762	168

ID	Intersection	Northbound			Southbound			Eastbound			Westbound		
		L	T	R	L	T	R	L	T	R	L	T	R
82	Grand Avenue and Edinger Avenue	259	1494	129	236	583	327	207	895	72	98	1758	228
83	Grand Avenue and Warner Avenue	218	788	174	178	575	265	342	656	142	244	1556	510
84	SR-55 NB Ramps and Dyer Road	188	0	51	0	0	0	0	1355	689	0	1411	882
85	Cambridge Street and La Veta Avenue	176	246	0	0	206	191	469	0	309	0	0	0
86	Cambridge Street and Fairhaven Avenue	0	0	0	195	0	68	85	148	0	0	218	272
87	Mabury Street and 1st Street	25	0	256	164	70	310	0	1275	20	31	423	0
88	Tustin Street and La Veta Avenue	31	693	164	96	851	16	13	5	20	134	4	82
89	Tustin Street and SR-22 WB On-Ramp	383	1100	0	0	642	330	0	0	0	0	0	0
90	Tustin Street and SR-22 EB Off-Ramp / Seba Avenue	0	1155	3	43	589	0	440	39	558	28	0	67
91	Tustin Street and Fairhaven Avenue	258	1,377	122	356	940	108	82	185	151	86	191	180
92	Tustin Avenue and Santa Clara Avenue	176	852	131	199	1,574	109	48	150	88	115	144	136
93	Tustin Avenue and 17th Street	233	1,000	514	377	404	40	346	680	92	211	693	385
94	Tustin Avenue and 4th Street	35	381	123	536	396	145	226	806	41	123	833	513
95	SR-55 SB Ramps / Auto Mall Drive and Edinger Avenue	401	32	423	110	50	37	46	1649	464	437	1139	136
96	SR-55 NB Ramps / Del Amo Avenue and Newport Avenue	879	262	51	19	231	889	165	57	33	23	348	16
97	Red Hill Avenue and Edinger Avenue	208	1501	238	108	214	173	410	1051	128	91	1176	574
98	Red Hill Avenue and Warner Avenue	343	1175	135	89	341	432	324	880	137	78	1643	216
99	Red Hill Avenue and Barranca Parkway	344	1293	333	314	531	249	178	662	87	129	979	286
100	Red Hill Avenue and Alton Parkway	27	1513	219	148	628	5	453	1111	569	2003	342	1235
101	Red Hill Avenue and MacArthur Boulevard	179	1160	14	340	707	1240	515	237	36	39	818	574
102	Red Hill Avenue and Main Street	467	1006	272	88	640	348	212	757	205	284	1617	91
103	I-5 SB Ramps and Santa Ana Boulevard	0	0	0	357	0	78	595	672	0	0	590	162
104	Tustin Ranch Road and Warner Avenue	0	0	0	653	0	45	64	2124	0	0	925	398
105	Von Karman Avenue and Barranca Parkway	362	2082	454	80	407	280	785	1435	201	254	805	274

7.1 FUTURE YEAR (2045) WITH PROJECT VEHICLE MILES TRAVELED (VMT)

Table 7-3 presents the VMT analysis results for the Future Year (2045) With Project scenario. VMT calculations are based on the scenario parameters and methodology as described in Sections 2.7 and 3.1, respectively.

Table 7-3 Future Year (2045) VMT Summary

	I – I VMT	I – X VMT	X – I VMT	Total VMT	Service Population	VMT/SP
City	637,655	5,432,337	5,448,967	11,518,959	566,616	20.3
County	52,931,787	29,642,498	29,748,229	112,322,514	4,262,124	26.4

SP = Service Population = Total Employees + Total Population. Reduction factor applied to Total Employees as noted in Section 3.1 and shown in Appendix F. I-I = Internal-Internal; I-X = Internal-External; X-I = External-Internal.

7.2 ROADWAY SEGMENT LEVEL OF SERVICE

A summary of the forecast roadway segment volumes and corresponding level of service results for the Future Year (2045) With Project condition is shown in Table 7-4. The following roadway segments are forecast to operate at a deficient LOS:

- Segment 8 – Harbor Boulevard from Segerstrom Avenue to MacArthur Boulevard
- Segment 23 – Main Street from 1st Street to Bishop Street
- Segment 39 – Bristol Street from Edinger Avenue to Warner Avenue
- Segment 42 – Bristol Street from MacArthur Boulevard to Sunflower Avenue
- Segment 45 – Main Street from McFadden Avenue to Edinger Avenue
- Segment 46 – Main Street from Edinger Avenue to Warner Avenue
- Segment 57 – Dyer Road from Grand Avenue to Pullman Street
- Segment 63 – Broadway from 17th Street to Civic Center Drive
- Segment 84 – Dyer Road from Pullman Street to Red Hill Avenue

Table 7-4 Future Year (2045) With Project Roadway Segment LOS

ID	Street	Segment	Lanes	ADT	LOS
1	1st Street	Euclid Street to Ward Street	6D	18,700	A
2	Euclid Street	1st Street to McFadden Avenue	6D	34,000	B
3	Westminster Avenue	Harbor Boulevard to Fairview Street	6D	17,400	A
4	Harbor Boulevard	Westminster Avenue/17th Street to Hazard Avenue	6D	36,200	B
5	1st Street	Harbor Boulevard to Jackson	6D	23,100	A
6	Edinger Avenue	Harbor Boulevard to Fairview Street	6D	23,300	A
7	Warner Avenue	Harbor Boulevard to Fairview Street	6D	26,300	A
8	Harbor Boulevard	Segerstrom Avenue to MacArthur Boulevard	6D	56,900	F
9	Fairview Street	1st Street to Willits Street	6D	38,600	B
10	1st Street	Sullivan Street to Raitt Street	6D	26,600	A
11	Bristol Street	17th Street to Santa Clara Avenue	6D	41,500	C
12	17th Street	College Avenue to Bristol Street	6D	29,500	A
13	Bristol Street	17th Street to Washington Avenue	6D	45,100	D
14	Fairview Street	Trask Avenue to 17th Street	6D	48,100	D
15	Bristol Street	1st Street to Bishop Street	6D	49,000	D
16	Civic Center Drive	Bristol Street to Flower Street	4U	18,600	C
17	Flower Street	1st Street to Bishop Street	2D	6,900	A
18	Main Street	17th Street to 20th Street	6D	43,000	C
19	Main Street	Washington Street to Civic Center Drive	4U	19,000	C
20	Civic Center Drive	Flower Street to Ross Street	4U	10,200	A
21	Santa Ana Boulevard	Flower Street to Ross Street	4D	15,800	A
22	1st Street	Main Street to Standard Avenue	4D	32,900	D
23	Main Street	1st Street to Bishop Street	4U	30,500	F
24	Grand Avenue	Santa Clara Avenue to Fairhaven Street	6D	31,100	A
25	Grand Avenue	Santa Ana Boulevard to 4th Street	6D	35,000	B
26	Santa Clara Avenue	Grand Avenue to Tustin Avenue	2D	8,700	A
27	Tustin Avenue	Santa Clara Avenue to Fairhaven Street	6D	20,400	A
28	17th Street	Cabrillo Park Drive to Tustin Avenue	6D	34,600	B
29	Tustin Avenue	Fruit Street to 4th Street	6D	28,100	A
30	1st Street	Grand Avenue to Elk Lane	4D	30,800	D
31	1st Street	Cabrillo Park Drive to Tustin Avenue	4D	14,600	A
32	Fairview Street	Edinger Avenue to Harvard Street	6D	45,100	D
33	Fairview Street	Warner Avenue to Segerstrom Avenue	6D	41,800	C
34	MacArthur Boulevard	Harbor Boulevard to Fairview Street	6D	32,600	A
35	Edinger Avenue	Fairview Street to Greenville Street	6D	22,200	A
36	McFadden Avenue	Fairview Street to Raitt Street	2D	8,200	A
37	MacArthur Boulevard	Fairview Street to Raitt Street	6D	28,900	A
38	Segerstrom Avenue	Fairview Street to Raitt Street	6D	29,600	A
39	Bristol Street	Edinger Avenue to Warner Avenue	6D	54,500	E
40	Bristol Street	Warner Avenue to Segerstrom Avenue	6D	44,800	C

ID	Street	Segment	Lanes	ADT	LOS
41	Warner Avenue	Raitt Street to Bristol Street	6D	22,300	A
42	Bristol Street	MacArthur Boulevard to Sunflower Avenue	6D	50,800	E
43	Flower Street	Warner Avenue to Segerstrom Avenue	4D	33,300	D
44	Edinger Avenue	Flower Street to Main Street	6D	25,200	A
45	Main Street	McFadden Avenue to Edinger Avenue	4U	27,500	F
46	Main Street	Edinger Avenue to Warner Avenue	4D	38,200	F
47	Main Street	Warner Avenue to Dyer Road	6D	38,600	B
48	Segerstrom Avenue	Bristol Street to Flower Street	6D	25,900	A
49	MacArthur Boulevard	Flower Street to Main Street	6D	39,800	C
50	Main Street	MacArthur Boulevard to Sunflower Avenue	6D	29,000	A
51	Grand Avenue	Edinger Avenue to Warner Avenue	6D	37,300	B
52	Edinger Avenue	Richie Street to Newport Avenue	6D	49,700	D
53	Warner Avenue	Grand Avenue to Red Hill Avenue	6D	34,600	B
54	Warner Avenue	Main Street to Standard Avenue	6D	23,900	A
55	McFadden Avenue	Newhope Street to Harbor Boulevard	4U	8,700	A
56	McFadden Avenue	Standard Avenue to Grand Avenue	2D	8,600	A
57	Dyer Road	Grand Avenue to Pullman Street	6D	80,700	F
58	McFadden Avenue	Bristol Street to Flower Street	2D	11,800	B
59	Main Street	La Veta Avenue to Memory Lane	8D	50,200	B
60	1st Street	Bristol Street to Flower Street	4D	25,700	B
61	Fairhaven Avenue	Grand Avenue to Tustin Avenue	2D	11,100	B
62	4th Street	French Street to Standard Avenue	2D	16,500	D
63	Broadway	17th Street to Civic Center Drive	2D	22,700	F
64	Broadway	Civic Center Drive to 1st Street	2D	13,800	C
65	Cambridge Street	SR-22 to Fairhaven Avenue	2D	8,800	A
66	Chestnut Avenue	Standard Avenue to Lyon Street	2D	7,700	A
67	Civic Center Drive	French Street to Santiago Street	2U	1,900	A
68	Civic Center Drive	Fairview Road to Bristol Street	2D	12,200	C
69	Flower Street	Edinger Avenue to Warner Avenue	2D	6,300	A
70	Halladay Avenue	Warner Avenue to Dyer Road	2D	16,100	D
71	Hazard Avenue	Euclid Street to Harbor Boulevard	2D	7,900	A
72	McFadden Avenue	Main Street to Standard Avenue	2D	14,300	C
73	Penn Way/Santiago Street	I-5 SB Ramps to Santa Ana Boulevard	2D	19,400	D
74	Raitt Street	Santa Ana Boulevard to 1st Street	2D	15,500	D
75	Raitt Street	Warner Avenue to Segerstrom Avenue	2D	11,600	B
76	Santa Ana Boulevard	French Street to Santiago Street	2D	13,500	C
77	Santa Ana Boulevard	Raitt Street to Bristol Street	2D	13,000	C
78	Standard Avenue	Chestnut Avenue to McFadden Avenue	2D	11,000	B
79	Standard Avenue	Edinger Avenue to Warner Avenue	2D	10,000	B
80	Greenville Street	Edinger Avenue to Warner Avenue	2U	8,000	B
81	Greenville Street	Warner Avenue to Segerstrom Avenue	2D	8,000	A
82	Flower Street	17th Street to Northern Terminus	2D	4,700	A

ID	Street	Segment	Lanes	ADT	LOS
83	Logan Street	Civic Center Drive to Santa Ana Boulevard	2U	- *	-
84	Dyer Road	Pullman Street to Red Hill Avenue	6D	57,500	F
85	Fairhaven Avenue	Tustin Street to Yorba Street	4U	14,947	A
86	Santa Clara Avenue	Tustin Street to Yorba Street	4U	7,818	A
87	Harbor Boulevard	McFadden Avenue to Edinger Avenue	6D	35,100	B
88	Harbor Boulevard	Edinger Avenue to Warner Avenue	6D	43,100	C

Notes:
* Not available.
(1) ADT – Average Daily Traffic Volumes
(2) LOS – Level of Service
(3) #D – total number of lanes in both directions divided by raised or striped median; #U – total number of undivided lanes in both directions.
(4) Roadway capacities shown in Table 3-1.
(5) Yellow and red shading indicates an unacceptable level of service

7.3 INTERSECTION LEVEL OF SERVICE

A summary of the AM and PM peak hour intersection level of service analysis results for the Future Year (2045) With Project condition is included in Table 7-5. The following intersections are expected to operate at an unacceptable level of service:

- INT 2 – Euclid street and McFadden Avenue (City of Santa Ana)
- INT 3 – Euclid Street and Edinger Avenue (City of Fountain Valley)
- INT 8 – Harbor Boulevard and Westminster Avenue (City of Santa Ana)
- INT 12 – Harbor Boulevard and Warner Avenue (City of Santa Ana – CMP)
- INT 13 – Harbor Boulevard and Segerstrom Avenue (City of Santa Ana)
- INT 22 – Fairview Street and Edinger Avenue (City of Santa Ana)
- INT 29 – Raitt Street and Edinger Avenue (City of Santa Ana)
- INT 32 – Bristol Street and Civic Center Drive (City of Santa Ana)
- INT 34 – Bristol Street and 1st Street (City of Santa Ana)
- INT 35 – Bristol Street and McFadden Avenue (City of Santa Ana)
- INT 36 – Bristol Street and Warner Avenue (City of Santa Ana)
- INT 37 – Bristol Street and Segerstrom Avenue (City of Santa Ana)
- INT 44 – Flower Street and 1st Street (City of Santa Ana)
- INT 45 – Flower Street and McFadden Avenue (City of Santa Ana)
- INT 46 – Flower Street and Segerstrom Avenue (City of Santa Ana)
- INT 47 – Flower Street and MacArthur Boulevard (City of Santa Ana)
- INT 55 – Main Street and McFadden Avenue (City of Santa Ana)
- INT 56 – Main Street and Edinger Avenue (City of Santa Ana)
- INT 61 – Santiago Street and Civic Center Drive (City of Santa Ana)

- INT 62 – Santiago Street and Santa Ana Boulevard (City of Santa Ana)
- INT 63 – Standard Avenue and 4th Street (City of Santa Ana)
- INT 64 – Standard Avenue and 1st Street (City of Santa Ana)
- INT 67 – Halladay Street and Dyer Road (City of Santa Ana)
- INT 80 – Grand Avenue and Chestnut Avenue (City of Santa Ana)
- INT 81 – Grand Avenue and McFadden Avenue (City of Santa Ana)
- INT 82 – Grand Avenue and Edinger Avenue (City of Santa Ana)
- INT 91 – Tustin Street and Fairhaven Avenue (City of Santa Ana)
- INT 92 – Tustin Avenue and Santa Clara Avenue (City of Santa Ana)
- INT 96 – SR-55 NB Ramps / Del Amo Avenue and Newport Avenue (Caltrans)
- INT 98 – Red Hill Avenue and Warner Avenue (City of Tustin)
- INT 100 – Red Hill Avenue and Alton Parkway (City of Irvine)
- INT 105 – Von Karman Avenue and Barranca Parkway (City of Irvine)

Table 7-5: Future Year (2045) With Project Intersection LOS Summary

ID	INTERSECTION	AM		PM	
		V/C or Delay	LOS	V/C or Delay	LOS
1	Euclid Street and Bolsa Avenue	0.79	C	0.79	C
2	Euclid Street and McFadden Avenue	0.91	E	0.79	C
3	Euclid Street and Edinger Avenue	1.01	F	0.86	D
4	Newhope Street and Hazard Avenue	0.60	A	0.52	A
5	Newhope Street and McFadden Avenue	0.73	C	0.68	B
6	Harbor Boulevard and SR-22 WB Off-Ramp / Banner Drive	28.5	C	23.8	C
7	Trask Avenue and SR-22 EB On-Ramp	11.0	B	11.0	B
8	Harbor Boulevard and Westminster Avenue	0.94	E	0.84	D
9	Harbor Boulevard and 1st Street	0.75	C	0.75	C
10	Harbor Boulevard and McFadden Avenue	0.73	C	0.71	C
11	Harbor Boulevard and Edinger Avenue	0.86	D	0.72	C
12	Harbor Boulevard and Warner Avenue	0.80	C	1.54	F
13	Harbor Boulevard and Segerstrom Avenue	1.01	F	0.93	E
14	Hyland Avenue / OCTA Bus Base and MacArthur Boulevard	0.62	B	0.89	D
15	Harbor Boulevard and MacArthur Boulevard	0.75	C	0.79	C
16	Harbor Boulevard and Sunflower Avenue	0.71	C	0.71	C
17	Harbor Boulevard and I-405 NB Off-Ramp	17.9	B	18.8	B
18	Harbor Boulevard and I-405 SB Off-Ramp	15.0	B	18.1	B
19	Fairview Street and Civic Center Drive	0.68	B	0.71	C
20	Fairview Street and 1st Street	0.89	D	0.89	D
21	Fairview Street and McFadden Avenue	0.80	C	0.68	B
22	Fairview Street and Edinger Avenue	0.88	D	0.92	E
23	Fairview Street and Warner Avenue	0.85	D	0.81	D
24	Fairview Street and MacArthur Boulevard	0.69	B	0.76	C
25	Fairview Road and Sunflower Avenue	0.69	B	0.69	B
26	Greenville Street and Edinger Avenue	0.74	C	0.65	B
27	Greenville Street and Segerstrom Avenue	0.88	D	0.80	C
28	Raitt Street and McFadden Avenue	0.70	B	0.68	B
29	Raitt Street and Edinger Avenue	0.93	E	0.99	E
30	Bear Street and MacArthur Boulevard	0.76	C	0.90	D
31	Bristol Street and 17th Street	0.85	D	0.81	D
32	Bristol Street and Civic Center Drive	0.93	E	0.90	D
33	Bristol Street and Santa Ana Boulevard	0.72	C	0.73	C
34	Bristol Street and 1st Street	0.90	D	0.97	E
35	Bristol Street and McFadden Avenue	0.95	E	0.89	D
36	Bristol Street and Warner Avenue	0.96	E	0.87	D
37	Bristol Street and Segerstrom Avenue	0.85	D	0.92	E
38	Bristol Street and Alton Avenue	0.55	A	0.58	A
39	Bristol Street and MacArthur Boulevard	0.76	C	0.80	C

ID	INTERSECTION	AM		PM	
		V/C or Delay	LOS	V/C or Delay	LOS
40	Bristol Street and Sunflower Avenue	0.68	B	0.74	C
41	Bristol Street and I-405 NB Ramps	20.9	C	29.0	C
42	Bristol Street and I-405 SB Ramps	23.6	C	18.2	B
43	Flower Street and Santa Ana Boulevard	0.59	A	0.67	B
44	Flower Street and 1st Street	0.93	E	1.22	F
45	Flower Street and McFadden Avenue	0.81	D	0.97	E
46	Flower Street and Segerstrom Avenue	0.82	D	0.92	E
47	Flower Street and MacArthur Boulevard	0.71	C	0.91	E
48	Main Street and La Veta Avenue	0.54	A	0.76	C
49	Main Street and Mainplace Drive / Memory Lane	0.46	A	0.50	A
50	Main Street and 17th Street	0.85	D	0.80	C
51	Main Street and Civic Center Drive	0.85	D	0.86	D
52	Main Street and Santa Ana Boulevard	0.79	C	0.70	B
53	Main Street and 4th Street	0.44	A	0.47	A
54	Main Street and 1st Street	0.75	C	0.80	C
55	Main Street and McFadden Avenue	0.92	E	0.94	E
56	Main Street and Edinger Avenue	0.88	D	0.98	E
57	Main Street and MacArthur Boulevard	0.72	C	0.78	C
58	Penn Way and 17th Street	12.1	B	20.3	C
59	Santiago Street / I-5 NB Ramps and 17th Street	31.4	C	20.3	C
60	Penn Way and I-5 SB Ramps	19.5	B	22.8	C
61	Santiago Street and Civic Center Drive	62.6	F	27.6	D
62	Santiago Street and Santa Ana Boulevard	1.44	F	1.41	F
63*	Standard Avenue and 4th Street	1.340	F	1.340	F
64	Standard Avenue and 1st Street	1.52	F	1.48	F
65	Standard Avenue and McFadden Avenue	0.84	D	0.77	C
66	Halladay Street and Warner Avenue	0.69	B	0.82	D
67	Halladay Street and Dyer Road	0.67	B	0.95	E
68	SR-55 SB Ramps and MacArthur Boulevard	20.2	C	18.4	B
69	SR-55 NB Ramps and MacArthur Boulevard	19.5	B	16.2	B
70	SR-55 SB Ramps and Dyer Road	25.9	C	26.5	C
71	Glassell Street and La Veta Avenue	0.83	D	0.77	C
72	Glassell Street and SR-22 WB Ramps	30.1	C	33.4	C
73	Glassell Street / Grand Avenue and SR-22 EB Ramps	29.6	C	31.8	C
74	Grand Avenue and Fairhaven Avenue	0.57	A	0.67	B
75	Grand Avenue and Santa Clara Avenue	0.80	C	0.73	C
76	Grand Avenue and 17th Street	0.86	D	0.85	D
77	Grand Avenue and I-5 NB Ramps	15.3	B	11.3	B
78	Grand Avenue and Santa Ana Boulevard	26.3	C	28.5	C
79	Grand Avenue and 1st Street	0.83	D	0.72	C

ID	INTERSECTION	AM		PM	
		V/C or Delay	LOS	V/C or Delay	LOS
80	Grand Avenue and Chestnut Avenue	0.94	E	0.78	C
81	Grand Avenue and McFadden Avenue	1.01	F	0.81	D
82	Grand Avenue and Edinger Avenue	0.90	D	1.08	F
83	Grand Avenue and Warner Avenue	0.66	B	0.90	D
84	SR-55 NB Ramps and Dyer Road	17.3	B	6.0	A
85	Cambridge Street and La Veta Avenue	23.4	C	26.1	D
86	Cambridge Street and Fairhaven Avenue	0.62	B	0.53	A
87	Mabury Street and 1st Street	27.4	C	27.2	C
88	Tustin Street and La Veta Avenue	0.36	A	0.34	A
89	Tustin Street and SR-22 WB On-Ramp	13.2	B	7.7	A
90	Tustin Street and SR-22 EB Off-Ramp / Seba Avenue	23.8	C	23.3	C
91	Tustin Street and Fairhaven Avenue	1.24	F	0.76	C
92	Tustin Avenue and Santa Clara Avenue	1.10	F	0.78	C
93	Tustin Avenue and 17th Street	0.81	D	0.74	C
94	Tustin Avenue and 4th Street	0.79	C	0.78	C
95	SR-55 SB Ramps / Auto Mall Drive and Edinger Avenue	25.1	C	25.4	C
96	SR-55 NB Ramps / Del Amo Avenue and Newport Avenue	25.6	C	46.2	D
97	Red Hill Avenue and Edinger Avenue	0.62	B	0.87	D
98	Red Hill Avenue and Warner Avenue	0.58	A	0.95	E
99	Red Hill Avenue and Barranca Parkway	0.58	A	0.59	A
100	Red Hill Avenue and Alton Parkway	0.93	E	1.49	F
101	Red Hill Avenue and MacArthur Boulevard	0.71	C	0.72	C
102	Red Hill Avenue and Main Street	0.73	C	0.84	D
103	I-5 SB Ramps and Santa Ana Boulevard	17.8	B	19.9	B
104	Tustin Ranch Road and Warner Avenue	0.53	A	0.67	B
105	Von Karman Avenue and Barranca Parkway	0.93	E	1.28	F

Notes: (1) LOS – Level of Service; (2) V/C – Volume to Capacity

8.0 VMT and LOS Analysis

This section presents the significant impact analysis for the Future Year (2045) With Project scenario. Significant impacts are identified based on the criteria established in Section 3.1.

8.1 VMT IMPACT ANALYSIS

Per the City's VMT Guidelines, VMT impacts are to be identified for the Future Year (2045) With Project scenario. VMT impacts were assessed using the methodology described in Section 3.1. The following presents the screening and impact analysis process. First, the two general conditions are considered:

- **Does the project have the potential to reduce VMT/SP?**
    - It should be noted that the project consists of land use and the transportation network changes. Due to the scale of land use changes not all land uses are high-density and/or transit-oriented, thus the land use changes cannot be assumed to have the same VMT-reducing effect as, for example, a TOD Specific Plan. The proposed transportation network, however, has the potential to reduce VMT/SP since it proposes to reclassify streets in order to implement transit, Complete Streets, and active transportation improvements.
- **Is the project consistent with the Regional Transportation Plan (RTP) / Sustainable Communities Strategy's (SCS)?**
    - While the proposed General Plan does forecast growth beyond the RTP/SCS, it is occurring in a manner consistent with the goals of the RTP/SCS in that growth occurs in high density in/near high-quality transit corridors (HQTC). Additionally, the proposed transportation network supports active transportation and the reduction of VMT.

Since it is not clear that the land use changes will reduce VMT/SP, the project is not eligible to be screened from a full VMT analysis. Project and cumulative impacts are assessed below.

Project Level Impact

A project is considered to have a significant impact if the project VMT/SP (for the land use plan) exceeds 15% below the existing total daily VMT/SP for the County. Table 8-1 provides a summary of the VMT impact analysis for project level impacts. A significant impact at the project level is not expected due to the implementation of the project.

Table 8-1: Future Year (2045) VMT Impact Analysis – Project Impact

Metric	2045 – With Project City VMT/SP	2020 – No Project County VMT/SP	VMT Threshold 15% below 2020 – No Project County VMT/SP	Impact?
VMT/SP	20.3	25.9	22.0	NO

Cumulative Impact

A project is considered to have a significant cumulative impact if the project results in a negative effect on VMT/SP at the citywide level (City VMT/SP is higher with the project than without it). Table 8-2 provides a summary of the VMT impact analysis for project level impacts. A significant cumulative impact is not expected due to the implementation of the project.

Table 8-2: Future Year (2045) VMT Impact Analysis – Cumulative Impact

Metric	2045 – No Project City VMT/SP	2045 – With Project City VMT/SP	Impact?
VMT/SP	22.8	20.3	NO

The VMT impact analysis results show that the project is not expected to cause a significant project level or cumulative impact.

8.2 LEVEL OF SERVICE ASSESSMENT

If an intersection is expected to be significantly impacted due to the implementation of the proposed project, mitigation measures are to be identified such that the project impact is mitigated. This is generally accomplished by returning the V/C or Delay to pre-project levels and/or the resulting LOS to an acceptable LOS. This analysis for intersection LOS is provided here only for analysis with regard to MPAH reclassifications and consistency with OCTA's MPAH guidelines. Intersection LOS analysis is no longer required under CEQA, and the deficient LOS values identified here are not considered to be significant environmental impacts.

The cities of Santa Ana, Costa Mesa, Irvine, Fountain Valley, Tustin, and Orange have established LOS D as their minimum acceptable LOS. Caltrans and the OC CMP established LOS C and E as their minimum acceptable LOS, respectively.

Strategies and improvements to provide acceptable intersection LOS are developed in a manner which first considers lower intensity modifications, such as striping modifications, before considering more complex modifications such as signal controls or physical improvements. All strategies and improvements are subject to the approval of the presiding public authority, including funding and implementation. The City of Santa Ana will pursue the development of a Transportation System Improvement Assessment (TSIA) in order to provide funding for the implementation of the full transportation network buildout, including the strategies and improvements identified in this report.

The Future Year (2045) significant impact summary is provided in Table 8-3. Improvements are identified in Table 8-4. Table 8-5 provides a summary of the intersection performance with the implementation of the mitigation measures.

Unacceptable LOS and traffic impacts are expected at the intersections listed below (peak hour / jurisdiction). The intersection impacts were investigated to determine a probable cause for the impact (land use, transportation network, or both). In order to do this, link volumes and intersection LOS were compared for two scenarios: 1) a year 2045 scenario which includes the proposed General Plan land use updates and utilizes the 2045 baseline (No Project) network described in Section 2.6; and 2) the 2045 With Project scenario which includes all proposed General Plan land use updates and transportation network modifications described in Section 2.7. OCTAM volume comparison plots and a LOS comparison table are provided in Appendix G.

- **INT 3 – Euclid Street and Edinger Avenue (AM peak hour / Fountain Valley)**
    - The impact at this intersection is expected to occur as a result of the proposed reclassifications. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. As this impact is in part caused by the proposed MPAH reclassifications, OCTA and the City of Santa Ana will enter into a memorandum of understanding (MOU) that describes the timing and triggers for implementation of the improvements identified in Table 8.4. Additionally, the City of Santa will contribute to improvements based on the calculated fair-share percentage presented in Table 8-4.
- **INT 13 – Harbor Boulevard and Segerstrom Avenue (AM peak hour / Santa Ana)**
    - The impact at this intersection is expected to occur as a result of the proposed land use changes. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report.
- **INT 34 – Bristol Street and 1st Street (AM and PM peak hour / City of Santa Ana)**
    - The impact at this intersection is expected to occur as a result of the proposed reclassifications. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. As this impact is in part caused by the proposed MPAH reclassifications, OCTA and the City of Santa Ana will enter into a memorandum of understanding (MOU) that describes the timing and triggers for implementation of the improvements identified in Table 8.4.
- **INT 36 – Bristol Street and Warner Avenue (AM peak hour / City of Santa Ana)**
    - The impact at this intersection is expected to occur as a result of the proposed reclassifications. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. As this impact is in part caused by the proposed MPAH reclassifications, OCTA and the City of Santa Ana will enter into a memorandum of understanding (MOU) that describes the timing and triggers for implementation of the improvements identified in Table 8.4.
- **INT 37 – Bristol Street and Segerstrom Avenue (PM peak hour / City of Santa Ana)**
    - The impact at this intersection is expected to occur as a result of both the proposed land use changes and reclassifications. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. As this impact is in part caused by the proposed MPAH reclassifications, OCTA and the City

of Santa Ana will enter into a memorandum of understanding (MOU) that describes the timing and triggers for implementation of the improvements identified in Table 8.4.

- **INT 44 – Flower Street 1st Street (PM peak hour / City of Santa Ana)**
    - The impact at this intersection is expected to occur as a result of both the proposed land use changes and reclassifications. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. As this impact is in part caused by the proposed MPAH reclassifications, OCTA and the City of Santa Ana will enter into a memorandum of understanding (MOU) that describes the timing and triggers for implementation of the improvements identified in Table 8.4.
- **INT 46 – Flower Street and Segerstrom Avenue (PM peak hour / City of Santa Ana)**
    - The impact at this intersection is expected to occur as a result of both the proposed land use changes and reclassifications. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. As this impact is in part caused by the proposed MPAH reclassifications, OCTA and the City of Santa Ana will enter into a memorandum of understanding (MOU) that describes the timing and triggers for implementation of the improvements identified in Table 8.4.
- **INT 47 – Flower Street and MacArthur Boulevard (PM peak hour / City of Santa Ana)**
    - The impact at this intersection is expected to occur as a result of the proposed land use changes. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report.
- **INT 55 – Main Street and McFadden Avenue (AM peak hour / City of Santa Ana)**
    - The impact at this intersection is expected to occur as a result of both the proposed land use changes and reclassifications. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. As this impact is in part caused by the proposed MPAH reclassifications, OCTA and the City of Santa Ana will enter into a memorandum of understanding (MOU) that describes the timing and triggers for implementation of the improvements identified in Table 8.4.
- **INT 56 – Main Street and Edinger Avenue (PM peak hour / City of Santa Ana)**
    - The impact at this intersection is expected to occur as a result of the proposed reclassifications. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. As this impact is in part caused by the proposed MPAH reclassifications, OCTA and the City of Santa Ana will enter into a memorandum of understanding (MOU) that describes the timing and triggers for implementation of the improvements identified in Table 8.4.

- **INT 62 – Santiago Street & Santa Ana Boulevard (AM & PM peak hour / City of Santa Ana)**
    - The impact at this intersection is expected to occur as a result of the proposed reclassifications. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. As this impact is in part caused by the proposed MPAH reclassifications, OCTA and the City of Santa Ana will enter into a memorandum of understanding (MOU) that describes the timing and triggers for implementation of the improvements identified in Table 8.4.
- **INT 63 – Standard Avenue and 4th Street (AM and PM peak hour / City of Santa Ana)**
    - The impact at this intersection is expected to occur as a result of the proposed reclassifications. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. As this impact is in part caused by the proposed MPAH reclassifications, OCTA and the City of Santa Ana will enter into a memorandum of understanding (MOU) that describes the timing and triggers for implementation of the improvements identified in Table 8.4.
- **INT 64 – Standard Avenue and 1st Street (AM and PM peak hour / City of Santa Ana)**
    - The impact at this intersection is expected to occur as a result of the proposed reclassifications. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. As this impact is in part caused by the proposed MPAH reclassifications, OCTA and the City of Santa Ana will enter into a memorandum of understanding (MOU) that describes the timing and triggers for implementation of the improvements identified in Table 8.4.
- **INT 80 – Grand Avenue and Chestnut Avenue (AM peak hour / City of Santa Ana)**
    - The impact at this intersection is expected to occur as a result of the proposed reclassifications. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. As this impact is in part caused by the proposed MPAH reclassifications, OCTA and the City of Santa Ana will enter into a memorandum of understanding (MOU) that describes the timing and triggers for implementation of the improvements identified in Table 8.4.
- **INT 81 – Grand Avenue and McFadden Avenue (AM peak hour / City of Santa Ana)**
    - The impact at this intersection is expected to occur as a result of the proposed reclassifications. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. As this impact is in part caused by the proposed MPAH reclassifications, OCTA and the City of Santa Ana will enter

into a memorandum of understanding (MOU) that describes the timing and triggers for implementation of the improvements identified in Table 8.4.

- **INT 82 – Grand Avenue and Edinger Avenue (PM peak hour / City of Santa Ana)**
    - The impact at this intersection is expected to occur as a result of the proposed reclassifications. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. As this impact is in part caused by the proposed MPAH reclassifications, OCTA and the City of Santa Ana will enter into a memorandum of understanding (MOU) that describes the timing and triggers for implementation of the improvements identified in Table 8.4.
- **INT 91 – Tustin Street and Fairhaven Avenue (AM peak hour / City of Santa Ana)**
    - The impact at this intersection is expected to occur as a result of the proposed reclassifications. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. As this impact is in part caused by the proposed MPAH reclassifications, OCTA and the City of Santa Ana will enter into a memorandum of understanding (MOU) that describes the timing and triggers for implementation of the improvements identified in Table 8.4.
- **INT 92 – Tustin Avenue and Santa Clara Avenue (AM peak hour / City of Santa Ana)**
    - The impact at this intersection is expected to occur as a result of the proposed reclassifications. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. As this impact is in part caused by the proposed MPAH reclassifications, OCTA and the City of Santa Ana will enter into a memorandum of understanding (MOU) that describes the timing and triggers for implementation of the improvements identified in Table 8.4.
- **INT 96 – SR-55 NB Ramps/Del Amo Avenue & Newport Avenue (PM peak hour / Caltrans)**
    - The impact at this intersection is expected to occur as a result of the proposed land use changes. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. Additionally, the City of Santa will contribute to improvements based on the calculated fair-share percentage presented in Table 8-4. Additionally, the City of Santa will contribute to improvements based on the calculated fair-share percentage presented in Table 8-4.
- **INT 98 – Red Hill Avenue and Warner Avenue (PM peak hour / City of Tustin)**
    - The impact at this intersection is expected to occur as a result of the proposed land use changes. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. Additionally, the City of Santa will

contribute to improvements based on the calculated fair-share percentage presented in Table 8-4.

- **INT 100 – Red Hill Avenue and Alton Parkway (AM and PM peak hour / City of Irvine)**
    - The impact at this intersection is expected to occur as a result of the proposed land use changes. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. Additionally, the City of Santa will contribute to improvements based on the calculated fair-share percentage presented in Table 8-4.
- **INT 105 – Von Karman Avenue and Barranca Parkway (PM peak hour / City of Irvine)**
    - The impact at this intersection is expected to occur as a result of the proposed land use changes. Specific improvements to this intersection to address this identified impact are presented in Table 8.4 later in this report. Additionally, the City of Santa will contribute to improvements based on the calculated fair-share percentage presented in Table 8-4.

In addition to assessing intersection impacts, a performance assessment of study roadway segments was conducted in order to determine the potential adverse effects of the project. Although not considered an environmental impact, changes in roadway performance monitored for congestion management and fair-share contribution purposes. Highlighted below is a roadway segment expected to operate beyond capacity in the future 2045 scenarios; improvements are thus required to accomodate forecasted volumes.

- **Segment #84 – Dyer Road from Pullman Street to Red Hill Avenue (City of Santa Ana)**
    - This segment is expected to operate at LOS F in both the 2045 No Project and 2045 With Project scenarios. Planned improvements include a widening of this section of Dyer Road in order to accommodate forecasted traffic volumes. As of the time this report is written, the City of Irvine is expected to be fully responsible for the improvements. However, considering the project's contribution to traffic volumes the City of Santa Ana will provide a fair-share contribution of 23% for future improvements.

Fair-Share Calculation

As noted, the City of Santa Ana will contribute to intersection improvements based on the fair-share contribution to intersection volumes due to the proposed MPAH reclassifications. The fair-share for a given intersection is calculated using the formula shown below and is presented in Table 8-4 for each intersection which is not, or only partially, under the jurisdiction of the City of Santa Ana. Fair-share is the portion of new traffic generated by the project as a percentage of the total change in traffic from the existing year analysis.

$$Fair - Share\ (\%) = \left(\frac{Future\ With\ Project\ Volume - Future\ No\ Project\ Volume}{Future\ With\ Project\ Volume - Existing\ No\ Project\ Volume}\right) \times 100\%$$

Table 8-3: Future Year (2045) LOS Impact Summary

ID	INTERSECTION	PEAK HOUR	2045 No Project		2045 With Project		DELTA	LOS IMPACT?
			V/C or Delay	LOS	V/C or Delay	LOS		
1	Euclid Street and Bolsa Avenue	AM	0.86	D	0.79	C	-0.07	NO
		PM	0.86	D	0.79	C	-0.07	NO
2	Euclid Street and McFadden Avenue	AM	0.98	E	0.91	E	-0.07	NO
		PM	0.90	D	0.79	C	-0.11	NO
3	Euclid Street and Edinger Avenue	AM	0.99	E	1.01	F	0.02	YES
		PM	0.89	D	0.86	D	-0.03	NO
4	Newhope Street and Hazard Avenue	AM	0.78	C	0.60	A	-0.18	NO
		PM	0.72	C	0.52	A	-0.20	NO
5	Newhope Street and McFadden Avenue	AM	0.83	D	0.73	C	-0.10	NO
		PM	0.78	C	0.68	B	-0.10	NO
6	Harbor Boulevard and SR-22 WB Off-Ramp / Banner Drive	AM	28.4	C	28.5	C	0.1	NO / NO *
		PM	24.2	C	23.8	C	-0.4	NO / NO *
7	Trask Avenue and SR-22 EB On-Ramp	AM	12.0	B	11.0	B	-1.0	NO
		PM	13.6	B	11.0	B	-2.6	NO
8	Harbor Boulevard and Westminster Avenue	AM	0.99	E	0.94	E	-0.05	NO
		PM	0.88	D	0.84	D	-0.04	NO
9	Harbor Boulevard and 1st Street	AM	0.79	C	0.75	C	-0.04	NO
		PM	0.78	C	0.75	C	-0.03	NO
10	Harbor Boulevard and McFadden Avenue	AM	0.79	C	0.73	C	-0.06	NO
		PM	0.81	D	0.71	C	-0.10	NO
11	Harbor Boulevard and Edinger Avenue	AM	0.84	D	0.86	D	0.02	NO
		PM	0.73	C	0.72	C	-0.01	NO
12	Harbor Boulevard and Warner Avenue	AM	0.79	C	0.80	C	0.01	NO
		PM	1.54	F	1.54	F	0.00	NO
13	Harbor Boulevard and Segerstrom Avenue	AM	0.97	E	1.01	F	0.04	YES

ID	INTERSECTION	PEAK HOUR	2045 No Project		2045 With Project		DELTA	LOS IMPACT?
			V/C or Delay	LOS	V/C or Delay	LOS		
		PM	0.92	E	0.93	E	0.01	NO
14	Hyland Avenue / OCTA Bus Base and MacArthur Boulevard	AM	0.61	B	0.62	B	0.01	NO
		PM	0.92	E	0.89	D	-0.03	NO
15	Harbor Boulevard and MacArthur Boulevard	AM	0.74	C	0.75	C	0.01	NO
		PM	0.78	C	0.79	C	0.01	NO
16	Harbor Boulevard and Sunflower Avenue	AM	0.70	B	0.71	C	0.01	NO
		PM	0.72	C	0.71	C	-0.01	NO
17	Harbor Boulevard and I-405 NB Off-Ramp	AM	18.0	B	17.9	B	-0.1	NO / NO *
		PM	18.3	B	18.8	B	0.5	NO / NO *
18	Harbor Boulevard and I-405 SB Off-Ramp	AM	15.0	B	15.0	B	0.0	NO / NO *
		PM	17.9	B	18.1	B	0.2	NO / NO *
19	Fairview Street and Civic Center Drive	AM	0.74	C	0.68	B	-0.06	NO
		PM	0.76	C	0.71	C	-0.05	NO
20	Fairview Street and 1st Street	AM	0.86	D	0.89	D	0.03	NO
		PM	0.90	D	0.89	D	-0.01	NO
21	Fairview Street and McFadden Avenue	AM	0.80	C	0.80	C	0.00	NO
		PM	0.78	C	0.68	B	-0.10	NO
22	Fairview Street and Edinger Avenue	AM	0.86	D	0.88	D	0.02	NO
		PM	0.92	E	0.92	E	0.00	NO
23	Fairview Street and Warner Avenue	AM	0.82	D	0.85	D	0.03	NO
		PM	0.80	C	0.81	D	0.01	NO
24	Fairview Street and MacArthur Boulevard	AM	0.68	B	0.69	B	0.01	NO
		PM	0.77	C	0.76	C	-0.01	NO
25	Fairview Road and Sunflower Avenue	AM	0.70	B	0.69	B	-0.01	NO
		PM	0.72	C	0.69	B	-0.03	NO
26	Greenville Street and Edinger Avenue	AM	0.77	C	0.74	C	-0.03	NO
		PM	0.60	A	0.65	B	0.05	NO

ID	INTERSECTION	PEAK HOUR	2045 No Project		2045 With Project		DELTA	LOS IMPACT?
			V/C or Delay	LOS	V/C or Delay	LOS		
27	Greenville Street and Segerstrom Avenue	AM	0.84	D	0.88	D	0.04	NO
		PM	0.78	C	0.80	C	0.02	NO
28	Raitt Street and McFadden Avenue	AM	0.78	C	0.70	B	-0.08	NO
		PM	0.76	C	0.68	B	-0.08	NO
29	Raitt Street and Edinger Avenue	AM	0.99	E	0.93	E	-0.06	NO
		PM	0.99	E	0.99	E	0.00	NO
30	Bear Street and MacArthur Boulevard	AM	0.71	C	0.76	C	0.05	NO
		PM	0.85	D	0.90	D	0.05	NO
31	Bristol Street and 17th Street	AM	0.87	D	0.85	D	-0.02	NO
		PM	0.82	D	0.81	D	-0.01	NO
32	Bristol Street and Civic Center Drive	AM	0.94	E	0.93	E	-0.01	NO
		PM	0.91	E	0.90	D	-0.01	NO
33	Bristol Street and Santa Ana Boulevard	AM	0.81	D	0.72	C	-0.09	NO
		PM	0.85	D	0.73	C	-0.12	NO
34	Bristol Street and 1st Street	AM	0.77	C	0.90	D	0.13	NO
		PM	0.83	D	0.97	E	0.14	YES
35	Bristol Street and McFadden Avenue	AM	0.96	E	0.95	E	-0.01	NO
		PM	1.03	F	0.89	D	-0.14	NO
36	Bristol Street and Warner Avenue	AM	0.92	E	0.96	E	0.04	YES
		PM	0.85	D	0.87	D	0.02	NO
37	Bristol Street and Segerstrom Avenue	AM	0.81	D	0.85	D	0.04	NO
		PM	0.87	D	0.92	E	0.05	YES
38	Bristol Street and Alton Avenue	AM	0.55	A	0.55	A	0.00	NO
		PM	0.63	B	0.58	A	-0.05	NO
39	Bristol Street and MacArthur Boulevard	AM	0.70	B	0.76	C	0.06	NO
		PM	0.77	C	0.80	C	0.03	NO
40	Bristol Street and Sunflower Avenue	AM	0.65	B	0.68	B	0.03	NO

ID	INTERSECTION	PEAK HOUR	2045 No Project		2045 With Project		DELTA	LOS IMPACT?
			V/C or Delay	LOS	V/C or Delay	LOS		
		PM	0.69	B	0.74	C	0.05	NO
41	Bristol Street and I-405 NB Ramps	AM	20.8	C	20.9	C	0.1	NO
		PM	28.5	C	29.0	C	0.5	NO
42	Bristol Street and I-405 SB Ramps	AM	23.9	C	23.6	C	-0.3	NO
		PM	18.3	B	18.2	B	-0.1	NO
43	Flower Street and Santa Ana Boulevard	AM	0.81	D	0.59	A	-0.22	NO
		PM	0.86	D	0.67	B	-0.19	NO
44	Flower Street and 1st Street	AM	0.93	E	0.93	E	0.00	NO
		PM	0.88	D	1.22	F	0.34	YES
45	Flower Street and McFadden Avenue	AM	0.90	D	0.81	D	-0.09	NO
		PM	1.04	F	0.97	E	-0.07	NO
46	Flower Street and Segerstrom Avenue	AM	0.78	C	0.82	D	0.04	NO
		PM	0.87	D	0.92	E	0.05	YES
47	Flower Street and MacArthur Boulevard	AM	0.68	B	0.71	C	0.03	NO
		PM	0.90	D	0.91	E	0.01	YES
48	Main Street and La Veta Avenue	AM	0.59	A	0.54	A	-0.05	NO
		PM	0.70	B	0.76	C	0.06	NO
49	Main Street and Mainplace Drive / Memory Lane	AM	0.51	A	0.46	A	-0.05	NO
		PM	0.56	A	0.50	A	-0.06	NO
50	Main Street and 17th Street	AM	0.88	D	0.85	D	-0.03	NO
		PM	0.76	C	0.80	C	0.04	NO
51	Main Street and Civic Center Drive	AM	0.78	C	0.85	D	0.07	NO
		PM	0.97	E	0.86	D	-0.11	NO
52	Main Street and Santa Ana Boulevard	AM	0.93	E	0.79	C	-0.14	NO
		PM	0.79	C	0.70	B	-0.09	NO
53	Main Street and 4th Street	AM	0.41	A	0.44	A	0.03	NO
		PM	0.45	A	0.47	A	0.02	NO

ID	INTERSECTION	PEAK HOUR	2045 No Project		2045 With Project		DELTA	LOS IMPACT?
			V/C or Delay	LOS	V/C or Delay	LOS		
54	Main Street and 1st Street	AM	0.68	B	0.75	C	0.07	NO
		PM	0.74	C	0.80	C	0.06	NO
55	Main Street and McFadden Avenue	AM	0.89	D	0.92	E	0.03	YES
		PM	0.93	E	0.94	E	0.01	NO
56	Main Street and Edinger Avenue	AM	0.80	C	0.88	D	0.08	NO
		PM	0.87	D	0.98	E	0.11	YES
57	Main Street and MacArthur Boulevard	AM	0.68	B	0.72	C	0.04	NO
		PM	0.75	C	0.78	C	0.03	NO
58	Penn Way and 17th Street	AM	12.2	B	12.1	B	-0.1	NO
		PM	25.5	C	20.3	C	-5.2	NO
59	Santiago Street / I-5 NB Ramps and 17th Street	AM	30.0	C	31.4	C	1.4	NO
		PM	19.0	B	20.3	C	1.3	NO
60	Penn Way and I-5 SB Ramps	AM	21.2	C	19.5	B	-1.7	NO
		PM	23.0	C	22.8	C	-0.2	NO
61	Santiago Street and Civic Center Drive	AM	159.2	F	62.6	F	-96.6	NO
		PM	110.0	F	27.6	D	-82.4	NO
62	Santiago Street and Santa Ana Boulevard	AM	1.04	F	1.44	F	0.40	YES
		PM	1.02	F	1.41	F	0.39	YES
63	Standard Avenue and 4th Street	AM	0.94	E	1.34	F	0.40	YES
		PM	0.89	D	1.34	F	0.45	YES
64	Standard Avenue and 1st Street	AM	0.98	E	1.52	F	0.54	YES
		PM	0.97	E	1.48	F	0.51	YES
65	Standard Avenue and McFadden Avenue	AM	0.85	D	0.84	D	-0.01	NO
		PM	0.83	D	0.77	C	-0.06	NO
66	Halladay Street and Warner Avenue	AM	0.78	C	0.69	B	-0.09	NO
		PM	0.97	E	0.82	D	-0.16	NO
67	Halladay Street and Dyer Road	AM	0.77	C	0.67	B	-0.10	NO

ID	INTERSECTION	PEAK HOUR	2045 No Project		2045 With Project		DELTA	LOS IMPACT?
			V/C or Delay	LOS	V/C or Delay	LOS		
		PM	1.06	F	0.95	E	-0.11	NO
68	SR-55 SB Ramps and MacArthur Boulevard	AM	19.9	B	20.2	C	0.3	NO
		PM	17.8	B	18.4	B	0.6	NO
69	SR-55 NB Ramps and MacArthur Boulevard	AM	19.3	B	19.5	B	0.2	NO
		PM	14.6	B	16.2	B	1.6	NO
70	SR-55 SB Ramps and Dyer Road	AM	25.7	C	25.9	C	0.2	NO
		PM	26.5	C	26.5	C	0.0	NO
71	Glassell Street and La Veta Avenue	AM	0.80	C	0.83	D	0.03	NO
		PM	0.74	C	0.77	C	0.03	NO
72	Glassell Street and SR-22 WB Ramps	AM	32.6	C	30.1	C	-2.5	NO
		PM	30.5	C	33.4	C	2.9	NO
73	Glassell Street / Grand Avenue and SR-22 EB Ramps	AM	30.6	C	29.6	C	-1.0	NO
		PM	31.6	C	31.8	C	0.2	NO
74	Grand Avenue and Fairhaven Avenue	AM	0.61	B	0.57	A	-0.04	NO
		PM	0.72	C	0.67	B	-0.05	NO
75	Grand Avenue and Santa Clara Avenue	AM	0.84	D	0.80	C	-0.04	NO
		PM	0.81	D	0.73	C	-0.08	NO
76	Grand Avenue and 17th Street	AM	0.79	C	0.86	D	0.07	NO
		PM	0.86	D	0.85	D	-0.01	NO
77	Grand Avenue and I-5 NB Ramps	AM	13.2	B	15.3	B	2.1	NO
		PM	10.1	B	11.3	B	1.2	NO
78	Grand Avenue and Santa Ana Boulevard	AM	26.0	C	26.3	C	0.3	NO
		PM	25.3	C	28.5	C	3.2	NO
79	Grand Avenue and 1st Street	AM	0.74	C	0.83	D	0.09	NO
		PM	0.73	C	0.72	C	-0.01	NO
80	Grand Avenue and Chestnut Avenue	AM	0.70	B	0.94	E	0.24	YES
		PM	0.69	B	0.78	C	0.09	NO

ID	INTERSECTION	PEAK HOUR	2045 No Project		2045 With Project		DELTA	LOS IMPACT?
			V/C or Delay	LOS	V/C or Delay	LOS		
81	Grand Avenue and McFadden Avenue	AM	0.89	D	1.01	F	0.12	YES
		PM	0.82	D	0.81	D	-0.01	NO
82	Grand Avenue and Edinger Avenue	AM	0.84	D	0.90	D	0.06	NO
		PM	1.00	E	1.08	F	0.08	YES
83	Grand Avenue and Warner Avenue	AM	0.61	B	0.66	B	0.05	NO
		PM	0.83	D	0.90	D	0.07	NO
84	SR-55 NB Ramps and Dyer Road	AM	17.1	B	17.3	B	0.2	NO
		PM	5.7	A	6.0	A	0.3	NO
85	Cambridge Street and La Veta Avenue	AM	31.6	D	23.4	C	-8.2	NO
		PM	19.7	C	26.1	D	6.4	NO
86	Cambridge Street and Fairhaven Avenue	AM	0.56	A	0.62	B	0.06	NO
		PM	0.45	A	0.53	A	0.08	NO
87	Mabury Street and 1st Street	AM	27.4	C	27.4	C	0.0	NO / NO *
		PM	27.1	C	27.2	C	0.1	NO / NO *
88	Tustin Street and La Veta Avenue	AM	0.45	A	0.36	A	-0.09	NO
		PM	0.38	A	0.34	A	-0.04	NO
89	Tustin Street and SR-22 WB On-Ramp	AM	12.2	B	13.2	B	1.0	NO
		PM	11.1	B	7.7	A	-3.4	NO
90	Tustin Street and SR-22 EB Off-Ramp / Seba Avenue	AM	25.0	C	23.8	C	-1.2	NO
		PM	23.1	C	23.3	C	0.2	NO
91	Tustin Street and Fairhaven Avenue	AM	1.20	F	1.24	F	0.04	YES
		PM	0.69	B	0.76	C	0.07	NO
92	Tustin Avenue and Santa Clara Avenue	AM	1.04	F	1.10	F	0.06	YES
		PM	0.71	C	0.78	C	0.07	NO
93	Tustin Avenue and 17th Street	AM	0.91	E	0.81	D	-0.10	NO
		PM	0.80	C	0.74	C	-0.06	NO
94	Tustin Avenue and 4th Street	AM	0.83	D	0.79	C	-0.04	NO

ID	INTERSECTION	PEAK HOUR	2045 No Project		2045 With Project		DELTA	LOS IMPACT?
			V/C or Delay	LOS	V/C or Delay	LOS		
		PM	0.71	C	0.78	C	0.07	NO
95	SR-55 SB Ramps / Auto Mall Drive and Edinger Avenue	AM	25.2	C	25.1	C	-0.1	NO / NO *
		PM	25.5	C	25.4	C	-0.1	NO / NO *
96	SR-55 NB Ramps / Del Amo Avenue and Newport Avenue	AM	25.4	C	25.6	C	0.2	NO
		PM	39.1	D	46.2	D	7.1	YES
97	Red Hill Avenue and Edinger Avenue	AM	0.61	B	0.62	B	0.01	NO
		PM	0.85	D	0.87	D	0.02	NO
98	Red Hill Avenue and Warner Avenue	AM	0.56	A	0.58	A	0.02	NO
		PM	0.88	D	0.95	E	0.07	YES
99	Red Hill Avenue and Barranca Parkway	AM	0.55	A	0.58	A	0.03	NO
		PM	0.54	A	0.59	A	0.05	NO
100	Red Hill Avenue and Alton Parkway	AM	0.86	D	0.93	E	0.07	YES
		PM	1.18	F	1.49	F	0.31	YES
101	Red Hill Avenue and MacArthur Boulevard	AM	0.69	B	0.71	C	0.02	NO
		PM	0.70	B	0.72	C	0.02	NO
102	Red Hill Avenue and Main Street	AM	0.72	C	0.73	C	0.01	NO
		PM	0.81	D	0.84	D	0.03	NO
103	I-5 SB Ramps and Santa Ana Boulevard	AM	17.4	B	17.8	B	0.4	NO
		PM	18.4	B	19.9	B	1.5	NO
104	Tustin Ranch Road and Warner Avenue	AM	0.52	A	0.53	A	0.01	NO
		PM	0.65	B	0.67	B	0.02	NO
105	Von Karman Avenue and Barranca Parkway	AM	0.93	E	0.93	E	0.00	NO
		PM	1.23	F	1.28	F	0.05	YES

**Intersection is a Caltrans intersection and also part of OC CMP; XX/YY denotes LOS impacts per Caltrans/CMP impact criteria, respectively.*

Table 8-4: LOS Improvement Measures

ID	INTERSECTION	IMPROVEMENT
3	Euclid Street and Edinger Avenue	• Alternative 1 o Convert the WB right-turn lane into a shared thru-right. • Alternative 2 o Add EB-LT lane. • Alternative 3 o Add LT lane for EB and WB directions. • Fair-Share: 9.0% (AM)
13	Harbor Boulevard and Segerstrom Avenue	• Add a second WB left-turn lane. • Change WB and EB left-turn control to protected.
34	Bristol Street and 1st Street	• Maintain 2045 NP configuration for WB approach. o WB approach to be: 1L, 2T, 1TR • Add EB right-turn pocket.
36	Bristol Street and Warner Avenue	• Feasible improvements could not be identified.
37	Bristol Street and Segerstrom Avenue	• Maintain 2045 NP configurations for EB/WB approaches. o EB/WB approaches to be: 1LT, 2T, 1TR • Add NB right-turn pocket.
44	Flower Street and 1st Street	• Maintain 2045 NP configurations for NB approach. o NB approach to be: 1L, 2T, 1R
46	Flower Street and Segerstrom Avenue	• Feasible improvements could not be identified.
47	Flower Street and MacArthur Boulevard	• Feasible improvements could not be identified.
55	Main Street and McFadden Avenue	• Feasible improvements could not be identified.
56	Main Street and Edinger Avenue	• Feasible improvements could not be identified.
62	Santiago Street and Santa Ana Boulevard	• Feasible improvements could not be identified.

ID	INTERSECTION	IMPROVEMENT
63	Standard Avenue and 4th Street	• Maintain 2045 NP conditions. o NB / SB to be: 1L, 1T, 1R o EB / WB to be: 1L, 1T, 1TR
64	Standard Avenue and 1st Street	• Feasible improvements could not be identified.
80	Grand Avenue and Chestnut Avenue	• Feasible improvements could not be identified.
81	Grand Avenue and McFadden Avenue	• Maintain 2045 NP configuration for EB approach o EB approach to be: 1L, 1T, 1TR
82	Grand Avenue and Edinger Avenue	• Feasible improvements could not be identified.
91	Tustin Street and Fairhaven Avenue	• Maintain 2045 NP lane configurations for EB and WB approaches o EB approach to be: 1L, 1T, 1TR o WB approach to be: 1L, 1T, 1R
92	Tustin Avenue and Santa Clara Avenue	• Maintain 2045 NP lane configurations for EB and WB approaches. o EB and WB approaches to be: 1L, 1T, 1TR
96	SR-55 NB Ramps / Del Amo Avenue and Newport Avenue	• Add a second SB right-turn lane. • Fair-Share: 10.6% (PM)
98	Red Hill Avenue and Warner Avenue	• Add a left-turn lane to the EB approach. • Fair-Share: 17.3% (PM)
100	Red Hill Avenue and Alton Parkway	• Add a NB thru lane. • Add a left-turn lane and a shared thru-right to the EB approach. • Convert the WB right-turn lane into a shared thru-right. • Fair-Share: 21.0% (AM) / 34.7% (PM)
105	Von Karman Avenue and Barranca Parkway	• Convert one (1) WB thru lane into a shared thru-right. • Fair-Share: 14.1% (PM)

Table 8-5: Future Year (2045) With Project – Mitigated Impact Summary

ID	INTERSECTION	PEAK HOUR	2045 No Project		2045 With Project		DELTA	IMPACT?	2045 With Project – Mit.		DELTA	IMPACT?
			V/C or Delay	LOS	V/C or Delay	LOS			V/C or Delay	LOS		
3	Euclid Street and Edinger Avenue (with Alternative 1 measure)	AM	0.99	E	1.01	F	0.02	YES	1.00	E	0.01	NO
		PM	0.89	D	0.86	D	-0.03	NO	0.80	D	-0.09	NO
3	Euclid Street and Edinger Avenue (with Alternative 2 measure)	AM	0.99	E	1.01	F	0.02	YES	1.00	E	0.01	NO
		PM	0.89	D	0.86	D	-0.03	NO	0.82	D	-0.07	NO
3	Euclid Street and Edinger Avenue (with Alternative 3 measure)	AM	0.99	E	1.01	F	0.02	YES	0.97	E	-0.02	NO
		PM	0.89	D	0.86	D	-0.03	NO	0.82	D	-0.07	NO
13	Harbor Boulevard and Segerstrom Avenue	AM	0.97	E	1.01	F	0.04	YES	0.96	E	-0.01	NO
		PM	0.92	E	0.93	E	0.01	NO	0.93	E	0.01	NO
34	Bristol Street and 1st Street	AM	0.77	C	0.90	D	0.13	NO	0.79	C	0.02	NO
		PM	0.83	D	0.97	E	0.14	YES	0.87	D	0.04	NO
36	Bristol Street and Warner Avenue	AM	0.92	E	0.96	E	0.04	YES	0.96	E	0.04	YES
		PM	0.85	D	0.87	D	0.02	NO	0.87	D	0.02	NO
37	Bristol Street and Segerstrom Avenue	AM	0.81	D	0.85	D	0.04	NO	0.81	D	0.00	NO
		PM	0.87	D	0.92	E	0.05	YES	0.87	D	0.00	NO
44	Flower Street and 1st Street	AM	0.93	E	0.93	E	0.00	NO	0.93	E	0.00	NO
		PM	0.88	D	1.22	F	0.34	YES	0.92	E	0.04	YES
46	Flower Street and Segerstrom Avenue	AM	0.78	C	0.82	D	0.04	NO	0.82	D	0.04	NO
		PM	0.87	D	0.92	E	0.05	YES	0.92	E	0.05	YES
47	Flower Street and Macarthur Boulevard	AM	0.68	B	0.71	C	0.03	NO	0.71	C	0.03	NO
		PM	0.90	D	0.91	E	0.01	YES	0.91	E	0.01	YES
55	Main Street and McFadden Avenue	AM	0.89	D	0.92	E	0.03	YES	0.92	E	0.03	YES
		PM	0.93	E	0.94	E	0.01	NO	0.94	E	0.01	NO
56	Main Street and Edinger Avenue	AM	0.80	C	0.88	D	0.08	NO	0.88	D	0.08	NO
		PM	0.87	D	0.98	E	0.11	YES	0.98	E	0.11	YES

ID	INTERSECTION	PEAK HOUR	2045 No Project		2045 With Project		DELTA	IMPACT?	2045 With Project – Mit.		DELTA	IMPACT?
			V/C or Delay	LOS	V/C or Delay	LOS			V/C or Delay	LOS		
62	Santiago Street and Santa Ana Boulevard	AM	1.04	F	1.44	F	0.40	YES	1.44	F	0.40	YES
		PM	1.02	F	1.41	F	0.39	YES	1.41	F	0.39	YES
63	Standard Avenue and 4th Street	AM	0.94	E	1.34	F	0.40	YES	1.06	F	0.12	YES
		PM	0.89	D	1.34	F	0.45	YES	1.03	F	0.14	YES
64	Standard Avenue and 1st Street	AM	0.98	E	1.52	F	0.54	YES	1.52	F	0.54	YES
		PM	0.97	E	1.48	F	0.51	YES	1.48	F	0.51	YES
80	Grand Avenue and Chestnut Avenue	AM	0.70	B	0.94	E	0.24	YES	0.94	E	0.24	YES
		PM	0.69	B	0.78	C	0.09	NO	0.78	C	0.09	NO
81	Grand Avenue and McFadden Avenue	AM	0.89	D	1.01	F	0.12	YES	0.86	D	-0.03	NO
		PM	0.82	D	0.81	D	-0.01	NO	0.81	D	-0.01	NO
82	Grand Avenue and Edinger Avenue	AM	0.84	D	0.90	D	0.06	NO	0.90	D	0.06	NO
		PM	1.00	E	1.08	F	0.08	YES	1.08	F	0.08	YES
91	Tustin Street and Fairhaven Avenue	AM	1.20	F	1.24	F	0.04	YES	1.06	F	-0.14	NO
		PM	0.69	B	0.76	C	0.07	NO	0.64	B	-0.05	NO
92	Tustin Avenue and Santa Clara Avenue	AM	1.04	F	1.10	F	0.06	YES	0.94	E	-0.10	NO
		PM	0.71	C	0.78	C	0.07	NO	0.68	B	-0.03	NO
96	SR-55 NB Ramps / Del Amo Avenue and Newport Avenue	AM	25.4	C	25.6	C	0.2	NO	24.4	C	-1.0	NO
		PM	39.1	D	46.2	D	7.1	YES	28.5	C	-10.6	NO
98	Red Hill Avenue and Warner Avenue	AM	0.56	A	0.58	A	0.02	NO	0.56	A	0.00	NO
		PM	0.88	D	0.95	E	0.07	YES	0.80	D	-0.08	NO
100	Red Hill Avenue and Alton Parkway	AM	0.86	D	0.93	E	0.07	YES	0.68	B	-0.18	NO
		PM	1.18	F	1.49	F	0.31	YES	1.28	F	0.10	YES
105	Von Karman Avenue and Barranca Parkway	AM	0.93	E	0.93	E	0.00	NO	0.93	E	0.00	NO
		PM	1.23	F	1.28	F	0.05	YES	1.24	F	0.01	NO

As shown in Table 8-5, impacts are expected to remain at the following intersections:

- **INT 36 – Bristol Street and Warner Avenue (City of Santa Ana)**
    - Due to limited right-of-way, feasible improvements could not be developed. The LOS cannot be returned to an acceptable LOS; the impact is to remain in the AM peak hour.
- **INT 44 – Flower Street and 1st Street (City of Santa Ana)**
    - A mitigation measure was developed but only resulted in partial mitigation of the impact. The LOS cannot be returned to an acceptable LOS; the impact is to remain in the PM peak hour.
- **INT 46 – Flower Street and Segerstrom Avenue (City of Santa Ana)**
    - Due to limited right-of-way, feasible improvements could not be developed. The LOS cannot be returned to an acceptable LOS; the impact is to remain in the PM peak hour.
- **INT 47 – Flower Street and Segerstrom Avenue (City of Santa Ana)**
    - Due to limited right-of-way, feasible improvements could not be developed. The LOS cannot be returned to an acceptable LOS; the impact is to remain in the PM peak hour.
- **INT 55 – Main Street and McFadden Avenue (City of Santa Ana)**
    - Due to limited right-of-way, feasible improvements could not be developed. The LOS cannot be returned to an acceptable LOS; the impact is to remain in the AM peak hour.
- **INT 56 – Main Street and Edinger Avenue (City of Santa Ana)**
    - Due to limited right-of-way, feasible improvements could not be developed. The LOS cannot be returned to an acceptable LOS; the impact is to remain in the PM peak hour.
- **INT 62 – Santiago Street and Santa Ana Boulevard (City of Santa Ana)**
    - Due to limited right-of-way and the implementation of the OC Streetcar, a mitigation measure was developed but only resulted in partial mitigation of the impact. The LOS cannot be returned to an acceptable LOS; the impact is to remain in the AM and PM peak hours.
- **INT 63 – Standard Avenue and 4th Street (City of Santa Ana)**
    - A mitigation measure was developed but only resulted in partial mitigation of the impact. The LOS cannot be returned to an acceptable LOS; the impact is to remain in the AM and PM peak hours.

- **INT 64 – Standard Avenue and 1st Street (City of Santa Ana)**
    - Due to limited right-of-way and the planned implementation of the bike lanes along both Standard Avenue and First Street, no feasible improvements were identified.The LOS cannot be returned to an acceptable LOS; the impact is to remain in the AM and PM peak hours.
- **INT 80 – Grand Avenue and Chestnut Avenue (City of Santa Ana)**
    - Due to limited right-of-way and the planned implementation of the bike lanes along Chestnut Avenue, no feasible improvements were identified. The LOS cannot be returned to an acceptable LOS; the impact is to remain in the AM peak hour.
- **INT 82 – Grand Avenue and Edinger Avenue (City of Santa Ana)**
    - Due to limited right-of-way, feasible improvements could not be developed. The LOS cannot be returned to an acceptable LOS; the impact is to remain in the PM peak hour.
- **INT 100 – Red Hill Avenue and Alton Parkway (City of Irvine)**
    - Due to limited right-of-way, a mitigation measure was developed and resulted in mitigating the impacts in the AM peak hour only. The LOS cannot be returned to an acceptable LOS in the PM peak hour; additionally, the impact is to remain in the PM peak hour.

9.0 Conclusions

This traffic analysis report has been prepared in support of the General Plan Update (GPU) Draft Program Environmental Impact Report (PEIR) for the City of Santa Ana and to assess requested changes to the Orange County Transportation Authority's (OCTA) Master Plan of Arterial Highways (MPAH) by the City of Santa Ana. The purpose of this study is to identify traffic impacts due to the implementation of the proposed project (General Plan update). This study was prepared in conformance with CEQA guidelines and in consultation with the OPR Technical Advisory as well as the traffic impact analysis guidelines for the City of Santa Ana and local jurisdictions. CEQA identifies VMT as the preferred metric for identifying environmental impacts. However, intersection impacts and roadway LOS are also evaluated in order to address local network performance. A summary of the analysis is provided below.

9.1 VMT IMPACT ANALYSIS

A VMT analysis was conducted to determine impacts due to the implementation of the project. The project was evaluated to determine the potential project level and cumulative impacts.

A project is considered to have a significant impact at the project level if the project VMT/SP (for the land use plan) exceeds 15% below the existing total daily VMT/SP for the County. The VMT impact threshold (15% below the 2020 – No Project County VMT/SP) is 22.0 VMT/SP. The project resulted in a 2045 – With Project City VMT/SP of 20.3 VMT/SP. Thus, the project does not result in a project level VMT impact.

A project is considered to have a significant cumulative impact if the project results in a negative effect on VMT/SP at the citywide level (City VMT/SP is higher with the project than without it). The VMT impact threshold (2045 – No Project City VMT/SP) is 22.8 VMT/SP. The project resulted in a 2045 – With Project City VMT/SP of 20.3 VMT/SP. The project does not result in a negative impact on citywide VMT, therefore does not result in a cumulative impact.

9.2 INTERSECTION LOS ANALYSIS

An intersection impact analysis was conducted in order to determine projects impacts related to the OCTA MPAH and City-level LOS guidelines at study intersections. It should be noted that intersection impacts may be identified but are not indicative of an environmental impact, per CEQA. Significant impacts are expected at twenty-four (24) study intersections for the Future year (2045) With Project scenario. Mitigation of the impacts is not required for CEQA conformance, but measures were developed to address local network performance. All mitigation measures are subject to the approval of the presiding public authority, including funding and implementation. The City of Santa Ana will update its Transportation System Improvement Assessment (TSIA) in order to provide funding for the implementation of the City of Santa Ana Circulation Element Transportation Network buildout. For mitigation measures in adjoining jurisdictions, the City of Santa Ana will contribute to the fairshare of the corresponding mitigation measures.

All identified impacts are expected to be mitigated with the exception of:

- INT 36 – Bristol Street and Warner Avenue (City of Santa Ana)
- INT 44 – Flower Street and 1st Street (City of Santa Ana)
- INT 46 – Flower Street and Segerstrom Avenue (City of Santa Ana)
- INT 47 – Flower Street and Segerstrom Avenue (City of Santa Ana)
- INT 55 – Main Street and McFadden Avenue (City of Santa Ana)

- INT 56 – Main Street and Edinger Avenued (City of Santa Ana)
- INT 62 – Santiago Street and Santa Ana Boulevard (City of Santa Ana)
- INT 63 – Standard Avenue and 4th Street (City of Santa Ana)
- INT 64 – Standard Avenue and 1st Street (City of Santa Ana)
- INT 80 – Grand Avenue and Chestnut Avenue (City of Santa Ana)
- INT 82 – Grand Avenued and Alton Parkway (City of Santa Ana)
- INT 100 – Red Hill Avenue and Alton Parkway (City of Irvine)

9.3 ROADWAY LOS

Roadway LOS was assessed to determine conformance with the City of Santa Ana MPSH minimum level of service requirements. Eleven study roadways currently operate at an unacceptable LOS. Thirteen study roadways are expected to operate at an unacceptable LOS in the Future Year (2045) No Project scenario. Eight roadways are expected to operate at an unacceptable LOS in the Future Year (2045) With Project scenario. Although the LOS exceeds the standard established in the Circulation Element, physical improvements are not feasible due to right-of-way constraints.

10.0 Appendices

- APPENDIX A – LANE GEOMETRIES
- APPENDIX B – INTERSECTION VOLUMES
- APPENDIX C – OCTAM VOLUME PLOTS
- APPENDIX D – ANALYSIS WORKSHEETS
- APPENDIX E – MITIGATION WORKSHEETS
- APPENDIX F – VMT CALCULATIONS
- APPENDIX G – OCTAM 2045 VOLUME COMPARISON PLOTS
- APPENDIX H - COUNTS

APPENDIX A
LANE GEOMETRIES

APPENDIX A.1

LANE GEOMETRIES – 2020 NP

Santa Ana Circulation Element

Scenario Report

Scenario:	2020 NP AM Peak Hour
Command:	Default Command
Volume:	2020 NP AM
Geometry:	NP
Impact Fee:	Default Impact Fee
Trip Generation:	Default Trip Generation
Trip Distribution:	Default Trip Distribution
Paths:	Default Path
Routes:	Default Route
Configuration:	Default Configuration

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

2020 NP AM Peak Hour Mon Oct 26, 2020 11:27:40 Page 2-1

Santa Ana Circulation Element

Lane Geometry Report

Number of approach lanes: (L) (LT) (T) (RT) (R) (LTR)

Node	Intersection	NB	SB	EB	WB
1	Euclid St and 1st St	102100	102100	102100	102100
2	Euclid St and McFadden Ave	102100	102100	101100	101100
3	Euclid St and Edinger Ave	202100	202100	102010	102010
4	Newhope St and Hazard Ave	101100	101100	101100	101100
5	Newhope St and McFadden Ave	101100	101100	101100	101100
6	Harbor Blvd and SR-22 WB Off-Ramp /	103000	002100	000001	110010
7	Trask Avenue and SR-22 EB On-Ramp	000000	000000	201000	001100
8	Harbor Blvd and Westminster Ave	103010	103010	102100	103010
9	Harbor Blvd and 1st St	103010	103010	202100	202100
10	Harbor Blvd and McFadden Ave	203010	202100	101100	101100
11	Harbor Blvd and Edinger Ave	203010	203010	202100	203010
12	Harbor Blvd and Warner Ave	202100	203010	203010	203010
13	Harbor Blvd and Segerstrom Ave	202100	102100	101100	102010
14	MacArthur Blvd and Hyland Ave	200100	101010	103010	103010
15	MacArthur Blvd and Harbor Blvd	203010	203010	103010	103010
16	Harbor Blvd and Sunflower Ave	203010	203010	101100	110100
17	Harbor Blvd and I-405 WB Off-Ramp	004000	004000	000000	100011
18	Harbor Blvd and I-405 EB Off-Ramp	003010	004000	100011	000000
19	Fairview St and Civic Center Dr	102100	102100	010100	110010
20	Fairview St and 1st St	103010	102100	102100	102100
21	Fairview St and McFadden Ave	103010	103010	101100	101100
22	Fairview St and Edinger Ave	202100	202100	202100	202100
23	Fairview St and Warner Ave	202100	202100	202100	202100
24	Fairview St and MacArthur Blvd	202100	203010	203010	203010
25	Fairview Rd and Sunflower Ave	203010	202100	201100	202010
26	Greenville St and Edinger Ave	100010	000000	002100	102000
27	Greenville St and Segerstrom Ave	101100	101010	101100	101100
28	Raitt St and McFadden Ave	101100	101100	101100	101100
29	Raitt St and Edinger Ave	101100	101100	101100	101100
30	Bear St and MacArthur Blvd	102010	102010	102100	102100
31	Bristol St and 17th St	203010	203010	202100	203010
32	Bristol St and Civic Center Dr	102100	102100	101100	101100
33	Bristol St and Santa Ana Blvd	102100	102100	101100	101100
34	Bristol St and 1st St	203010	203010	102100	102100
35	Bristol St and McFadden Ave	103010	103010	101100	101100
36	Bristol St and Warner Ave	202010	202100	103010	103010
37	Bristol St and Segerstrom Ave	102100	102100	101100	101100
38	Bristol St and Alton Ave	102100	103010	101100	100100
39	Bristol St and MacArthur Blvd	203010	202100	203010	203010
40	Bristol St and Sunflower Ave	202110	203010	202110	203010
41	Bristol St and I-405 WB Ramps	004010	004100	000020	111020
42	Bristol St and I-405 EB Ramps	104000	002110	300010	000000
43	Flower St and Santa Ana Blvd	102010	102010	103010	102010
44	Flower St and 1st St	102010	101100	102100	102100
45	Flower St and McFadden Ave	100100	100100	100100	100100
46	Flower St and Segerstrom Ave	101100	101100	101100	101100
47	Flower St and MacArthur Blvd	101100	101100	102100	102100

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Number of approach lanes: (L) (LT) (T) (RT) (R) (LTR)

Node	Intersection	NB	SB	EB	WB
48	Main St and La Veta Ave	203010	202100	202100	202010
49	Main St and Mainplace Dr / Memory L	202100	202100	202100	202010
50	Main St and 17th St	202010	201100	202100	202100
51	Main St and Civic Center Dr	101100	101100	101100	101100
52	Main St and Santa Ana Blvd	102000	001100	000000	011100
53	Main St and 4th St	001100	001100	000100	000100
54	Main St and 1st St	101100	102010	102100	102100
55	Main St and McFadden Ave	101100	101100	100100	101010
56	Main St and Edinger Ave	101100	101100	102010	102100
57	Main St and MacArthur Blvd	203010	203010	203010	203010
58	Penn Wy and 17th St	200020	000000	002100	103000
59	I-5 NB Off Ramps/17th Street	110010	100010	103010	002100
60	Penn Wy and I-5 SB Ramps	002010	202000	000000	100020
61	Santiago St and Civic Center Dr	100100	100100	010010	000001
62	Santiago St and Santa Ana Blvd	101010	101010	101100	102010
64	Standard Ave and 1st St	100100	000001	101100	101100
65	Standard Ave and Mcfadden Ave	101100	101100	101100	101100
66	Halladay St and Warner Ave	100010	000000	001100	011000
67	Halladay St and Dyer Rd	100100	100100	102100	102100
68	SR-55 SB Ramps and MacArthur Blvd	000000	200020	002110	003010
69	SR-55 NB Ramps and MacArthur Blvd	200010	000000	002020	003010
70	SR-55 SB Ramps and Dyer Rd	110020	011010	103010	203010
71	Glassell St and La Veta Ave	201010	101100	101010	101100
72	Glassell St and SR-22 WB Ramps	102000	002010	000000	100011
73	Grand Ave / Glassell St and SR-22 E	002010	102000	100011	000000
74	Grand Ave and Fairhaven Ave	102100	102010	101100	101010
75	Grand Ave and Santa Clara Ave	102100	101100	100100	101010
76	Grand Ave and 17th St	102100	102010	202100	202100
77	Grand Ave and I-5 NB Ramps	002010	103000	000000	200010
78	Grand Ave and Santa Ana Blvd	102100	102020	201020	010100
79	Grand Ave and 1st St	202100	203010	202100	201100
80	Grand Ave and Chestnut Ave	102100	102100	101100	101100
81	Grand Ave and McFadden Ave	102100	102100	101100	101100
82	Grand Ave and Edinger Ave	102100	102100	102100	102100
83	Grand Ave and Warner Ave	102100	102100	203010	202010
84	SR-55 NB Ramps and Dyer Rd	100011	000000	003010	002100
85	Cambridge St and La Veta Ave	101000	001010	100010	000000
86	Cambridge St and Fairhaven Ave	000000	100010	102000	001100
87	Mabury St and 1st Street	100010	100011	002100	102100
88	Tustin St and La Veta Ave	102100	102100	101100	110010
89	Tustin St and SR-22 WB On-Ramp	202000	002100	000000	000000
90	Tustin St and SR-22 EB Off-Ramp / S	002100	103000	100011	000001
91	Tustin Ave and Fairhaven Ave	202100	202100	101100	101010
92	Tustin Ave and Santa Clara Ave	102100	202100	101100	101100
93	Tustin Ave and 17th St	202010	202100	203010	203010
94	Tustin Ave and 4th St	102100	202010	102100	102100
95	SR-55 SB Ramps / Auto Mall Dr and E	110020	101010	103010	202100
96	SR-55 NB Ramps / Del Amo Ave and Ne	202100	103010	201100	101100
97	Red Hill Ave and Edinger Ave	203010	203010	203010	203010
98	Red Hill Ave and Warner Ave	203100	202100	102100	203010

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Number of approach lanes: (L) (LT) (T) (RT) (R) (LTR)

Node	Intersection	NB	SB	EB	WB
99	Red Hill Ave and Dyer Rd / barranca	204010	204010	203100	204010
100	Red Hill Ave and Alton Pkwy	103010	103010	102010	201010
101	Red Hill Ave and MacArthur Blvd	202100	203010	203010	103010
102	Red Hill Ave and Main St	202010	202010	202100	202100
103	I-5 SB Ramps and Santa Ana Blvd	000000	200010	203000	002100
104	Tustin Ranch Rd and Warner Ave	000000	200010	203000	003010
105	Von Karman Ave and Barranca Pkwy	201100	202020	203010	204010
106	Red Hill Avenue and El Camino Real	203010	102100	101010	100100
107	Red Hill Avenue and I-5 NB Ramps	103000	003010	000000	200010
108	Red Hill Avenue and I-5 SB Ramps	004010	103000	010010	000000
109	Red Hill Avenue and Nisson Road	103100	102100	100100	100100
110	Red Hill Avenue and Walnut Avenue	102100	102100	101100	201100
111	Red Hill Avenue and Valencia Avenue	103100	102100	101010	201010
112	Tustin Ranch Road and Warner Avenue	003010	203000	000000	300020
113	Tustin Ranch Road and Walnut Avenue	203010	203010	201100	202010
114	SR-55 SB Ramps and Irvine Boulevard	000000	100011	002100	103000
115	SR-55 NB Ramps and Irvine Boulevard	100011	000000	103000	002100

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

APPENDIX A.2
LANE GEOMETRIES – 2045 NP

Santa Ana Circulation Element

Scenario Report

Scenario:	2045 NP AM Peak Hour
Command:	Default Command
Volume:	2045 NP AM
Geometry:	MPAH
Impact Fee:	Default Impact Fee
Trip Generation:	Default Trip Generation
Trip Distribution:	Default Trip Distribution
Paths:	Default Path
Routes:	Default Route
Configuration:	Default Configuration

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

2045 NP AM Peak Hour Mon Oct 26, 2020 11:38:23 Page 2-1

Santa Ana Circulation Element

Lane Geometry Report

Number of approach lanes: (L) (LT) (T) (RT) (R) (LTR)

Node	Intersection	NB	SB	EB	WB
1	Euclid St and 1st St	102100	102100	102100	102100
2	Euclid St and McFadden Ave	102100	102100	101100	101100
3	Euclid St and Edinger Ave	202100	202100	102010	102010
4	Newhope St and Hazard Ave	101100	101100	101100	101100
5	Newhope St and McFadden Ave	101100	101100	101100	101100
6	Harbor Blvd and SR-22 WB Off-Ramp /	103000	002100	000001	110010
7	Trask Avenue and SR-22 EB On-Ramp	000000	000000	201000	001100
8	Harbor Blvd and Westminster Ave	103010	103010	102100	103010
9	Harbor Blvd and 1st St	103010	103010	202100	202100
10	Harbor Blvd and McFadden Ave	203010	202100	101100	101100
11	Harbor Blvd and Edinger Ave	203010	203010	202100	203010
12	Harbor Blvd and Warner Ave	202100	203010	203010	203010
13	Harbor Blvd and Segerstrom Ave	202100	102100	101100	102010
14	MacArthur Blvd and Hyland Ave	200100	101010	103010	103010
15	MacArthur Blvd and Harbor Blvd	203010	203010	103010	103010
16	Harbor Blvd and Sunflower Ave	203010	203010	101100	110100
17	Harbor Blvd and I-405 NB Off-Ramp	004000	004000	000000	100011
18	Harbor Blvd and I-405 SB Off-Ramp	003010	004000	100011	000000
19	Fairview St and Civic Center Dr	102100	102100	010100	110010
20	Fairview St and 1st St	103010	102100	102100	102100
21	Fairview St and McFadden Ave	103010	103010	101100	101100
22	Fairview St and Edinger Ave	202100	202100	202100	202100
23	Fairview St and Warner Ave	202100	202100	202100	202100
24	Fairview St and MacArthur Blvd	202100	203010	203010	203010
25	Fairview Rd and Sunflower Ave	203010	202100	201100	202010
26	Greenville St and Edinger Ave	100010	000000	002100	103000
27	Greenville St and Segerstrom Ave	100100	100100	102100	102100
28	Raitt St and McFadden Ave	101100	101100	101100	101100
29	Raitt St and Edinger Ave	101100	101100	102100	102100
30	Bear St and MacArthur Blvd	102010	102010	102100	102100
31	Bristol St and 17th St	203010	203010	202100	203010
32	Bristol St and Civic Center Dr	102100	102100	101100	101100
33	Bristol St and Santa Ana Blvd	102100	102100	102100	102100
34	Bristol St and 1st St	203010	203010	102100	102100
35	Bristol St and McFadden Ave	103010	103010	101100	101100
36	Bristol St and Warner Ave	202100	202100	103010	103010
37	Bristol St and Segerstrom Ave	102100	102100	102100	102100
38	Bristol St and Alton Ave	102100	103010	101100	100100
39	Bristol St and MacArthur Blvd	203010	202100	203010	203010
40	Bristol St and Sunflower Ave	202110	203010	202110	203010
41	Bristol St and I-405 NB Ramps	004010	004100	000020	111020
42	Bristol St and I-405 SB Ramps	104000	002110	300010	000000
43	Flower St and Santa Ana Blvd	102010	102010	103010	102100
44	Flower St and 1st St	102010	101100	102100	102100
45	Flower St and McFadden Ave	010100	010100	010100	010100
46	Flower St and Segerstrom Ave	101100	101100	102100	102100
47	Flower St and MacArthur Blvd	101100	101100	102100	102100

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Number of approach lanes: (L) (LT) (T) (RT) (R) (LTR)

Node	Intersection	NB	SB	EB	WB
48	Main St and La Veta Ave	203010	202100	202100	202010
49	Main St and Mainplace Dr / Memory L	202100	202100	202100	202010
50	Main St and 17th St	202010	202010	202100	202100
51	Main St and Civic Center Dr	101100	101100	101100	101100
52	Main St and Santa Ana Blvd	102000	001100	000000	010100
53	Main St and 4th St	001100	001100	001100	001100
54	Main St and 1st St	101100	102010	102100	102100
55	Main St and McFadden Ave	101100	101100	101100	101100
56	Main St and Edinger Ave	101100	101100	102100	102100
57	Main St and MacArthur Blvd	203010	203010	203010	203010
58	Penn Wy and 17th St	200020	000000	002100	103000
59	I-5 NB Off Ramps/17th Street	110010	100010	103010	002100
60	Penn Wy and I-5 SB Ramps	002010	202000	000000	100020
61	Santiago St and Civic Center Dr	100100	100100	010010	000001
62	Santiago St and Santa Ana Blvd	101100	101100	101100	102010
63	Standard Ave and 4th St	102010	102010	101100	101100
64	Standard Ave and 1st St	101100	101100	102100	102100
65	Standard Ave and Mcfadden Ave	101100	101100	101100	101100
66	Halladay St and Warner Ave	100010	000000	002100	012000
67	Halladay St and Dyer Rd	100100	100100	102100	102100
68	SR-55 SB Ramps and MacArthur Blvd	000000	200020	002110	003010
69	SR-55 NB Ramps and MacArthur Blvd	200010	000000	002020	003010
70	SR-55 SB Ramps and Dyer Rd	110020	011010	103010	203010
71	Glassell St and La Veta Ave	201010	101100	101010	101100
72	Glassell St and SR-22 WB Ramps	102000	002010	000000	100011
73	Grand Ave / Glassell St and SR-22 E	002010	102000	100011	000000
74	Grand Ave and Fairhaven Ave	102100	102100	101100	101010
75	Grand Ave and Santa Clara Ave	102100	102100	100100	101010
76	Grand Ave and 17th St	102100	102100	202100	202100
77	Grand Ave and I-5 NB Ramps	002010	103000	000000	200010
78	Grand Ave and Santa Ana Blvd	102100	102020	201020	010100
79	Grand Ave and 1st St	202100	203010	202100	202100
80	Grand Ave and Chestnut Ave	102100	102100	101100	101100
81	Grand Ave and McFadden Ave	102100	102100	101100	101100
82	Grand Ave and Edinger Ave	102100	102100	102100	102100
83	Grand Ave and Warner Ave	102100	102100	203010	202100
84	SR-55 NB Ramps and Dyer Rd	100011	000000	003010	002100
85	Cambridge St and La Veta Ave	101000	001010	100010	000000
86	Cambridge St and Fairhaven Ave	000000	100010	102000	001100
87	Mabury St and 1st Street	100010	100011	002100	102100
88	Tustin St and La Veta Ave	102100	102100	101100	110010
89	Tustin St and SR-22 WB On-Ramp	202000	002100	000000	000000
90	Tustin St and SR-22 EB Off-Ramp / S	002100	103000	100011	000001
91	Tustin Ave and Fairhaven Ave	202100	202100	101100	101010
92	Tustin Ave and Santa Clara Ave	102100	202100	101100	101100
93	Tustin Ave and 17th St	202010	202100	203010	203010
94	Tustin Ave and 4th St	102100	202010	102110	102100
95	SR-55 SB Ramps / Auto Mall Dr and E	110020	101010	103010	202100
96	SR-55 NB Ramps / Del Amo Ave and Ne	202100	103010	201100	101100
97	Red Hill Ave and Edinger Ave	203010	203010	203010	203010

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Number of approach lanes: (L) (LT) (T) (RT) (R) (LTR)

Node	Intersection	NB	SB	EB	WB
98	Red Hill Ave and Warner Ave	203100	202100	102100	203010
99	Red Hill Ave and Dyer Rd / barranca	204010	204010	203100	204010
100	Red Hill Ave and Alton Pkwy	103010	103010	102010	201010
101	Red Hill Ave and MacArthur Blvd	202100	203010	203010	103010
102	Red Hill Ave and Main St	202010	202010	202100	202100
103	I-5 SB Ramps and Santa Ana Blvd	000000	200010	203000	002100
104	Tustin Ranch Rd and Warner Ave	000000	200010	203000	003010
105	Von Karman Ave and Barranca Pkwy	201100	202020	203010	204010
106	Red Hill Avenue and El Camino Real	203010	102100	101010	100100
107	Red Hill Avenue and I-5 NB Ramps	103000	003010	000000	200010
108	Red Hill Avenue and I-5 SB Ramps	004010	103000	010010	000000
109	Red Hill Avenue and Nisson Road	103100	102100	100100	100100
110	Red Hill Avenue and Walnut Avenue	102100	102100	101100	201100
111	Red Hill Avenue and Valencia Avenue	103100	102100	101010	201010
112	Tustin Ranch Road and Warner Avenue	003010	203000	000000	300020
113	Tustin Ranch Road and Walnut Avenue	203010	203010	201100	202010
114	SR-55 SB Ramps and Irvine Boulevard	000000	100011	002100	103000
115	SR-55 NB Ramps and Irvine Boulevard	100011	000000	103000	002100

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

APPENDIX A.3

LANE GEOMETRIES – 2045 WP

Santa Ana Circulation Element

Scenario Report

Scenario:	2045 WP AM Peak Hour
Command:	Default Command
Volume:	2045 AM
Geometry:	SACE
Impact Fee:	Default Impact Fee
Trip Generation:	Default Trip Generation
Trip Distribution:	Default Trip Distribution
Paths:	Default Path
Routes:	Default Route
Configuration:	Default Configuration

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

2045 WP AM Peak Hour Mon Oct 26, 2020 11:49:33 Page 2-1

Santa Ana Circulation Element

Lane Geometry Report

Number of approach lanes: (L) (LT) (T) (RT) (R) (LTR)

Node	Intersection	NB	SB	EB	WB
1	Euclid St and 1st St	102100	102100	102100	102100
2	Euclid St and McFadden Ave	102100	102100	101100	101100
3	Euclid St and Edinger Ave	202100	202100	102010	102010
4	Newhope St and Hazard Ave	101100	101100	100100	100100
5	Newhope St and McFadden Ave	101100	101100	101100	101100
6	Harbor Blvd and SR-22 WB Off-Ramp /	103000	002100	000001	110010
7	Trask Avenue and SR-22 EB On-Ramp	000000	000000	201000	001100
8	Harbor Blvd and Westminster Ave	103010	103010	102100	103010
9	Harbor Blvd and 1st St	103010	103010	202100	202100
10	Harbor Blvd and McFadden Ave	203010	202100	101100	100100
11	Harbor Blvd and Edinger Ave	203010	203010	202100	203010
12	Harbor Blvd and Warner Ave	202100	203010	203010	203010
13	Harbor Blvd and Segerstrom Ave	202100	102100	101100	102010
14	MacArthur Blvd and Hyland Ave	200100	101010	103010	103010
15	MacArthur Blvd and Harbor Blvd	203010	203010	103010	103010
16	Harbor Blvd and Sunflower Ave	203010	203010	101100	110100
17	Harbor Blvd and I-405 NB Off-Ramp	004000	004000	000000	100011
18	Harbor Blvd and I-405 SB Off-Ramp	003010	004000	100011	000000
19	Fairview St and Civic Center Dr	102100	102100	010100	110010
20	Fairview St and 1st St	103010	102100	102100	102100
21	Fairview St and McFadden Ave	103010	103010	100100	100100
22	Fairview St and Edinger Ave	202100	202100	202100	202100
23	Fairview St and Warner Ave	202100	202100	202100	202100
24	Fairview St and MacArthur Blvd	202100	203010	203010	203010
25	Fairview Rd and Sunflower Ave	203010	202100	201100	202010
26	Greenville St and Edinger Ave	100010	000000	002100	103000
27	Greenville St and Segerstrom Ave	100100	100100	102100	102100
28	Raitt St and McFadden Ave	100100	100100	100100	100100
29	Raitt St and Edinger Ave	100100	100100	102100	102100
30	Bear St and MacArthur Blvd	102010	102010	102100	102100
31	Bristol St and 17th St	203010	203010	202100	203010
32	Bristol St and Civic Center Dr	102100	102100	100100	101100
33	Bristol St and Santa Ana Blvd	102100	102100	100100	100100
34	Bristol St and 1st St	203010	203010	102100	101100
35	Bristol St and McFadden Ave	103010	103010	100100	100100
36	Bristol St and Warner Ave	202100	202100	103010	103010
37	Bristol St and Segerstrom Ave	102100	102100	102100	102100
38	Bristol St and Alton Ave	102100	103010	101100	100100
39	Bristol St and MacArthur Blvd	203010	202100	203010	203010
40	Bristol St and Sunflower Ave	202110	203010	202110	203010
41	Bristol St and I-405 NB Ramps	004010	004100	000020	111020
42	Bristol St and I-405 SB Ramps	104000	002110	300010	000000
43	Flower St and Santa Ana Blvd	102010	102010	102010	102010
44	Flower St and 1st St	101010	101100	101100	101100
45	Flower St and McFadden Ave	100100	100100	100100	100100
46	Flower St and Segerstrom Ave	101100	101100	102100	102100
47	Flower St and MacArthur Blvd	101100	101100	102100	102100

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Number of approach lanes: (L) (LT) (T) (RT) (R) (LTR)

Node	Intersection	NB	SB	EB	WB
48	Main St and La Veta Ave	203010	202100	202100	202010
49	Main St and Mainplace Dr / Memory L	202100	202100	202100	202010
50	Main St and 17th St	202010	202010	202100	202100
51	Main St and Civic Center Dr	101100	101100	101100	101100
52	Main St and Santa Ana Blvd	102000	001100	000000	010100
53	Main St and 4th St	001100	001100	001100	001100
54	Main St and 1st St	101100	102010	101100	101100
55	Main St and McFadden Ave	101100	101100	100100	100100
56	Main St and Edinger Ave	101100	101100	102100	102100
57	Main St and MacArthur Blvd	203010	203010	203010	203010
58	Penn Wy and 17th St	200020	000000	002100	103000
59	I-5 NB Off Ramps/17th Street	110010	100010	103010	002100
60	Penn Wy and I-5 SB Ramps	002010	202000	000000	100020
61	Santiago St and Civic Center Dr	100100	100100	100100	000001
62	Santiago St and Santa Ana Blvd	101010	101010	100100	102010
63	Standard Ave and 4th St	101010	101010	100100	100100
64	Standard Ave and 1st St	100100	000001	101100	101100
65	Standard Ave and Mcfadden Ave	100100	100100	100100	100100
66	Halladay St and Warner Ave	100010	000000	002100	012000
67	Halladay St and Dyer Rd	100100	100100	102100	102100
68	SR-55 SB Ramps and MacArthur Blvd	000000	200020	002110	003010
69	SR-55 NB Ramps and MacArthur Blvd	200010	000000	002020	003010
70	SR-55 SB Ramps and Dyer Rd	110020	011010	103010	203010
71	Glassell St and La Veta Ave	201010	101100	101010	101100
72	Glassell St and SR-22 WB Ramps	102000	002010	000000	100011
73	Grand Ave / Glassell St and SR-22 E	002010	102000	100011	000000
74	Grand Ave and Fairhaven Ave	102100	102100	101100	100100
75	Grand Ave and Santa Clara Ave	102100	102100	100100	101010
76	Grand Ave and 17th St	102100	102100	202100	202100
77	Grand Ave and I-5 NB Ramps	002010	103000	000000	200010
78	Grand Ave and Santa Ana Blvd	102100	102020	201020	010100
79	Grand Ave and 1st St	202100	203010	202010	202010
80	Grand Ave and Chestnut Ave	102100	102100	100100	100100
81	Grand Ave and McFadden Ave	102100	102100	100100	101100
82	Grand Ave and Edinger Ave	102100	102100	102100	102100
83	Grand Ave and Warner Ave	102100	102100	203010	202100
84	SR-55 NB Ramps and Dyer Rd	100011	000000	003010	002100
85	Cambridge St and La Veta Ave	101000	001010	100010	000000
86	Cambridge St and Fairhaven Ave	000000	100010	101000	000100
87	Mabury St and 1st Street	100010	100011	001100	101100
88	Tustin St and La Veta Ave	102100	102100	101100	110010
89	Tustin St and SR-22 WB On-Ramp	202000	002100	000000	000000
90	Tustin St and SR-22 EB Off-Ramp / S	002100	103000	100011	000001
91	Tustin Ave and Fairhaven Ave	202100	202100	100100	100100
92	Tustin Ave and Santa Clara Ave	102100	202100	100100	100100
93	Tustin Ave and 17th St	202010	202100	203010	203010
94	Tustin Ave and 4th St	102100	202010	102110	102100
95	SR-55 SB Ramps / Auto Mall Dr and E	110020	101010	103010	202100
96	SR-55 NB Ramps / Del Amo Ave and Ne	202100	103010	201100	101100
97	Red Hill Ave and Edinger Ave	203010	203010	203010	203010

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Number of approach lanes: (L) (LT) (T) (RT) (R) (LTR)

Node	Intersection	NB	SB	EB	WB
98	Red Hill Ave and Warner Ave	203100	202100	102100	203010
99	Red Hill Ave and Dyer Rd / barranca	204010	204010	203100	204010
100	Red Hill Ave and Alton Pkwy	103010	103010	102010	201010
101	Red Hill Ave and MacArthur Blvd	202100	203010	203010	103010
102	Red Hill Ave and Main St	202010	202010	202100	202100
103	I-5 SB Ramps and Santa Ana Blvd	000000	200010	203000	002100
104	Tustin Ranch Rd and Warner Ave	000000	200010	203000	003010
105	Von Karman Ave and Barranca Pkwy	201100	202020	203010	204010
106	Red Hill Avenue and El Camino Real	203010	102100	101010	100100
107	Red Hill Avenue and I-5 NB Ramps	103000	003010	000000	200010
108	Red Hill Avenue and I-5 SB Ramps	004010	103000	010010	000000
109	Red Hill Avenue and Nisson Road	103100	102100	100100	100100
110	Red Hill Avenue and Walnut Avenue	102100	102100	101100	201100
111	Red Hill Avenue and Valencia Avenue	103100	102100	101010	201010
112	Tustin Ranch Road and Warner Avenue	003010	203000	000000	300020
113	Tustin Ranch Road and Walnut Avenue	203010	203010	201100	202010
114	SR-55 SB Ramps and Irvine Boulevard	000000	100011	002100	103000
115	SR-55 NB Ramps and Irvine Boulevard	100011	000000	103000	002100

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


APPENDIX B
INTERSECTION VOLUMES

APPENDIX B.1


INTERSECTION VOLUMES –
2020 NP (AM PEAK HOUR)

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP AM Peak Hour


Intersection #1: Euclid St and 1st St

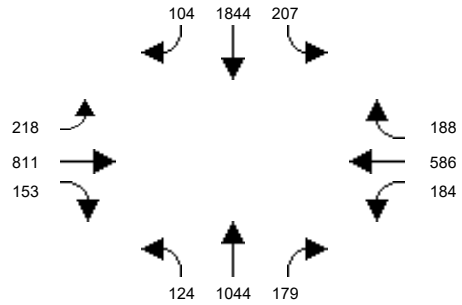


Intersection #2: Euclid St and McFadden Ave

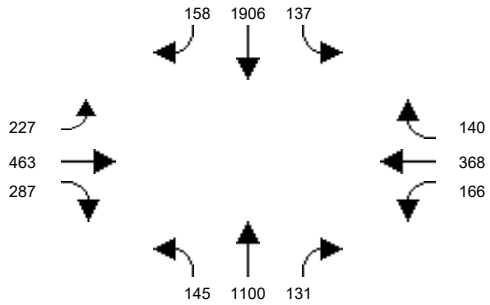


Intersection #3: Euclid St and Edinger Ave

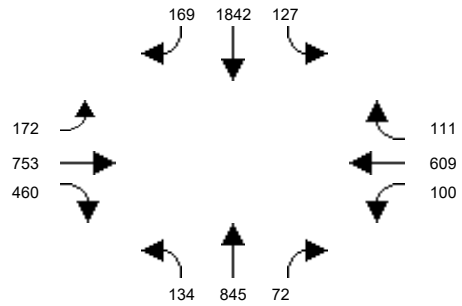


Intersection #4: Newhope St and Hazard Ave

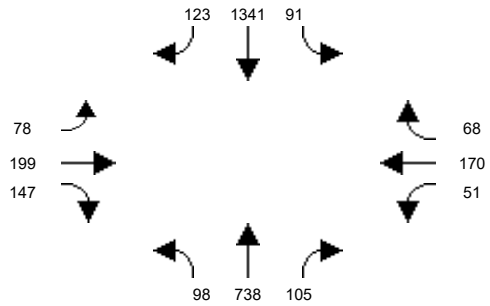


Intersection #5: Newhope St and McFadden Ave

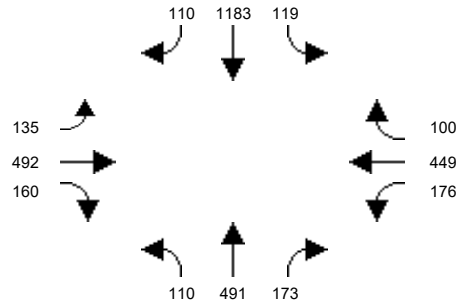


Intersection #6: Harbor Blvd and SR-22 WB Off-Ramp / Banner Dr

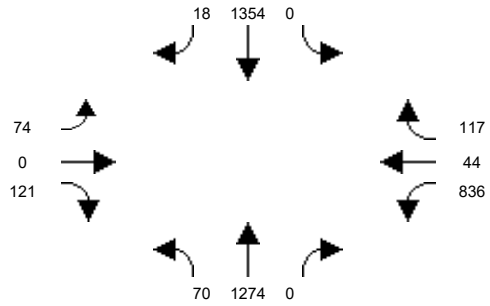


Intersection #7: Trask Avenue and SR-22 EB On-Ramp

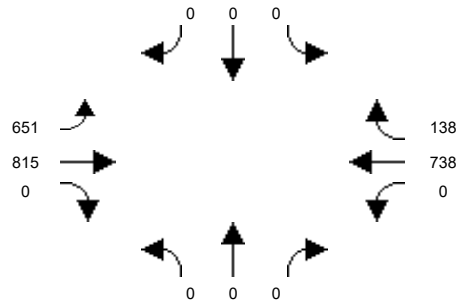


Intersection #8: Harbor Blvd and Westminster Ave

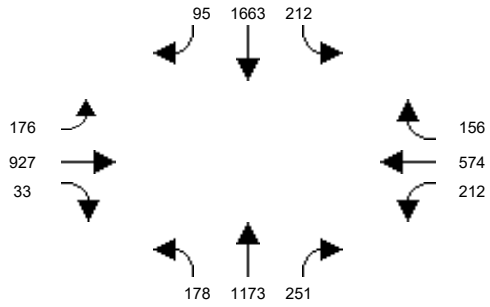

Intersection #9: Harbor Blvd and 1st St

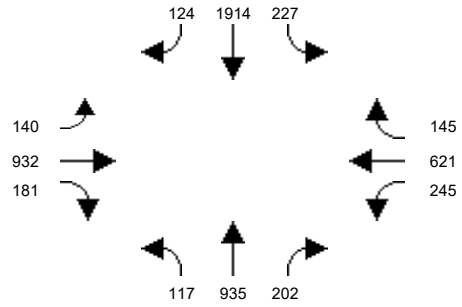

Intersection #10: Harbor Blvd and McFadden Ave

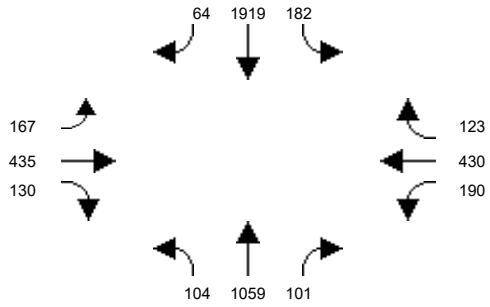


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP AM Peak Hour


Intersection #11: Harbor Blvd and Edinger Ave

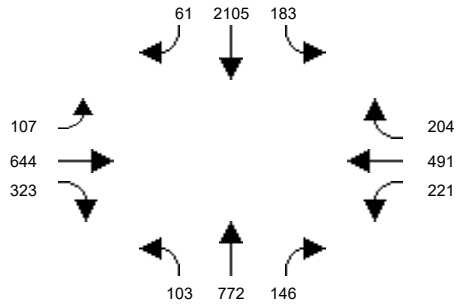


Intersection #12: Harbor Blvd and Warner Ave

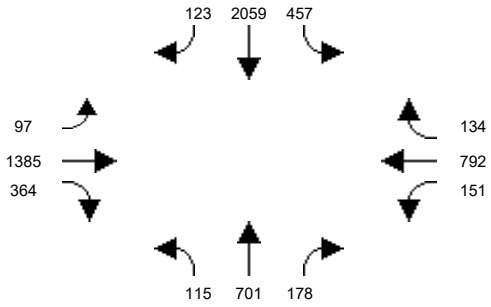


Intersection #13: Harbor Blvd and Segerstrom Ave

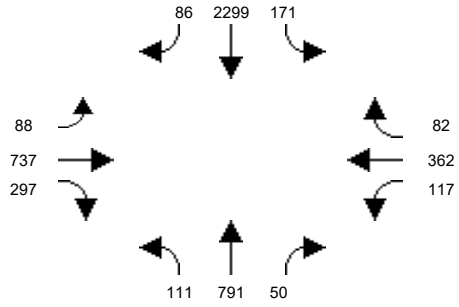


Intersection #14: MacArthur Blvd and Hyland Ave

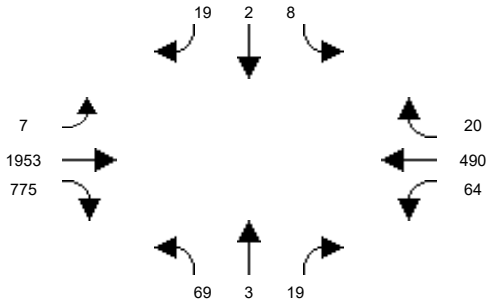


Intersection #15: MacArthur Blvd and Harbor Blvd

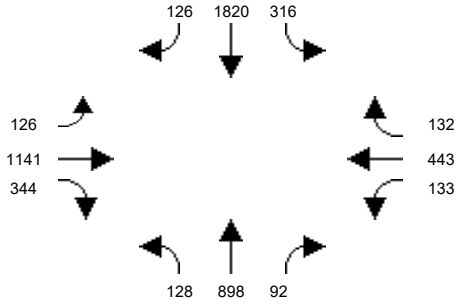


Intersection #16: Harbor Blvd and Sunflower Ave

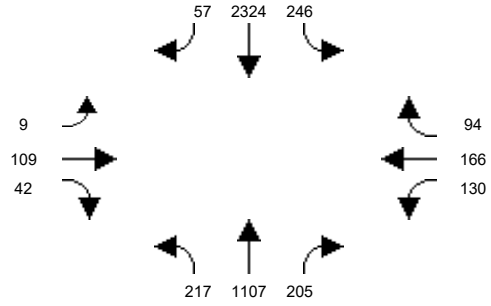


Intersection #17: Harbor Blvd and I-405 WB Off-Ramp

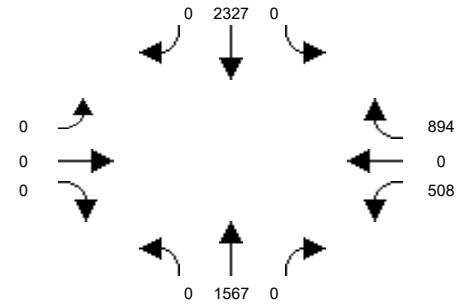


Intersection #18: Harbor Blvd and I-405 EB Off-Ramp

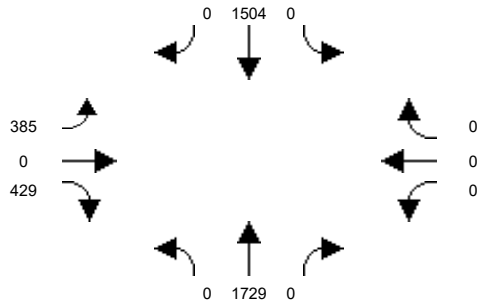

Intersection #19: Fairview St and Civic Center Dr

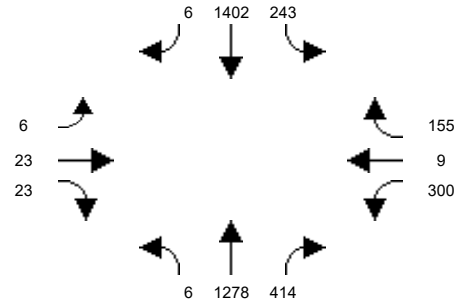

Intersection #20: Fairview St and 1st St

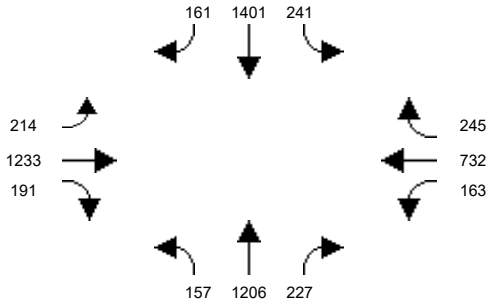


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP AM Peak Hour


Intersection #21: Fairview St and McFadden Ave

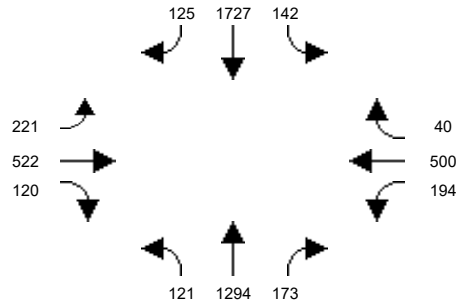


Intersection #22: Fairview St and Edinger Ave

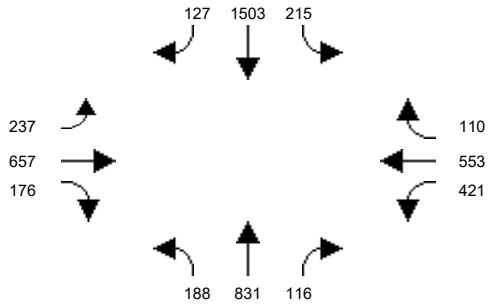


Intersection #23: Fairview St and Warner Ave

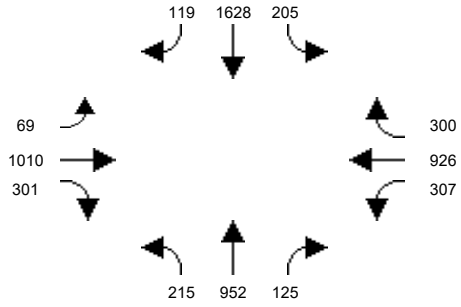


Intersection #24: Fairview St and MacArthur Blvd

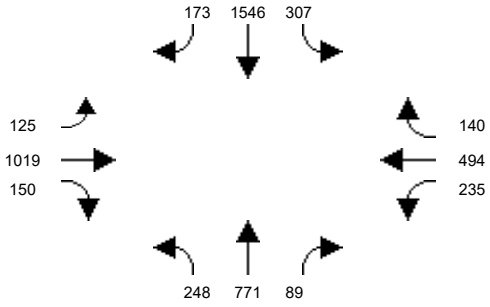


Intersection #25: Fairview Rd and Sunflower Ave

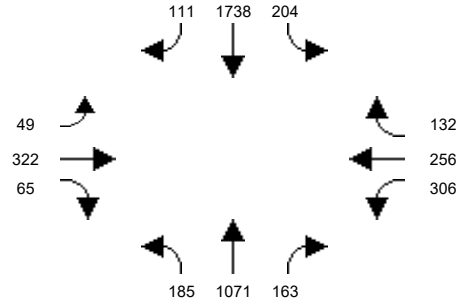


Intersection #26: Greenville St and Edinger Ave

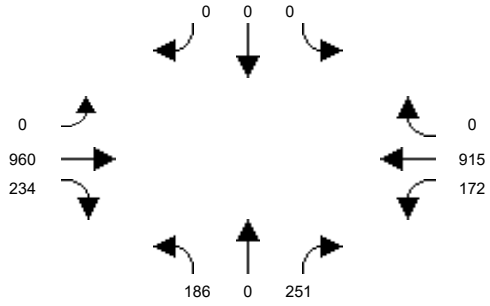


Intersection #27: Greenville St and Segerstrom Ave

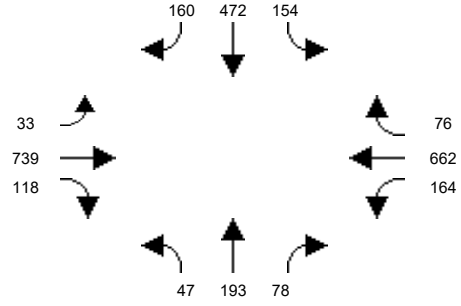


Intersection #28: Raitt St and McFadden Ave

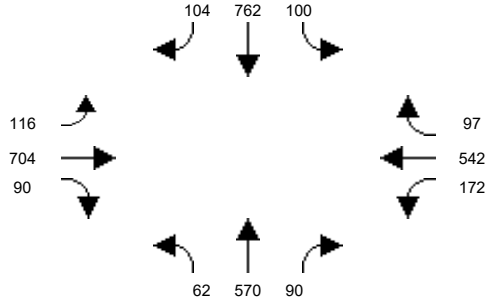

Intersection #29: Raitt St and Edinger Ave

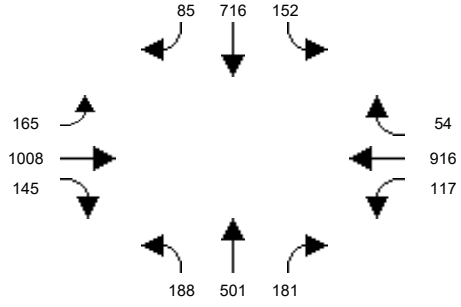

Intersection #30: Bear St and MacArthur Blvd

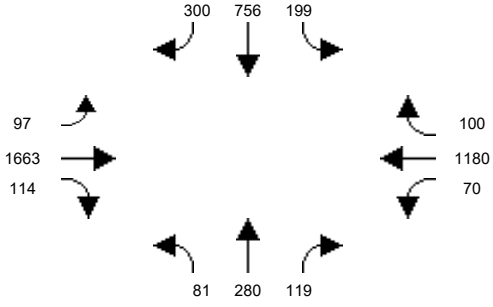


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP AM Peak Hour


Intersection #31: Bristol St and 17th St

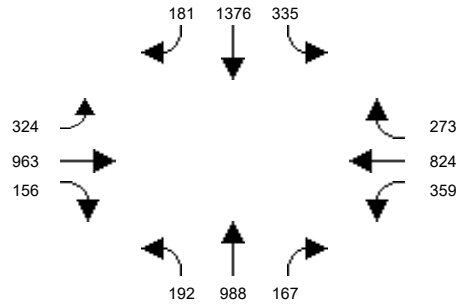


Intersection #32: Bristol St and Civic Center Dr

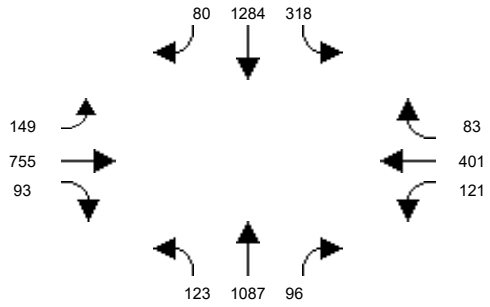


Intersection #33: Bristol St and Santa Ana Blvd

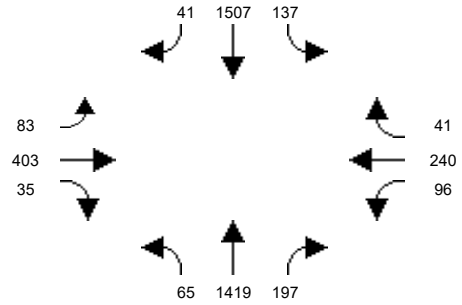


Intersection #34: Bristol St and 1st St

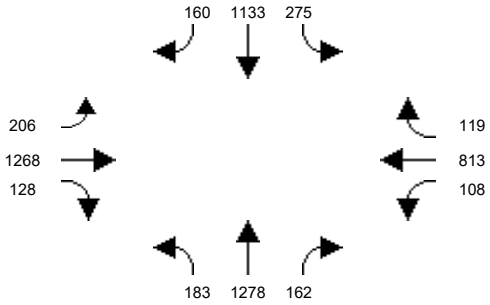


Intersection #35: Bristol St and McFadden Ave

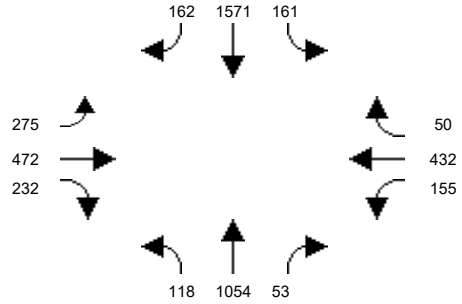


Intersection #36: Bristol St and Warner Ave

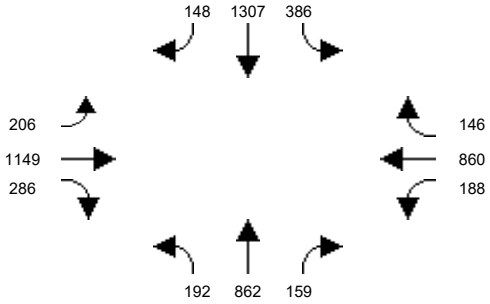


Intersection #37: Bristol St and Segerstrom Ave

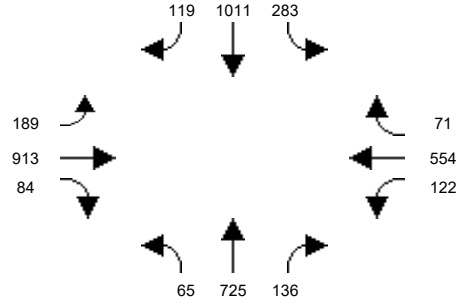


Intersection #38: Bristol St and Alton Ave

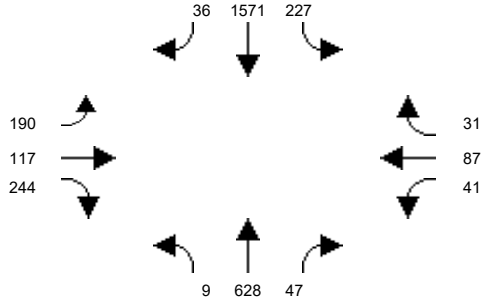

Intersection #39: Bristol St and MacArthur Blvd

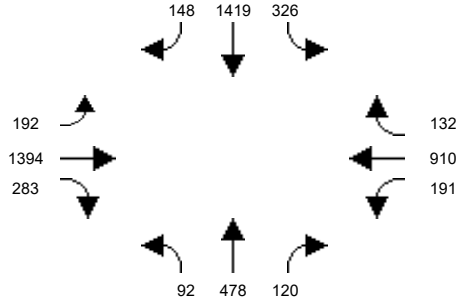

Intersection #40: Bristol St and Sunflower Ave

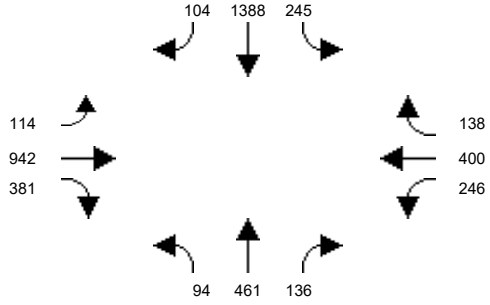


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP AM Peak Hour


Intersection #41: Bristol St and I-405 WB Ramps

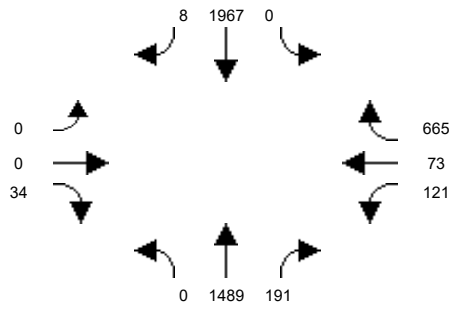


Intersection #42: Bristol St and I-405 EB Ramps

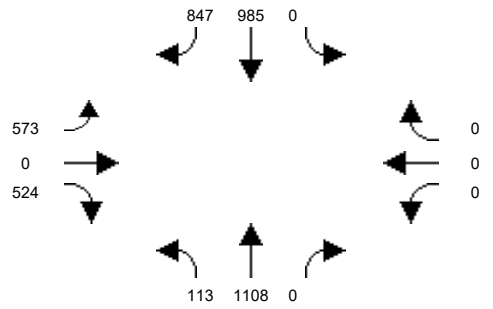


Intersection #43: Flower St and Santa Ana Blvd

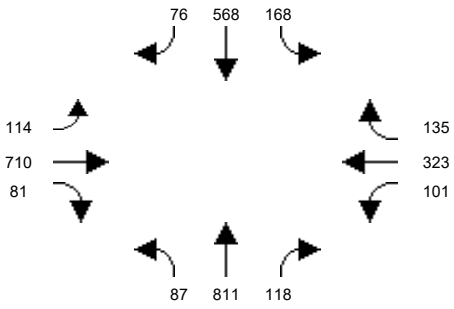


Intersection #44: Flower St and 1st St

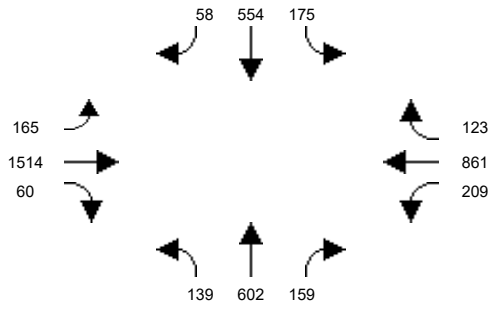


Intersection #45: Flower St and McFadden Ave

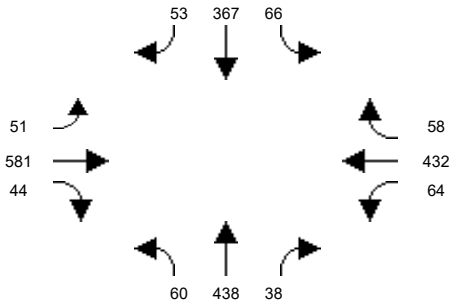


Intersection #46: Flower St and Segerstrom Ave

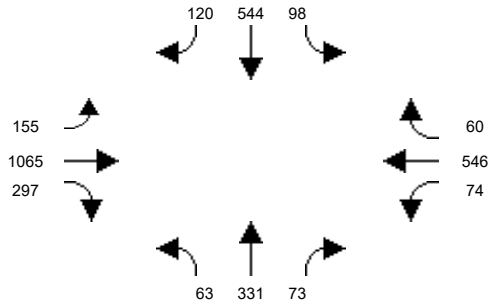


Intersection #47: Flower St and MacArthur Blvd

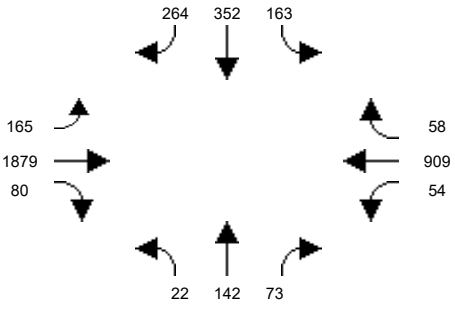


Intersection #48: Main St and La Veta Ave

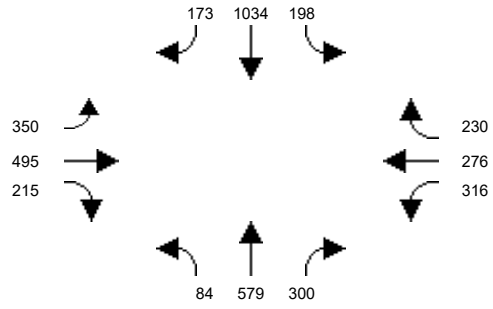

Intersection #49: Main St and Mainplace Dr / Memory Ln

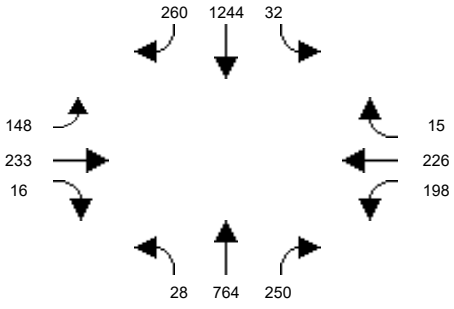

Intersection #50: Main St and 17th St

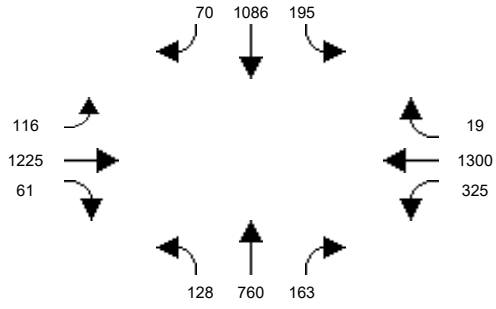


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP AM Peak Hour


Intersection #51: Main St and Civic Center Dr

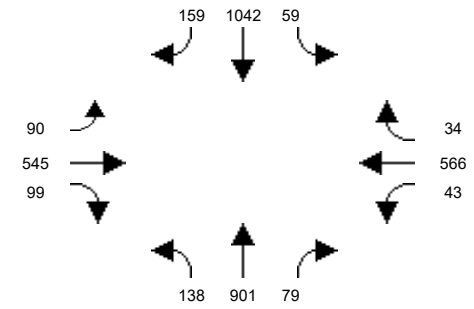


Intersection #52: Main St and Santa Ana Blvd

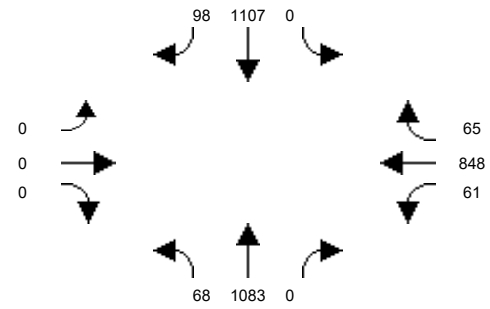


Intersection #53: Main St and 4th St

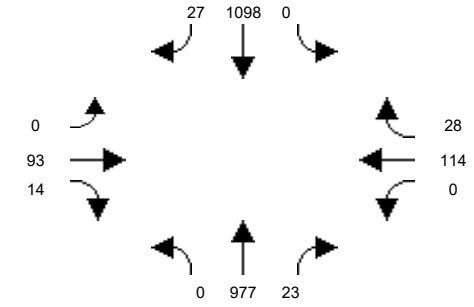


Intersection #54: Main St and 1st St

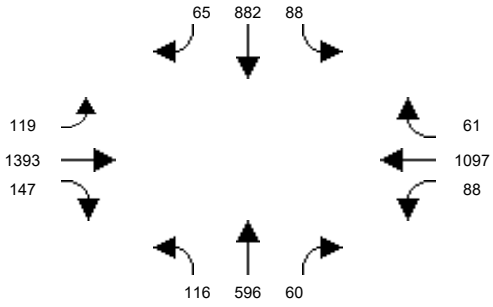


Intersection #55: Main St and McFadden Ave

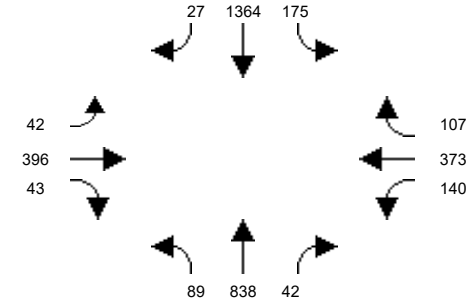


Intersection #56: Main St and Edinger Ave

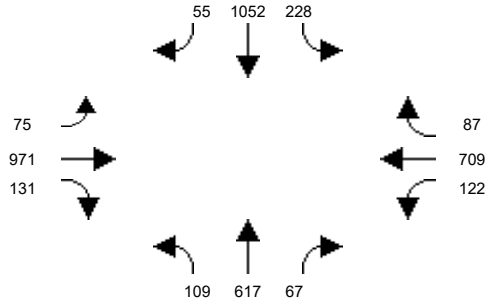


Intersection #57: Main St and MacArthur Blvd

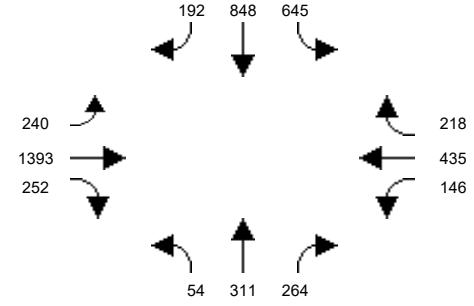


Intersection #58: Penn Wy and 17th St

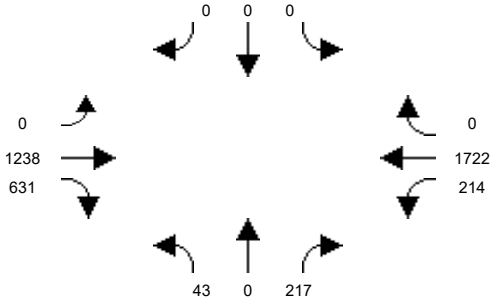

Intersection #59: I-5 NB Off Ramps/17th Street

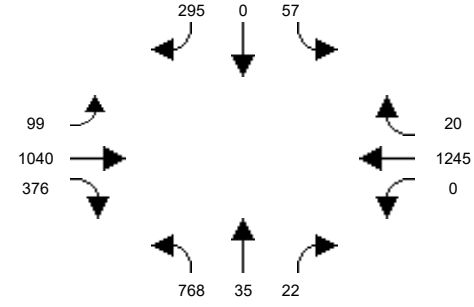

Intersection #60: Penn Wy and I-5 SB Ramps

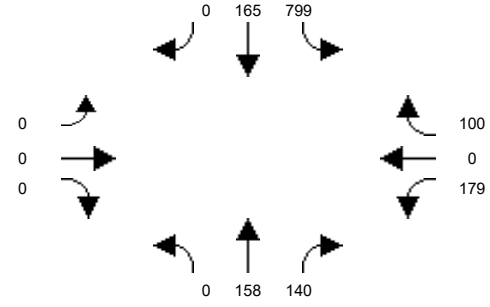


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP AM Peak Hour


Intersection #61: Santiago St and Civic Center Dr

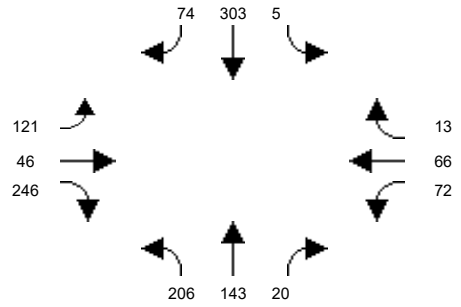


Intersection #62: Santiago St and Santa Ana Blvd

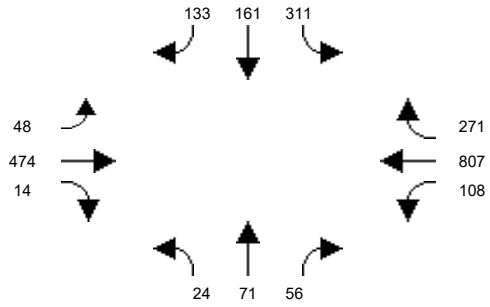


Intersection #64: Standard Ave and 1st St

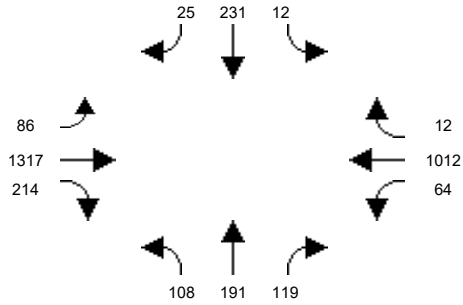


Intersection #65: Standard Ave and Mcfadden Ave

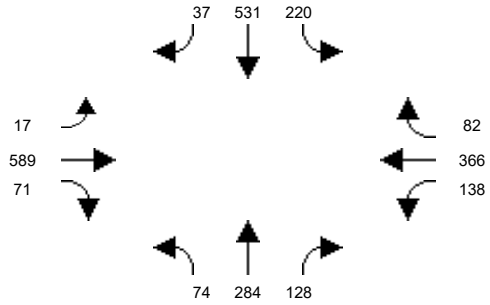


Intersection #66: Halladay St and Warner Ave

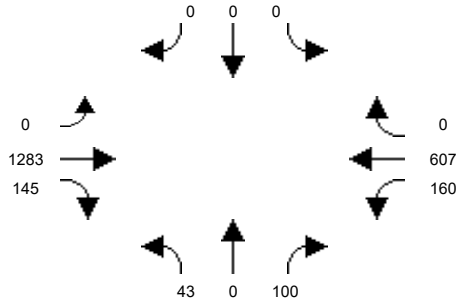


Intersection #67: Halladay St and Dyer Rd

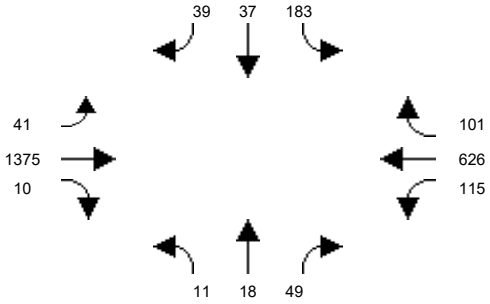


Intersection #68: SR-55 SB Ramps and MacArthur Blvd

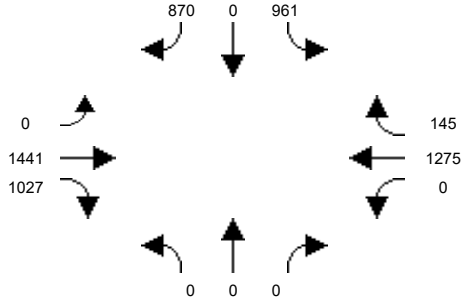


Intersection #69: SR-55 NB Ramps and MacArthur Blvd

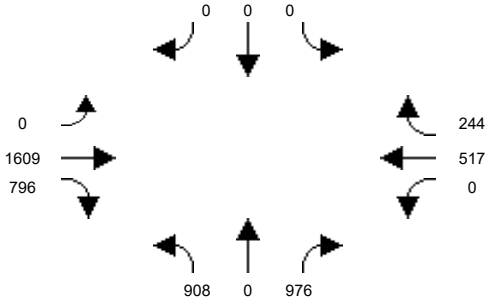

Intersection #70: SR-55 SB Ramps and Dyer Rd

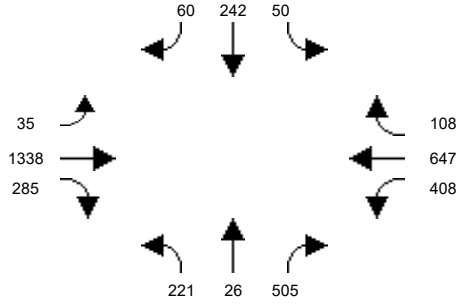

Intersection #71: Glassell St and La Veta Ave

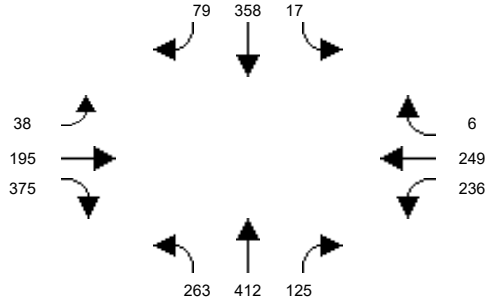


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP AM Peak Hour


Intersection #72: Glassell St and SR-22 WB Ramps

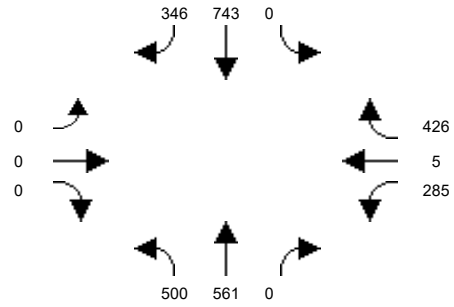


Intersection #73: Grand Ave / Glassell St and SR-22 EB Ramps

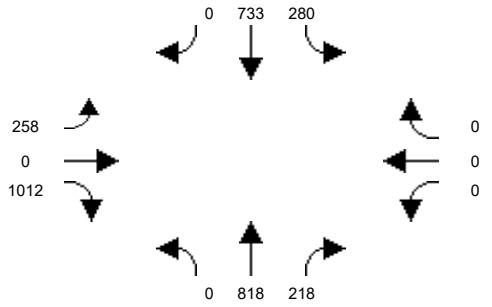


Intersection #74: Grand Ave and Fairhaven Ave

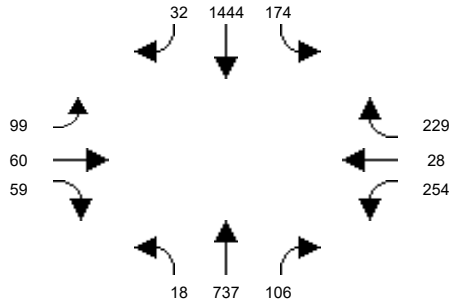


Intersection #75: Grand Ave and Santa Clara Ave

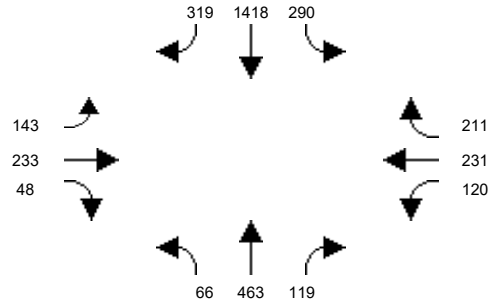


Intersection #76: Grand Ave and 17th St

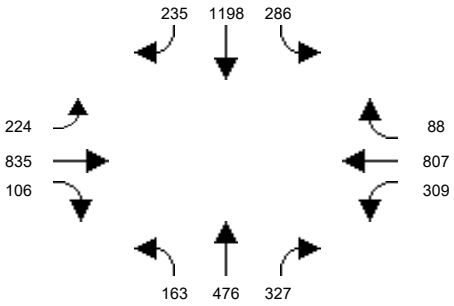


Intersection #77: Grand Ave and I-5 NB Ramps

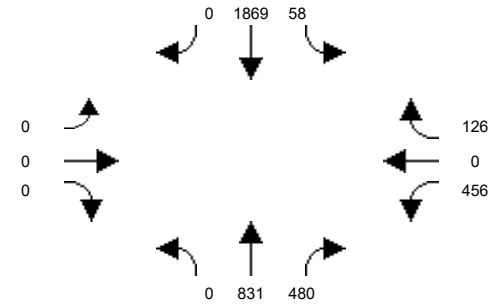


Intersection #78: Grand Ave and Santa Ana Blvd

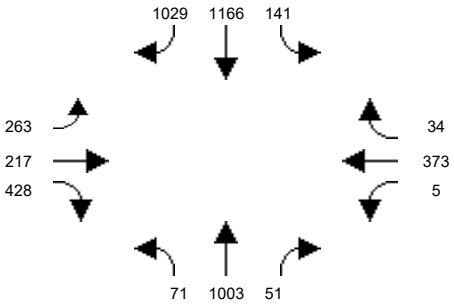


Intersection #79: Grand Ave and 1st St

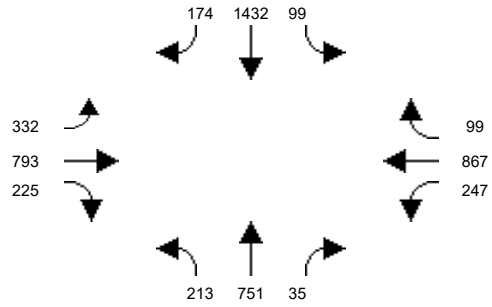

Intersection #80: Grand Ave and Chestnut Ave

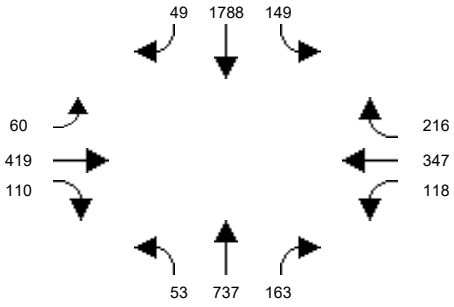

Intersection #81: Grand Ave and McFadden Ave

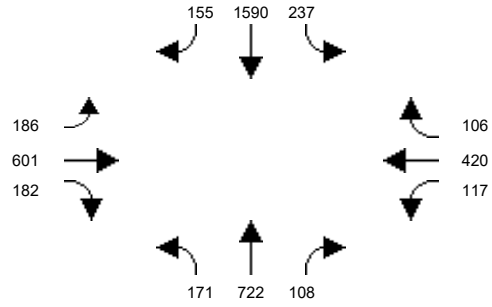


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP AM Peak Hour


Intersection #82: Grand Ave and Edinger Ave

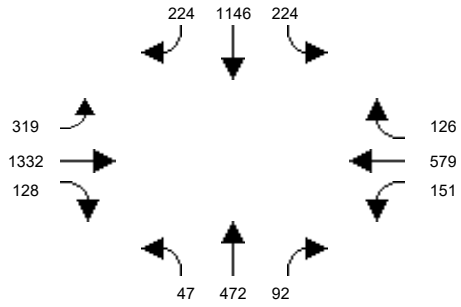


Intersection #83: Grand Ave and Warner Ave

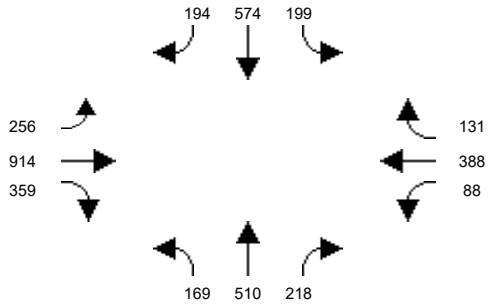


Intersection #84: SR-55 NB Ramps and Dyer Rd

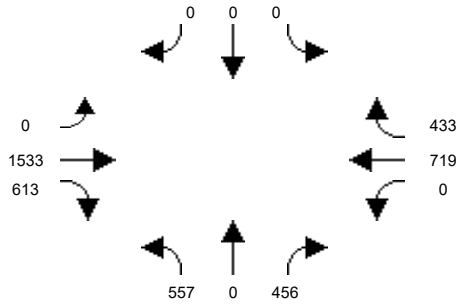


Intersection #85: Cambridge St and La Veta Ave

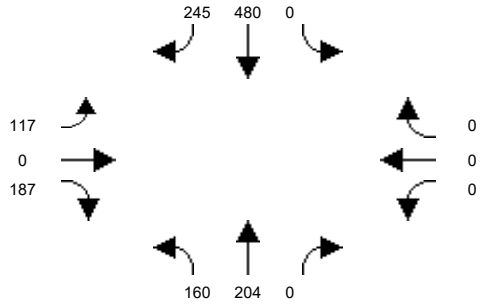


Intersection #86: Cambridge St and Fairhaven Ave

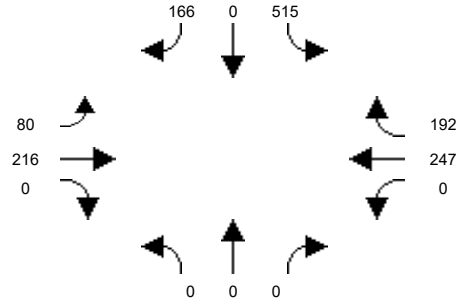


Intersection #87: Mabury St and 1st Street

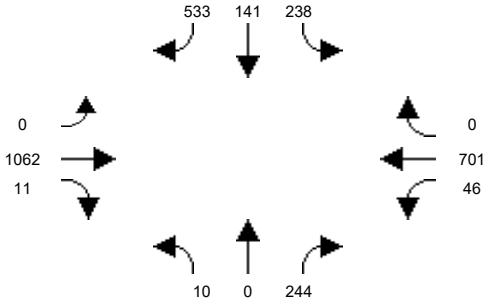


Intersection #88: Tustin St and La Veta Ave

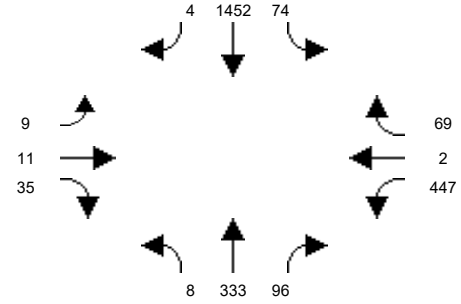


Intersection #89: Tustin St and SR-22 WB On-Ramp

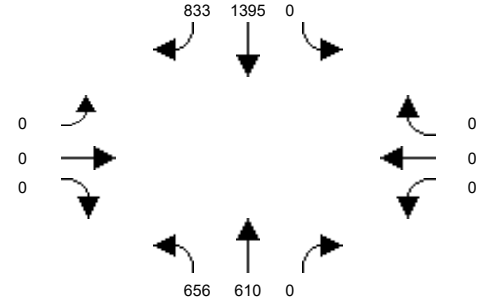

Intersection #90: Tustin St and SR-22 EB Off-Ramp / Seba Ave

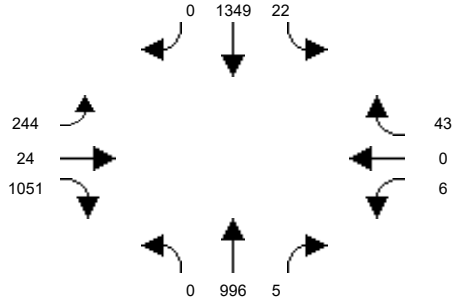

Intersection #91: Tustin Ave and Fairhaven Ave

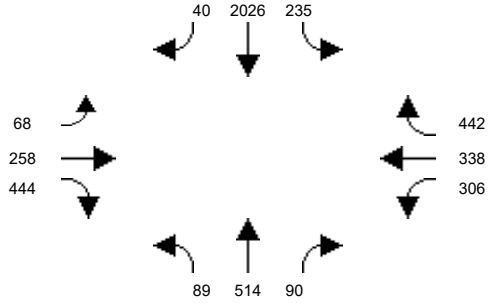


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP AM Peak Hour


Intersection #92: Tustin Ave and Santa Clara Ave

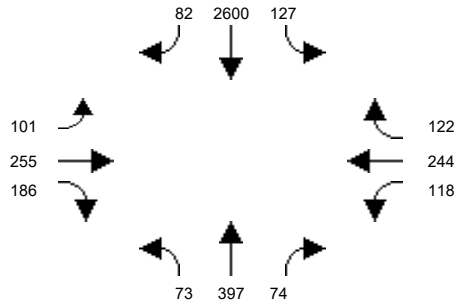


Intersection #93: Tustin Ave and 17th St

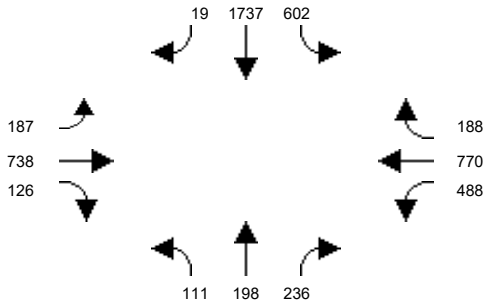


Intersection #94: Tustin Ave and 4th St

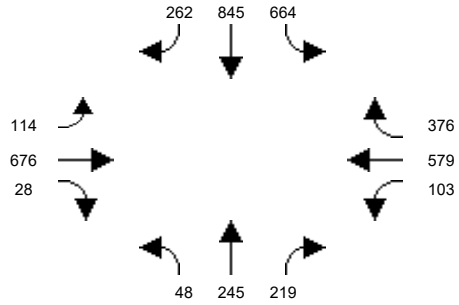


Intersection #95: SR-55 SB Ramps / Auto Mall Dr and Edinger Ave

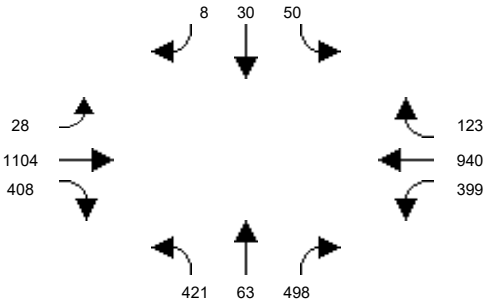


Intersection #96: SR-55 NB Ramps / Del Amo Ave and Newport

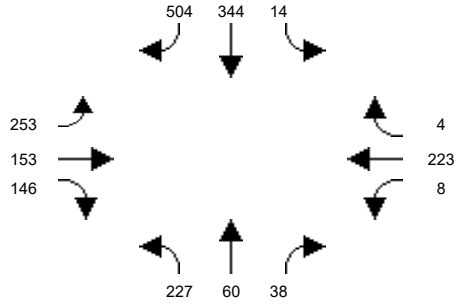


Intersection #97: Red Hill Ave and Edinger Ave

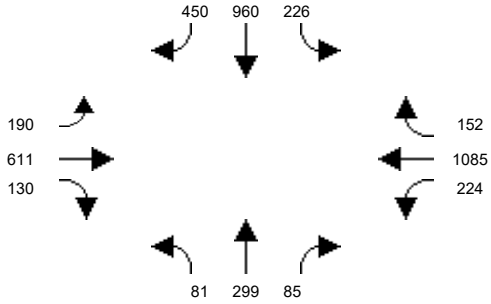


Intersection #98: Red Hill Ave and Warner Ave

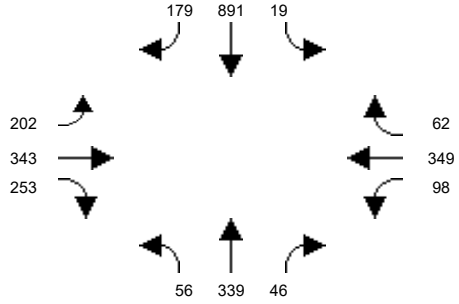


Intersection #99: Red Hill Ave and Dyer Rd / barranca Pkwy

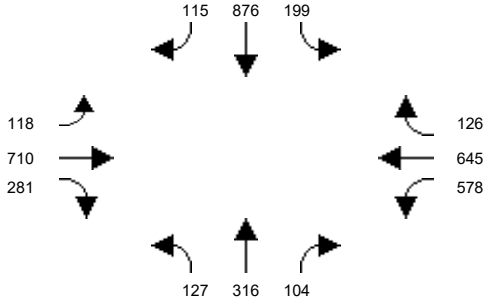

Intersection #100: Red Hill Ave and Alton Pkwy

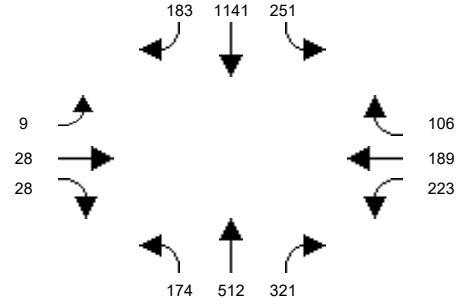

Intersection #101: Red Hill Ave and MacArthur Blvd

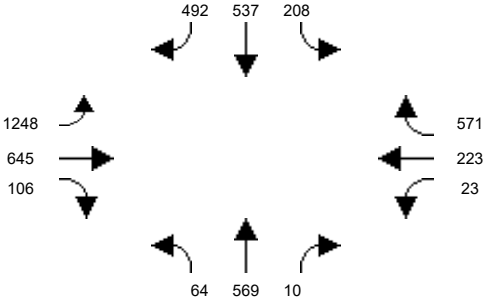


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP AM Peak Hour


Intersection #102: Red Hill Ave and Main St

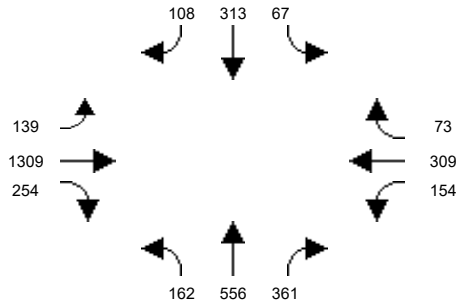


Intersection #103: I-5 SB Ramps and Santa Ana Blvd

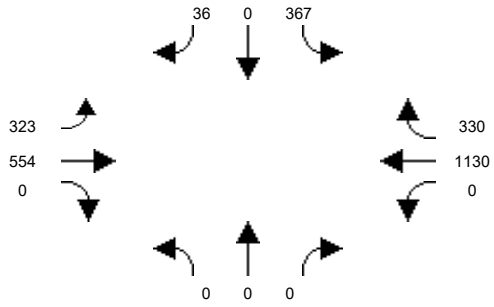


Intersection #104: Tustin Ranch Rd and Warner Ave

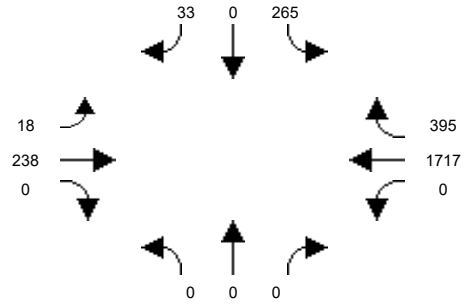


Intersection #105: Von Karman Ave and Barranca Pkwy

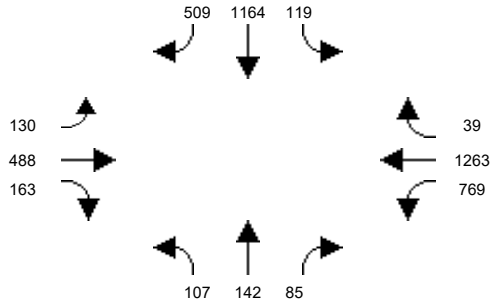


Intersection #106: Red Hill Avenue and El Camino Real

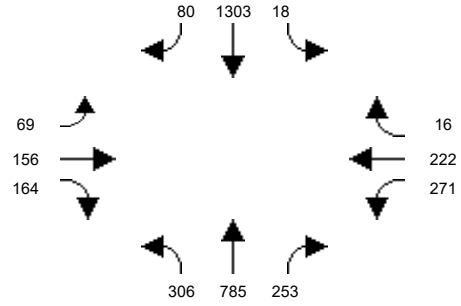


Intersection #107: Red Hill Avenue and I-5 NB Ramps

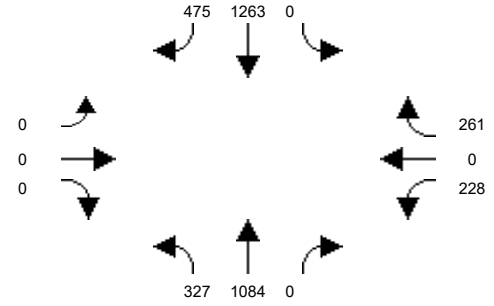


Intersection #108: Red Hill Avenue and I-5 SB Ramps

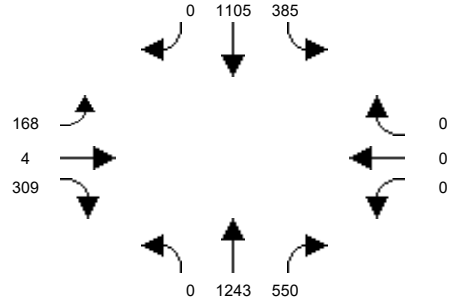


Intersection #109: Red Hill Avenue and Nisson Road

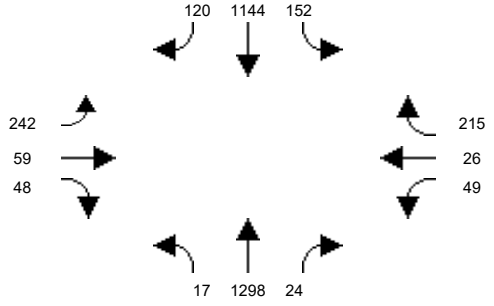

Intersection #110: Red Hill Avenue and Walnut Avenue

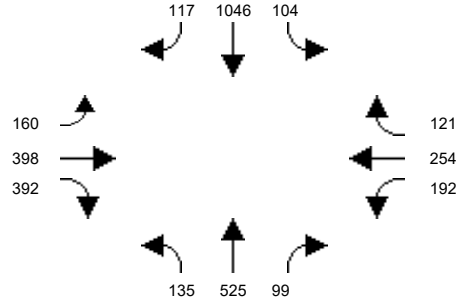

Intersection #111: Red Hill Avenue and Valencia Avenue

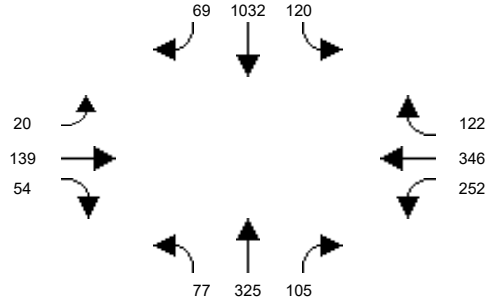


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP AM Peak Hour


Intersection #112: Tustin Ranch Road and Warner Avenue North

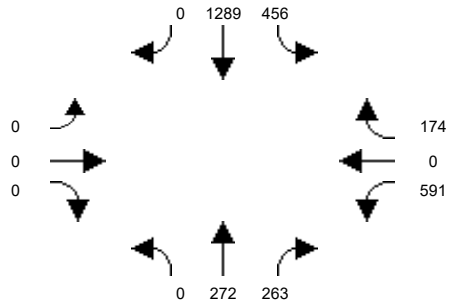


Intersection #113: Tustin Ranch Road and Walnut Avenue

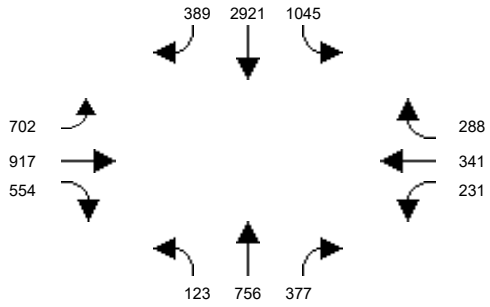

Intersection #114: SR-55 SB Ramps and Irvine Boulevard

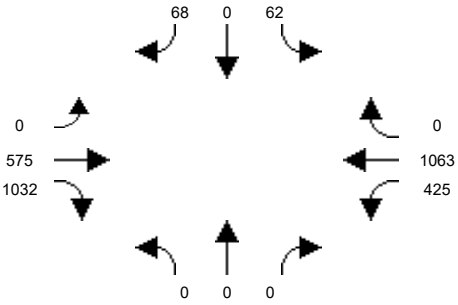

Intersection #115: SR-55 NB Ramps and Irvine Boulevard

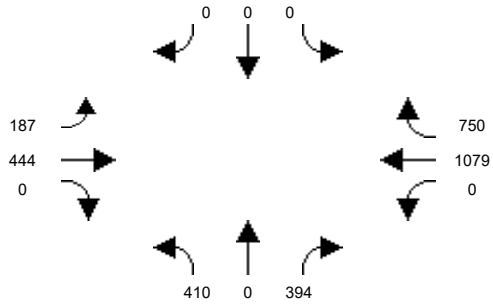

Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

APPENDIX B.2


INTERSECTION VOLUMES –
2020 NP (PM PEAK HOUR)

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP PM Peak Hour


Intersection #1: Euclid St and 1st St

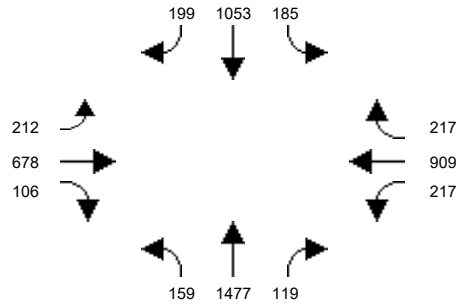


Intersection #2: Euclid St and McFadden Ave

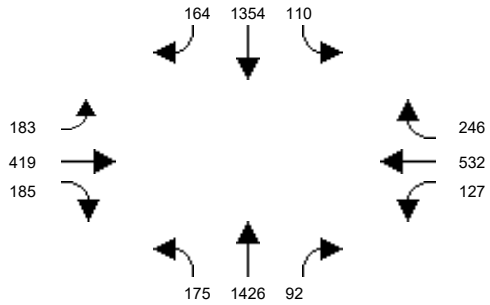


Intersection #3: Euclid St and Edinger Ave

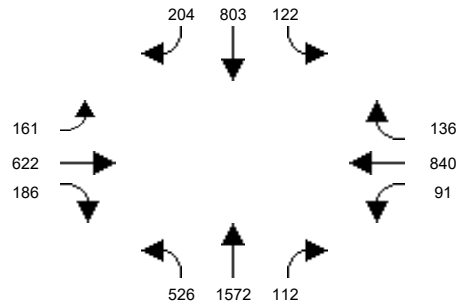


Intersection #4: Newhope St and Hazard Ave

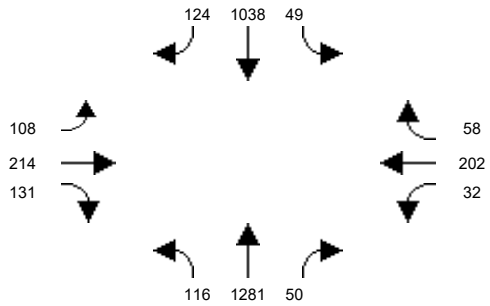


Intersection #5: Newhope St and McFadden Ave

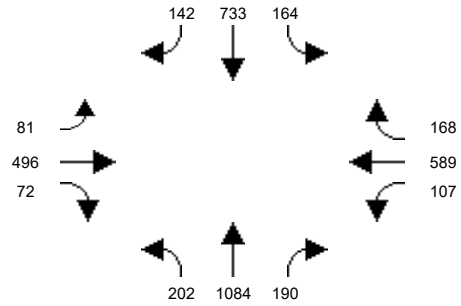


Intersection #6: Harbor Blvd and SR-22 WB Off-Ramp / Banner Dr

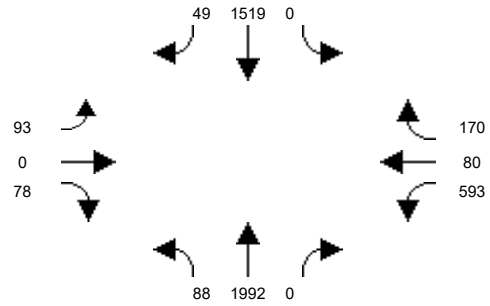


Intersection #7: Trask Avenue and SR-22 EB On-Ramp

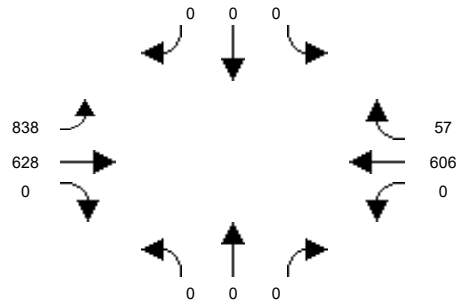


Intersection #8: Harbor Blvd and Westminster Ave

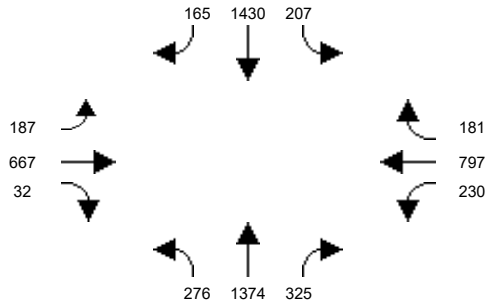

Intersection #9: Harbor Blvd and 1st St

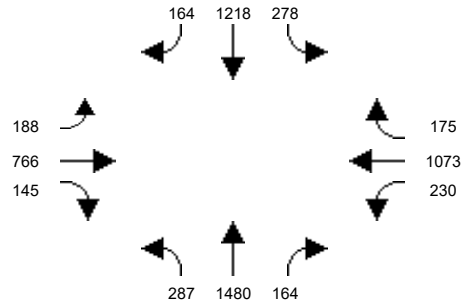

Intersection #10: Harbor Blvd and McFadden Ave

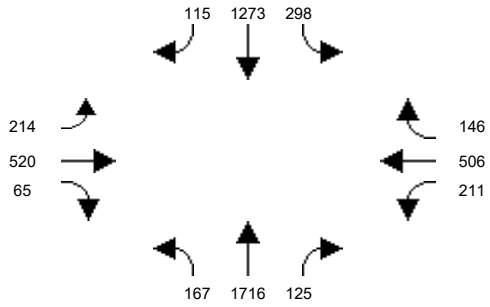


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP PM Peak Hour


Intersection #11: Harbor Blvd and Edinger Ave

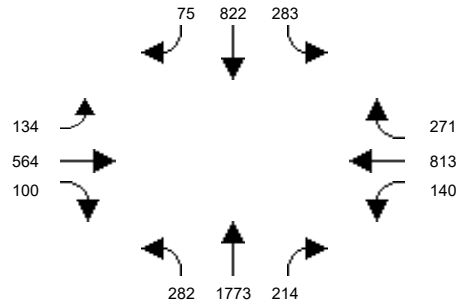


Intersection #12: Harbor Blvd and Warner Ave

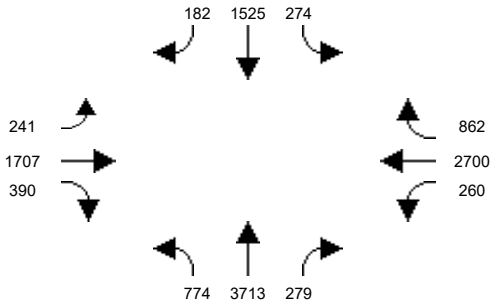


Intersection #13: Harbor Blvd and Segerstrom Ave

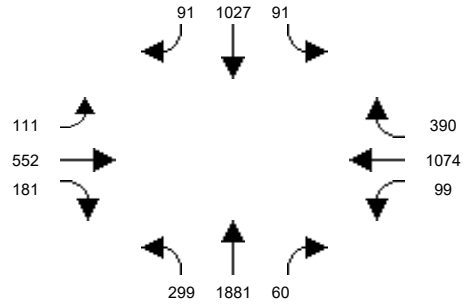


Intersection #14: MacArthur Blvd and Hyland Ave

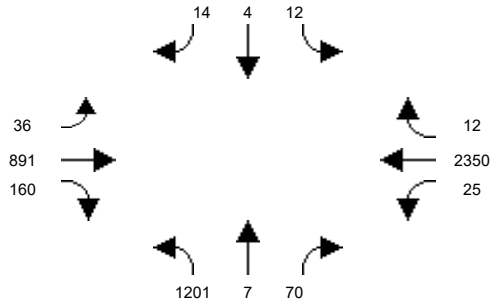


Intersection #15: MacArthur Blvd and Harbor Blvd

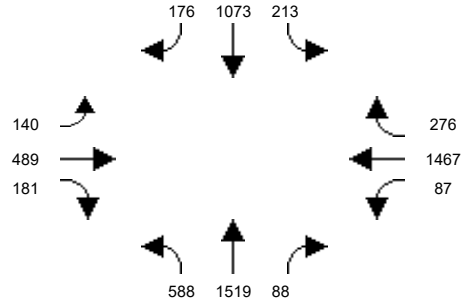


Intersection #16: Harbor Blvd and Sunflower Ave

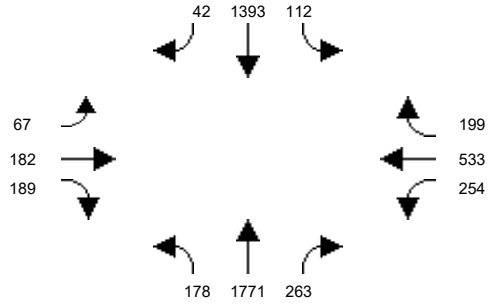


Intersection #17: Harbor Blvd and I-405 WB Off-Ramp

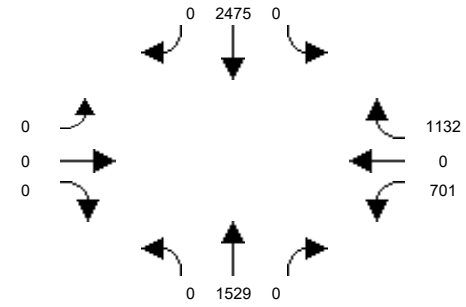


Intersection #18: Harbor Blvd and I-405 EB Off-Ramp

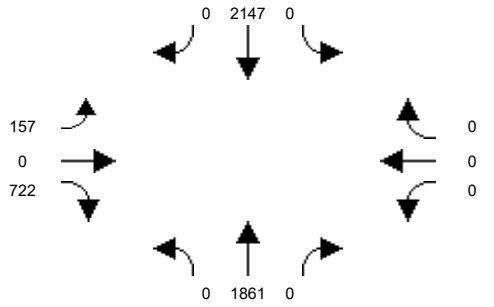

Intersection #19: Fairview St and Civic Center Dr

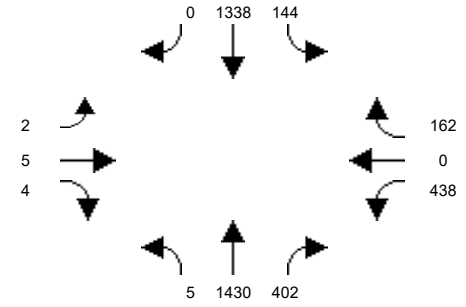

Intersection #20: Fairview St and 1st St

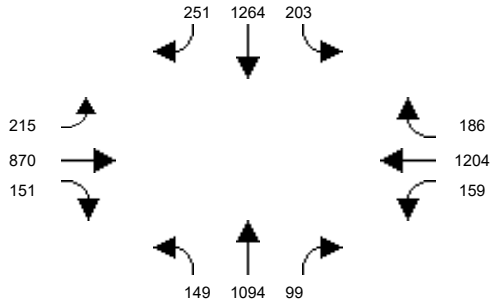


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP PM Peak Hour


Intersection #21: Fairview St and McFadden Ave

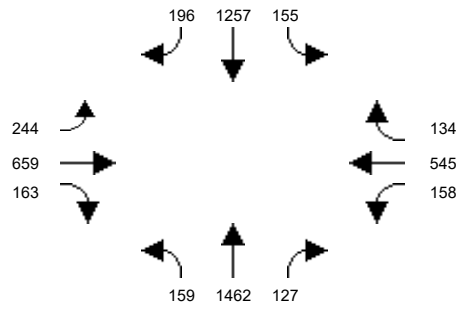


Intersection #22: Fairview St and Edinger Ave

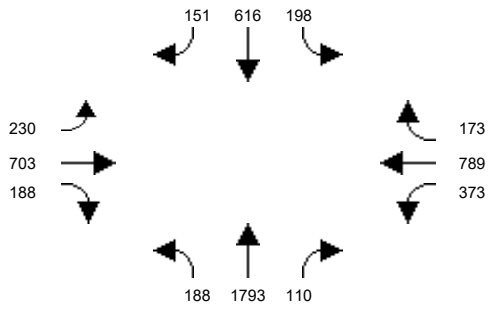


Intersection #23: Fairview St and Warner Ave

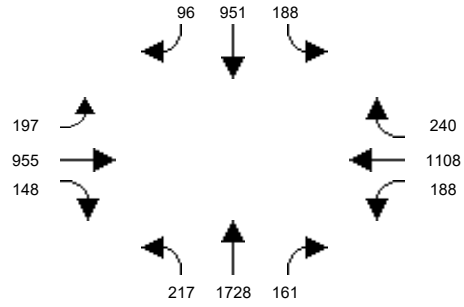


Intersection #24: Fairview St and MacArthur Blvd

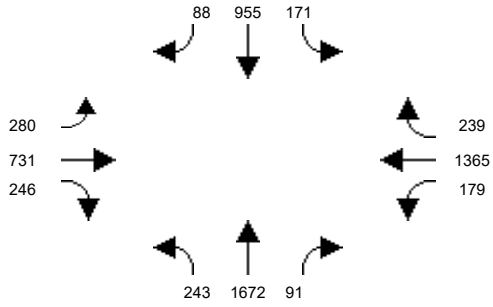


Intersection #25: Fairview Rd and Sunflower Ave

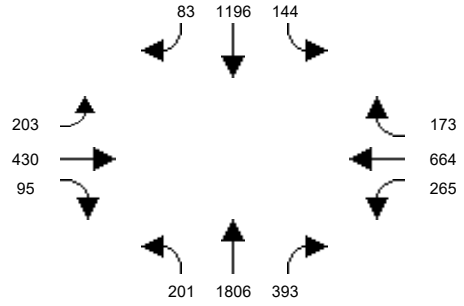


Intersection #26: Greenville St and Edinger Ave

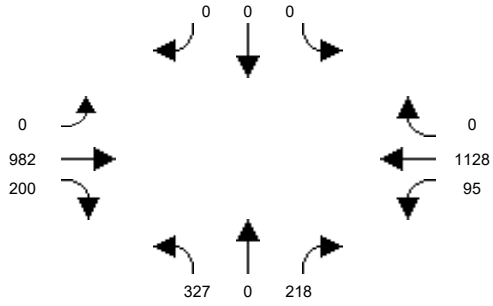


Intersection #27: Greenville St and Segerstrom Ave

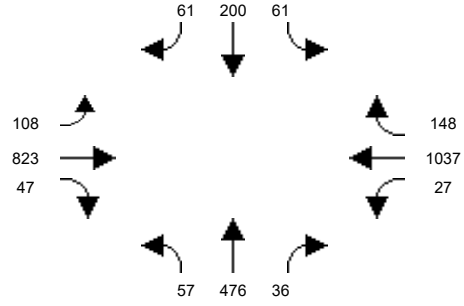


Intersection #28: Raitt St and McFadden Ave

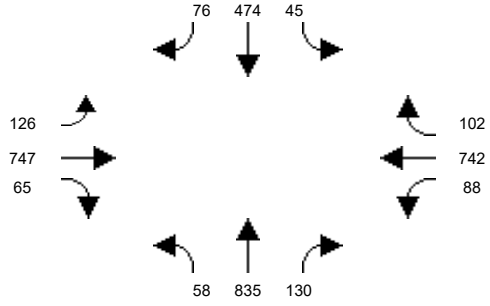

Intersection #29: Raitt St and Edinger Ave

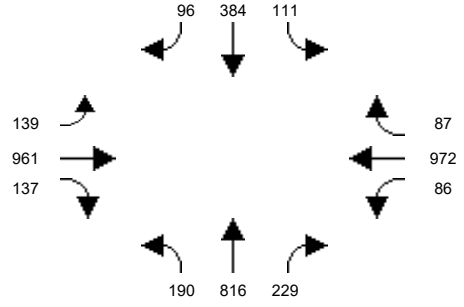

Intersection #30: Bear St and MacArthur Blvd

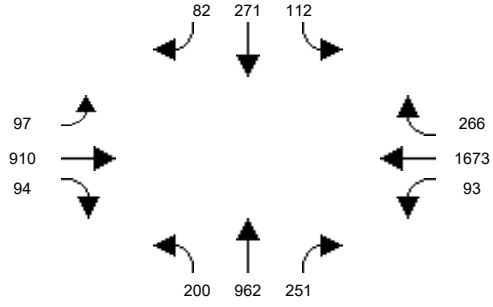


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP PM Peak Hour


Intersection #31: Bristol St and 17th St

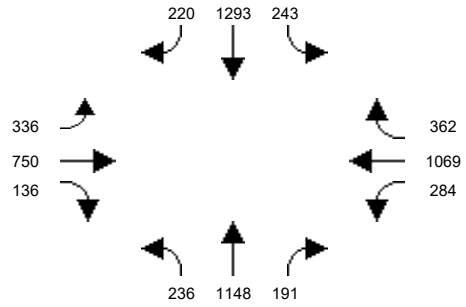


Intersection #32: Bristol St and Civic Center Dr

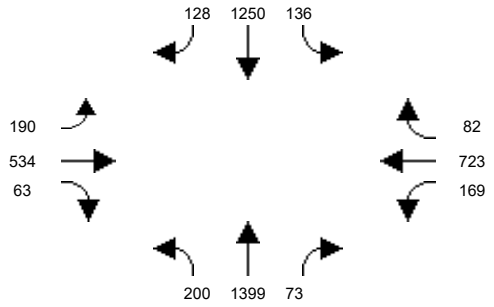


Intersection #33: Bristol St and Santa Ana Blvd

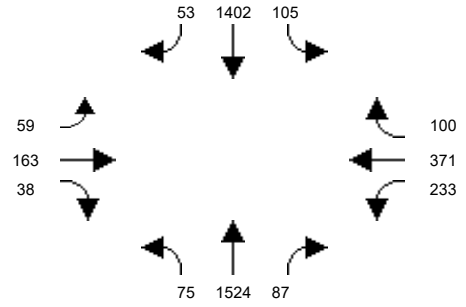


Intersection #34: Bristol St and 1st St

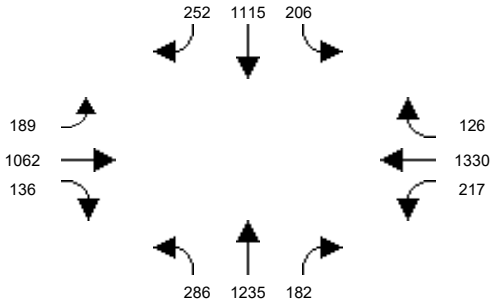


Intersection #35: Bristol St and McFadden Ave

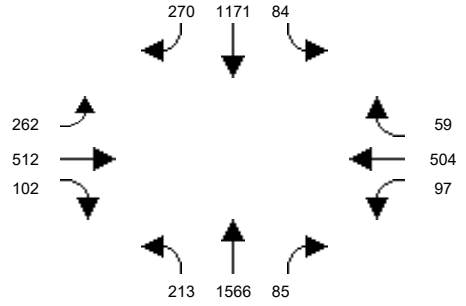


Intersection #36: Bristol St and Warner Ave

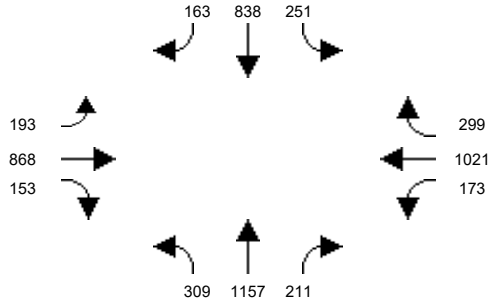


Intersection #37: Bristol St and Segerstrom Ave

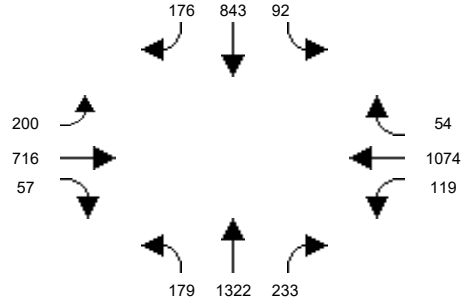


Intersection #38: Bristol St and Alton Ave

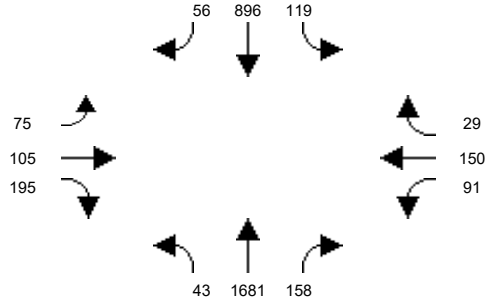

Intersection #39: Bristol St and MacArthur Blvd

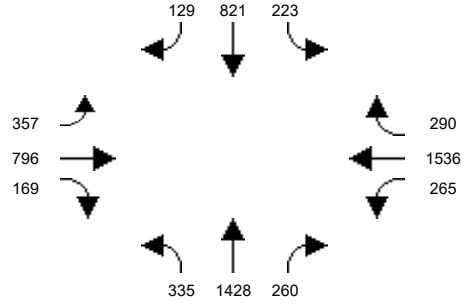

Intersection #40: Bristol St and Sunflower Ave

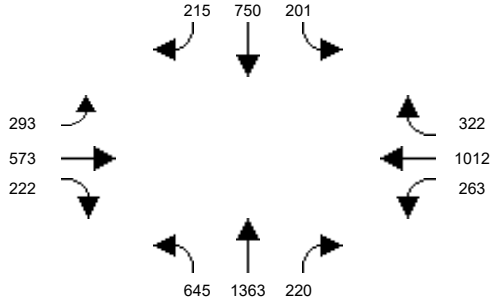


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP PM Peak Hour


Intersection #41: Bristol St and I-405 WB Ramps

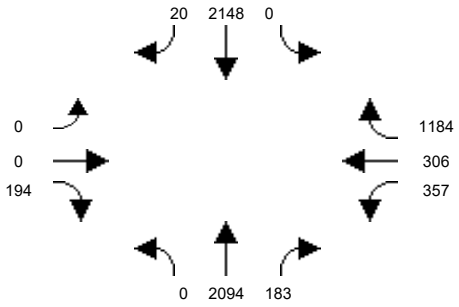


Intersection #42: Bristol St and I-405 EB Ramps

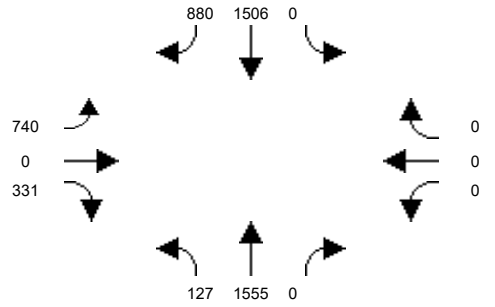


Intersection #43: Flower St and Santa Ana Blvd

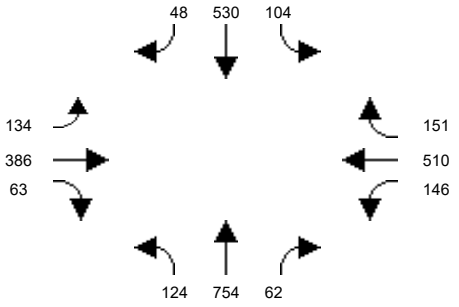


Intersection #44: Flower St and 1st St

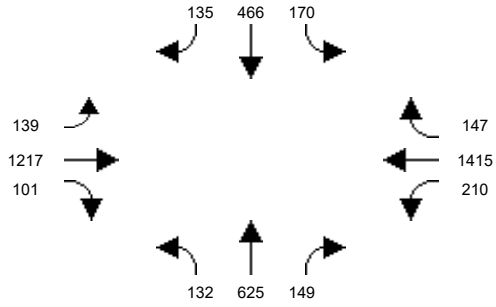


Intersection #45: Flower St and McFadden Ave

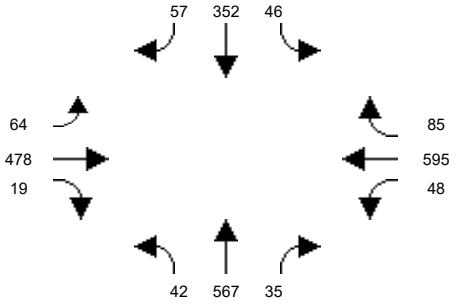


Intersection #46: Flower St and Segerstrom Ave

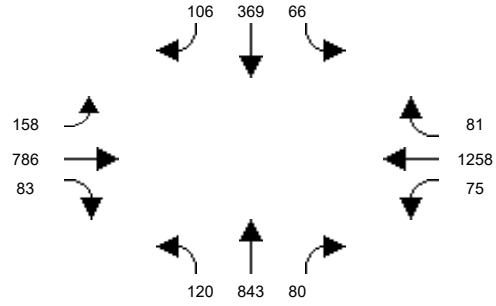


Intersection #47: Flower St and MacArthur Blvd

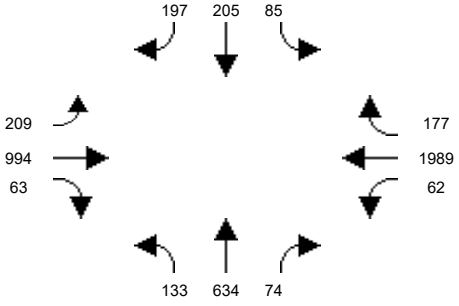


Intersection #48: Main St and La Veta Ave

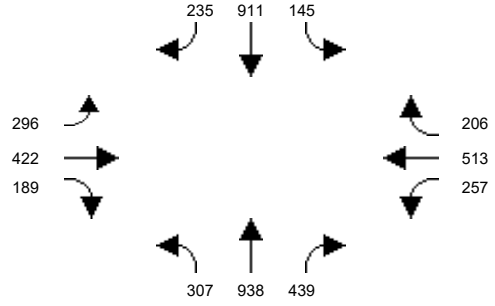

Intersection #49: Main St and Mainplace Dr / Memory Ln

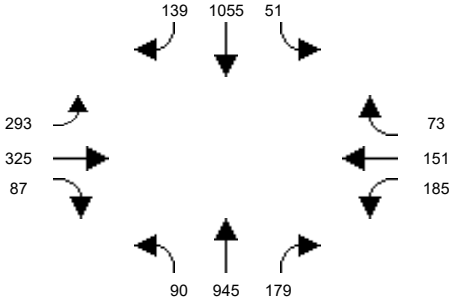

Intersection #50: Main St and 17th St

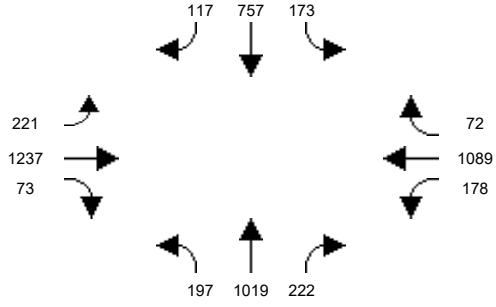


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP PM Peak Hour


Intersection #51: Main St and Civic Center Dr

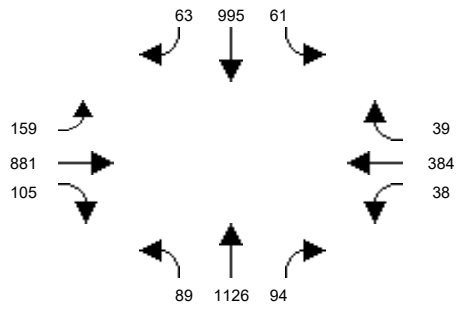


Intersection #52: Main St and Santa Ana Blvd

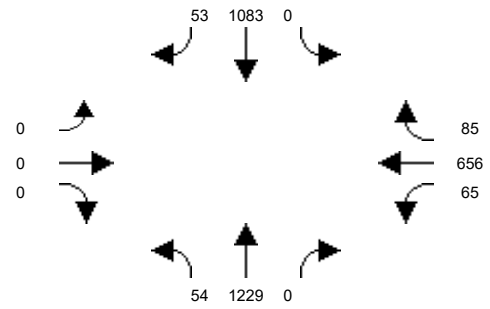


Intersection #53: Main St and 4th St

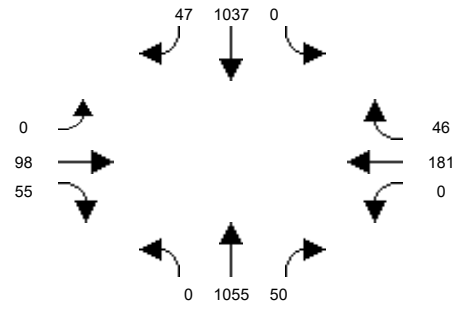


Intersection #54: Main St and 1st St

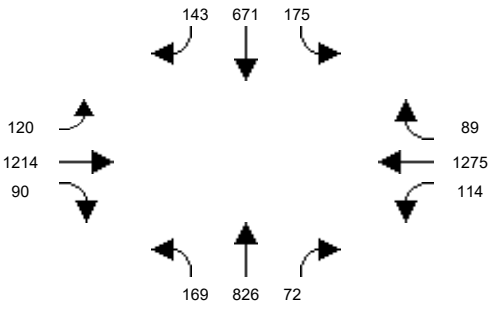


Intersection #55: Main St and McFadden Ave

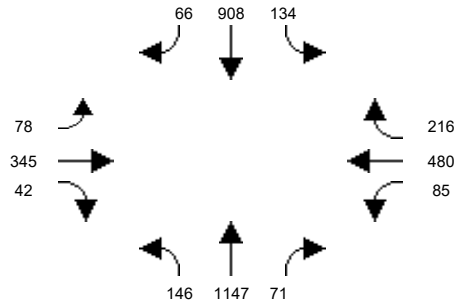


Intersection #56: Main St and Edinger Ave

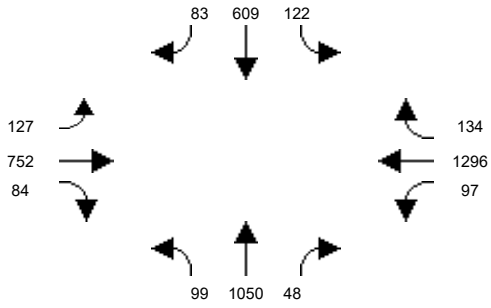


Intersection #57: Main St and MacArthur Blvd

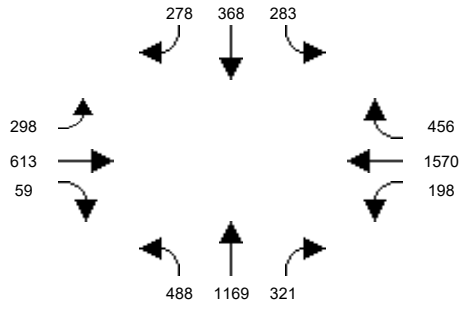


Intersection #58: Penn Wy and 17th St

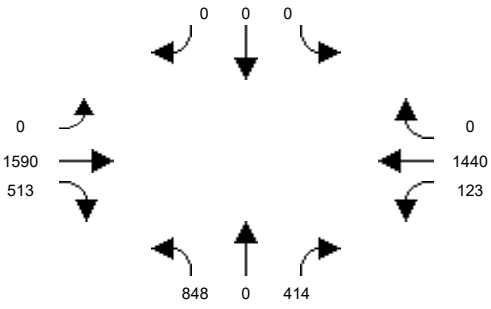

Intersection #59: I-5 NB Off Ramps/17th Street

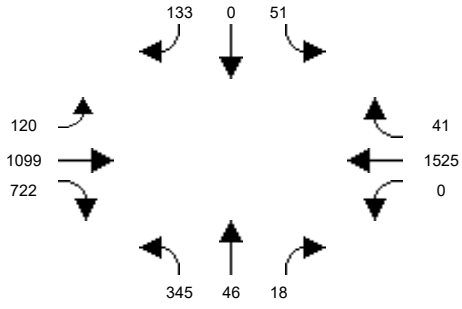

Intersection #60: Penn Wy and I-5 SB Ramps

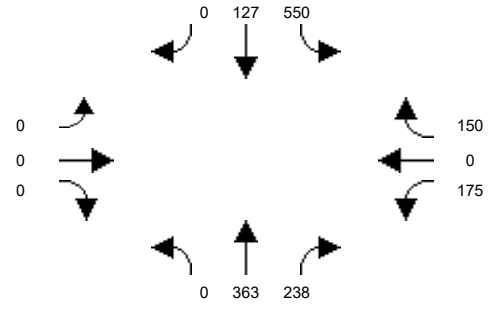


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP PM Peak Hour


Intersection #61: Santiago St and Civic Center Dr

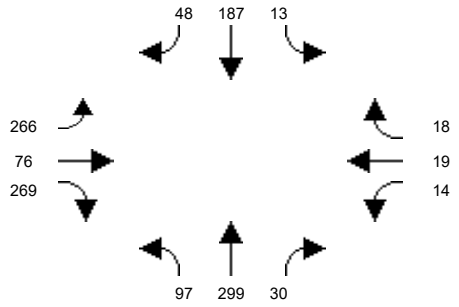


Intersection #62: Santiago St and Santa Ana Blvd

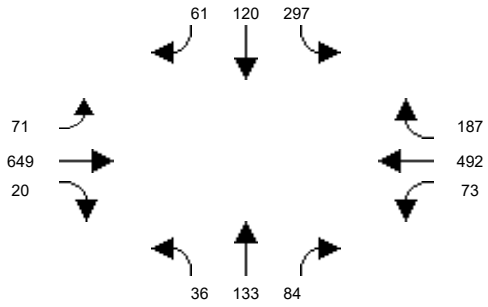


Intersection #64: Standard Ave and 1st St

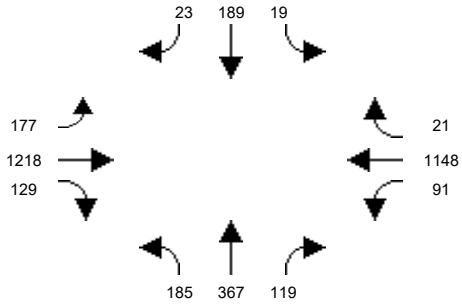


Intersection #65: Standard Ave and Mcfadden Ave

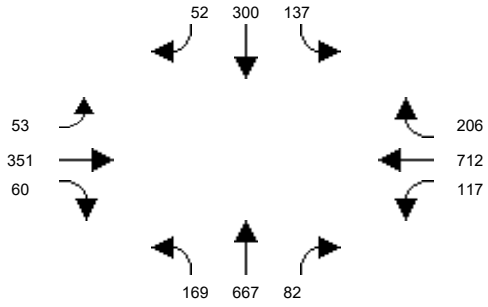


Intersection #66: Halladay St and Warner Ave

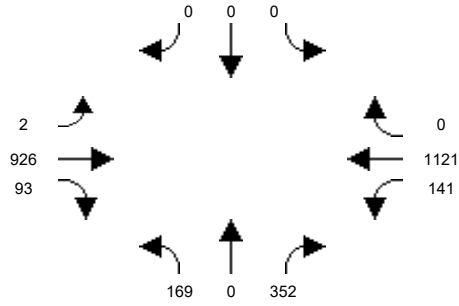


Intersection #67: Halladay St and Dyer Rd

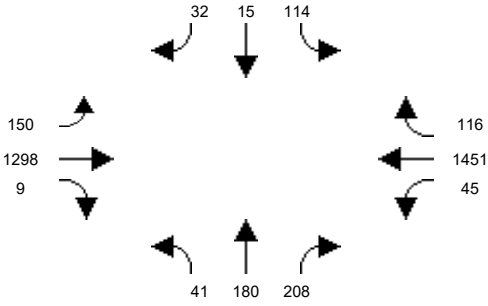


Intersection #68: SR-55 SB Ramps and MacArthur Blvd

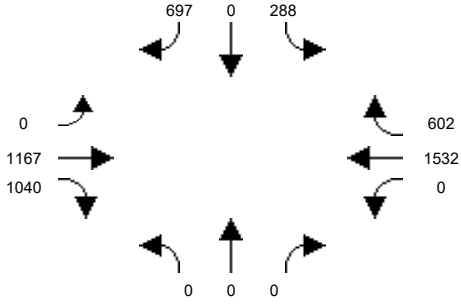


Intersection #69: SR-55 NB Ramps and MacArthur Blvd

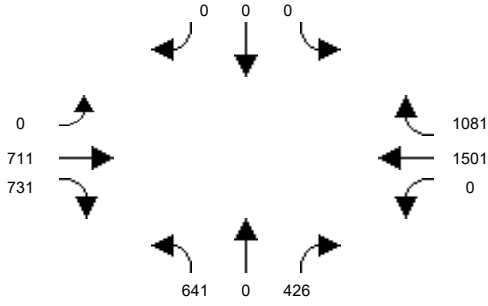

Intersection #70: SR-55 SB Ramps and Dyer Rd

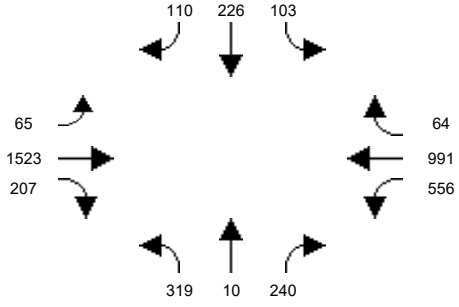

Intersection #71: Glassell St and La Veta Ave

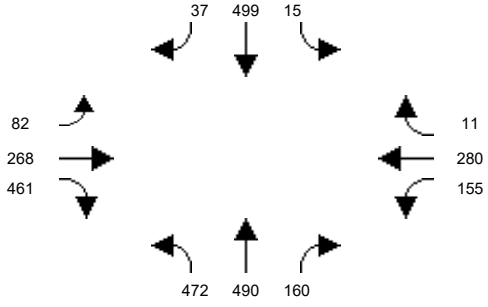


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP PM Peak Hour


Intersection #72: Glassell St and SR-22 WB Ramps

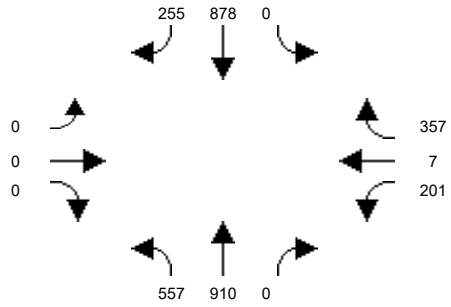


Intersection #73: Grand Ave / Glassell St and SR-22 EB Ramps

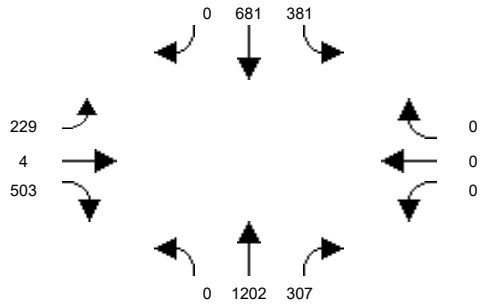


Intersection #74: Grand Ave and Fairhaven Ave

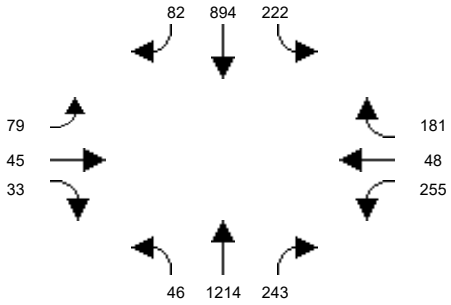


Intersection #75: Grand Ave and Santa Clara Ave

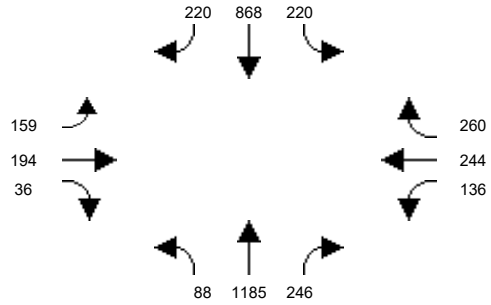


Intersection #76: Grand Ave and 17th St

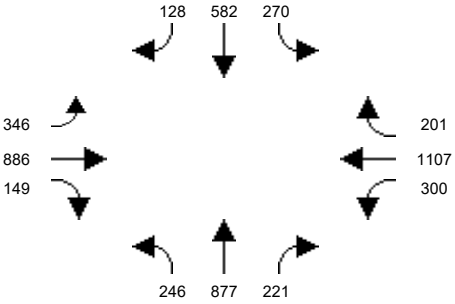


Intersection #77: Grand Ave and I-5 NB Ramps

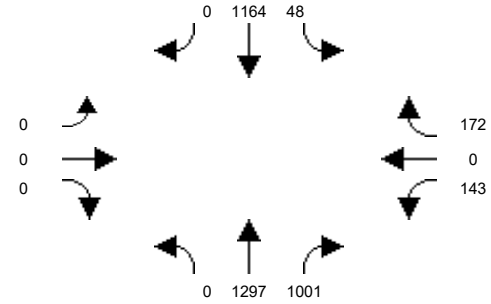


Intersection #78: Grand Ave and Santa Ana Blvd

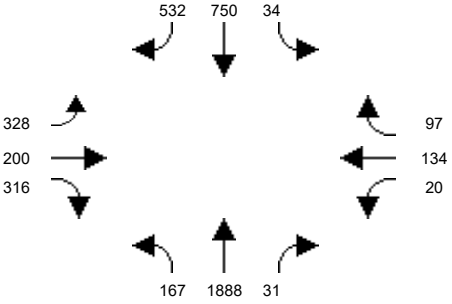


Intersection #79: Grand Ave and 1st St

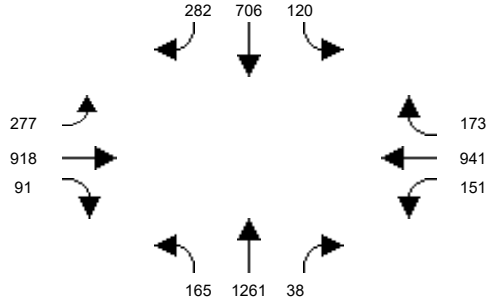

Intersection #80: Grand Ave and Chestnut Ave

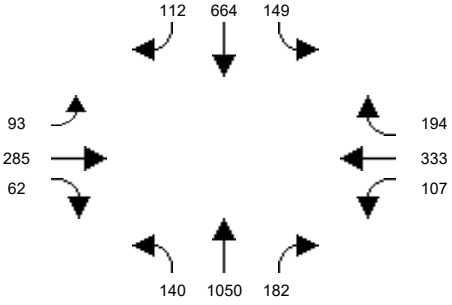

Intersection #81: Grand Ave and McFadden Ave

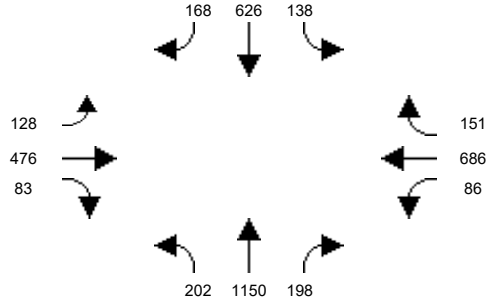


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP PM Peak Hour


Intersection #82: Grand Ave and Edinger Ave

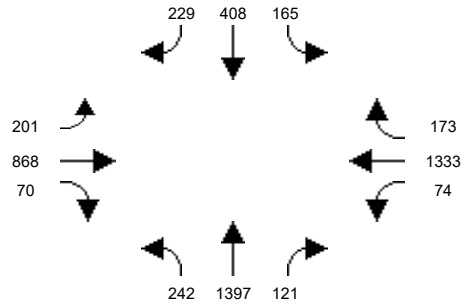


Intersection #83: Grand Ave and Warner Ave

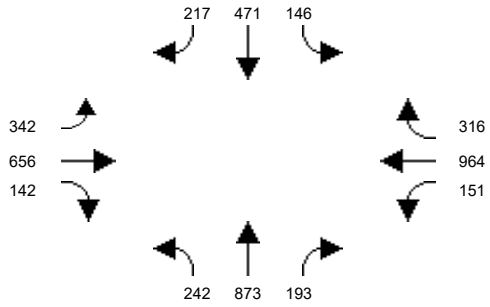


Intersection #84: SR-55 NB Ramps and Dyer Rd

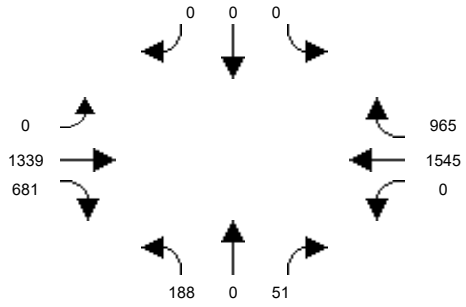


Intersection #85: Cambridge St and La Veta Ave

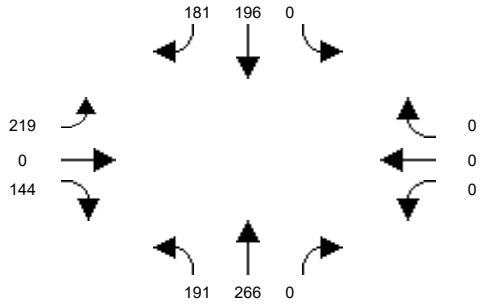


Intersection #86: Cambridge St and Fairhaven Ave

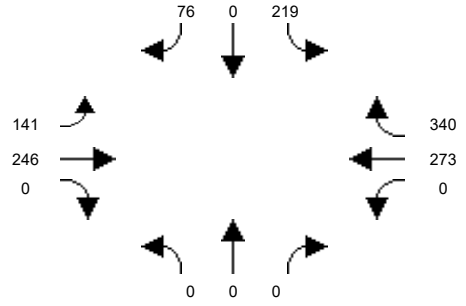


Intersection #87: Mabury St and 1st Street

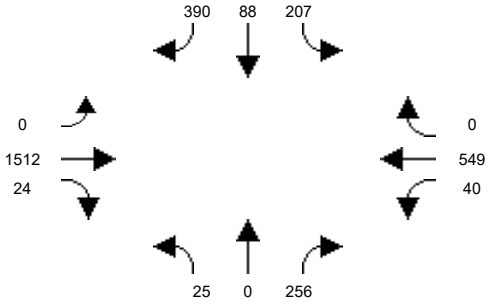


Intersection #88: Tustin St and La Veta Ave

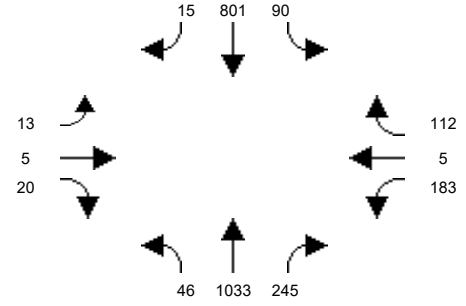


Intersection #89: Tustin St and SR-22 WB On-Ramp

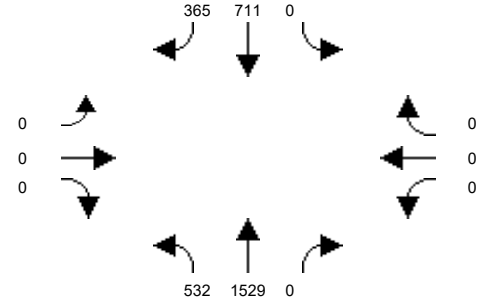

Intersection #90: Tustin St and SR-22 EB Off-Ramp / Seba Ave

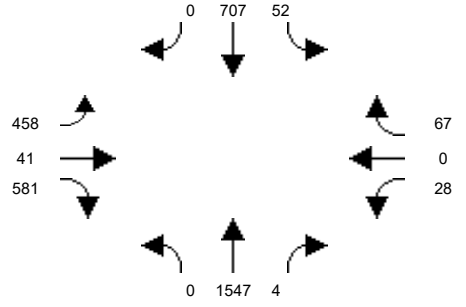

Intersection #91: Tustin Ave and Fairhaven Ave

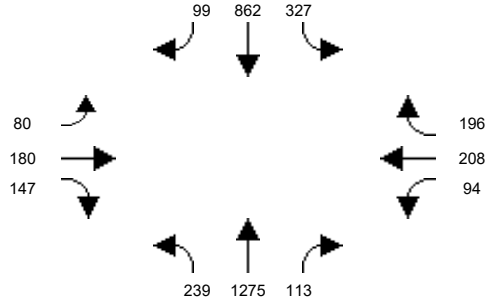


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP PM Peak Hour


Intersection #92: Tustin Ave and Santa Clara Ave

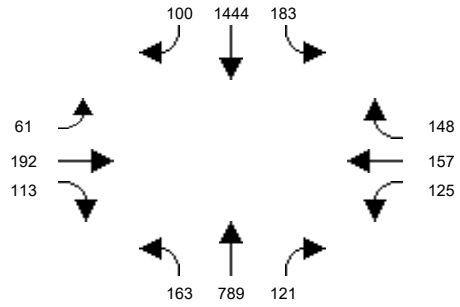


Intersection #93: Tustin Ave and 17th St

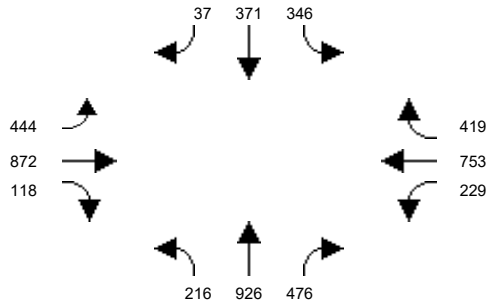


Intersection #94: Tustin Ave and 4th St

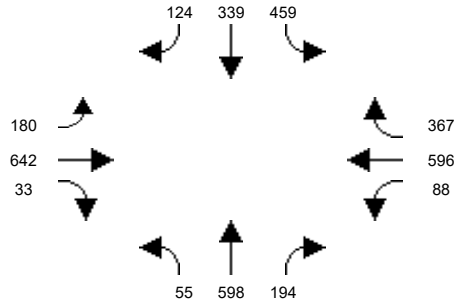


Intersection #95: SR-55 SB Ramps / Auto Mall Dr and Edinger Ave

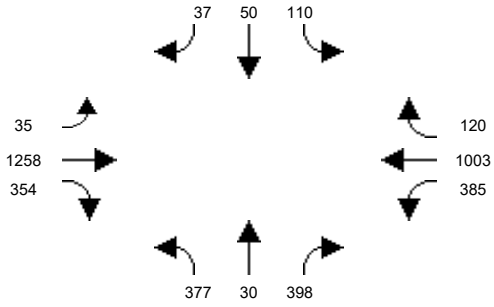


Intersection #96: SR-55 NB Ramps / Del Amo Ave and Newport

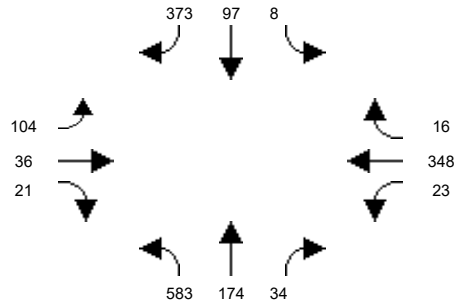


Intersection #97: Red Hill Ave and Edinger Ave

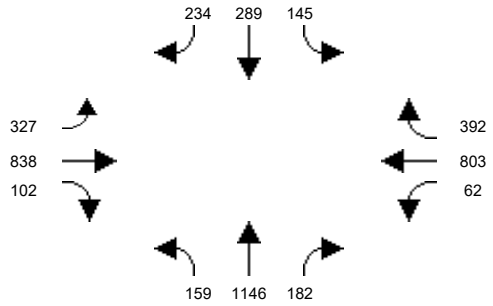


Intersection #98: Red Hill Ave and Warner Ave

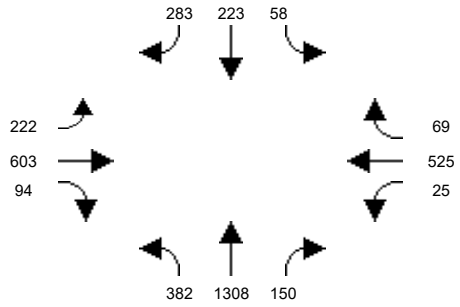


Intersection #99: Red Hill Ave and Dyer Rd / barranca Pkwy

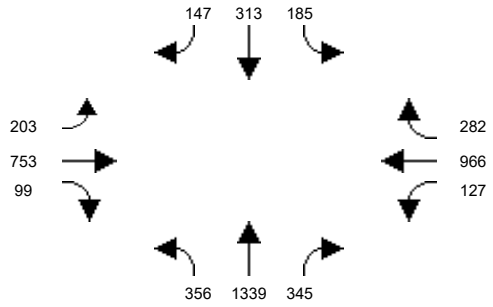

Intersection #100: Red Hill Ave and Alton Pkwy

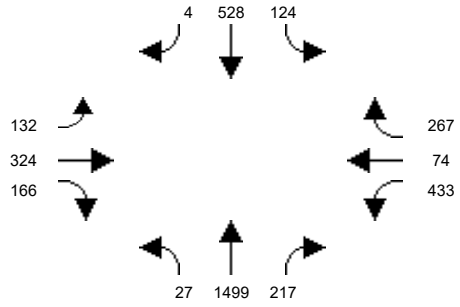

Intersection #101: Red Hill Ave and MacArthur Blvd

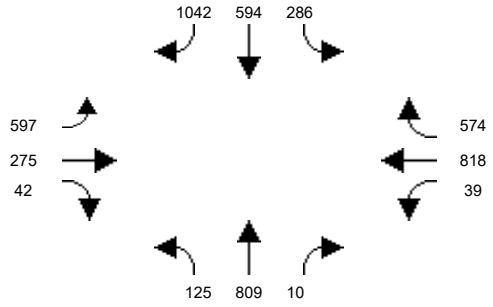


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP PM Peak Hour


Intersection #102: Red Hill Ave and Main St

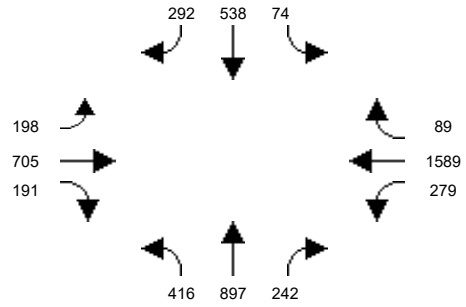


Intersection #103: I-5 SB Ramps and Santa Ana Blvd

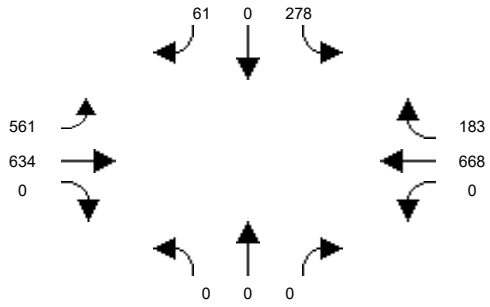


Intersection #104: Tustin Ranch Rd and Warner Ave

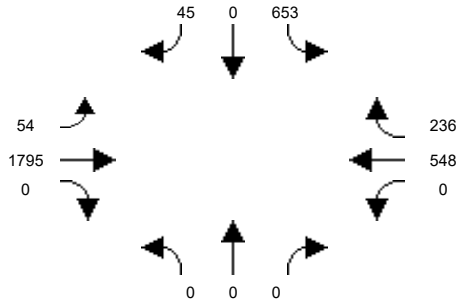


Intersection #105: Von Karman Ave and Barranca Pkwy

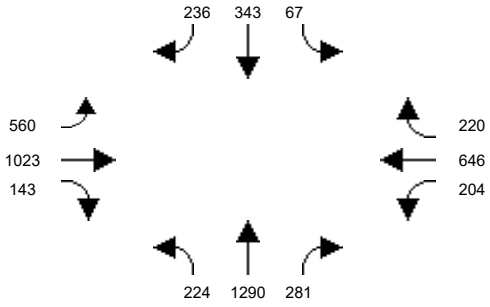


Intersection #106: Red Hill Avenue and El Camino Real

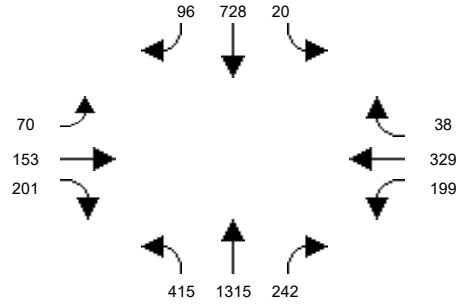


Intersection #107: Red Hill Avenue and I-5 NB Ramps

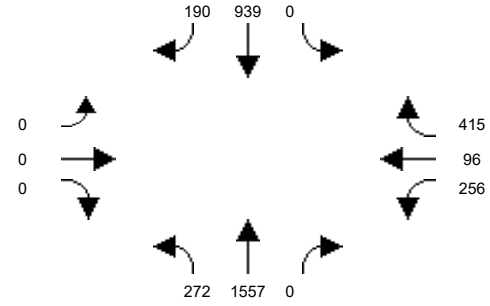


Intersection #108: Red Hill Avenue and I-5 SB Ramps

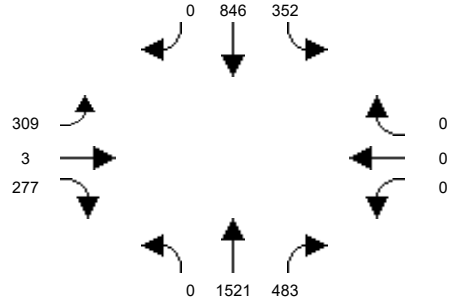


Intersection #109: Red Hill Avenue and Nisson Road

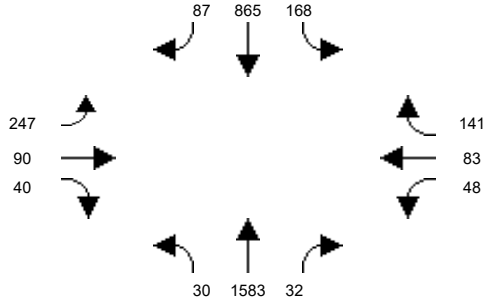

Intersection #110: Red Hill Avenue and Walnut Avenue

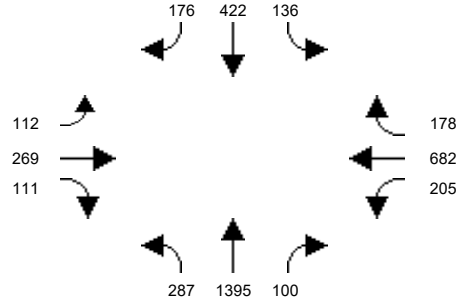

Intersection #111: Red Hill Avenue and Valencia Avenue

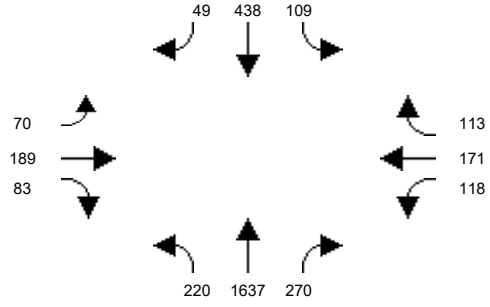


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2020 NP PM Peak Hour


Intersection #112: Tustin Ranch Road and Warner Avenue North

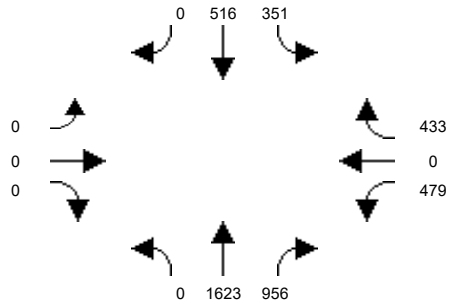


Intersection #113: Tustin Ranch Road and Walnut Avenue

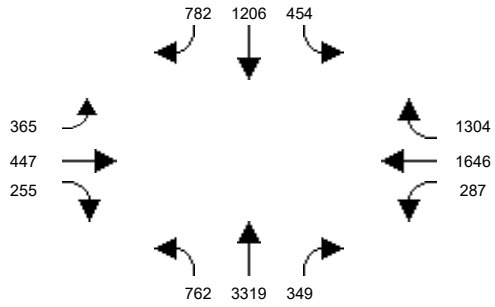

Intersection #114: SR-55 SB Ramps and Irvine Boulevard

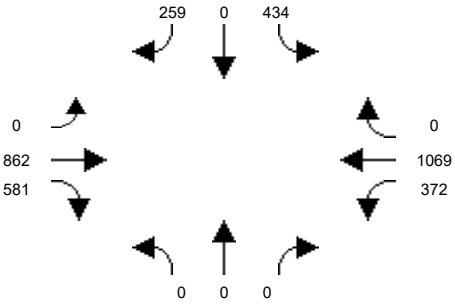

Intersection #115: SR-55 NB Ramps and Irvine Boulevard

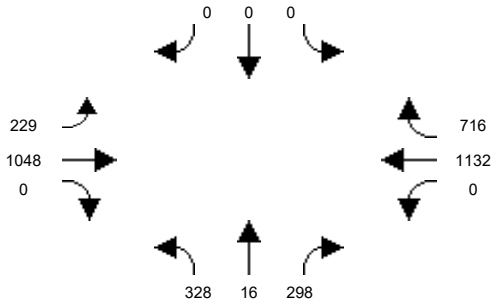

 Copyright (c) 2008 Dowling Associates, Inc.

Attachment 8

Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

APPENDIX B.3


INTERSECTION VOLUMES –
2045 NP (AM PEAK HOUR)

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP AM Peak Hour


Intersection #1: Euclid St and 1st St

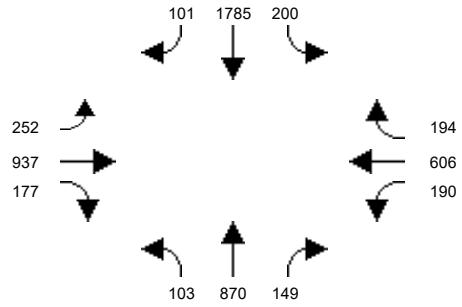


Intersection #2: Euclid St and McFadden Ave

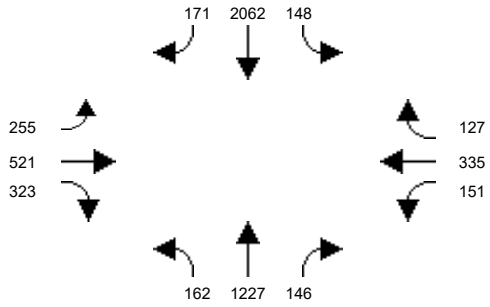


Intersection #3: Euclid St and Edinger Ave

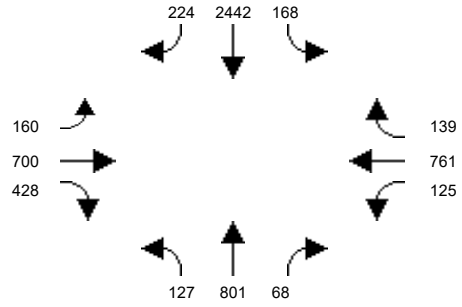


Intersection #4: Newhope St and Hazard Ave

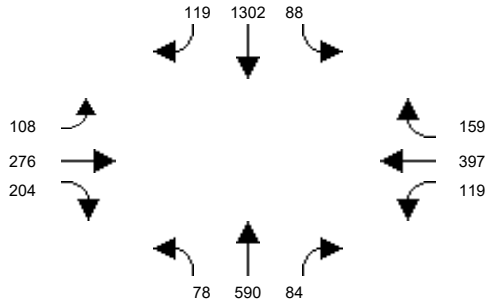


Intersection #5: Newhope St and McFadden Ave

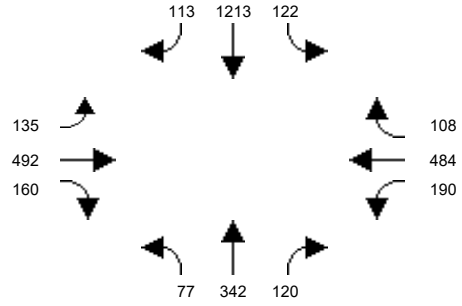


Intersection #6: Harbor Blvd and SR-22 WB Off-Ramp / Banner Dr

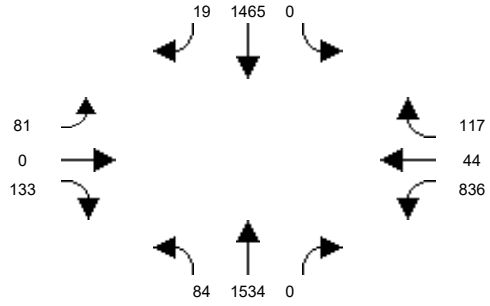


Intersection #7: Trask Avenue and SR-22 EB On-Ramp

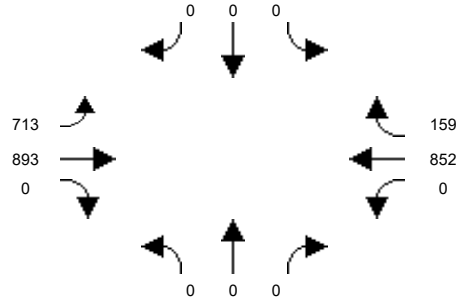


Intersection #8: Harbor Blvd and Westminster Ave

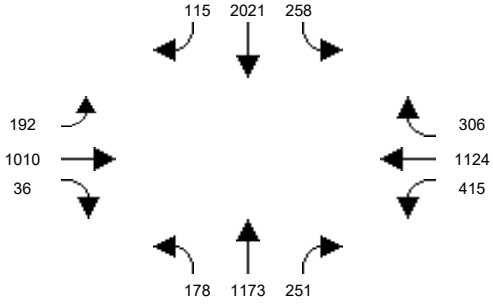

Intersection #9: Harbor Blvd and 1st St

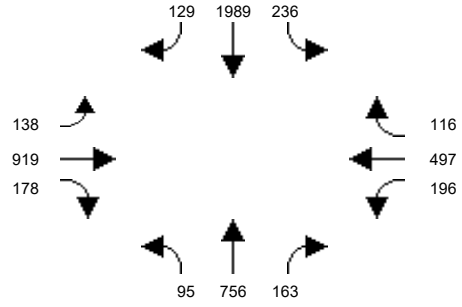

Intersection #10: Harbor Blvd and McFadden Ave

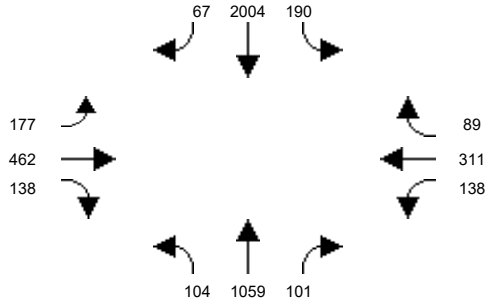


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP AM Peak Hour


Intersection #11: Harbor Blvd and Edinger Ave

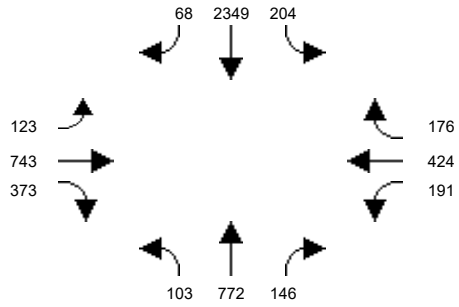


Intersection #12: Harbor Blvd and Warner Ave

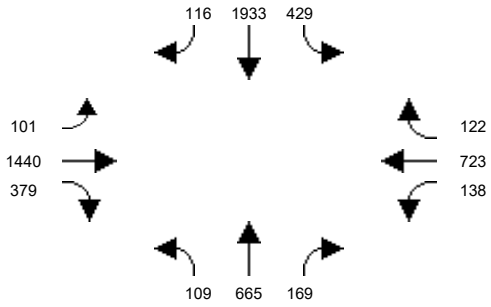


Intersection #13: Harbor Blvd and Segerstrom Ave

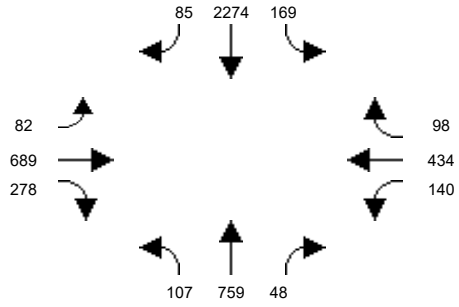


Intersection #14: MacArthur Blvd and Hyland Ave

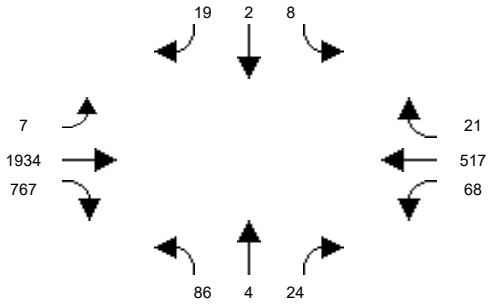


Intersection #15: MacArthur Blvd and Harbor Blvd

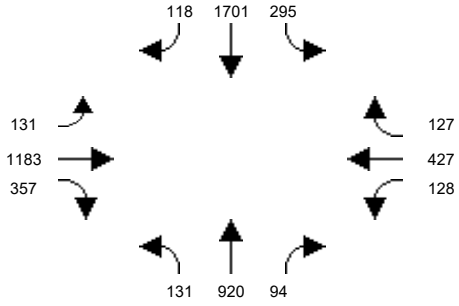


Intersection #16: Harbor Blvd and Sunflower Ave

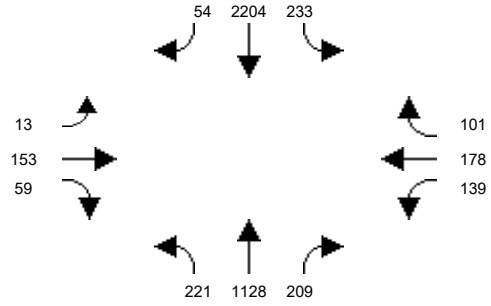


Intersection #17: Harbor Blvd and I-405 NB Off-Ramp

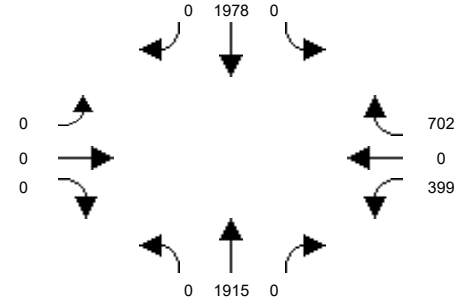


Intersection #18: Harbor Blvd and I-405 SB Off-Ramp

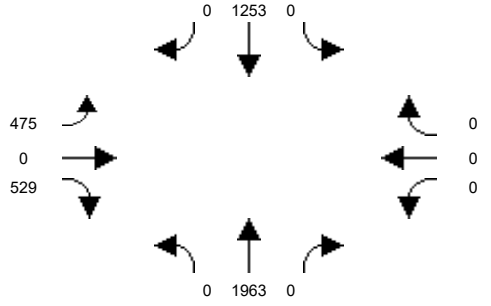

Intersection #19: Fairview St and Civic Center Dr

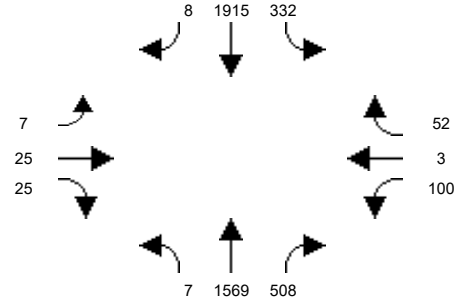

Intersection #20: Fairview St and 1st St

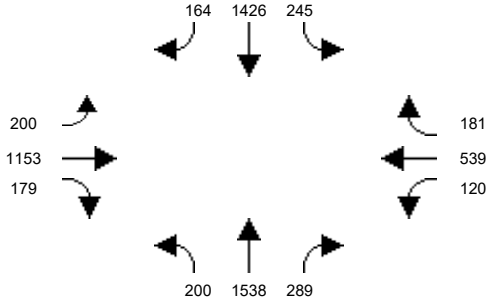


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP AM Peak Hour


Intersection #21: Fairview St and McFadden Ave

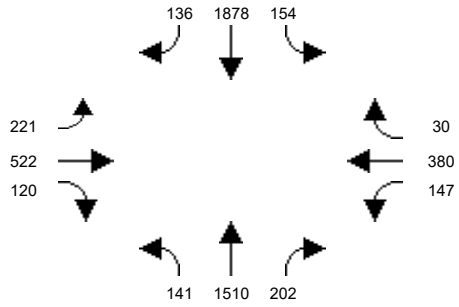


Intersection #22: Fairview St and Edinger Ave

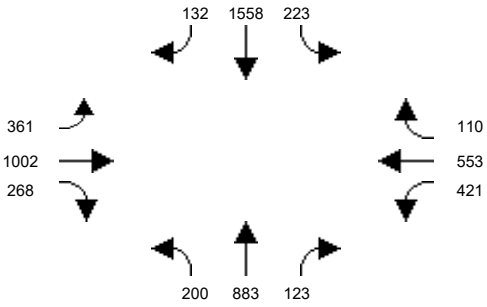


Intersection #23: Fairview St and Warner Ave

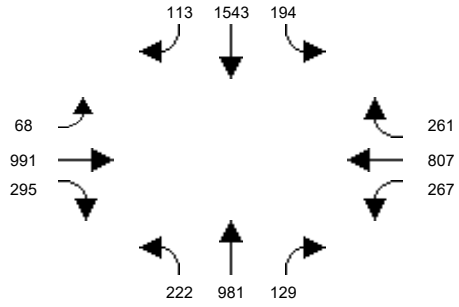


Intersection #24: Fairview St and MacArthur Blvd

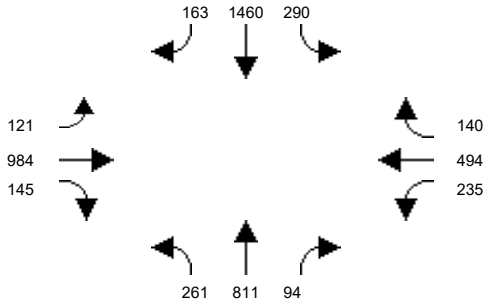


Intersection #25: Fairview Rd and Sunflower Ave

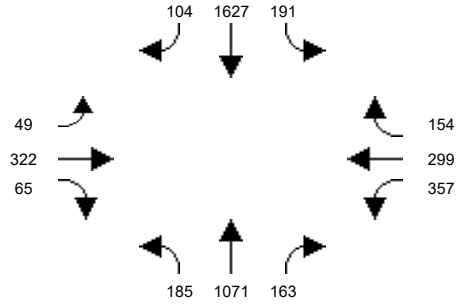


Intersection #26: Greenville St and Edinger Ave

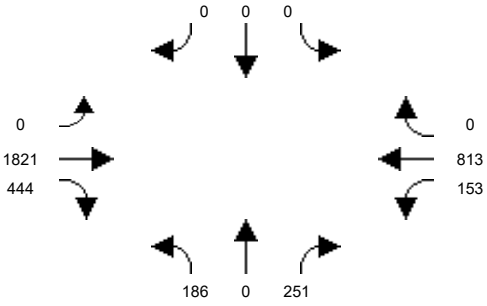


Intersection #27: Greenville St and Segerstrom Ave

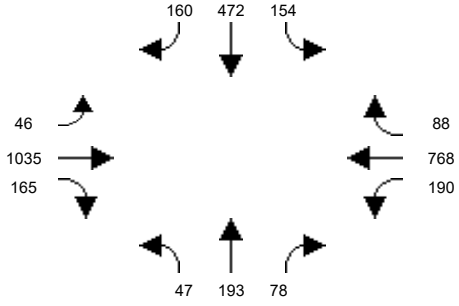


Intersection #28: Raitt St and McFadden Ave

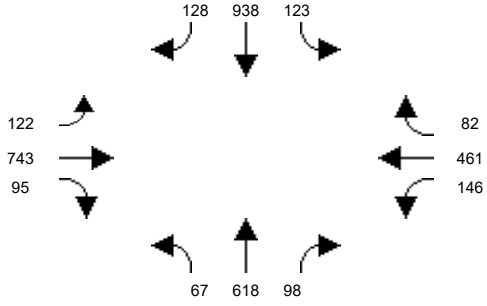

Intersection #29: Raitt St and Edinger Ave

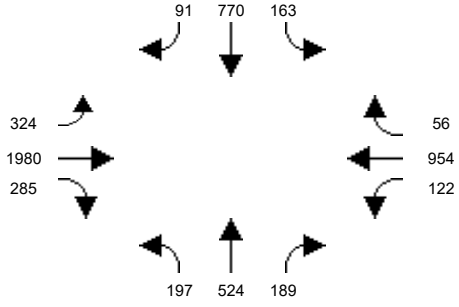

Intersection #30: Bear St and MacArthur Blvd

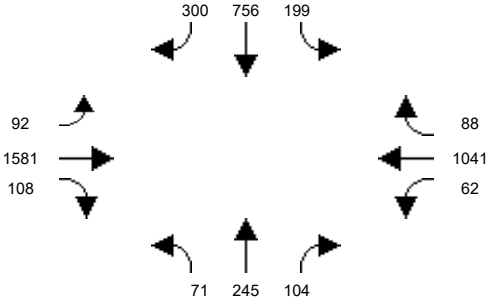


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP AM Peak Hour


Intersection #31: Bristol St and 17th St

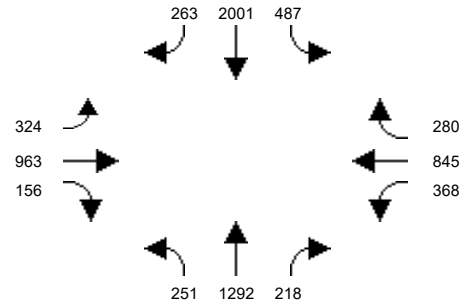


Intersection #32: Bristol St and Civic Center Dr

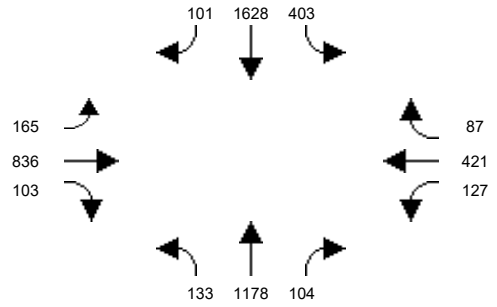


Intersection #33: Bristol St and Santa Ana Blvd

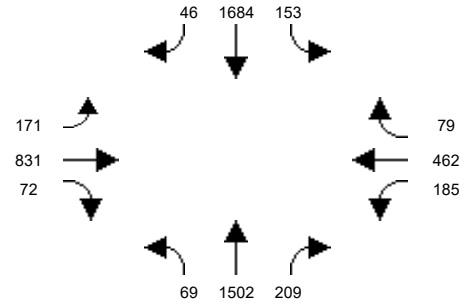


Intersection #34: Bristol St and 1st St

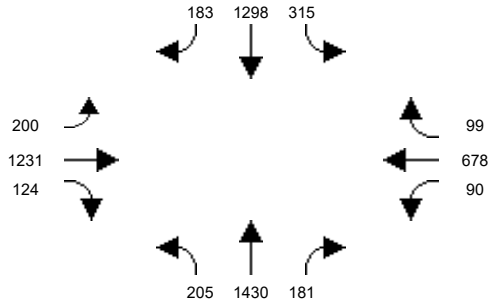


Intersection #35: Bristol St and McFadden Ave

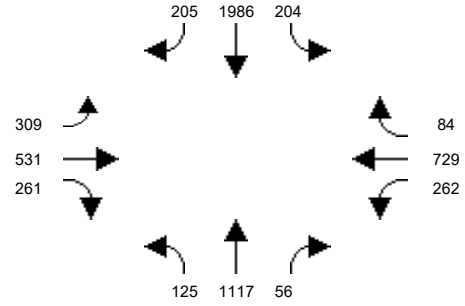


Intersection #36: Bristol St and Warner Ave

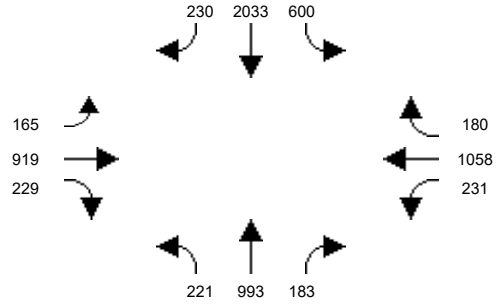


Intersection #37: Bristol St and Segerstrom Ave

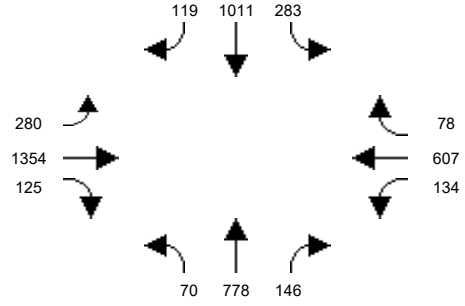


Intersection #38: Bristol St and Alton Ave

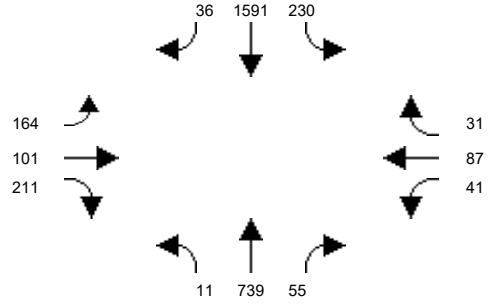

Intersection #39: Bristol St and MacArthur Blvd

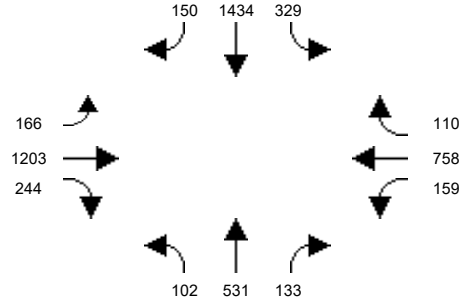

Intersection #40: Bristol St and Sunflower Ave

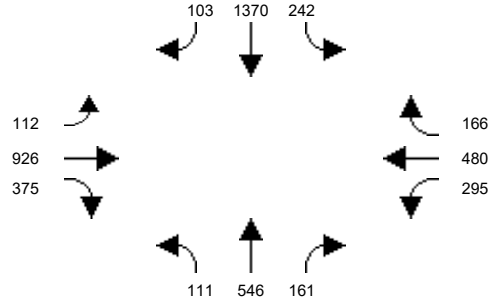


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP AM Peak Hour


Intersection #41: Bristol St and I-405 NB Ramps

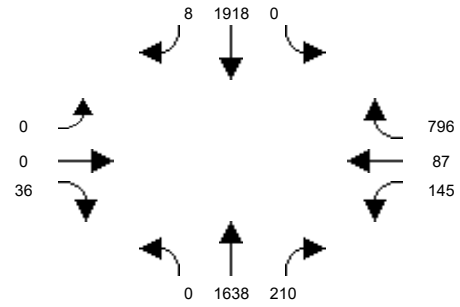


Intersection #42: Bristol St and I-405 SB Ramps

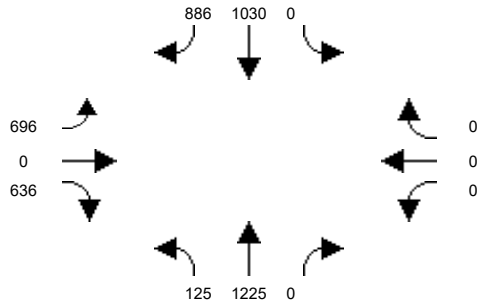


Intersection #43: Flower St and Santa Ana Blvd

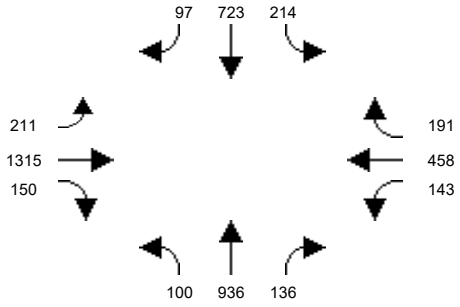


Intersection #44: Flower St and 1st St

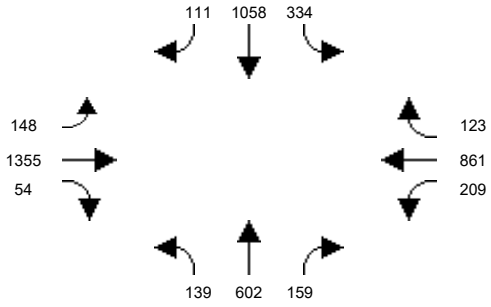


Intersection #45: Flower St and McFadden Ave

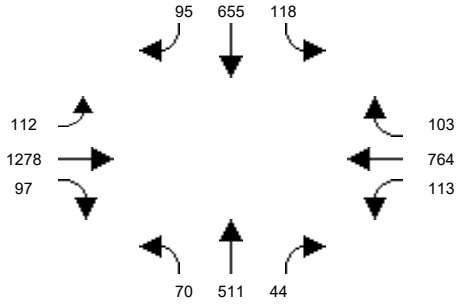


Intersection #46: Flower St and Segerstrom Ave

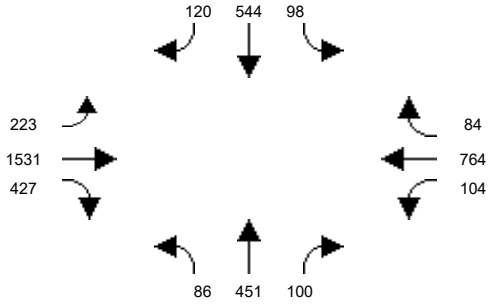


Intersection #47: Flower St and MacArthur Blvd

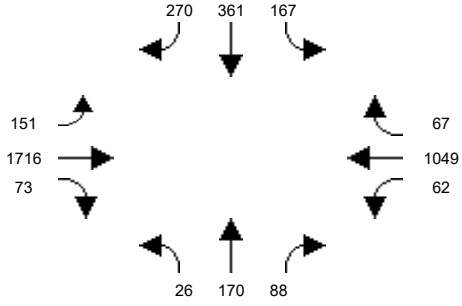


Intersection #48: Main St and La Veta Ave

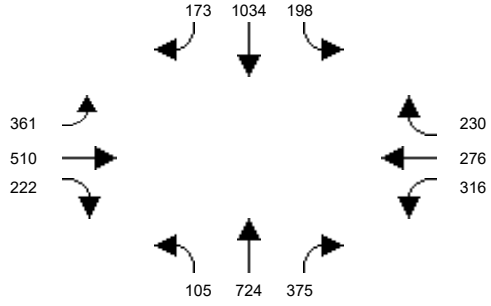

Intersection #49: Main St and Mainplace Dr / Memory Ln

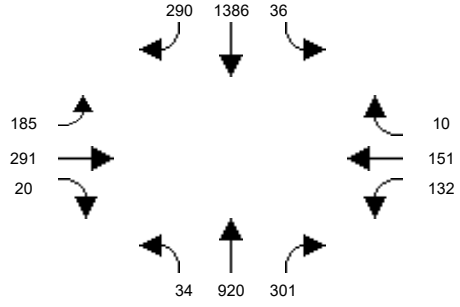

Intersection #50: Main St and 17th St

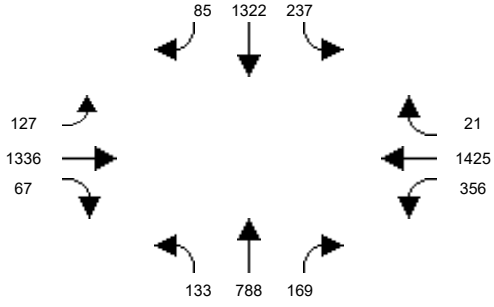


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP AM Peak Hour


Intersection #51: Main St and Civic Center Dr

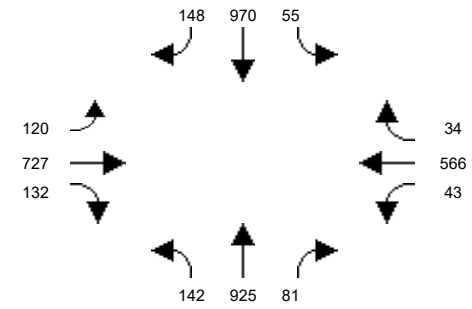


Intersection #52: Main St and Santa Ana Blvd

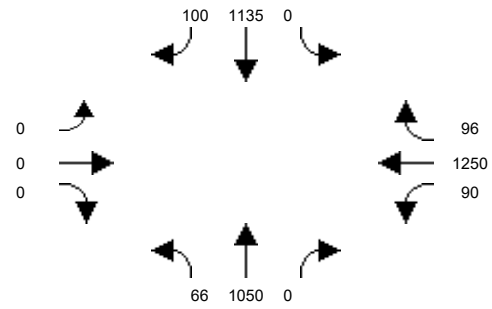


Intersection #53: Main St and 4th St

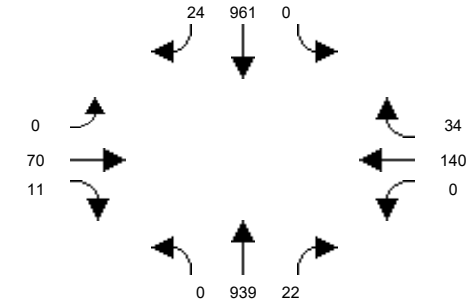


Intersection #54: Main St and 1st St

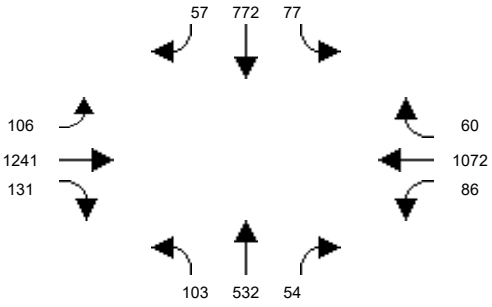


Intersection #55: Main St and McFadden Ave

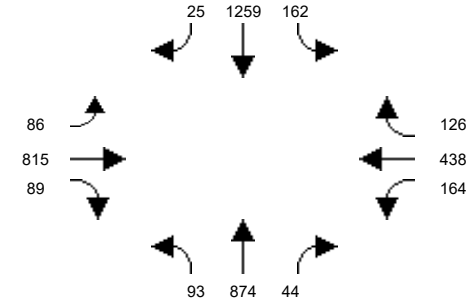


Intersection #56: Main St and Edinger Ave

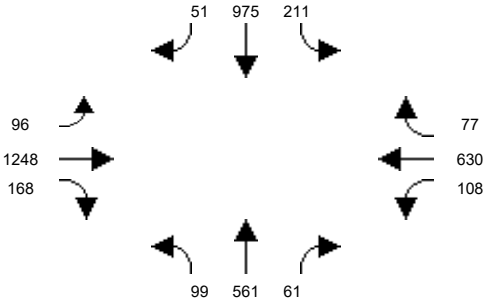


Intersection #57: Main St and MacArthur Blvd

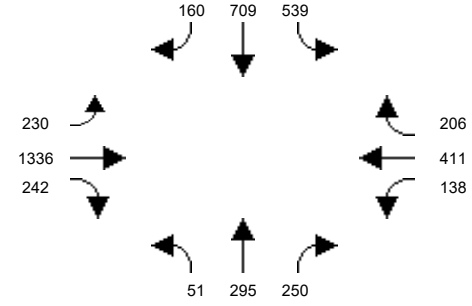


Intersection #58: Penn Wy and 17th St

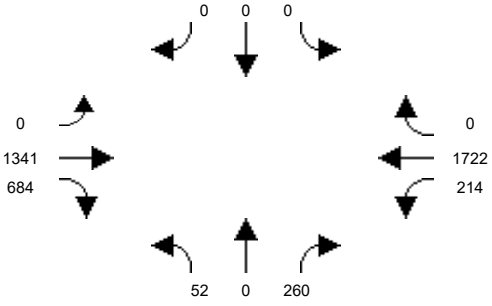

Intersection #59: I-5 NB Off Ramps/17th Street

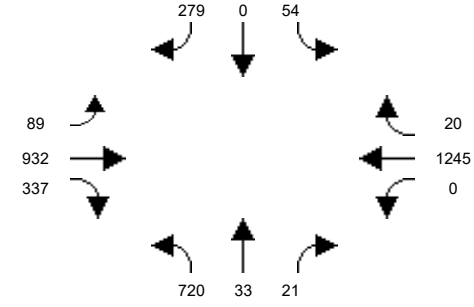

Intersection #60: Penn Wy and I-5 SB Ramps

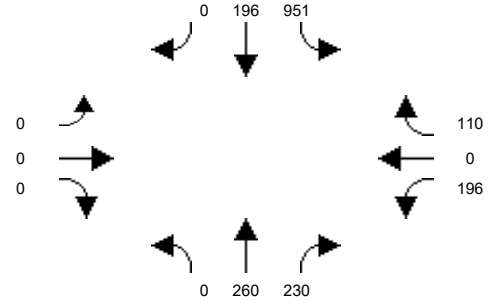


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP AM Peak Hour


Intersection #61: Santiago St and Civic Center Dr

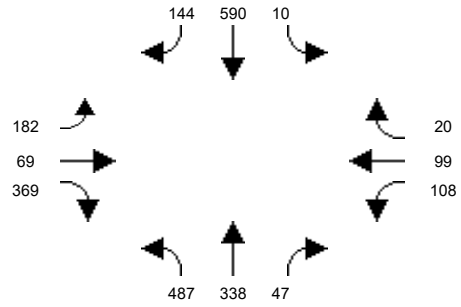


Intersection #62: Santiago St and Santa Ana Blvd

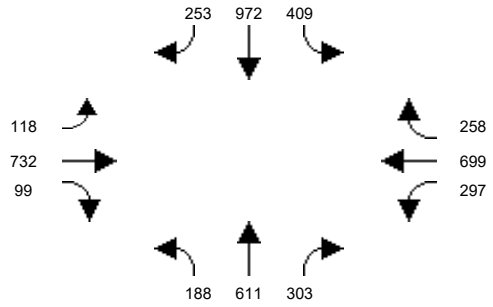


Intersection #63: Standard Ave and 4th St

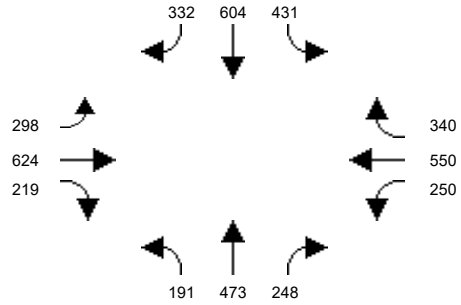


Intersection #64: Standard Ave and 1st St

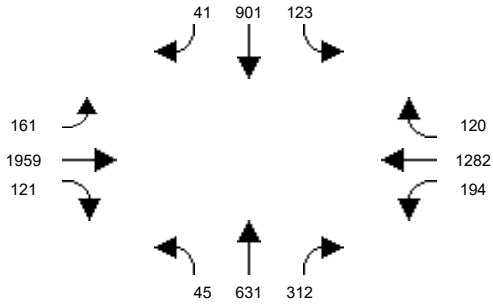


Intersection #65: Standard Ave and Mcfadden Ave

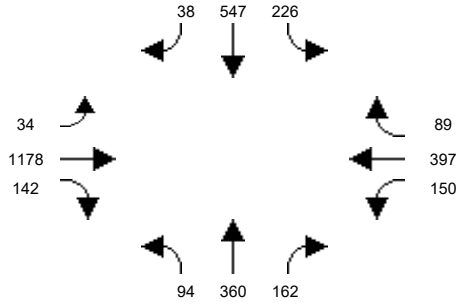


Intersection #66: Halladay St and Warner Ave

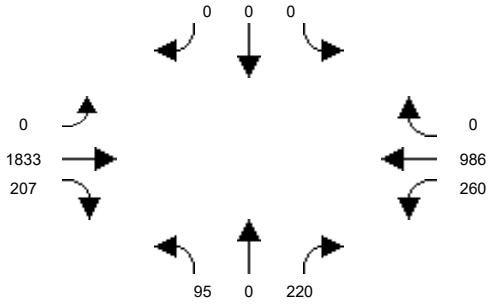


Intersection #67: Halladay St and Dyer Rd

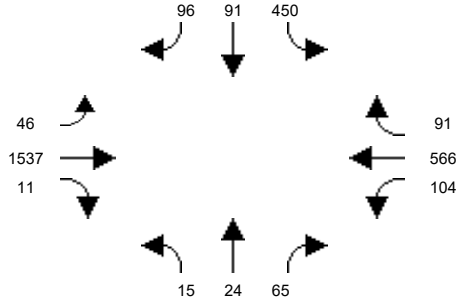


Intersection #68: SR-55 SB Ramps and MacArthur Blvd

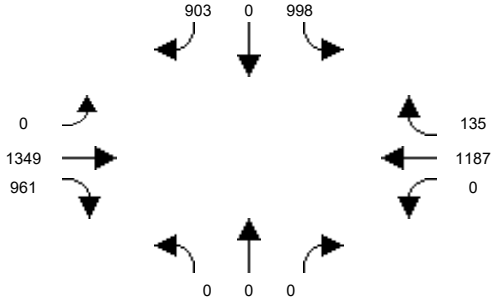

Intersection #69: SR-55 NB Ramps and MacArthur Blvd

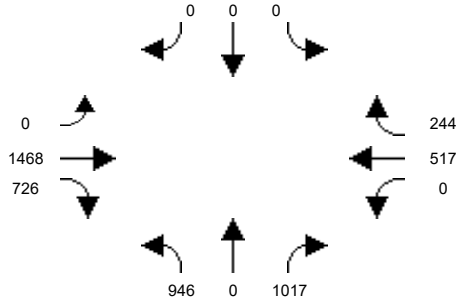

Intersection #70: SR-55 SB Ramps and Dyer Rd

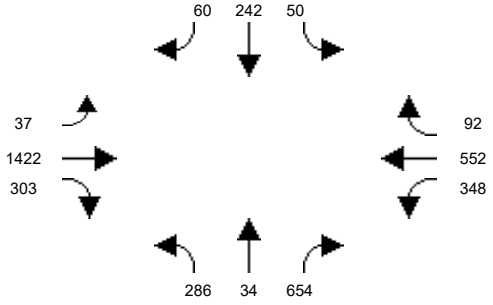


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP AM Peak Hour


Intersection #71: Glassell St and La Veta Ave

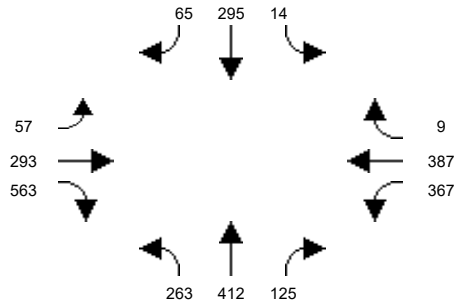


Intersection #72: Glassell St and SR-22 WB Ramps

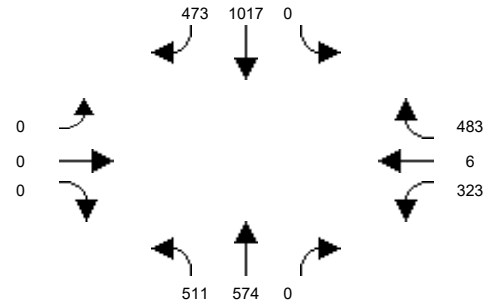


Intersection #73: Grand Ave / Glassell St and SR-22 EB Ramps

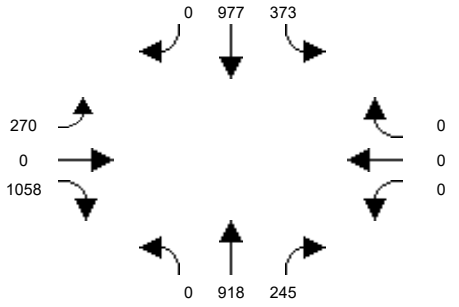


Intersection #74: Grand Ave and Fairhaven Ave

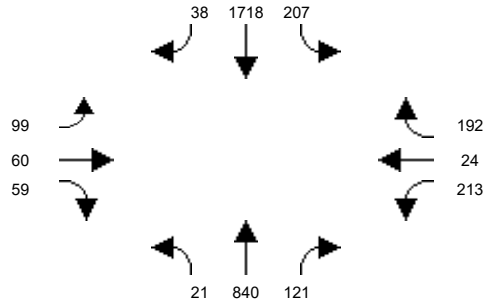


Intersection #75: Grand Ave and Santa Clara Ave

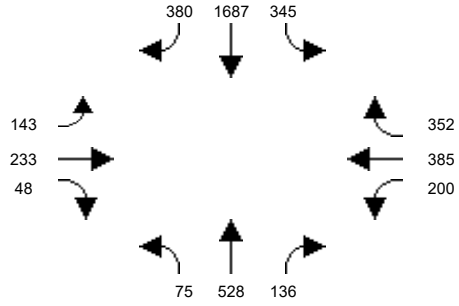


Intersection #76: Grand Ave and 17th St

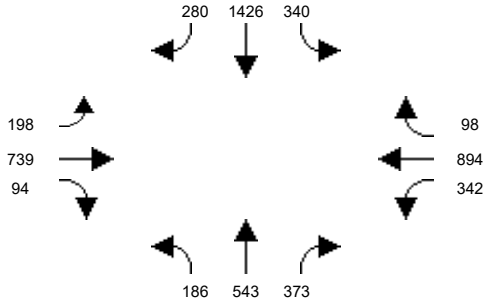


Intersection #77: Grand Ave and I-5 NB Ramps

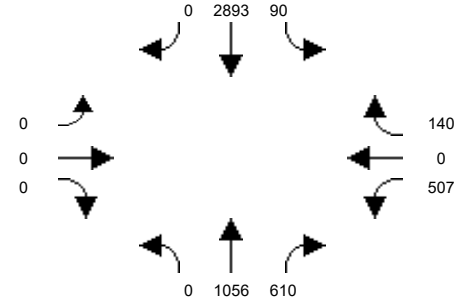


Intersection #78: Grand Ave and Santa Ana Blvd

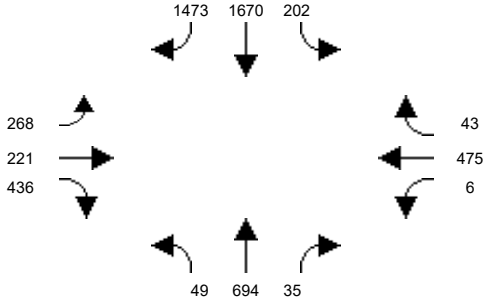

Intersection #79: Grand Ave and 1st St

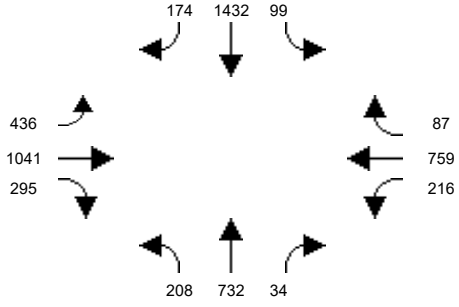

Intersection #80: Grand Ave and Chestnut Ave

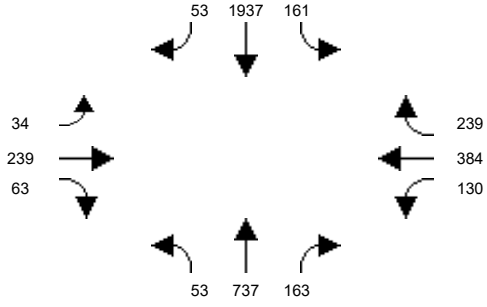


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP AM Peak Hour


Intersection #81: Grand Ave and McFadden Ave

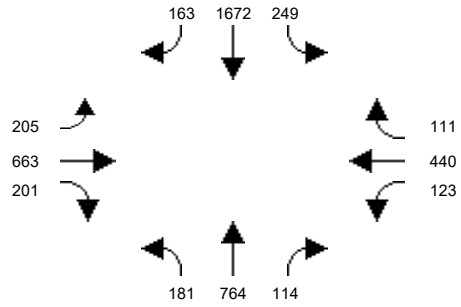


Intersection #82: Grand Ave and Edinger Ave

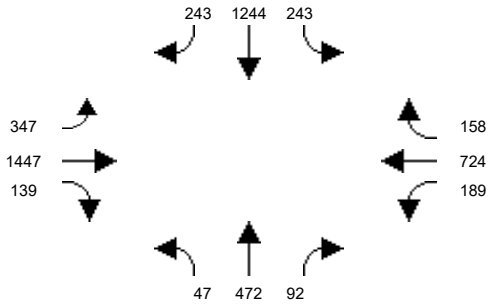


Intersection #83: Grand Ave and Warner Ave

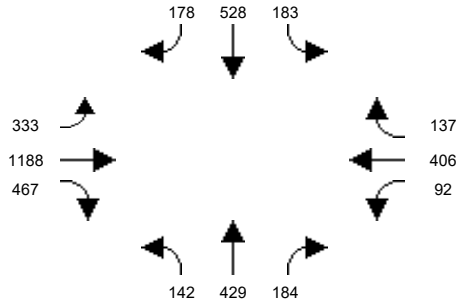


Intersection #84: SR-55 NB Ramps and Dyer Rd

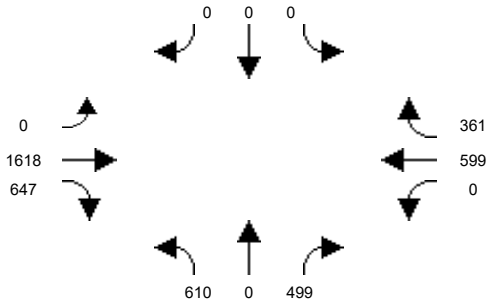


Intersection #85: Cambridge St and La Veta Ave

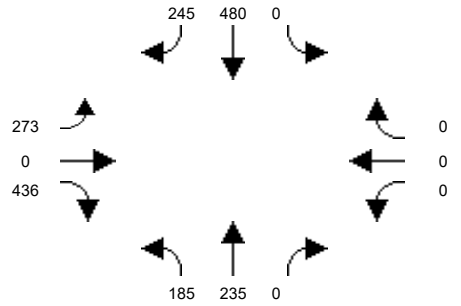


Intersection #86: Cambridge St and Fairhaven Ave

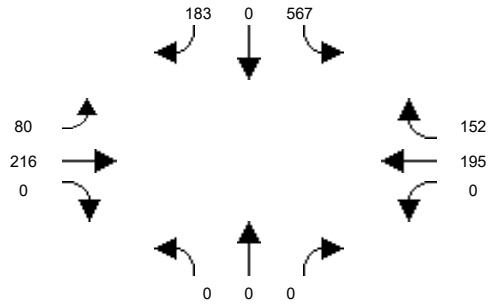


Intersection #87: Mabury St and 1st Street

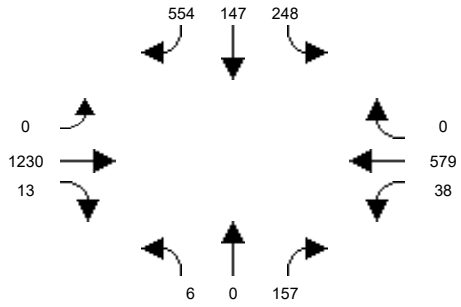


Intersection #88: Tustin St and La Veta Ave

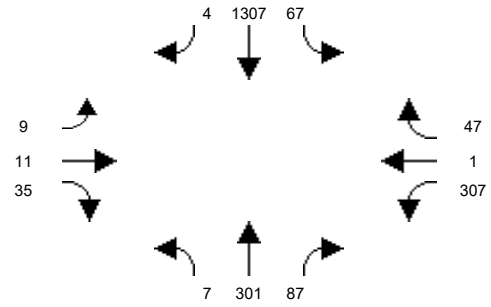

Intersection #89: Tustin St and SR-22 WB On-Ramp

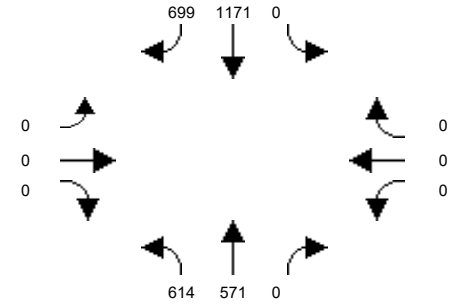

Intersection #90: Tustin St and SR-22 EB Off-Ramp / Seba Ave

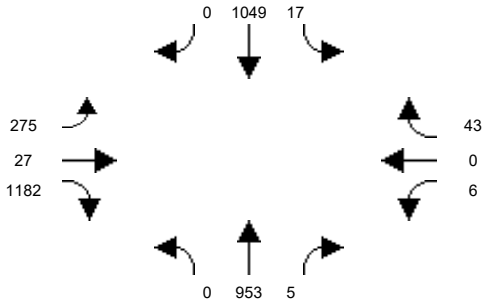


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP AM Peak Hour


Intersection #91: Tustin Ave and Fairhaven Ave

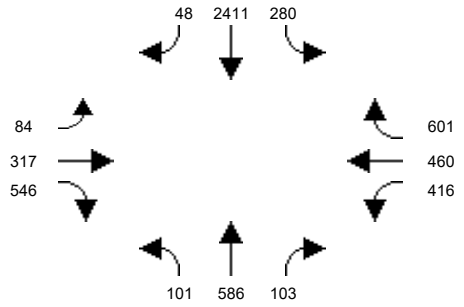


Intersection #92: Tustin Ave and Santa Clara Ave

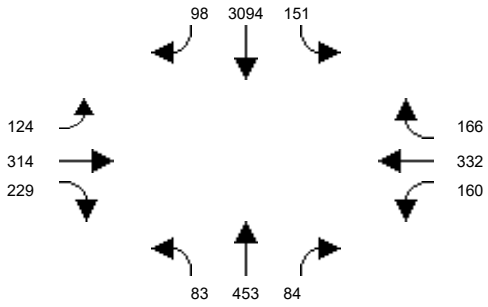


Intersection #93: Tustin Ave and 17th St

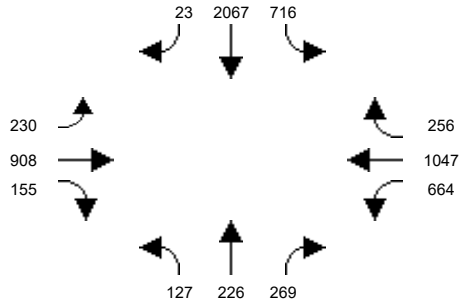


Intersection #94: Tustin Ave and 4th St

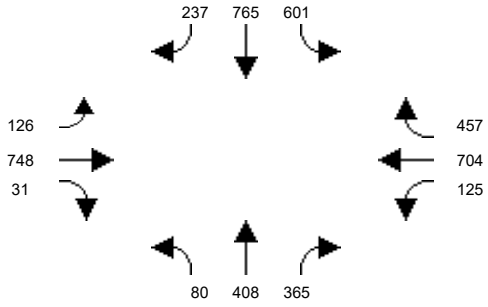


Intersection #95: SR-55 SB Ramps / Auto Mall Dr and Edinger Ave

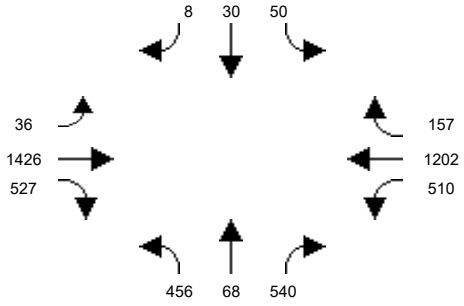


Intersection #96: SR-55 NB Ramps / Del Amo Ave and Newport Avenue

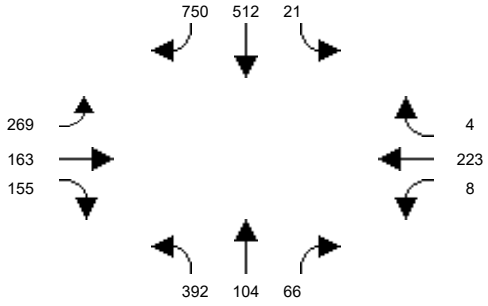


Intersection #97: Red Hill Ave and Edinger Ave

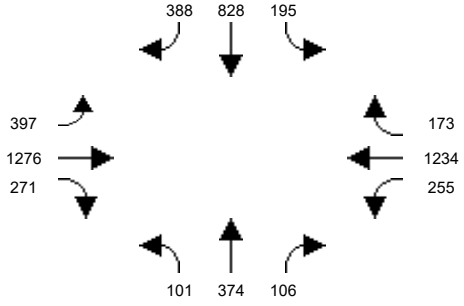


Intersection #98: Red Hill Ave and Warner Ave

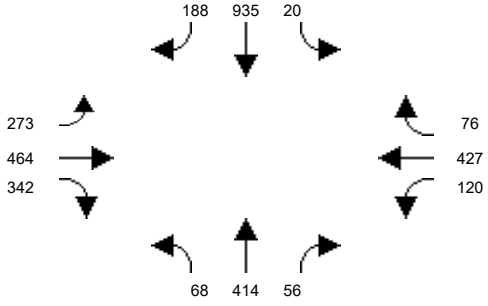

Intersection #99: Red Hill Ave and Dyer Rd / barranca Pkwy

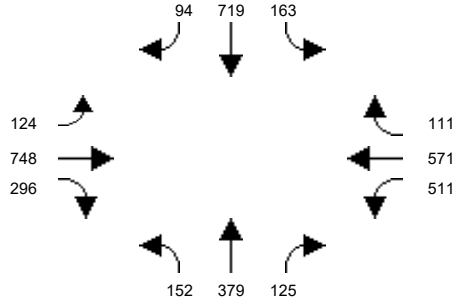

Intersection #100: Red Hill Ave and Alton Pkwy

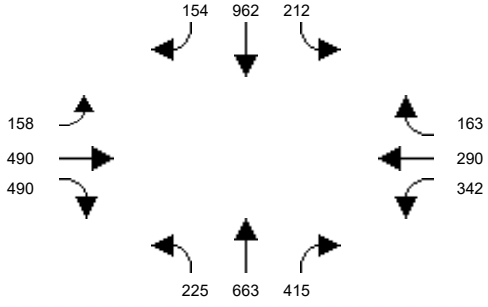


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP AM Peak Hour


Intersection #101: Red Hill Ave and MacArthur Blvd

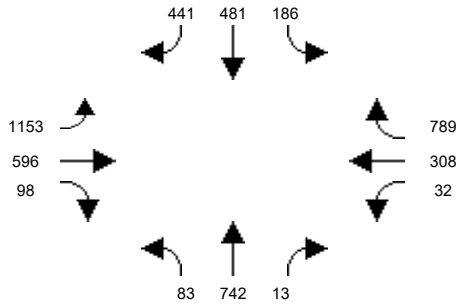


Intersection #102: Red Hill Ave and Main St

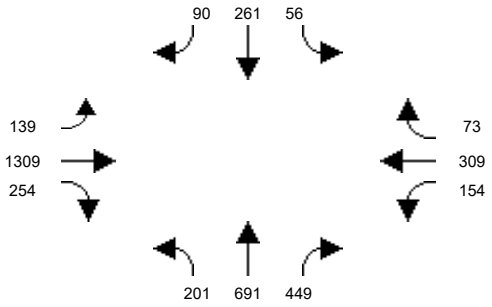


Intersection #103: I-5 SB Ramps and Santa Ana Blvd

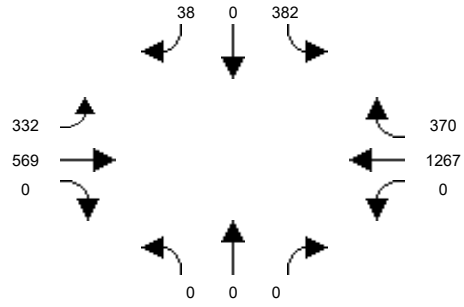


Intersection #104: Tustin Ranch Rd and Warner Ave

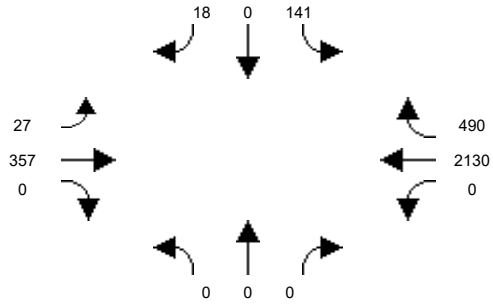


Intersection #105: Von Karman Ave and Barranca Pkwy

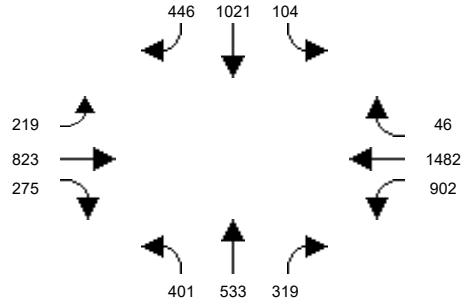


Intersection #106: Red Hill Avenue and El Camino Real

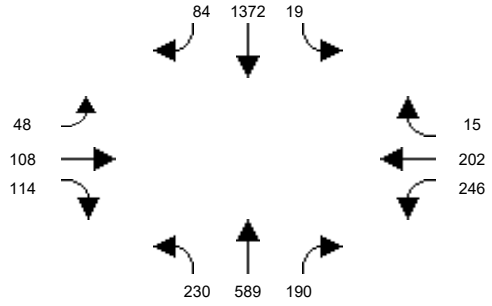


Intersection #107: Red Hill Avenue and I-5 NB Ramps

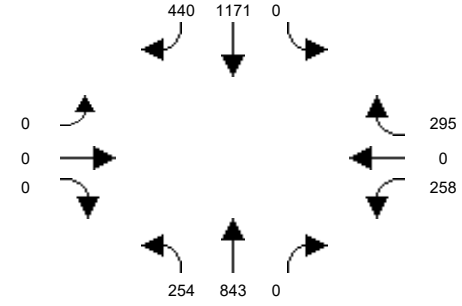


Intersection #108: Red Hill Avenue and I-5 SB Ramps

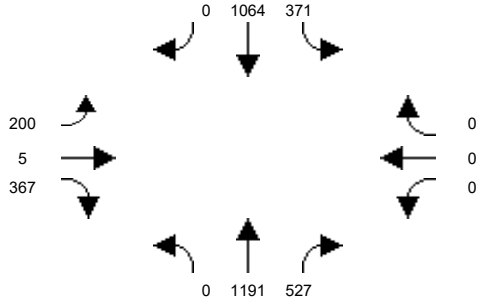

Intersection #109: Red Hill Avenue and Nisson Road

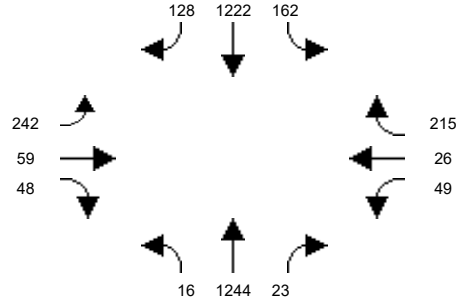

Intersection #110: Red Hill Avenue and Walnut Avenue

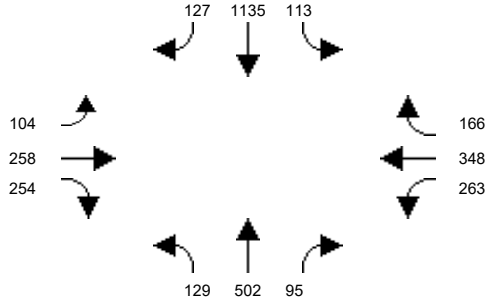


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP AM Peak Hour


Intersection #111: Red Hill Avenue and Valencia Avenue

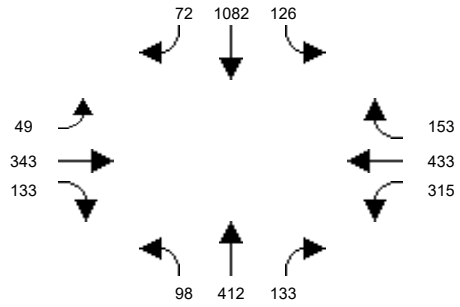


Intersection #112: Tustin Ranch Road and Warner Avenue North

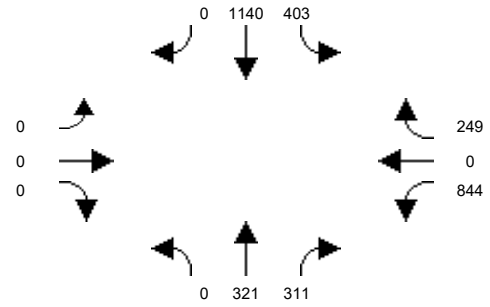


Intersection #113: Tustin Ranch Road and Walnut Avenue

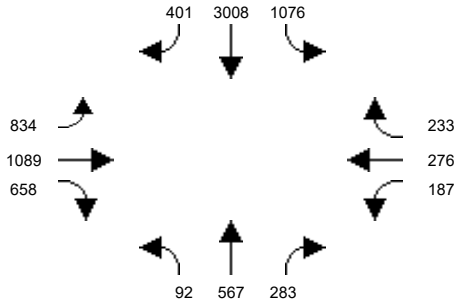

Intersection #114: SR-55 SB Ramps and Irvine Boulevard

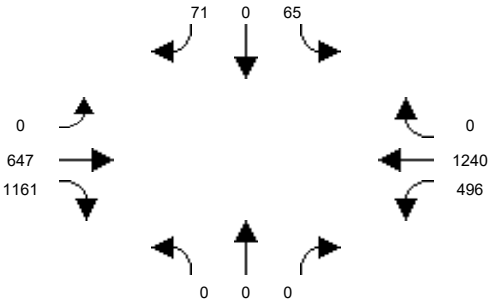

Intersection #115: SR-55 NB Ramps and Irvine Boulevard

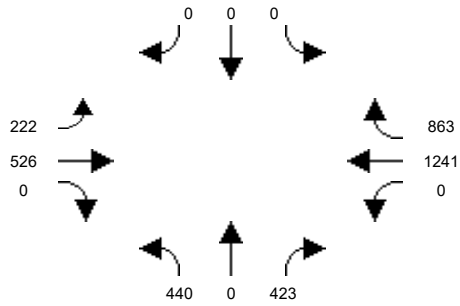

 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

APPENDIX B.4


INTERSECTION VOLUMES –
2045 NP (PM PEAK HOUR)

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP PM Peak Hour


Intersection #1: Euclid St and 1st St

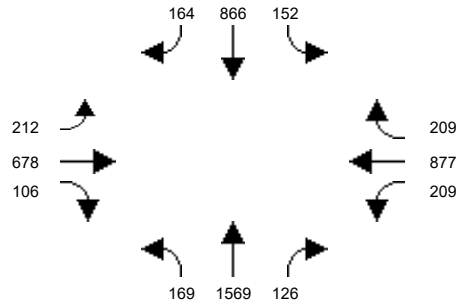


Intersection #2: Euclid St and McFadden Ave

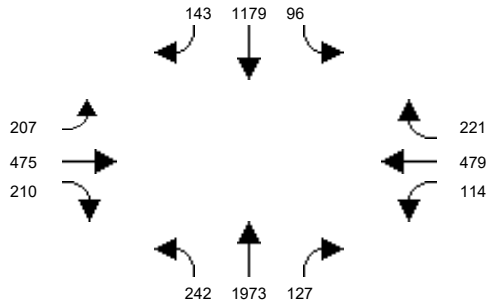


Intersection #3: Euclid St and Edinger Ave

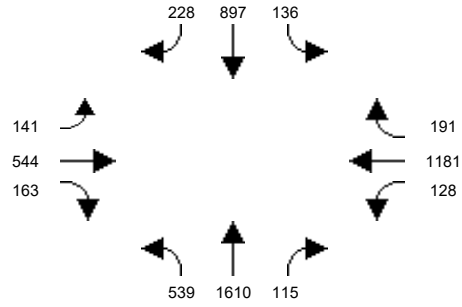


Intersection #4: Newhope St and Hazard Ave

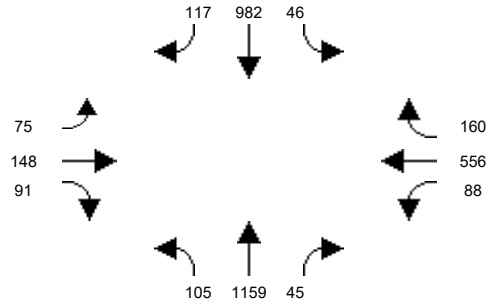


Intersection #5: Newhope St and McFadden Ave

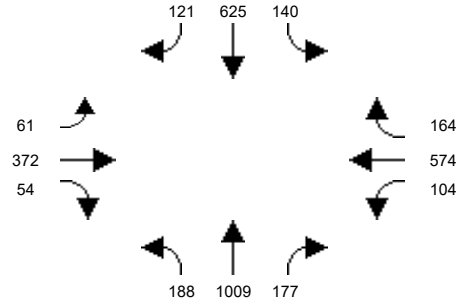


Intersection #6: Harbor Blvd and SR-22 WB Off-Ramp / Banner Dr

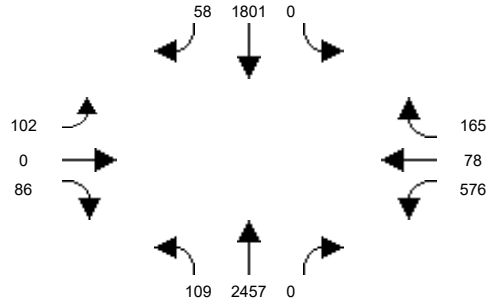


Intersection #7: Trask Avenue and SR-22 EB On-Ramp

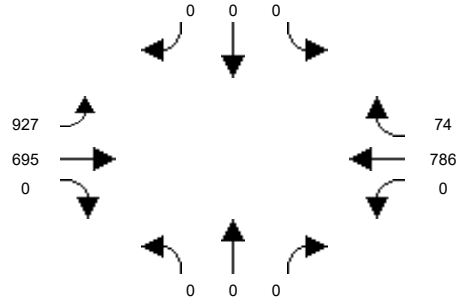


Intersection #8: Harbor Blvd and Westminster Ave

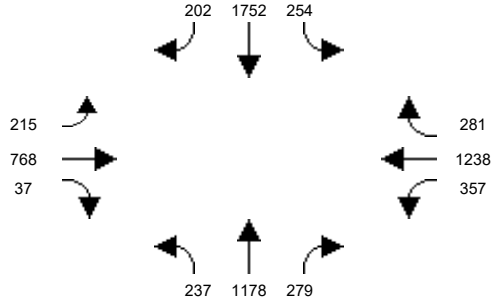

Intersection #9: Harbor Blvd and 1st St

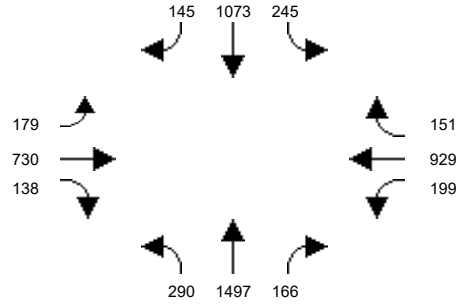

Intersection #10: Harbor Blvd and McFadden Ave

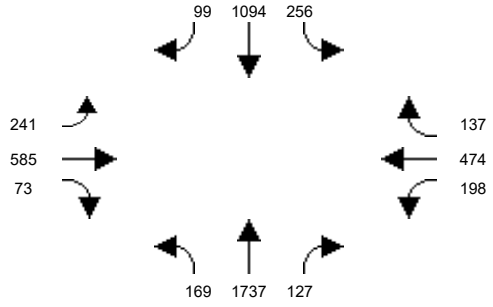


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP PM Peak Hour


Intersection #11: Harbor Blvd and Edinger Ave

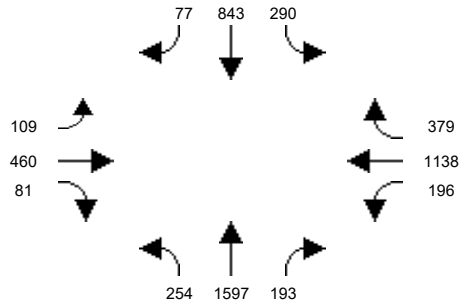


Intersection #12: Harbor Blvd and Warner Ave

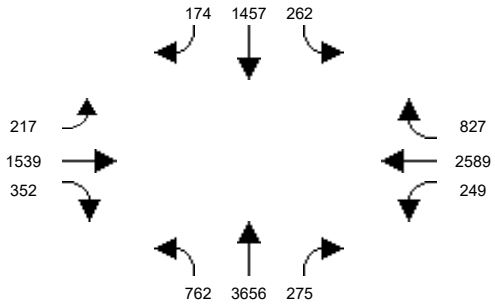


Intersection #13: Harbor Blvd and Segerstrom Ave

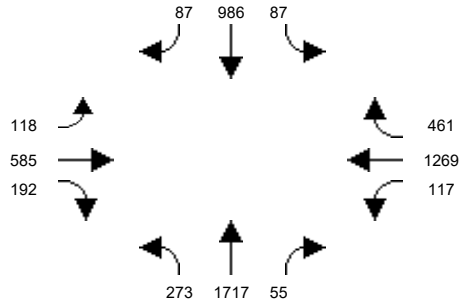


Intersection #14: MacArthur Blvd and Hyland Ave

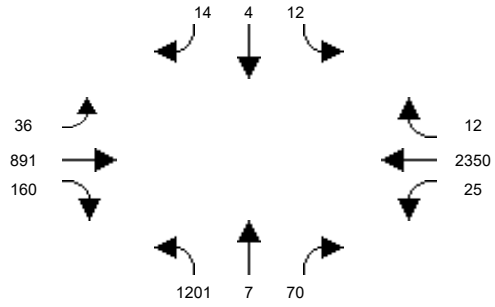


Intersection #15: MacArthur Blvd and Harbor Blvd

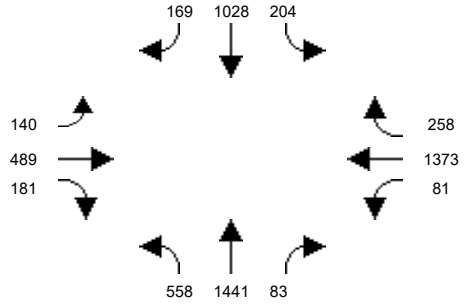


Intersection #16: Harbor Blvd and Sunflower Ave

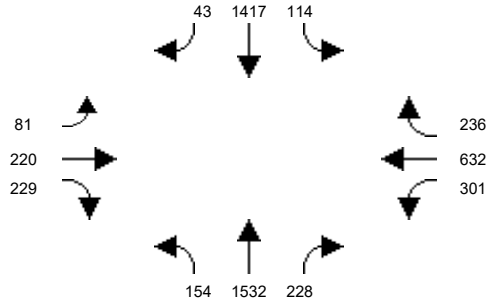


Intersection #17: Harbor Blvd and I-405 NB Off-Ramp

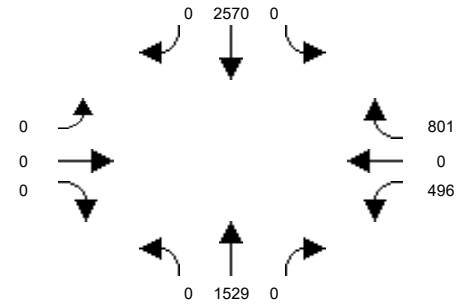


Intersection #18: Harbor Blvd and I-405 SB Off-Ramp

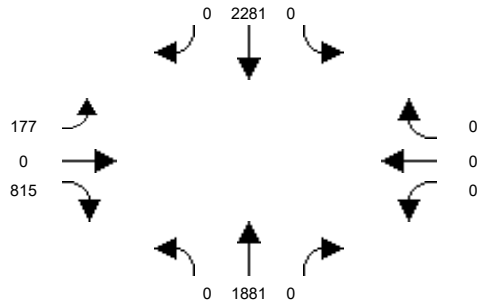

Intersection #19: Fairview St and Civic Center Dr

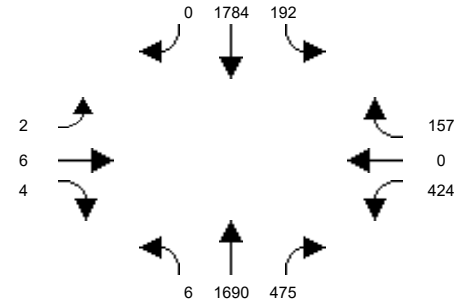

Intersection #20: Fairview St and 1st St

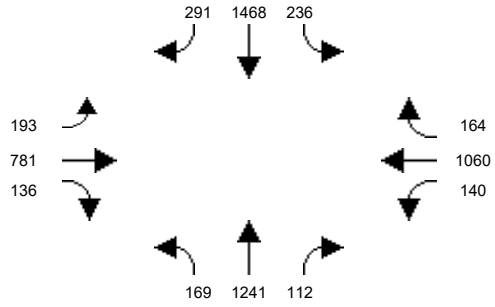


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP PM Peak Hour


Intersection #21: Fairview St and McFadden Ave

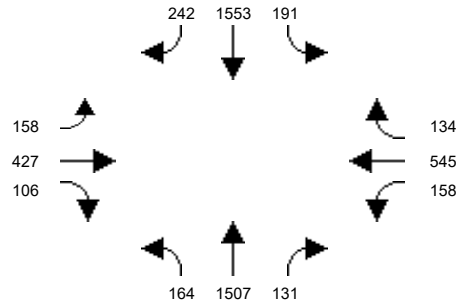


Intersection #22: Fairview St and Edinger Ave

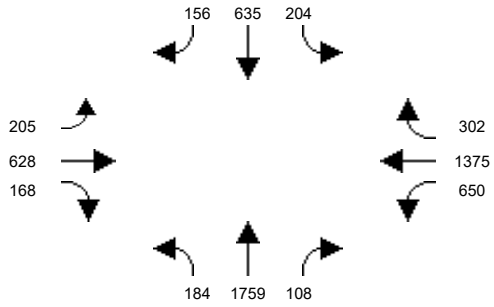


Intersection #23: Fairview St and Warner Ave

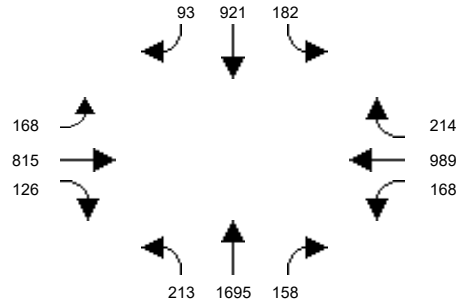


Intersection #24: Fairview St and MacArthur Blvd

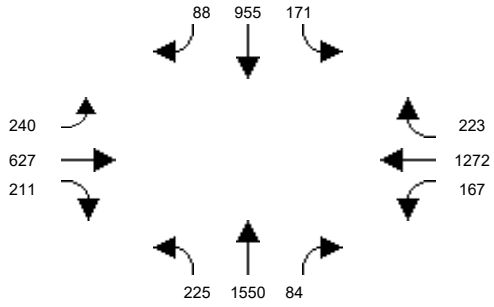


Intersection #25: Fairview Rd and Sunflower Ave

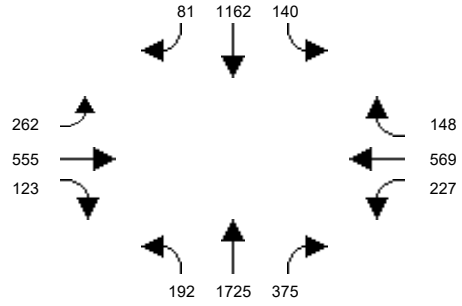


Intersection #26: Greenville St and Edinger Ave

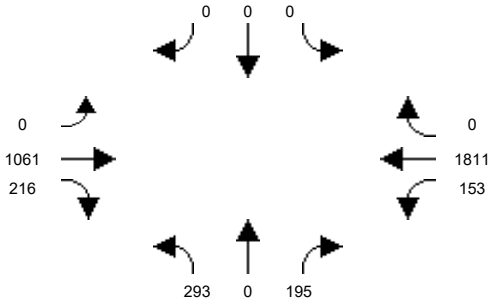


Intersection #27: Greenville St and Segerstrom Ave

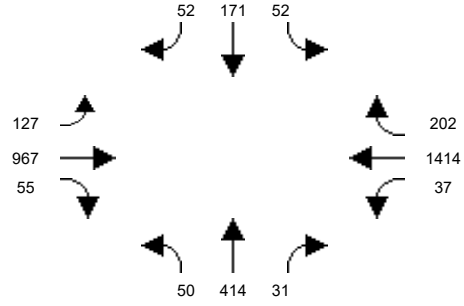


Intersection #28: Raitt St and McFadden Ave

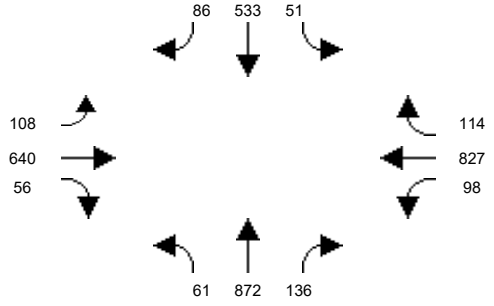

Intersection #29: Raitt St and Edinger Ave

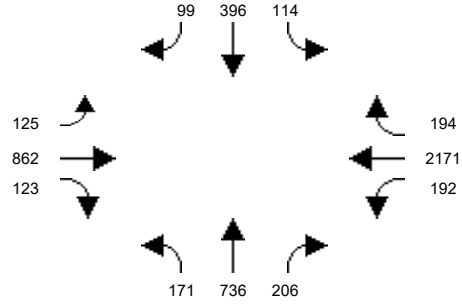

Intersection #30: Bear St and MacArthur Blvd

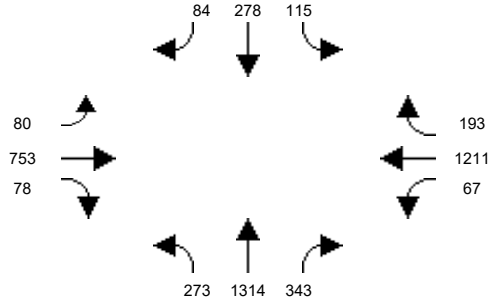


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP PM Peak Hour


Intersection #31: Bristol St and 17th St

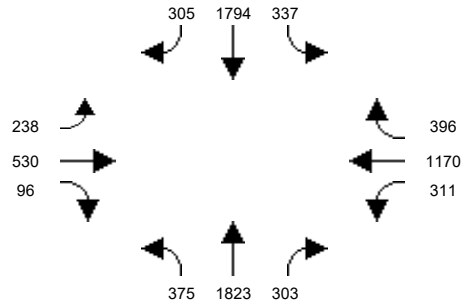


Intersection #32: Bristol St and Civic Center Dr

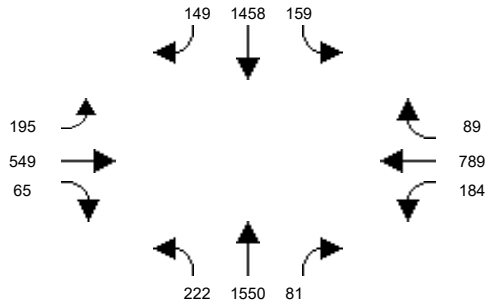


Intersection #33: Bristol St and Santa Ana Blvd

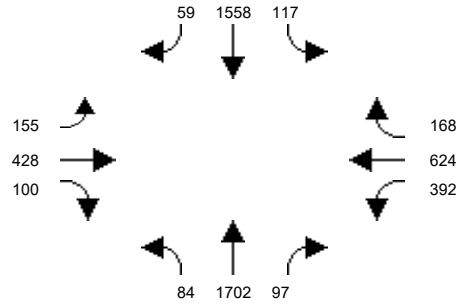


Intersection #34: Bristol St and 1st St

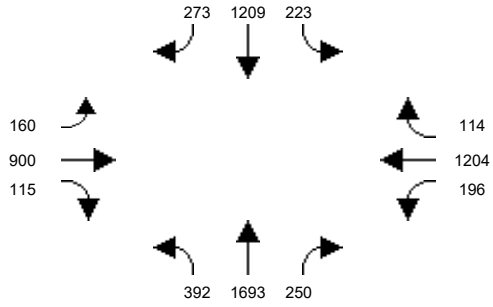


Intersection #35: Bristol St and McFadden Ave

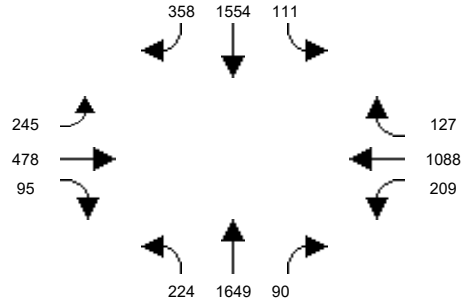


Intersection #36: Bristol St and Warner Ave

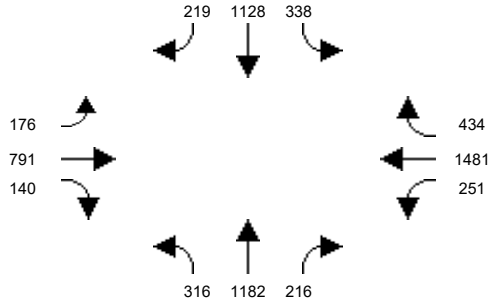


Intersection #37: Bristol St and Segerstrom Ave

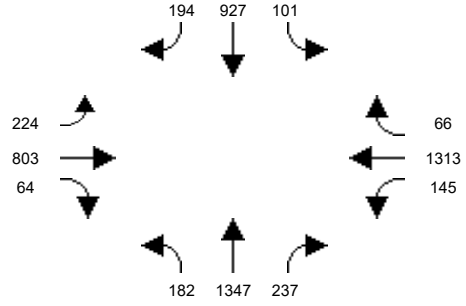


Intersection #38: Bristol St and Alton Ave

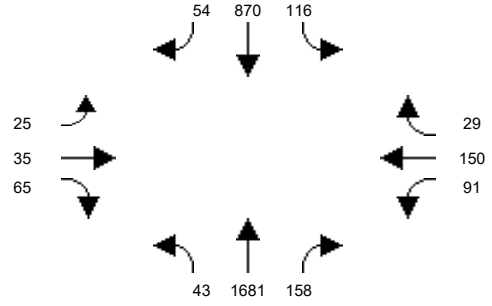

Intersection #39: Bristol St and MacArthur Blvd

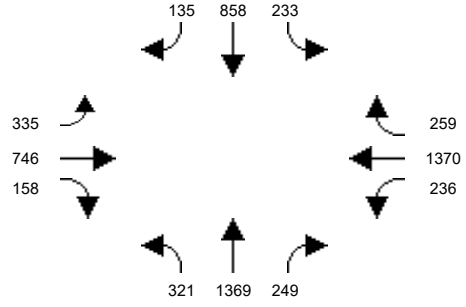

Intersection #40: Bristol St and Sunflower Ave

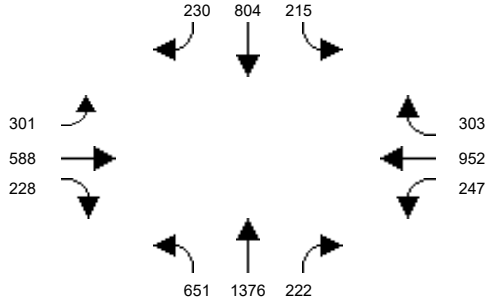


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP PM Peak Hour


Intersection #41: Bristol St and I-405 NB Ramps

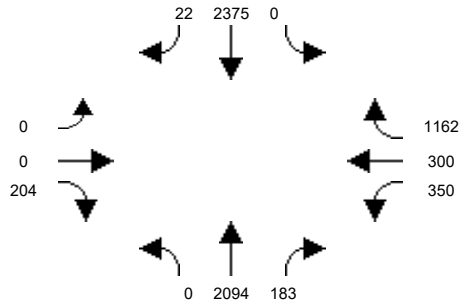


Intersection #42: Bristol St and I-405 SB Ramps

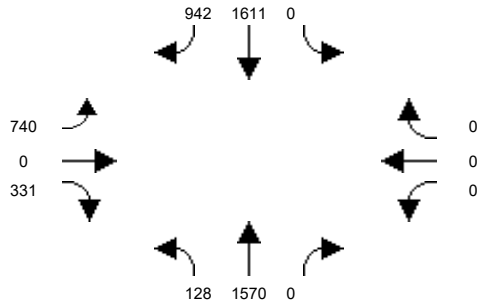


Intersection #43: Flower St and Santa Ana Blvd

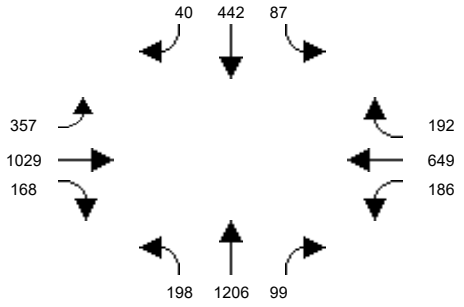


Intersection #44: Flower St and 1st St

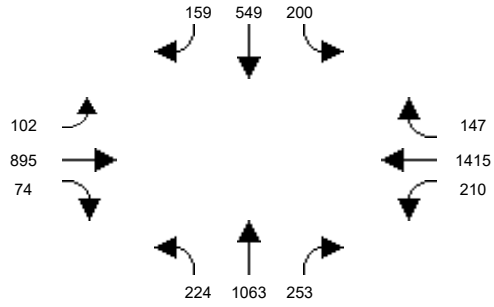


Intersection #45: Flower St and McFadden Ave

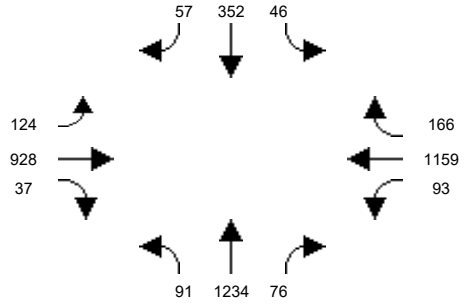


Intersection #46: Flower St and Segerstrom Ave

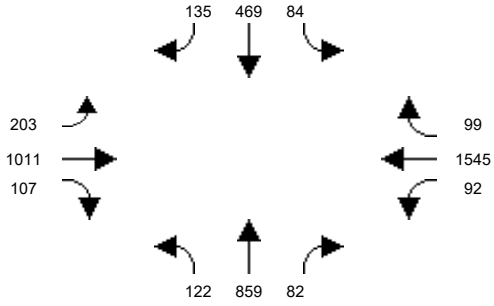


Intersection #47: Flower St and MacArthur Blvd

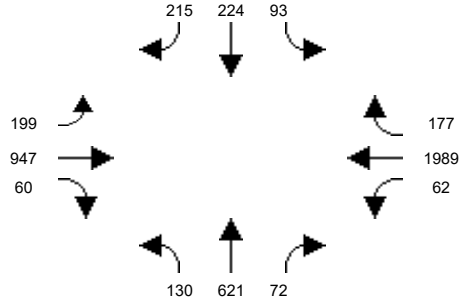


Intersection #48: Main St and La Veta Ave

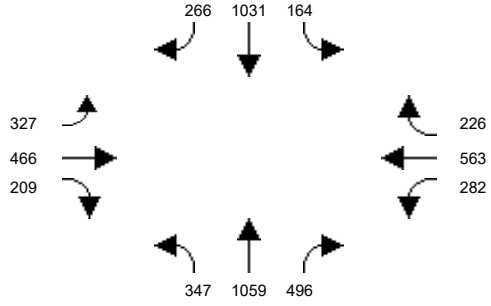

Intersection #49: Main St and Mainplace Dr / Memory Ln

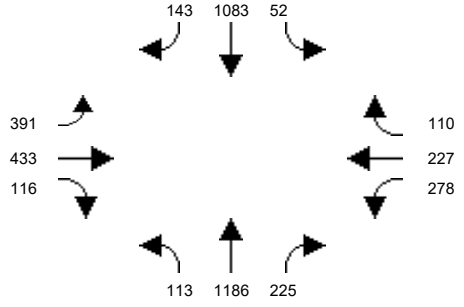

Intersection #50: Main St and 17th St

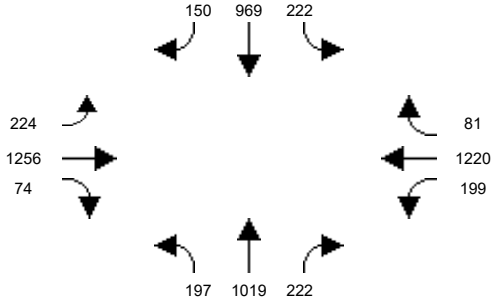


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP PM Peak Hour


Intersection #51: Main St and Civic Center Dr

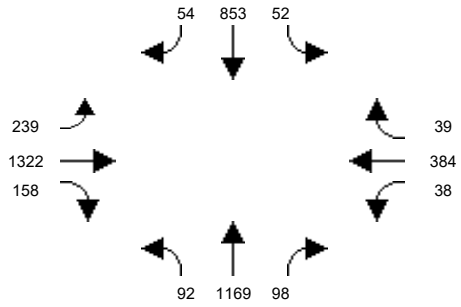


Intersection #52: Main St and Santa Ana Blvd

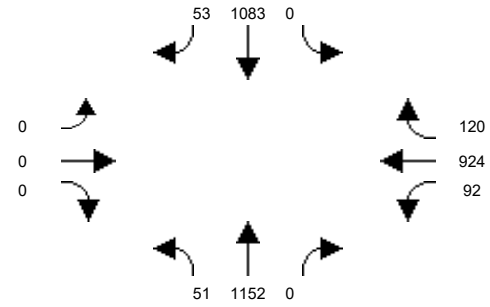


Intersection #53: Main St and 4th St

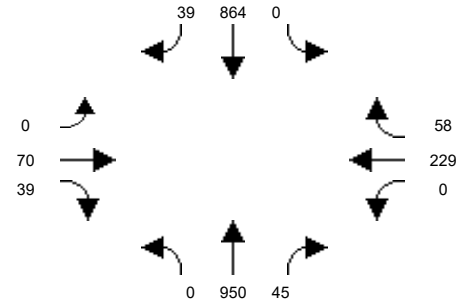


Intersection #54: Main St and 1st St

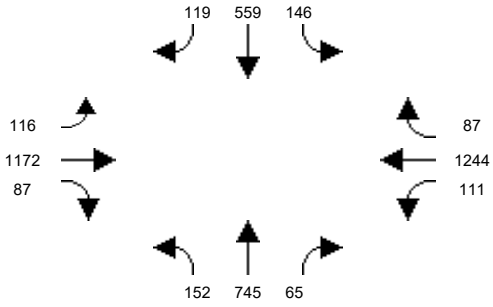


Intersection #55: Main St and McFadden Ave

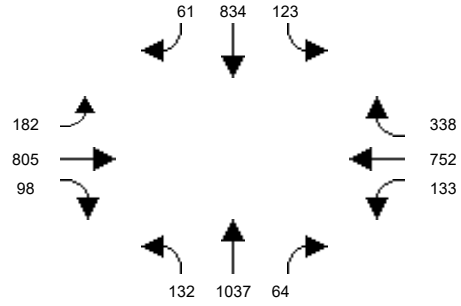


Intersection #56: Main St and Edinger Ave

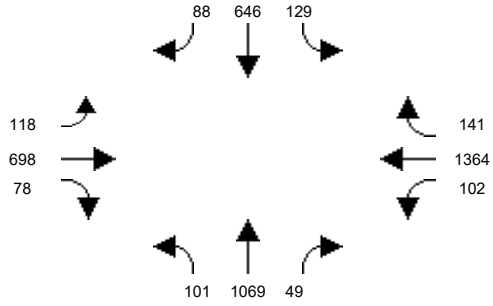


Intersection #57: Main St and MacArthur Blvd

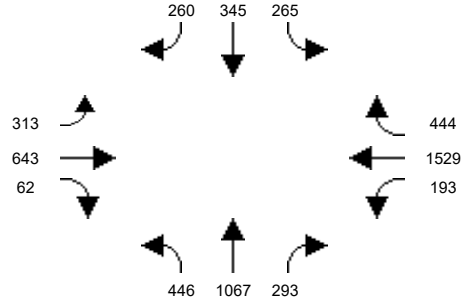


Intersection #58: Penn Wy and 17th St

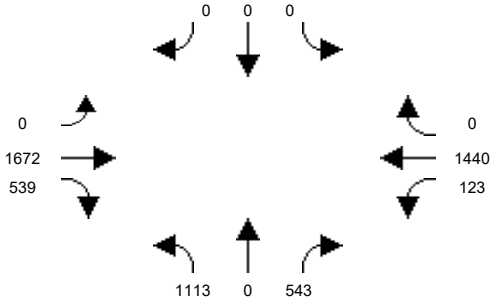

Intersection #59: I-5 NB Off Ramps/17th Street

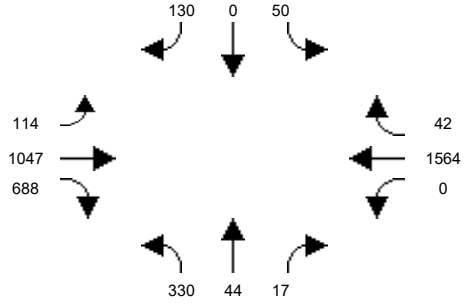

Intersection #60: Penn Wy and I-5 SB Ramps

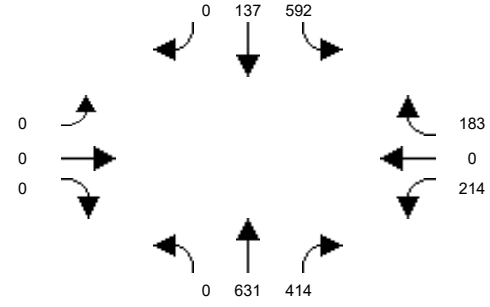


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP PM Peak Hour


Intersection #61: Santiago St and Civic Center Dr

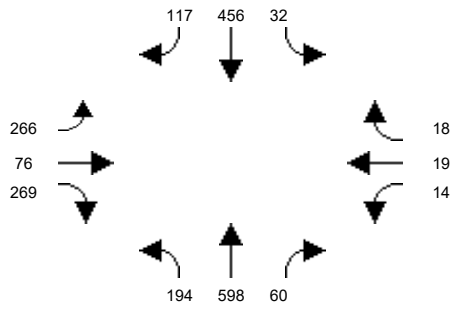


Intersection #62: Santiago St and Santa Ana Blvd

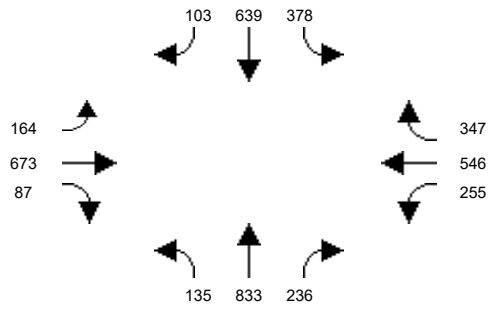


Intersection #63: Standard Ave and 4th St

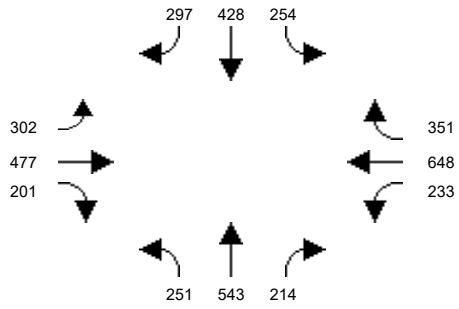


Intersection #64: Standard Ave and 1st St

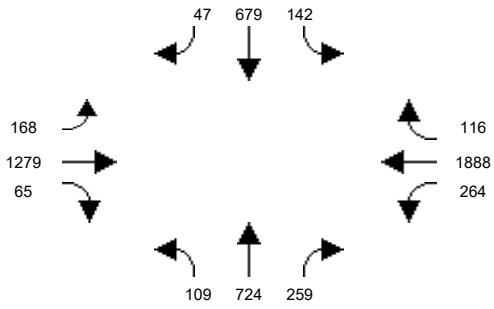


Intersection #65: Standard Ave and Mcfadden Ave

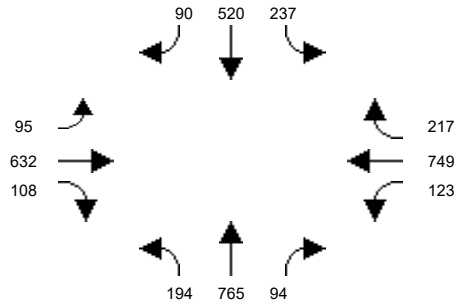


Intersection #66: Halladay St and Warner Ave

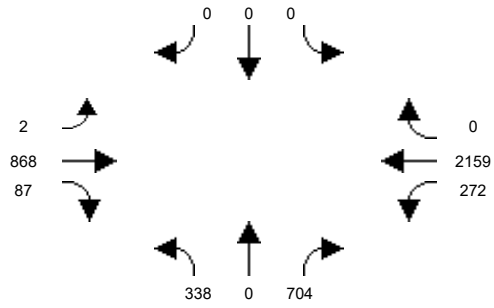


Intersection #67: Halladay St and Dyer Rd

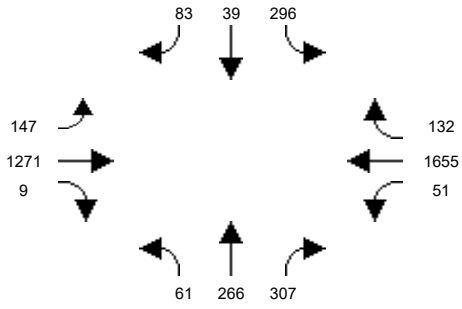


Intersection #68: SR-55 SB Ramps and MacArthur Blvd

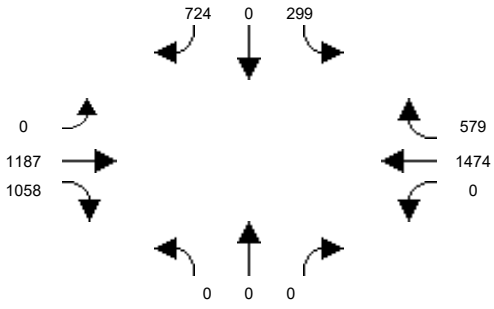

Intersection #69: SR-55 NB Ramps and MacArthur Blvd

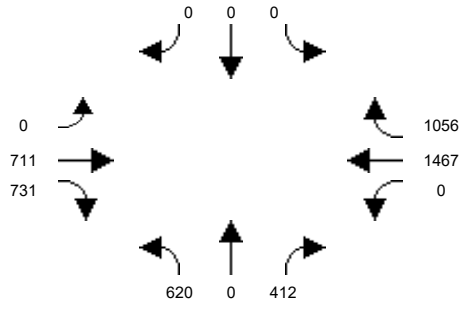

Intersection #70: SR-55 SB Ramps and Dyer Rd

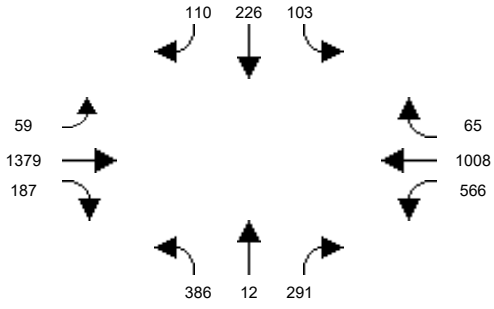


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP PM Peak Hour


Intersection #71: Glassell St and La Veta Ave

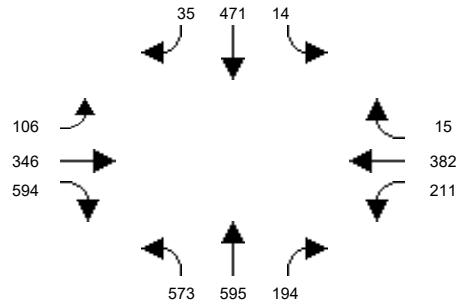


Intersection #72: Glassell St and SR-22 WB Ramps

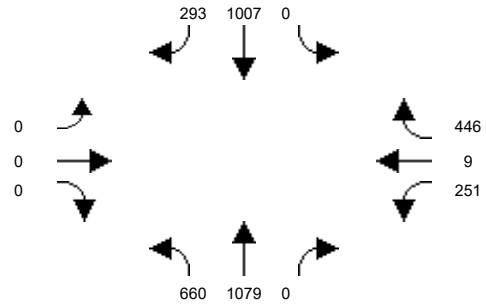


Intersection #73: Grand Ave / Glassell St and SR-22 EB Ramps

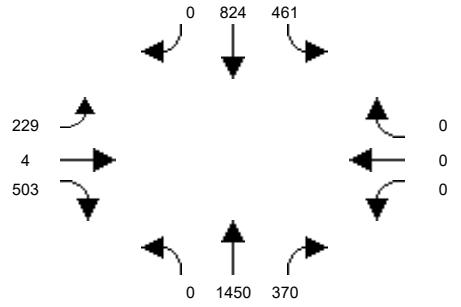


Intersection #74: Grand Ave and Fairhaven Ave

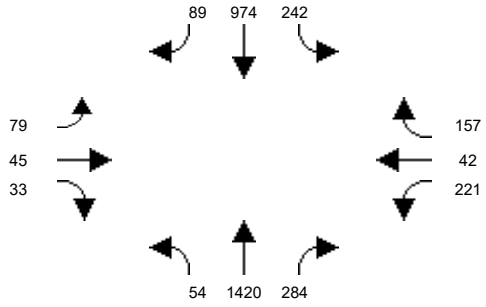


Intersection #75: Grand Ave and Santa Clara Ave

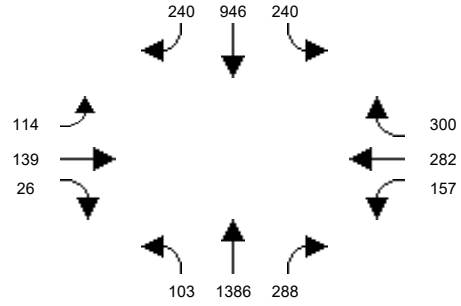


Intersection #76: Grand Ave and 17th St

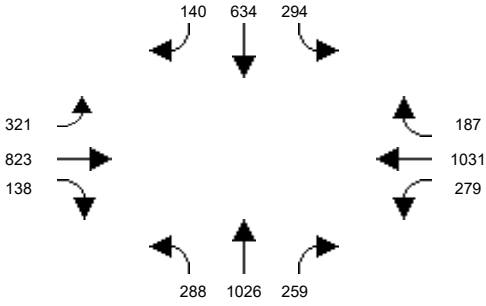


Intersection #77: Grand Ave and I-5 NB Ramps

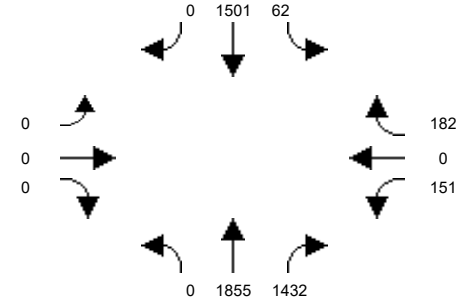


Intersection #78: Grand Ave and Santa Ana Blvd

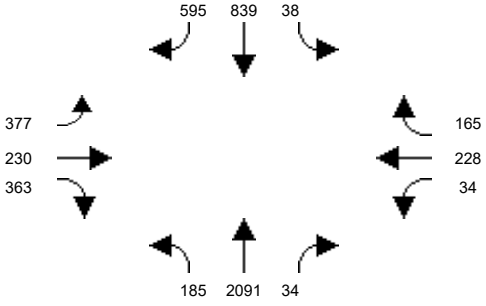

Intersection #79: Grand Ave and 1st St

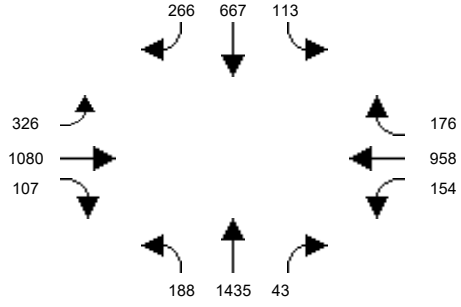

Intersection #80: Grand Ave and Chestnut Ave

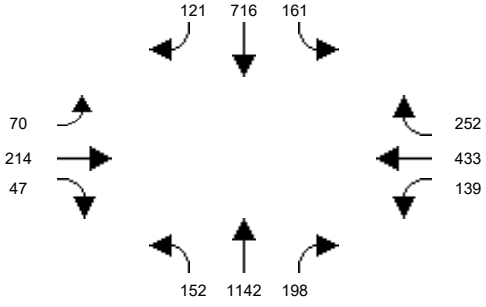


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP PM Peak Hour


Intersection #81: Grand Ave and McFadden Ave

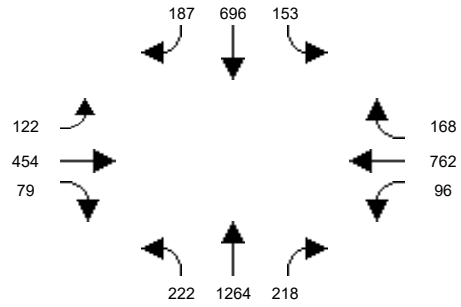


Intersection #82: Grand Ave and Edinger Ave

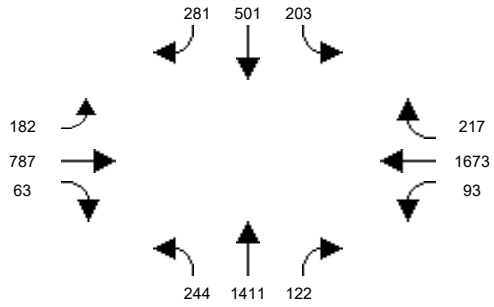


Intersection #83: Grand Ave and Warner Ave

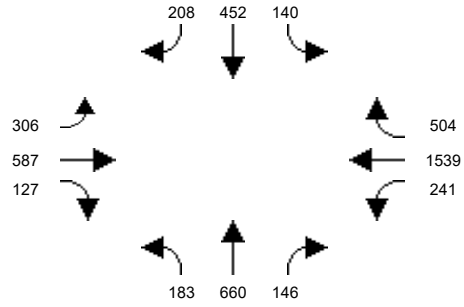


Intersection #84: SR-55 NB Ramps and Dyer Rd

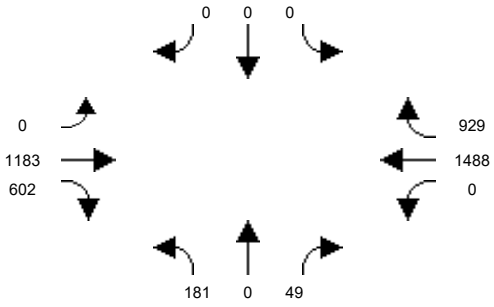


Intersection #85: Cambridge St and La Veta Ave

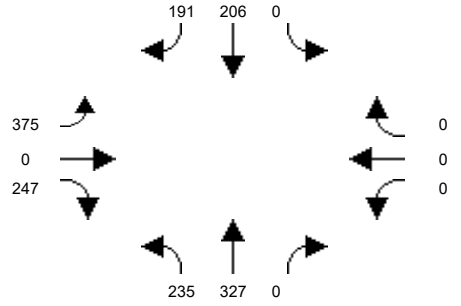


Intersection #86: Cambridge St and Fairhaven Ave

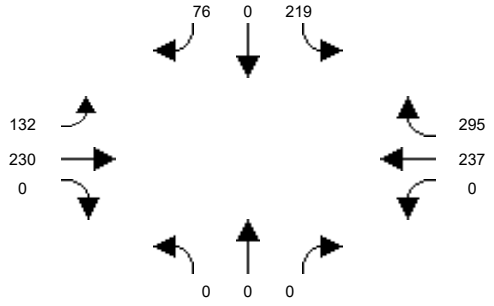


Intersection #87: Mabury St and 1st Street

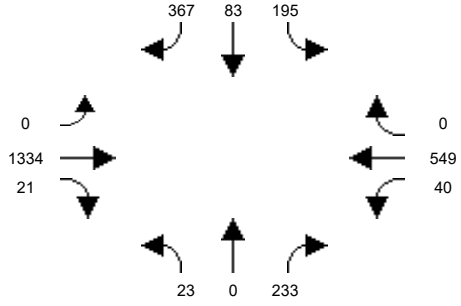


Intersection #88: Tustin St and La Veta Ave

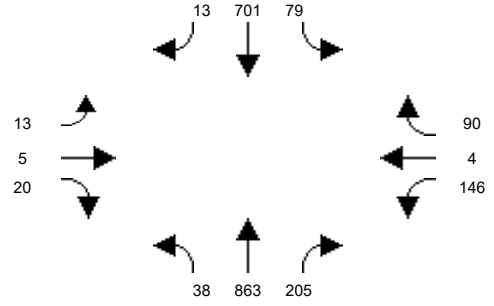

Intersection #89: Tustin St and SR-22 WB On-Ramp

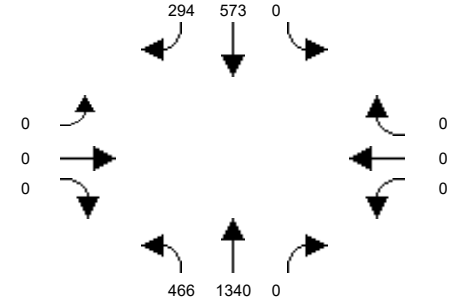

Intersection #90: Tustin St and SR-22 EB Off-Ramp / Seba Ave

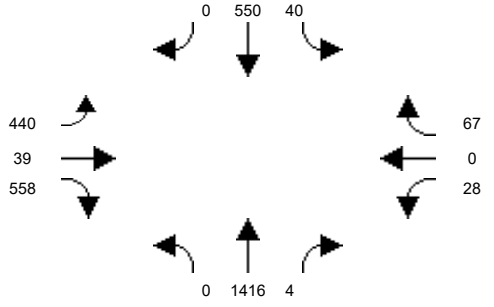


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP PM Peak Hour


Intersection #91: Tustin Ave and Fairhaven Ave

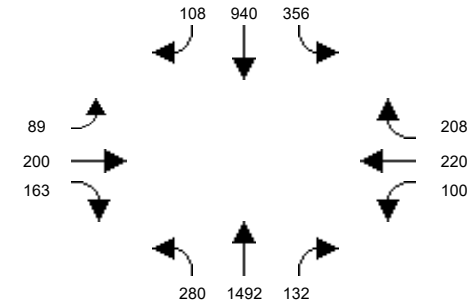


Intersection #92: Tustin Ave and Santa Clara Ave

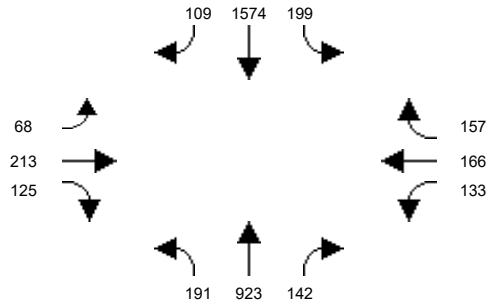


Intersection #93: Tustin Ave and 17th St

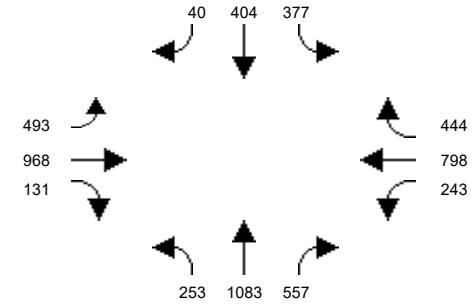


Intersection #94: Tustin Ave and 4th St

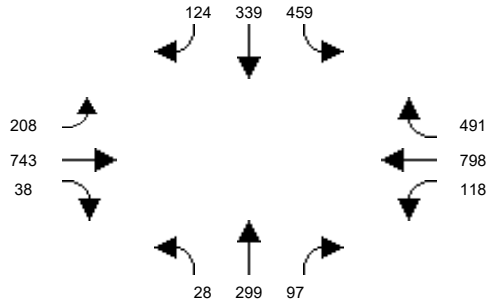


Intersection #95: SR-55 SB Ramps / Auto Mall Dr and Edinger Ave

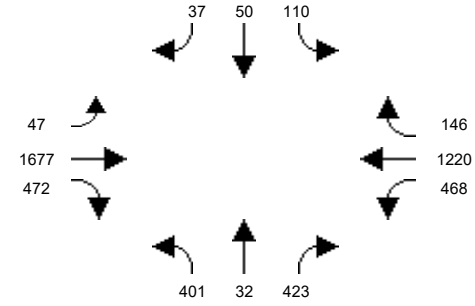


Intersection #96: SR-55 NB Ramps / Del Amo Ave and Newport Avenue

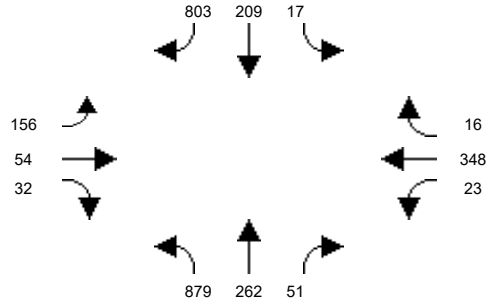


Intersection #97: Red Hill Ave and Edinger Ave

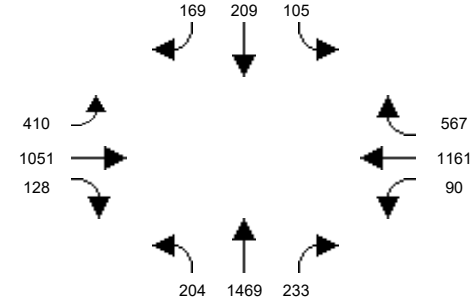


Intersection #98: Red Hill Ave and Warner Ave

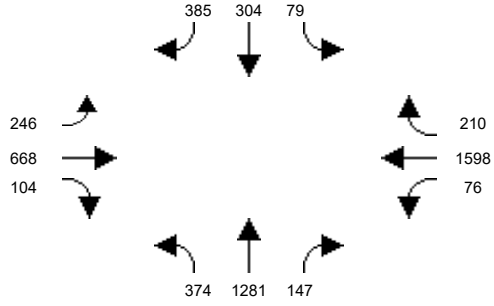

Intersection #99: Red Hill Ave and Dyer Rd / barranca Pkwy

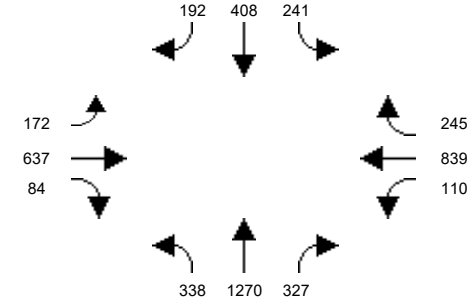

Intersection #100: Red Hill Ave and Alton Pkwy

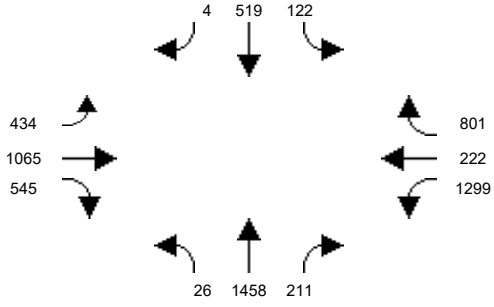


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP PM Peak Hour


Intersection #101: Red Hill Ave and MacArthur Blvd

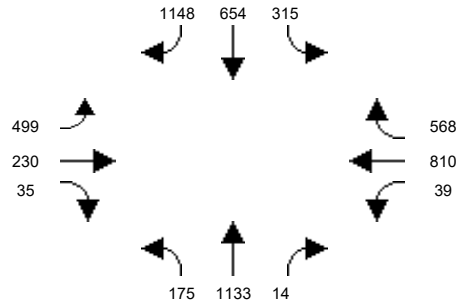


Intersection #102: Red Hill Ave and Main St

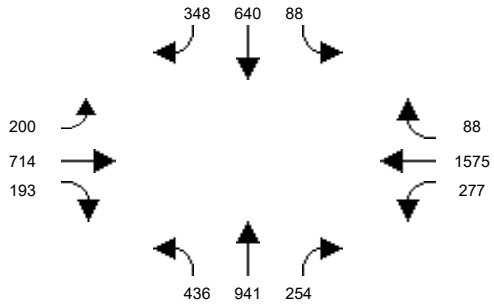


Intersection #103: I-5 SB Ramps and Santa Ana Blvd

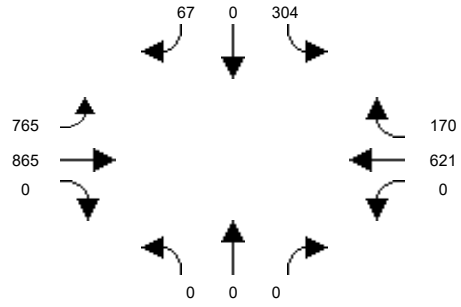


Intersection #104: Tustin Ranch Rd and Warner Ave

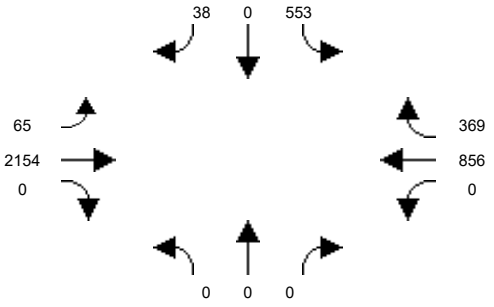


Intersection #105: Von Karman Ave and Barranca Pkwy

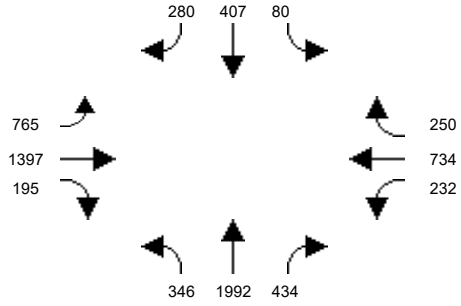


Intersection #106: Red Hill Avenue and El Camino Real

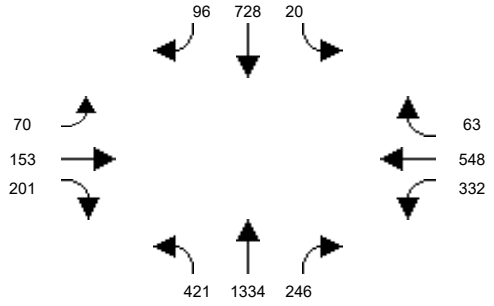


Intersection #107: Red Hill Avenue and I-5 NB Ramps

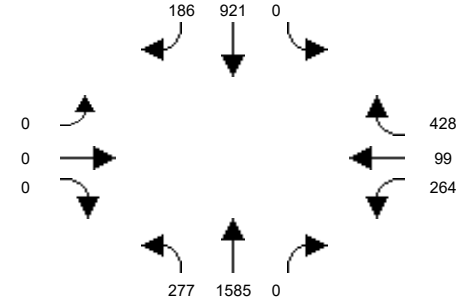


Intersection #108: Red Hill Avenue and I-5 SB Ramps

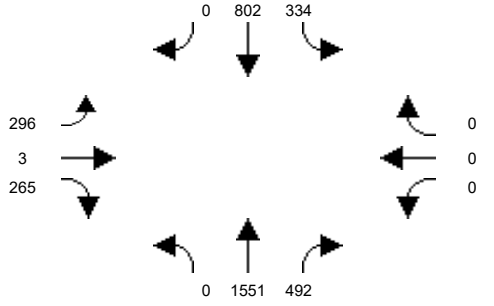

Intersection #109: Red Hill Avenue and Nisson Road

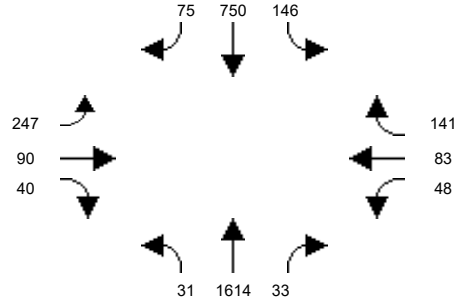

Intersection #110: Red Hill Avenue and Walnut Avenue

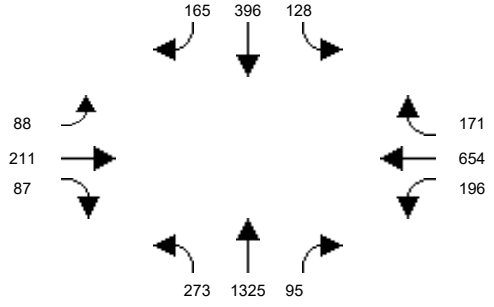


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 NP PM Peak Hour


Intersection #111: Red Hill Avenue and Valencia Avenue

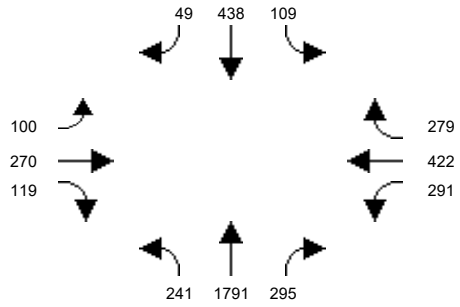


Intersection #112: Tustin Ranch Road and Warner Avenue North

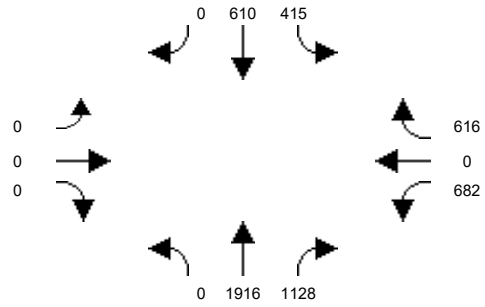


Intersection #113: Tustin Ranch Road and Walnut Avenue

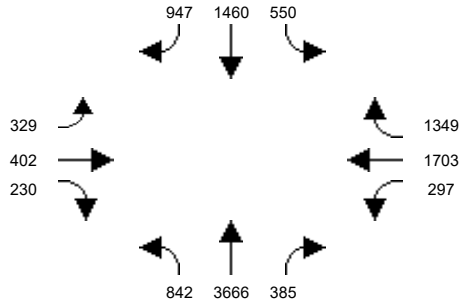

Intersection #114: SR-55 SB Ramps and Irvine Boulevard

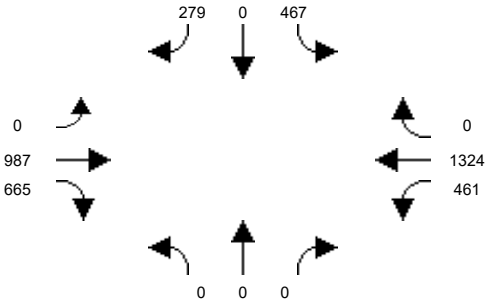

Intersection #115: SR-55 NB Ramps and Irvine Boulevard

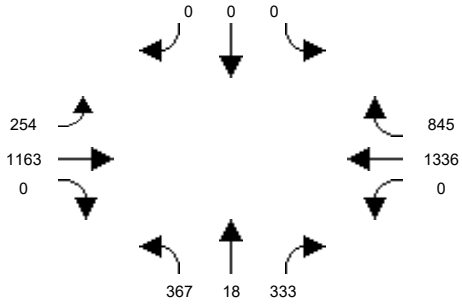

Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

APPENDIX B.5


INTERSECTION VOLUMES –
2045 WP (AM PEAK HOUR)

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP AM Peak Hour


Intersection #1: Euclid St and 1st St

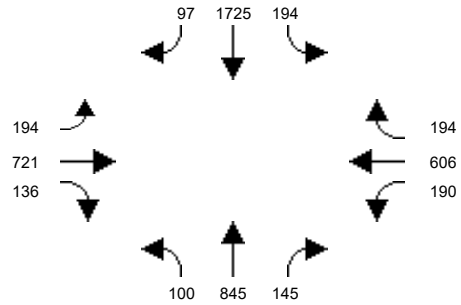


Intersection #2: Euclid St and McFadden Ave

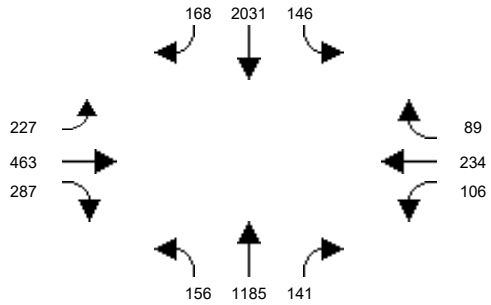


Intersection #3: Euclid St and Edinger Ave

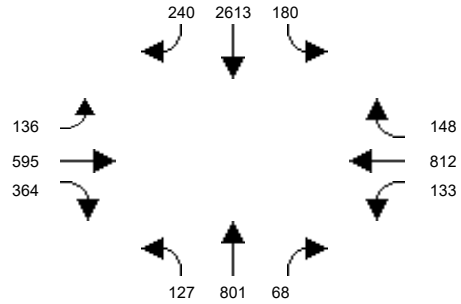


Intersection #4: Newhope St and Hazard Ave

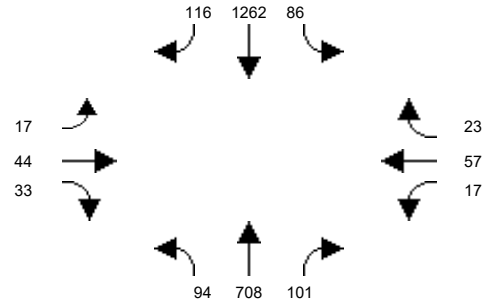


Intersection #5: Newhope St and McFadden Ave

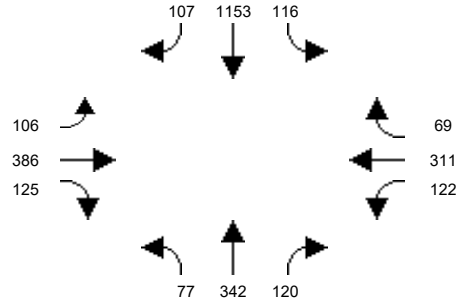


Intersection #6: Harbor Blvd and SR-22 WB Off-Ramp / Banner Dr

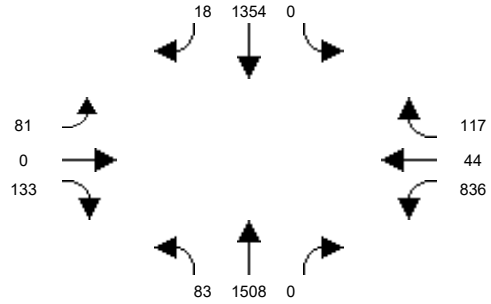


Intersection #7: Trask Avenue and SR-22 EB On-Ramp

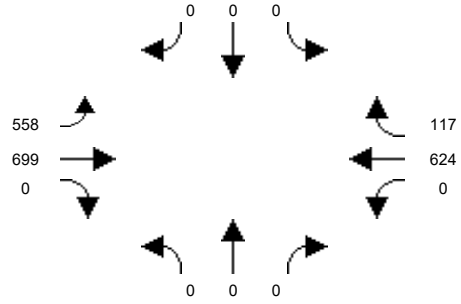


Intersection #8: Harbor Blvd and Westminster Ave

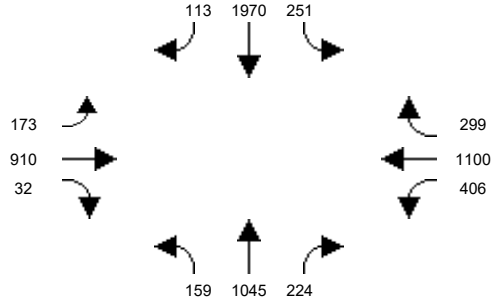

Intersection #9: Harbor Blvd and 1st St

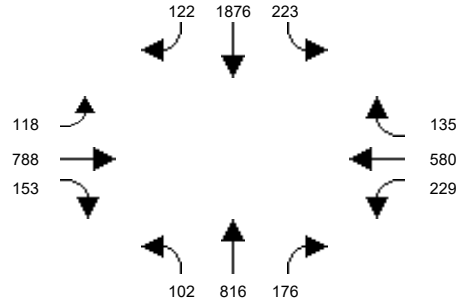

Intersection #10: Harbor Blvd and McFadden Ave

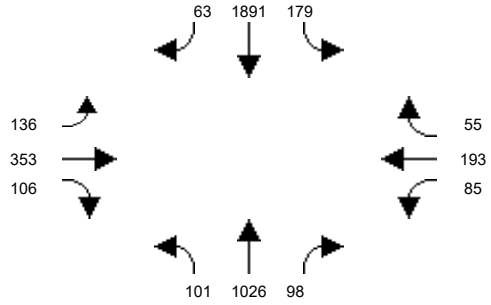


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP AM Peak Hour


Intersection #11: Harbor Blvd and Edinger Ave

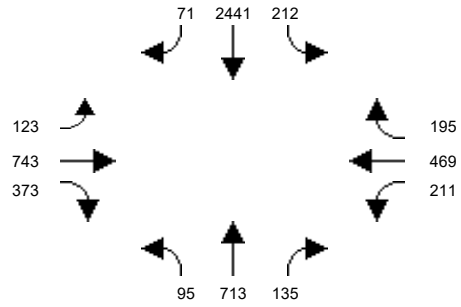


Intersection #12: Harbor Blvd and Warner Ave

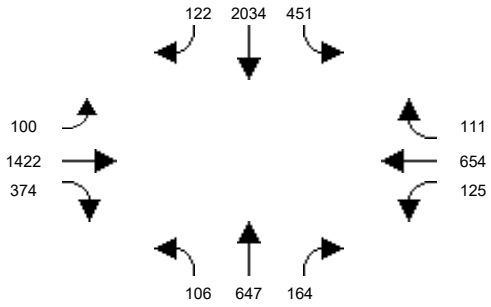


Intersection #13: Harbor Blvd and Segerstrom Ave

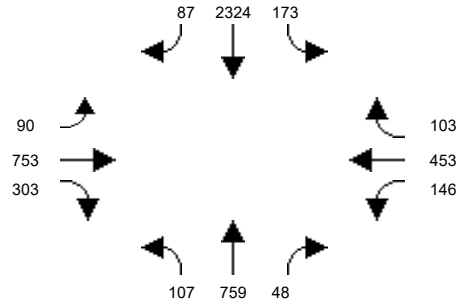


Intersection #14: MacArthur Blvd and Hyland Ave

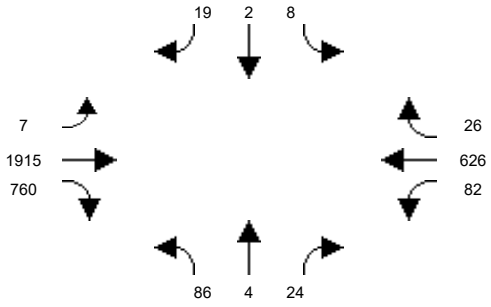


Intersection #15: MacArthur Blvd and Harbor Blvd

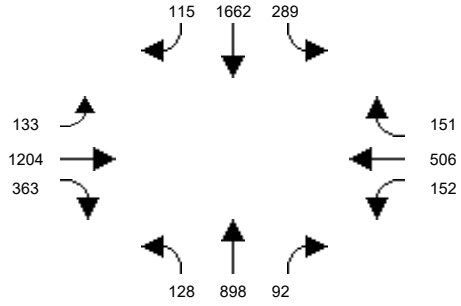


Intersection #16: Harbor Blvd and Sunflower Ave

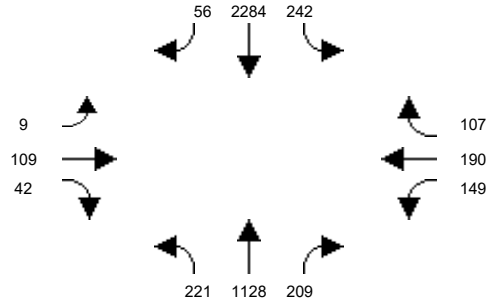


Intersection #17: Harbor Blvd and I-405 NB Off-Ramp

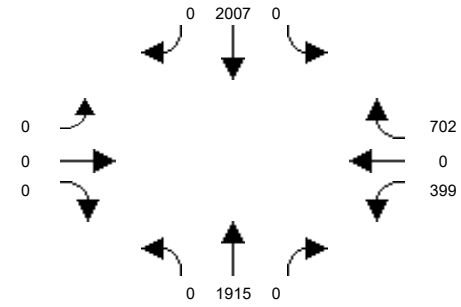


Intersection #18: Harbor Blvd and I-405 SB Off-Ramp

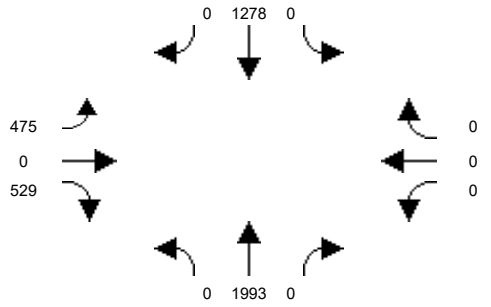

Intersection #19: Fairview St and Civic Center Dr

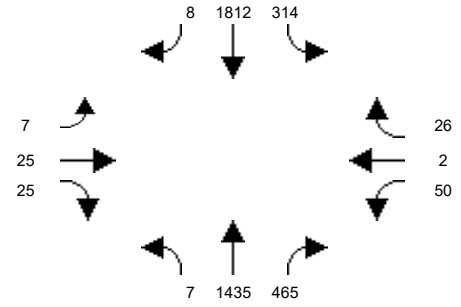

Intersection #20: Fairview St and 1st St

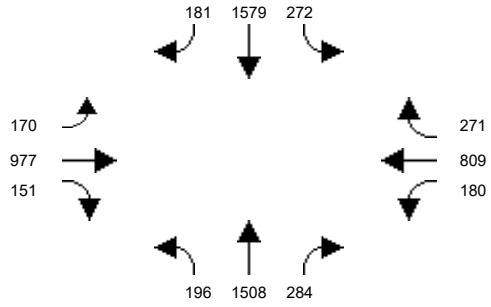


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP AM Peak Hour


Intersection #21: Fairview St and McFadden Ave

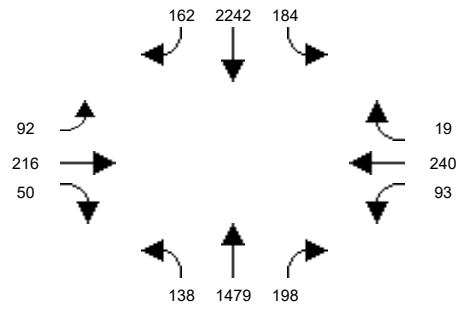


Intersection #22: Fairview St and Edinger Ave

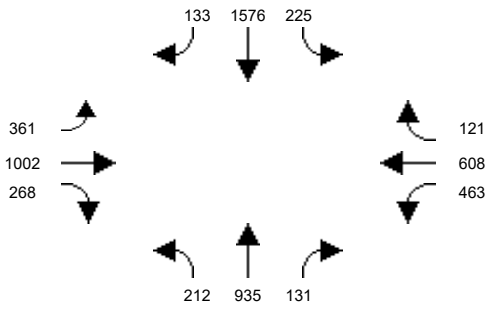


Intersection #23: Fairview St and Warner Ave

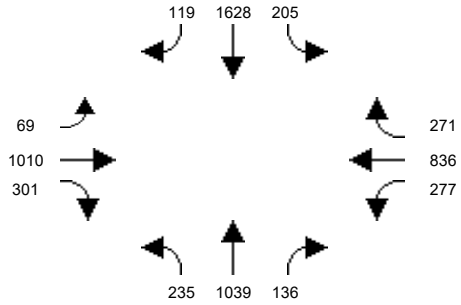


Intersection #24: Fairview St and MacArthur Blvd

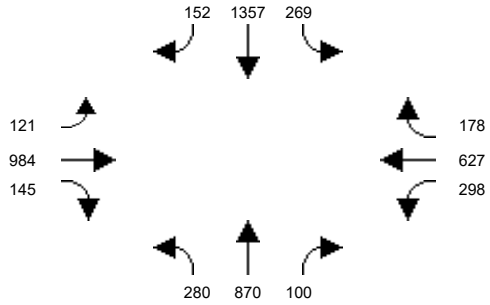


Intersection #25: Fairview Rd and Sunflower Ave

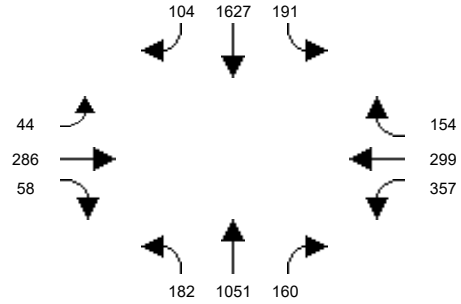


Intersection #26: Greenville St and Edinger Ave

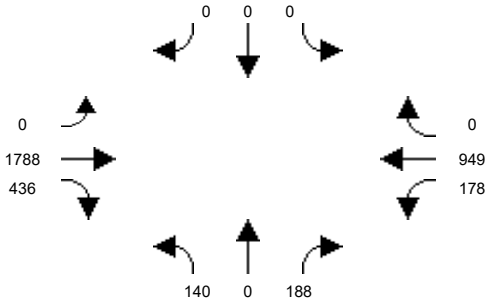


Intersection #27: Greenville St and Segerstrom Ave

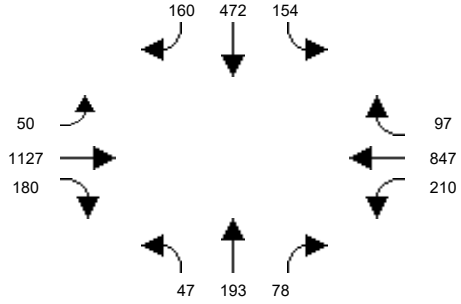


Intersection #28: Raitt St and McFadden Ave

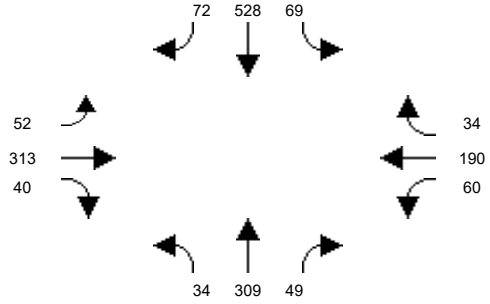

Intersection #29: Raitt St and Edinger Ave

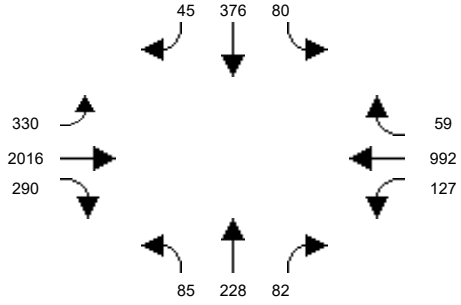

Intersection #30: Bear St and MacArthur Blvd

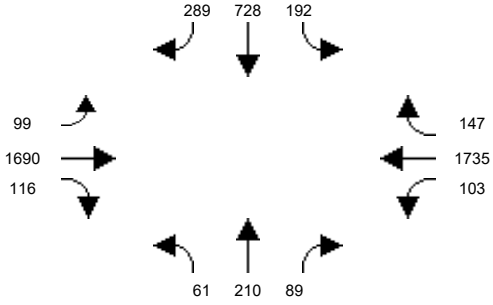


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP AM Peak Hour


Intersection #31: Bristol St and 17th St

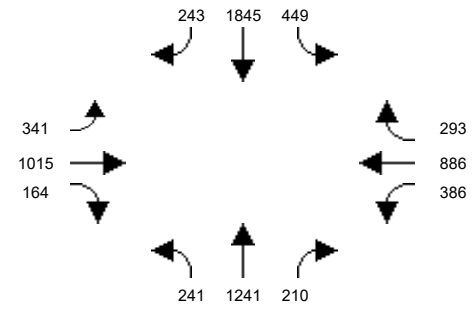


Intersection #32: Bristol St and Civic Center Dr

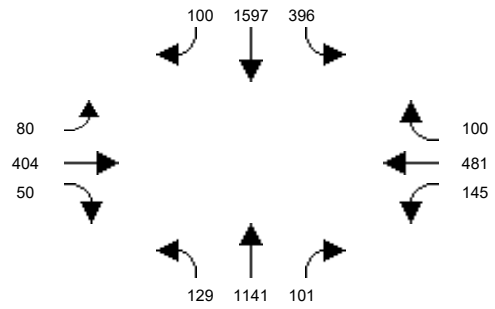


Intersection #33: Bristol St and Santa Ana Blvd

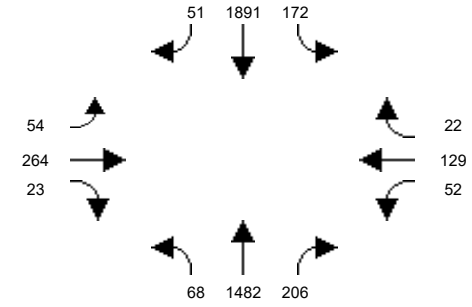


Intersection #34: Bristol St and 1st St

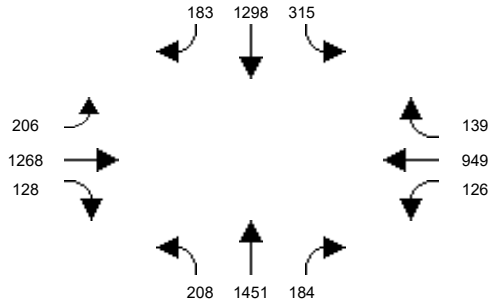


Intersection #35: Bristol St and McFadden Ave

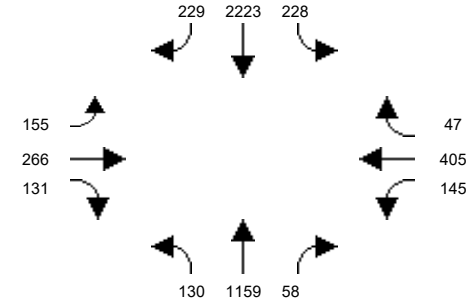


Intersection #36: Bristol St and Warner Ave

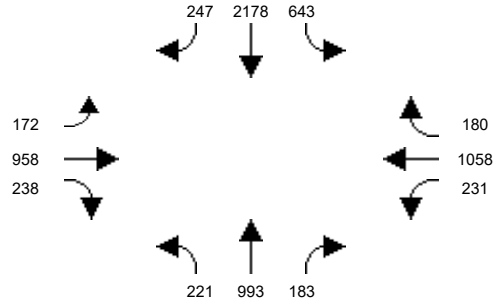


Intersection #37: Bristol St and Segerstrom Ave

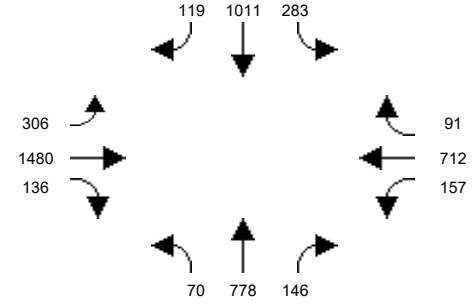


Intersection #38: Bristol St and Alton Ave

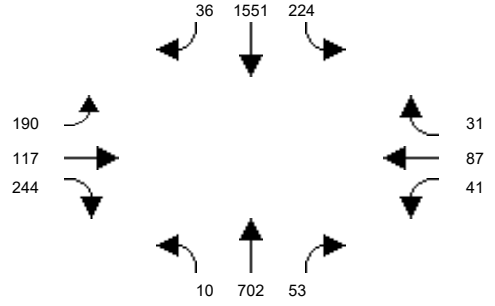

Intersection #39: Bristol St and MacArthur Blvd

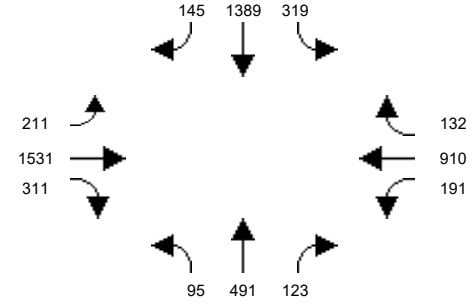

Intersection #40: Bristol St and Sunflower Ave

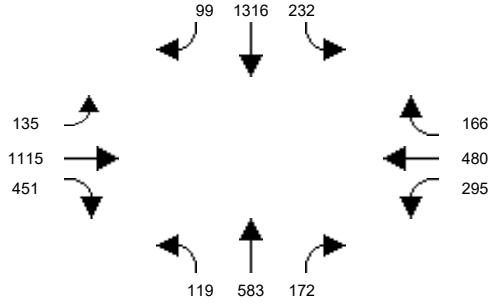


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP AM Peak Hour


Intersection #41: Bristol St and I-405 NB Ramps

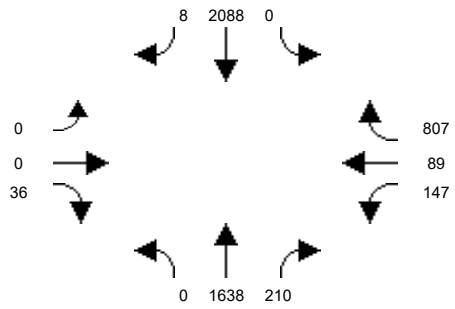


Intersection #42: Bristol St and I-405 SB Ramps

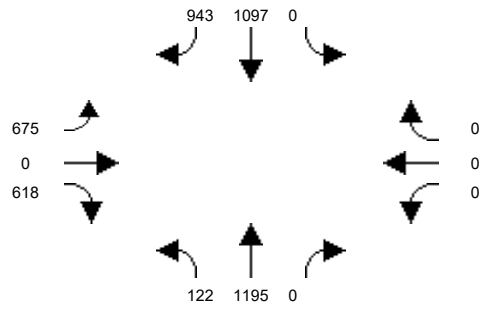


Intersection #43: Flower St and Santa Ana Blvd

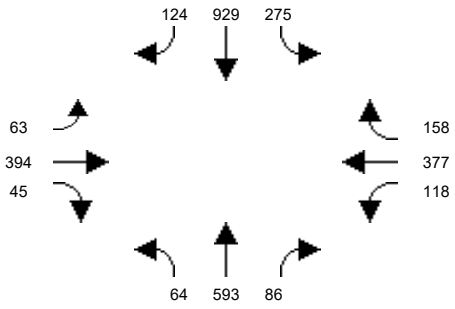


Intersection #44: Flower St and 1st St

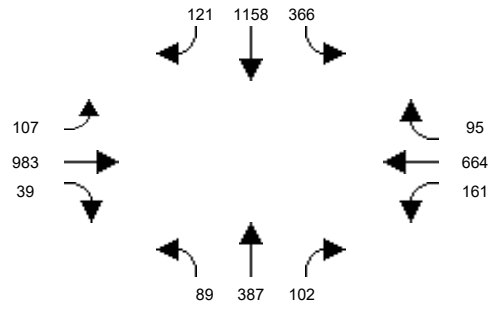


Intersection #45: Flower St and McFadden Ave

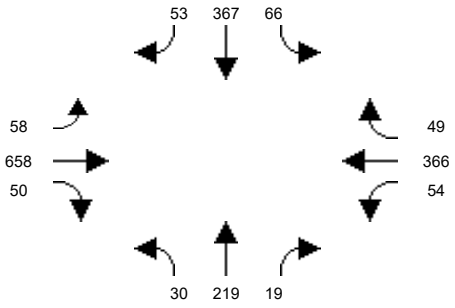


Intersection #46: Flower St and Segerstrom Ave

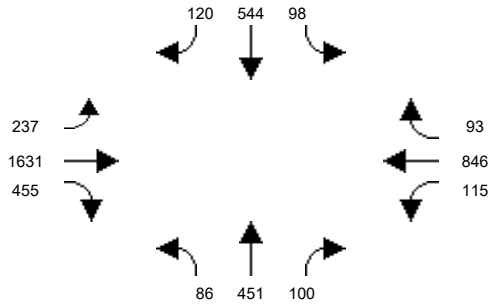


Intersection #47: Flower St and MacArthur Blvd

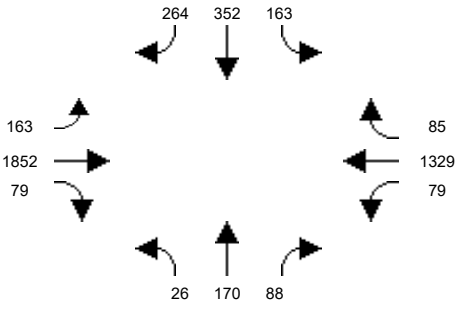


Intersection #48: Main St and La Veta Ave

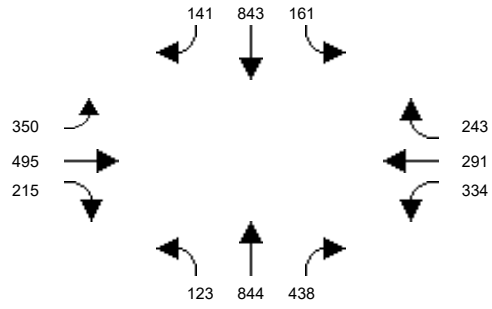

Intersection #49: Main St and Mainplace Dr / Memory Ln

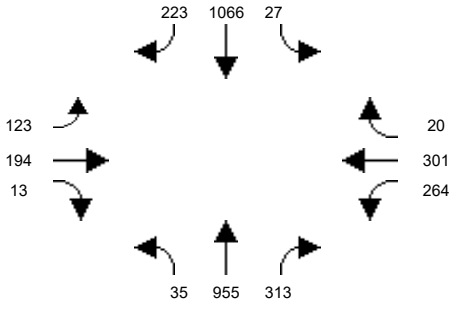

Intersection #50: Main St and 17th St

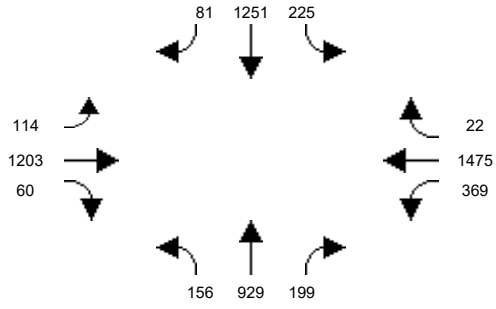


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP AM Peak Hour


Intersection #51: Main St and Civic Center Dr

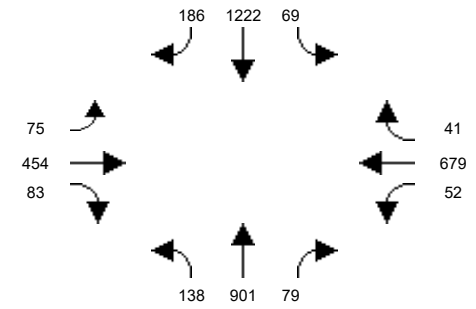


Intersection #52: Main St and Santa Ana Blvd

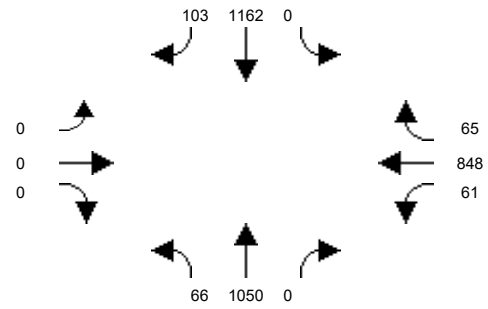


Intersection #53: Main St and 4th St

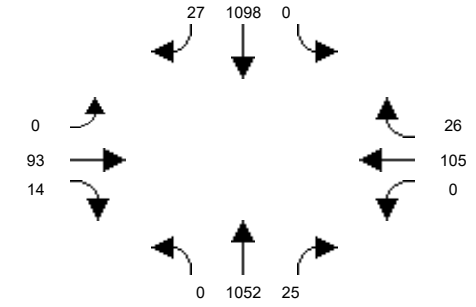


Intersection #54: Main St and 1st St

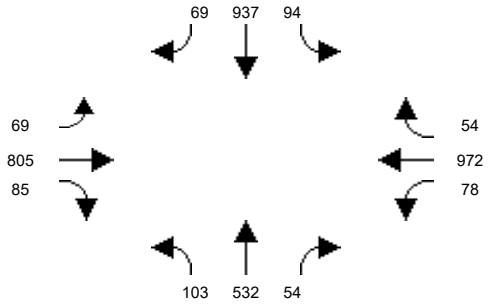


Intersection #55: Main St and McFadden Ave

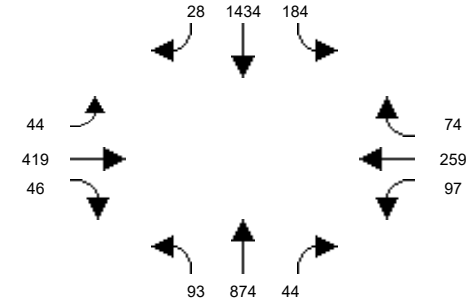


Intersection #56: Main St and Edinger Ave

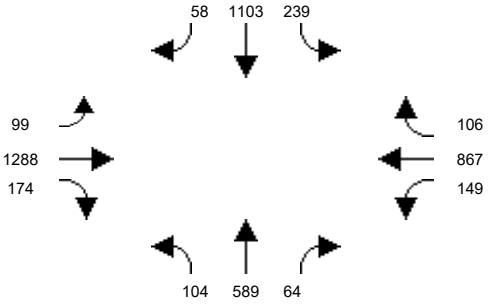


Intersection #57: Main St and MacArthur Blvd

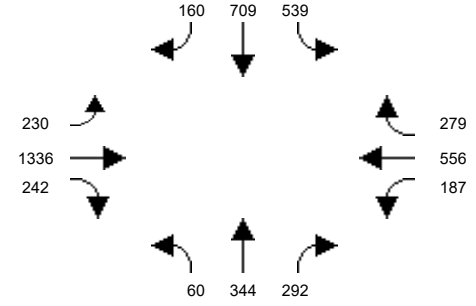


Intersection #58: Penn Wy and 17th St

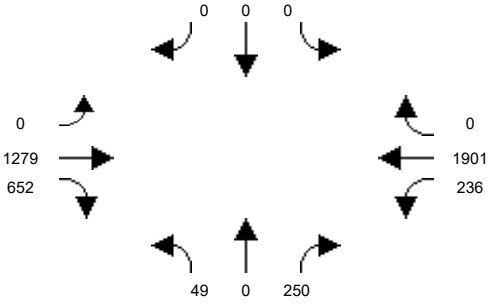

Intersection #59: I-5 NB Off Ramps/17th Street

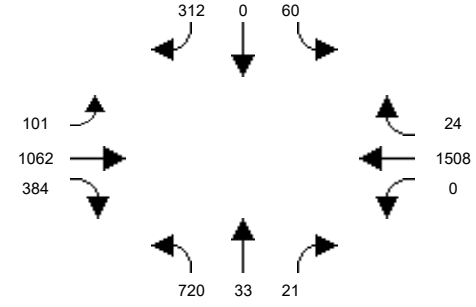

Intersection #60: Penn Wy and I-5 SB Ramps

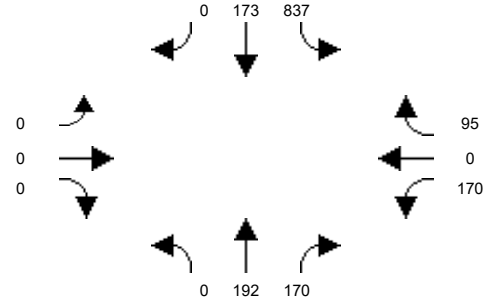


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP AM Peak Hour


Intersection #61: Santiago St and Civic Center Dr

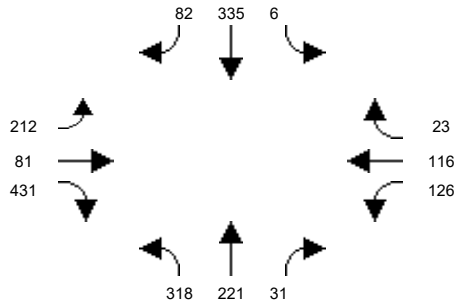


Intersection #62: Santiago St and Santa Ana Blvd

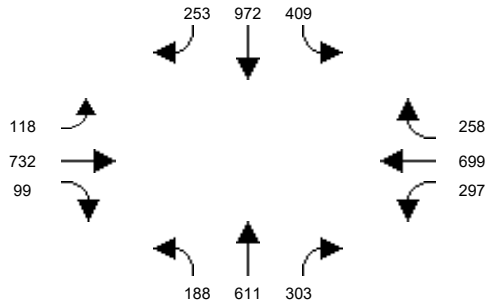


Intersection #63: Standard Ave and 4th St

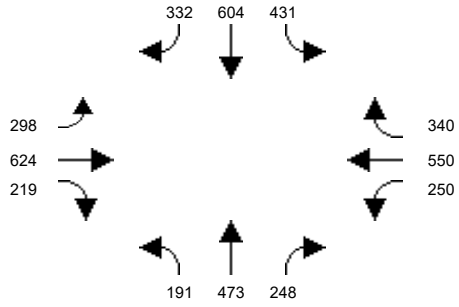


Intersection #64: Standard Ave and 1st St

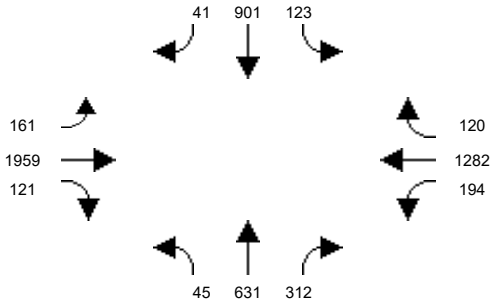


Intersection #65: Standard Ave and Mcfadden Ave

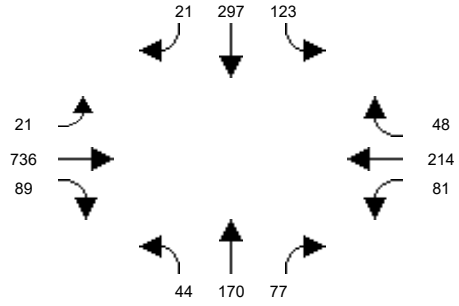


Intersection #66: Halladay St and Warner Ave

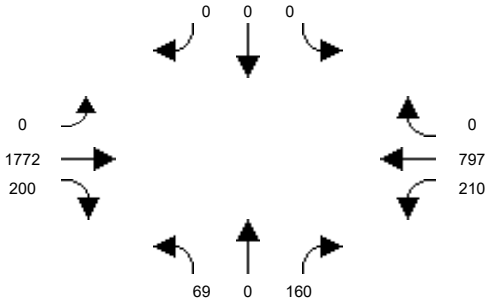


Intersection #67: Halladay St and Dyer Rd

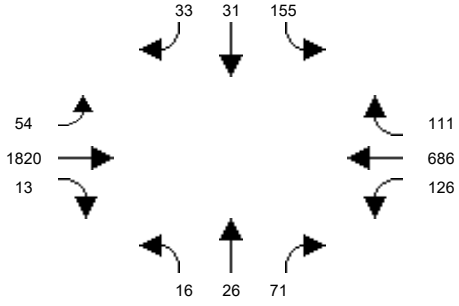


Intersection #68: SR-55 SB Ramps and MacArthur Blvd

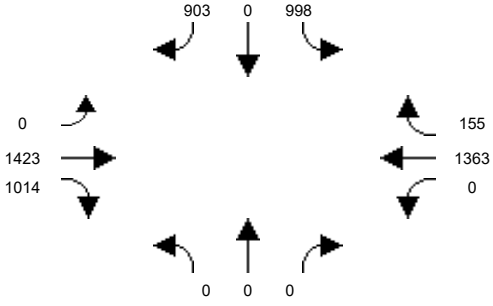

Intersection #69: SR-55 NB Ramps and MacArthur Blvd

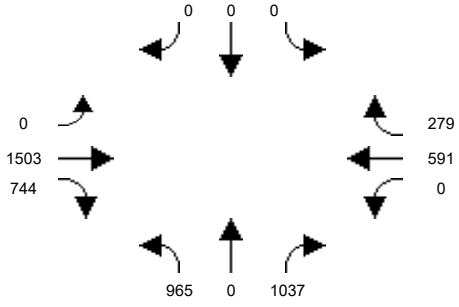

Intersection #70: SR-55 SB Ramps and Dyer Rd

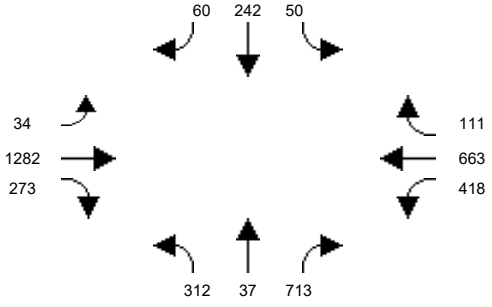


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP AM Peak Hour


Intersection #71: Glassell St and La Veta Ave

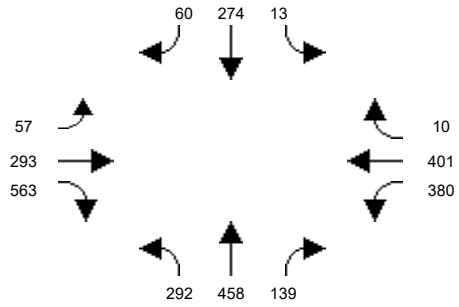


Intersection #72: Glassell St and SR-22 WB Ramps

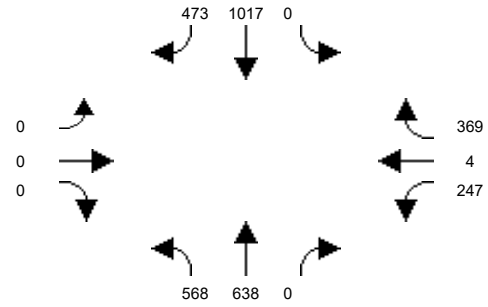


Intersection #73: Grand Ave / Glassell St and SR-22 EB Ramps

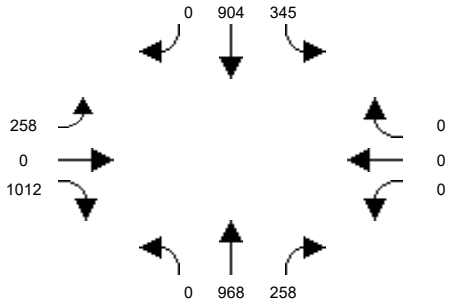


Intersection #74: Grand Ave and Fairhaven Ave

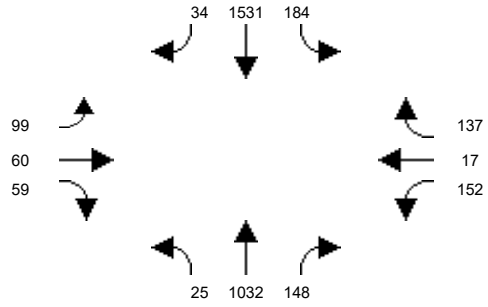


Intersection #75: Grand Ave and Santa Clara Ave

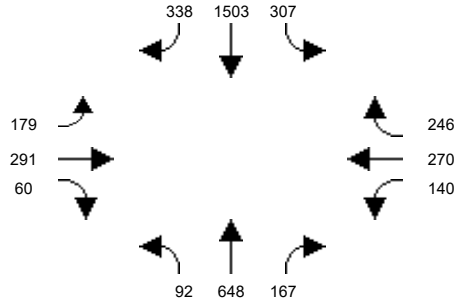


Intersection #76: Grand Ave and 17th St

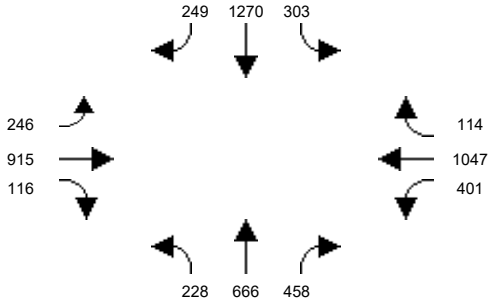


Intersection #77: Grand Ave and I-5 NB Ramps

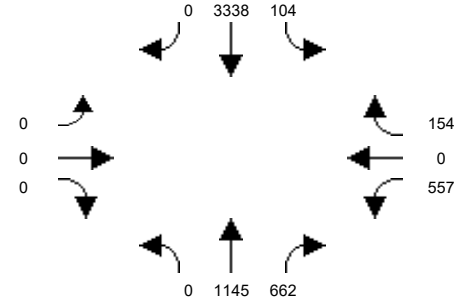


Intersection #78: Grand Ave and Santa Ana Blvd

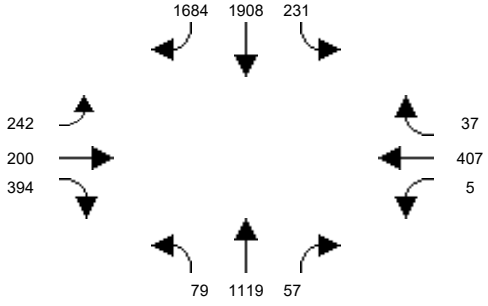

Intersection #79: Grand Ave and 1st St

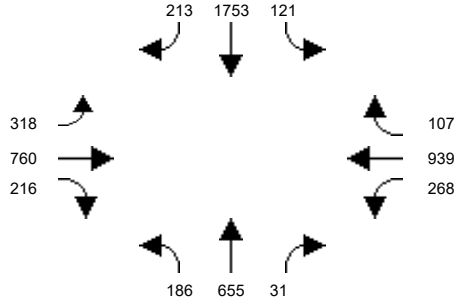

Intersection #80: Grand Ave and Chestnut Ave

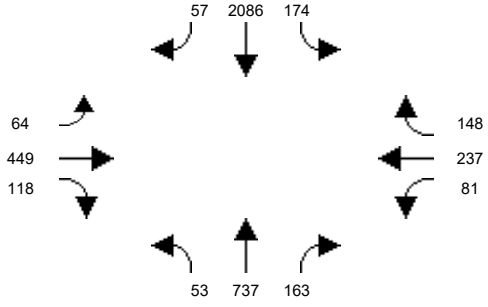


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP AM Peak Hour


Intersection #81: Grand Ave and McFadden Ave

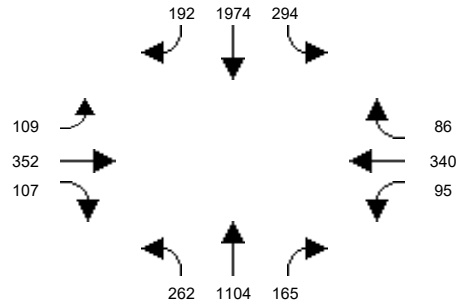


Intersection #82: Grand Ave and Edinger Ave

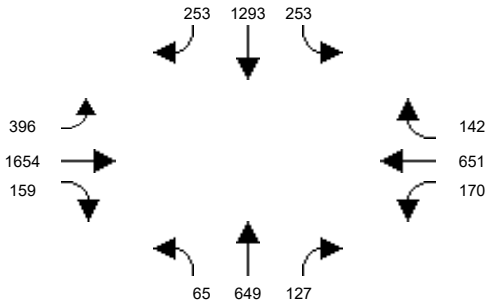


Intersection #83: Grand Ave and Warner Ave

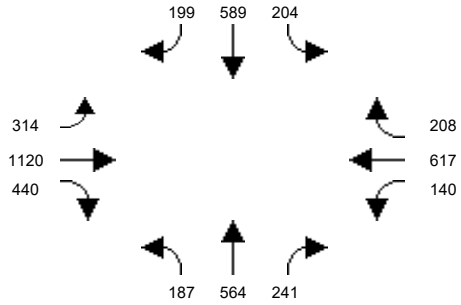


Intersection #84: SR-55 NB Ramps and Dyer Rd

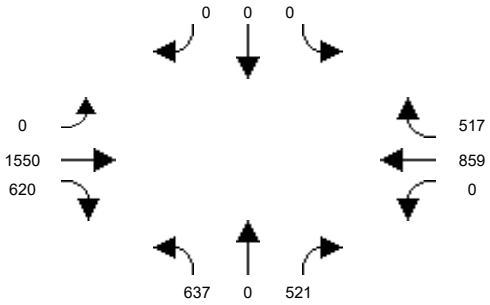


Intersection #85: Cambridge St and La Veta Ave

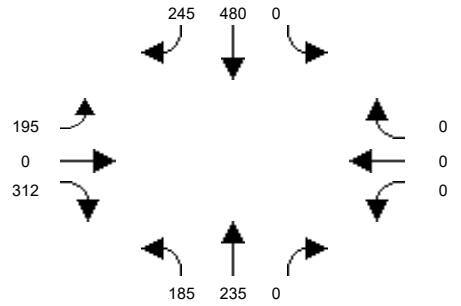


Intersection #86: Cambridge St and Fairhaven Ave

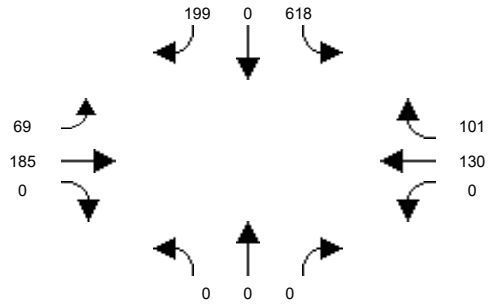


Intersection #87: Mabury St and 1st Street

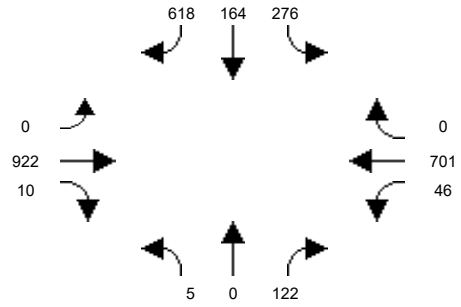


Intersection #88: Tustin St and La Veta Ave

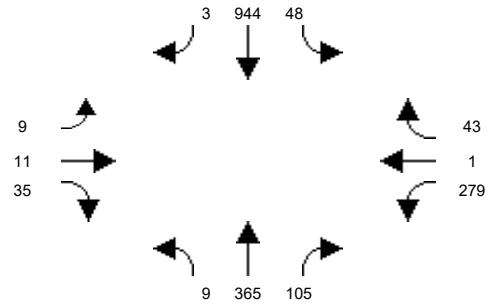

Intersection #89: Tustin St and SR-22 WB On-Ramp

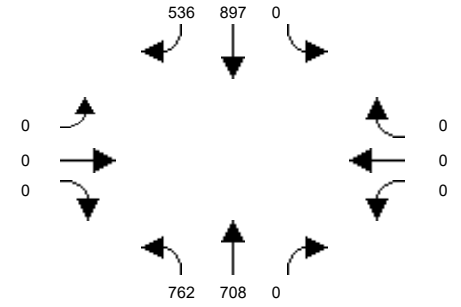

Intersection #90: Tustin St and SR-22 EB Off-Ramp / Seba Ave

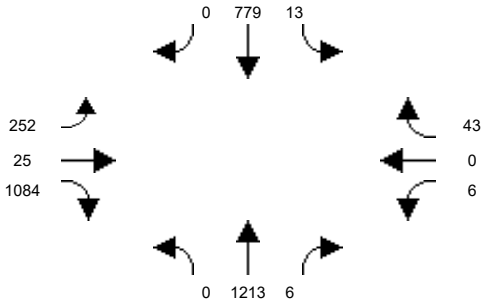


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP AM Peak Hour


Intersection #91: Tustin Ave and Fairhaven Ave

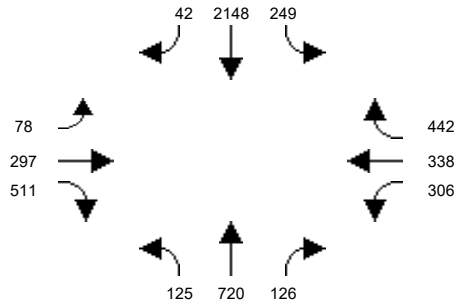


Intersection #92: Tustin Ave and Santa Clara Ave

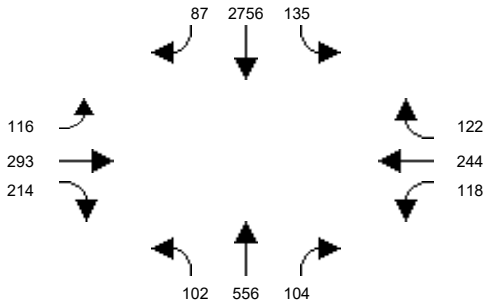


Intersection #93: Tustin Ave and 17th St

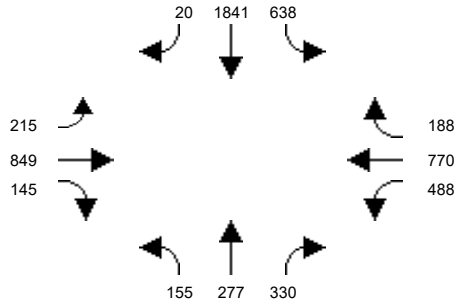


Intersection #94: Tustin Ave and 4th St

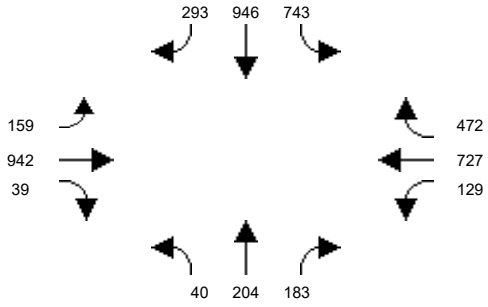


Intersection #95: SR-55 SB Ramps / Auto Mall Dr and Edinger Ave

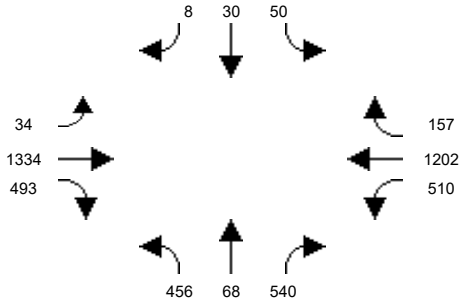


Intersection #96: SR-55 NB Ramps / Del Amo Ave and Newport Avenue

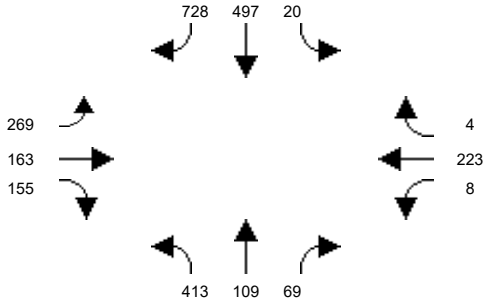


Intersection #97: Red Hill Ave and Edinger Ave

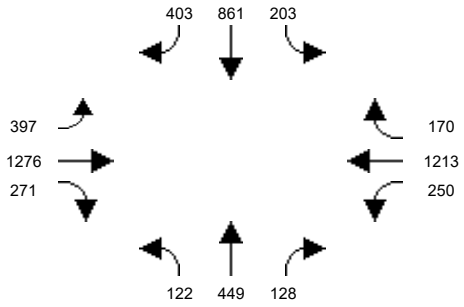


Intersection #98: Red Hill Ave and Warner Ave

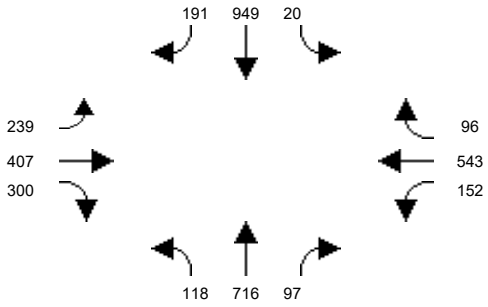

Intersection #99: Red Hill Ave and Dyer Rd / barranca Pkwy

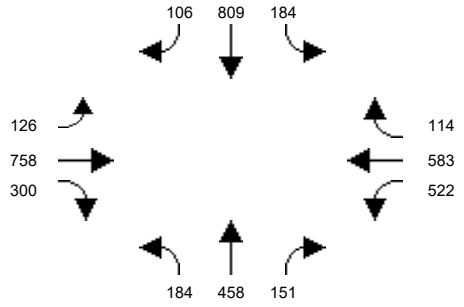

Intersection #100: Red Hill Ave and Alton Pkwy

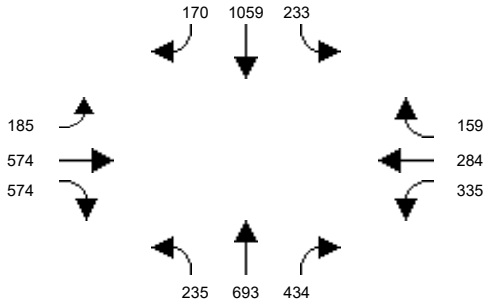


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP AM Peak Hour


Intersection #101: Red Hill Ave and MacArthur Blvd

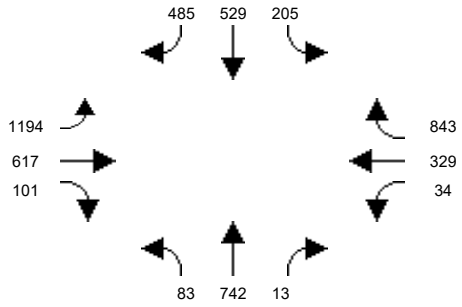


Intersection #102: Red Hill Ave and Main St

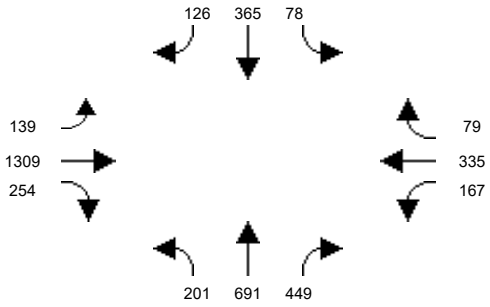


Intersection #103: I-5 SB Ramps and Santa Ana Blvd

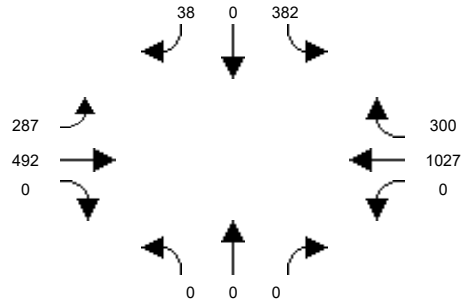


Intersection #104: Tustin Ranch Rd and Warner Ave

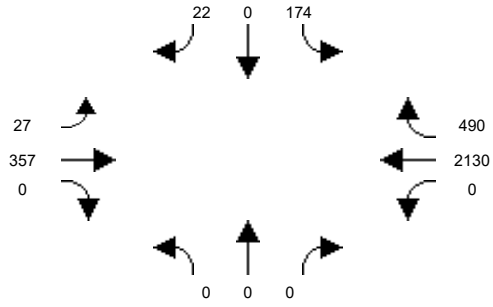


Intersection #105: Von Karman Ave and Barranca Pkwy

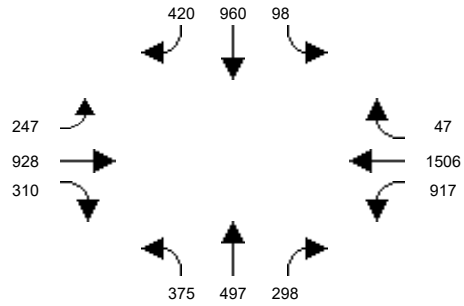


Intersection #106: Red Hill Avenue and El Camino Real

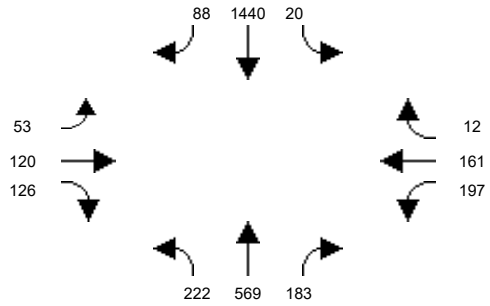


Intersection #107: Red Hill Avenue and I-5 NB Ramps

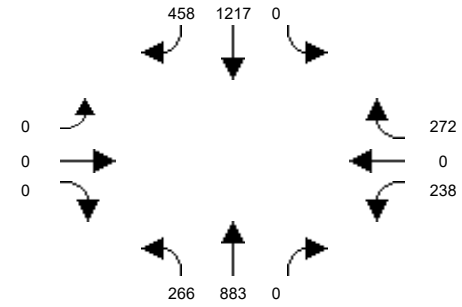


Intersection #108: Red Hill Avenue and I-5 SB Ramps

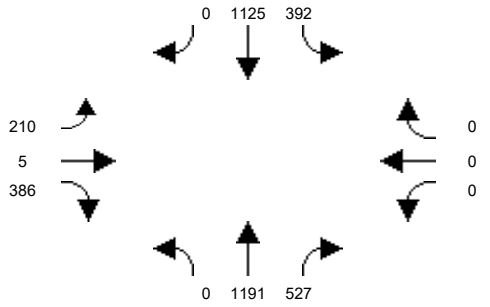

Intersection #109: Red Hill Avenue and Nisson Road

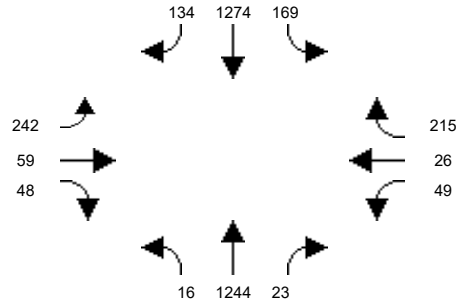

Intersection #110: Red Hill Avenue and Walnut Avenue

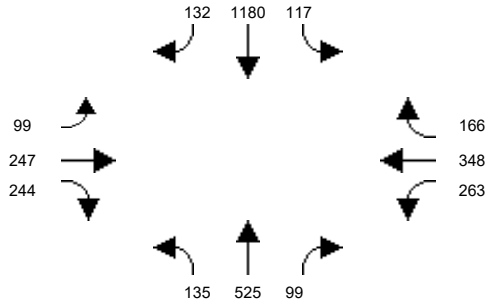


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP AM Peak Hour


Intersection #111: Red Hill Avenue and Valencia Avenue

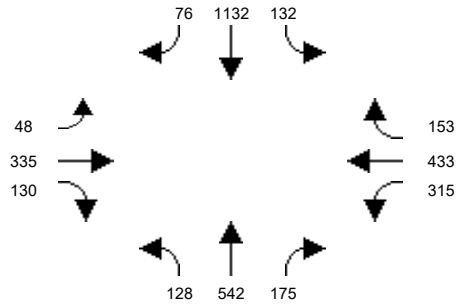


Intersection #112: Tustin Ranch Road and Warner Avenue North

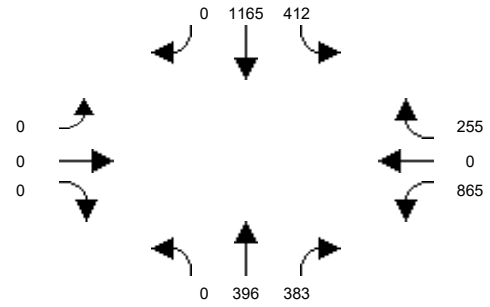


Intersection #113: Tustin Ranch Road and Walnut Avenue

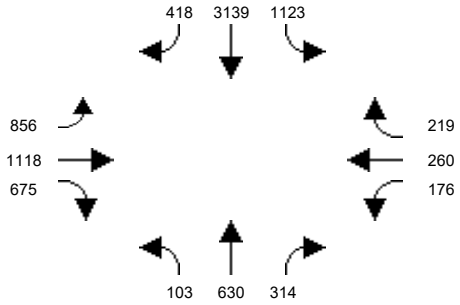

Intersection #114: SR-55 SB Ramps and Irvine Boulevard

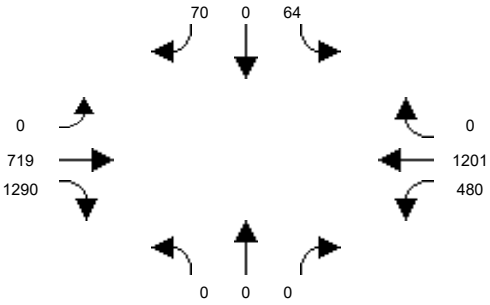

Intersection #115: SR-55 NB Ramps and Irvine Boulevard

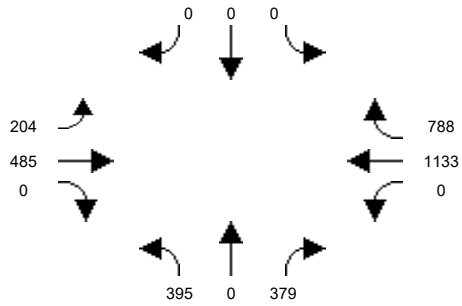

Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

APPENDIX B.6


INTERSECTION VOLUMES –
2045 WP (PM PEAK HOUR)

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP PM Peak Hour


Intersection #1: Euclid St and 1st St

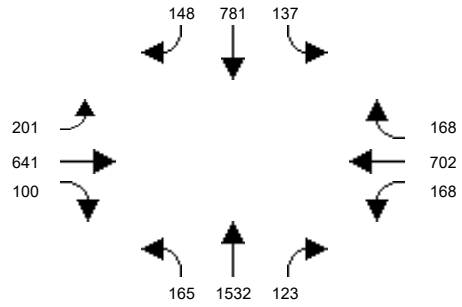


Intersection #2: Euclid St and McFadden Ave

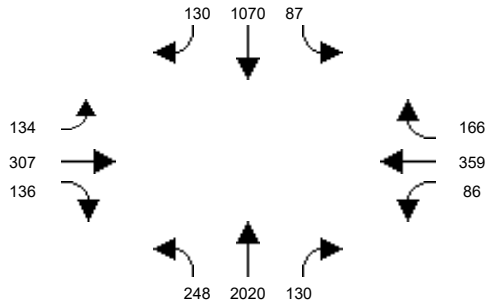


Intersection #3: Euclid St and Edinger Ave

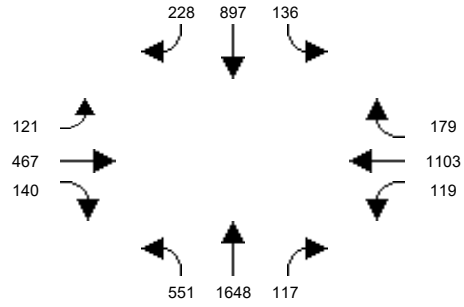


Intersection #4: Newhope St and Hazard Ave

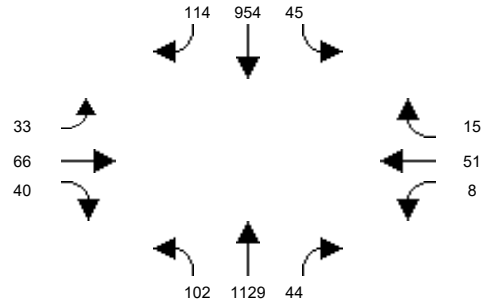


Intersection #5: Newhope St and McFadden Ave

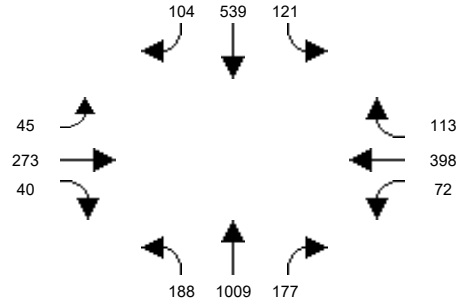


Intersection #6: Harbor Blvd and SR-22 WB Off-Ramp / Banner Dr

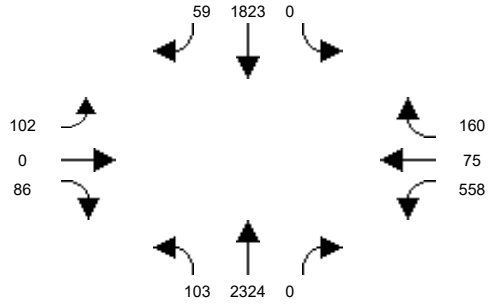


Intersection #7: Trask Avenue and SR-22 EB On-Ramp

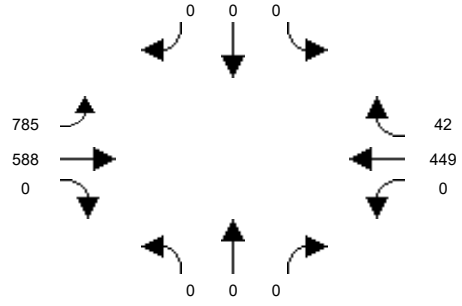


Intersection #8: Harbor Blvd and Westminster Ave

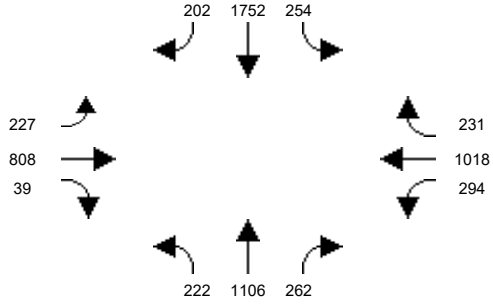

Intersection #9: Harbor Blvd and 1st St

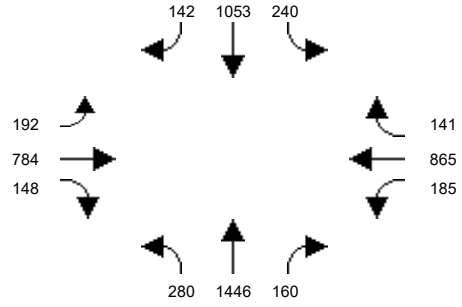

Intersection #10: Harbor Blvd and McFadden Ave

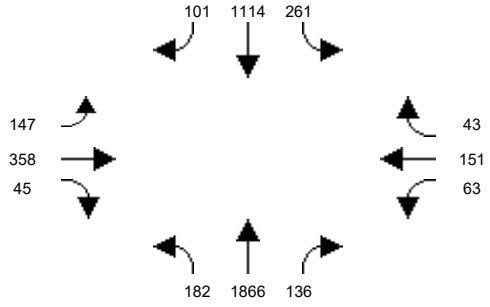


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP PM Peak Hour


Intersection #11: Harbor Blvd and Edinger Ave

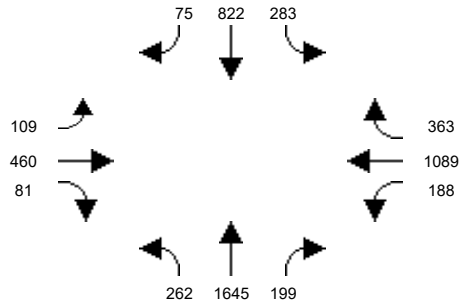


Intersection #12: Harbor Blvd and Warner Ave

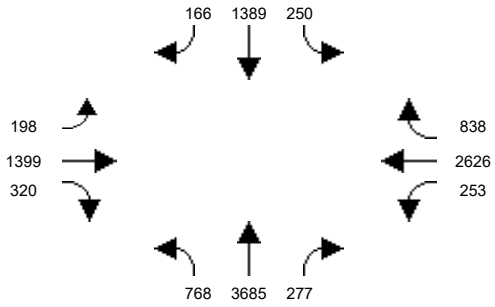


Intersection #13: Harbor Blvd and Segerstrom Ave

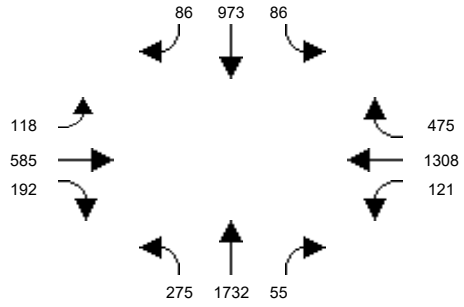


Intersection #14: MacArthur Blvd and Hyland Ave

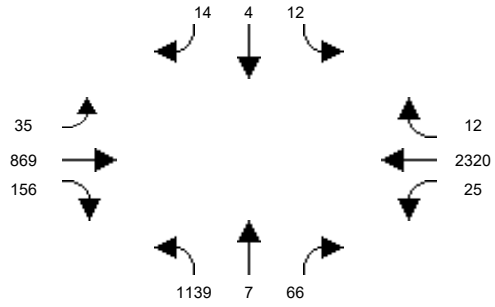


Intersection #15: MacArthur Blvd and Harbor Blvd

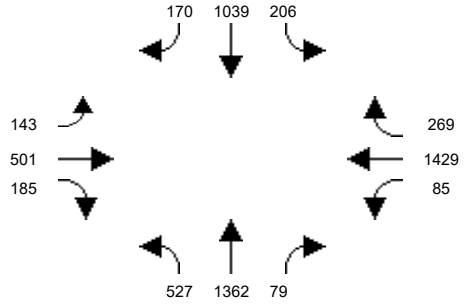


Intersection #16: Harbor Blvd and Sunflower Ave

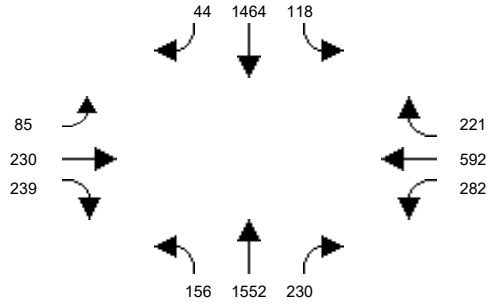


Intersection #17: Harbor Blvd and I-405 NB Off-Ramp

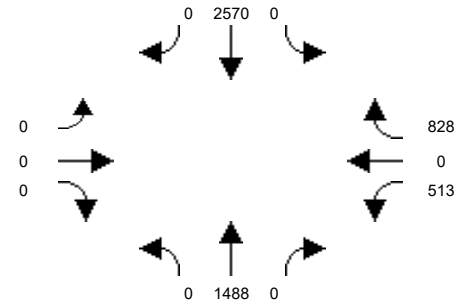


Intersection #18: Harbor Blvd and I-405 SB Off-Ramp

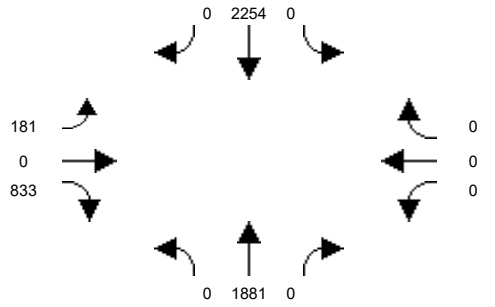

Intersection #19: Fairview St and Civic Center Dr

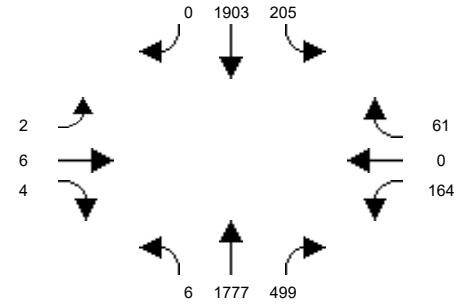

Intersection #20: Fairview St and 1st St

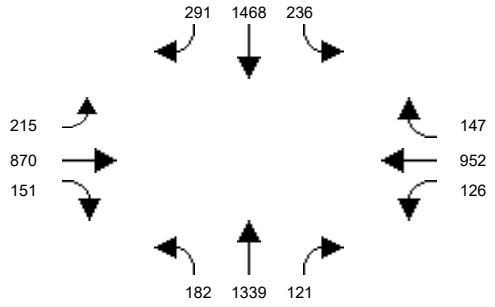


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP PM Peak Hour


Intersection #21: Fairview St and McFadden Ave

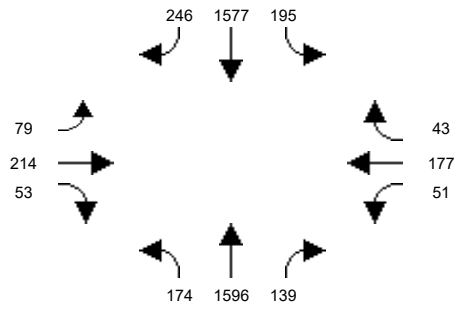


Intersection #22: Fairview St and Edinger Ave

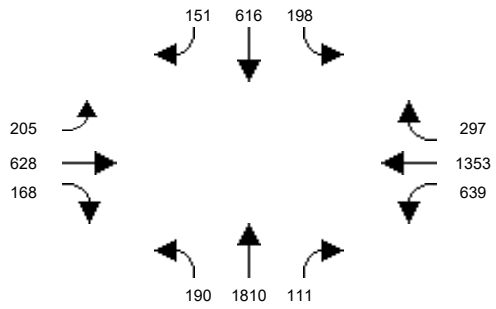


Intersection #23: Fairview St and Warner Ave

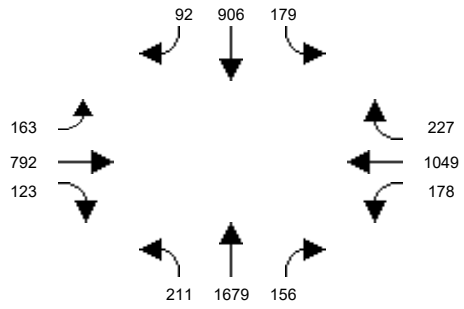


Intersection #24: Fairview St and MacArthur Blvd

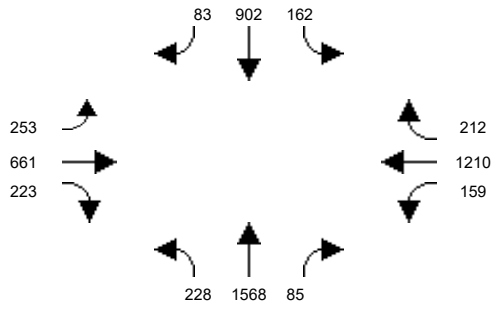


Intersection #25: Fairview Rd and Sunflower Ave

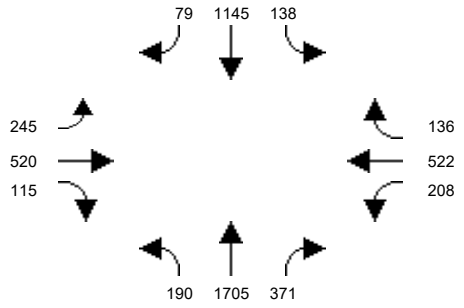


Intersection #26: Greenville St and Edinger Ave

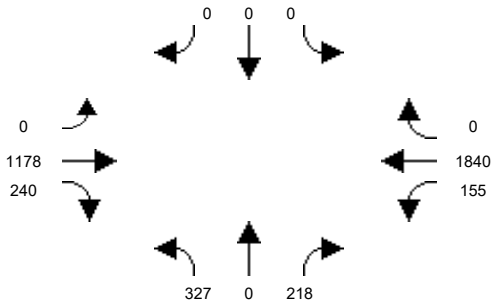


Intersection #27: Greenville St and Segerstrom Ave

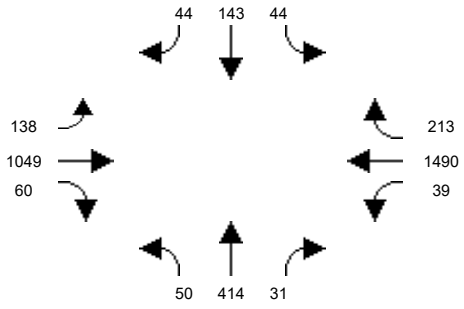


Intersection #28: Raitt St and McFadden Ave

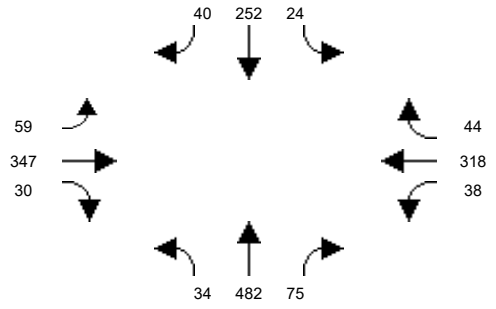

Intersection #29: Raitt St and Edinger Ave

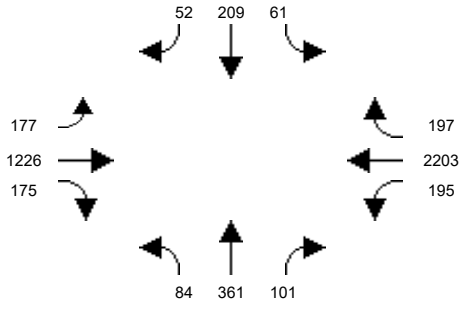

Intersection #30: Bear St and MacArthur Blvd

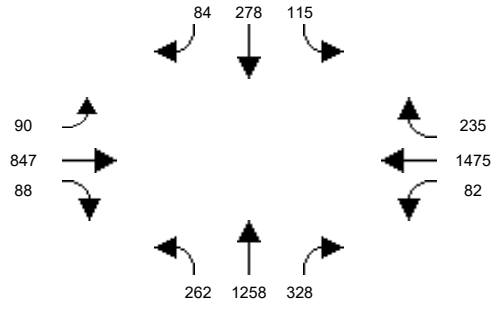


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP PM Peak Hour


Intersection #31: Bristol St and 17th St

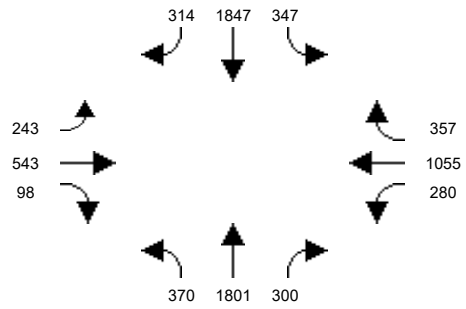


Intersection #32: Bristol St and Civic Center Dr

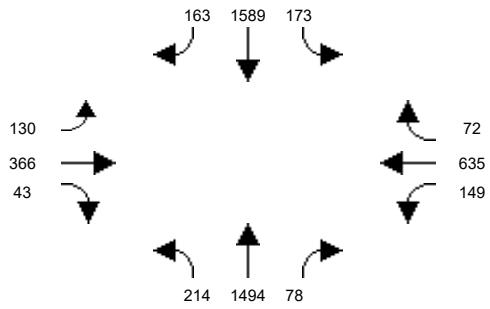


Intersection #33: Bristol St and Santa Ana Blvd

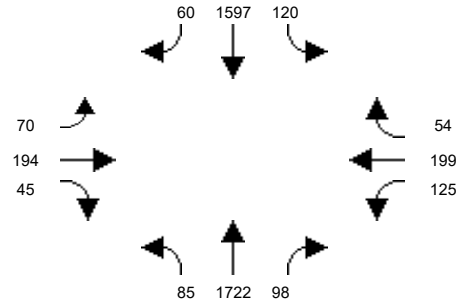


Intersection #34: Bristol St and 1st St

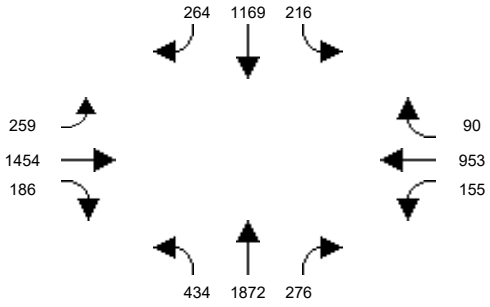


Intersection #35: Bristol St and McFadden Ave

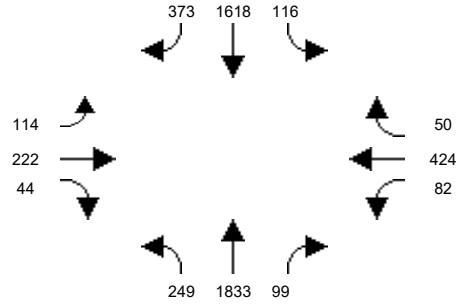


Intersection #36: Bristol St and Warner Ave

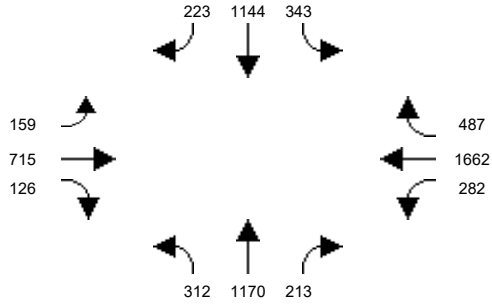


Intersection #37: Bristol St and Segerstrom Ave

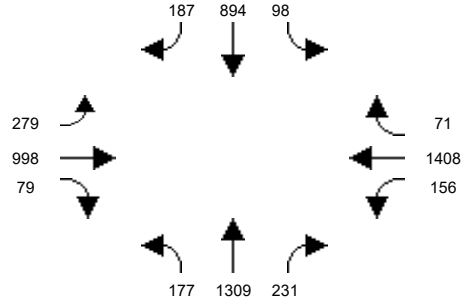


Intersection #38: Bristol St and Alton Ave

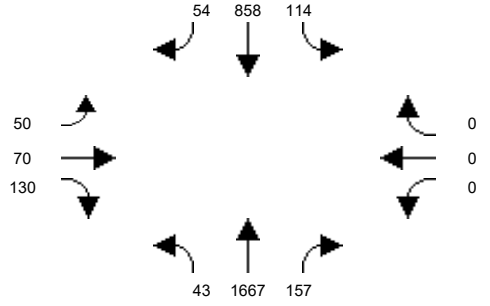

Intersection #39: Bristol St and MacArthur Blvd

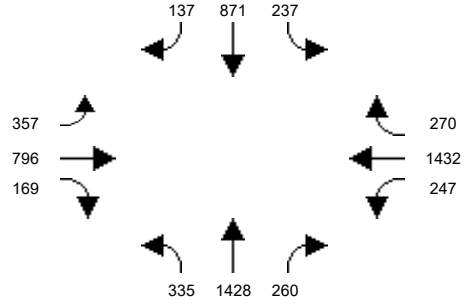

Intersection #40: Bristol St and Sunflower Ave

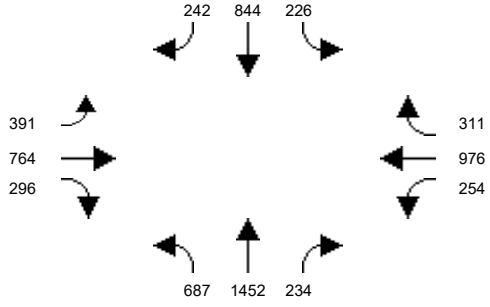


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP PM Peak Hour


Intersection #41: Bristol St and I-405 NB Ramps

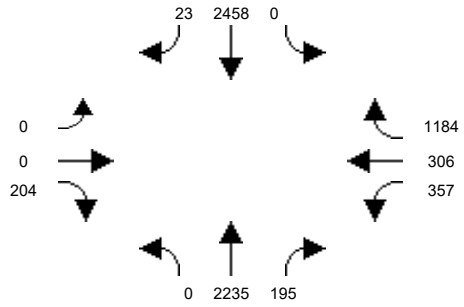


Intersection #42: Bristol St and I-405 SB Ramps

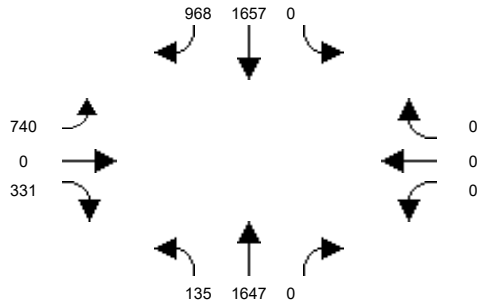


Intersection #43: Flower St and Santa Ana Blvd

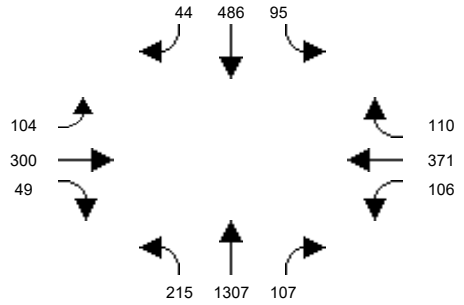


Intersection #44: Flower St and 1st St

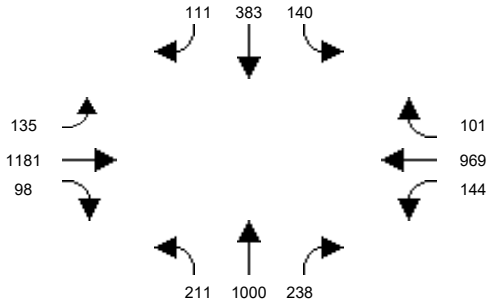


Intersection #45: Flower St and McFadden Ave

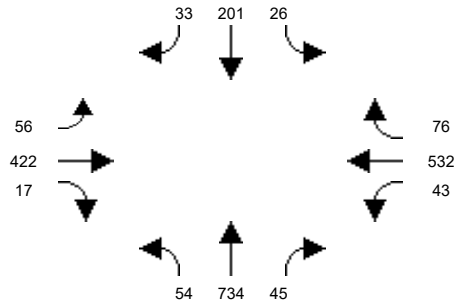


Intersection #46: Flower St and Segerstrom Ave

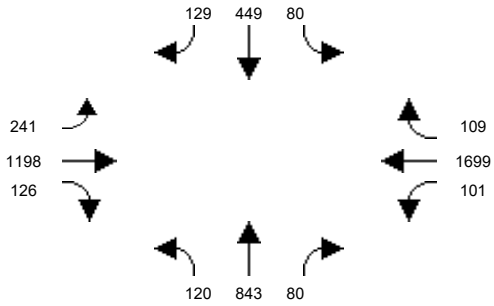


Intersection #47: Flower St and MacArthur Blvd

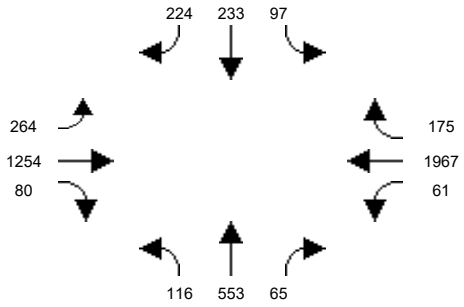


Intersection #48: Main St and La Veta Ave

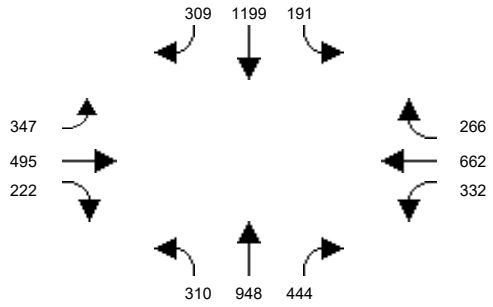

Intersection #49: Main St and Mainplace Dr / Memory Ln

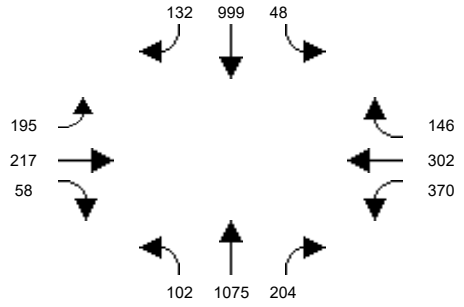

Intersection #50: Main St and 17th St

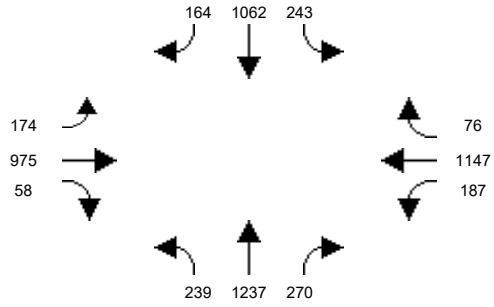


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP PM Peak Hour


Intersection #51: Main St and Civic Center Dr

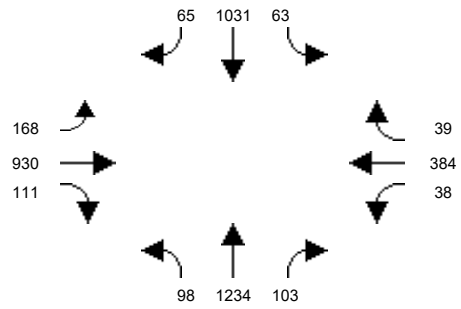


Intersection #52: Main St and Santa Ana Blvd

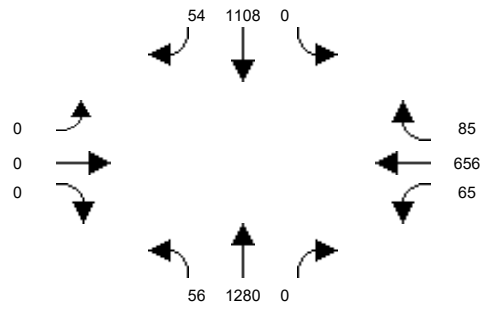


Intersection #53: Main St and 4th St

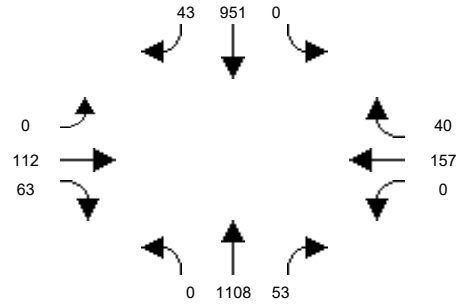


Intersection #54: Main St and 1st St

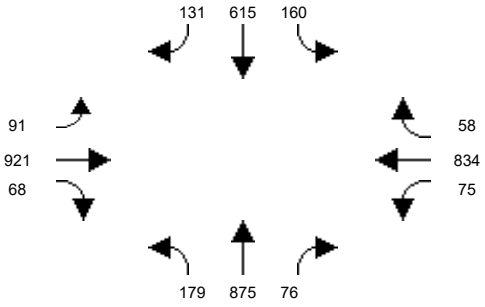


Intersection #55: Main St and McFadden Ave

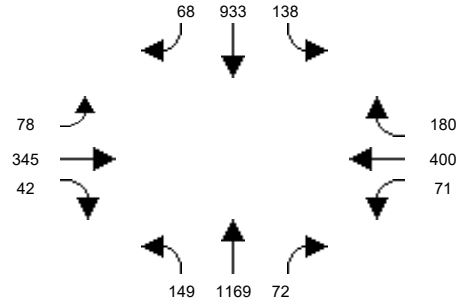


Intersection #56: Main St and Edinger Ave

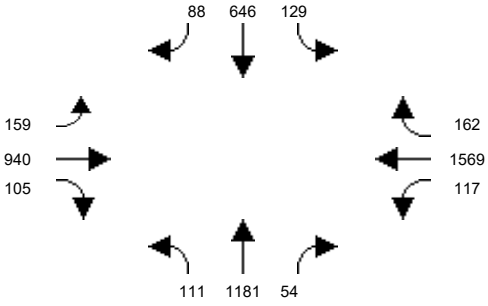


Intersection #57: Main St and MacArthur Blvd

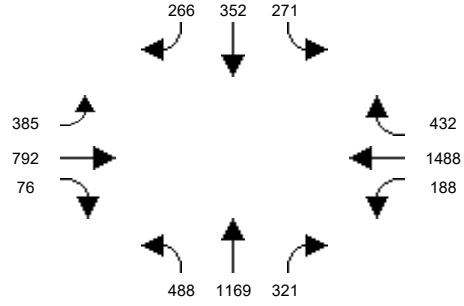


Intersection #58: Penn Wy and 17th St

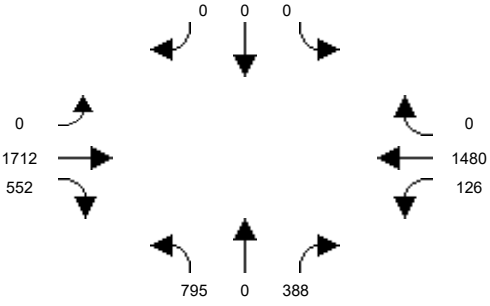

Intersection #59: I-5 NB Off Ramps/17th Street

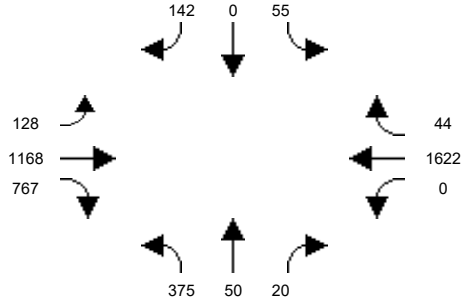

Intersection #60: Penn Wy and I-5 SB Ramps

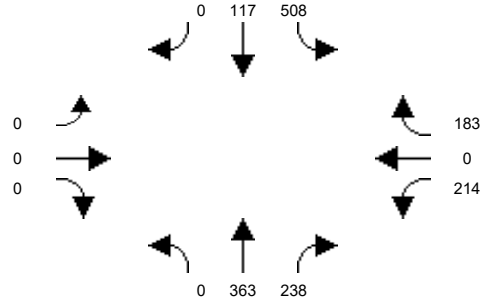


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP PM Peak Hour


Intersection #61: Santiago St and Civic Center Dr

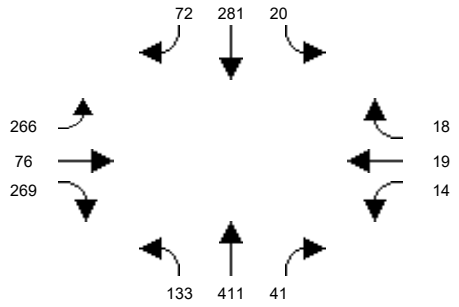


Intersection #62: Santiago St and Santa Ana Blvd

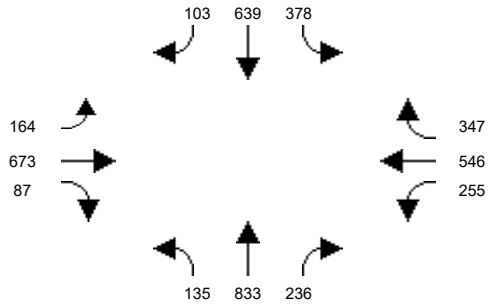


Intersection #63: Standard Ave and 4th St

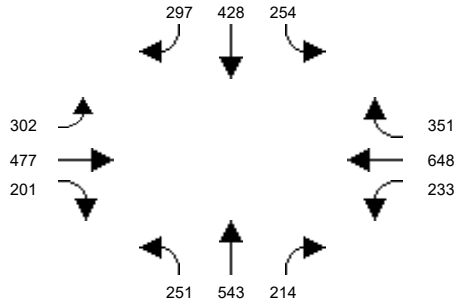


Intersection #64: Standard Ave and 1st St

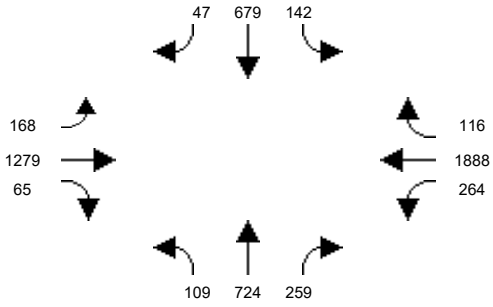


Intersection #65: Standard Ave and Mcfadden Ave

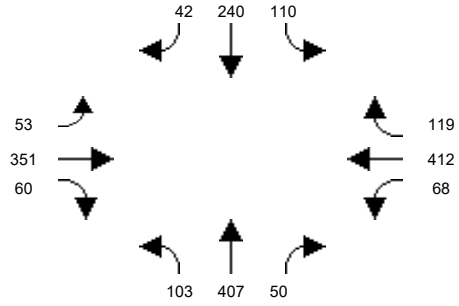


Intersection #66: Halladay St and Warner Ave

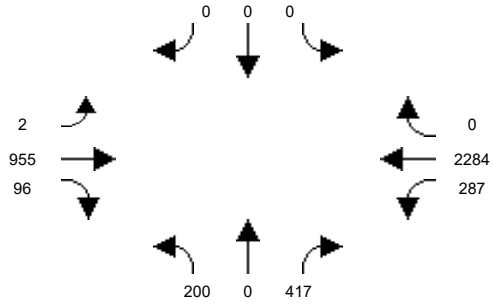


Intersection #67: Halladay St and Dyer Rd

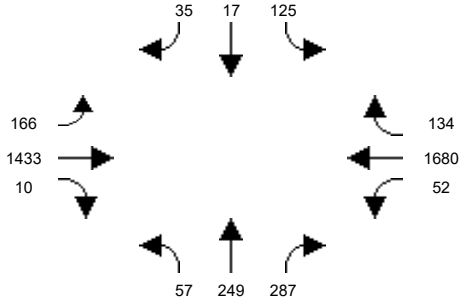


Intersection #68: SR-55 SB Ramps and MacArthur Blvd

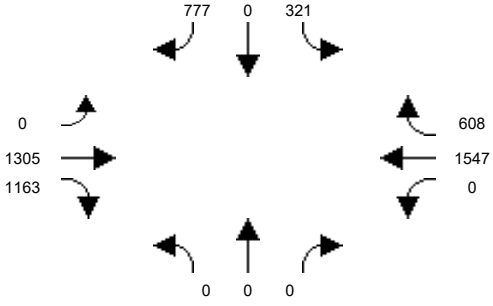

Intersection #69: SR-55 NB Ramps and MacArthur Blvd

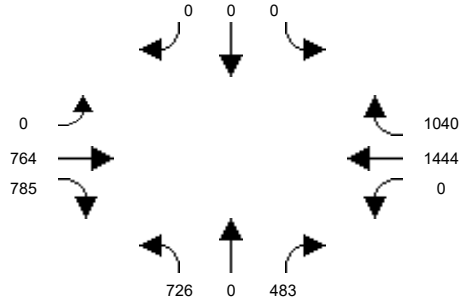

Intersection #70: SR-55 SB Ramps and Dyer Rd

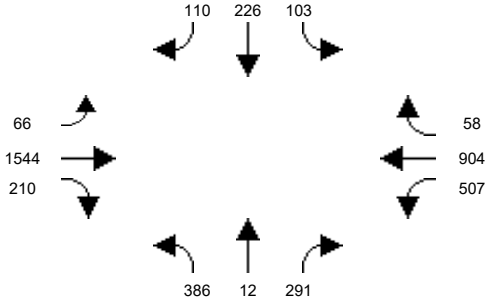


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP PM Peak Hour


Intersection #71: Glassell St and La Veta Ave

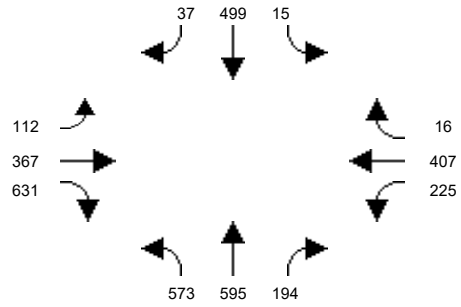


Intersection #72: Glassell St and SR-22 WB Ramps

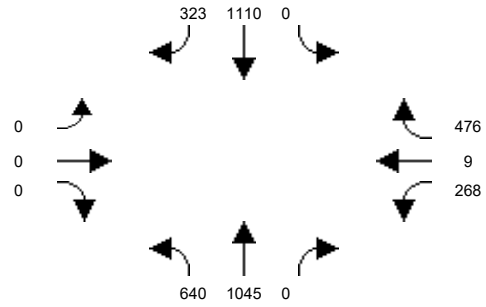


Intersection #73: Grand Ave / Glassell St and SR-22 EB Ramps

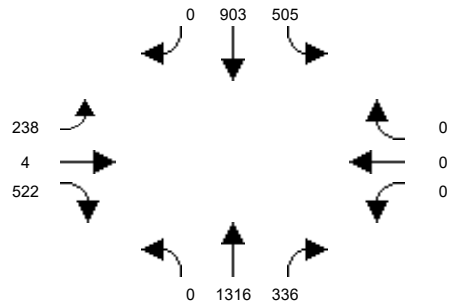


Intersection #74: Grand Ave and Fairhaven Ave

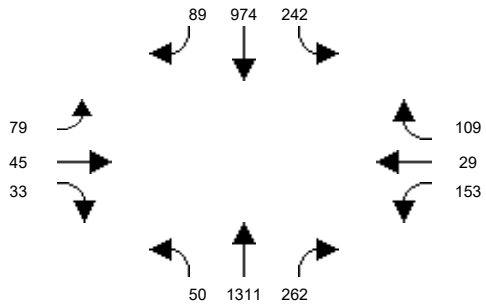


Intersection #75: Grand Ave and Santa Clara Ave

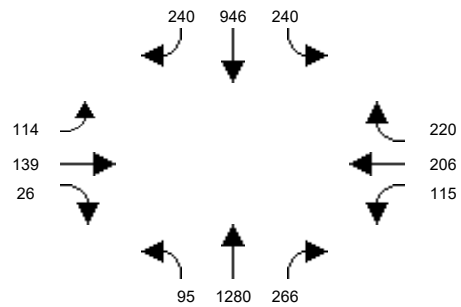


Intersection #76: Grand Ave and 17th St

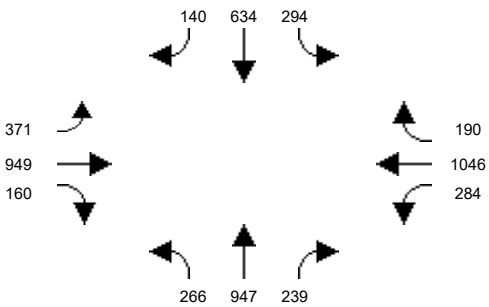


Intersection #77: Grand Ave and I-5 NB Ramps

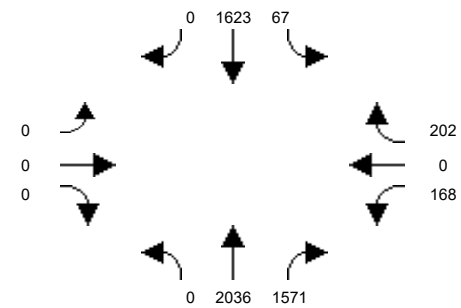


Intersection #78: Grand Ave and Santa Ana Blvd

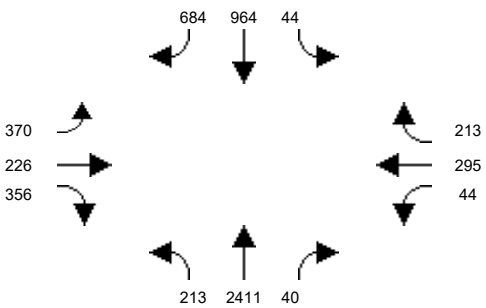

Intersection #79: Grand Ave and 1st St

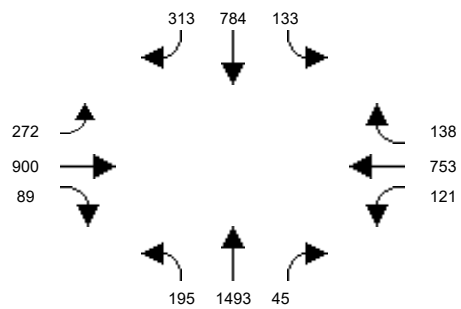

Intersection #80: Grand Ave and Chestnut Ave

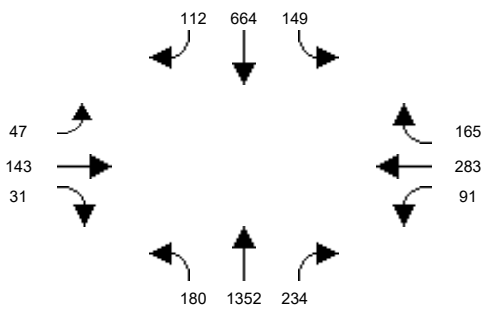


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP PM Peak Hour


Intersection #81: Grand Ave and McFadden Ave

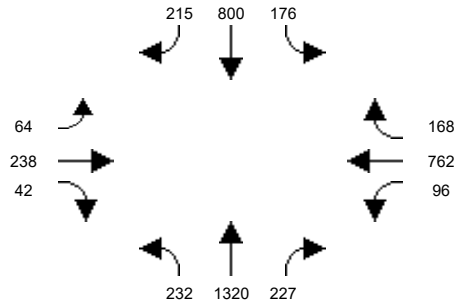


Intersection #82: Grand Ave and Edinger Ave

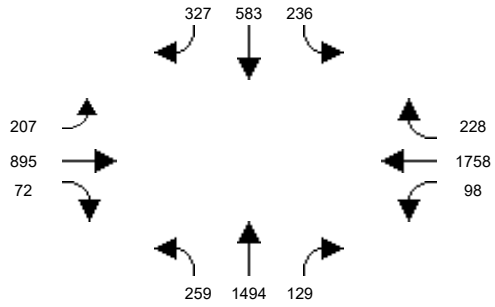


Intersection #83: Grand Ave and Warner Ave

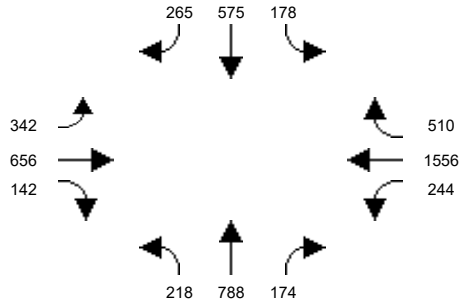


Intersection #84: SR-55 NB Ramps and Dyer Rd

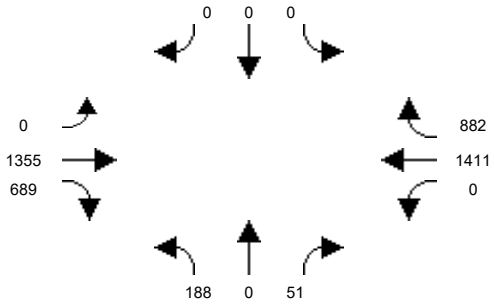


Intersection #85: Cambridge St and La Veta Ave

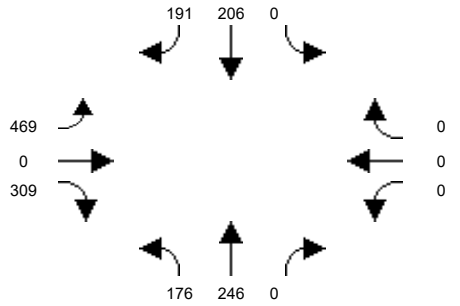


Intersection #86: Cambridge St and Fairhaven Ave

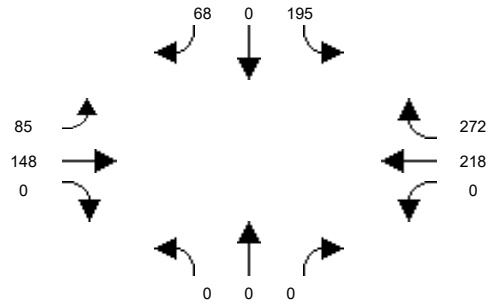


Intersection #87: Mabury St and 1st Street

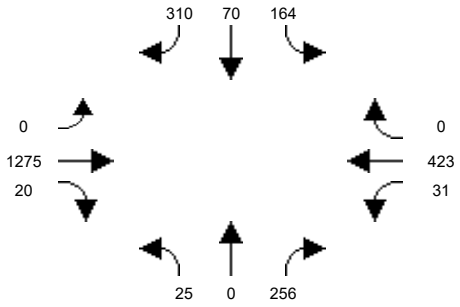


Intersection #88: Tustin St and La Veta Ave

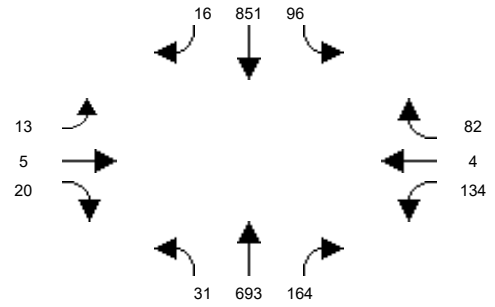

Intersection #89: Tustin St and SR-22 WB On-Ramp

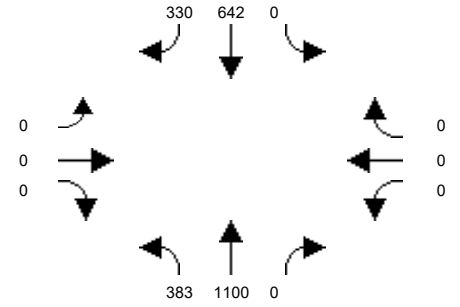

Intersection #90: Tustin St and SR-22 EB Off-Ramp / Seba Ave

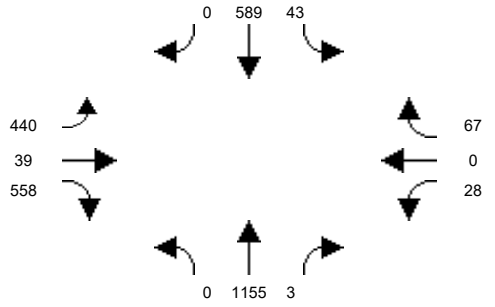


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP PM Peak Hour


Intersection #91: Tustin Ave and Fairhaven Ave

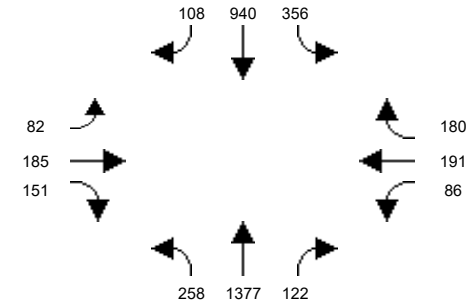


Intersection #92: Tustin Ave and Santa Clara Ave

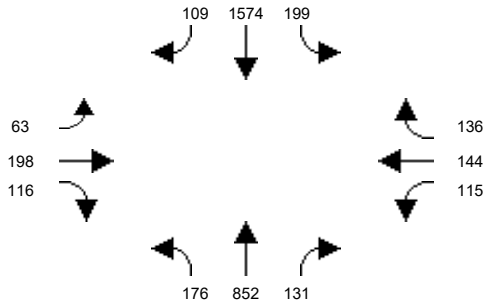


Intersection #93: Tustin Ave and 17th St

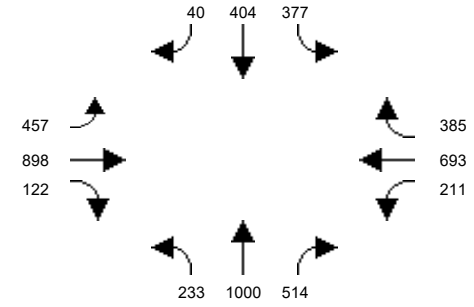


Intersection #94: Tustin Ave and 4th St

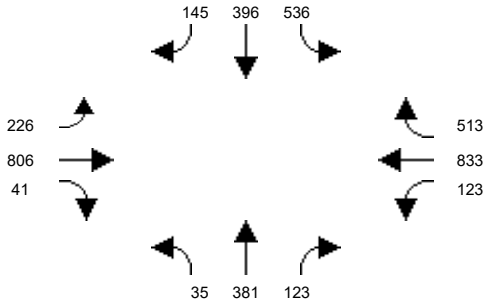


Intersection #95: SR-55 SB Ramps / Auto Mall Dr and Edinger Ave

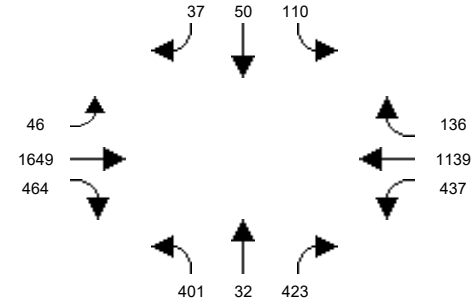


Intersection #96: SR-55 NB Ramps / Del Amo Ave and Newport Avenue

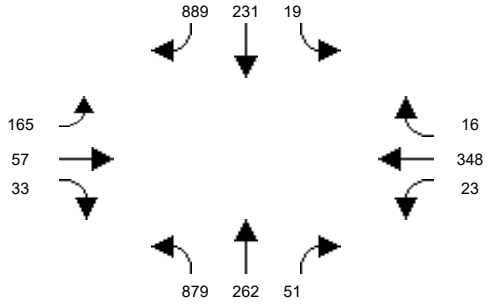


Intersection #97: Red Hill Ave and Edinger Ave

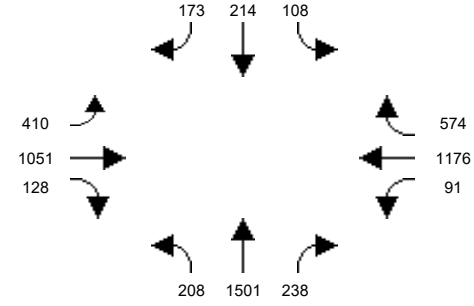


Intersection #98: Red Hill Ave and Warner Ave

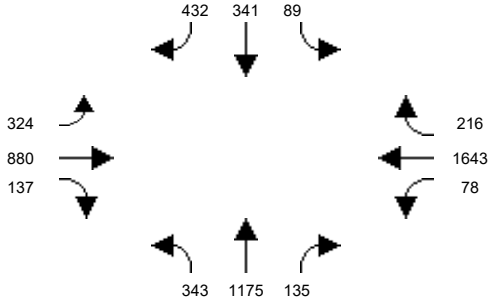

Intersection #99: Red Hill Ave and Dyer Rd / barranca Pkwy

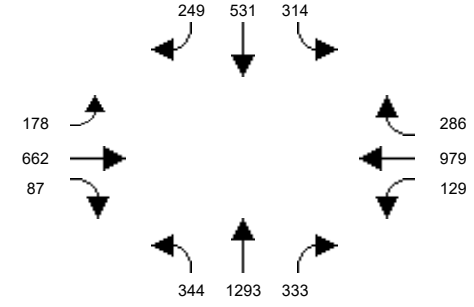

Intersection #100: Red Hill Ave and Alton Pkwy

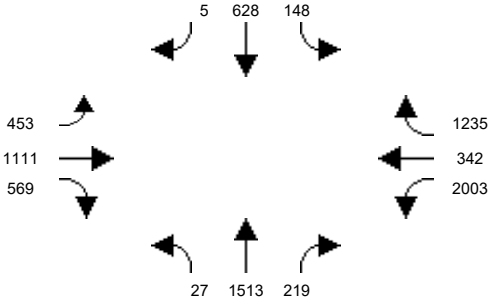


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP PM Peak Hour


Intersection #101: Red Hill Ave and MacArthur Blvd

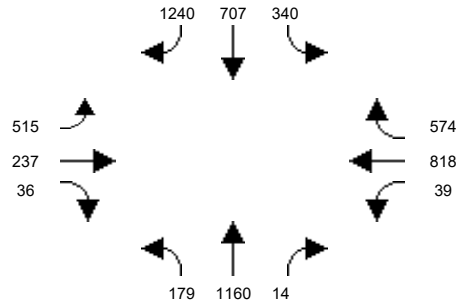


Intersection #102: Red Hill Ave and Main St

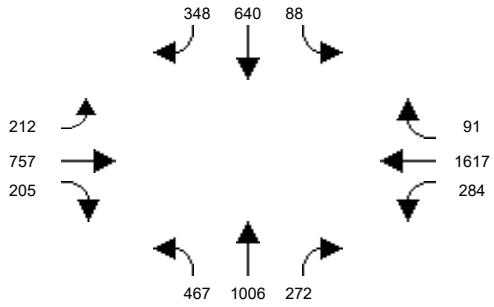


Intersection #103: I-5 SB Ramps and Santa Ana Blvd

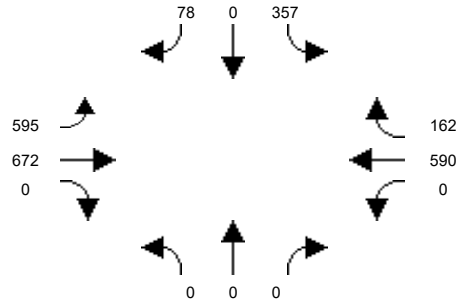


Intersection #104: Tustin Ranch Rd and Warner Ave

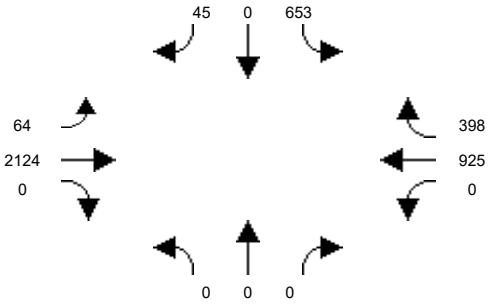


Intersection #105: Von Karman Ave and Barranca Pkwy

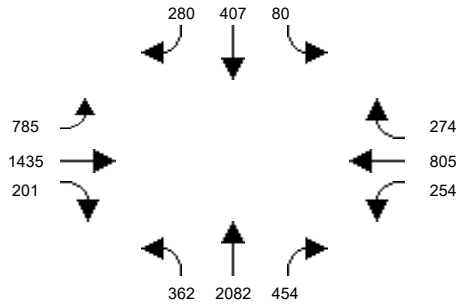


Intersection #106: Red Hill Avenue and El Camino Real

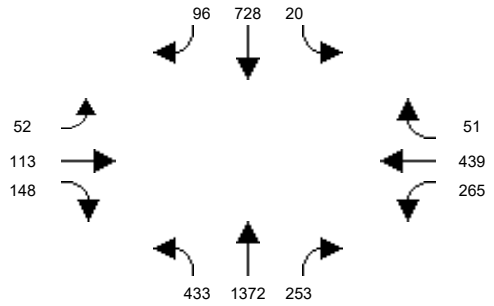


Intersection #107: Red Hill Avenue and I-5 NB Ramps

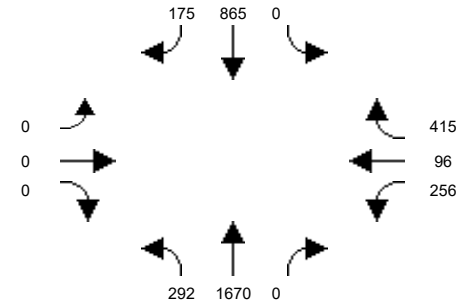


Intersection #108: Red Hill Avenue and I-5 SB Ramps

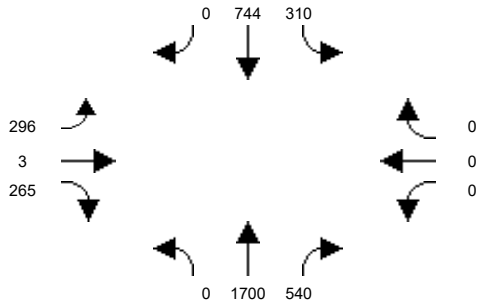

Intersection #109: Red Hill Avenue and Nisson Road

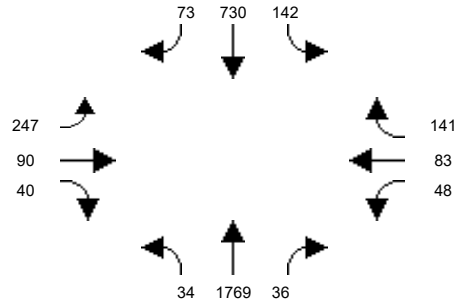

Intersection #110: Red Hill Avenue and Walnut Avenue

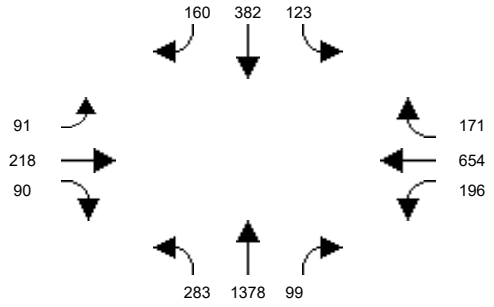


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Santa Ana Circulation Element

Intersection Graphic Report
Entered Volume (Base Alternative)
2045 WP PM Peak Hour


Intersection #111: Red Hill Avenue and Valencia Avenue

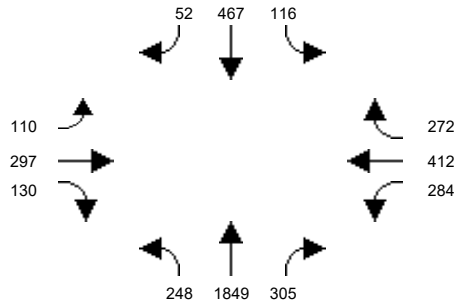


Intersection #112: Tustin Ranch Road and Warner Avenue North

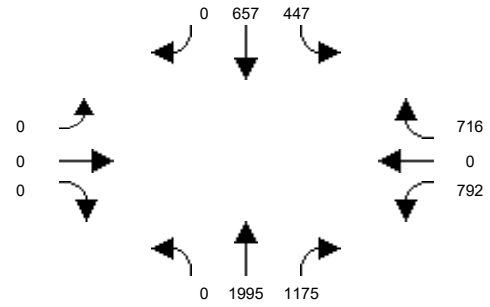


Intersection #113: Tustin Ranch Road and Walnut Avenue

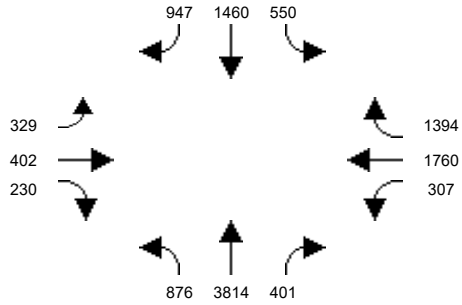

Intersection #114: SR-55 SB Ramps and Irvine Boulevard

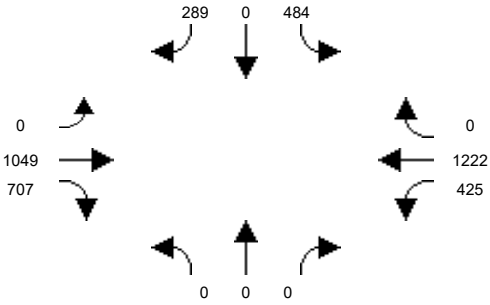

Intersection #115: SR-55 NB Ramps and Irvine Boulevard

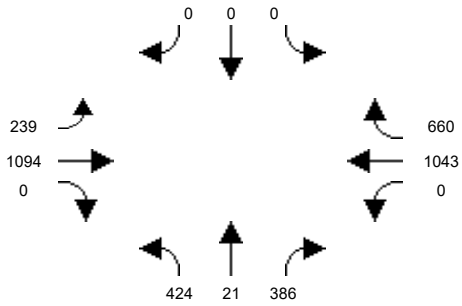


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8


Traffix 8.0.0715 Copyright (c) 2008 Dowling Associates, Inc. Licensed to IBI GROUP, IRVINE, CA

APPENDIX C
OCTAM VOLUME PLOTS


OCTAM 5.0 - Year 2016 Daily Forecasts
Volumes in Thousands
Raw Volumes - Not For Distribution

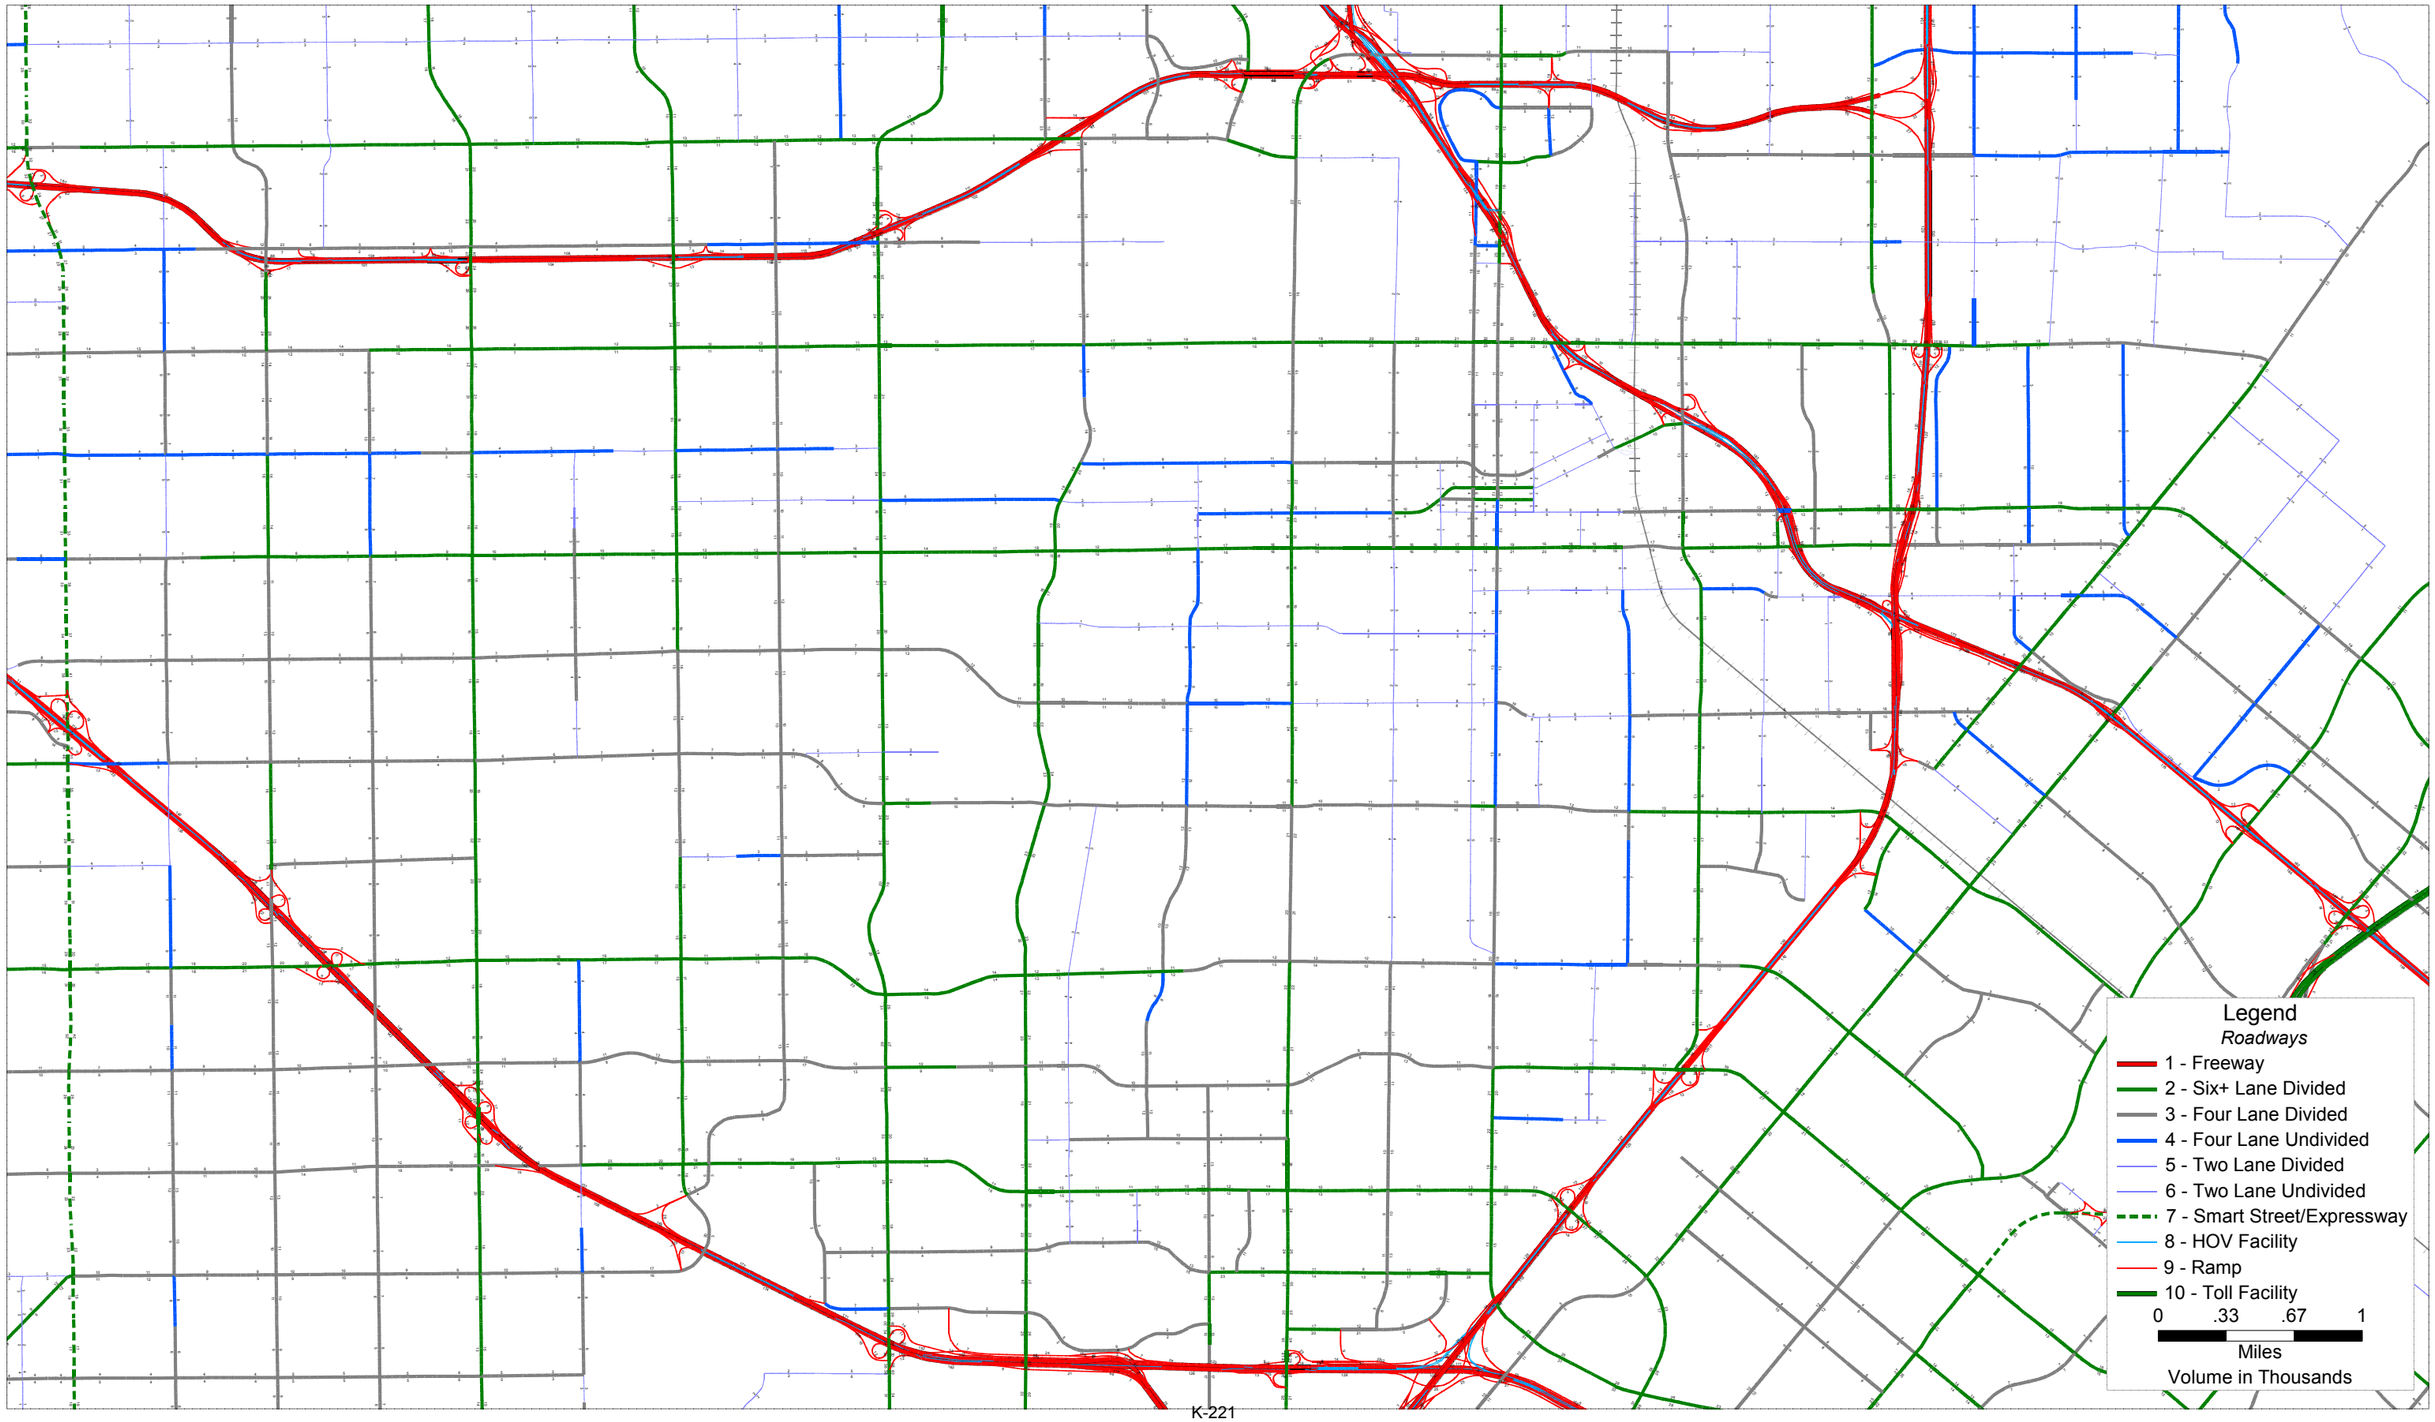


OCTAM 5.0 - Year 2016 AM Peak Period Forecasts
Volumes in Thousands
Raw Volumes - Not For Distribution

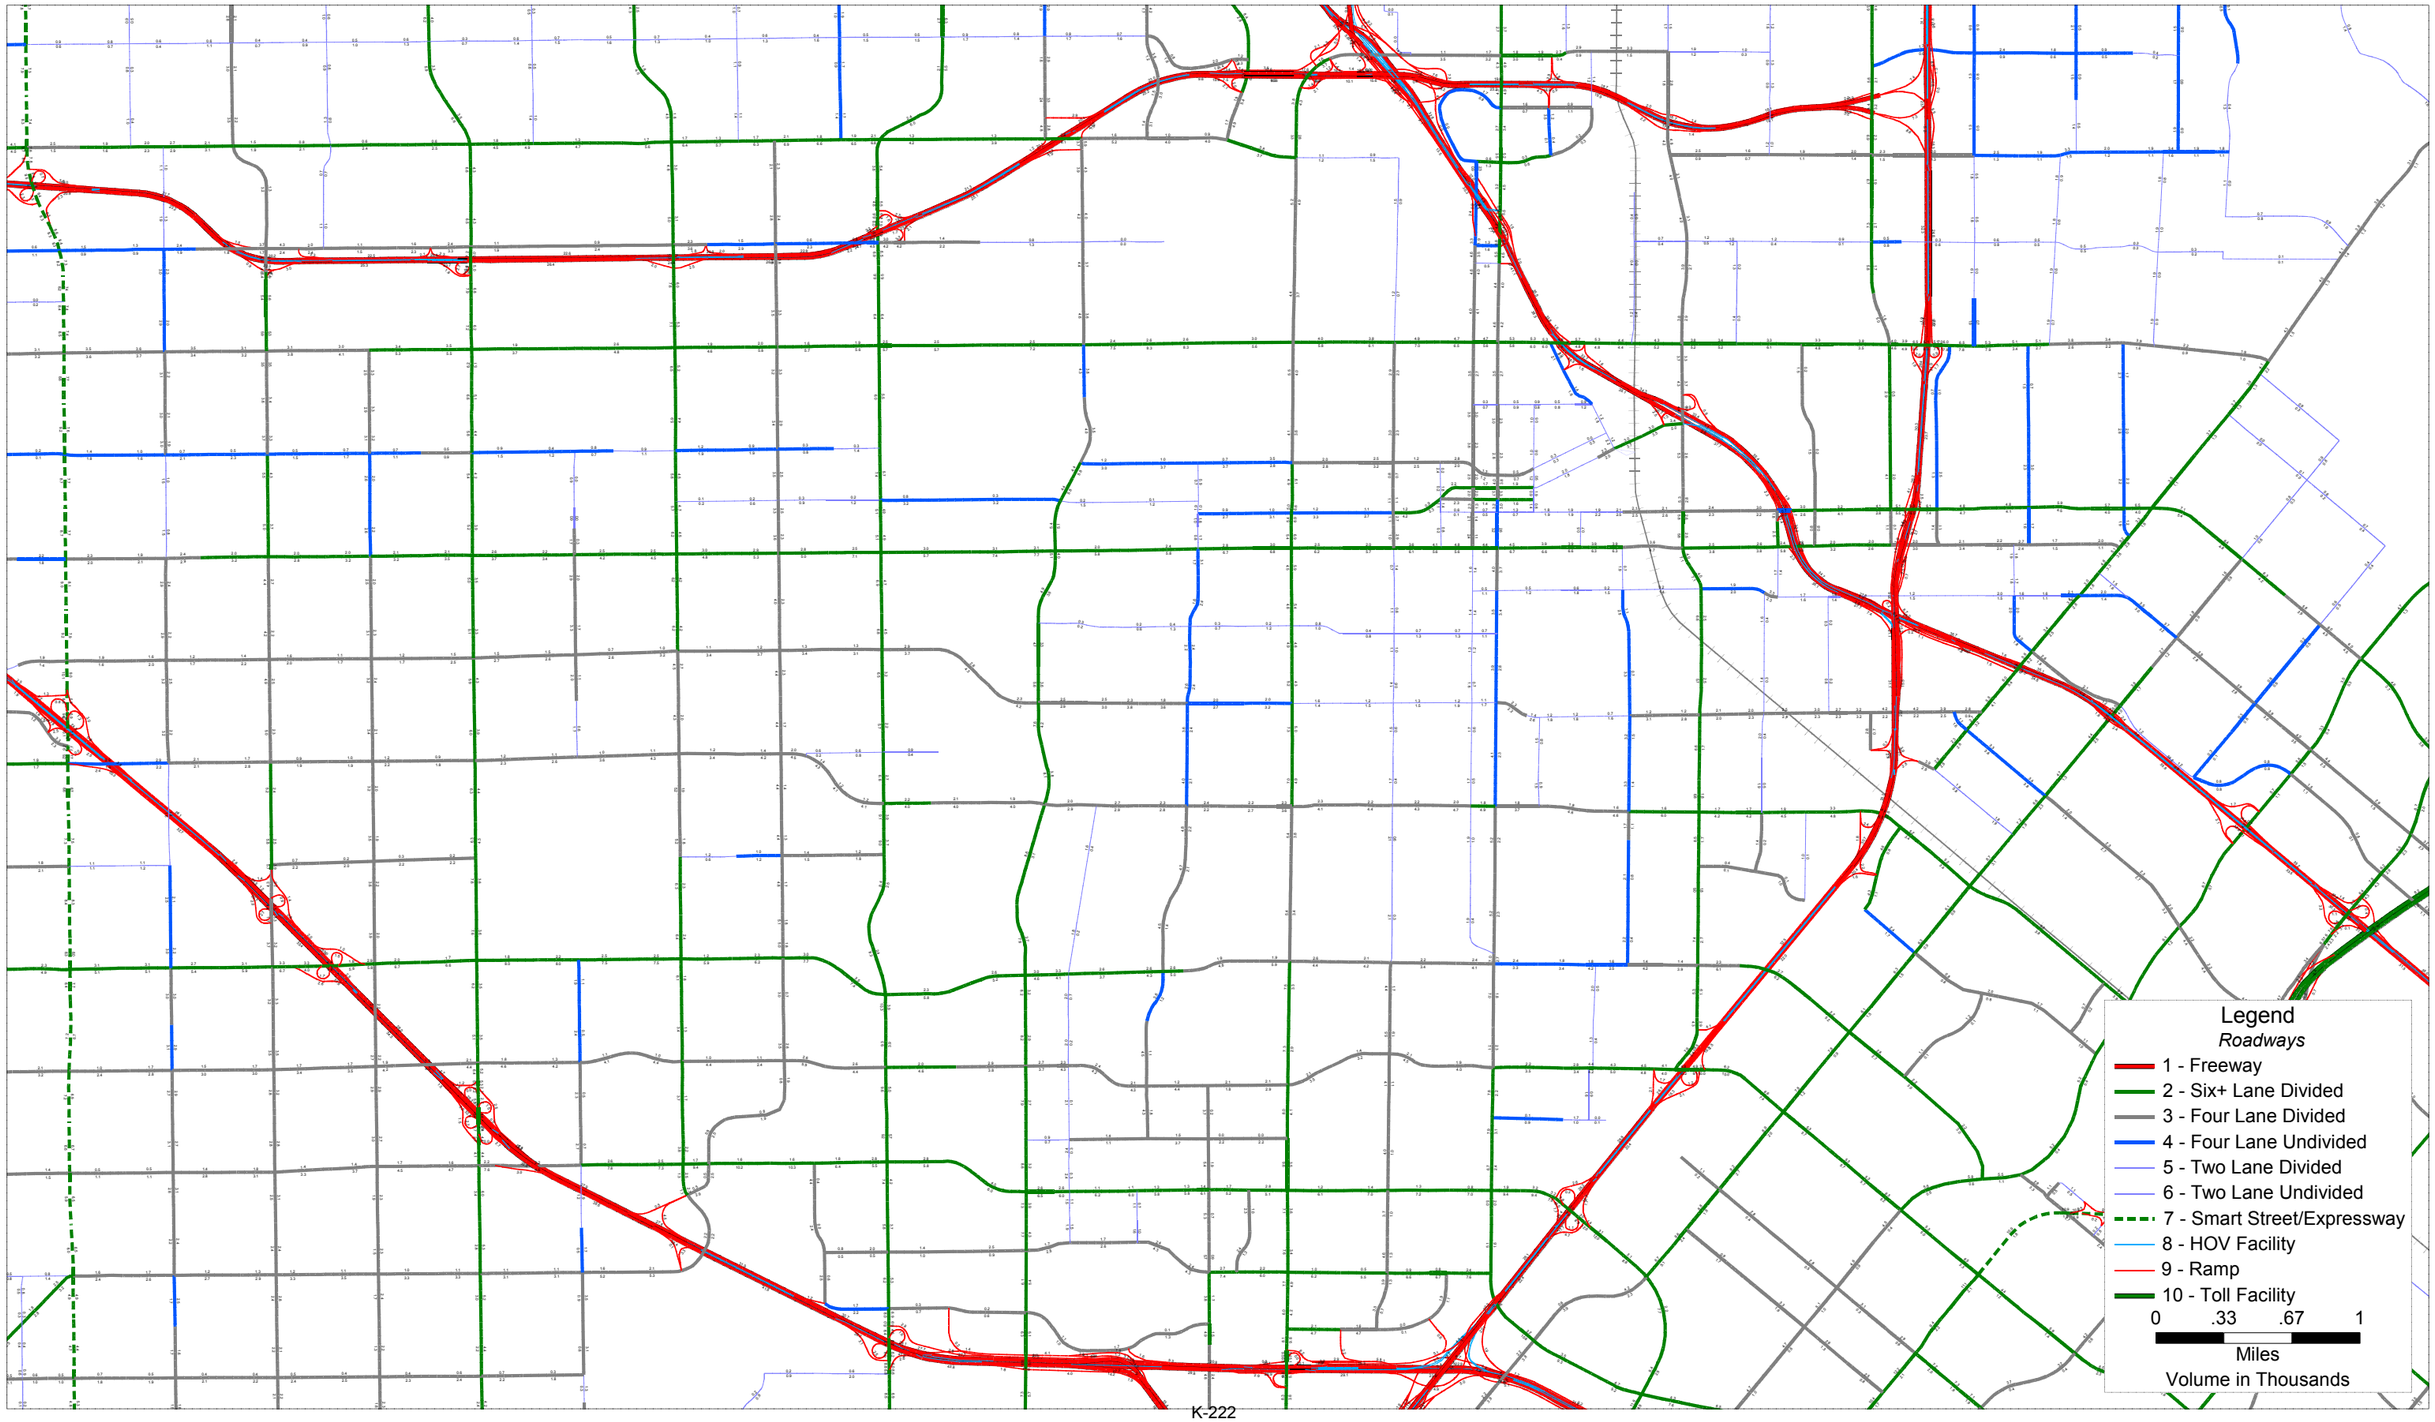


OCTAM 5.0 - Year 2016 PM Peak Period Forecasts
Volumes in Thousands
Raw Volumes - Not For Distribution

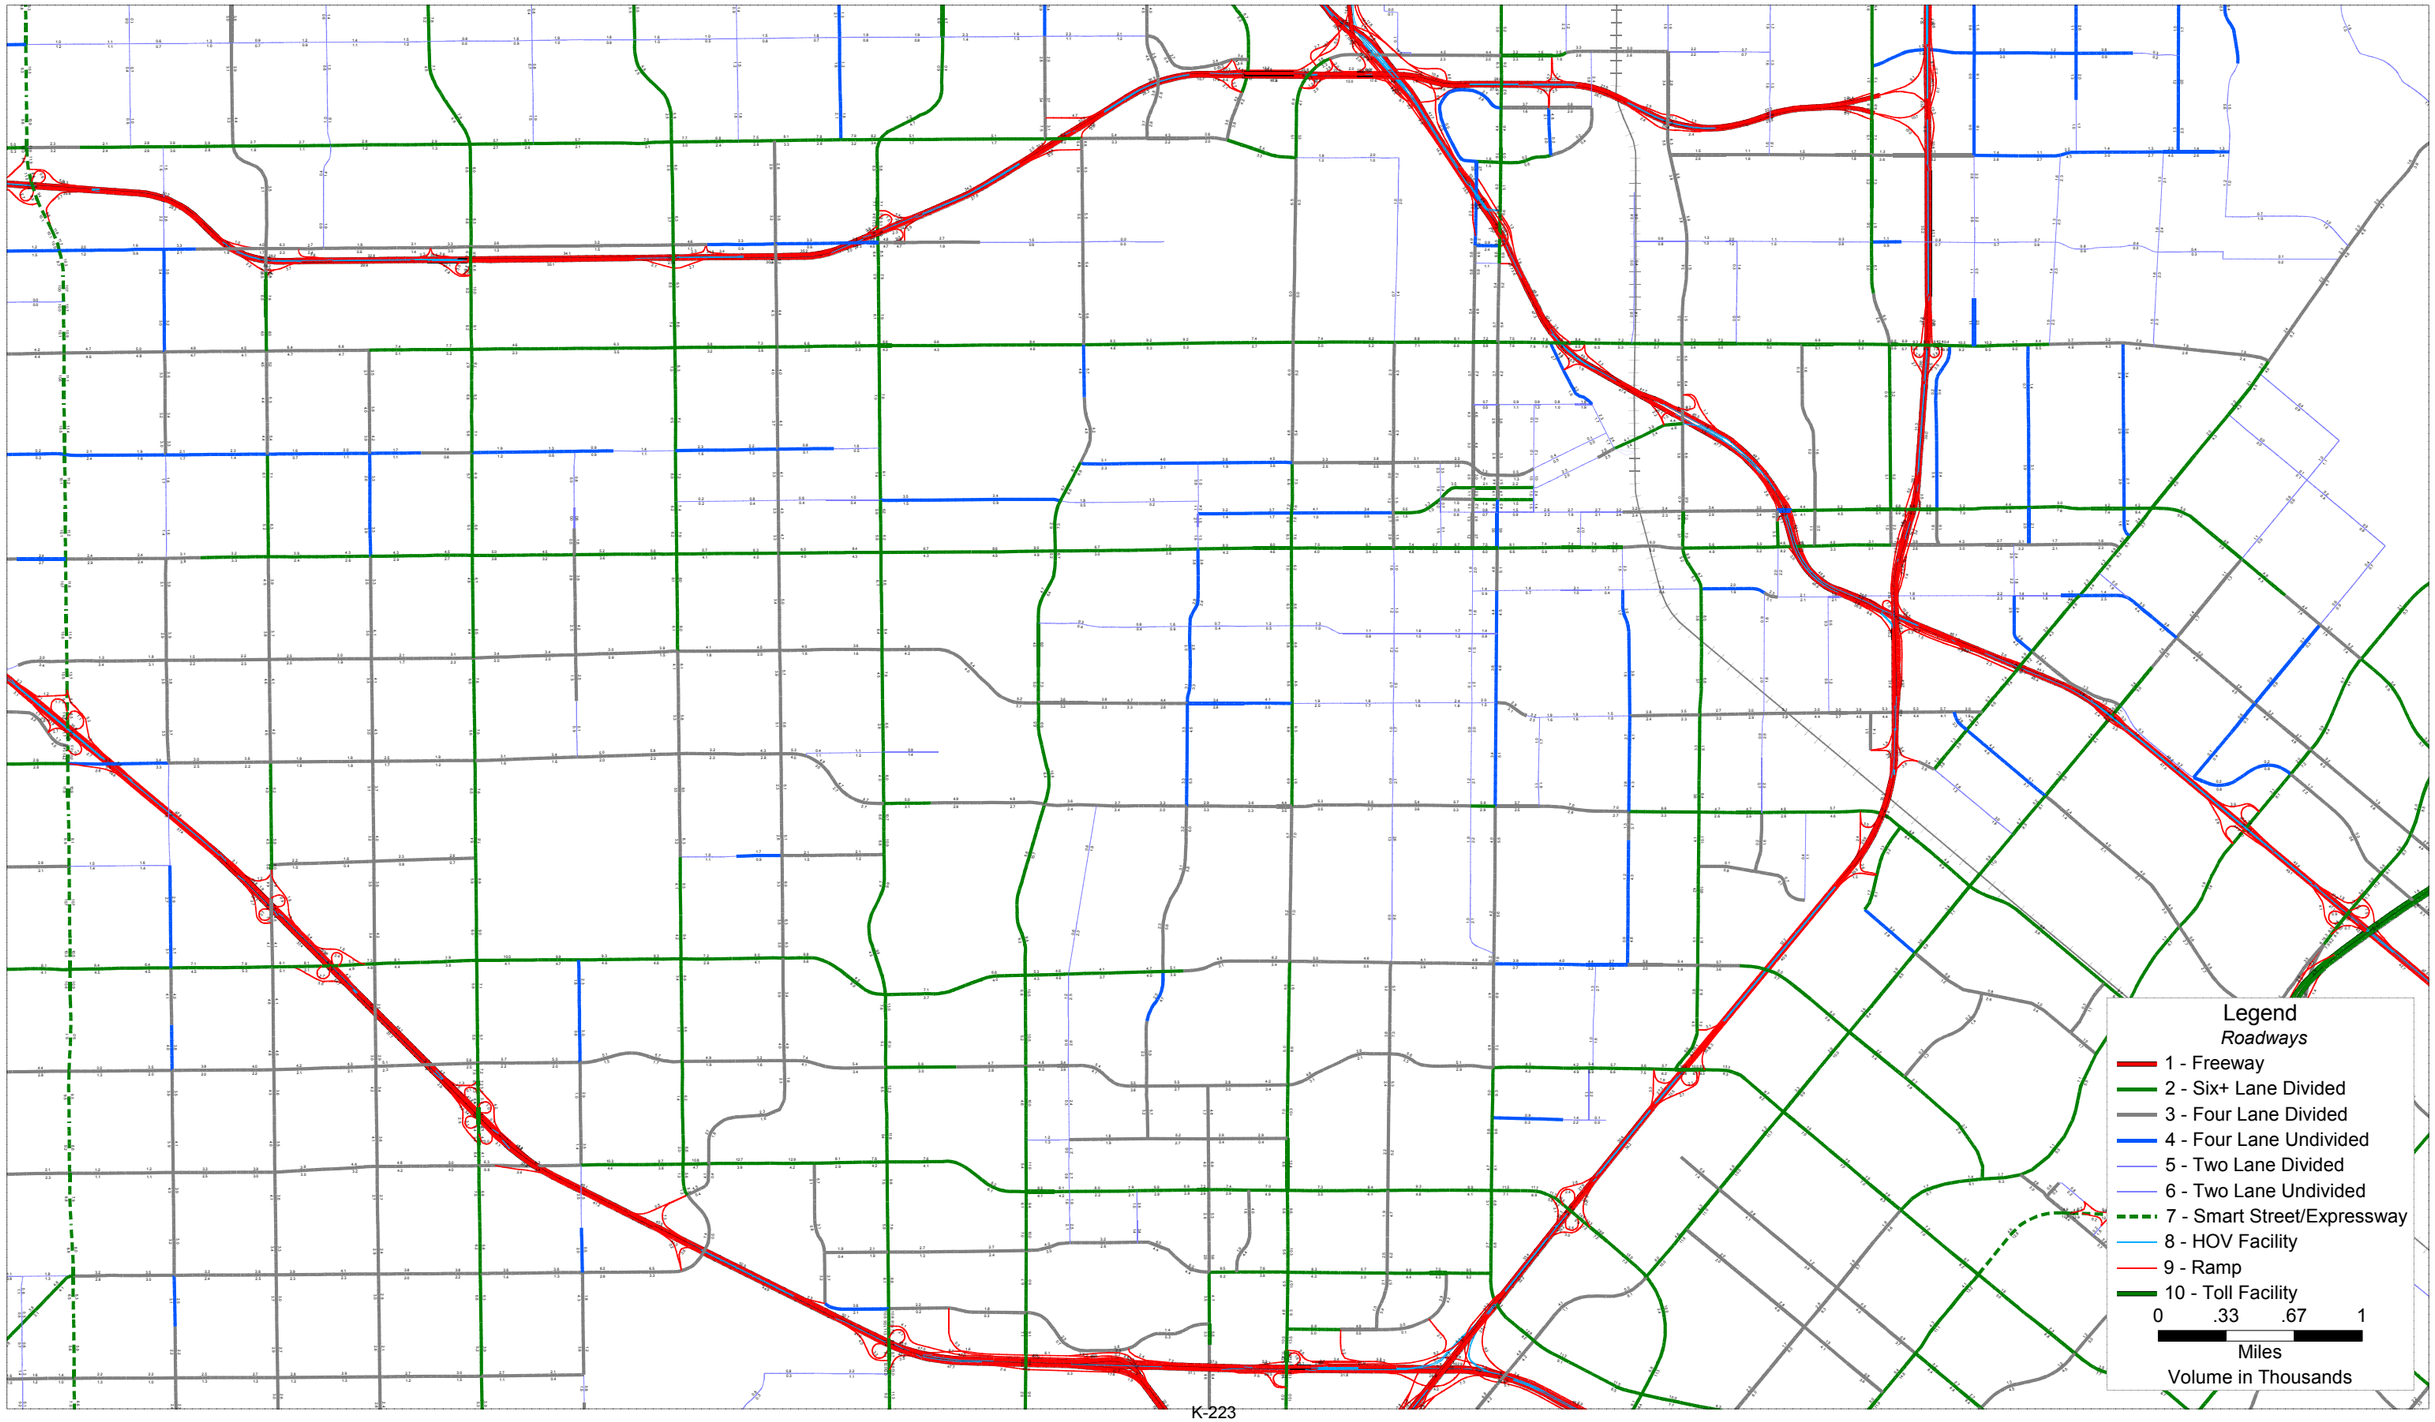


OCTAM 5.0 - Year 2045 SACE Baseline Daily Forecasts
Volumes in Thousands
Raw Volumes - Not For Distribution

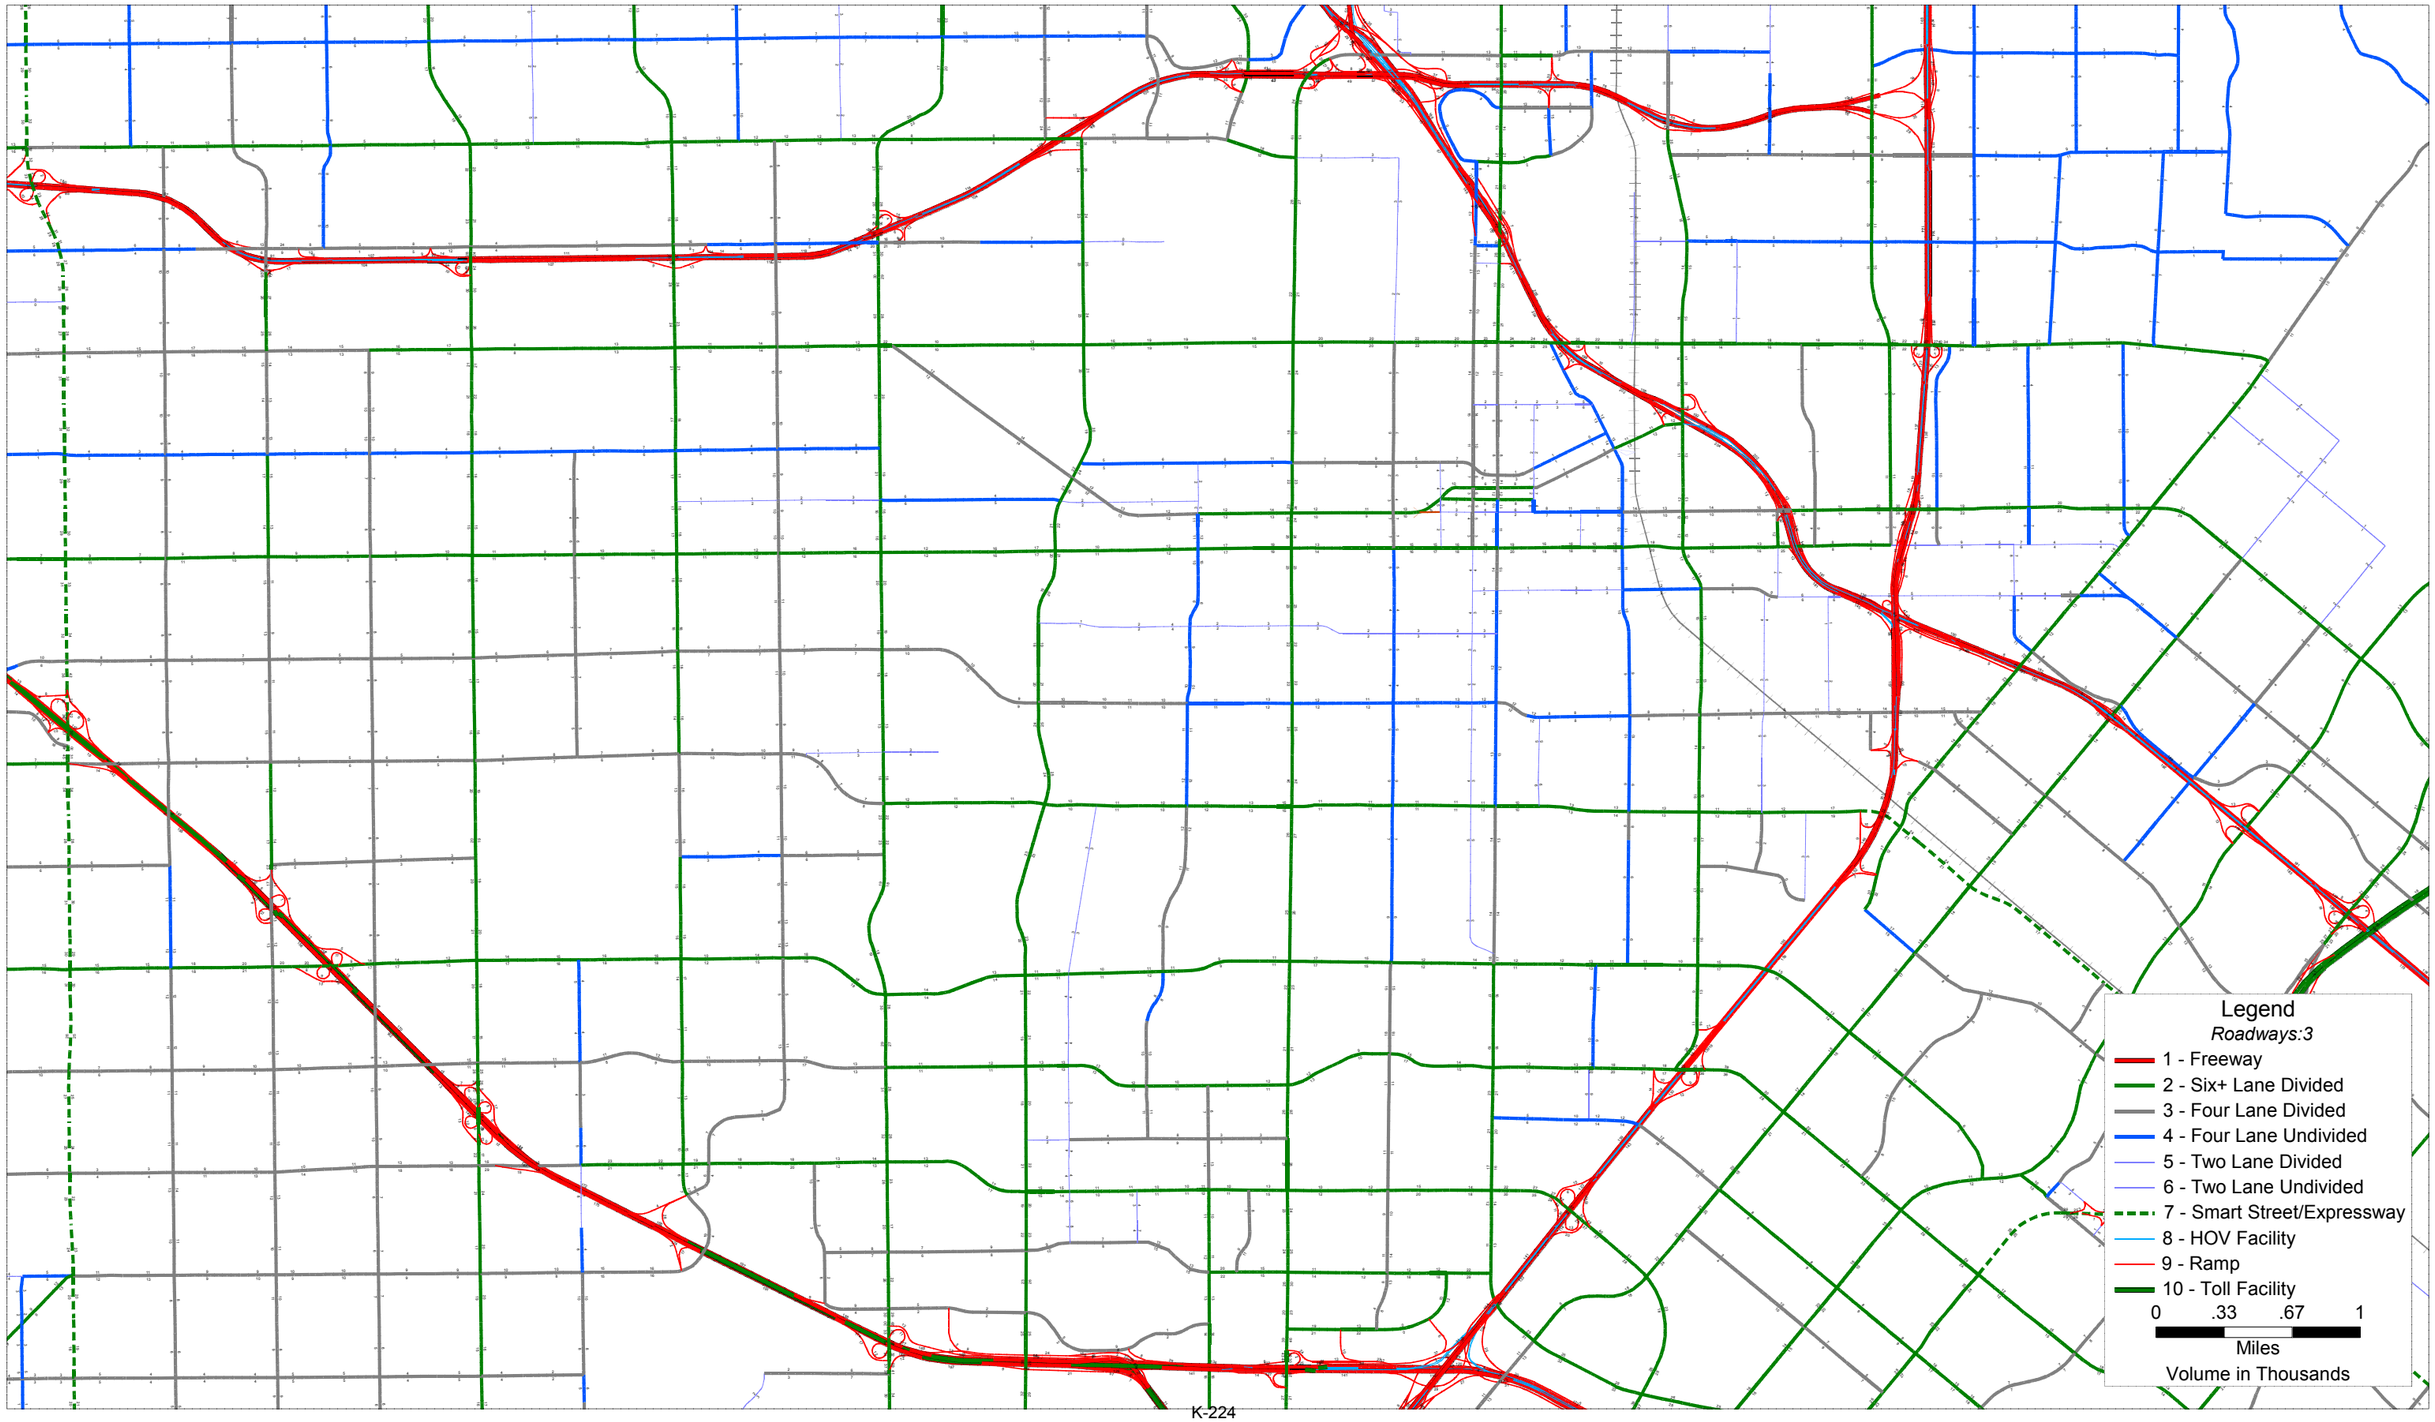

OCTAM 5.0 - Year 2045 SACE Baseline AM Peak Period Forecasts
Volumes in Thousands
Raw Volumes - Not For Distribution

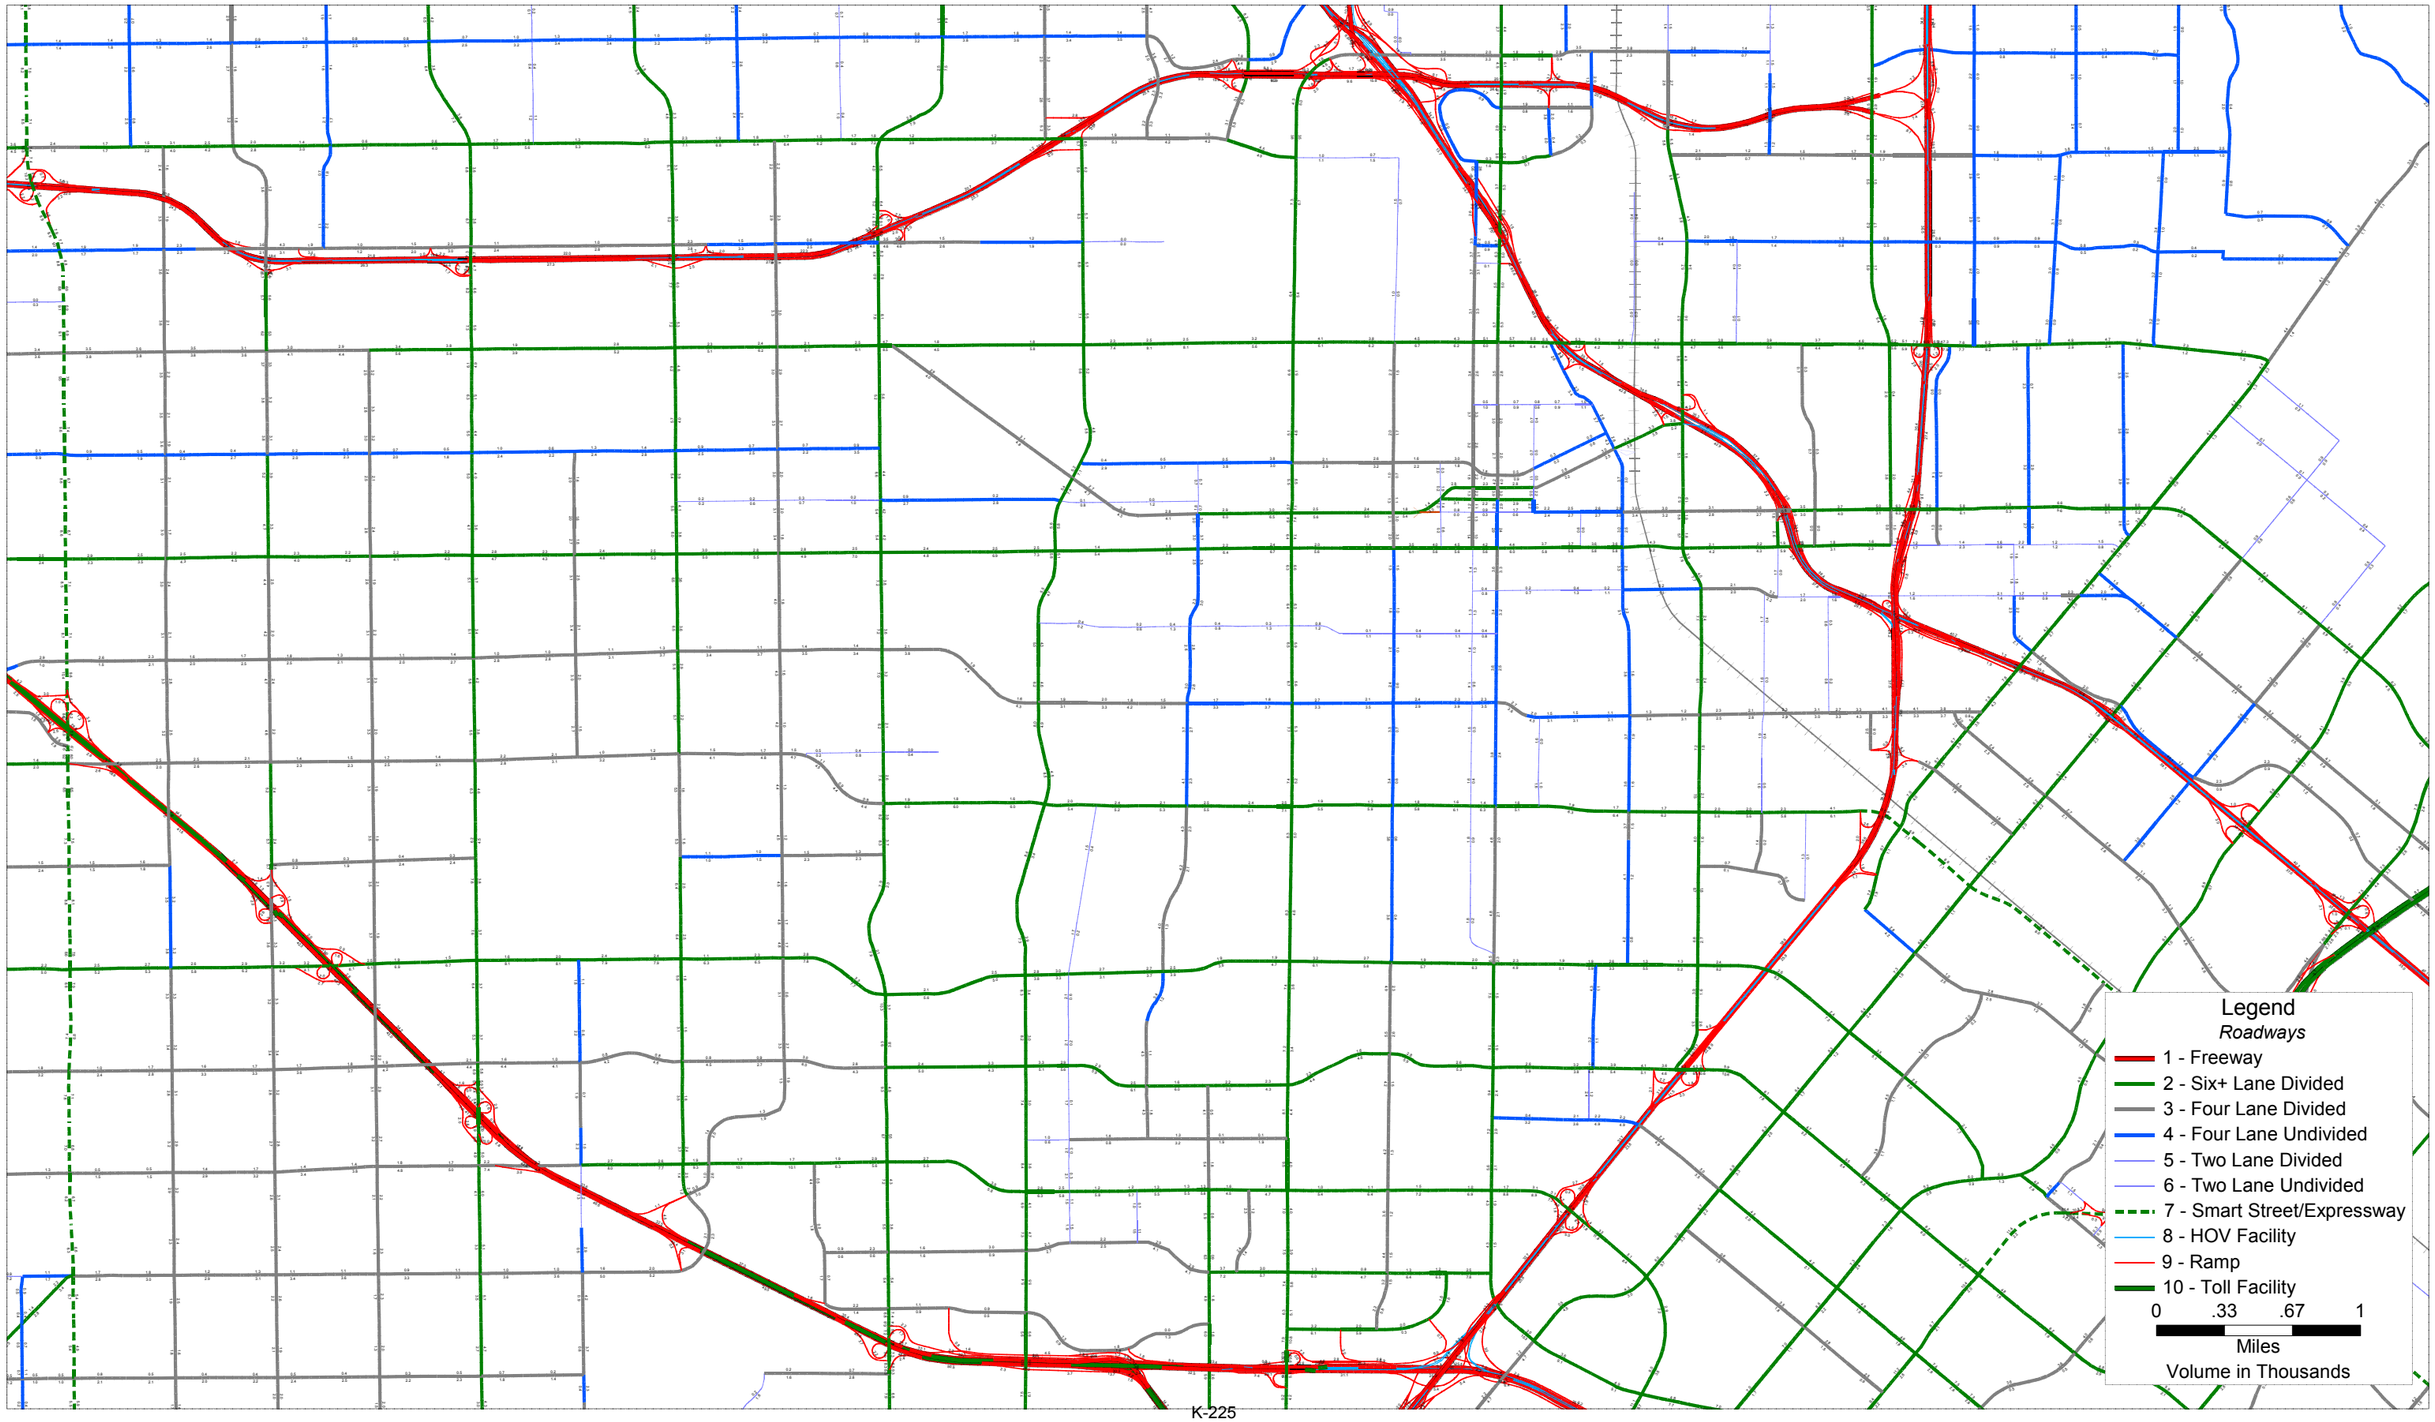

OCTAM 5.0 - Year 2045 SACE Baseline PM Peak Period Forecasts
Volumes in Thousands
Raw Volumes - Not For Distribution

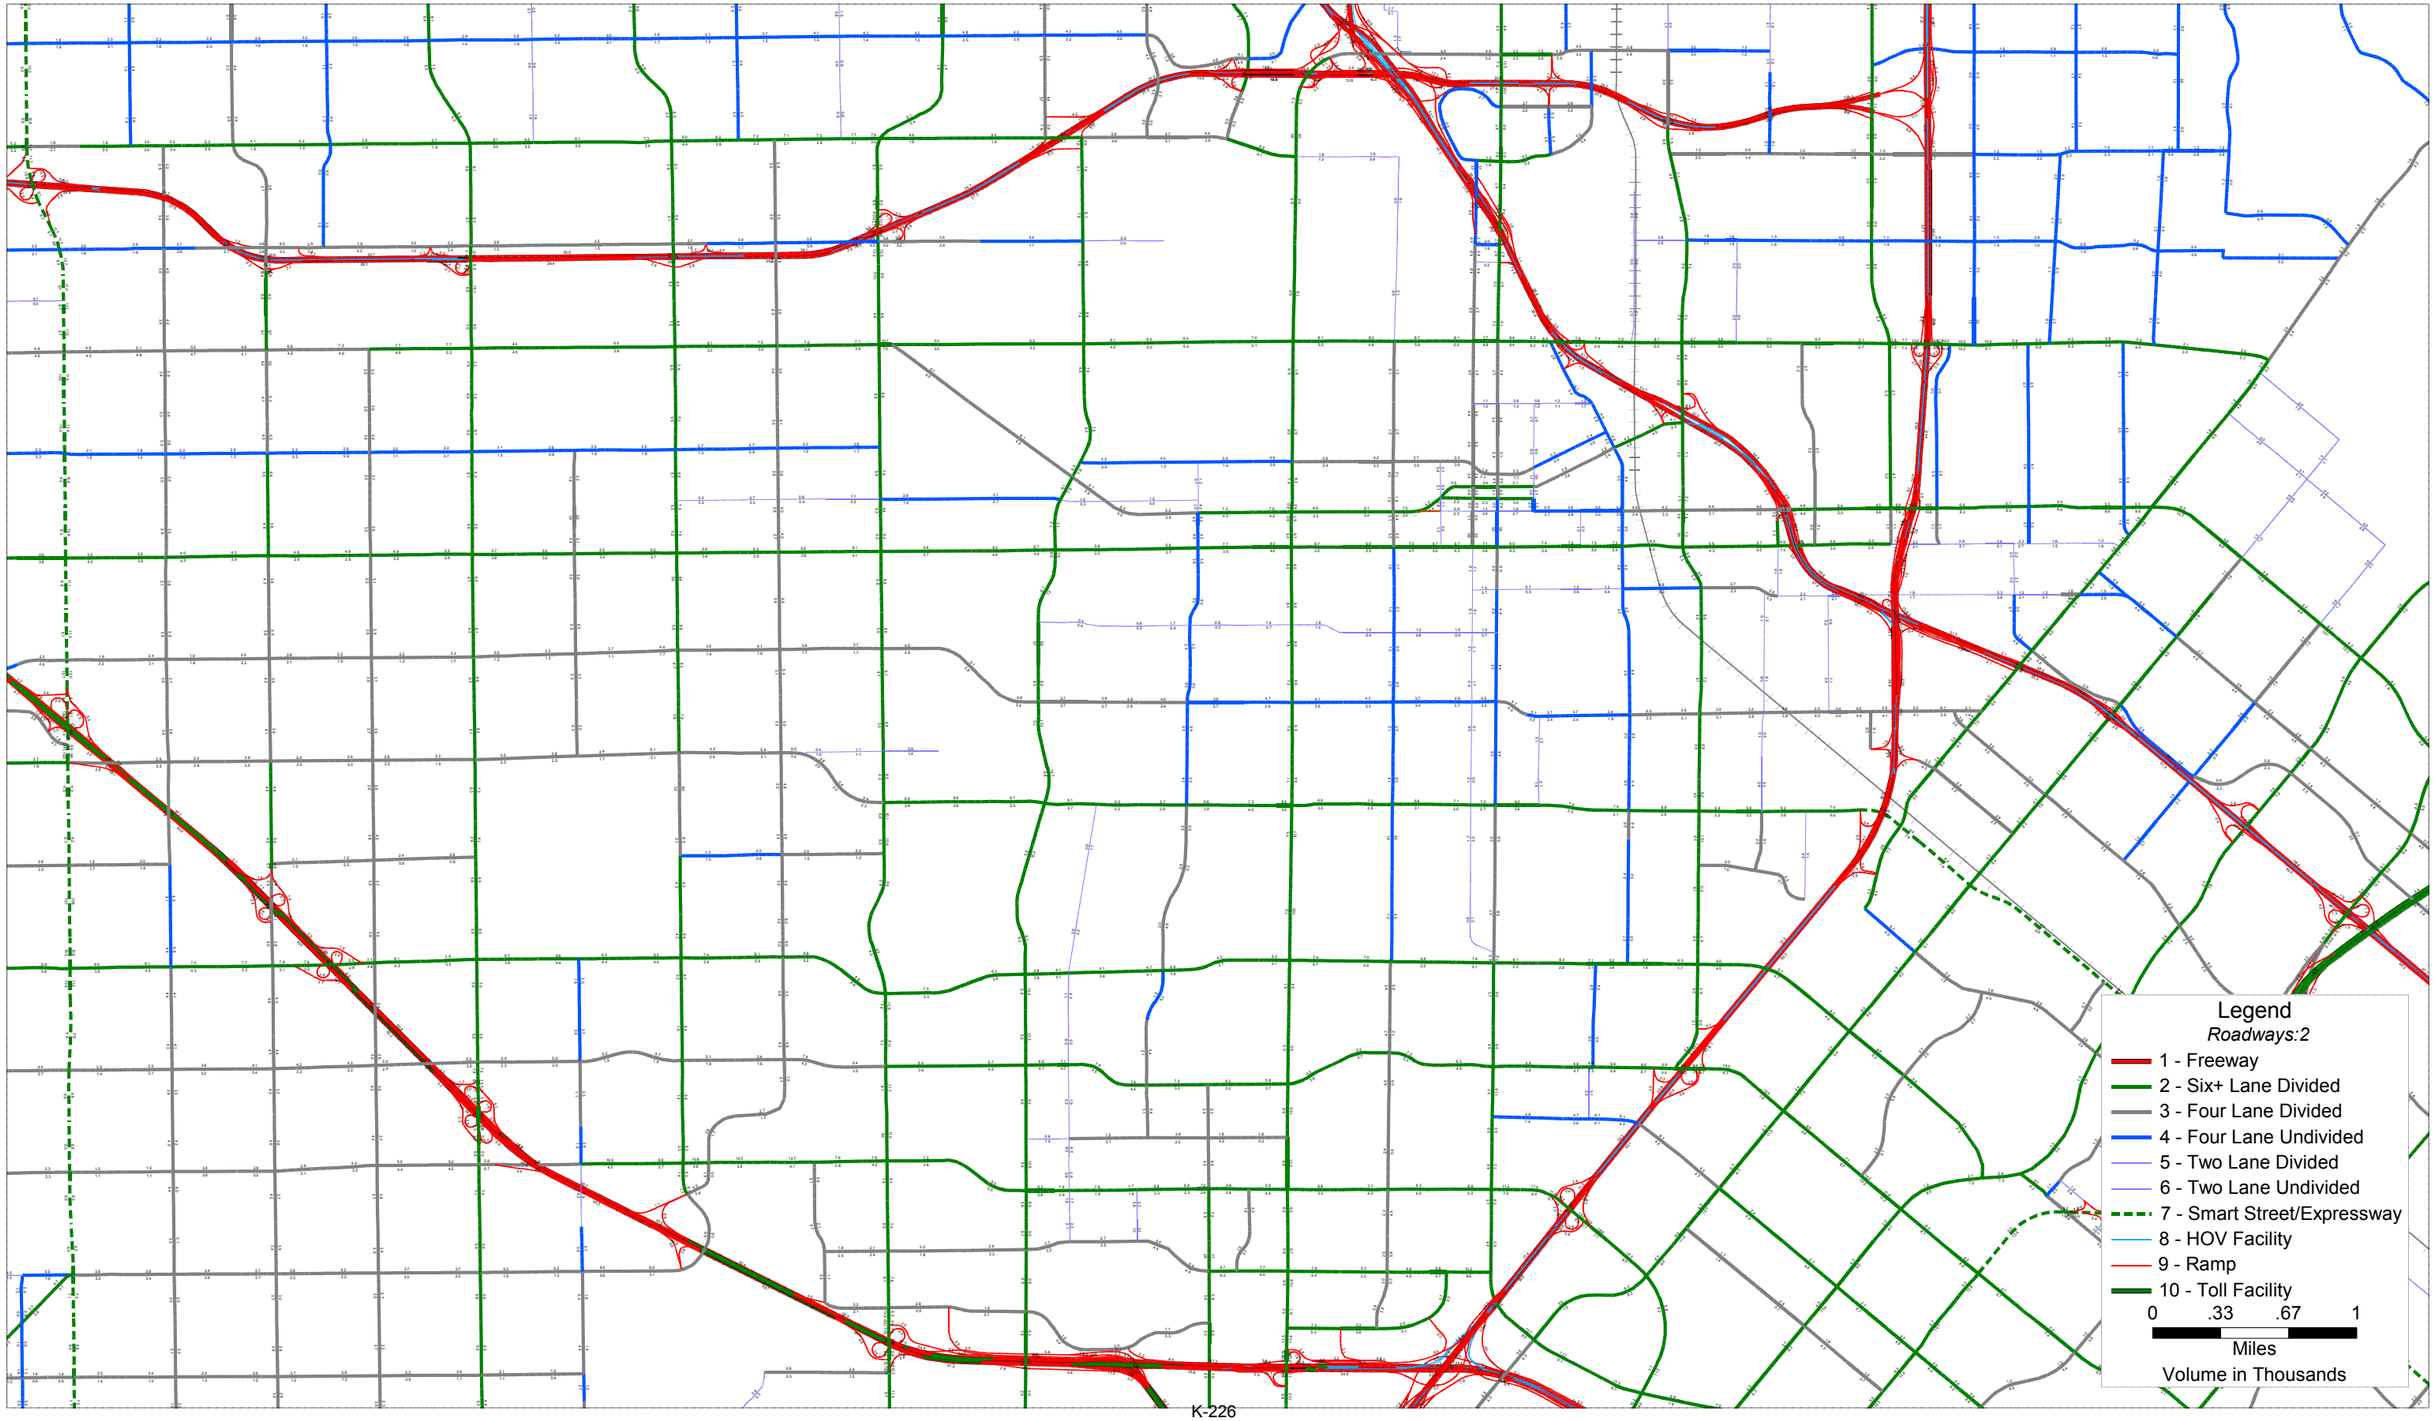

APPENDIX D
ANALYSIS WORKSHEETS

APPENDIX D.1

ANALYSIS WORKSHEETS –
2020 NP (AM Peak Hour)

Santa Ana Circulation Element

Scenario Report

Scenario:	2020 NP AM Peak Hour
Command:	Default Command
Volume:	2020 NP AM
Geometry:	NP
Impact Fee:	Default Impact Fee
Trip Generation:	Default Trip Generation
Trip Distribution:	Default Trip Distribution
Paths:	Default Path
Routes:	Default Route
Configuration:	Default Configuration

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

2020 NP AM Peak Hour Thu Oct 22, 2020 13:49:21 Page 2-1

Santa Ana Circulation Element

Impact Analysis Report
Level Of Service

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in V/C
# 1 Euclid St and 1st St	D	xxxxx	0.849	D	xxxxx	0.849	+ 0.000 V/C
# 2 Euclid St and McFadden Ave	E	xxxxx	0.909	E	xxxxx	0.909	+ 0.000 V/C
# 3 Euclid St and Edinger Ave	D	xxxxx	0.861	D	xxxxx	0.861	+ 0.000 V/C
# 4 Newhope St and Hazard Ave	C	xxxxx	0.709	C	xxxxx	0.709	+ 0.000 V/C
# 5 Newhope St and McFadden Ave	D	xxxxx	0.828	D	xxxxx	0.828	+ 0.000 V/C
# 6 Harbor Blvd and SR-22 WB Off-R	C	27.4	0.695	C	27.4	0.695	+ 0.000 D/V
# 7 Trask Avenue and SR-22 EB On-R	B	11.5	0.457	B	11.5	0.457	+ 0.000 D/V
# 8 Harbor Blvd and Westminster Av	D	xxxxx	0.820	D	xxxxx	0.820	+ 0.000 V/C
# 9 Harbor Blvd and 1st St	D	xxxxx	0.807	D	xxxxx	0.807	+ 0.000 V/C
# 10 Harbor Blvd and McFadden Ave	C	xxxxx	0.791	C	xxxxx	0.791	+ 0.000 V/C
# 11 Harbor Blvd and Edinger Ave	C	xxxxx	0.766	C	xxxxx	0.766	+ 0.000 V/C
# 12 Harbor Blvd and Warner Ave	D	xxxxx	0.808	D	xxxxx	0.808	+ 0.000 V/C
# 13 Harbor Blvd and Segerstrom Ave	E	xxxxx	0.978	E	xxxxx	0.978	+ 0.000 V/C
# 14 MacArthur Blvd and Hyland Ave	B	xxxxx	0.608	B	xxxxx	0.608	+ 0.000 V/C
# 15 MacArthur Blvd and Harbor Blvd	C	xxxxx	0.754	C	xxxxx	0.754	+ 0.000 V/C
# 16 Harbor Blvd and Sunflower Ave	C	xxxxx	0.702	C	xxxxx	0.702	+ 0.000 V/C
# 17 Harbor Blvd and I-405 WB Off-R	B	19.7	0.695	B	19.7	0.695	+ 0.000 D/V
# 18 Harbor Blvd and I-405 EB Off-R	B	13.2	0.524	B	13.2	0.524	+ 0.000 D/V
# 19 Fairview St and Civic Center D	B	xxxxx	0.667	B	xxxxx	0.667	+ 0.000 V/C
# 20 Fairview St and 1st St	D	xxxxx	0.872	D	xxxxx	0.872	+ 0.000 V/C
# 21 Fairview St and McFadden Ave	C	xxxxx	0.786	C	xxxxx	0.786	+ 0.000 V/C
# 22 Fairview St and Edinger Ave	C	xxxxx	0.753	C	xxxxx	0.753	+ 0.000 V/C
# 23 Fairview St and Warner Ave	D	xxxxx	0.850	D	xxxxx	0.850	+ 0.000 V/C
# 24 Fairview St and MacArthur Blvd	C	xxxxx	0.704	C	xxxxx	0.704	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
# 25 Fairview Rd and Sunflower Ave	C	xxxxx	0.705	C	xxxxx	0.705	+ 0.000 V/C
# 26 Greenville St and Edinger Ave	A	xxxxx	0.563	A	xxxxx	0.563	+ 0.000 V/C
# 27 Greenville St and Segerstrom A	C	xxxxx	0.727	C	xxxxx	0.727	+ 0.000 V/C
# 28 Raitt St and McFadden Ave	C	xxxxx	0.715	C	xxxxx	0.715	+ 0.000 V/C
# 29 Raitt St and Edinger Ave	D	xxxxx	0.851	D	xxxxx	0.851	+ 0.000 V/C
# 30 Bear St and MacArthur Blvd	C	xxxxx	0.737	C	xxxxx	0.737	+ 0.000 V/C
# 31 Bristol St and 17th St	C	xxxxx	0.725	C	xxxxx	0.725	+ 0.000 V/C
# 32 Bristol St and Civic Center Dr	D	xxxxx	0.827	D	xxxxx	0.827	+ 0.000 V/C
# 33 Bristol St and Santa Ana Blvd	B	xxxxx	0.669	B	xxxxx	0.669	+ 0.000 V/C
# 34 Bristol St and 1st St	C	xxxxx	0.745	C	xxxxx	0.745	+ 0.000 V/C
# 35 Bristol St and McFadden Ave	C	xxxxx	0.749	C	xxxxx	0.749	+ 0.000 V/C
# 36 Bristol St and Warner Ave	C	xxxxx	0.767	C	xxxxx	0.767	+ 0.000 V/C
# 37 Bristol St and Segerstrom Ave	C	xxxxx	0.794	C	xxxxx	0.794	+ 0.000 V/C
# 38 Bristol St and Alton Ave	A	xxxxx	0.556	A	xxxxx	0.556	+ 0.000 V/C
# 39 Bristol St and MacArthur Blvd	C	xxxxx	0.738	C	xxxxx	0.738	+ 0.000 V/C
# 40 Bristol St and Sunflower Ave	B	xxxxx	0.635	B	xxxxx	0.635	+ 0.000 V/C
# 41 Bristol St and I-405 WB Ramps	B	19.1	0.500	B	19.1	0.500	+ 0.000 D/V
# 42 Bristol St and I-405 EB Ramps	C	22.3	0.607	C	22.3	0.607	+ 0.000 D/V
# 43 Flower St and Santa Ana Blvd	A	xxxxx	0.596	A	xxxxx	0.596	+ 0.000 V/C
# 44 Flower St and 1st St	C	xxxxx	0.795	C	xxxxx	0.795	+ 0.000 V/C
# 45 Flower St and McFadden Ave	D	xxxxx	0.819	D	xxxxx	0.819	+ 0.000 V/C
# 46 Flower St and Segerstrom Ave	C	xxxxx	0.769	C	xxxxx	0.769	+ 0.000 V/C
# 47 Flower St and MacArthur Blvd	B	xxxxx	0.698	B	xxxxx	0.698	+ 0.000 V/C
# 48 Main St and La Veta Ave	A	xxxxx	0.574	A	xxxxx	0.574	+ 0.000 V/C
# 49 Main St and Mainplace Dr / Mem	A	xxxxx	0.485	A	xxxxx	0.485	+ 0.000 V/C
# 50 Main St and 17th St	D	xxxxx	0.821	D	xxxxx	0.821	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
# 51 Main St and Civic Center Dr	C	xxxxx	0.755	C	xxxxx	0.755	+ 0.000 V/C
# 52 Main St and Santa Ana Blvd	B	xxxxx	0.667	B	xxxxx	0.667	+ 0.000 V/C
# 53 Main St and 4th St	A	xxxxx	0.490	A	xxxxx	0.490	+ 0.000 V/C
# 54 Main St and 1st St	C	xxxxx	0.758	C	xxxxx	0.758	+ 0.000 V/C
# 55 Main St and McFadden Ave	E	xxxxx	0.902	E	xxxxx	0.902	+ 0.000 V/C
# 56 Main St and Edinger Ave	D	xxxxx	0.826	D	xxxxx	0.826	+ 0.000 V/C
# 57 Main St and MacArthur Blvd	C	xxxxx	0.735	C	xxxxx	0.735	+ 0.000 V/C
# 58 Penn Wy and 17th St	B	11.2	0.602	B	11.2	0.602	+ 0.000 D/V
# 59 I-5 NB Off Ramps/17th Street	C	31.2	0.740	C	31.2	0.740	+ 0.000 D/V
# 60 Penn Wy and I-5 SB Ramps	B	19.0	0.436	B	19.0	0.436	+ 0.000 D/V
# 61 Santiago St and Civic Center D	C	16.9	0.723	C	16.9	0.723	+ 0.000 V/C
# 62 Santiago St and Santa Ana Blvd	A	xxxxx	0.553	A	xxxxx	0.553	+ 0.000 V/C
# 64 Standard Ave and 1st St	D	xxxxx	0.803	D	xxxxx	0.803	+ 0.000 V/C
# 65 Standard Ave and Mcfadden Ave	B	xxxxx	0.609	B	xxxxx	0.609	+ 0.000 V/C
# 66 Halladay St and Warner Ave	B	xxxxx	0.659	B	xxxxx	0.659	+ 0.000 V/C
# 67 Halladay St and Dyer Rd	A	xxxxx	0.567	A	xxxxx	0.567	+ 0.000 V/C
# 68 SR-55 SB Ramps and MacArthur B	B	19.8	0.615	B	19.8	0.615	+ 0.000 D/V
# 69 SR-55 NB Ramps and MacArthur B	B	19.2	0.742	B	19.2	0.742	+ 0.000 D/V
# 70 SR-55 SB Ramps and Dyer Rd	C	23.7	0.552	C	23.7	0.552	+ 0.000 D/V
# 71 Glassell St and La Veta Ave	B	xxxxx	0.603	B	xxxxx	0.603	+ 0.000 V/C
# 72 Glassell St and SR-22 WB Ramps	C	28.5	0.741	C	28.5	0.741	+ 0.000 D/V
# 73 Grand Ave / Glassell St and SR	C	27.0	0.760	C	27.0	0.760	+ 0.000 D/V
# 74 Grand Ave and Fairhaven Ave	B	xxxxx	0.680	B	xxxxx	0.680	+ 0.000 V/C
# 75 Grand Ave and Santa Clara Ave	D	xxxxx	0.885	D	xxxxx	0.885	+ 0.000 V/C
# 76 Grand Ave and 17th St	C	xxxxx	0.797	C	xxxxx	0.797	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Del/ Veh	V/ C	Future LOS	Del/ Veh	V/ C	Change in
# 77 Grand Ave and I-5 NB Ramps	B	12.9	0.516	B	12.9	0.516	+ 0.000 D/V
# 78 Grand Ave and Santa Ana Blvd	C	23.8	0.662	C	23.8	0.662	+ 0.000 D/V
# 79 Grand Ave and 1st St	D	xxxxx	0.803	D	xxxxx	0.803	+ 0.000 V/C
# 80 Grand Ave and Chestnut Ave	C	xxxxx	0.705	C	xxxxx	0.705	+ 0.000 V/C
# 81 Grand Ave and McFadden Ave	D	xxxxx	0.829	D	xxxxx	0.829	+ 0.000 V/C
# 82 Grand Ave and Edinger Ave	C	xxxxx	0.763	C	xxxxx	0.763	+ 0.000 V/C
# 83 Grand Ave and Warner Ave	A	xxxxx	0.528	A	xxxxx	0.528	+ 0.000 V/C
# 84 SR-55 NB Ramps and Dyer Rd	B	16.3	0.530	B	16.3	0.530	+ 0.000 D/V
# 85 Cambridge St and La Veta Ave	C	17.3	0.799	C	17.3	0.799	+ 0.000 V/C
# 86 Cambridge St and Fairhaven Ave	A	xxxxx	0.559	A	xxxxx	0.559	+ 0.000 V/C
# 87 Mabury St and 1st Street	C	28.3	0.691	C	28.3	0.691	+ 0.000 D/V
# 88 Tustin St and La Veta Ave	A	xxxxx	0.521	A	xxxxx	0.521	+ 0.000 V/C
# 89 Tustin St and SR-22 WB On-Ramp	B	12.9	0.734	B	12.9	0.734	+ 0.000 D/V
# 90 Tustin St and SR-22 EB Off-Ram	C	24.2	0.731	C	24.2	0.731	+ 0.000 D/V
# 91 Tustin Ave and Fairhaven Ave	E	xxxxx	0.977	E	xxxxx	0.977	+ 0.000 V/C
# 92 Tustin Ave and Santa Clara Ave	D	xxxxx	0.866	D	xxxxx	0.866	+ 0.000 V/C
# 93 Tustin Ave and 17th St	C	xxxxx	0.748	C	xxxxx	0.748	+ 0.000 V/C
# 94 Tustin Ave and 4th St	C	xxxxx	0.701	C	xxxxx	0.701	+ 0.000 V/C
# 95 SR-55 SB Ramps / Auto Mall Dr	C	24.4	0.558	C	24.4	0.558	+ 0.000 D/V
# 96 SR-55 NB Ramps / Del Amo Ave a	C	24.0	0.463	C	24.0	0.463	+ 0.000 D/V
# 97 Red Hill Ave and Edinger Ave	A	xxxxx	0.569	A	xxxxx	0.569	+ 0.000 V/C
# 98 Red Hill Ave and Warner Ave	A	xxxxx	0.485	A	xxxxx	0.485	+ 0.000 V/C
# 99 Red Hill Ave and Dyer Rd / bar	A	xxxxx	0.575	A	xxxxx	0.575	+ 0.000 V/C
#100 Red Hill Ave and Alton Pkwy	A	xxxxx	0.524	A	xxxxx	0.524	+ 0.000 V/C
#101 Red Hill Ave and MacArthur Blv	B	xxxxx	0.664	B	xxxxx	0.664	+ 0.000 V/C
#102 Red Hill Ave and Main St	B	xxxxx	0.670	B	xxxxx	0.670	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
#103 I-5 SB Ramps and Santa Ana Blv	B	17.4	0.514	B	17.4	0.514	+ 0.000 D/V
#104 Tustin Ranch Rd and Warner Ave	A	xxxxx	0.475	A	xxxxx	0.475	+ 0.000 V/C
#105 Von Karman Ave and Barranca Pk	C	xxxxx	0.762	C	xxxxx	0.762	+ 0.000 V/C
#106 Red Hill Avenue and El Camino	C	xxxxx	0.706	C	xxxxx	0.706	+ 0.000 V/C
#107 Red Hill Avenue and I-5 NB Ram	C	20.3	0.670	C	20.3	0.670	+ 0.000 D/V
#108 Red Hill Avenue and I-5 SB Ram	C	22.0	0.784	C	22.0	0.784	+ 0.000 D/V
#109 Red Hill Avenue and Nisson Roa	B	xxxxx	0.653	B	xxxxx	0.653	+ 0.000 V/C
#110 Red Hill Avenue and Walnut Ave	B	xxxxx	0.684	B	xxxxx	0.684	+ 0.000 V/C
#111 Red Hill Avenue and Valencia A	A	xxxxx	0.544	A	xxxxx	0.544	+ 0.000 V/C
#112 Tustin Ranch Road and Warner A	A	xxxxx	0.426	A	xxxxx	0.426	+ 0.000 V/C
#113 Tustin Ranch Road and Walnut A	F	xxxxx	1.193	F	xxxxx	1.193	+ 0.000 V/C
#114 SR-55 SB Ramps and Irvine Boul	C	23.2	0.970	C	23.2	0.970	+ 0.000 D/V
#115 SR-55 NB Ramps and Irvine Boul	B	19.8	0.797	B	19.8	0.797	+ 0.000 D/V

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:25                  Page 3-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #1 Euclid St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.849
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        65               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include        WideBypass       WideBypass
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     124 1044   179   207 1844   104   218  811   153   184  586   188
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  124 1044   179   207 1844   104   218  811   153   184  586   188
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   124 1044   179   207 1844   104   218  811   153   184  586   188
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  124 1044   179   207 1844   104   218  811   153   184  586   188
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  124 1044   179   207 1844   104   218  811   153   184  586   188
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 2.56  0.44  1.00 2.84  0.16  1.00 2.52  0.48  1.00 2.27  0.73
Final Sat.:  1600 4297   703  1600 4744   256  1600 4238   762  1600 3834  1166
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.24  0.25  0.13 0.39  0.41  0.14 0.19  0.20  0.12 0.15  0.16
Crit Moves:  ****                ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:26                 Page 4-1
--------------------------------------------------------------------------------
                          Santa Ana Circulation Element
--------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
********************************************************************************
Intersection #2 Euclid St and McFadden Ave
********************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.909
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        92               Level Of Service:                  E
********************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     145 1100   131   137 1906   158   227  463   287   166  368   140
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  145 1100   131   137 1906   158   227  463   287   166  368   140
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   145 1100   131   137 1906   158   227  463   287   166  368   140
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  145 1100   131   137 1906   158   227  463   287   166  368   140
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  145 1100   131   137 1906   158   227  463   287   166  368   140
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       1.00 2.68  0.32  1.00 2.77  0.23  1.00 1.23  0.77  1.00 1.45  0.55
Final Sat.:  1600 4489   511  1600 4633   367  1600 2075  1225  1600 2418   882
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.25  0.26  0.09 0.41  0.43  0.14 0.22  0.23  0.10 0.15  0.16
Crit Moves:  ****                ****             ****  ****
********************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:28                  Page 5-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #3 Euclid St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.861
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        69               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  2  0  1    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     134  845    72   127 1842   169   172  753   460   100  609   111
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  134  845    72   127 1842   169   172  753   460   100  609   111
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   134  845    72   127 1842   169   172  753   460   100  609   111
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  134  845    72   127 1842   169   172  753   460   100  609   111
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  134  845    72   127 1842   169   172  753   460   100  609   111
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.76  0.24  2.00 2.75  0.25  1.00 2.00  1.00  1.00 2.00  1.00
Final Sat.:  3200 4623   377  3200 4597   403  1600 3400  1600  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.18  0.19  0.04 0.40  0.42  0.11 0.22  0.29  0.06 0.18  0.07
Crit Moves:  ****                ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:30                  Page 6-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #4 Newhope St and Hazard Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.709
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      98  738   105    91 1341   123    78  199   147    51  170    68
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   98  738   105    91 1341   123    78  199   147    51  170    68
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    98  738   105    91 1341   123    78  199   147    51  170    68
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   98  738   105    91 1341   123    78  199   147    51  170    68
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   98  738   105    91 1341   123    78  199   147    51  170    68
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.03  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       1.00 1.75  0.25  1.00 1.83  0.17  1.00 1.15  0.85  1.00 1.43  0.57
Final Sat.:  1600 2901   399  1600 3031   269  1600 1940  1360  1600 2386   914
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.25  0.26  0.06 0.44  0.46  0.05 0.10  0.11  0.03 0.07  0.07
Crit Moves:  ****                ****             ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:31                 Page 7-1
--------------------------------------------------------------------------------
                          Santa Ana Circulation Element
--------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
********************************************************************************
Intersection #5 Newhope St and McFadden Ave
********************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.828
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        59               Level Of Service:                  D
********************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     110  491   173   119 1183   110   135  492   160   176  449   100
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  110  491   173   119 1183   110   135  492   160   176  449   100
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   110  491   173   119 1183   110   135  492   160   176  449   100
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  110  491   173   119 1183   110   135  492   160   176  449   100
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  110  491   173   119 1183   110   135  492   160   176  449   100
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.48  0.52  1.00 1.83  0.17  1.00 1.51  0.49  1.00 1.64  0.36
Final Sat.:  1600 2466   834  1600 3028   272  1600 2515   785  1600 2717   583
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.20  0.21  0.07 0.39  0.40  0.08 0.20  0.20  0.11 0.17  0.17
Crit Moves:  ****                ****       ****        ****
********************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:32                  Page 8-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #6 Harbor Blvd and SR-22 WB Off-Ramp / Banner Dr
******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.695
Loss Time (sec):       5                Average Delay (sec/veh):        27.4
Optimal Cycle:        38                Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  0    0  0  2  1  0    0  0  1! 0  0    1  1  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      70 1274     0     0 1354    18    74    0   121   836   44   117
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   70 1274     0     0 1354    18    74    0   121   836   44   117
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    70 1274     0     0 1354    18    74    0   121   836   44   117
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   70 1274     0     0 1354    18    74    0   121   836   44   117
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   70 1274     0     0 1354    18    74    0   121   836   44   117
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.91  0.90 1.00  0.90  0.96 0.96  0.85
Lanes:       1.00 3.00  0.00  0.00 2.96  0.04  0.38 0.00  0.62  1.90 0.10  1.00
Final Sat.:  1805 5187     0     0 5109    68   648    0  1059  3448  181  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.25  0.00  0.00 0.27  0.27  0.11 0.00  0.11  0.24 0.24  0.07
Crit Moves:  ****                 ****                    ****       ****
Green/Cycle: 0.06 0.44  0.00  0.00 0.38  0.38  0.16 0.00  0.16  0.35 0.35  0.35
Volume/Cap:  0.70 0.56  0.00  0.00 0.70  0.70  0.70 0.00  0.70  0.70 0.70  0.21
Delay/Veh:   65.4 21.3   0.0   0.0 27.2  27.2  46.8  0.0  46.8  29.7 29.7  23.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  65.4 21.3   0.0   0.0 27.2  27.2  46.8  0.0  46.8  29.7 29.7  23.0
LOS by Move:    E    C     A     A    C     C     D    A     D     C    C     C
HCM2k85thQ:     6   16     0     0   21    21    11    0    11    19   19     4
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:33                  Page 9-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #7 Trask Avenue and SR-22 EB On-Ramp
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.457
Loss Time (sec):       5               Average Delay (sec/veh):        11.5
Optimal Cycle:        23               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    0  0  0  0  0    2  0  1  0  0    0  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0     0    0     0   651  815     0     0  738   138
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0     0    0     0   651  815     0     0  738   138
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0     0    0     0   651  815     0     0  738   138
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0     0    0     0   651  815     0     0  738   138
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0     0    0     0   651  815     0     0  738   138
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  0.92 1.00  1.00  1.00 0.93  0.93
Lanes:       0.00 0.00  0.00  0.00 0.00  0.00  2.00 1.00  0.00  0.00 1.68  0.32
Final Sat.:     0    0     0     0    0     0  3502 1900     0     0 2968   555
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.00 0.00  0.00  0.19 0.43  0.00  0.00 0.25  0.25
Crit Moves:                                     ****                   ****
Green/Cycle: 0.00 0.00  0.00  0.00 0.00  0.00  0.41 0.95  0.00  0.00 0.54  0.54
Volume/Cap:  0.00 0.00  0.00  0.00 0.00  0.00  0.46 0.45  0.00  0.00 0.46  0.46
Delay/Veh:    0.0  0.0   0.0   0.0  0.0   0.0  21.9  0.4   0.0   0.0 14.0  14.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0   0.0  0.0   0.0  21.9  0.4   0.0   0.0 14.0  14.0
LOS by Move:    A    A     A     A    A     A     C    A     A     A    B     B
HCM2k85thQ:     0    0     0     0    0     0    12    4     0     0   13    13
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:33                Page 10-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #8 Harbor Blvd and Westminster Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.820
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        56               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  2  1  0    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     178 1173   251   212 1663    95   176  927    33   212  574   156
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  178 1173   251   212 1663    95   176  927    33   212  574   156
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   178 1173   251   212 1663    95   176  927    33   212  574   156
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  178 1173   251   212 1663    95   176  927    33   212  574   156
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  178 1173   251   212 1663    95   176  927    33   212  574   156
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 2.90  0.10  1.00 3.00  1.00
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 4835   165  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.23  0.16  0.13 0.33  0.06  0.11 0.19  0.20  0.13 0.11  0.10
Crit Moves:  ****               ****                    ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:34                Page 11-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #9 Harbor Blvd and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.807
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        53               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     117  935   202   227 1914   124   140  932   181   245  621   145
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  117  935   202   227 1914   124   140  932   181   245  621   145
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   117  935   202   227 1914   124   140  932   181   245  621   145
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  117  935   202   227 1914   124   140  932   181   245  621   145
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  117  935   202   227 1914   124   140  932   181   245  621   145
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  2.00 2.51  0.49  2.00 2.43  0.57
Final Sat.:  1600 5100  1600  1600 5100  1600  3200 4219   781  3200 4091   909
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.18  0.13  0.14 0.38  0.08  0.04 0.22  0.23  0.08 0.15  0.16
Crit Moves:  ****               ****                   ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:35                Page 12-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #10 Harbor Blvd and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.791
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        50               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     104 1059   101   182 1919    64   167  435   130   190  430   123
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  104 1059   101   182 1919    64   167  435   130   190  430   123
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   104 1059   101   182 1919    64   167  435   130   190  430   123
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  104 1059   101   182 1919    64   167  435   130   190  430   123
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  104 1059   101   182 1919    64   167  435   130   190  430   123
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       2.00 3.00  1.00  2.00 2.90  0.10  1.00 1.54  0.46  1.00 1.56  0.44
Final Sat.:  3200 5100  1600  3200 4845   155  1600 2564   736  1600 2588   712
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.21  0.06  0.06 0.40  0.41  0.10 0.17  0.18  0.12 0.17  0.17
Crit Moves:  ****                ****             ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #11 Harbor Blvd and Edinger Ave

Cycle (sec):	100	Critical Vol./Cap.(X):	0.766
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	46	Level Of Service:	C

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Protected			Protected			Protected			Protected		
Rights:	Include			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	2 0	3 0	1	2 0	3 0	1	2 0	2 1	0	2 0	3 0	1
Volume Module:												
Base Vol:	103	772	146	183	2105	61	107	644	323	221	491	204
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	103	772	146	183	2105	61	107	644	323	221	491	204
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	103	772	146	183	2105	61	107	644	323	221	491	204
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	103	772	146	183	2105	61	107	644	323	221	491	204
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	103	772	146	183	2105	61	107	644	323	221	491	204
Saturation Flow Module:												
Sat/Lane:	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
Adjustment:	1.00	1.06	1.00	1.00	1.06	1.00	1.00	1.06	1.00	1.00	1.06	1.00
Lanes:	2.00	3.00	1.00	2.00	3.00	1.00	2.00	2.00	1.00	2.00	3.00	1.00
Final Sat.:	3200	5100	1600	3200	5100	1600	3200	3400	1600	3200	5100	1600
Capacity Analysis Module:												
Vol/Sat:	0.03	0.15	0.09	0.06	0.41	0.04	0.03	0.19	0.20	0.07	0.10	0.13
Crit Moves:	****			****					****	****		

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:37                Page 14-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #12 Harbor Blvd and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.808
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        54               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     115  701   178   457 2059   123    97 1385   364   151  792   134
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  115  701   178   457 2059   123    97 1385   364   151  792   134
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   115  701   178   457 2059   123    97 1385   364   151  792   134
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  115  701   178   457 2059   123    97 1385   364   151  792   134
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  115  701   178   457 2059   123    97 1385   364   151  792   134
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.39  0.61  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 4028   972  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.17  0.18  0.14 0.40  0.08  0.03 0.27  0.23  0.05 0.16  0.08
Crit Moves:  ****                ****             ****             ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:38                Page 15-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #13 Harbor Blvd and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.978
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     111  791    50   171 2299    86    88  737   297   117  362    82
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  111  791    50   171 2299    86    88  737   297   117  362    82
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   111  791    50   171 2299    86    88  737   297   117  362    82
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  111  791    50   171 2299    86    88  737   297   117  362    82
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  111  791    50   171 2299    86    88  737   297   117  362    82
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 2.82  0.18  1.00 2.89  0.11  1.00 1.43  0.57  1.00 2.00  1.00
Final Sat.:  3200 4715   285  1600 4827   173  1600 2381   919  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.17  0.18  0.11 0.48  0.50  0.06 0.31  0.32  0.07 0.11  0.05
Crit Moves:  ****                ****             ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:39                Page 16-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #14 MacArthur Blvd and Hyland Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.608
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        29               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  1  0    1  0  1  0  1    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      69    3    19     8    2    19     7 1953   775    64  490    20
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   69    3    19     8    2    19     7 1953   775    64  490    20
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    69    3    19     8    2    19     7 1953   775    64  490    20
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   69    3    19     8    2    19     7 1953   775    64  490    20
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   69    3    19     8    2    19     7 1953   775    64  490    20
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 0.14  0.86  1.00 1.00  1.00  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200  218  1382  1600 1700  1600  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.01  0.01  0.01 0.00  0.01  0.00 0.38  0.48  0.04 0.10  0.01
Crit Moves:  ****                     ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:40                Page 17-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #15 MacArthur Blvd and Harbor Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.754
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        44               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     128  898    92   316 1820   126   126 1141   344   133  443   132
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  128  898    92   316 1820   126   126 1141   344   133  443   132
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   128  898    92   316 1820   126   126 1141   344   133  443   132
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  128  898    92   316 1820   126   126 1141   344   133  443   132
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  128  898    92   316 1820   126   126 1141   344   133  443   132
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.18  0.06  0.10 0.36  0.08  0.08 0.22  0.22  0.08 0.09  0.08
Crit Moves:  ****               ****             ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:41                Page 18-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #16 Harbor Blvd and Sunflower Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.702
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        37               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  1  1  0    1  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     217 1107   205   246 2324    57     9  109    42   130  166    94
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  217 1107   205   246 2324    57     9  109    42   130  166    94
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   217 1107   205   246 2324    57     9  109    42   130  166    94
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  217 1107   205   246 2324    57     9  109    42   130  166    94
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  217 1107   205   246 2324    57     9  109    42   130  166    94
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.00  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 1.44  0.56  1.00 1.28  0.72
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 2410   890  1603 2044  1152
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.22  0.13  0.08 0.46  0.04  0.01 0.05  0.05  0.08 0.08  0.08
Crit Moves:  ****               ****               ****               ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:42                Page 19-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #17 Harbor Blvd and I-405 WB Off-Ramp
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.695
Loss Time (sec):       5               Average Delay (sec/veh):        19.7
Optimal Cycle:        38               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  0    0  0  4  0  0    0  0  0  0  0    1  0  1! 0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1567     0     0 2327     0     0    0     0   508    0   894
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1567     0     0 2327     0     0    0     0   508    0   894
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1567     0     0 2327     0     0    0     0   508    0   894
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1567     0     0 2327     0     0    0     0   508    0   894
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1567     0     0 2327     0     0    0     0   508    0   894
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  1.00  1.00 0.91  1.00  1.00 1.00  1.00  0.89 1.00  0.89
Lanes:       0.00 4.00  0.00  0.00 4.00  0.00  0.00 0.00  0.00  1.36 0.00  1.64
Final Sat.:     0 6916     0     0 6916     0     0    0     0  2298    0  2762
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.23  0.00  0.00 0.34  0.00  0.00 0.00  0.00  0.22 0.00  0.32
Crit Moves:  ****                 ****                                     ****
Green/Cycle: 0.00 0.48  0.00  0.00 0.48  0.00  0.00 0.00  0.00  0.47 0.00  0.47
Volume/Cap:  0.00 0.47  0.00  0.00 0.69  0.00  0.00 0.00  0.00  0.47 0.00  0.69
Delay/Veh:    0.0 17.3   0.0   0.0 20.7   0.0   0.0  0.0   0.0  18.4  0.0  22.2
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 17.3   0.0   0.0 20.7   0.0   0.0  0.0   0.0  18.4  0.0  22.2
LOS by Move:    A    B     A     A    C     A     A    A     A     B    A     C
HCM2k85thQ:     0   13     0     0   24     0     0    0     0    12    0    21
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:43                Page 20-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #18 Harbor Blvd and I-405 EB Off-Ramp
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.524
Loss Time (sec):       5               Average Delay (sec/veh):        13.2
Optimal Cycle:        26               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Ignore           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  3  0  1    0  0  4  0  0    1  0  1! 0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1729     0     0 1504     0   385    0   429     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1729     0     0 1504     0   385    0   429     0    0     0
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1729     0     0 1504     0   385    0   429     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1729     0     0 1504     0   385    0   429     0    0     0
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1729     0     0 1504     0   385    0   429     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  1.00  1.00 0.91  1.00  0.90 1.00  0.90  1.00 1.00  1.00
Lanes:       0.00 3.00  1.00  0.00 4.00  0.00  1.47 0.00  1.53  0.00 0.00  0.00
Final Sat.:     0 5187  1900     0 6916     0  2518    0  2611     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.33  0.00  0.00 0.22  0.00  0.15 0.00  0.16  0.00 0.00  0.00
Crit Moves:       ****        ****                     ****
Green/Cycle: 0.00 0.64  0.00  0.00 0.64  0.00  0.31 0.00  0.31  0.00 0.00  0.00
Volume/Cap:  0.00 0.52  0.00  0.00 0.34  0.00  0.49 0.00  0.52  0.00 0.00  0.00
Delay/Veh:    0.0 10.1   0.0   0.0  8.5   0.0  28.0  0.0  28.5   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 10.1   0.0   0.0  8.5   0.0  28.0  0.0  28.5   0.0  0.0   0.0
LOS by Move:    A    B     A     A    A     A     C    A     C     A    A     A
HCM2k85thQ:     0   16     0     0    9     0    10    0    11     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:44                Page 21-1
--------------------------------------------------------------------------------
                          Santa Ana Circulation Element
--------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
********************************************************************************
Intersection #19 Fairview St and Civic Center Dr
********************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.667
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        34               Level Of Service:                  B
********************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    0  1  0  1  0    1  1  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       6 1278   414   243 1402     6     6   23    23   300    9   155
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    6 1278   414   243 1402     6     6   23    23   300    9   155
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     6 1278   414   243 1402     6     6   23    23   300    9   155
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    6 1278   414   243 1402     6     6   23    23   300    9   155
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    6 1278   414   243 1402     6     6   23    23   300    9   155
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 2.27  0.73  1.00 2.99  0.01  0.23 0.89  0.88  1.94 0.06  1.00
Final Sat.:  1600 3826  1174  1600 4980    20   369 1415  1415  3107   93  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.33  0.35  0.15 0.28  0.29  0.02 0.02  0.02  0.10 0.10  0.10
Crit Moves:             ****  ****            ****                     ****
********************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:45                Page 22-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #20 Fairview St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.872
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        73               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include        WideBypass         Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     157 1206   227   241 1401   161   214 1233   191   163  732   245
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  157 1206   227   241 1401   161   214 1233   191   163  732   245
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   157 1206   227   241 1401   161   214 1233   191   163  732   245
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  157 1206   227   241 1401   161   214 1233   191   163  732   245
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  157 1206   227   241 1401   161   214 1233   191   163  732   245
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 3.00  1.00  1.00 2.69  0.31  1.00 2.60  0.40  1.00 2.25  0.75
Final Sat.:  1600 5100  1600  1600 4505   495  1600 4356   644  1600 3796  1204
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.24  0.14  0.15 0.31  0.33  0.13 0.28  0.30  0.10 0.19  0.20
Crit Moves:  ****                     ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:46                Page 23-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #21 Fairview St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.786
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        49               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     121 1294   173   142 1727   125   221  522   120   194  500    40
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  121 1294   173   142 1727   125   221  522   120   194  500    40
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   121 1294   173   142 1727   125   221  522   120   194  500    40
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  121 1294   173   142 1727   125   221  522   120   194  500    40
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  121 1294   173   142 1727   125   221  522   120   194  500    40
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.03  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 1.63  0.37  1.00 1.85  0.15
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 2702   598  1600 3063   237
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.25  0.11  0.09 0.34  0.08  0.14 0.19  0.20  0.12 0.16  0.17
Crit Moves:  ****               ****                    ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:47                Page 24-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #22 Fairview St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.753
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        44               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     188  831   116   215 1503   127   237  657   176   421  553   110
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  188  831   116   215 1503   127   237  657   176   421  553   110
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   188  831   116   215 1503   127   237  657   176   421  553   110
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  188  831   116   215 1503   127   237  657   176   421  553   110
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  188  831   116   215 1503   127   237  657   176   421  553   110
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 2.63  0.37  2.00 2.77  0.23  2.00 2.37  0.63  2.00 2.50  0.50
Final Sat.:  3200 4412   588  3200 4626   374  3200 3986  1014  3200 4204   796
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.19  0.20  0.07 0.32  0.34  0.07 0.16  0.17  0.13 0.13  0.14
Crit Moves:  ****                ****             ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:48                Page 25-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #23 Fairview St and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.850
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        65               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     215  952   125   205 1628   119    69 1010   301   307  926   300
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  215  952   125   205 1628   119    69 1010   301   307  926   300
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   215  952   125   205 1628   119    69 1010   301   307  926   300
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  215  952   125   205 1628   119    69 1010   301   307  926   300
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  215  952   125   205 1628   119    69 1010   301   307  926   300
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 2.65  0.35  2.00 2.80  0.20  2.00 2.31  0.69  2.00 2.27  0.73
Final Sat.:  3200 4443   557  3200 4673   327  3200 3898  1102  3200 3825  1175
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.21  0.22  0.06 0.35  0.36  0.02 0.26  0.27  0.10 0.24  0.26
Crit Moves:  ****                ****             ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:50                Page 26-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #24 Fairview St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.704
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     248  771    89   307 1546   173   125 1019   150   235  494   140
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  248  771    89   307 1546   173   125 1019   150   235  494   140
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   248  771    89   307 1546   173   125 1019   150   235  494   140
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  248  771    89   307 1546   173   125 1019   150   235  494   140
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  248  771    89   307 1546   173   125 1019   150   235  494   140
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.69  0.31  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 4503   497  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.17  0.18  0.10 0.30  0.11  0.04 0.20  0.09  0.07 0.10  0.09
Crit Moves:  ****               ****             ****             ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:50                Page 27-1
--------------------------------------------------------------------------------
                          Santa Ana Circulation Element
--------------------------------------------------------------------------------
                       Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
********************************************************************************
Intersection #25 Fairview Rd and Sunflower Ave
********************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.705
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
********************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  1  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     185 1071   163   204 1738   111    49  322    65   306  256   132
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  185 1071   163   204 1738   111    49  322    65   306  256   132
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   185 1071   163   204 1738   111    49  322    65   306  256   132
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  185 1071   163   204 1738   111    49  322    65   306  256   132
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  185 1071   163   204 1738   111    49  322    65   306  256   132
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.82  0.18  2.00 1.66  0.34  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 4712   288  3200 2763   537  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.21  0.10  0.06 0.37  0.39  0.02 0.12  0.12  0.10 0.08  0.08
Crit Moves:  ****                     ****       ****        ****
********************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:51                Page 28-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #26 Greenville St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.563
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        27               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    0  0  0  0  0    0  0  2  1  0    1  0  2  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     186    0   251     0    0     0     0  960   234   172  915     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  186    0   251     0    0     0     0  960   234   172  915     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   186    0   251     0    0     0     0  960   234   172  915     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  186    0   251     0    0     0     0  960   234   172  915     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  186    0   251     0    0     0     0  960   234   172  915     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 0.00  1.00  0.00 0.00  0.00  0.00 2.41  0.59  1.00 2.00  0.00
Final Sat.:  1600    0  1600     0    0     0     0 4059   941  1600 3400     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.00  0.16  0.00 0.00  0.00  0.00 0.24  0.25  0.11 0.27  0.00
Crit Moves:             ****                                 ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:52                Page 29-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #27 Greenville St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.727
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        40               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include        WideBypass       WideBypass
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  0  1    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      47  193    78   154  472   160    33  739   118   164  662    76
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   47  193    78   154  472   160    33  739   118   164  662    76
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    47  193    78   154  472   160    33  739   118   164  662    76
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   47  193    78   154  472   160    33  739   118   164  662    76
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   47  193    78   154  472   160    33  739   118   164  662    76
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.03  1.00
Lanes:       1.00 1.42  0.58  1.00 1.00  1.00  1.00 1.72  0.28  1.00 1.79  0.21
Final Sat.:  1600 2379   921  1600 1700  1600  1600 2859   441  1600 2970   330
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.08  0.08  0.10 0.28  0.10  0.02 0.26  0.27  0.10 0.22  0.23
Crit Moves:  ****                ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:53                Page 30-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #28 Raitt St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.715
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        39               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      62  570    90   100  762   104   116  704    90   172  542    97
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   62  570    90   100  762   104   116  704    90   172  542    97
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    62  570    90   100  762   104   116  704    90   172  542    97
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   62  570    90   100  762   104   116  704    90   172  542    97
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   62  570    90   100  762   104   116  704    90   172  542    97
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.73  0.27  1.00 1.76  0.24  1.00 1.77  0.23  1.00 1.70  0.30
Final Sat.:  1600 2864   436  1600 2916   384  1600 2937   363  1600 2814   486
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.20  0.21  0.06 0.26  0.27  0.07 0.24  0.25  0.11 0.19  0.20
Crit Moves:  ****                ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:54                Page 31-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #29 Raitt St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.851
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        65               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include        WideBypass         Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     188  501   181   152  716    85   165 1008   145   117  916    54
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  188  501   181   152  716    85   165 1008   145   117  916    54
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   188  501   181   152  716    85   165 1008   145   117  916    54
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  188  501   181   152  716    85   165 1008   145   117  916    54
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  188  501   181   152  716    85   165 1008   145   117  916    54
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.03  1.00
Lanes:       1.00 1.47  0.53  1.00 1.79  0.21  1.00 1.75  0.25  1.00 1.89  0.11
Final Sat.:  1600 2451   849  1600 2960   340  1600 2898   402  1600 3122   178
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.20  0.21  0.10 0.24  0.25  0.10 0.35  0.36  0.07 0.29  0.30
Crit Moves:  ****                ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:55                Page 32-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #30 Bear St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.737
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        42               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  2  0  1    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      81  280   119   199  756   300    97 1663   114    70 1180   100
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   81  280   119   199  756   300    97 1663   114    70 1180   100
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    81  280   119   199  756   300    97 1663   114    70 1180   100
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   81  280   119   199  756   300    97 1663   114    70 1180   100
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   81  280   119   199  756   300    97 1663   114    70 1180   100
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 2.00  1.00  1.00 2.00  1.00  1.00 2.81  0.19  1.00 2.77  0.23
Final Sat.:  1600 3400  1600  1600 3400  1600  1600 4692   308  1600 4625   375
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.08  0.07  0.12 0.22  0.19  0.06 0.35  0.37  0.04 0.26  0.27
Crit Moves:  ****                ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:57                Page 33-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #31 Bristol St and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.725
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        40               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     192  988   167   335 1376   181   324  963   156   359  824   273
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  192  988   167   335 1376   181   324  963   156   359  824   273
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   192  988   167   335 1376   181   324  963   156   359  824   273
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  192  988   167   335 1376   181   324  963   156   359  824   273
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  192  988   167   335 1376   181   324  963   156   359  824   273
OvlAdjVol:                                                               106
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.58  0.42  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 4331   669  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.19  0.10  0.10 0.27  0.11  0.10 0.22  0.23  0.11 0.16  0.17
OvlAdjV/S:                                                               0.07
Crit Moves:  ****                ****                    ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:58                Page 34-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #32 Bristol St and Civic Center Dr
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.827
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        58               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     123 1087    96   318 1284    80   149  755    93   121  401    83
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  123 1087    96   318 1284    80   149  755    93   121  401    83
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   123 1087    96   318 1284    80   149  755    93   121  401    83
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  123 1087    96   318 1284    80   149  755    93   121  401    83
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  123 1087    96   318 1284    80   149  755    93   121  401    83
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 2.76  0.24  1.00 2.82  0.18  1.00 1.78  0.22  1.00 1.66  0.34
Final Sat.:  1600 4610   390  1600 4718   282  1600 2949   351  1600 2751   549
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.24  0.25  0.20 0.27  0.28  0.09 0.26  0.26  0.08 0.15  0.15
Crit Moves:             ****  ****                 ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:59                Page 35-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #33 Bristol St and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.669
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        34               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      65 1419   197   137 1507    41    83  403    35    96  240    41
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   65 1419   197   137 1507    41    83  403    35    96  240    41
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    65 1419   197   137 1507    41    83  403    35    96  240    41
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   65 1419   197   137 1507    41    83  403    35    96  240    41
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   65 1419   197   137 1507    41    83  403    35    96  240    41
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.03  1.00  1.00 1.04  1.00
Lanes:       1.00 2.63  0.37  1.00 2.92  0.08  1.00 1.84  0.16  1.00 1.71  0.29
Final Sat.:  1600 4415   585  1600 4873   127  1600 3044   256  1600 2833   467
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.32  0.34  0.09 0.31  0.32  0.05 0.13  0.14  0.06 0.08  0.09
Crit Moves:             ****  ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:49:59                Page 36-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #34 Bristol St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.745
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        43               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     183 1278   162   275 1133   160   206 1268   128   108  813   119
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  183 1278   162   275 1133   160   206 1268   128   108  813   119
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   183 1278   162   275 1133   160   206 1268   128   108  813   119
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  183 1278   162   275 1133   160   206 1268   128   108  813   119
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  183 1278   162   275 1133   160   206 1268   128   108  813   119
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 2.72  0.28  1.00 2.62  0.38
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 4560   440  1600 4387   613
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.25  0.10  0.09 0.22  0.10  0.13 0.28  0.29  0.07 0.19  0.19
Crit Moves:       ****        ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:00                Page 37-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #35 Bristol St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.749
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        43               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     118 1054    53   161 1571   162   275  472   232   155  432    50
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  118 1054    53   161 1571   162   275  472   232   155  432    50
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   118 1054    53   161 1571   162   275  472   232   155  432    50
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  118 1054    53   161 1571   162   275  472   232   155  432    50
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  118 1054    53   161 1571   162   275  472   232   155  432    50
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.03  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 1.34  0.66  1.00 1.79  0.21
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 2245  1055  1600 2968   332
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.21  0.03  0.10 0.31  0.10  0.17 0.21  0.22  0.10 0.15  0.15
Crit Moves:  ****               ****        ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:01                Page 38-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #36 Bristol St and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.767
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        46               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  1  0    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     192  862   159   386 1307   148   206 1149   286   188  860   146
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  192  862   159   386 1307   148   206 1149   286   188  860   146
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   192  862   159   386 1307   148   206 1149   286   188  860   146
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  192  862   159   386 1307   148   206 1149   286   188  860   146
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  192  862   159   386 1307   148   206 1149   286   188  860   146
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.00  1.00  2.00 2.69  0.31  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200 3400  1600  3200 4512   488  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.25  0.10  0.12 0.29  0.30  0.13 0.23  0.18  0.12 0.17  0.09
Crit Moves:       ****        ****                   ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:02                Page 39-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #37 Bristol St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.794
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        51               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      65  725   136   283 1011   119   189  913    84   122  554    71
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   65  725   136   283 1011   119   189  913    84   122  554    71
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    65  725   136   283 1011   119   189  913    84   122  554    71
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   65  725   136   283 1011   119   189  913    84   122  554    71
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   65  725   136   283 1011   119   189  913    84   122  554    71
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.03  1.00  1.00 1.04  1.00
Lanes:       1.00 2.53  0.47  1.00 2.68  0.32  1.00 1.83  0.17  1.00 1.77  0.23
Final Sat.:  1600 4242   758  1600 4495   505  1600 3030   270  1600 2936   364
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.17  0.18  0.18 0.22  0.24  0.12 0.30  0.31  0.08 0.19  0.20
Crit Moves:             ****  ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #38 Bristol St and Alton Ave

Cycle (sec):	100	Critical Vol./Cap.(X):	0.556
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	26	Level Of Service:	A

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Protected			Protected			Permitted			Permitted		
Rights:	WideBypass			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	1 0 2	1 0		1 0 3	0 1		1 0 1	1 0		1 0 0	1 0	
Volume Module:												
Base Vol:	9	628	47	227	1571	36	190	117	244	41	87	31
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	9	628	47	227	1571	36	190	117	244	41	87	31
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	9	628	47	227	1571	36	190	117	244	41	87	31
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	9	628	47	227	1571	36	190	117	244	41	87	31
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	9	628	47	227	1571	36	190	117	244	41	87	31
Saturation Flow Module:												
Sat/Lane:	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
Adjustment:	1.00	1.04	1.00	1.00	1.06	1.00	1.00	1.06	1.00	1.00	1.00	1.00
Lanes:	1.00	2.79	0.21	1.00	3.00	1.00	1.00	1.00	1.00	1.00	0.74	0.26
Final Sat.:	1600	4666	334	1600	5100	1600	1600	1700	1600	1600	1180	420
Capacity Analysis Module:												
Vol/Sat:	0.01	0.13	0.14	0.14	0.31	0.02	0.12	0.07	0.15	0.03	0.07	0.07
Crit Moves:	****			****			****			****		

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:03                Page 41-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #39 Bristol St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.738
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        42               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      92  478   120   326 1419   148   192 1394   283   191  910   132
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   92  478   120   326 1419   148   192 1394   283   191  910   132
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    92  478   120   326 1419   148   192 1394   283   191  910   132
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   92  478   120   326 1419   148   192 1394   283   191  910   132
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   92  478   120   326 1419   148   192 1394   283   191  910   132
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.72  0.28  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 4547   453  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.09  0.08  0.10 0.31  0.33  0.06 0.27  0.18  0.06 0.18  0.08
Crit Moves:  ****                     ****        ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:04                Page 42-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #40 Bristol St and Sunflower Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.635
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        31               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  1    2  0  3  0  1    2  0  2  1  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      94  461   136   245 1388   104   114  942   381   246  400   138
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   94  461   136   245 1388   104   114  942   381   246  400   138
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    94  461   136   245 1388   104   114  942   381   246  400   138
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   94  461   136   245 1388   104   114  942   381   246  400   138
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   94  461   136   245 1388   104   114  942   381   246  400   138
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.85  1.15  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 4757  1843  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.09  0.09  0.08 0.27  0.07  0.04 0.20  0.21  0.08 0.08  0.09
Crit Moves:  ****                ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:05                Page 43-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #41 Bristol St and I-405 WB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.500
Loss Time (sec):       5               Average Delay (sec/veh):        19.1
Optimal Cycle:        25               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Ignore           Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  1    0  0  4  1  0    0  0  0  0  2    1  1  1  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1489   191     0 1967     8     0    0    34   121   73   665
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1489   191     0 1967     8     0    0    34   121   73   665
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1489     0     0 1967     8     0    0    34   121   73   665
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1489     0     0 1967     8     0    0    34   121   73   665
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1489     0     0 1967     8     0    0    34   121   73   665
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  1.00  1.00 0.91  0.91  1.00 1.00  0.75  0.92 0.92  0.75
Lanes:       0.00 4.00  1.00  0.00 4.98  0.02  0.00 0.00  2.00  1.87 1.13  2.00
Final Sat.:     0 6916  1900     0 8601    35     0    0  2842  3276 1976  2842
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.22  0.00  0.00 0.23  0.23  0.00 0.00  0.01  0.04 0.04  0.23
Crit Moves:  ****                ****                     ****               ****
Green/Cycle: 0.00 0.46  0.00  0.00 0.46  0.46  0.00 0.00  0.02  0.47 0.47  0.47
Volume/Cap:  0.00 0.47  0.00  0.00 0.50  0.50  0.00 0.00  0.50  0.08 0.08  0.50
Delay/Veh:    0.0 18.8   0.0   0.0 19.2  19.2   0.0  0.0  53.9  14.7 14.7  18.7
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 18.8   0.0   0.0 19.2  19.2   0.0  0.0  53.9  14.7 14.7  18.7
LOS by Move:    A    B     A     A    B     B     A    A     D     B    B     B
HCM2k85thQ:     0   13     0     0   14    14     0    0     2     2    2    13
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:06                Page 44-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #42 Bristol St and I-405 EB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.607
Loss Time (sec):       5               Average Delay (sec/veh):        22.3
Optimal Cycle:        31               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Ignore           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  4  0  0    0  0  2  1  1    3  0  0  0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     113 1108     0     0  985   847   573    0   524     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  113 1108     0     0  985   847   573    0   524     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   113 1108     0     0  985     0   573    0   524     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  113 1108     0     0  985     0   573    0   524     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  113 1108     0     0  985     0   573    0   524     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.91  0.92 1.00  0.85  1.00 1.00  1.00
Lanes:       1.00 4.00  0.00  0.00 3.00  1.00  3.00 0.00  1.00  0.00 0.00  0.00
Final Sat.:  1805 6916     0     0 5187  1729  5253    0  1615     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.16  0.00  0.00 0.19  0.00  0.11 0.00  0.32  0.00 0.00  0.00
Crit Moves:  ****                 ****                 ****
Green/Cycle: 0.10 0.42  0.00  0.00 0.31  0.00  0.53 0.00  0.53  0.00 0.00  0.00
Volume/Cap:  0.61 0.39  0.00  0.00 0.61  0.00  0.20 0.00  0.61  0.00 0.00  0.00
Delay/Veh:   48.6 20.4   0.0   0.0 29.8   0.0  12.2  0.0  17.3   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  48.6 20.4   0.0   0.0 29.8   0.0  12.2  0.0  17.3   0.0  0.0   0.0
LOS by Move:    D    C     A     A    C     A     B    A     B     A    A     A
HCM2k85thQ:     7   10     0     0   15     0     5    0    17     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:07                Page 45-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #43 Flower St and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.596
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        29               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit      Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  2  0  1    1  0  3  0  1    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      87  811   118   168  568    76   114  710    81   101  323   135
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   87  811   118   168  568    76   114  710    81   101  323   135
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    87  811   118   168  568    76   114  710    81   101  323   135
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   87  811   118   168  568    76   114  710    81   101  323   135
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   87  811   118   168  568    76   114  710    81   101  323   135
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.00  1.00  1.00 2.00  1.00  1.00 3.00  1.00  1.00 2.00  1.00
Final Sat.:  1600 3400  1600  1600 3400  1600  1600 5100  1600  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.24  0.07  0.11 0.17  0.05  0.07 0.14  0.05  0.06 0.10  0.08
Crit Moves:       ****        ****                   ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:08                Page 46-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #44 Flower St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.795
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        51               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     139  602   159   175  554    58   165 1514    60   209  861   123
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  139  602   159   175  554    58   165 1514    60   209  861   123
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   139  602   159   175  554    58   165 1514    60   209  861   123
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  139  602   159   175  554    58   165 1514    60   209  861   123
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  139  602   159   175  554    58   165 1514    60   209  861   123
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 2.00  1.00  1.00 1.81  0.19  1.00 2.89  0.11  1.00 2.62  0.38
Final Sat.:  1600 3400  1600  1600 2997   303  1600 4817   183  1600 4400   600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.18  0.10  0.11 0.18  0.19  0.10 0.31  0.33  0.13 0.20  0.21
Crit Moves:       ****        ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:08                Page 47-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #45 Flower St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.819
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        56               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      60  438    38    66  367    53    51  581    44    64  432    58
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   60  438    38    66  367    53    51  581    44    64  432    58
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    60  438    38    66  367    53    51  581    44    64  432    58
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   60  438    38    66  367    53    51  581    44    64  432    58
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   60  438    38    66  367    53    51  581    44    64  432    58
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 0.92  0.08  1.00 0.87  0.13  1.00 0.93  0.07  1.00 0.88  0.12
Final Sat.:  1600 1472   128  1600 1398   202  1600 1487   113  1600 1411   189
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.30  0.30  0.04 0.26  0.26  0.03 0.39  0.39  0.04 0.31  0.31
Crit Moves:       ****        ****                   ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:09                Page 48-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #46 Flower St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.769
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        46               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      63  331    73    98  544   120   155 1065   297    74  546    60
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   63  331    73    98  544   120   155 1065   297    74  546    60
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    63  331    73    98  544   120   155 1065   297    74  546    60
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   63  331    73    98  544   120   155 1065   297    74  546    60
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   63  331    73    98  544   120   155 1065   297    74  546    60
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.03  1.00
Lanes:       1.00 1.64  0.36  1.00 1.64  0.36  1.00 1.56  0.44  1.00 1.80  0.20
Final Sat.:  1600 2722   578  1600 2722   578  1600 2602   698  1600 2983   317
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.12  0.13  0.06 0.20  0.21  0.10 0.41  0.43  0.05 0.18  0.19
Crit Moves:  ****                ****             ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:10                Page 49-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #47 Flower St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.698
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        37               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      22  142    73   163  352   264   165 1879    80    54  909    58
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   22  142    73   163  352   264   165 1879    80    54  909    58
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    22  142    73   163  352   264   165 1879    80    54  909    58
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   22  142    73   163  352   264   165 1879    80    54  909    58
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   22  142    73   163  352   264   165 1879    80    54  909    58
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.32  0.68  1.00 1.14  0.86  1.00 2.88  0.12  1.00 2.82  0.18
Final Sat.:  1600 2213  1087  1600 1929  1371  1600 4804   196  1600 4712   288
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.06  0.07  0.10 0.18  0.19  0.10 0.39  0.41  0.03 0.19  0.20
Crit Moves:  ****                     ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:11                Page 50-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #48 Main St and La Veta Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.574
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        27               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  2  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      84  579   300   198 1034   173   350  495   215   316  276   230
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   84  579   300   198 1034   173   350  495   215   316  276   230
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    84  579   300   198 1034   173   350  495   215   316  276   230
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   84  579   300   198 1034   173   350  495   215   316  276   230
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   84  579   300   198 1034   173   350  495   215   316  276   230
OvlAdjVol:               142                                              131
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.57  0.43  2.00 2.09  0.91  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 4312   688  3200 3546  1454  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.11  0.19  0.06 0.24  0.25  0.11 0.14  0.15  0.10 0.08  0.14
OvlAdjV/S:               0.09                                             0.08
Crit Moves:  ****                      ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:12                Page 51-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #49 Main St and Mainplace Dr / Memory Ln
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.485
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        23               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      28  764   250    32 1244   260   148  233    16   198  226    15
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   28  764   250    32 1244   260   148  233    16   198  226    15
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    28  764   250    32 1244   260   148  233    16   198  226    15
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   28  764   250    32 1244   260   148  233    16   198  226    15
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   28  764   250    32 1244   260   148  233    16   198  226    15
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 2.26  0.74  2.00 2.48  0.52  2.00 2.81  0.19  2.00 2.00  1.00
Final Sat.:  3200 3817  1183  3200 4170   830  3200 4692   308  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.20  0.21  0.01 0.30  0.31  0.05 0.05  0.05  0.06 0.07  0.01
Crit Moves:  ****                ****  ****                ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:13                Page 52-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #50 Main St and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.821
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        57               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  1  1  0    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     128  760   163   195 1086    70   116 1225    61   325 1300    19
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  128  760   163   195 1086    70   116 1225    61   325 1300    19
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   128  760   163   195 1086    70   116 1225    61   325 1300    19
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  128  760   163   195 1086    70   116 1225    61   325 1300    19
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  128  760   163   195 1086    70   116 1225    61   325 1300    19
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       2.00 2.00  1.00  2.00 1.88  0.12  2.00 2.86  0.14  2.00 2.96  0.04
Final Sat.:  3200 3400  1600  3200 3106   194  3200 4772   228  3200 4931    69
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.22  0.10  0.06 0.35  0.36  0.04 0.26  0.27  0.10 0.26  0.27
Crit Moves:  ****                ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #51 Main St and Civic Center Dr

Cycle (sec):	100	Critical Vol./Cap.(X):	0.755
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	44	Level Of Service:	C

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Permitted			Permitted			Permitted			Permitted		
Rights:	Include			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	1 0	1	1 0	1 0	1	1 0	1 0	1	1 0	1 0	1	1 0
Volume Module:												
Base Vol:	138	901	79	59	1042	159	90	545	99	43	566	34
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	138	901	79	59	1042	159	90	545	99	43	566	34
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	138	901	79	59	1042	159	90	545	99	43	566	34
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	138	901	79	59	1042	159	90	545	99	43	566	34
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	138	901	79	59	1042	159	90	545	99	43	566	34
Saturation Flow Module:												
Sat/Lane:	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
Adjustment:	1.00	1.03	1.00	1.00	1.04	1.00	1.00	1.04	1.00	1.00	1.03	1.00
Lanes:	1.00	1.84	0.16	1.00	1.74	0.26	1.00	1.69	0.31	1.00	1.89	0.11
Final Sat.:	1600	3042	258	1600	2876	424	1600	2808	492	1600	3119	181
Capacity Analysis Module:												
Vol/Sat:	0.09	0.30	0.31	0.04	0.36	0.38	0.06	0.19	0.20	0.03	0.18	0.19
Crit Moves:	****					****	****					****

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:14                Page 54-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #52 Main St and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.667
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        34               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  0    0  0  1  1  0    0  0  0  0  0    0  1  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      68 1083     0     0 1107    98     0    0     0    61  848    65
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   68 1083     0     0 1107    98     0    0     0    61  848    65
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    68 1083     0     0 1107    98     0    0     0    61  848    65
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   68 1083     0     0 1107    98     0    0     0    61  848    65
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   68 1083     0     0 1107    98     0    0     0    61  848    65
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.02  1.00
Lanes:       1.00 2.00  0.00  0.00 1.84  0.16  0.00 0.00  0.00  0.19 2.61  0.20
Final Sat.:  1600 3400     0     0 3040   260     0    0     0   301 4279   320
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.32  0.00  0.00 0.36  0.38  0.00 0.00  0.00  0.04 0.20  0.20
Crit Moves:  ****                     ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:15                Page 55-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #53 Main St and 4th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.490
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        23               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  1  1  0    0  0  1  1  0    0  0  0  1  0    0  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  977    23     0 1098    27     0   93    14     0  114    28
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  977    23     0 1098    27     0   93    14     0  114    28
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  977    23     0 1098    27     0   93    14     0  114    28
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  977    23     0 1098    27     0   93    14     0  114    28
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  977    23     0 1098    27     0   93    14     0  114    28
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       0.00 1.95  0.05  0.00 1.95  0.05  0.00 0.87  0.13  0.00 0.80  0.20
Final Sat.:     0 3226    74     0 3223    77     0 1391   209     0 1285   315
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.30  0.31  0.00 0.34  0.35  0.00 0.07  0.07  0.00 0.09  0.09
Crit Moves:  ****                     ****  ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:16                Page 56-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #54 Main St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.758
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        44               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  2  0  1    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     116  596    60    88  882    65   119 1393   147    88 1097    61
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  116  596    60    88  882    65   119 1393   147    88 1097    61
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   116  596    60    88  882    65   119 1393   147    88 1097    61
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  116  596    60    88  882    65   119 1393   147    88 1097    61
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  116  596    60    88  882    65   119 1393   147    88 1097    61
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       1.00 1.82  0.18  1.00 2.00  1.00  1.00 2.71  0.29  1.00 2.84  0.16
Final Sat.:  1600 3007   293  1600 3400  1600  1600 4542   458  1600 4747   253
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.20  0.20  0.06 0.26  0.04  0.07 0.31  0.32  0.06 0.23  0.24
Crit Moves:  ****                ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:16                Page 57-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #55 Main St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.902
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        88               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  0  1  0    1  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      89  838    42   175 1364    27    42  396    43   140  373   107
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   89  838    42   175 1364    27    42  396    43   140  373   107
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    89  838    42   175 1364    27    42  396    43   140  373   107
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   89  838    42   175 1364    27    42  396    43   140  373   107
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   89  838    42   175 1364    27    42  396    43   140  373   107
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.00  1.00  1.00 1.06  1.00
Lanes:       1.00 1.90  0.10  1.00 1.96  0.04  1.00 0.90  0.10  1.00 1.00  1.00
Final Sat.:  1600 3147   153  1600 3238    62  1600 1443   157  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.27  0.28  0.11 0.42  0.43  0.03 0.27  0.27  0.09 0.22  0.07
Crit Moves:  ****                ****        ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:17                Page 58-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #56 Main St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.826
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        58               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  2  0  1    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     109  617    67   228 1052    55    75  971   131   122  709    87
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  109  617    67   228 1052    55    75  971   131   122  709    87
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   109  617    67   228 1052    55    75  971   131   122  709    87
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  109  617    67   228 1052    55    75  971   131   122  709    87
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  109  617    67   228 1052    55    75  971   131   122  709    87
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.05  1.00
Lanes:       1.00 1.80  0.20  1.00 1.90  0.10  1.00 2.00  1.00  1.00 2.67  0.33
Final Sat.:  1600 2987   313  1600 3141   159  1600 3400  1600  1600 4475   525
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.21  0.21  0.14 0.33  0.35  0.05 0.29  0.08  0.08 0.16  0.17
Crit Moves:  ****                ****        ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:18                Page 59-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #57 Main St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.735
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        41               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      54  311   264   645  848   192   240 1393   252   146  435   218
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   54  311   264   645  848   192   240 1393   252   146  435   218
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    54  311   264   645  848   192   240 1393   252   146  435   218
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   54  311   264   645  848   192   240 1393   252   146  435   218
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   54  311   264   645  848   192   240 1393   252   146  435   218
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.06  0.17  0.20 0.17  0.12  0.08 0.27  0.16  0.05 0.09  0.14
Crit Moves:             ****  ****                   ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:19                Page 60-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #58 Penn Wy and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.602
Loss Time (sec):       5               Average Delay (sec/veh):        11.2
Optimal Cycle:        30               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  0  2    0  0  0  0  0    0  0  2  1  0    1  0  3  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      43    0   217     0    0     0     0 1238   631   214 1722     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   43    0   217     0    0     0     0 1238   631   214 1722     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    43    0   217     0    0     0     0 1238   631   214 1722     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   43    0   217     0    0     0     0 1238   631   214 1722     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   43    0   217     0    0     0     0 1238   631   214 1722     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 1.00  0.75  1.00 1.00  1.00  1.00 0.86  0.86  0.95 0.91  1.00
Lanes:       2.00 0.00  2.00  0.00 0.00  0.00  0.00 2.00  1.00  1.00 3.00  0.00
Final Sat.:  3502    0  2842     0    0     0     0 3282  1641  1805 5187     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.00  0.08  0.00 0.00  0.00  0.00 0.38  0.38  0.12 0.33  0.00
Crit Moves:             ****                          ****        ****
Green/Cycle: 0.13 0.00  0.13  0.00 0.00  0.00  0.00 0.63  0.63  0.20 0.82  0.00
Volume/Cap:  0.10 0.00  0.60  0.00 0.00  0.00  0.00 0.60  0.61  0.60 0.40  0.00
Delay/Veh:   38.7  0.0  44.1   0.0  0.0   0.0   0.0 11.5  11.7  39.5  2.4   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  38.7  0.0  44.1   0.0  0.0   0.0   0.0 11.5  11.7  39.5  2.4   0.0
LOS by Move:    D    A     D     A    A     A     A    B     B     D    A     A
HCM2k85thQ:     1    0     7     0    0     0     0   19    20    10    8     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:20                Page 61-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #59 I-5 NB Off Ramps/17th Street
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.740
Loss Time (sec):       5               Average Delay (sec/veh):        31.2
Optimal Cycle:        44               Level Of Service:                  C
******************************************************************************
Street Name:         I-5 NB Off Ramps                    17th Street
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected         Permitted
Rights:           Include          Include          Ignore           Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  1    1  0  0  0  1    1  0  3  0  1    0  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     768   35    22    57    0   295    99 1040   376     0 1245    20
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  768   35    22    57    0   295    99 1040   376     0 1245    20
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Volume:   768   35    22    57    0   295    99 1040     0     0 1245    20
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  768   35    22    57    0   295    99 1040     0     0 1245    20
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
FinalVolume:  768   35    22    57    0   295    99 1040     0     0 1245    20
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.95  0.85  0.95 1.00  0.85  0.95 0.91  1.00  1.00 0.91  0.91
Lanes:       1.91 0.09  1.00  1.00 0.00  1.00  1.00 3.00  1.00  0.00 2.95  0.05
Final Sat.:  3467  158  1615  1805    0  1615  1805 5187  1900     0 5095    82
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.22 0.22  0.01  0.03 0.00  0.18  0.05 0.20  0.00  0.00 0.24  0.24
Crit Moves:       ****                     ****  ****                 ****
Green/Cycle: 0.30 0.30  0.30  0.25 0.00  0.25  0.07 0.40  0.00  0.00 0.33  0.33
Volume/Cap:  0.74 0.74  0.05  0.13 0.00  0.74  0.74 0.50  0.00  0.00 0.74  0.74
Delay/Veh:   34.3 34.3  24.9  29.4  0.0  42.0  64.9 22.4   0.0   0.0 31.5  31.5
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  34.3 34.3  24.9  29.4  0.0  42.0  64.9 22.4   0.0   0.0 31.5  31.5
LOS by Move:    C    C     C     C    A     D     E    C     A     A    C     C
HCM2k85thQ:    19   19     1     2    0    15     7   13     0     0   21    21
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:21                Page 62-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #60 Penn Wy and I-5 SB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.436
Loss Time (sec):       5               Average Delay (sec/veh):        19.0
Optimal Cycle:        22               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    2  0  2  0  0    0  0  0  0  0    1  0  0  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  158   140   799  165     0     0    0     0   179    0   100
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  158   140   799  165     0     0    0     0   179    0   100
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  158   140   799  165     0     0    0     0   179    0   100
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  158   140   799  165     0     0    0     0   179    0   100
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  158   140   799  165     0     0    0     0   179    0   100
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  0.85  0.92 0.95  1.00  1.00 1.00  1.00  0.95 1.00  0.75
Lanes:       0.00 2.00  1.00  2.00 2.00  0.00  0.00 0.00  0.00  1.00 0.00  2.00
Final Sat.:     0 3610  1615  3502 3610     0     0    0     0  1805    0  2842
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.04  0.09  0.23 0.05  0.00  0.00 0.00  0.00  0.10 0.00  0.04
Crit Moves:             ****  ****                               ****
Green/Cycle: 0.00 0.20  0.20  0.52 0.72  0.00  0.00 0.00  0.00  0.23 0.00  0.75
Volume/Cap:  0.00 0.22  0.44  0.44 0.06  0.00  0.00 0.00  0.00  0.44 0.00  0.05
Delay/Veh:    0.0 33.7  36.1  14.9  4.0   0.0   0.0  0.0   0.0  33.9  0.0   3.2
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 33.7  36.1  14.9  4.0   0.0   0.0  0.0   0.0  33.9  0.0   3.2
LOS by Move:    A    C     D     B    A     A     A    A     A     C    A     A
HCM2k85thQ:     0    3     6    12    1     0     0    0     0     8    0     1
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:22                Page 63-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM 4-Way Stop Method (Base Volume Alternative)
******************************************************************************
Intersection #61 Santiago St and Civic Center Dr
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.723
Loss Time (sec):       5               Average Delay (sec/veh):        16.9
Optimal Cycle:         0               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Stop Sign        Stop Sign        Stop Sign        Stop Sign
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Lanes:        1  0  0  1  0    1  0  0  1  0    0  1  0  0  1    0  0  1! 0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     206  143    20     5  303    74   121   46   246    72   66    13
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  206  143    20     5  303    74   121   46   246    72   66    13
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   206  143    20     5  303    74   121   46   246    72   66    13
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  206  143    20     5  303    74   121   46   246    72   66    13
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  206  143    20     5  303    74   121   46   246    72   66    13
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 0.88  0.12  1.00 0.80  0.20  0.72 0.28  1.00  0.48 0.44  0.08
Final Sat.:   468  443    62   471  419   102   337  128   540   208  190    37
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.44 0.32  0.32  0.01 0.72  0.72  0.36 0.36  0.46  0.35 0.35  0.35
Crit Moves:  ****                ****                     ****       ****
Delay/Veh:   15.5 12.6  12.6  10.2 24.0  24.0  14.0 14.0  13.9  14.2 14.2  14.2
Delay Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  15.5 12.6  12.6  10.2 24.0  24.0  14.0 14.0  13.9  14.2 14.2  14.2
LOS by Move:    C    B     B     B    C     C     B    B     B     B    B     B
ApproachDel:      14.2             23.8             13.9             14.2
Delay Adj:        1.00             1.00             1.00             1.00
ApprAdjDel:       14.2             23.8             13.9             14.2
LOS by Appr:         B                C                B                B
AllWayAvgQ:   0.7  0.4   0.4   0.0  2.1   2.1   0.5  0.5   0.7   0.4  0.4   0.4
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:23                Page 64-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #62 Santiago St and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.553
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        26               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  0  1    1  0  1  0  1    1  0  1  1  0    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      24   71    56   311  161   133    48  474    14   108  807   271
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   24   71    56   311  161   133    48  474    14   108  807   271
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    24   71    56   311  161   133    48  474    14   108  807   271
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   24   71    56   311  161   133    48  474    14   108  807   271
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   24   71    56   311  161   133    48  474    14   108  807   271
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.06  1.00
Lanes:       1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.94  0.06  1.00 2.00  1.00
Final Sat.:  1600 1700  1600  1600 1700  1600  1600 3208    92  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.04  0.04  0.19 0.09  0.08  0.03 0.15  0.15  0.07 0.24  0.17
Crit Moves:       ****        ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:24                Page 65-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #64 Standard Ave and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.803
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        53               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    0  0  1! 0  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     108  191   119    12  231    25    86 1317   214    64 1012    12
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  108  191   119    12  231    25    86 1317   214    64 1012    12
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   108  191   119    12  231    25    86 1317   214    64 1012    12
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  108  191   119    12  231    25    86 1317   214    64 1012    12
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  108  191   119    12  231    25    86 1317   214    64 1012    12
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.04  1.00  1.00 1.03  1.00
Lanes:       1.00 0.62  0.38  0.04 0.87  0.09  1.00 1.72  0.28  1.00 1.98  0.02
Final Sat.:  1600  986   614    72 1379   149  1600 2853   447  1600 3263    38
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.19  0.19  0.01 0.17  0.17  0.05 0.46  0.48  0.04 0.31  0.32
Crit Moves:  ****                ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:24                Page 66-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #65 Standard Ave and Mcfadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.609
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        29               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      74  284   128   220  531    37    17  589    71   138  366    82
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   74  284   128   220  531    37    17  589    71   138  366    82
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    74  284   128   220  531    37    17  589    71   138  366    82
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   74  284   128   220  531    37    17  589    71   138  366    82
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   74  284   128   220  531    37    17  589    71   138  366    82
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.38  0.62  1.00 1.87  0.13  1.00 1.78  0.22  1.00 1.63  0.37
Final Sat.:  1600 2306   994  1600 3092   208  1600 2956   344  1600 2714   586
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.12  0.13  0.14 0.17  0.18  0.01 0.20  0.21  0.09 0.13  0.14
Crit Moves:             ****  ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:25                Page 67-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #66 Halladay St and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.659
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        33               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    0  0  0  0  0    0  0  1  1  0    0  1  1  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      43    0   100     0    0     0     0 1283   145   160  607     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   43    0   100     0    0     0     0 1283   145   160  607     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    43    0   100     0    0     0     0 1283   145   160  607     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   43    0   100     0    0     0     0 1283   145   160  607     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   43    0   100     0    0     0     0 1283   145   160  607     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.04  1.00
Lanes:       1.00 0.00  1.00  0.00 0.00  0.00  0.00 1.80  0.20  0.42 1.58  0.00
Final Sat.:  1600    0  1600     0    0     0     0 2975   325   668 2632     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.00  0.06  0.00 0.00  0.00  0.00 0.43  0.45  0.10 0.23  0.00
Crit Moves:             ****                                 ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:26                Page 68-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #67 Halladay St and Dyer Rd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.567
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        27               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      11   18    49   183   37    39    41 1375    10   115  626   101
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   11   18    49   183   37    39    41 1375    10   115  626   101
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    11   18    49   183   37    39    41 1375    10   115  626   101
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   11   18    49   183   37    39    41 1375    10   115  626   101
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   11   18    49   183   37    39    41 1375    10   115  626   101
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 0.27  0.73  1.00 0.49  0.51  1.00 2.98  0.02  1.00 2.58  0.42
Final Sat.:  1600  430  1170  1600  779   821  1600 4965    35  1600 4333   667
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.04  0.04  0.11 0.05  0.05  0.03 0.28  0.29  0.07 0.14  0.15
Crit Moves:             ****  ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:26                Page 69-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #68 SR-55 SB Ramps and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.615
Loss Time (sec):       5               Average Delay (sec/veh):        19.8
Optimal Cycle:        31               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  2    0  0  2  1  1    0  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   961    0   870     0 1441  1027     0 1275   145
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   961    0   870     0 1441  1027     0 1275   145
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:     0    0     0   961    0   870     0 1441     0     0 1275     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   961    0   870     0 1441     0     0 1275     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:    0    0     0   961    0   870     0 1441     0     0 1275     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.92 1.00  0.75  1.00 0.91  0.91  1.00 0.91  1.00
Lanes:       0.00 0.00  0.00  2.00 0.00  2.00  0.00 3.00  1.00  0.00 3.00  1.00
Final Sat.:     0    0     0  3502    0  2842     0 5187  1729     0 5187  1900
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.27 0.00  0.31  0.00 0.28  0.00  0.00 0.25  0.00
Crit Moves:                               ****        ****        ****
Green/Cycle: 0.00 0.00  0.00  0.50 0.00  0.50  0.00 0.45  0.00  0.00 0.45  0.00
Volume/Cap:  0.00 0.00  0.00  0.55 0.00  0.61  0.00 0.61  0.00  0.00 0.54  0.00
Delay/Veh:    0.0  0.0   0.0  17.7  0.0  19.0   0.0 21.3   0.0   0.0 20.2   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0  17.7  0.0  19.0   0.0 21.3   0.0   0.0 20.2   0.0
LOS by Move:    A    A     A     B    A     B     A    C     A     A    C     A
HCM2k85thQ:     0    0     0    16    0    17     0   19     0     0   16     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:27                Page 70-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #69 SR-55 NB Ramps and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.742
Loss Time (sec):       5               Average Delay (sec/veh):        19.2
Optimal Cycle:        44               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Ignore           Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  0  1    0  0  0  0  0    0  0  2  0  2    0  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     908    0   976     0    0     0     0 1609   796     0  517   244
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  908    0   976     0    0     0     0 1609   796     0  517   244
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:   908    0     0     0    0     0     0 1609     0     0  517     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  908    0     0     0    0     0     0 1609     0     0  517     0
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:  908    0     0     0    0     0     0 1609     0     0  517     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 1.00  1.00  1.00 1.00  1.00  1.00 0.95  0.88  1.00 0.91  1.00
Lanes:       2.00 0.00  1.00  0.00 0.00  0.00  0.00 2.00  2.00  0.00 3.00  1.00
Final Sat.:  3502    0  1900     0    0     0     0 3610  3344     0 5187  1900
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.26 0.00  0.00  0.00 0.00  0.00  0.00 0.45  0.00  0.00 0.10  0.00
Crit Moves:  ****                                  ****        ****
Green/Cycle: 0.35 0.00  0.00  0.00 0.00  0.00  0.00 0.60  0.00  0.00 0.60  0.00
Volume/Cap:  0.74 0.00  0.00  0.00 0.00  0.00  0.00 0.74  0.00  0.00 0.17  0.00
Delay/Veh:   31.1  0.0   0.0   0.0  0.0   0.0   0.0 15.8   0.0   0.0  8.9   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  31.1  0.0   0.0   0.0  0.0   0.0   0.0 15.8   0.0   0.0  8.9   0.0
LOS by Move:    C    A     A     A    A     A     A    B     A     A    A     A
HCM2k85thQ:    21    0     0     0    0     0     0   29     0     0    4     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:28                Page 71-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #70 SR-55 SB Ramps and Dyer Rd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.552
Loss Time (sec):       5               Average Delay (sec/veh):        23.7
Optimal Cycle:        27               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:            Ovl              Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  2    0  1  1  0  1    1  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     221   26   505    50  242    60    35 1338   285   408  647   108
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  221   26   505    50  242    60    35 1338   285   408  647   108
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   221   26   505    50  242    60    35 1338   285   408  647   108
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  221   26   505    50  242    60    35 1338   285   408  647   108
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  221   26   505    50  242    60    35 1338   285   408  647   108
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.96 0.96  0.75  0.94 0.94  0.85  0.95 0.91  0.85  0.92 0.91  0.85
Lanes:       1.79 0.21  2.00  0.34 1.66  1.00  1.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3254  383  2842   613 2968  1615  1805 5187  1615  3502 5187  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.07  0.18  0.08 0.08  0.04  0.02 0.26  0.18  0.12 0.12  0.07
Crit Moves:       ****             ****             ****        ****
Green/Cycle: 0.12 0.12  0.33  0.15 0.15  0.15  0.09 0.47  0.47  0.21 0.59  0.59
Volume/Cap:  0.55 0.55  0.53  0.55 0.55  0.25  0.21 0.55  0.38  0.55 0.21  0.11
Delay/Veh:   42.7 42.7  27.5  40.8 40.8  38.3  42.7 19.4  17.5  36.1  9.7   9.2
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  42.7 42.7  27.5  40.8 40.8  38.3  42.7 19.4  17.5  36.1  9.7   9.2
LOS by Move:    D    D     C     D    D     D     D    B     B     D    A     A
HCM2k85thQ:     7    7    12     8    8     3     2   17     9    10    5     2
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:29                Page 72-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #71 Glassell St and La Veta Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.603
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        29               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Ovl              Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  1  0  1    1  0  1  1  0    1  0  1  0  1    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     263  412   125    17  358    79    38  195   375   236  249     6
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  263  412   125    17  358    79    38  195   375   236  249     6
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   263  412   125    17  358    79    38  195   375   236  249     6
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  263  412   125    17  358    79    38  195   375   236  249     6
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  263  412   125    17  358    79    38  195   375   236  249     6
OvlAdjVol:                 0                                  244
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.03  1.00
Lanes:       2.00 1.00  1.00  1.00 1.64  0.36  1.00 1.00  1.00  1.00 1.95  0.05
Final Sat.:  3200 1700  1600  1600 2722   578  1600 1700  1600  1600 3225    75
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.24  0.08  0.01 0.13  0.14  0.02 0.11  0.23  0.15 0.08  0.08
OvlAdjV/S:                 0.00                               0.15
Crit Moves:        ****        ****                           ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:30                Page 73-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #72 Glassell St and SR-22 WB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.741
Loss Time (sec):       5               Average Delay (sec/veh):        28.5
Optimal Cycle:        44               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected         Permitted      Split Phase      Split Phase
Rights:           Include           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  0    0  0  2  0  1    0  0  0  0  0    1  0  1! 0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     500  561     0     0  743   346     0    0     0   285    5   426
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  500  561     0     0  743   346     0    0     0   285    5   426
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   500  561     0     0  743   346     0    0     0   285    5   426
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  500  561     0     0  743   346     0    0     0   285    5   426
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  500  561     0     0  743   346     0    0     0   285    5   426
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.95  1.00  1.00 0.95  0.85  1.00 1.00  1.00  0.86 0.86  0.86
Lanes:       1.00 2.00  0.00  0.00 2.00  1.00  0.00 0.00  0.00  1.40 0.01  1.59
Final Sat.:  1805 3610     0     0 3610  1615     0    0     0  2270   23  2588
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.28 0.16  0.00  0.00 0.21  0.21  0.00 0.00  0.00  0.13 0.22  0.16
Crit Moves:  ****                 ****                               ****
Green/Cycle: 0.37 0.65  0.00  0.00 0.28  0.28  0.00 0.00  0.00  0.30 0.30  0.30
Volume/Cap:  0.74 0.24  0.00  0.00 0.74  0.77  0.00 0.00  0.00  0.42 0.74  0.55
Delay/Veh:   31.5  7.3   0.0   0.0 35.9  41.3   0.0  0.0   0.0  28.3 34.7  29.9
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  31.5  7.3   0.0   0.0 35.9  41.3   0.0  0.0   0.0  28.3 34.7  29.9
LOS by Move:    C    A     A     A    D     D     A    A     A     C    C     C
HCM2k85thQ:    22    6     0     0   19    17     0    0     0     8   17    11
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:31                Page 74-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #73 Grand Ave / Glassell St and SR-22 EB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.760
Loss Time (sec):       5               Average Delay (sec/veh):        27.0
Optimal Cycle:        47               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted       Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    1  0  2  0  0    1  0  1! 0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  818   218   280  733     0   258    0  1012     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  818   218   280  733     0   258    0  1012     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  818   218   280  733     0   258    0  1012     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  818   218   280  733     0   258    0  1012     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  818   218   280  733     0   258    0  1012     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  0.85  0.95 0.95  1.00  0.87 1.00  0.87  1.00 1.00  1.00
Lanes:       0.00 2.00  1.00  1.00 2.00  0.00  1.20 0.00  1.80  0.00 0.00  0.00
Final Sat.:     0 3610  1615  1805 3610     0  1992    0  2974     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.23  0.13  0.16 0.20  0.00  0.13 0.00  0.34  0.00 0.00  0.00
Crit Moves:       ****        ****                     ****
Green/Cycle: 0.00 0.30  0.30  0.20 0.50  0.00  0.45 0.00  0.45  0.00 0.00  0.00
Volume/Cap:  0.00 0.76  0.45  0.76 0.40  0.00  0.29 0.00  0.76  0.00 0.00  0.00
Delay/Veh:    0.0 35.0  29.1  46.4 15.7   0.0  17.6  0.0  25.2   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 35.0  29.1  46.4 15.7   0.0  17.6  0.0  25.2   0.0  0.0   0.0
LOS by Move:    A    D     C     D    B     A     B    A     C     A    A     A
HCM2k85thQ:     0   20     9    15   11     0     7    0    23     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:32                Page 75-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #74 Grand Ave and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.680
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        35               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  0  1    1  0  1  1  0    1  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      18  737   106   174 1444    32    99   60    59   254   28   229
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   18  737   106   174 1444    32    99   60    59   254   28   229
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    18  737   106   174 1444    32    99   60    59   254   28   229
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   18  737   106   174 1444    32    99   60    59   254   28   229
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   18  737   106   174 1444    32    99   60    59   254   28   229
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.62  0.38  1.00 2.00  1.00  1.00 1.01  0.99  1.00 1.00  1.00
Final Sat.:  1600 4396   604  1600 3400  1600  1600 1713  1587  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.17  0.18  0.11 0.42  0.02  0.06 0.04  0.04  0.16 0.02  0.14
Crit Moves:  ****                ****            ****            ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:33                Page 76-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #75 Grand Ave and Santa Clara Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.885
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        79               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include        WideBypass          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  1  1  0    1  0  0  1  0    1  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      66  463   119   290 1418   319   143  233    48   120  231   211
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   66  463   119   290 1418   319   143  233    48   120  231   211
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    66  463   119   290 1418   319   143  233    48   120  231   211
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   66  463   119   290 1418   319   143  233    48   120  231   211
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   66  463   119   290 1418   319   143  233    48   120  231   211
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.00  1.00  1.00 1.06  1.00
Lanes:       1.00 2.39  0.61  1.00 1.63  0.37  1.00 0.83  0.17  1.00 1.00  1.00
Final Sat.:  1600 4019   981  1600 2712   588  1600 1327   273  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.12  0.12  0.18 0.52  0.54  0.09 0.18  0.18  0.08 0.14  0.13
Crit Moves:  ****                      ****        ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:34                Page 77-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #76 Grand Ave and 17th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.797
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        51               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     163  476   327   286 1198   235   224  835   106   309  807    88
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  163  476   327   286 1198   235   224  835   106   309  807    88
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   163  476   327   286 1198   235   224  835   106   309  807    88
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  163  476   327   286 1198   235   224  835   106   309  807    88
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  163  476   327   286 1198   235   224  835   106   309  807    88
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.00  1.00  1.00 2.00  1.00  2.00 2.66  0.34  2.00 2.71  0.29
Final Sat.:  1600 3400  1600  1600 3400  1600  3200 4459   541  3200 4528   472
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.14  0.20  0.18 0.35  0.15  0.07 0.19  0.20  0.10 0.18  0.19
Crit Moves:  ****                ****                     ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:35                Page 78-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #77 Grand Ave and I-5 NB Ramps
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.516
Loss Time (sec):       5               Average Delay (sec/veh):        12.9
Optimal Cycle:        26               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Ignore           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    1  0  3  0  0    0  0  0  0  0    2  0  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  831   480    58 1869     0     0    0     0   456    0   126
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  831   480    58 1869     0     0    0     0   456    0   126
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  831     0    58 1869     0     0    0     0   456    0   126
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  831     0    58 1869     0     0    0     0   456    0   126
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  831     0    58 1869     0     0    0     0   456    0   126
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  1.00  0.95 0.91  1.00  1.00 1.00  1.00  0.92 1.00  0.85
Lanes:       0.00 2.00  1.00  1.00 3.00  0.00  0.00 0.00  0.00  2.00 0.00  1.00
Final Sat.:     0 3610  1900  1805 5187     0     0    0     0  3502    0  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.23  0.00  0.03 0.36  0.00  0.00 0.00  0.00  0.13 0.00  0.08
Crit Moves:  ****                 ****                          ****
Green/Cycle: 0.00 0.61  0.00  0.09 0.70  0.00  0.00 0.00  0.00  0.25 0.00  0.25
Volume/Cap:  0.00 0.38  0.00  0.38 0.52  0.00  0.00 0.00  0.00  0.52 0.00  0.31
Delay/Veh:    0.0  9.9   0.0  44.7  7.3   0.0   0.0  0.0   0.0  32.7  0.0  30.8
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  9.9   0.0  44.7  7.3   0.0   0.0  0.0   0.0  32.7  0.0  30.8
LOS by Move:    A    A     A     D    A     A     A    A     A     C    A     C
HCM2k85thQ:     0   10     0     3   15     0     0    0     0    10    0     5
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:37                Page 79-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #78 Grand Ave and Santa Ana Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.662
Loss Time (sec):       5               Average Delay (sec/veh):        23.8
Optimal Cycle:        35               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Ovl             Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  0  2    2  0  1  0  2    0  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      71 1003    51   141 1166  1029   263  217   428     5  373    34
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   71 1003    51   141 1166  1029   263  217   428     5  373    34
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    71 1003    51   141 1166  1029   263  217   428     5  373    34
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   71 1003    51   141 1166  1029   263  217   428     5  373    34
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   71 1003    51   141 1166  1029   263  217   428     5  373    34
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.90  0.90  0.95 0.95  0.75  0.92 1.00  0.75  0.94 0.94  0.94
Lanes:       1.00 2.85  0.15  1.00 2.00  2.00  2.00 1.00  2.00  0.02 1.81  0.17
Final Sat.:  1805 4901   249  1805 3610  2842  3502 1900  2842    43 3226   294
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.20  0.20  0.08 0.32  0.36  0.08 0.11  0.15  0.12 0.12  0.12
Crit Moves:  ****                ****                ****                ****
Green/Cycle: 0.06 0.40  0.40  0.15 0.49  0.72  0.23 0.23  0.23  0.17 0.17  0.17
Volume/Cap:  0.66 0.52  0.52  0.52 0.66  0.51  0.33 0.50  0.66  0.66 0.66  0.66
Delay/Veh:   60.4 23.1  23.1  40.8 20.3   6.5  32.5 34.6  37.7  41.2 41.2  41.2
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  60.4 23.1  23.1  40.8 20.3   6.5  32.5 34.6  37.7  41.2 41.2  41.2
LOS by Move:    E    C     C     D    C     A     C    C     D     D    D     D
HCM2k85thQ:     5   14    14     7   22    13     6   10    12    11   11    11
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:38                Page 80-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #79 Grand Ave and 1st St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.803
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        53               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  2  1  0    2  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     213  751    35    99 1432   174   332  793   225   247  867    99
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  213  751    35    99 1432   174   332  793   225   247  867    99
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   213  751    35    99 1432   174   332  793   225   247  867    99
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  213  751    35    99 1432   174   332  793   225   247  867    99
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  213  751    35    99 1432   174   332  793   225   247  867    99
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.03  1.00
Lanes:       2.00 2.87  0.13  2.00 3.00  1.00  2.00 2.34  0.66  2.00 1.80  0.20
Final Sat.:  3200 4786   214  3200 5100  1600  3200 3939  1061  3200 2972   328
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.16  0.16  0.03 0.28  0.11  0.10 0.20  0.21  0.08 0.29  0.30
Crit Moves:  ****                ****        ****                        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:40                Page 81-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                       Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #80 Grand Ave and Chestnut Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.705
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      53  737   163   149 1788    49    60  419   110   118  347   216
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   53  737   163   149 1788    49    60  419   110   118  347   216
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    53  737   163   149 1788    49    60  419   110   118  347   216
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   53  737   163   149 1788    49    60  419   110   118  347   216
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   53  737   163   149 1788    49    60  419   110   118  347   216
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 2.46  0.54  1.00 2.92  0.08  1.00 1.58  0.42  1.00 1.23  0.77
Final Sat.:  1600 4131   869  1600 4872   128  1600 2635   665  1600 2072  1228
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.18  0.19  0.09 0.37  0.38  0.04 0.16  0.17  0.07 0.17  0.18
Crit Moves:  ****                     ****             ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:40                Page 82-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                       Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #81 Grand Ave and McFadden Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.829
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        59               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     171  722   108   237 1590   155   186  601   182   117  420   106
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  171  722   108   237 1590   155   186  601   182   117  420   106
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   171  722   108   237 1590   155   186  601   182   117  420   106
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  171  722   108   237 1590   155   186  601   182   117  420   106
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  171  722   108   237 1590   155   186  601   182   117  420   106
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 2.61  0.39  1.00 2.73  0.27  1.00 1.54  0.46  1.00 1.60  0.40
Final Sat.:  1600 4375   625  1600 4574   426  1600 2556   744  1600 2655   645
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.17  0.17  0.15 0.35  0.36  0.12 0.24  0.24  0.07 0.16  0.16
Crit Moves:  ****                      ****       ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:41                Page 83-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #82 Grand Ave and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.763
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        45               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      47  472    92   224 1146   224   319 1332   128   151  579   126
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   47  472    92   224 1146   224   319 1332   128   151  579   126
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    47  472    92   224 1146   224   319 1332   128   151  579   126
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   47  472    92   224 1146   224   319 1332   128   151  579   126
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   47  472    92   224 1146   224   319 1332   128   151  579   126
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.51  0.49  1.00 2.51  0.49  1.00 2.74  0.26  1.00 2.46  0.54
Final Sat.:  1600 4217   783  1600 4215   785  1600 4579   421  1600 4142   858
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.11  0.12  0.14 0.27  0.29  0.20 0.29  0.30  0.09 0.14  0.15
Crit Moves:  ****                 ****            ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:42                Page 84-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #83 Grand Ave and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.528
Loss Time (sec):       0               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        48               Level Of Service:                   A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    2  0  3  0  1    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     169  510   218   199  574   194   256  914   359    88  388   131
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  169  510   218   199  574   194   256  914   359    88  388   131
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   169  510   218   199  574   194   256  914   359    88  388   131
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  169  510   218   199  574   194   256  914   359    88  388   131
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  169  510   218   199  574   194   256  914   359    88  388   131
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.10  0.90  1.00 2.24  0.76  2.00 3.00  1.00  2.00 2.00  1.00
Final Sat.:  1600 3563  1437  1600 3788  1213  3200 5100  1600  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.14  0.15  0.12 0.15  0.16  0.08 0.18  0.22  0.03 0.11  0.08
Crit Moves:             ****  ****                     ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:43                Page 85-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #84 SR-55 NB Ramps and Dyer Rd
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.530
Loss Time (sec):       5                Average Delay (sec/veh):        16.3
Optimal Cycle:        26                Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1! 0  1    0  0  0  0  0    0  0  3  0  1    0  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     557    0   456     0    0     0     0 1533   613     0  719   433
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  557    0   456     0    0     0     0 1533   613     0  719   433
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:   557    0   456     0    0     0     0 1533     0     0  719     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  557    0   456     0    0     0     0 1533     0     0  719     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:  557    0   456     0    0     0     0 1533     0     0  719     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.91 1.00  0.91  1.00 1.00  1.00  1.00 0.91  1.00  1.00 0.91  0.91
Lanes:       1.55 0.00  1.45  0.00 0.00  0.00  0.00 3.00  1.00  0.00 3.00  0.00
Final Sat.:  2673    0  2501     0    0     0     0 5187  1900     0 5187     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.21 0.00  0.18  0.00 0.00  0.00  0.00 0.30  0.00  0.00 0.14  0.00
Crit Moves:  ****                                  ****        ****
Green/Cycle: 0.39 0.00  0.39  0.00 0.00  0.00  0.00 0.56  0.00  0.00 0.56  0.00
Volume/Cap:  0.53 0.00  0.46  0.00 0.00  0.00  0.00 0.53  0.00  0.00 0.25  0.00
Delay/Veh:   23.6  0.0  22.7   0.0  0.0   0.0   0.0 14.1   0.0   0.0 11.4   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  23.6  0.0  22.7   0.0  0.0   0.0   0.0 14.1   0.0   0.0 11.4   0.0
LOS by Move:    C    A     C     A    A     A     A    B     A     A    B     A
HCM2k85thQ:    13    0    11     0    0     0     0   16     0     0    6     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:44                Page 86-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
             2000 HCM 4-Way Stop Method (Base Volume Alternative)
*******************************************************************************
Intersection #85 Cambridge St and La Veta Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.799
Loss Time (sec):       5               Average Delay (sec/veh):        17.3
Optimal Cycle:         0               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Stop Sign        Stop Sign        Stop Sign        Stop Sign
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Lanes:        1  0  1  0  0    0  0  1  0  1    1  0  0  0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     160  204     0     0  480   245   117    0   187     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  160  204     0     0  480   245   117    0   187     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   160  204     0     0  480   245   117    0   187     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  160  204     0     0  480   245   117    0   187     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  160  204     0     0  480   245   117    0   187     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 1.00  0.00  0.00 1.00  1.00  1.00 0.00  1.00  0.00 0.00  0.00
Final Sat.:   514  554     0     0  601   671   467    0   553     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.31 0.37  xxxx  xxxx 0.80  0.37  0.25 xxxx  0.34  xxxx xxxx  xxxx
Crit Moves:       ****             ****                   ****
Delay/Veh:   12.5 12.5   0.0   0.0 27.6  10.8  12.4  0.0  11.8   0.0  0.0   0.0
Delay Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  12.5 12.5   0.0   0.0 27.6  10.8  12.4  0.0  11.8   0.0  0.0   0.0
LOS by Move:    B    B     *     *    D     B     B    *     B     *    *     *
ApproachDel:       12.5             21.9             12.0           xxxxxx
Delay Adj:         1.00             1.00             1.00            xxxxx
ApprAdjDel:        12.5             21.9             12.0           xxxxxx
LOS by Appr:          B                C                B                *
AllWayAvgQ:   0.4  0.5   0.0   0.0  3.2   0.5   0.3  0.0   0.4   0.0  0.0   0.0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:44                Page 87-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #86 Cambridge St and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.559
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        26               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:            Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    1  0  0  0  1    1  0  2  0  0    0  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   515    0   166    80  216     0     0  247   192
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   515    0   166    80  216     0     0  247   192
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   515    0   166    80  216     0     0  247   192
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   515    0   166    80  216     0     0  247   192
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   515    0   166    80  216     0     0  247   192
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 0.00  0.00  1.00 0.00  1.00  1.00 2.00  0.00  0.00 1.13  0.87
Final Sat.:     0    0     0  1600    0  1600  1600 3400     0     0 1900  1400
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.32 0.00  0.10  0.05 0.06  0.00  0.00 0.13  0.14
Crit Moves:                   ****             ****                     ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:45                Page 88-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #87 Mabury St and 1st Street
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.691
Loss Time (sec):       0               Average Delay (sec/veh):        28.3
Optimal Cycle:        74               Level Of Service:                  C
******************************************************************************
Street Name:              Mabury                          1st Street
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    1  0  1! 0  1    0  0  2  1  0    1  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:      10    0   244   238  141   533     0 1062    11    46  701     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   10    0   244   238  141   533     0 1062    11    46  701     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    10    0   244   238  141   533     0 1062    11    46  701     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   10    0   244   238  141   533     0 1062    11    46  701     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   10    0   244   238  141   533     0 1062    11    46  701     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 1.00  0.85  0.90 0.90  0.90  1.00 0.91  0.91  0.95 0.91  0.91
Lanes:       1.00 0.00  1.00  1.22 0.27  1.51  0.00 2.97  0.03  1.00 3.00  0.00
Final Sat.:  1805    0  1615  2097  458  2576     0 5129    53  1805 5187     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.00  0.15  0.11 0.31  0.21  0.00 0.21  0.21  0.03 0.14  0.00
Crit Moves:             ****       ****             ****        ****
Green/Cycle: 0.22 0.00  0.22  0.45 0.45  0.45  0.00 0.30  0.30  0.04 0.34  0.00
Volume/Cap:  0.03 0.00  0.69  0.25 0.69  0.46  0.00 0.69  0.69  0.69 0.40  0.00
Delay/Veh:   30.7  0.0  41.8  17.4 23.8  19.6   0.0 32.3  32.3  74.4 25.6   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  30.7  0.0  41.8  17.4 23.8  19.6   0.0 32.3  32.3  74.4 25.6   0.0
LOS by Move:    C    A     D     B    C     B     A    C     C     E    C     A
HCM2k85thQ:     0    0    13     6   21    12     0   18    18     4    9     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:47                Page 89-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #88 Tustin St and La Veta Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.521
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        25               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  1  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       8  333    96    74 1452     4     9   11    35   447    2    69
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    8  333    96    74 1452     4     9   11    35   447    2    69
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     8  333    96    74 1452     4     9   11    35   447    2    69
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    8  333    96    74 1452     4     9   11    35   447    2    69
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    8  333    96    74 1452     4     9   11    35   447    2    69
OvlAdjVol:                                                                    0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       1.00 2.33  0.67  1.00 2.99  0.01  1.00 1.00  1.00  1.99 0.01  1.00
Final Sat.:  1600 3926  1074  1600 4987    13  1600 1700  1600  3186   14  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.08  0.09  0.05 0.29  0.30  0.01 0.01  0.02  0.14 0.14  0.04
OvlAdjV/S:                                                                 0.00
Crit Moves:  ****                        ****             ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:48                Page 90-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #89 Tustin St and SR-22 WB On-Ramp
******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.734
Loss Time (sec):       5                Average Delay (sec/veh):        12.9
Optimal Cycle:        43                Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected         Permitted       Protected        Protected
Rights:           Include           Include         Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  0    0  0  2  1  0    0  0  0  0  0    0  0  0  0  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     656  610     0     0 1395   833     0    0     0     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  656  610     0     0 1395   833     0    0     0     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   656  610     0     0 1395   833     0    0     0     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  656  610     0     0 1395   833     0    0     0     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  656  610     0     0 1395   833     0    0     0     0    0     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 0.95  1.00  1.00 0.86  0.86  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       2.00 2.00  0.00  0.00 2.00  1.00  0.00 0.00  0.00  0.00 0.00  0.00
Final Sat.:  3502 3610     0     0 3264  1632     0    0     0     0    0     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.19 0.17  0.00  0.00 0.43  0.51  0.00 0.00  0.00  0.00 0.00  0.00
Crit Moves:  ****                      ****
Green/Cycle: 0.26 0.95  0.00  0.00 0.69  0.69  0.00 0.00  0.00  0.00 0.00  0.00
Volume/Cap:  0.73 0.18  0.00  0.00 0.61  0.73  0.00 0.00  0.00  0.00 0.00  0.00
Delay/Veh:   37.3  0.2   0.0   0.0  8.4  10.5   0.0  0.0   0.0   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  37.3  0.2   0.0   0.0  8.4  10.5   0.0  0.0   0.0   0.0  0.0   0.0
LOS by Move:    D    A     A     A    A     B     A    A     A     A    A     A
HCM2k85thQ:    17    1     0     0   19    27     0    0     0     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:49                Page 91-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #90 Tustin St and SR-22 EB Off-Ramp / Seba Ave
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.731
Loss Time (sec):       5                Average Delay (sec/veh):        24.2
Optimal Cycle:        43                Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted      Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  1  0    1  0  3  0  0    1  0  1! 0  1    0  0  1! 0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  996     5    22 1349     0   244   24  1051     6    0    43
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  996     5    22 1349     0   244   24  1051     6    0    43
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  996     5    22 1349     0   244   24  1051     6    0    43
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  996     5    22 1349     0   244   24  1051     6    0    43
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  996     5    22 1349     0   244   24  1051     6    0    43
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  0.91  0.16 0.91  1.00  0.87 0.87  0.87  0.88 1.00  0.88
Lanes:       0.00 2.99  0.01  1.00 3.00  0.00  1.18 0.04  1.78  0.12 0.00  0.88
Final Sat.:     0 5156    26   304 5187     0  1958   59  2954   204    0  1460
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.19  0.19  0.07 0.26  0.00  0.12 0.41  0.36  0.03 0.00  0.03
Crit Moves:                      ****             ****        ****
Green/Cycle: 0.00 0.36  0.36  0.36 0.36  0.00  0.55 0.55  0.55  0.04 0.00  0.04
Volume/Cap:  0.00 0.54  0.54  0.20 0.73  0.00  0.22 0.73  0.64  0.73 0.00  0.73
Delay/Veh:    0.0 26.1  26.1  23.3 29.6   0.0  11.4 18.3  16.1  80.9  0.0  80.9
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 26.1  26.1  23.3 29.6   0.0  11.4 18.3  16.1  80.9  0.0  80.9
LOS by Move:    A    C     C     C    C     A     B    B     B     F    A     F
HCM2k85thQ:     0   14    14     1   21     0     5   24    20     5    0     5
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:50                Page 92-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #91 Tustin Ave and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.977
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       178               Level Of Service:                  E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  1  1  0    1  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      89  514    90   235 2026    40    68  258   444   306  338   442
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   89  514    90   235 2026    40    68  258   444   306  338   442
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    89  514    90   235 2026    40    68  258   444   306  338   442
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   89  514    90   235 2026    40    68  258   444   306  338   442
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   89  514    90   235 2026    40    68  258   444   306  338   442
OvlAdjVol:                                                                 325
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.55  0.45  2.00 2.94  0.06  1.00 1.00  1.00  1.00 1.00  1.00
Final Sat.:  3200 4285   715  3200 4907    93  1600 1700  1600  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.12  0.13  0.07 0.41  0.43  0.04 0.15  0.28  0.19 0.20  0.28
OvlAdjV/S:                                                                 0.20
Crit Moves:  ****                      ****             ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:51                Page 93-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #92 Tustin Ave and Santa Clara Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.866
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        71               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    2  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:      73  397    74   127 2600    82   101  255   186   118  244   122
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   73  397    74   127 2600    82   101  255   186   118  244   122
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    73  397    74   127 2600    82   101  255   186   118  244   122
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   73  397    74   127 2600    82   101  255   186   118  244   122
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   73  397    74   127 2600    82   101  255   186   118  244   122
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.53  0.47  2.00 2.91  0.09  1.00 1.16  0.84  1.00 1.33  0.67
Final Sat.:  1600 4246   754  3200 4853   147  1600 1950  1350  1600 2233  1067
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.09  0.10  0.04 0.54  0.56  0.06 0.13  0.14  0.07 0.11  0.11
Crit Moves:  ****                         ****             ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:51                Page 94-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #93 Tustin Ave and 17th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.748
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        43               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  1  0    2  0  3  0  1    2  0  3  0  1
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     111  198   236   602 1737    19   187  738   126   488  770   188
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  111  198   236   602 1737    19   187  738   126   488  770   188
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   111  198   236   602 1737    19   187  738   126   488  770   188
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  111  198   236   602 1737    19   187  738   126   488  770   188
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  111  198   236   602 1737    19   187  738   126   488  770   188
OvlAdjVol:                 0                                                 0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.00  1.00  2.00 2.97  0.03  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 3400  1600  3200 4948    52  3200 5100  1600  3200 5100  1600
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.06  0.15  0.19 0.35  0.37  0.06 0.14  0.08  0.15 0.15  0.12
OvlAdjV/S:                 0.00                                              0.00
Crit Moves:  ****                         ****        ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:52                Page 95-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #94 Tustin Ave and 4th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.701
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        37               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    2  0  2  0  1    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       48  245   219   664  845   262   114  676    28   103  579   376
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    48  245   219   664  845   262   114  676    28   103  579   376
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     48  245   219   664  845   262   114  676    28   103  579   376
Reduct Vol:      0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    48  245   219   664  845   262   114  676    28   103  579   376
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    48  245   219   664  845   262   114  676    28   103  579   376
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       1.00 2.00  1.00  2.00 2.00  1.00  1.00 2.88  0.12  1.00 2.00  1.00
Final Sat.:  1600 3400  1600  3200 3400  1600  1600 4809   191  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.07  0.14  0.21 0.25  0.16  0.07 0.14  0.15  0.06 0.17  0.24
Crit Moves:             ****  ****             ****                     ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:53                Page 96-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #95 SR-55 SB Ramps / Auto Mall Dr and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.558
Loss Time (sec):       5               Average Delay (sec/veh):        24.4
Optimal Cycle:        28               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  2    1  0  1  0  1    1  0  3  0  1    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     421   63   498    50   30     8    28 1104   408   399  940   123
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  421   63   498    50   30     8    28 1104   408   399  940   123
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Volume:   421   63   498    50   30     8    28 1104     0   399  940   123
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  421   63   498    50   30     8    28 1104     0   399  940   123
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
FinalVolume:  421   63   498    50   30     8    28 1104     0   399  940   123
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.96 0.96  0.75  0.95 1.00  0.85  0.95 0.91  1.00  0.92 0.89  0.89
Lanes:       1.74 0.26  2.00  1.00 1.00  1.00  1.00 3.00  1.00  2.00 2.65  0.35
Final Sat.:  3167  474  2842  1805 1900  1615  1805 5187  1900  3502 4509   590
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.13  0.18  0.03 0.02  0.00  0.02 0.21  0.00  0.11 0.21  0.21
Crit Moves:             ****  ****                 ****        ****
Green/Cycle: 0.31 0.31  0.31  0.05 0.05  0.05  0.04 0.38  0.00  0.20 0.55  0.55
Volume/Cap:  0.42 0.42  0.56  0.56 0.32  0.10  0.38 0.56  0.00  0.56 0.38  0.38
Delay/Veh:   27.4 27.4  29.3  54.0 47.8  45.9  50.1 24.6   0.0  36.7 13.1  13.1
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  27.4 27.4  29.3  54.0 47.8  45.9  50.1 24.6   0.0  36.7 13.1  13.1
LOS by Move:    C    C     C     D    D     D     D    C     A     D    B     B
HCM2k85thQ:     9    9    12     4    2     1     2   15     0    10   11    11
******************************************************************************
```

Note: Queue reported is the number of cars per lane.
****

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:54                Page 97-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #96 SR-55 NB Ramps / Del Amo Ave and Newport Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.463
Loss Time (sec):       5               Average Delay (sec/veh):        24.0
Optimal Cycle:        23               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    1  0  3  0  1    2  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     227   60    38    14  344   504   253  153   146     8  223     4
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  227   60    38    14  344   504   253  153   146     8  223     4
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   227   60    38    14  344   504   253  153   146     8  223     4
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  227   60    38    14  344   504   253  153   146     8  223     4
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  227   60    38    14  344   504   253  153   146     8  223     4
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 0.86  0.86  0.95 0.91  0.85  0.92 0.88  0.88  0.95 0.95  0.95
Lanes:       2.00 2.00  1.00  1.00 3.00  1.00  2.00 1.02  0.98  1.00 1.96  0.04
Final Sat.:  3502 3257  1629  1805 5187  1615  3502 1712  1634  1805 3536    63
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.02  0.02  0.01 0.07  0.31  0.07 0.09  0.09  0.00 0.06  0.06
Crit Moves:  ****                         ****  ****                   ****
Green/Cycle: 0.14 0.49  0.49  0.16 0.52  0.67  0.16 0.28  0.28  0.01 0.14  0.14
Volume/Cap:  0.46 0.04  0.05  0.05 0.13  0.46  0.46 0.32  0.32  0.32 0.46  0.46
Delay/Veh:   40.2 13.1  13.1  35.3 12.5   8.0  39.0 28.8  28.8  56.2 40.5  40.5
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  40.2 13.1  13.1  35.3 12.5   8.0  39.0 28.8  28.8  56.2 40.5  40.5
LOS by Move:    D    B     B     D    B     A     D    C     C     E    D     D
HCM2k85thQ:     6    1     1     1    3    11     6    6     6     1    6     6
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:55                Page 98-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #97 Red Hill Ave and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.569
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        27               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Ovl            Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      81  299    85   226  960   450   190  611   130   224 1085   152
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   81  299    85   226  960   450   190  611   130   224 1085   152
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    81  299    85   226  960   450   190  611   130   224 1085   152
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   81  299    85   226  960   450   190  611   130   224 1085   152
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   81  299    85   226  960   450   190  611   130   224 1085   152
OvlAdjVol:                                355                89
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.06  0.05  0.07 0.19  0.28  0.06 0.12  0.08  0.07 0.21  0.10
OvlAdjV/S:                                0.22             0.06
Crit Moves:  ****                         ****  ****                 ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:56                Page 99-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #98 Red Hill Ave and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.485
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        23               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  1  0    2  0  2  1  0    1  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       56  339    46    19  891   179   202  343   253    98  349    62
Growth Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    56  339    46    19  891   179   202  343   253    98  349    62
User Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:      1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     56  339    46    19  891   179   202  343   253    98  349    62
Reduct Vol:      0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    56  339    46    19  891   179   202  343   253    98  349    62
PCE Adj:      1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:      1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    56  339    46    19  891   179   202  343   253    98  349    62
OvlAdjVol:                                                                   53
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:     1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:   1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:        2.00 3.52  0.48  2.00 2.50  0.50  1.00 2.00  1.00  2.00 3.00  1.00
Final Sat.:   3200 5935   765  3200 4197   803  1600 3400  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:      0.02 0.06  0.06  0.01 0.21  0.22  0.13 0.10  0.16  0.03 0.07  0.04
OvlAdjV/S:                                                                   0.03
Crit Moves:   ****                     ****  ****                 ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:57              Page 100-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #99 Red Hill Ave and Dyer Rd / barranca Pkwy
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.575
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        27               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  4  0  1    2  0  4  0  1    2  0  3  1  0    2  0  4  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     127  316   104   199  876   115   118  710   281   578  645   126
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  127  316   104   199  876   115   118  710   281   578  645   126
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   127  316   104   199  876   115   118  710   281   578  645   126
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  127  316   104   199  876   115   118  710   281   578  645   126
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  127  316   104   199  876   115   118  710   281   578  645   126
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 4.00  1.00  2.00 4.00  1.00  2.00 3.00  1.00  2.00 4.00  1.00
Final Sat.:  3200 6800  1600  3200 6800  1600  3200 5100  1600  3200 6800  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.05  0.07  0.06 0.13  0.07  0.04 0.14  0.18  0.18 0.09  0.08
Crit Moves:  ****                 ****                 ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:58                Page 101-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #100 Red Hill Ave and Alton Pkwy
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.524
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        25               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  2  0  1    2  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     174  512   321   251 1141   183     9   28    28   223  189   106
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  174  512   321   251 1141   183     9   28    28   223  189   106
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   174  512   321   251 1141   183     9   28    28   223  189   106
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  174  512   321   251 1141   183     9   28    28   223  189   106
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  174  512   321   251 1141   183     9   28    28   223  189   106
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 2.00  1.00  2.00 1.00  1.00
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 3400  1600  3200 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.10  0.20  0.16 0.22  0.11  0.01 0.01  0.02  0.07 0.11  0.07
Crit Moves:             ****  ****             ****                   ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:50:59              Page 102-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #101 Red Hill Ave and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.664
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        34               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ignore           Include          Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       64  569    10   208  537   492  1248  645   106    23  223   571
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    64  569    10   208  537   492  1248  645   106    23  223   571
User Adj:    1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
PHF Volume:     64  569    10   208  537     0  1248  645   106    23  223     0
Reduct Vol:      0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    64  569    10   208  537     0  1248  645   106    23  223     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
FinalVolume:    64  569    10   208  537     0  1248  645   106    23  223     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.95  0.05  2.00 3.00  1.00  2.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200 4917    83  3200 5100  1600  3200 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.12  0.12  0.07 0.11  0.00  0.39 0.13  0.07  0.01 0.04  0.00
Crit Moves:       ****        ****             ****                   ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:51:00              Page 103-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #102 Red Hill Ave and Main St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.670
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        34               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     162  556   361    67  313   108   139 1309   254   154  309    73
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  162  556   361    67  313   108   139 1309   254   154  309    73
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   162  556   361    67  313   108   139 1309   254   154  309    73
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  162  556   361    67  313   108   139 1309   254   154  309    73
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  162  556   361    67  313   108   139 1309   254   154  309    73
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 2.00  1.00  2.00 2.00  1.00  2.00 2.51  0.49  2.00 2.43  0.57
Final Sat.:  3200 3400  1600  3200 3400  1600  3200 4220   780  3200 4083   917
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.16  0.23  0.02 0.09  0.07  0.04 0.31  0.33  0.05 0.08  0.08
Crit Moves:             ****  ****                     ****  ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:51:01              Page 104-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #103 I-5 SB Ramps and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.514
Loss Time (sec):       5               Average Delay (sec/veh):        17.4
Optimal Cycle:        25               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Ovl             Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  1    2  0  3  0  0    0  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   367    0    36   323  554     0     0 1130   330
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   367    0    36   323  554     0     0 1130   330
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   367    0    36   323  554     0     0 1130   330
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   367    0    36   323  554     0     0 1130   330
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   367    0    36   323  554     0     0 1130   330
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.92 1.00  0.85  0.92 0.91  1.00  1.00 0.88  0.88
Lanes:       0.00 0.00  0.00  2.00 0.00  1.00  2.00 3.00  0.00  0.00 2.32  0.68
Final Sat.:     0    0     0  3502    0  1615  3502 5187     0     0 3878  1133
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.10 0.00  0.02  0.09 0.11  0.00  0.00 0.29  0.29
Crit Moves:                   ****             ****                   ****
Green/Cycle: 0.00 0.00  0.00  0.20 0.00  0.38  0.18 0.75  0.00  0.00 0.57  0.57
Volume/Cap:  0.00 0.00  0.00  0.51 0.00  0.06  0.51 0.14  0.00  0.00 0.51  0.51
Delay/Veh:    0.0  0.0   0.0  36.0  0.0  19.5  37.8  3.6   0.0   0.0 13.4  13.4
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
```

```
AdjDel/Veh:   0.0  0.0   0.0  36.0  0.0  19.5  37.8  3.6   0.0   0.0 13.4  13.4
LOS by Move:    A    A     A     D    A     B     D    A     A     A    B     B
HCM2k85thQ:     0    0     0     9    0     1     8    3     0     0   15    15
********************************************************************************
Note: Queue reported is the number of cars per lane.
********************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:51:01              Page 105-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #104 Tustin Ranch Rd and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.475
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        23               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  1    2  0  3  0  0    0  0  3  0  1
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:       0    0     0   265    0    33    18  238     0     0 1717   395
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   265    0    33    18  238     0     0 1717   395
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   265    0    33    18  238     0     0 1717   395
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   265    0    33    18  238     0     0 1717   395
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   265    0    33    18  238     0     0 1717   395
OvlAdjVol:                                                                 263
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 0.00  0.00  2.00 0.00  1.00  2.00 3.00  0.00  0.00 3.00  1.00
Final Sat.:     0    0     0  3200    0  1600  3200 5100     0     0 5100  1600
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.08 0.00  0.02  0.01 0.05  0.00  0.00 0.34  0.25
OvlAdjV/S:                                                                 0.16
Crit Moves:                    ****             ****                 ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:51:02                Page 106-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #105 Von Karman Ave and Barranca Pkwy
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):          0.762
Loss Time (sec):       5               Average Delay (sec/veh):       xxxxxx
Optimal Cycle:        45               Level Of Service:                    C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  1  1  0    2  0  2  0  2    2  0  3  0  1    2  0  4  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     107  142    85   119 1164   509   130  488   163   769 1263    39
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  107  142    85   119 1164   509   130  488   163   769 1263    39
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   107  142    85   119 1164   509   130  488   163   769 1263    39
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  107  142    85   119 1164   509   130  488   163   769 1263    39
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  107  142    85   119 1164   509   130  488   163   769 1263    39
OvlAdjVol:                          379
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 1.25  0.75  2.00 2.00  2.00  2.00 3.00  1.00  2.00 4.00  1.00
Final Sat.:  3200 2102  1198  3200 3400  3200  3200 5100  1600  3200 6800  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.07  0.07  0.04 0.34  0.16  0.04 0.10  0.10  0.24 0.19  0.02
OvlAdjV/S:                          0.12
Crit Moves:  ****                ****             ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:51:03              Page 107-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #106 Red Hill Avenue and El Camino Real
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.706
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
******************************************************************************
Street Name:         Red Hill Avenue                   El Camino Real
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    1  0  2  1  0    1  0  1  0  1    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     306  785   253    18 1303    80    69  156   164   271  222    16
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  306  785   253    18 1303    80    69  156   164   271  222    16
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   306  785   253    18 1303    80    69  156   164   271  222    16
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  306  785   253    18 1303    80    69  156   164   271  222    16
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  306  785   253    18 1303    80    69  156   164   271  222    16
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       2.00 3.00  1.00  1.00 2.83  0.17  1.00 1.00  1.00  1.00 0.93  0.07
Final Sat.:  3200 5100  1600  1600 4722   278  1600 1700  1600  1600 1492   108
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.15  0.16  0.01 0.28  0.29  0.04 0.09  0.10  0.17 0.15  0.15
Crit Moves:  ****                     ****                ****  ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:51:04              Page 108-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #107 Red Hill Avenue and I-5 NB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.670
Loss Time (sec):       5               Average Delay (sec/veh):        20.3
Optimal Cycle:        36               Level Of Service:                 C
******************************************************************************
Street Name:         Red Hill Avenue                   I-5 NB Ramps
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  0    0  0  3  0  1    0  0  0  0  0    2  0  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     327 1084     0     0 1263   475     0    0     0   228    0   261
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  327 1084     0     0 1263   475     0    0     0   228    0   261
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   327 1084     0     0 1263   475     0    0     0   228    0   261
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  327 1084     0     0 1263   475     0    0     0   228    0   261
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  327 1084     0     0 1263   475     0    0     0   228    0   261
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.85  1.00 1.00  1.00  0.60 1.00  0.85
Lanes:       1.00 3.00  0.00  0.00 3.00  1.00  0.00 0.00  0.00  2.00 0.00  1.00
Final Sat.:  1805 5187     0     0 5187  1615     0    0     0  2278    0  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.18 0.21  0.00  0.00 0.24  0.29  0.00 0.00  0.00  0.10 0.00  0.16
Crit Moves:  ****                     ****                                 ****
Green/Cycle: 0.27 0.71  0.00  0.00 0.44  0.44  0.00 0.00  0.00  0.24 0.00  0.24
Volume/Cap:  0.67 0.29  0.00  0.00 0.56  0.67  0.00 0.00  0.00  0.42 0.00  0.67
Delay/Veh:   36.1  5.4   0.0   0.0 21.1  24.8   0.0  0.0   0.0  32.5  0.0  38.8
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
```

AdjDel/Veh:	36.1	5.4	0.0	0.0	21.1	24.8	0.0	0.0	0.0	32.5	0.0	38.8
LOS by Move:	D	A	A	A	C	C	A	A	A	C	A	D
HCM2k85thQ:	15	7	0	0	16	19	0	0	0	5	0	13

****

Note: Queue reported is the number of cars per lane.

****

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:51:05              Page 109-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #108 Red Hill Avenue and I-5 SB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.784
Loss Time (sec):       5               Average Delay (sec/veh):        22.0
Optimal Cycle:        51               Level Of Service:                  C
******************************************************************************
Street Name:         Red Hill Avenue                    I-5 SB Ramps
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  1    1  0  3  0  0    0  1  0  0  1    0  0  0  0  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:       0 1243   550   385 1105     0   168    4   309     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1243   550   385 1105     0   168    4   309     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1243   550   385 1105     0   168    4   309     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1243   550   385 1105     0   168    4   309     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1243   550   385 1105     0   168    4   309     0    0     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  0.85  0.95 0.91  1.00  0.95 0.95  0.85  1.00 1.00  1.00
Lanes:       0.00 4.00  1.00  1.00 3.00  0.00  0.98 0.02  1.00  0.00 0.00  0.00
Final Sat.:     0 6916  1615  1805 5187     0  1759   42  1615     0    0     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.18  0.34  0.21 0.21  0.00  0.10 0.10  0.19  0.00 0.00  0.00
Crit Moves:             ****  ****                     ****
Green/Cycle: 0.00 0.43  0.43  0.27 0.71  0.00  0.24 0.24  0.24  0.00 0.00  0.00
Volume/Cap:  0.00 0.41  0.78  0.78 0.30  0.00  0.39 0.39  0.78  0.00 0.00  0.00
Delay/Veh:    0.0 19.6  30.1  41.8  5.5   0.0  32.2 32.2  45.3   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 19.6  30.1  41.8  5.5   0.0  32.2 32.2  45.3   0.0  0.0   0.0
LOS by Move:    A    B     C     D    A     A     C    C     D     A    A     A
HCM2k85thQ:     0   11    24    19    7     0     7    7    16     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:51:06              Page 110-1
-------------------------------------------------------------------------------
                        Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #109 Red Hill Avenue and Nisson Road
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.653
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        33               Level Of Service:                  B
*******************************************************************************
Street Name:         Red Hill Avenue                    Nisson Road
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  1  0    1  0  2  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      17 1298    24   152 1144   120   242   59    48    49   26   215
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   17 1298    24   152 1144   120   242   59    48    49   26   215
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    17 1298    24   152 1144   120   242   59    48    49   26   215
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   17 1298    24   152 1144   120   242   59    48    49   26   215
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   17 1298    24   152 1144   120   242   59    48    49   26   215
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 3.93  0.07  1.00 2.72  0.28  1.00 0.55  0.45  1.00 0.11  0.89
Final Sat.:  1600 6584   116  1600 4544   456  1600  882   718  1600  173  1427
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.20  0.21  0.10 0.25  0.26  0.15 0.07  0.07  0.03 0.15  0.15
Crit Moves:             ****  ****             ****                     ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:51:07                Page 111-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #110 Red Hill Avenue and Walnut Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.684
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        35               Level Of Service:                  B
*******************************************************************************
Street Name:         Red Hill Avenue                   Walnut Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    2  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     135  525    99   104 1046   117   160  398   392   192  254   121
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  135  525    99   104 1046   117   160  398   392   192  254   121
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   135  525    99   104 1046   117   160  398   392   192  254   121
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  135  525    99   104 1046   117   160  398   392   192  254   121
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  135  525    99   104 1046   117   160  398   392   192  254   121
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.05  1.00
Lanes:       1.00 2.52  0.48  1.00 2.70  0.30  1.00 1.01  0.99  2.00 1.35  0.65
Final Sat.:  1600 4238   762  1600 4517   483  1600 1712  1588  3200 2267  1033
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.12  0.13  0.07 0.23  0.24  0.10 0.23  0.25  0.06 0.11  0.12
Crit Moves:  ****                 ****             ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:51:08              Page 112-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #111 Red Hill Avenue and Valencia Avenue
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.544
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        26               Level Of Service:                  A
******************************************************************************
Street Name:         Red Hill Avenue                 Valencia Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  1  0    1  0  2  1  0    1  0  1  0  1    2  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       77  325   105   120 1032    69    20  139    54   252  346   122
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    77  325   105   120 1032    69    20  139    54   252  346   122
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     77  325   105   120 1032    69    20  139    54   252  346   122
Reduct Vol:      0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    77  325   105   120 1032    69    20  139    54   252  346   122
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    77  325   105   120 1032    69    20  139    54   252  346   122
OvlAdjVol:                  0                                                 2
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 3.02  0.98  1.00 2.81  0.19  1.00 1.00  1.00  2.00 1.00  1.00
Final Sat.:  1600 5137  1563  1600 4699   301  1600 1700  1600  3200 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.06  0.07  0.08 0.22  0.23  0.01 0.08  0.03  0.08 0.20  0.08
OvlAdjV/S:               0.00                                              0.00
Crit Moves:  ****                      ****  ****                 ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:51:08              Page 113-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #112 Tustin Ranch Road and Warner Avenue North
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.426
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        21               Level Of Service:                  A
*******************************************************************************
Street Name:        Tustin Ranch Road               Warner Avenue North
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:            Ovl            Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  3  0  1    2  0  3  0  0    0  0  0  0  0    3  0  0  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  272   263   456 1289     0     0    0     0   591    0   174
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  272   263   456 1289     0     0    0     0   591    0   174
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  272   263   456 1289     0     0    0     0   591    0   174
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  272   263   456 1289     0     0    0     0   591    0   174
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  272   263   456 1289     0     0    0     0   591    0   174
OvlAdjVol:                66                                                 0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 3.00  1.00  2.00 3.00  0.00  0.00 0.00  0.00  3.00 0.00  2.00
Final Sat.:     0 5100  1600  3200 5100     0     0    0     0  4800    0  3200
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.05  0.16  0.14 0.25  0.00  0.00 0.00  0.00  0.12 0.00  0.05
OvlAdjV/S:              0.04                                                0.00
Crit Moves:  ****               ****                          ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:51:09              Page 114-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #113 Tustin Ranch Road and Walnut Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.193
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Street Name:        Tustin Ranch Road                 Walnut Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Ovl              Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  1  1  0    2  0  2  0  1
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     123  756   377  1045 2921   389   702  917   554   231  341   288
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  123  756   377  1045 2921   389   702  917   554   231  341   288
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   123  756   377  1045 2921   389   702  917   554   231  341   288
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  123  756   377  1045 2921   389   702  917   554   231  341   288
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  123  756   377  1045 2921   389   702  917   554   231  341   288
OvlAdjVol:                262              38                                 0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 1.25  0.75  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 2095  1205  3200 3400  1600
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.15  0.24  0.33 0.57  0.24  0.22 0.44  0.46  0.07 0.10  0.18
OvlAdjV/S:                0.16              0.02                                0.00
Crit Moves:  ****                 ****                     ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:51:10              Page 115-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #114 SR-55 SB Ramps and Irvine Boulevard
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.970
Loss Time (sec):       5               Average Delay (sec/veh):        23.2
Optimal Cycle:       165               Level Of Service:                  C
******************************************************************************
Street Name:          SR-55 SB Ramps                  Irvine Boulevard
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected         Permitted       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    1  0  1! 0  1    0  0  2  1  0    1  0  3  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0    62    0    68     0  575  1032   425 1063     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0    62    0    68     0  575  1032   425 1063     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0    62    0    68     0  575  1032   425 1063     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0    62    0    68     0  575  1032   425 1063     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0    62    0    68     0  575  1032   425 1063     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.88 1.00  0.77  1.00 0.82  0.82  0.95 0.91  1.00
Lanes:       0.00 0.00  0.00  1.44 0.00  1.56  0.00 2.00  1.00  1.00 3.00  0.00
Final Sat.:     0    0     0  2415    0  2277     0 3126  1563  1805 5187     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.03 0.00  0.03  0.00 0.18  0.66  0.24 0.20  0.00
Crit Moves:                   ****                          ****  ****
Green/Cycle: 0.00 0.00  0.00  0.03 0.00  0.05  0.00 0.68  0.68  0.24 0.92  0.00
Volume/Cap:  0.00 0.00  0.00  0.86 0.00  0.58  0.00 0.27  0.97  0.97 0.22  0.00
Delay/Veh:    0.0  0.0   0.0  84.9  0.0  50.0   0.0  6.3  30.4  72.4  0.4   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0  84.9  0.0  50.0   0.0  6.3  30.4  72.4  0.4   0.0
LOS by Move:    A    A     A     F    A     D     A    A     C     E    A     A
```

```
HCM2k85thQ:     0    0     0     5    0     4     0    6    54    27    2     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP AM Peak Hour       Thu Oct 22, 2020 13:51:11              Page 116-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #115 SR-55 NB Ramps and Irvine Boulevard
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.797
Loss Time (sec):       5               Average Delay (sec/veh):        19.8
Optimal Cycle:        54               Level Of Service:                  B
*******************************************************************************
Street Name:          SR-55 NB Ramps                  Irvine Boulevard
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:         Permitted       Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1! 0  1    0  0  0  0  0    1  0  3  0  0    0  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     410    0   394     0    0     0   187  444     0     0 1079   750
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  410    0   394     0    0     0   187  444     0     0 1079   750
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   410    0   394     0    0     0   187  444     0     0 1079   750
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  410    0   394     0    0     0   187  444     0     0 1079   750
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  410    0   394     0    0     0   187  444     0     0 1079   750
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.75 1.00  0.74  1.00 1.00  1.00  0.95 0.91  1.00  1.00 0.85  0.85
Lanes:       1.51 0.00  1.49  0.00 0.00  0.00  1.00 3.00  0.00  0.00 2.00  1.00
Final Sat.:  2135    0  2095     0    0     0  1805 5187     0     0 3247  1624
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.19 0.00  0.19  0.00 0.00  0.00  0.10 0.09  0.00  0.00 0.33  0.46
Crit Moves:  ****                             ****                       ****
Green/Cycle: 0.24 0.00  0.48  0.00 0.00  0.00  0.13 0.71  0.00  0.00 0.58  0.58
Volume/Cap:  0.80 0.00  0.39  0.00 0.00  0.00  0.80 0.12  0.00  0.00 0.57  0.80
Delay/Veh:   40.3  0.0  16.7   0.0  0.0   0.0  59.3  4.6   0.0   0.0 13.5  18.5
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  40.3  0.0  16.7   0.0  0.0   0.0  59.3  4.6   0.0   0.0 13.5  18.5
LOS by Move:    D    A     B     A    A     A     E    A     A     A    B     B
HCM2k85thQ:    15    0     8     0    0     0    12    2     0     0   18    31
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

APPENDIX D.2

ANALYSIS WORKSHEETS –
2020 NP (PM Peak Hour)

Santa Ana Circulation Element

Scenario Report

Scenario:	2020 NP PM Peak Hour
Command:	Default Command
Volume:	2020 NP PM
Geometry:	NP
Impact Fee:	Default Impact Fee
Trip Generation:	Default Trip Generation
Trip Distribution:	Default Trip Distribution
Paths:	Default Path
Routes:	Default Route
Configuration:	Default Configuration

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

2020 NP PM Peak Hour Thu Oct 22, 2020 13:56:05 Page 2-1

Santa Ana Circulation Element

Impact Analysis Report
Level Of Service

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in V/C
# 1 Euclid St and 1st St	D	xxxxx	0.865	D	xxxxx	0.865	+ 0.000 V/C
# 2 Euclid St and McFadden Ave	D	xxxxx	0.833	D	xxxxx	0.833	+ 0.000 V/C
# 3 Euclid St and Edinger Ave	C	xxxxx	0.787	C	xxxxx	0.787	+ 0.000 V/C
# 4 Newhope St and Hazard Ave	B	xxxxx	0.642	B	xxxxx	0.642	+ 0.000 V/C
# 5 Newhope St and McFadden Ave	D	xxxxx	0.838	D	xxxxx	0.838	+ 0.000 V/C
# 6 Harbor Blvd and SR-22 WB Off-R	C	23.6	0.703	C	23.6	0.703	+ 0.000 D/V
# 7 Trask Avenue and SR-22 EB On-R	B	12.4	0.448	B	12.4	0.448	+ 0.000 D/V
# 8 Harbor Blvd and Westminster Av	C	xxxxx	0.792	C	xxxxx	0.792	+ 0.000 V/C
# 9 Harbor Blvd and 1st St	D	xxxxx	0.833	D	xxxxx	0.833	+ 0.000 V/C
# 10 Harbor Blvd and McFadden Ave	D	xxxxx	0.809	D	xxxxx	0.809	+ 0.000 V/C
# 11 Harbor Blvd and Edinger Ave	B	xxxxx	0.697	B	xxxxx	0.697	+ 0.000 V/C
# 12 Harbor Blvd and Warner Ave	F	xxxxx	1.581	F	xxxxx	1.581	+ 0.000 V/C
# 13 Harbor Blvd and Segerstrom Ave	D	xxxxx	0.897	D	xxxxx	0.897	+ 0.000 V/C
# 14 MacArthur Blvd and Hyland Ave	E	xxxxx	0.917	E	xxxxx	0.917	+ 0.000 V/C
# 15 MacArthur Blvd and Harbor Blvd	D	xxxxx	0.819	D	xxxxx	0.819	+ 0.000 V/C
# 16 Harbor Blvd and Sunflower Ave	C	xxxxx	0.780	C	xxxxx	0.780	+ 0.000 V/C
# 17 Harbor Blvd and I-405 WB Off-R	C	22.9	0.812	C	22.9	0.812	+ 0.000 D/V
# 18 Harbor Blvd and I-405 EB Off-R	B	16.2	0.630	B	16.2	0.630	+ 0.000 D/V
# 19 Fairview St and Civic Center D	B	xxxxx	0.662	B	xxxxx	0.662	+ 0.000 V/C
# 20 Fairview St and 1st St	D	xxxxx	0.883	D	xxxxx	0.883	+ 0.000 V/C
# 21 Fairview St and McFadden Ave	C	xxxxx	0.798	C	xxxxx	0.798	+ 0.000 V/C
# 22 Fairview St and Edinger Ave	D	xxxxx	0.811	D	xxxxx	0.811	+ 0.000 V/C
# 23 Fairview St and Warner Ave	D	xxxxx	0.845	D	xxxxx	0.845	+ 0.000 V/C
# 24 Fairview St and MacArthur Blvd	D	xxxxx	0.826	D	xxxxx	0.826	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
# 25 Fairview Rd and Sunflower Ave	C	xxxxx	0.708	C	xxxxx	0.708	+ 0.000 V/C
# 26 Greenville St and Edinger Ave	A	xxxxx	0.586	A	xxxxx	0.586	+ 0.000 V/C
# 27 Greenville St and Segerstrom A	B	xxxxx	0.686	B	xxxxx	0.686	+ 0.000 V/C
# 28 Raitt St and McFadden Ave	C	xxxxx	0.722	C	xxxxx	0.722	+ 0.000 V/C
# 29 Raitt St and Edinger Ave	D	xxxxx	0.864	D	xxxxx	0.864	+ 0.000 V/C
# 30 Bear St and MacArthur Blvd	D	xxxxx	0.868	D	xxxxx	0.868	+ 0.000 V/C
# 31 Bristol St and 17th St	B	xxxxx	0.692	B	xxxxx	0.692	+ 0.000 V/C
# 32 Bristol St and Civic Center Dr	D	xxxxx	0.832	D	xxxxx	0.832	+ 0.000 V/C
# 33 Bristol St and Santa Ana Blvd	B	xxxxx	0.657	B	xxxxx	0.657	+ 0.000 V/C
# 34 Bristol St and 1st St	C	xxxxx	0.779	C	xxxxx	0.779	+ 0.000 V/C
# 35 Bristol St and McFadden Ave	C	xxxxx	0.752	C	xxxxx	0.752	+ 0.000 V/C
# 36 Bristol St and Warner Ave	C	xxxxx	0.790	C	xxxxx	0.790	+ 0.000 V/C
# 37 Bristol St and Segerstrom Ave	E	xxxxx	0.909	E	xxxxx	0.909	+ 0.000 V/C
# 38 Bristol St and Alton Ave	B	xxxxx	0.686	B	xxxxx	0.686	+ 0.000 V/C
# 39 Bristol St and MacArthur Blvd	D	xxxxx	0.812	D	xxxxx	0.812	+ 0.000 V/C
# 40 Bristol St and Sunflower Ave	B	xxxxx	0.689	B	xxxxx	0.689	+ 0.000 V/C
# 41 Bristol St and I-405 WB Ramps	C	28.2	0.829	C	28.2	0.829	+ 0.000 D/V
# 42 Bristol St and I-405 EB Ramps	B	18.4	0.595	B	18.4	0.595	+ 0.000 D/V
# 43 Flower St and Santa Ana Blvd	A	xxxxx	0.571	A	xxxxx	0.571	+ 0.000 V/C
# 44 Flower St and 1st St	C	xxxxx	0.752	C	xxxxx	0.752	+ 0.000 V/C
# 45 Flower St and McFadden Ave	E	xxxxx	0.920	E	xxxxx	0.920	+ 0.000 V/C
# 46 Flower St and Segerstrom Ave	D	xxxxx	0.897	D	xxxxx	0.897	+ 0.000 V/C
# 47 Flower St and MacArthur Blvd	E	xxxxx	0.906	E	xxxxx	0.906	+ 0.000 V/C
# 48 Main St and La Veta Ave	B	xxxxx	0.628	B	xxxxx	0.628	+ 0.000 V/C
# 49 Main St and Mainplace Dr / Mem	A	xxxxx	0.471	A	xxxxx	0.471	+ 0.000 V/C
# 50 Main St and 17th St	C	xxxxx	0.732	C	xxxxx	0.732	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
# 51 Main St and Civic Center Dr	D	xxxxx	0.801	D	xxxxx	0.801	+ 0.000 V/C
# 52 Main St and Santa Ana Blvd	B	xxxxx	0.607	B	xxxxx	0.607	+ 0.000 V/C
# 53 Main St and 4th St	A	xxxxx	0.537	A	xxxxx	0.537	+ 0.000 V/C
# 54 Main St and 1st St	C	xxxxx	0.799	C	xxxxx	0.799	+ 0.000 V/C
# 55 Main St and McFadden Ave	D	xxxxx	0.845	D	xxxxx	0.845	+ 0.000 V/C
# 56 Main St and Edinger Ave	D	xxxxx	0.847	D	xxxxx	0.847	+ 0.000 V/C
# 57 Main St and MacArthur Blvd	C	xxxxx	0.777	C	xxxxx	0.777	+ 0.000 V/C
# 58 Penn Wy and 17th St	C	20.7	0.770	C	20.7	0.770	+ 0.000 D/V
# 59 I-5 NB Off Ramps/17th Street	B	19.5	0.589	B	19.5	0.589	+ 0.000 D/V
# 60 Penn Wy and I-5 SB Ramps	C	22.0	0.423	C	22.0	0.423	+ 0.000 D/V
# 61 Santiago St and Civic Center D	C	17.1	0.674	C	17.1	0.674	+ 0.000 V/C
# 62 Santiago St and Santa Ana Blvd	A	xxxxx	0.569	A	xxxxx	0.569	+ 0.000 V/C
# 64 Standard Ave and 1st St	D	xxxxx	0.842	D	xxxxx	0.842	+ 0.000 V/C
# 65 Standard Ave and Mcfadden Ave	B	xxxxx	0.682	B	xxxxx	0.682	+ 0.000 V/C
# 66 Halladay St and Warner Ave	B	xxxxx	0.677	B	xxxxx	0.677	+ 0.000 V/C
# 67 Halladay St and Dyer Rd	C	xxxxx	0.784	C	xxxxx	0.784	+ 0.000 V/C
# 68 SR-55 SB Ramps and MacArthur B	B	17.3	0.569	B	17.3	0.569	+ 0.000 D/V
# 69 SR-55 NB Ramps and MacArthur B	B	14.8	0.497	B	14.8	0.497	+ 0.000 D/V
# 70 SR-55 SB Ramps and Dyer Rd	C	25.7	0.669	C	25.7	0.669	+ 0.000 D/V
# 71 Glassell St and La Veta Ave	B	xxxxx	0.620	B	xxxxx	0.620	+ 0.000 V/C
# 72 Glassell St and SR-22 WB Ramps	C	24.8	0.766	C	24.8	0.766	+ 0.000 D/V
# 73 Grand Ave / Glassell St and SR	C	26.5	0.812	C	26.5	0.812	+ 0.000 D/V
# 74 Grand Ave and Fairhaven Ave	B	xxxxx	0.675	B	xxxxx	0.675	+ 0.000 V/C
# 75 Grand Ave and Santa Clara Ave	C	xxxxx	0.748	C	xxxxx	0.748	+ 0.000 V/C
# 76 Grand Ave and 17th St	D	xxxxx	0.828	D	xxxxx	0.828	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/Veh	Base V/C	Future LOS	Future Del/Veh	Future V/C	Change in
# 77 Grand Ave and I-5 NB Ramps	A	10.0	0.518	A	10.0	0.518	+ 0.000 D/V
# 78 Grand Ave and Santa Ana Blvd	C	21.1	0.605	C	21.1	0.605	+ 0.000 D/V
# 79 Grand Ave and 1st St	C	xxxxx	0.793	C	xxxxx	0.793	+ 0.000 V/C
# 80 Grand Ave and Chestnut Ave	B	xxxxx	0.615	B	xxxxx	0.615	+ 0.000 V/C
# 81 Grand Ave and McFadden Ave	C	xxxxx	0.759	C	xxxxx	0.759	+ 0.000 V/C
# 82 Grand Ave and Edinger Ave	E	xxxxx	0.909	E	xxxxx	0.909	+ 0.000 V/C
# 83 Grand Ave and Warner Ave	C	xxxxx	0.704	C	xxxxx	0.704	+ 0.000 V/C
# 84 SR-55 NB Ramps and Dyer Rd	A	5.7	0.376	A	5.7	0.376	+ 0.000 D/V
# 85 Cambridge St and La Veta Ave	B	12.5	0.459	B	12.5	0.459	+ 0.000 V/C
# 86 Cambridge St and Fairhaven Ave	A	xxxxx	0.488	A	xxxxx	0.488	+ 0.000 V/C
# 87 Mabury St and 1st Street	C	26.1	0.703	C	26.1	0.703	+ 0.000 D/V
# 88 Tustin St and La Veta Ave	A	xxxxx	0.444	A	xxxxx	0.444	+ 0.000 V/C
# 89 Tustin St and SR-22 WB On-Ramp	B	12.1	0.446	B	12.1	0.446	+ 0.000 D/V
# 90 Tustin St and SR-22 EB Off-Ram	C	23.7	0.719	C	23.7	0.719	+ 0.000 D/V
# 91 Tustin Ave and Fairhaven Ave	B	xxxxx	0.614	B	xxxxx	0.614	+ 0.000 V/C
# 92 Tustin Ave and Santa Clara Ave	B	xxxxx	0.647	B	xxxxx	0.647	+ 0.000 V/C
# 93 Tustin Ave and 17th St	C	xxxxx	0.717	C	xxxxx	0.717	+ 0.000 V/C
# 94 Tustin Ave and 4th St	B	xxxxx	0.692	B	xxxxx	0.692	+ 0.000 V/C
# 95 SR-55 SB Ramps / Auto Mall Dr	C	25.1	0.583	C	25.1	0.583	+ 0.000 D/V
# 96 SR-55 NB Ramps / Del Amo Ave a	C	27.4	0.525	C	27.4	0.525	+ 0.000 D/V
# 97 Red Hill Ave and Edinger Ave	B	xxxxx	0.667	B	xxxxx	0.667	+ 0.000 V/C
# 98 Red Hill Ave and Warner Ave	A	xxxxx	0.588	A	xxxxx	0.588	+ 0.000 V/C
# 99 Red Hill Ave and Dyer Rd / bar	A	xxxxx	0.563	A	xxxxx	0.563	+ 0.000 V/C
#100 Red Hill Ave and Alton Pkwy	B	xxxxx	0.671	B	xxxxx	0.671	+ 0.000 V/C
#101 Red Hill Ave and MacArthur Blv	B	xxxxx	0.657	B	xxxxx	0.657	+ 0.000 V/C
#102 Red Hill Ave and Main St	C	xxxxx	0.774	C	xxxxx	0.774	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
#103 I-5 SB Ramps and Santa Ana Blv	B	18.9	0.431	B	18.9	0.431	+ 0.000 D/V
#104 Tustin Ranch Rd and Warner Ave	B	xxxxx	0.606	B	xxxxx	0.606	+ 0.000 V/C
#105 Von Karman Ave and Barranca Pk	D	xxxxx	0.874	D	xxxxx	0.874	+ 0.000 V/C
#106 Red Hill Avenue and El Camino	B	xxxxx	0.624	B	xxxxx	0.624	+ 0.000 V/C
#107 Red Hill Avenue and I-5 NB Ram	C	23.3	0.626	C	23.3	0.626	+ 0.000 D/V
#108 Red Hill Avenue and I-5 SB Ram	C	22.8	0.708	C	22.8	0.708	+ 0.000 D/V
#109 Red Hill Avenue and Nisson Roa	C	xxxxx	0.702	C	xxxxx	0.702	+ 0.000 V/C
#110 Red Hill Avenue and Walnut Ave	C	xxxxx	0.785	C	xxxxx	0.785	+ 0.000 V/C
#111 Red Hill Avenue and Valencia A	A	xxxxx	0.549	A	xxxxx	0.549	+ 0.000 V/C
#112 Tustin Ranch Road and Warner A	C	xxxxx	0.757	C	xxxxx	0.757	+ 0.000 V/C
#113 Tustin Ranch Road and Walnut A	F	xxxxx	1.630	F	xxxxx	1.630	+ 0.000 V/C
#114 SR-55 SB Ramps and Irvine Boul	C	21.5	0.794	C	21.5	0.794	+ 0.000 D/V
#115 SR-55 NB Ramps and Irvine Boul	B	19.5	0.809	B	19.5	0.809	+ 0.000 D/V

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:09                  Page 3-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #1 Euclid St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.865
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        70               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include        WideBypass       WideBypass
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     159 1477   119   185 1053   199   212  678   106   217  909   217
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  159 1477   119   185 1053   199   212  678   106   217  909   217
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   159 1477   119   185 1053   199   212  678   106   217  909   217
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  159 1477   119   185 1053   199   212  678   106   217  909   217
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  159 1477   119   185 1053   199   212  678   106   217  909   217
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.78  0.22  1.00 2.52  0.48  1.00 2.59  0.41  1.00 2.42  0.58
Final Sat.:  1600 4642   358  1600 4237   763  1600 4351   649  1600 4075   925
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.32  0.33  0.12 0.25  0.26  0.13 0.16  0.16  0.14 0.22  0.23
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:10                  Page 4-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #2 Euclid St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.833
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        60               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     175 1426    92   110 1354   164   183  419   185   127  532   246
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  175 1426    92   110 1354   164   183  419   185   127  532   246
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   175 1426    92   110 1354   164   183  419   185   127  532   246
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  175 1426    92   110 1354   164   183  419   185   127  532   246
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  175 1426    92   110 1354   164   183  419   185   127  532   246
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.82  0.18  1.00 2.68  0.32  1.00 1.39  0.61  1.00 1.37  0.63
Final Sat.:  1600 4709   291  1600 4481   519  1600 2320   980  1600 2288  1012
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.30  0.32  0.07 0.30  0.32  0.11 0.18  0.19  0.08 0.23  0.24
Crit Moves:  ****                ****  ****                      ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:11                  Page 5-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #3 Euclid St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.787
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        49               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  2  0  1    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     526 1572   112   122  803   204   161  622   186    91  840   136
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  526 1572   112   122  803   204   161  622   186    91  840   136
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   526 1572   112   122  803   204   161  622   186    91  840   136
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  526 1572   112   122  803   204   161  622   186    91  840   136
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  526 1572   112   122  803   204   161  622   186    91  840   136
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.80  0.20  2.00 2.39  0.61  1.00 2.00  1.00  1.00 2.00  1.00
Final Sat.:  3200 4681   319  3200 4028   972  1600 3400  1600  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.16 0.34  0.35  0.04 0.20  0.21  0.10 0.18  0.12  0.06 0.25  0.09
Crit Moves:             ****  ****            ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:12                  Page 6-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #4 Newhope St and Hazard Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.642
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        32               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     116 1281    50    49 1038   124   108  214   131    32  202    58
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  116 1281    50    49 1038   124   108  214   131    32  202    58
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   116 1281    50    49 1038   124   108  214   131    32  202    58
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  116 1281    50    49 1038   124   108  214   131    32  202    58
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  116 1281    50    49 1038   124   108  214   131    32  202    58
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       1.00 1.92  0.08  1.00 1.79  0.21  1.00 1.24  0.76  1.00 1.55  0.45
Final Sat.:  1600 3180   120  1600 2959   341  1600 2085  1215  1600 2586   714
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.40  0.42  0.03 0.35  0.36  0.07 0.10  0.11  0.02 0.08  0.08
Crit Moves:             ****  ****            ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:12                  Page 7-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #5 Newhope St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.838
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        61               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     202 1084   190   164  733   142    81  496    72   107  589   168
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  202 1084   190   164  733   142    81  496    72   107  589   168
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   202 1084   190   164  733   142    81  496    72   107  589   168
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  202 1084   190   164  733   142    81  496    72   107  589   168
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  202 1084   190   164  733   142    81  496    72   107  589   168
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.70  0.30  1.00 1.68  0.32  1.00 1.75  0.25  1.00 1.56  0.44
Final Sat.:  1600 2823   477  1600 2781   519  1600 2894   406  1600 2590   710
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.38  0.40  0.10 0.26  0.27  0.05 0.17  0.18  0.07 0.23  0.24
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:13                  Page 8-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #6 Harbor Blvd and SR-22 WB Off-Ramp / Banner Dr
******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.703
Loss Time (sec):       5                Average Delay (sec/veh):        23.6
Optimal Cycle:        39                Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  0    0  0  2  1  0    0  0  1! 0  0    1  1  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      88 1992     0     0 1519    49    93    0    78   593   80   170
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   88 1992     0     0 1519    49    93    0    78   593   80   170
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    88 1992     0     0 1519    49    93    0    78   593   80   170
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   88 1992     0     0 1519    49    93    0    78   593   80   170
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   88 1992     0     0 1519    49    93    0    78   593   80   170
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.91  0.91 1.00  0.91  0.96 0.96  0.85
Lanes:       1.00 3.00  0.00  0.00 2.91  0.09  0.54 0.00  0.46  1.76 0.24  1.00
Final Sat.:  1805 5187     0     0 5000   161   944    0   792  3208  433  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.38  0.00  0.00 0.30  0.30  0.10 0.00  0.10  0.18 0.18  0.11
Crit Moves:       ****        ****             ****             ****
Green/Cycle: 0.08 0.55  0.00  0.00 0.47  0.47  0.14 0.00  0.14  0.26 0.26  0.26
Volume/Cap:  0.64 0.70  0.00  0.00 0.64  0.64  0.70 0.00  0.70  0.70 0.70  0.40
Delay/Veh:   55.1 17.5   0.0   0.0 20.7  20.7  49.9  0.0  49.9  35.7 35.7  31.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  55.1 17.5   0.0   0.0 20.7  20.7  49.9  0.0  49.9  35.7 35.7  31.0
LOS by Move:    E    B     A     A    C     C     D    A     D     D    D     C
HCM2k85thQ:     6   25     0     0   21    21    10    0    10    16   16     7
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:14                  Page 9-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #7 Trask Avenue and SR-22 EB On-Ramp
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.448
Loss Time (sec):       5               Average Delay (sec/veh):        12.4
Optimal Cycle:        23               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    0  0  0  0  0    2  0  1  0  0    0  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0     0    0     0   838  628     0     0  606    57
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0     0    0     0   838  628     0     0  606    57
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0     0    0     0   838  628     0     0  606    57
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0     0    0     0   838  628     0     0  606    57
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0     0    0     0   838  628     0     0  606    57
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  0.92 1.00  1.00  1.00 0.94  0.94
Lanes:       0.00 0.00  0.00  0.00 0.00  0.00  2.00 1.00  0.00  0.00 1.83  0.17
Final Sat.:     0    0     0     0    0     0  3502 1900     0     0 3257   306
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.00 0.00  0.00  0.24 0.33  0.00  0.00 0.19  0.19
Crit Moves:                                     ****                   ****
Green/Cycle: 0.00 0.00  0.00  0.00 0.00  0.00  0.53 0.95  0.00  0.00 0.42  0.42
Volume/Cap:  0.00 0.00  0.00  0.00 0.00  0.00  0.45 0.35  0.00  0.00 0.45  0.45
Delay/Veh:    0.0  0.0   0.0   0.0  0.0   0.0  14.4  0.3   0.0   0.0 21.2  21.2
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0   0.0  0.0   0.0  14.4  0.3   0.0   0.0 21.2  21.2
LOS by Move:    A    A     A     A    A     A     B    A     A     A    C     C
HCM2k85thQ:     0    0     0     0    0     0    12    3     0     0   12    12
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:15                Page 10-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #8 Harbor Blvd and Westminster Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.792
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        50               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  2  1  0    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     276 1374   325   207 1430   165   187  667    32   230  797   181
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  276 1374   325   207 1430   165   187  667    32   230  797   181
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   276 1374   325   207 1430   165   187  667    32   230  797   181
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  276 1374   325   207 1430   165   187  667    32   230  797   181
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  276 1374   325   207 1430   165   187  667    32   230  797   181
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 2.86  0.14  1.00 3.00  1.00
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 4780   220  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.17 0.27  0.20  0.13 0.28  0.10  0.12 0.14  0.15  0.14 0.16  0.11
Crit Moves:  ****                ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:15                Page 11-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #9 Harbor Blvd and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.833
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        60               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     287 1480   164   278 1218   164   188  766   145   230 1073   175
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  287 1480   164   278 1218   164   188  766   145   230 1073   175
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   287 1480   164   278 1218   164   188  766   145   230 1073   175
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  287 1480   164   278 1218   164   188  766   145   230 1073   175
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  287 1480   164   278 1218   164   188  766   145   230 1073   175
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  2.00 2.52  0.48  2.00 2.58  0.42
Final Sat.:  1600 5100  1600  1600 5100  1600  3200 4236   764  3200 4327   673
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.18 0.29  0.10  0.17 0.24  0.10  0.06 0.18  0.19  0.07 0.25  0.26
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:16                Page 12-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #10 Harbor Blvd and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.809
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        54               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     167 1716   125   298 1273   115   214  520    65   211  506   146
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  167 1716   125   298 1273   115   214  520    65   211  506   146
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   167 1716   125   298 1273   115   214  520    65   211  506   146
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  167 1716   125   298 1273   115   214  520    65   211  506   146
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  167 1716   125   298 1273   115   214  520    65   211  506   146
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       2.00 3.00  1.00  2.00 2.75  0.25  1.00 1.78  0.22  1.00 1.55  0.45
Final Sat.:  3200 5100  1600  3200 4602   398  1600 2944   356  1600 2583   717
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.34  0.08  0.09 0.28  0.29  0.13 0.18  0.18  0.13 0.20  0.20
Crit Moves:       ****        ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:17                Page 13-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #11 Harbor Blvd and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.697
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        37               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     282 1773   214   283  822    75   134  564   100   140  813   271
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  282 1773   214   283  822    75   134  564   100   140  813   271
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   282 1773   214   283  822    75   134  564   100   140  813   271
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  282 1773   214   283  822    75   134  564   100   140  813   271
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  282 1773   214   283  822    75   134  564   100   140  813   271
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.55  0.45  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 4277   723  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.35  0.13  0.09 0.16  0.05  0.04 0.13  0.14  0.04 0.16  0.17
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:17                Page 14-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #12 Harbor Blvd and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.581
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     774 3713   279   274 1525   182   241 1707   390   260 2700   862
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  774 3713   279   274 1525   182   241 1707   390   260 2700   862
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   774 3713   279   274 1525   182   241 1707   390   260 2700   862
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  774 3713   279   274 1525   182   241 1707   390   260 2700   862
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  774 3713   279   274 1525   182   241 1707   390   260 2700   862
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.79  0.21  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 4665   335  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.24 0.80  0.83  0.09 0.30  0.11  0.08 0.33  0.24  0.08 0.53  0.54
Crit Moves:             ****  ****            ****                      ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:18                Page 15-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #13 Harbor Blvd and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.897
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        85               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     299 1881    60    91 1027    91   111  552   181    99 1074   390
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  299 1881    60    91 1027    91   111  552   181    99 1074   390
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   299 1881    60    91 1027    91   111  552   181    99 1074   390
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  299 1881    60    91 1027    91   111  552   181    99 1074   390
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  299 1881    60    91 1027    91   111  552   181    99 1074   390
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 2.91  0.09  1.00 2.76  0.24  1.00 1.51  0.49  1.00 2.00  1.00
Final Sat.:  3200 4852   148  1600 4609   391  1600 2510   790  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.39  0.40  0.06 0.22  0.23  0.07 0.22  0.23  0.06 0.32  0.24
Crit Moves:             ****  ****            ****                 ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:19                Page 16-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #14 MacArthur Blvd and Hyland Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.917
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        98               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  1  0    1  0  1  0  1    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:    1201    7    70    12    4    14    36  891   160    25 2350    12
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse: 1201    7    70    12    4    14    36  891   160    25 2350    12
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:  1201    7    70    12    4    14    36  891   160    25 2350    12
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol: 1201    7    70    12    4    14    36  891   160    25 2350    12
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume: 1201    7    70    12    4    14    36  891   160    25 2350    12
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 0.09  0.91  1.00 1.00  1.00  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200  145  1455  1600 1700  1600  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.38 0.05  0.05  0.01 0.00  0.01  0.02 0.17  0.10  0.02 0.46  0.01
Crit Moves:  ****                      ****  ****                    ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:19                Page 17-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #15 MacArthur Blvd and Harbor Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.819
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        56               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     588 1519    88   213 1073   176   140  489   181    87 1467   276
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  588 1519    88   213 1073   176   140  489   181    87 1467   276
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   588 1519    88   213 1073   176   140  489   181    87 1467   276
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  588 1519    88   213 1073   176   140  489   181    87 1467   276
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  588 1519    88   213 1073   176   140  489   181    87 1467   276
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.18 0.30  0.06  0.07 0.21  0.11  0.09 0.10  0.11  0.05 0.29  0.17
Crit Moves:  ****               ****        ****                   ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:20                Page 18-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #16 Harbor Blvd and Sunflower Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.780
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        48               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  1  1  0    1  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     178 1771   263   112 1393    42    67  182   189   254  533   199
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  178 1771   263   112 1393    42    67  182   189   254  533   199
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   178 1771   263   112 1393    42    67  182   189   254  533   199
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  178 1771   263   112 1393    42    67  182   189   254  533   199
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  178 1771   263   112 1393    42    67  182   189   254  533   199
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 1.00  1.00  1.00 1.39  0.61
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 1700  1600  1600 2322   974
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.35  0.16  0.04 0.27  0.03  0.04 0.11  0.12  0.16 0.23  0.20
Crit Moves:       ****        ****                     ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:21                Page 19-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #17 Harbor Blvd and I-405 WB Off-Ramp
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.812
Loss Time (sec):       5               Average Delay (sec/veh):        22.9
Optimal Cycle:        57               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  0    0  0  4  0  0    0  0  0  0  0    1  0  1! 0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1529     0     0 2475     0     0    0     0   701    0  1132
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1529     0     0 2475     0     0    0     0   701    0  1132
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1529     0     0 2475     0     0    0     0   701    0  1132
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1529     0     0 2475     0     0    0     0   701    0  1132
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1529     0     0 2475     0     0    0     0   701    0  1132
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  1.00  1.00 0.91  1.00  1.00 1.00  1.00  0.89 1.00  0.89
Lanes:       0.00 4.00  0.00  0.00 4.00  0.00  0.00 0.00  0.00  1.38 0.00  1.62
Final Sat.:     0 6916     0     0 6916     0     0    0     0  2337    0  2735
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.22  0.00  0.00 0.36  0.00  0.00 0.00  0.00  0.30 0.00  0.41
Crit Moves:  ****                 ****                                     ****
Green/Cycle: 0.00 0.44  0.00  0.00 0.44  0.00  0.00 0.00  0.00  0.51 0.00  0.51
Volume/Cap:  0.00 0.50  0.00  0.00 0.81  0.00  0.00 0.00  0.00  0.59 0.00  0.81
Delay/Veh:    0.0 20.2   0.0   0.0 26.1   0.0   0.0  0.0   0.0  17.5  0.0  22.9
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 20.2   0.0   0.0 26.1   0.0   0.0  0.0   0.0  17.5  0.0  22.9
LOS by Move:    A    C     A     A    C     A     A    A     A     B    A     C
HCM2k85thQ:     0   14     0     0   29     0     0    0     0    17    0    29
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:22                Page 20-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #18 Harbor Blvd and I-405 EB Off-Ramp
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.630
Loss Time (sec):       5               Average Delay (sec/veh):        16.2
Optimal Cycle:        32               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Ignore           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  3  0  1    0  0  4  0  0    1  0  1! 0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1861     0     0 2147     0   157    0   722     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1861     0     0 2147     0   157    0   722     0    0     0
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1861     0     0 2147     0   157    0   722     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1861     0     0 2147     0   157    0   722     0    0     0
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1861     0     0 2147     0   157    0   722     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  1.00  1.00 0.91  1.00  0.87 1.00  0.87  1.00 1.00  1.00
Lanes:       0.00 3.00  1.00  0.00 4.00  0.00  1.18 0.00  1.82  0.00 0.00  0.00
Final Sat.:     0 5187  1900     0 6916     0  1946    0  3008     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.36  0.00  0.00 0.31  0.00  0.08 0.00  0.24  0.00 0.00  0.00
Crit Moves:       ****        ****                     ****
Green/Cycle: 0.00 0.57  0.00  0.00 0.57  0.00  0.38 0.00  0.38  0.00 0.00  0.00
Volume/Cap:  0.00 0.63  0.00  0.00 0.55  0.00  0.21 0.00  0.63  0.00 0.00  0.00
Delay/Veh:    0.0 14.9   0.0   0.0 13.6   0.0  20.9  0.0  26.2   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 14.9   0.0   0.0 13.6   0.0  20.9  0.0  26.2   0.0  0.0   0.0
LOS by Move:    A    B     A     A    B     A     C    A     C     A    A     A
HCM2k85thQ:     0   21     0     0   17     0     4    0    16     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #19 Fairview St and Civic Center Dr

Cycle (sec):	100	Critical Vol./Cap.(X):	0.662
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	34	Level Of Service:	B

Approach:	North Bound				South Bound				East Bound				West Bound			
Movement:	L	-	T	- R	L	-	T	- R	L	-	T	- R	L	-	T	- R
Control:	Protected				Protected				Split Phase				Split Phase			
Rights:	WideBypass				Include				Include				Include			
Min. Green:	0	0	0		0	0	0		0	0	0		0	0	0	
Y+R:	4.0	4.0	4.0		4.0	4.0	4.0		4.0	4.0	4.0		4.0	4.0	4.0	
Lanes:	1	0	2	1 0	1	0	2	1 0	0	1	0	1 0	1	1	0	0 1
Volume Module:																
Base Vol:	5	1430	402		144	1338	0		2	5	4		438	0	162	
Growth Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
Initial Bse:	5	1430	402		144	1338	0		2	5	4		438	0	162	
User Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
PHF Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
PHF Volume:	5	1430	402		144	1338	0		2	5	4		438	0	162	
Reduct Vol:	0	0	0		0	0	0		0	0	0		0	0	0	
Reduced Vol:	5	1430	402		144	1338	0		2	5	4		438	0	162	
PCE Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
MLF Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
FinalVolume:	5	1430	402		144	1338	0		2	5	4		438	0	162	
Saturation Flow Module:																
Sat/Lane:	1600	1600	1600		1600	1600	1600		1600	1600	1600		1600	1600	1600	
Adjustment:	1.00	1.05	1.00		1.00	1.04	1.00		1.00	1.00	1.00		1.00	1.06	1.00	
Lanes:	1.00	2.34	0.66		1.00	3.00	0.00		0.36	0.91	0.73		2.00	0.00	1.00	
Final Sat.:	1600	3947	1053		1600	5000	0		582	1455	1164		3200	0	1600	
Capacity Analysis Module:																
Vol/Sat:	0.00	0.36	0.38		0.09	0.27	0.00		0.00	0.00	0.00		0.14	0.00	0.10	
Crit Moves:			****		****					****			****			

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:23                Page 22-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #20 Fairview St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.883
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        78               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include        WideBypass         Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     149 1094    99   203 1264   251   215  870   151   159 1204   186
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  149 1094    99   203 1264   251   215  870   151   159 1204   186
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   149 1094    99   203 1264   251   215  870   151   159 1204   186
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  149 1094    99   203 1264   251   215  870   151   159 1204   186
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  149 1094    99   203 1264   251   215  870   151   159 1204   186
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 3.00  1.00  1.00 2.50  0.50  1.00 2.56  0.44  1.00 2.60  0.40
Final Sat.:  1600 5100  1600  1600 4205   795  1600 4290   710  1600 4358   642
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.21  0.06  0.13 0.30  0.32  0.13 0.20  0.21  0.10 0.28  0.29
Crit Moves:  ****                     ****  ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:24                Page 23-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #21 Fairview St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.798
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        52               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     159 1462   127   155 1257   196   244  659   163   158  545   134
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  159 1462   127   155 1257   196   244  659   163   158  545   134
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   159 1462   127   155 1257   196   244  659   163   158  545   134
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  159 1462   127   155 1257   196   244  659   163   158  545   134
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  159 1462   127   155 1257   196   244  659   163   158  545   134
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 1.60  0.40  1.00 1.61  0.39
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 2665   635  1600 2668   632
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.29  0.08  0.10 0.25  0.12  0.15 0.25  0.26  0.10 0.20  0.21
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:25                Page 24-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #22 Fairview St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.811
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        54               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     188 1793   110   198  616   151   230  703   188   373  789   173
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  188 1793   110   198  616   151   230  703   188   373  789   173
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   188 1793   110   198  616   151   230  703   188   373  789   173
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  188 1793   110   198  616   151   230  703   188   373  789   173
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  188 1793   110   198  616   151   230  703   188   373  789   173
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 2.83  0.17  2.00 2.41  0.59  2.00 2.37  0.63  2.00 2.46  0.54
Final Sat.:  3200 4723   277  3200 4055   945  3200 3987  1013  3200 4137   863
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.38  0.40  0.06 0.15  0.16  0.07 0.18  0.19  0.12 0.19  0.20
Crit Moves:             ****  ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:25                Page 25-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #23 Fairview St and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.845
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        63               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     217 1728   161   188  951    96   197  955   148   188 1108   240
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  217 1728   161   188  951    96   197  955   148   188 1108   240
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   217 1728   161   188  951    96   197  955   148   188 1108   240
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  217 1728   161   188  951    96   197  955   148   188 1108   240
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  217 1728   161   188  951    96   197  955   148   188 1108   240
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 2.74  0.26  2.00 2.72  0.28  2.00 2.60  0.40  2.00 2.47  0.53
Final Sat.:  3200 4591   409  3200 4560   440  3200 4356   644  3200 4145   855
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.38  0.39  0.06 0.21  0.22  0.06 0.22  0.23  0.06 0.27  0.28
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:26                Page 26-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #24 Fairview St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.826
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        58               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     243 1672    91   171  955    88   280  731   246   179 1365   239
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  243 1672    91   171  955    88   280  731   246   179 1365   239
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   243 1672    91   171  955    88   280  731   246   179 1365   239
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  243 1672    91   171  955    88   280  731   246   179 1365   239
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  243 1672    91   171  955    88   280  731   246   179 1365   239
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.85  0.15  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 4752   248  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.35  0.37  0.05 0.19  0.06  0.09 0.14  0.15  0.06 0.27  0.15
Crit Moves:             ****  ****            ****                 ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:26                Page 27-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #25 Fairview Rd and Sunflower Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.708
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  1  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     201 1806   393   144 1196    83   203  430    95   265  664   173
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  201 1806   393   144 1196    83   203  430    95   265  664   173
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   201 1806   393   144 1196    83   203  430    95   265  664   173
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  201 1806   393   144 1196    83   203  430    95   265  664   173
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  201 1806   393   144 1196    83   203  430    95   265  664   173
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.81  0.19  2.00 1.64  0.36  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 4689   311  3200 2721   579  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.35  0.25  0.05 0.26  0.27  0.06 0.16  0.16  0.08 0.20  0.11
Crit Moves:       ****        ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:27                Page 28-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #26 Greenville St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.586
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        28               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    0  0  0  0  0    0  0  2  1  0    1  0  2  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     327    0   218     0    0     0     0  982   200    95 1128     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  327    0   218     0    0     0     0  982   200    95 1128     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   327    0   218     0    0     0     0  982   200    95 1128     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  327    0   218     0    0     0     0  982   200    95 1128     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  327    0   218     0    0     0     0  982   200    95 1128     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 0.00  1.00  0.00 0.00  0.00  0.00 2.49  0.51  1.00 2.00  0.00
Final Sat.:  1600    0  1600     0    0     0     0 4188   812  1600 3400     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.20 0.00  0.14  0.00 0.00  0.00  0.00 0.23  0.25  0.06 0.33  0.00
Crit Moves:  ****                              ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:28                Page 29-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #27 Greenville St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.686
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include        WideBypass       WideBypass
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  0  1    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      57  476    36    61  200    61   108  823    47    27 1037   148
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   57  476    36    61  200    61   108  823    47    27 1037   148
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    57  476    36    61  200    61   108  823    47    27 1037   148
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   57  476    36    61  200    61   108  823    47    27 1037   148
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   57  476    36    61  200    61   108  823    47    27 1037   148
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.04  1.00
Lanes:       1.00 1.86  0.14  1.00 1.00  1.00  1.00 1.89  0.11  1.00 1.75  0.25
Final Sat.:  1600 3075   225  1600 1700  1600  1600 3127   173  1600 2900   400
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.15  0.16  0.04 0.12  0.04  0.07 0.26  0.27  0.02 0.36  0.37
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:28                Page 30-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #28 Raitt St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.722
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        40               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      58  835   130    45  474    76   126  747    65    88  742   102
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   58  835   130    45  474    76   126  747    65    88  742   102
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    58  835   130    45  474    76   126  747    65    88  742   102
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   58  835   130    45  474    76   126  747    65    88  742   102
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   58  835   130    45  474    76   126  747    65    88  742   102
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.03  1.00  1.00 1.04  1.00
Lanes:       1.00 1.73  0.27  1.00 1.72  0.28  1.00 1.84  0.16  1.00 1.76  0.24
Final Sat.:  1600 2869   431  1600 2858   442  1600 3044   256  1600 2913   387
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.29  0.30  0.03 0.17  0.17  0.08 0.25  0.25  0.06 0.25  0.26
Crit Moves:             ****  ****            ****                      ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:29                Page 31-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #29 Raitt St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.864
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        70               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include        WideBypass         Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     190  816   229   111  384    96   139  961   137    86  972    87
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  190  816   229   111  384    96   139  961   137    86  972    87
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   190  816   229   111  384    96   139  961   137    86  972    87
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  190  816   229   111  384    96   139  961   137    86  972    87
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  190  816   229   111  384    96   139  961   137    86  972    87
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.03  1.00
Lanes:       1.00 1.56  0.44  1.00 1.60  0.40  1.00 1.75  0.25  1.00 1.84  0.16
Final Sat.:  1600 2599   701  1600 2660   640  1600 2901   399  1600 3037   263
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.31  0.33  0.07 0.14  0.15  0.09 0.33  0.34  0.05 0.32  0.33
Crit Moves:             ****  ****            ****                    ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:29                Page 32-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #30 Bear St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.868
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        71               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  2  0  1    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     200  962   251   112  271    82    97  910    94    93 1673   266
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  200  962   251   112  271    82    97  910    94    93 1673   266
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   200  962   251   112  271    82    97  910    94    93 1673   266
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  200  962   251   112  271    82    97  910    94    93 1673   266
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  200  962   251   112  271    82    97  910    94    93 1673   266
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.00  1.00  1.00 2.00  1.00  1.00 2.72  0.28  1.00 2.59  0.41
Final Sat.:  1600 3400  1600  1600 3400  1600  1600 4551   449  1600 4342   658
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.28  0.16  0.07 0.08  0.05  0.06 0.20  0.21  0.06 0.39  0.40
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:30                Page 33-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #31 Bristol St and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.692
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     236 1148   191   243 1293   220   336  750   136   284 1069   362
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  236 1148   191   243 1293   220   336  750   136   284 1069   362
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   236 1148   191   243 1293   220   336  750   136   284 1069   362
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  236 1148   191   243 1293   220   336  750   136   284 1069   362
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  236 1148   191   243 1293   220   336  750   136   284 1069   362
OvlAdjVol:                                                                 241
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.54  0.46  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 4263   737  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.23  0.12  0.08 0.25  0.14  0.11 0.18  0.18  0.09 0.21  0.23
OvlAdjV/S:                                                                 0.15
Crit Moves:  ****                 ****        ****                 ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:31                Page 34-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #32 Bristol St and Civic Center Dr
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.832
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        60               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     200 1399    73   136 1250   128   190  534    63   169  723    82
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  200 1399    73   136 1250   128   190  534    63   169  723    82
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   200 1399    73   136 1250   128   190  534    63   169  723    82
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  200 1399    73   136 1250   128   190  534    63   169  723    82
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  200 1399    73   136 1250   128   190  534    63   169  723    82
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.03  1.00  1.00 1.03  1.00
Lanes:       1.00 2.85  0.15  1.00 2.72  0.28  1.00 1.79  0.21  1.00 1.80  0.20
Final Sat.:  1600 4762   238  1600 4554   446  1600 2962   338  1600 2974   326
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.29  0.31  0.09 0.27  0.29  0.12 0.18  0.19  0.11 0.24  0.25
Crit Moves:  ****                     ****  ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:31                Page 35-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #33 Bristol St and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.657
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        33               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      75 1524    87   105 1402    53    59  163    38   233  371   100
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   75 1524    87   105 1402    53    59  163    38   233  371   100
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    75 1524    87   105 1402    53    59  163    38   233  371   100
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   75 1524    87   105 1402    53    59  163    38   233  371   100
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   75 1524    87   105 1402    53    59  163    38   233  371   100
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 2.84  0.16  1.00 2.89  0.11  1.00 1.62  0.38  1.00 1.58  0.42
Final Sat.:  1600 4741   259  1600 4825   175  1600 2695   605  1600 2621   679
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.32  0.34  0.07 0.29  0.30  0.04 0.06  0.06  0.15 0.14  0.15
Crit Moves:             ****  ****                 ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:32                Page 36-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #34 Bristol St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.779
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        48               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     286 1235   182   206 1115   252   189 1062   136   217 1330   126
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  286 1235   182   206 1115   252   189 1062   136   217 1330   126
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   286 1235   182   206 1115   252   189 1062   136   217 1330   126
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  286 1235   182   206 1115   252   189 1062   136   217 1330   126
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  286 1235   182   206 1115   252   189 1062   136   217 1330   126
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 2.66  0.34  1.00 2.74  0.26
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 4455   545  1600 4585   415
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.24  0.11  0.06 0.22  0.16  0.12 0.24  0.25  0.14 0.29  0.30
Crit Moves:  ****                ****        ****                        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:33                Page 37-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #35 Bristol St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.752
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        44               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     213 1566    85    84 1171   270   262  512   102    97  504    59
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  213 1566    85    84 1171   270   262  512   102    97  504    59
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   213 1566    85    84 1171   270   262  512   102    97  504    59
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  213 1566    85    84 1171   270   262  512   102    97  504    59
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  213 1566    85    84 1171   270   262  512   102    97  504    59
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.03  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 1.67  0.33  1.00 1.79  0.21
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 2768   532  1600 2965   335
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.31  0.05  0.05 0.23  0.17  0.16 0.18  0.19  0.06 0.17  0.18
Crit Moves:  ****               ****        ****                        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:33                Page 38-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #36 Bristol St and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.790
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        50               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  1  0    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     309 1157   211   251  838   163   193  868   153   173 1021   299
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  309 1157   211   251  838   163   193  868   153   173 1021   299
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   309 1157   211   251  838   163   193  868   153   173 1021   299
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  309 1157   211   251  838   163   193  868   153   173 1021   299
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  309 1157   211   251  838   163   193  868   153   173 1021   299
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.00  1.00  2.00 2.51  0.49  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200 3400  1600  3200 4218   782  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.34  0.13  0.08 0.20  0.21  0.12 0.17  0.10  0.11 0.20  0.19
Crit Moves:       ****        ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:34                Page 39-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #37 Bristol St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.909
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        92               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     179 1322   233    92  843   176   200  716    57   119 1074    54
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  179 1322   233    92  843   176   200  716    57   119 1074    54
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   179 1322   233    92  843   176   200  716    57   119 1074    54
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  179 1322   233    92  843   176   200  716    57   119 1074    54
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  179 1322   233    92  843   176   200  716    57   119 1074    54
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.03  1.00  1.00 1.03  1.00
Lanes:       1.00 2.55  0.45  1.00 2.48  0.52  1.00 1.85  0.15  1.00 1.90  0.10
Final Sat.:  1600 4281   719  1600 4171   829  1600 3064   236  1600 3147   153
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.31  0.32  0.06 0.20  0.21  0.13 0.23  0.24  0.07 0.34  0.35
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:35                Page 40-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #38 Bristol St and Alton Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.686
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:         WideBypass         Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  3  0  1    1  0  1  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      43 1681   158   119  896    56    75  105   195    91  150    29
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   43 1681   158   119  896    56    75  105   195    91  150    29
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    43 1681   158   119  896    56    75  105   195    91  150    29
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   43 1681   158   119  896    56    75  105   195    91  150    29
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   43 1681   158   119  896    56    75  105   195    91  150    29
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       1.00 2.74  0.26  1.00 3.00  1.00  1.00 1.00  1.00  1.00 0.84  0.16
Final Sat.:  1600 4588   412  1600 5100  1600  1600 1700  1600  1600 1341   259
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.37  0.38  0.07 0.18  0.04  0.05 0.06  0.12  0.06 0.11  0.11
Crit Moves:             ****  ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:36                Page 41-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #39 Bristol St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.812
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        55               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     335 1428   260   223  821   129   357  796   169   265 1536   290
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  335 1428   260   223  821   129   357  796   169   265 1536   290
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   335 1428   260   223  821   129   357  796   169   265 1536   290
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  335 1428   260   223  821   129   357  796   169   265 1536   290
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  335 1428   260   223  821   129   357  796   169   265 1536   290
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.59  0.41  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 4348   652  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.28  0.16  0.07 0.19  0.20  0.11 0.16  0.11  0.08 0.30  0.18
Crit Moves:       ****        ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:37                Page 42-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #40 Bristol St and Sunflower Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.689
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  1    2  0  3  0  1    2  0  2  1  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     645 1363   220   201  750   215   293  573   222   263 1012   322
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  645 1363   220   201  750   215   293  573   222   263 1012   322
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   645 1363   220   201  750   215   293  573   222   263 1012   322
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  645 1363   220   201  750   215   293  573   222   263 1012   322
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  645 1363   220   201  750   215   293  573   222   263 1012   322
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.88  1.12  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 4813  1787  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.20 0.27  0.14  0.06 0.15  0.13  0.09 0.12  0.12  0.08 0.20  0.20
Crit Moves:  ****               ****        ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:37                Page 43-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #41 Bristol St and I-405 WB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.829
Loss Time (sec):       5               Average Delay (sec/veh):        28.2
Optimal Cycle:        61               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Ignore           Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  1    0  0  4  1  0    0  0  0  0  2    1  1  1  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 2094   183     0 2148    20     0    0   194   357  306  1184
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 2094   183     0 2148    20     0    0   194   357  306  1184
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 2094     0     0 2148    20     0    0   194   357  306  1184
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 2094     0     0 2148    20     0    0   194   357  306  1184
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 2094     0     0 2148    20     0    0   194   357  306  1184
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  1.00  1.00 0.91  0.91  1.00 1.00  0.75  0.93 0.93  0.75
Lanes:       0.00 4.00  1.00  0.00 4.95  0.05  0.00 0.00  2.00  1.62 1.38  2.00
Final Sat.:     0 6916  1900     0 8557    80     0    0  2842  2840 2434  2842
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.30  0.00  0.00 0.25  0.25  0.00 0.00  0.07  0.13 0.13  0.42
Crit Moves:       ****        ****                         ****            ****
Green/Cycle: 0.00 0.37  0.00  0.00 0.37  0.37  0.00 0.00  0.08  0.50 0.50  0.50
Volume/Cap:  0.00 0.83  0.00  0.00 0.69  0.69  0.00 0.00  0.83  0.25 0.25  0.83
Delay/Veh:    0.0 31.3   0.0   0.0 27.5  27.5   0.0  0.0  66.4  14.2 14.2  25.4
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 31.3   0.0   0.0 27.5  27.5   0.0  0.0  66.4  14.2 14.2  25.4
LOS by Move:    A    C     A     A    C     C     A    A     E     B    B     C
HCM2k85thQ:     0   27     0     0   20    20     0    0     9     6    6    29
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:38                Page 44-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #42 Bristol St and I-405 EB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.595
Loss Time (sec):       5               Average Delay (sec/veh):        18.4
Optimal Cycle:        30               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Ignore           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  4  0  0    0  0  2  1  1    3  0  0  0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     127 1555     0     0 1506   880   740    0   331     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  127 1555     0     0 1506   880   740    0   331     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   127 1555     0     0 1506     0   740    0   331     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  127 1555     0     0 1506     0   740    0   331     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  127 1555     0     0 1506     0   740    0   331     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.91  0.92 1.00  0.85  1.00 1.00  1.00
Lanes:       1.00 4.00  0.00  0.00 3.00  1.00  3.00 0.00  1.00  0.00 0.00  0.00
Final Sat.:  1805 6916     0     0 5187  1729  5253    0  1615     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.22  0.00  0.00 0.29  0.00  0.14 0.00  0.20  0.00 0.00  0.00
Crit Moves:  ****                 ****                    ****
Green/Cycle: 0.12 0.61  0.00  0.00 0.49  0.00  0.34 0.00  0.34  0.00 0.00  0.00
Volume/Cap:  0.60 0.37  0.00  0.00 0.60  0.00  0.41 0.00  0.60  0.00 0.00  0.00
Delay/Veh:   46.3 10.1   0.0   0.0 18.9   0.0  25.2  0.0  28.8   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  46.3 10.1   0.0   0.0 18.9   0.0  25.2  0.0  28.8   0.0  0.0   0.0
LOS by Move:    D    B     A     A    B     A     C    A     C     A    A     A
HCM2k85thQ:     7   10     0     0   19     0     9    0    14     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:39                Page 45-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #43 Flower St and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.571
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        27               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit      Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  2  0  1    1  0  3  0  1    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     124  754    62   104  530    48   134  386    63   146  510   151
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  124  754    62   104  530    48   134  386    63   146  510   151
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   124  754    62   104  530    48   134  386    63   146  510   151
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  124  754    62   104  530    48   134  386    63   146  510   151
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  124  754    62   104  530    48   134  386    63   146  510   151
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.00  1.00  1.00 2.00  1.00  1.00 3.00  1.00  1.00 2.00  1.00
Final Sat.:  1600 3400  1600  1600 3400  1600  1600 5100  1600  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.22  0.04  0.07 0.16  0.03  0.08 0.08  0.04  0.09 0.15  0.09
Crit Moves:       ****        ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:40                Page 46-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #44 Flower St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.752
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        44               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     132  625   149   170  466   135   139 1217   101   210 1415   147
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  132  625   149   170  466   135   139 1217   101   210 1415   147
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   132  625   149   170  466   135   139 1217   101   210 1415   147
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  132  625   149   170  466   135   139 1217   101   210 1415   147
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  132  625   149   170  466   135   139 1217   101   210 1415   147
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.00  1.00  1.00 1.55  0.45  1.00 2.77  0.23  1.00 2.72  0.28
Final Sat.:  1600 3400  1600  1600 2581   719  1600 4632   368  1600 4548   452
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.18  0.09  0.11 0.18  0.19  0.09 0.26  0.27  0.13 0.31  0.33
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:40                Page 47-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #45 Flower St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.920
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       100               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      42  567    35    46  352    57    64  478    19    48  595    85
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   42  567    35    46  352    57    64  478    19    48  595    85
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    42  567    35    46  352    57    64  478    19    48  595    85
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   42  567    35    46  352    57    64  478    19    48  595    85
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   42  567    35    46  352    57    64  478    19    48  595    85
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 0.94  0.06  1.00 0.86  0.14  1.00 0.96  0.04  1.00 0.88  0.12
Final Sat.:  1600 1507    93  1600 1377   223  1600 1539    61  1600 1400   200
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.38  0.38  0.03 0.26  0.26  0.04 0.31  0.31  0.03 0.43  0.43
Crit Moves:        ****        ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:41                Page 48-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #46 Flower St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.897
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        85               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     120  843    80    66  369   106   158  786    83    75 1258    81
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  120  843    80    66  369   106   158  786    83    75 1258    81
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   120  843    80    66  369   106   158  786    83    75 1258    81
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  120  843    80    66  369   106   158  786    83    75 1258    81
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  120  843    80    66  369   106   158  786    83    75 1258    81
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.03  1.00  1.00 1.03  1.00
Lanes:       1.00 1.83  0.17  1.00 1.55  0.45  1.00 1.81  0.19  1.00 1.88  0.12
Final Sat.:  1600 3023   277  1600 2586   714  1600 2994   306  1600 3106   194
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.28  0.29  0.04 0.14  0.15  0.10 0.26  0.27  0.05 0.40  0.42
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:41                Page 49-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #47 Flower St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.906
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        90               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     133  634    74    85  205   197   209  994    63    62 1989   177
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  133  634    74    85  205   197   209  994    63    62 1989   177
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   133  634    74    85  205   197   209  994    63    62 1989   177
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  133  634    74    85  205   197   209  994    63    62 1989   177
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  133  634    74    85  205   197   209  994    63    62 1989   177
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 1.79  0.21  1.00 1.02  0.98  1.00 2.82  0.18  1.00 2.75  0.25
Final Sat.:  1600 2966   334  1600 1732  1568  1600 4714   286  1600 4608   392
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.21  0.22  0.05 0.12  0.13  0.13 0.21  0.22  0.04 0.43  0.45
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:42                Page 50-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #48 Main St and La Veta Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.628
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        31               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  2  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     307  938   439   145  911   235   296  422   189   257  513   206
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  307  938   439   145  911   235   296  422   189   257  513   206
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   307  938   439   145  911   235   296  422   189   257  513   206
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  307  938   439   145  911   235   296  422   189   257  513   206
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  307  938   439   145  911   235   296  422   189   257  513   206
OvlAdjVol:                310                                              134
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.38  0.62  2.00 2.07  0.93  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 4016   984  3200 3515  1485  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.18  0.27  0.05 0.23  0.24  0.09 0.12  0.13  0.08 0.15  0.13
OvlAdjV/S:                0.19                                              0.08
Crit Moves:  ****                        ****  ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:42                Page 51-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #49 Main St and Mainplace Dr / Memory Ln
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.471
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        22               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      90  945   179    51 1055   139   293  325    87   185  151    73
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   90  945   179    51 1055   139   293  325    87   185  151    73
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    90  945   179    51 1055   139   293  325    87   185  151    73
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   90  945   179    51 1055   139   293  325    87   185  151    73
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   90  945   179    51 1055   139   293  325    87   185  151    73
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 2.52  0.48  2.00 2.65  0.35  2.00 2.37  0.63  2.00 2.00  1.00
Final Sat.:  3200 4236   764  3200 4441   559  3200 3986  1014  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.22  0.23  0.02 0.24  0.25  0.09 0.08  0.09  0.06 0.04  0.05
Crit Moves:  ****                ****             ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:43                Page 52-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #50 Main St and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.732
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        41               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  1  1  0    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     197 1019   222   173  757   117   221 1237    73   178 1089    72
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  197 1019   222   173  757   117   221 1237    73   178 1089    72
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   197 1019   222   173  757   117   221 1237    73   178 1089    72
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  197 1019   222   173  757   117   221 1237    73   178 1089    72
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  197 1019   222   173  757   117   221 1237    73   178 1089    72
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       2.00 2.00  1.00  2.00 1.73  0.27  2.00 2.83  0.17  2.00 2.81  0.19
Final Sat.:  3200 3400  1600  3200 2872   428  3200 4733   267  3200 4702   298
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.30  0.14  0.05 0.26  0.27  0.07 0.26  0.27  0.06 0.23  0.24
Crit Moves:       ****        ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:43                Page 53-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #51 Main St and Civic Center Dr
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.801
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        52               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      89 1126    94    61  995    63   159  881   105    38  384    39
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   89 1126    94    61  995    63   159  881   105    38  384    39
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    89 1126    94    61  995    63   159  881   105    38  384    39
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   89 1126    94    61  995    63   159  881   105    38  384    39
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   89 1126    94    61  995    63   159  881   105    38  384    39
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.03  1.00
Lanes:       1.00 1.85  0.15  1.00 1.88  0.12  1.00 1.79  0.21  1.00 1.82  0.18
Final Sat.:  1600 3053   247  1600 3109   191  1600 2959   341  1600 3005   295
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.37  0.38  0.04 0.32  0.33  0.10 0.30  0.31  0.02 0.13  0.13
Crit Moves:             ****  ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:44                Page 54-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #52 Main St and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.607
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        29               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  0    0  0  1  1  0    0  0  0  0  0    0  1  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      54 1229     0     0 1083    53     0    0     0    65  656    85
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   54 1229     0     0 1083    53     0    0     0    65  656    85
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    54 1229     0     0 1083    53     0    0     0    65  656    85
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   54 1229     0     0 1083    53     0    0     0    65  656    85
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   54 1229     0     0 1083    53     0    0     0    65  656    85
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.03  1.00
Lanes:       1.00 2.00  0.00  0.00 1.91  0.09  0.00 0.00  0.00  0.24 2.44  0.32
Final Sat.:  1600 3400     0     0 3151   149     0    0     0   387 4007   506
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.36  0.00  0.00 0.34  0.36  0.00 0.00  0.00  0.04 0.16  0.17
Crit Moves:  ****                     ****                                 ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:44                Page 55-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #53 Main St and 4th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.537
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        25               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  1  1  0    0  0  1  1  0    0  0  0  1  0    0  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1055    50     0 1037    47     0   98    55     0  181    46
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1055    50     0 1037    47     0   98    55     0  181    46
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1055    50     0 1037    47     0   98    55     0  181    46
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1055    50     0 1037    47     0   98    55     0  181    46
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1055    50     0 1037    47     0   98    55     0  181    46
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       0.00 1.91  0.09  0.00 1.91  0.09  0.00 0.64  0.36  0.00 0.80  0.20
Final Sat.:     0 3155   145     0 3161   139     0 1025   575     0 1276   324
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.33  0.35  0.00 0.33  0.34  0.00 0.10  0.10  0.00 0.14  0.14
Crit Moves:             ****  ****            ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:45                Page 56-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #54 Main St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.799
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        52               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  2  0  1    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     169  826    72   175  671   143   120 1214    90   114 1275    89
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  169  826    72   175  671   143   120 1214    90   114 1275    89
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   169  826    72   175  671   143   120 1214    90   114 1275    89
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  169  826    72   175  671   143   120 1214    90   114 1275    89
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  169  826    72   175  671   143   120 1214    90   114 1275    89
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.84  0.16  1.00 2.00  1.00  1.00 2.79  0.21  1.00 2.80  0.20
Final Sat.:  1600 3043   257  1600 3400  1600  1600 4669   331  1600 4687   313
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.27  0.28  0.11 0.20  0.09  0.08 0.26  0.27  0.07 0.27  0.28
Crit Moves:             ****  ****            ****                      ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:45                Page 57-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #55 Main St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.845
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        64               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  0  1  0    1  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     146 1147    71   134  908    66    78  345    42    85  480   216
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  146 1147    71   134  908    66    78  345    42    85  480   216
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   146 1147    71   134  908    66    78  345    42    85  480   216
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  146 1147    71   134  908    66    78  345    42    85  480   216
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  146 1147    71   134  908    66    78  345    42    85  480   216
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.00  1.00  1.00 1.06  1.00
Lanes:       1.00 1.88  0.12  1.00 1.86  0.14  1.00 0.89  0.11  1.00 1.00  1.00
Final Sat.:  1600 3113   187  1600 3083   217  1600 1426   174  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.37  0.38  0.08 0.29  0.30  0.05 0.24  0.24  0.05 0.28  0.14
Crit Moves:             ****  ****            ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:45                Page 58-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #56 Main St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.847
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        64               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  2  0  1    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      99 1050    48   122  609    83   127  752    84    97 1296   134
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   99 1050    48   122  609    83   127  752    84    97 1296   134
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    99 1050    48   122  609    83   127  752    84    97 1296   134
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   99 1050    48   122  609    83   127  752    84    97 1296   134
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   99 1050    48   122  609    83   127  752    84    97 1296   134
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.05  1.00
Lanes:       1.00 1.91  0.09  1.00 1.76  0.24  1.00 2.00  1.00  1.00 2.72  0.28
Final Sat.:  1600 3160   140  1600 2916   384  1600 3400  1600  1600 4550   450
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.33  0.34  0.08 0.21  0.22  0.08 0.22  0.05  0.06 0.28  0.30
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:46                Page 59-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #57 Main St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.777
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        48               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     488 1169   321   283  368   278   298  613    59   198 1570   456
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  488 1169   321   283  368   278   298  613    59   198 1570   456
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   488 1169   321   283  368   278   298  613    59   198 1570   456
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  488 1169   321   283  368   278   298  613    59   198 1570   456
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  488 1169   321   283  368   278   298  613    59   198 1570   456
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.23  0.20  0.09 0.07  0.17  0.09 0.12  0.04  0.06 0.31  0.28
Crit Moves:  ****                     ****  ****                    ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:46                Page 60-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #58 Penn Wy and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.770
Loss Time (sec):       5               Average Delay (sec/veh):        20.7
Optimal Cycle:        48               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  0  2    0  0  0  0  0    0  0  2  1  0    1  0  3  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     848    0   414     0    0     0     0 1590   513   123 1440     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  848    0   414     0    0     0     0 1590   513   123 1440     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   848    0   414     0    0     0     0 1590   513   123 1440     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  848    0   414     0    0     0     0 1590   513   123 1440     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  848    0   414     0    0     0     0 1590   513   123 1440     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 1.00  0.75  1.00 1.00  1.00  1.00 0.88  0.88  0.95 0.91  1.00
Lanes:       2.00 0.00  2.00  0.00 0.00  0.00  0.00 2.27  0.73  1.00 3.00  0.00
Final Sat.:  3502    0  2842     0    0     0     0 3777  1218  1805 5187     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.24 0.00  0.15  0.00 0.00  0.00  0.00 0.42  0.42  0.07 0.28  0.00
Crit Moves:  ****                                  ****        ****
Green/Cycle: 0.31 0.00  0.31  0.00 0.00  0.00  0.00 0.55  0.55  0.09 0.64  0.00
Volume/Cap:  0.77 0.00  0.46  0.00 0.00  0.00  0.00 0.77  0.77  0.77 0.44  0.00
Delay/Veh:   34.4  0.0  27.9   0.0  0.0   0.0   0.0 19.1  19.1  64.7  9.3   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  34.4  0.0  27.9   0.0  0.0   0.0   0.0 19.1  19.1  64.7  9.3   0.0
LOS by Move:    C    A     C     A    A     A     A    B     B     E    A     A
HCM2k85thQ:    21    0     9     0    0     0     0   29    29     9   12     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:47                Page 61-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #59 I-5 NB Off Ramps/17th Street
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.589
Loss Time (sec):       5               Average Delay (sec/veh):        19.5
Optimal Cycle:        30               Level Of Service:                  B
******************************************************************************
Street Name:         I-5 NB Off Ramps                    17th Street
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected         Permitted
Rights:           Include          Include          Ignore           Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  1    1  0  0  0  1    1  0  3  0  1    0  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     345   46    18    51    0   133   120 1099   722     0 1525    41
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  345   46    18    51    0   133   120 1099   722     0 1525    41
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Volume:   345   46    18    51    0   133   120 1099     0     0 1525    41
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  345   46    18    51    0   133   120 1099     0     0 1525    41
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
FinalVolume:  345   46    18    51    0   133   120 1099     0     0 1525    41
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.96 0.96  0.85  0.95 1.00  0.85  0.95 0.91  1.00  1.00 0.91  0.91
Lanes:       1.76 0.24  1.00  1.00 0.00  1.00  1.00 3.00  1.00  0.00 2.92  0.08
Final Sat.:  3212  428  1615  1805    0  1615  1805 5187  1900     0 5031   135
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.11  0.01  0.03 0.00  0.08  0.07 0.21  0.00  0.00 0.30  0.30
Crit Moves:       ****                     ****  ****                 ****
Green/Cycle: 0.18 0.18  0.18  0.14 0.00  0.14  0.11 0.63  0.00  0.00 0.51  0.51
Volume/Cap:  0.59 0.59  0.06  0.20 0.00  0.59  0.59 0.34  0.00  0.00 0.59  0.59
Delay/Veh:   38.8 38.8  33.9  38.5  0.0  44.3  46.6  8.9   0.0   0.0 17.2  17.2
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  38.8 38.8  33.9  38.5  0.0  44.3  46.6  8.9   0.0   0.0 17.2  17.2
LOS by Move:    D    D     C     D    A     D     D    A     A     A    B     B
HCM2k85thQ:    10   10     1     2    0     7     7    9     0     0   19    19
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:48                Page 62-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #60 Penn Wy and I-5 SB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.423
Loss Time (sec):       5               Average Delay (sec/veh):        22.0
Optimal Cycle:        22               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    2  0  2  0  0    0  0  0  0  0    1  0  0  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  363   238   550  127     0     0    0     0   175    0   150
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  363   238   550  127     0     0    0     0   175    0   150
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  363   238   550  127     0     0    0     0   175    0   150
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  363   238   550  127     0     0    0     0   175    0   150
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  363   238   550  127     0     0    0     0   175    0   150
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  0.85  0.92 0.95  1.00  1.00 1.00  1.00  0.95 1.00  0.75
Lanes:       0.00 2.00  1.00  2.00 2.00  0.00  0.00 0.00  0.00  1.00 0.00  2.00
Final Sat.:     0 3610  1615  3502 3610     0     0    0     0  1805    0  2842
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.10  0.15  0.16 0.04  0.00  0.00 0.00  0.00  0.10 0.00  0.05
Crit Moves:             ****  ****                               ****
Green/Cycle: 0.00 0.35  0.35  0.37 0.72  0.00  0.00 0.00  0.00  0.23 0.00  0.60
Volume/Cap:  0.00 0.29  0.42  0.42 0.05  0.00  0.00 0.00  0.00  0.42 0.00  0.09
Delay/Veh:    0.0 23.7  25.4  23.6  4.1   0.0   0.0  0.0   0.0  33.6  0.0   8.4
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 23.7  25.4  23.6  4.1   0.0   0.0  0.0   0.0  33.6  0.0   8.4
LOS by Move:    A    C     C     C    A     A     A    A     A     C    A     A
HCM2k85thQ:     0    7     9    10    1     0     0    0     0     8    0     2
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:48                Page 63-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM 4-Way Stop Method (Base Volume Alternative)
******************************************************************************
Intersection #61 Santiago St and Civic Center Dr
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.674
Loss Time (sec):       5               Average Delay (sec/veh):        17.1
Optimal Cycle:         0               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Stop Sign        Stop Sign        Stop Sign        Stop Sign
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Lanes:        1  0  0  1  0    1  0  0  1  0    0  1  0  0  1    0  0  1! 0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      97  299    30    13  187    48   266   76   269    14   19    18
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   97  299    30    13  187    48   266   76   269    14   19    18
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    97  299    30    13  187    48   266   76   269    14   19    18
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   97  299    30    13  187    48   266   76   269    14   19    18
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   97  299    30    13  187    48   266   76   269    14   19    18
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 0.91  0.09  1.00 0.80  0.20  0.78 0.22  1.00  0.27 0.38  0.35
Final Sat.:   481  478    48   458  401   103   395  113   597   122  166   157
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.20 0.63  0.63  0.03 0.47  0.47  0.67 0.67  0.45  0.11 0.11  0.11
Crit Moves:       ****                    ****       ****            ****
Delay/Veh:   11.7 19.4  19.4  10.4 15.1  15.1  22.2 22.2  13.1  11.2 11.2  11.2
Delay Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  11.7 19.4  19.4  10.4 15.1  15.1  22.2 22.2  13.1  11.2 11.2  11.2
LOS by Move:    B    C     C     B    C     C     C    C     B     B    B     B
ApproachDel:       17.6             14.8             18.2             11.2
Delay Adj:         1.00             1.00             1.00             1.00
ApprAdjDel:        17.6             14.8             18.2             11.2
LOS by Appr:          C                B                C                B
AllWayAvgQ:   0.2  1.5   1.5   0.0  0.8   0.8   1.8  1.8   0.7   0.1  0.1   0.1
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:49                Page 64-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #62 Santiago St and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.569
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        27               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  0  1    1  0  1  0  1    1  0  1  1  0    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      36  133    84   297  120    61    71  649    20    73  492   187
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   36  133    84   297  120    61    71  649    20    73  492   187
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    36  133    84   297  120    61    71  649    20    73  492   187
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   36  133    84   297  120    61    71  649    20    73  492   187
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   36  133    84   297  120    61    71  649    20    73  492   187
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.06  1.00
Lanes:       1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.94  0.06  1.00 2.00  1.00
Final Sat.:  1600 1700  1600  1600 1700  1600  1600 3204    96  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.08  0.05  0.19 0.07  0.04  0.04 0.20  0.21  0.05 0.14  0.12
Crit Moves:       ****        ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:49                Page 65-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #64 Standard Ave and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.842
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        62               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    0  0  1! 0  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     185  367   119    19  189    23   177 1218   129    91 1148    21
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  185  367   119    19  189    23   177 1218   129    91 1148    21
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   185  367   119    19  189    23   177 1218   129    91 1148    21
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  185  367   119    19  189    23   177 1218   129    91 1148    21
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  185  367   119    19  189    23   177 1218   129    91 1148    21
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.03  1.00  1.00 1.03  1.00
Lanes:       1.00 0.76  0.24  0.08 0.82  0.10  1.00 1.81  0.19  1.00 1.96  0.04
Final Sat.:  1600 1208   392   132 1309   159  1600 2994   306  1600 3243    57
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.30  0.30  0.01 0.14  0.14  0.11 0.41  0.42  0.06 0.35  0.37
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:50                Page 66-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #65 Standard Ave and Mcfadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.682
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        35               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     169  667    82   137  300    52    53  351    60   117  712   206
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  169  667    82   137  300    52    53  351    60   117  712   206
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   169  667    82   137  300    52    53  351    60   117  712   206
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  169  667    82   137  300    52    53  351    60   117  712   206
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  169  667    82   137  300    52    53  351    60   117  712   206
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.78  0.22  1.00 1.70  0.30  1.00 1.71  0.29  1.00 1.55  0.45
Final Sat.:  1600 2950   350  1600 2827   473  1600 2833   467  1600 2582   718
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.23  0.23  0.09 0.11  0.11  0.03 0.12  0.13  0.07 0.28  0.29
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:50                Page 67-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #66 Halladay St and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.677
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        35               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    0  0  0  0  0    0  1  0  1  0    0  1  1  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     169    0   352     0    0     0     2  926    93   141 1121     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  169    0   352     0    0     0     2  926    93   141 1121     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   169    0   352     0    0     0     2  926    93   141 1121     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  169    0   352     0    0     0     2  926    93   141 1121     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  169    0   352     0    0     0     2  926    93   141 1121     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00  1.00 1.04  1.00
Lanes:       1.00 0.00  1.00  0.00 0.00  0.00  0.01 1.81  0.18  0.22 1.78  0.00
Final Sat.:  1600    0  1600     0    0     0     6 2902   291   358 2942     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.00  0.22  0.00 0.00  0.00  0.00 0.32  0.32  0.09 0.38  0.00
Crit Moves:             ****                     ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:51                Page 68-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #67 Halladay St and Dyer Rd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.784
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        49               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      41  180   208   114   15    32   150 1298     9    45 1451   116
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   41  180   208   114   15    32   150 1298     9    45 1451   116
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    41  180   208   114   15    32   150 1298     9    45 1451   116
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   41  180   208   114   15    32   150 1298     9    45 1451   116
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   41  180   208   114   15    32   150 1298     9    45 1451   116
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 0.46  0.54  1.00 0.32  0.68  1.00 2.98  0.02  1.00 2.78  0.22
Final Sat.:  1600  742   858  1600  511  1089  1600 4967    33  1600 4645   355
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.24  0.24  0.07 0.03  0.03  0.09 0.26  0.27  0.03 0.31  0.33
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:51                Page 69-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #68 SR-55 SB Ramps and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.569
Loss Time (sec):       5               Average Delay (sec/veh):        17.3
Optimal Cycle:        28               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  2    0  0  2  1  1    0  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   288    0   697     0 1167  1040     0 1532   602
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   288    0   697     0 1167  1040     0 1532   602
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:     0    0     0   288    0   697     0 1167     0     0 1532     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   288    0   697     0 1167     0     0 1532     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:    0    0     0   288    0   697     0 1167     0     0 1532     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.92 1.00  0.75  1.00 0.91  0.91  1.00 0.91  1.00
Lanes:       0.00 0.00  0.00  2.00 0.00  2.00  0.00 3.00  1.00  0.00 3.00  1.00
Final Sat.:     0    0     0  3502    0  2842     0 5187  1729     0 5187  1900
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.08 0.00  0.25  0.00 0.22  0.00  0.00 0.30  0.00
Crit Moves:                                ****  ****                 ****
Green/Cycle: 0.00 0.00  0.00  0.43 0.00  0.43  0.00 0.52  0.00  0.00 0.52  0.00
Volume/Cap:  0.00 0.00  0.00  0.19 0.00  0.57  0.00 0.43  0.00  0.00 0.57  0.00
Delay/Veh:    0.0  0.0   0.0  17.7  0.0  22.1   0.0 15.0   0.0   0.0 16.7   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0  17.7  0.0  22.1   0.0 15.0   0.0   0.0 16.7   0.0
LOS by Move:    A    A     A     B    A     C     A    B     A     A    B     A
HCM2k85thQ:     0    0     0     4    0    15     0   12     0     0   18     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:52                Page 70-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #69 SR-55 NB Ramps and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.497
Loss Time (sec):       5               Average Delay (sec/veh):        14.8
Optimal Cycle:        25               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Ignore           Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  0  1    0  0  0  0  0    0  0  2  0  2    0  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     641    0   426     0    0     0     0  711   731     0 1501  1081
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  641    0   426     0    0     0     0  711   731     0 1501  1081
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:   641    0     0     0    0     0     0  711     0     0 1501     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  641    0     0     0    0     0     0  711     0     0 1501     0
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:  641    0     0     0    0     0     0  711     0     0 1501     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 1.00  1.00  1.00 1.00  1.00  1.00 0.95  0.88  1.00 0.91  1.00
Lanes:       2.00 0.00  1.00  0.00 0.00  0.00  0.00 2.00  2.00  0.00 3.00  1.00
Final Sat.:  3502    0  1900     0    0     0     0 3610  3344     0 5187  1900
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.18 0.00  0.00  0.00 0.00  0.00  0.00 0.20  0.00  0.00 0.29  0.00
Crit Moves:  ****                              ****                   ****
Green/Cycle: 0.37 0.00  0.00  0.00 0.00  0.00  0.00 0.58  0.00  0.00 0.58  0.00
Volume/Cap:  0.50 0.00  0.00  0.00 0.00  0.00  0.00 0.34  0.00  0.00 0.50  0.00
Delay/Veh:   24.7  0.0   0.0   0.0  0.0   0.0   0.0 11.0   0.0   0.0 12.4   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  24.7  0.0   0.0   0.0  0.0   0.0   0.0 11.0   0.0   0.0 12.4   0.0
LOS by Move:    C    A     A     A    A     A     A    B     A     A    B     A
HCM2k85thQ:    12    0     0     0    0     0     0    9     0     0   15     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:52                Page 71-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #70 SR-55 SB Ramps and Dyer Rd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.669
Loss Time (sec):       5               Average Delay (sec/veh):        25.7
Optimal Cycle:        36               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:            Ovl              Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  2    0  1  1  0  1    1  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     319   10   240   103  226   110    65 1523   207   556  991    64
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  319   10   240   103  226   110    65 1523   207   556  991    64
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   319   10   240   103  226   110    65 1523   207   556  991    64
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  319   10   240   103  226   110    65 1523   207   556  991    64
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  319   10   240   103  226   110    65 1523   207   556  991    64
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.95  0.75  0.94 0.94  0.85  0.95 0.91  0.85  0.92 0.91  0.85
Lanes:       1.94 0.06  2.00  0.63 1.37  1.00  1.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3515  110  2842  1113 2443  1615  1805 5187  1615  3502 5187  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.09  0.08  0.09 0.09  0.07  0.04 0.29  0.13  0.16 0.19  0.04
Crit Moves:  ****              ****              ****              ****
Green/Cycle: 0.14 0.14  0.37  0.14 0.14  0.14  0.11 0.44  0.44  0.24 0.57  0.57
Volume/Cap:  0.67 0.67  0.23  0.67 0.67  0.49  0.34 0.67  0.29  0.67 0.34  0.07
Delay/Veh:   44.6 44.6  21.6  44.5 44.5  41.6  42.4 23.1  18.3  36.7 11.6   9.7
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  44.6 44.6  21.6  44.5 44.5  41.6  42.4 23.1  18.3  36.7 11.6   9.7
LOS by Move:    D    D     C     D    D     D     D    C     B     D    B     A
HCM2k85thQ:     9    9     5    10   10     6     3   21     6    14    9     1
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:53                Page 72-1
--------------------------------------------------------------------------------
                         Santa Ana Circulation Element
--------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
********************************************************************************
Intersection #71 Glassell St and La Veta Ave
********************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.620
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        30               Level Of Service:                  B
********************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Ovl              Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  1  0  1    1  0  1  1  0    1  0  1  0  1    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     472  490   160    15  499    37    82  268   461   155  280    11
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  472  490   160    15  499    37    82  268   461   155  280    11
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   472  490   160    15  499    37    82  268   461   155  280    11
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  472  490   160    15  499    37    82  268   461   155  280    11
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  472  490   160    15  499    37    82  268   461   155  280    11
OvlAdjVol:                 5                                  225
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.03  1.00
Lanes:       2.00 1.00  1.00  1.00 1.86  0.14  1.00 1.00  1.00  1.00 1.92  0.08
Final Sat.:  3200 1700  1600  1600 3079   221  1600 1700  1600  1600 3179   121
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.29  0.10  0.01 0.16  0.17  0.05 0.16  0.29  0.10 0.09  0.09
OvlAdjV/S:              0.00                                 0.14
Crit Moves:  ****                       ****       ****       ****
********************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:53                Page 73-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #72 Glassell St and SR-22 WB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.766
Loss Time (sec):       5               Average Delay (sec/veh):        24.8
Optimal Cycle:        48               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected         Permitted      Split Phase      Split Phase
Rights:           Include           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  0    0  0  2  0  1    0  0  0  0  0    1  0  1! 0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     557  910     0     0  878   255     0    0     0   201    7   357
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  557  910     0     0  878   255     0    0     0   201    7   357
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   557  910     0     0  878   255     0    0     0   201    7   357
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  557  910     0     0  878   255     0    0     0   201    7   357
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  557  910     0     0  878   255     0    0     0   201    7   357
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.95  1.00  1.00 0.95  0.85  1.00 1.00  1.00  0.86 0.86  0.86
Lanes:       1.00 2.00  0.00  0.00 2.00  1.00  0.00 0.00  0.00  1.35 0.02  1.63
Final Sat.:  1805 3610     0     0 3610  1615     0    0     0  2201   40  2645
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.31 0.25  0.00  0.00 0.24  0.16  0.00 0.00  0.00  0.09 0.18  0.13
Crit Moves:  ****                 ****                               ****
Green/Cycle: 0.40 0.72  0.00  0.00 0.32  0.32  0.00 0.00  0.00  0.23 0.23  0.23
Volume/Cap:  0.77 0.35  0.00  0.00 0.77  0.50  0.00 0.00  0.00  0.40 0.77  0.59
Delay/Veh:   30.7  5.3   0.0   0.0 33.9  28.4   0.0  0.0   0.0  32.9 40.8  35.3
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  30.7  5.3   0.0   0.0 33.9  28.4   0.0  0.0   0.0  32.9 40.8  35.3
LOS by Move:    C    A     A     A    C     C     A    A     A     C    D     D
HCM2k85thQ:    24    9     0     0   21    10     0    0     0     6   15    10
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:54                Page 74-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #73 Grand Ave / Glassell St and SR-22 EB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.812
Loss Time (sec):       5               Average Delay (sec/veh):        26.5
Optimal Cycle:        57               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted       Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    1  0  2  0  0    1  0  1! 0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1202   307   381  681     0   229    4   503     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1202   307   381  681     0   229    4   503     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1202   307   381  681     0   229    4   503     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1202   307   381  681     0   229    4   503     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1202   307   381  681     0   229    4   503     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  0.85  0.95 0.95  1.00  0.86 0.86  0.86  1.00 1.00  1.00
Lanes:       0.00 2.00  1.00  1.00 2.00  0.00  1.31 0.01  1.68  0.00 0.00  0.00
Final Sat.:     0 3610  1615  1805 3610     0  2129   18  2731     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.33  0.19  0.21 0.19  0.00  0.11 0.23  0.18  0.00 0.00  0.00
Crit Moves:       ****        ****                 ****
Green/Cycle: 0.00 0.41  0.41  0.26 0.67  0.00  0.28 0.28  0.28  0.00 0.00  0.00
Volume/Cap:  0.00 0.81  0.46  0.81 0.28  0.00  0.38 0.81  0.66  0.00 0.00  0.00
Delay/Veh:    0.0 29.6  22.0  45.1  6.8   0.0  29.2 39.2  33.2   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 29.6  22.0  45.1  6.8   0.0  29.2 39.2  33.2   0.0  0.0   0.0
LOS by Move:    A    C     C     D    A     A     C    D     C     A    A     A
HCM2k85thQ:     0   28    11    20    7     0     7   19    14     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:55                Page 75-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #74 Grand Ave and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.675
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        35               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  0  1    1  0  1  1  0    1  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      46 1214   243   222  894    82    79   45    33   255   48   181
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   46 1214   243   222  894    82    79   45    33   255   48   181
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    46 1214   243   222  894    82    79   45    33   255   48   181
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   46 1214   243   222  894    82    79   45    33   255   48   181
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   46 1214   243   222  894    82    79   45    33   255   48   181
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 2.50  0.50  1.00 2.00  1.00  1.00 1.15  0.85  1.00 1.00  1.00
Final Sat.:  1600 4199   801  1600 3400  1600  1600 1946  1354  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.29  0.30  0.14 0.26  0.05  0.05 0.02  0.02  0.16 0.03  0.11
Crit Moves:             ****  ****                ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:55                Page 76-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #75 Grand Ave and Santa Clara Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.748
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        43               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include        WideBypass          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  1  1  0    1  0  0  1  0    1  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      88 1185   246   220  868   220   159  194    36   136  244   260
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   88 1185   246   220  868   220   159  194    36   136  244   260
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    88 1185   246   220  868   220   159  194    36   136  244   260
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   88 1185   246   220  868   220   159  194    36   136  244   260
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   88 1185   246   220  868   220   159  194    36   136  244   260
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.00  1.00  1.00 1.06  1.00
Lanes:       1.00 2.48  0.52  1.00 1.60  0.40  1.00 0.84  0.16  1.00 1.00  1.00
Final Sat.:  1600 4175   825  1600 2653   647  1600 1350   250  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.28  0.30  0.14 0.33  0.34  0.10 0.14  0.14  0.09 0.14  0.16
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:56                Page 77-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #76 Grand Ave and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.828
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        59               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     246  877   221   270  582   128   346  886   149   300 1107   201
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  246  877   221   270  582   128   346  886   149   300 1107   201
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   246  877   221   270  582   128   346  886   149   300 1107   201
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  246  877   221   270  582   128   346  886   149   300 1107   201
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  246  877   221   270  582   128   346  886   149   300 1107   201
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.40  0.60  1.00 2.00  1.00  2.00 2.57  0.43  2.00 2.54  0.46
Final Sat.:  1600 4034   966  1600 3400  1600  3200 4309   691  3200 4262   738
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.22  0.23  0.17 0.17  0.08  0.11 0.21  0.22  0.09 0.26  0.27
Crit Moves:             ****  ****             ****                     ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:56                Page 78-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #77 Grand Ave and I-5 NB Ramps
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.518
Loss Time (sec):       5               Average Delay (sec/veh):        10.0
Optimal Cycle:        26               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Ignore           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    1  0  3  0  0    0  0  0  0  0    2  0  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1297  1001    48 1164     0     0    0     0   143    0   172
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1297  1001    48 1164     0     0    0     0   143    0   172
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1297     0    48 1164     0     0    0     0   143    0   172
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1297     0    48 1164     0     0    0     0   143    0   172
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1297     0    48 1164     0     0    0     0   143    0   172
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  1.00  0.95 0.91  1.00  1.00 1.00  1.00  0.92 1.00  0.85
Lanes:       0.00 2.00  1.00  1.00 3.00  0.00  0.00 0.00  0.00  2.00 0.00  1.00
Final Sat.:     0 3610  1900  1805 5187     0     0    0     0  3502    0  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.36  0.00  0.03 0.22  0.00  0.00 0.00  0.00  0.04 0.00  0.11
Crit Moves:       ****        ****                                       ****
Green/Cycle: 0.00 0.69  0.00  0.05 0.74  0.00  0.00 0.00  0.00  0.21 0.00  0.21
Volume/Cap:  0.00 0.52  0.00  0.52 0.30  0.00  0.00 0.00  0.00  0.20 0.00  0.52
Delay/Veh:    0.0  7.5   0.0  51.3  4.3   0.0   0.0  0.0   0.0  33.0  0.0  36.8
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  7.5   0.0  51.3  4.3   0.0   0.0  0.0   0.0  33.0  0.0  36.8
LOS by Move:    A    A     A     D    A     A     A    A     A     C    A     D
HCM2k85thQ:     0   15     0     4    7     0     0    0     0     3    0     8
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:57                Page 79-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #78 Grand Ave and Santa Ana Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.605
Loss Time (sec):       5               Average Delay (sec/veh):        21.1
Optimal Cycle:        31               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Ovl             Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  0  2    2  0  1  0  2    0  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     167 1888    31    34  750   532   328  200   316    20  134    97
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  167 1888    31    34  750   532   328  200   316    20  134    97
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   167 1888    31    34  750   532   328  200   316    20  134    97
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  167 1888    31    34  750   532   328  200   316    20  134    97
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  167 1888    31    34  750   532   328  200   316    20  134    97
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  0.91  0.95 0.95  0.75  0.92 1.00  0.75  0.89 0.89  0.89
Lanes:       1.00 2.95  0.05  1.00 2.00  2.00  2.00 1.00  2.00  0.16 1.07  0.77
Final Sat.:  1805 5093    84  1805 3610  2842  3502 1900  2842   270 1808  1309
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.37  0.37  0.02 0.21  0.19  0.09 0.11  0.11  0.07 0.07  0.07
Crit Moves:       ****        ****                          ****  ****
Green/Cycle: 0.20 0.61  0.61  0.03 0.45  0.63  0.18 0.18  0.18  0.12 0.12  0.12
Volume/Cap:  0.47 0.61  0.61  0.61 0.47  0.30  0.51 0.57  0.61  0.61 0.61  0.61
Delay/Veh:   36.4 12.3  12.3  65.2 19.6   8.6  37.4 39.5  39.5  44.1 44.1  44.1
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  36.4 12.3  12.3  65.2 19.6   8.6  37.4 39.5  39.5  44.1 44.1  44.1
LOS by Move:    D    B     B     E    B     A     D    D     D     D    D     D
HCM2k85thQ:     8   20    20     3   13     7     8   10     9     8    8     8
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:57                Page 80-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #79 Grand Ave and 1st St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.793
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        51               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  2  1  0    2  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     165 1261    38   120  706   282   277  918    91   151  941   173
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  165 1261    38   120  706   282   277  918    91   151  941   173
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   165 1261    38   120  706   282   277  918    91   151  941   173
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  165 1261    38   120  706   282   277  918    91   151  941   173
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  165 1261    38   120  706   282   277  918    91   151  941   173
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       2.00 2.91  0.09  2.00 3.00  1.00  2.00 2.73  0.27  2.00 1.69  0.31
Final Sat.:  3200 4860   140  3200 5100  1600  3200 4567   433  3200 2803   497
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.26  0.27  0.04 0.14  0.18  0.09 0.20  0.21  0.05 0.34  0.35
Crit Moves:             ****  ****            ****                     ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:58                Page 81-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                       Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #80 Grand Ave and Chestnut Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.615
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        30               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     140 1050   182   149  664   112    93  285    62   107  333   194
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  140 1050   182   149  664   112    93  285    62   107  333   194
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   140 1050   182   149  664   112    93  285    62   107  333   194
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  140 1050   182   149  664   112    93  285    62   107  333   194
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  140 1050   182   149  664   112    93  285    62   107  333   194
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 2.56  0.44  1.00 2.57  0.43  1.00 1.64  0.36  1.00 1.26  0.74
Final Sat.:  1600 4291   709  1600 4307   693  1600 2728   572  1600 2122  1178
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.24  0.26  0.09 0.15  0.16  0.06 0.10  0.11  0.07 0.16  0.16
Crit Moves:             ****  ****             ****                   ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:59                Page 82-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                       Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #81 Grand Ave and McFadden Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.759
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        45               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     202 1150   198   138  626   168   128  476    83    86  686   151
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  202 1150   198   138  626   168   128  476    83    86  686   151
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   202 1150   198   138  626   168   128  476    83    86  686   151
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  202 1150   198   138  626   168   128  476    83    86  686   151
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  202 1150   198   138  626   168   128  476    83    86  686   151
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 2.56  0.44  1.00 2.37  0.63  1.00 1.70  0.30  1.00 1.64  0.36
Final Sat.:  1600 4295   705  1600 3984  1016  1600 2825   475  1600 2723   577
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.27  0.28  0.09 0.16  0.17  0.08 0.17  0.17  0.05 0.25  0.26
Crit Moves:             ****  ****            ****                      ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:56:59                Page 83-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #82 Grand Ave and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.909
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        92               Level Of Service:                  E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     242 1397   121   165  408   229   201  868    70    74 1333   173
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  242 1397   121   165  408   229   201  868    70    74 1333   173
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   242 1397   121   165  408   229   201  868    70    74 1333   173
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  242 1397   121   165  408   229   201  868    70    74 1333   173
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  242 1397   121   165  408   229   201  868    70    74 1333   173
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.76  0.24  1.00 2.00  1.00  1.00 2.78  0.22  1.00 2.66  0.34
Final Sat.:  1600 4617   383  1600 3400  1600  1600 4642   358  1600 4449   551
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.30  0.32  0.10 0.12  0.14  0.13 0.19  0.20  0.05 0.30  0.31
Crit Moves:             ****  ****             ****                     ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:00                Page 84-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #83 Grand Ave and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.704
Loss Time (sec):       0               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        77               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    2  0  3  0  1    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     242  873   193   146  471   217   342  656   142   151  964   316
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  242  873   193   146  471   217   342  656   142   151  964   316
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   242  873   193   146  471   217   342  656   142   151  964   316
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  242  873   193   146  471   217   342  656   142   151  964   316
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  242  873   193   146  471   217   342  656   142   151  964   316
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.46  0.54  1.00 2.05  0.95  2.00 3.00  1.00  2.00 2.00  1.00
Final Sat.:  1600 4131   869  1600 3486  1514  3200 5100  1600  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.21  0.22  0.09 0.14  0.14  0.11 0.13  0.09  0.05 0.28  0.20
Crit Moves:             ****  ****             ****                   ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:00                Page 85-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #84 SR-55 NB Ramps and Dyer Rd
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.376
Loss Time (sec):       5                Average Delay (sec/veh):         5.7
Optimal Cycle:        20                Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1! 0  1    0  0  0  0  0    0  0  3  0  1    0  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     188    0    51     0    0     0     0 1339   681     0 1545   965
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  188    0    51     0    0     0     0 1339   681     0 1545   965
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:   188    0    51     0    0     0     0 1339     0     0 1545     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  188    0    51     0    0     0     0 1339     0     0 1545     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:  188    0    51     0    0     0     0 1339     0     0 1545     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.93 1.00  0.93  1.00 1.00  1.00  1.00 0.91  1.00  1.00 0.91  0.91
Lanes:       1.79 0.00  1.21  0.00 0.00  0.00  0.00 3.00  1.00  0.00 3.00  0.00
Final Sat.:  3161    0  2147     0    0     0     0 5187  1900     0 5187     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.00  0.02  0.00 0.00  0.00  0.00 0.26  0.00  0.00 0.30  0.00
Crit Moves:  ****                             ****                   ****
Green/Cycle: 0.16 0.00  0.16  0.00 0.00  0.00  0.00 0.79  0.00  0.00 0.79  0.00
Volume/Cap:  0.38 0.00  0.15  0.00 0.00  0.00  0.00 0.33  0.00  0.00 0.38  0.00
Delay/Veh:   38.1  0.0  36.3   0.0  0.0   0.0   0.0  3.0   0.0   0.0  3.1   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  38.1  0.0  36.3   0.0  0.0   0.0   0.0  3.0   0.0   0.0  3.1   0.0
LOS by Move:    D    A     D     A    A     A     A    A     A     A    A     A
HCM2k85thQ:     5    0     2     0    0     0     0    7     0     0    8     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:01                Page 86-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
             2000 HCM 4-Way Stop Method (Base Volume Alternative)
*******************************************************************************
Intersection #85 Cambridge St and La Veta Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.459
Loss Time (sec):       5               Average Delay (sec/veh):        12.5
Optimal Cycle:         0               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Stop Sign        Stop Sign        Stop Sign        Stop Sign
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Lanes:        1  0  1  0  0    0  0  1  0  1    1  0  0  0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     191  266     0     0  196   181   219    0   144     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  191  266     0     0  196   181   219    0   144     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   191  266     0     0  196   181   219    0   144     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  191  266     0     0  196   181   219    0   144     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  191  266     0     0  196   181   219    0   144     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 1.00  0.00  0.00 1.00  1.00  1.00 0.00  1.00  0.00 0.00  0.00
Final Sat.:   535  579     0     0  563   631   500    0   595     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.36 0.46  xxxx  xxxx 0.35  0.29  0.44 xxxx  0.24  xxxx xxxx  xxxx
Crit Moves:       ****             ****        ****
Delay/Veh:   12.7 13.6   0.0   0.0 12.0  10.3  14.7  0.0  10.2   0.0  0.0   0.0
Delay Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  12.7 13.6   0.0   0.0 12.0  10.3  14.7  0.0  10.2   0.0  0.0   0.0
LOS by Move:    B    B     *     *    B     B     B    *     B     *    *     *
ApproachDel:       13.3             11.2             12.9           xxxxxx
Delay Adj:         1.00             1.00             1.00            xxxxx
ApprAdjDel:        13.3             11.2             12.9           xxxxxx
LOS by Appr:          B                B                B                *
AllWayAvgQ:   0.5  0.8   0.0   0.0  0.5   0.4   0.7  0.0   0.3   0.0  0.0   0.0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:02                Page 87-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #86 Cambridge St and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.488
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        23               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:            Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    1  0  0  0  1    1  0  2  0  0    0  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   219    0    76   141  246     0     0  273   340
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   219    0    76   141  246     0     0  273   340
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   219    0    76   141  246     0     0  273   340
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   219    0    76   141  246     0     0  273   340
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   219    0    76   141  246     0     0  273   340
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 0.00  0.00  1.00 0.00  1.00  1.00 2.00  0.00  0.00 1.00  1.00
Final Sat.:     0    0     0  1600    0  1600  1600 3400     0     0 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.14 0.00  0.05  0.09 0.07  0.00  0.00 0.16  0.21
Crit Moves:                   ****             ****                     ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:02                Page 88-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #87 Mabury St and 1st Street
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.703
Loss Time (sec):       0               Average Delay (sec/veh):        26.1
Optimal Cycle:        77               Level Of Service:                  C
*******************************************************************************
Street Name:              Mabury                          1st Street
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    1  0  1! 0  1    0  0  2  1  0    1  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:      25    0   256   207   88   390     0 1512    24    40  549     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   25    0   256   207   88   390     0 1512    24    40  549     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    25    0   256   207   88   390     0 1512    24    40  549     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   25    0   256   207   88   390     0 1512    24    40  549     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   25    0   256   207   88   390     0 1512    24    40  549     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 1.00  0.85  0.90 0.90  0.90  1.00 0.91  0.91  0.95 0.91  0.91
Lanes:       1.00 0.00  1.00  1.27 0.23  1.50  0.00 2.95  0.05  1.00 3.00  0.00
Final Sat.:  1805    0  1615  2171  390  2576     0 5096    81  1805 5187     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.00  0.16  0.10 0.23  0.15  0.00 0.30  0.30  0.02 0.11  0.00
Crit Moves:             ****       ****             ****        ****
Green/Cycle: 0.23 0.00  0.23  0.32 0.32  0.32  0.00 0.42  0.42  0.03 0.45  0.00
Volume/Cap:  0.06 0.00  0.70  0.30 0.70  0.47  0.00 0.70  0.70  0.70 0.23  0.00
Delay/Veh:   30.5  0.0  41.7  25.6 32.1  27.4   0.0 24.8  24.8  80.7 16.7   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  30.5  0.0  41.7  25.6 32.1  27.4   0.0 24.8  24.8  80.7 16.7   0.0
LOS by Move:    C    A     D     C    C     C     A    C     C     F    B     A
HCM2k85thQ:     1    0    13     6   17    10     0   22    22     4    6     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:03                Page 89-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #88 Tustin St and La Veta Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.444
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        21               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  1  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      46 1033   245    90  801    15    13    5    20   183    5   112
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   46 1033   245    90  801    15    13    5    20   183    5   112
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    46 1033   245    90  801    15    13    5    20   183    5   112
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   46 1033   245    90  801    15    13    5    20   183    5   112
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   46 1033   245    90  801    15    13    5    20   183    5   112
OvlAdjVol:                                                                  22
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       1.00 2.42  0.58  1.00 2.94  0.06  1.00 1.00  1.00  1.95 0.05  1.00
Final Sat.:  1600 4080   920  1600 4912    88  1600 1700  1600  3115   85  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.25  0.27  0.06 0.16  0.17  0.01 0.00  0.01  0.06 0.06  0.07
OvlAdjV/S:                                                                  0.01
Crit Moves:             ****  ****                          ****       ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:03                Page 90-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #89 Tustin St and SR-22 WB On-Ramp
******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.446
Loss Time (sec):       5                Average Delay (sec/veh):        12.1
Optimal Cycle:        36                Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected         Permitted       Protected        Protected
Rights:           Include           Include         Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  0    0  0  2  1  0    0  0  0  0  0    0  0  0  0  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     532 1529     0     0  711   365     0    0     0     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  532 1529     0     0  711   365     0    0     0     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   532 1529     0     0  711   365     0    0     0     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  532 1529     0     0  711   365     0    0     0     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  532 1529     0     0  711   365     0    0     0     0    0     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 0.95  1.00  1.00 0.86  0.86  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       2.00 2.00  0.00  0.00 2.00  1.00  0.00 0.00  0.00  0.00 0.00  0.00
Final Sat.:  3502 3610     0     0 3282  1641     0    0     0     0    0     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.42  0.00  0.00 0.22  0.22  0.00 0.00  0.00  0.00 0.00  0.00
Crit Moves:       ****
Green/Cycle: 0.63 0.95  0.00  0.00 0.32  0.32  0.00 0.00  0.00  0.00 0.00  0.00
Volume/Cap:  0.24 0.45  0.00  0.00 0.67  0.69  0.00 0.00  0.00  0.00 0.00  0.00
Delay/Veh:    8.2  0.3   0.0   0.0 30.5  31.0   0.0  0.0   0.0   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   8.2  0.3   0.0   0.0 30.5  31.0   0.0  0.0   0.0   0.0  0.0   0.0
LOS by Move:    A    A     A     A    C     C     A    A     A     A    A     A
HCM2k85thQ:     6    4     0     0   17    18     0    0     0     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:04                Page 91-1
--------------------------------------------------------------------------------
                         Santa Ana Circulation Element
--------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
********************************************************************************
Intersection #90 Tustin St and SR-22 EB Off-Ramp / Seba Ave
********************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.719
Loss Time (sec):       5                Average Delay (sec/veh):        23.7
Optimal Cycle:        41                Level Of Service:                  C
********************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted      Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  1  0    1  0  3  0  0    1  0  1! 0  1    0  0  1! 0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1547     4    52  707     0   458   41   581    28    0    67
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1547     4    52  707     0   458   41   581    28    0    67
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1547     4    52  707     0   458   41   581    28    0    67
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1547     4    52  707     0   458   41   581    28    0    67
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1547     4    52  707     0   458   41   581    28    0    67
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  0.91  0.10 0.91  1.00  0.90 0.90  0.90  0.89 1.00  0.89
Lanes:       0.00 2.99  0.01  1.00 3.00  0.00  1.41 0.07  1.52  0.29 0.00  0.71
Final Sat.:     0 5174    13   182 5187     0  2408  125  2595   499    0  1195
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.30  0.30  0.29 0.14  0.00  0.19 0.33  0.22  0.06 0.00  0.06
Crit Moves:       ****                          ****        ****
Green/Cycle: 0.00 0.42  0.42  0.42 0.42  0.00  0.46 0.46  0.46  0.08 0.00  0.08
Volume/Cap:  0.00 0.72  0.72  0.69 0.33  0.00  0.42 0.72  0.49  0.72 0.00  0.72
Delay/Veh:    0.0 25.5  25.5  46.8 19.8   0.0  18.4 23.7  19.2  62.4  0.0  62.4
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 25.5  25.5  46.8 19.8   0.0  18.4 23.7  19.2  62.4  0.0  62.4
LOS by Move:    A    C     C     D    B     A     B    C     B     E    A     E
HCM2k85thQ:     0   23    23     4    8     0    10   22    13     7    0     7
********************************************************************************
Note: Queue reported is the number of cars per lane.
********************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:04                Page 92-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #91 Tustin Ave and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.614
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        30               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  1  1  0    1  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     239 1275   113   327  862    99    80  180   147    94  208   196
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  239 1275   113   327  862    99    80  180   147    94  208   196
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   239 1275   113   327  862    99    80  180   147    94  208   196
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  239 1275   113   327  862    99    80  180   147    94  208   196
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  239 1275   113   327  862    99    80  180   147    94  208   196
OvlAdjVol:                                                                  32
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.76  0.24  2.00 2.69  0.31  1.00 1.10  0.90  1.00 1.00  1.00
Final Sat.:  3200 4609   391  3200 4506   494  1600 1861  1439  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.28  0.29  0.10 0.19  0.20  0.05 0.10  0.10  0.06 0.12  0.12
OvlAdjV/S:                                                                0.02
Crit Moves:             ****  ****            ****                 ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:05                Page 93-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #92 Tustin Ave and Santa Clara Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.647
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        32               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    2  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     163  789   121   183 1444   100    61  192   113   125  157   148
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  163  789   121   183 1444   100    61  192   113   125  157   148
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   163  789   121   183 1444   100    61  192   113   125  157   148
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  163  789   121   183 1444   100    61  192   113   125  157   148
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  163  789   121   183 1444   100    61  192   113   125  157   148
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 2.60  0.40  2.00 2.81  0.19  1.00 1.26  0.74  1.00 1.03  0.97
Final Sat.:  1600 4362   638  3200 4689   311  1600 2114  1186  1600 1747  1553
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.18  0.19  0.06 0.31  0.32  0.04 0.09  0.10  0.08 0.09  0.10
Crit Moves:  ****                         ****              ****  ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:05                Page 94-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #93 Tustin Ave and 17th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.717
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        39               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  1  0    2  0  3  0  1    2  0  3  0  1
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     216  926   476   346  371    37   444  872   118   229  753   419
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  216  926   476   346  371    37   444  872   118   229  753   419
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   216  926   476   346  371    37   444  872   118   229  753   419
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  216  926   476   346  371    37   444  872   118   229  753   419
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  216  926   476   346  371    37   444  872   118   229  753   419
OvlAdjVol:                362                                              246
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.00  1.00  2.00 2.73  0.27  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 3400  1600  3200 4565   435  3200 5100  1600  3200 5100  1600
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.27  0.30  0.11 0.08  0.08  0.14 0.17  0.07  0.07 0.15  0.26
OvlAdjV/S:                0.23                                             0.15
Crit Moves:       ****        ****             ****                 ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:06                Page 95-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #94 Tustin Ave and 4th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.692
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    2  0  2  0  1    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       55  598   194   459  339   124   180  642    33    88  596   367
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    55  598   194   459  339   124   180  642    33    88  596   367
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     55  598   194   459  339   124   180  642    33    88  596   367
Reduct Vol:      0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    55  598   194   459  339   124   180  642    33    88  596   367
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    55  598   194   459  339   124   180  642    33    88  596   367
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       1.00 2.27  0.73  2.00 2.00  1.00  1.00 2.85  0.15  1.00 2.00  1.00
Final Sat.:  1600 3824  1176  3200 3400  1600  1600 4765   235  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.16  0.16  0.14 0.10  0.08  0.11 0.13  0.14  0.06 0.18  0.23
Crit Moves:       ****        ****             ****                       ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:06                Page 96-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #95 SR-55 SB Ramps / Auto Mall Dr and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.583
Loss Time (sec):       5               Average Delay (sec/veh):        25.1
Optimal Cycle:        29               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  2    1  0  1  0  1    1  0  3  0  1    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     377   30   398   110   50    37    35 1258   354   385 1003   120
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  377   30   398   110   50    37    35 1258   354   385 1003   120
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Volume:   377   30   398   110   50    37    35 1258     0   385 1003   120
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  377   30   398   110   50    37    35 1258     0   385 1003   120
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
FinalVolume:  377   30   398   110   50    37    35 1258     0   385 1003   120
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.96 0.96  0.75  0.95 1.00  0.85  0.95 0.91  1.00  0.92 0.90  0.90
Lanes:       1.85 0.15  2.00  1.00 1.00  1.00  1.00 3.00  1.00  2.00 2.68  0.32
Final Sat.:  3365  268  2842  1805 1900  1615  1805 5187  1900  3502 4559   545
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.11  0.14  0.06 0.03  0.02  0.02 0.24  0.00  0.11 0.22  0.22
Crit Moves:             ****  ****                   ****        ****
Green/Cycle: 0.24 0.24  0.24  0.10 0.10  0.10  0.05 0.42  0.00  0.19 0.56  0.56
Volume/Cap:  0.47 0.47  0.58  0.58 0.25  0.22  0.40 0.58  0.00  0.58 0.40  0.40
Delay/Veh:   32.9 32.9  34.8  47.3 41.8  41.7  49.0 22.9   0.0  38.3 12.7  12.7
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  32.9 32.9  34.8  47.3 41.8  41.7  49.0 22.9   0.0  38.3 12.7  12.7
LOS by Move:    C    C     C     D    D     D     D    C     A     D    B     B
HCM2k85thQ:     9    9    11     6    3     2     2   17     0    10   11    11
*******************************************************************************
```

Note: Queue reported is the number of cars per lane.
****

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:07                Page 97-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #96 SR-55 NB Ramps / Del Amo Ave and Newport Avenue
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.525
Loss Time (sec):       5                Average Delay (sec/veh):        27.4
Optimal Cycle:        26                Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    1  0  3  0  1    2  0  1  1  0    1  0  1  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     583  174    34     8   97   373   104   36    21    23  348    16
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  583  174    34     8   97   373   104   36    21    23  348    16
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   583  174    34     8   97   373   104   36    21    23  348    16
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  583  174    34     8   97   373   104   36    21    23  348    16
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  583  174    34     8   97   373   104   36    21    23  348    16
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 0.89  0.89  0.95 0.91  0.85  0.92 0.90  0.90  0.95 0.94  0.94
Lanes:       2.00 2.51  0.49  1.00 3.00  1.00  2.00 1.26  0.74  1.00 1.91  0.09
Final Sat.:  3502 4235   828  1805 5187  1615  3502 2155  1257  1805 3427   158
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.17 0.04  0.04  0.00 0.02  0.23  0.03 0.02  0.02  0.01 0.10  0.10
Crit Moves:  ****                         ****  ****                   ****
Green/Cycle: 0.32 0.63  0.63  0.07 0.38  0.44  0.06 0.14  0.14  0.11 0.19  0.19
Volume/Cap:  0.53 0.07  0.07  0.07 0.05  0.53  0.53 0.12  0.12  0.12 0.53  0.53
Delay/Veh:   28.5  7.1   7.1  43.8 19.4  21.1  48.5 37.6  37.6  40.6 37.0  37.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  28.5  7.1   7.1  43.8 19.4  21.1  48.5 37.6  37.6  40.6 37.0  37.0
LOS by Move:    C    A     A     D    B     C     D    D     D     D    D     D
HCM2k85thQ:    12    1     1     0    1    13     4    1     1     1    9     9
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:08                Page 98-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #97 Red Hill Ave and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.667
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        34               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Ovl            Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     159 1146   182   145  289   234   327  838   102    62  803   392
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  159 1146   182   145  289   234   327  838   102    62  803   392
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   159 1146   182   145  289   234   327  838   102    62  803   392
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  159 1146   182   145  289   234   327  838   102    62  803   392
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  159 1146   182   145  289   234   327  838   102    62  803   392
OvlAdjVol:                                 70                22
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.22  0.11  0.05 0.06  0.15  0.10 0.16  0.06  0.02 0.16  0.25
OvlAdjV/S:                                 0.04              0.01
Crit Moves:       ****        ****              ****                        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:08                Page 99-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #98 Red Hill Ave and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.588
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        28               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  1  0    2  0  2  1  0    1  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     382 1308   150    58  223   283   222  603    94    25  525    69
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  382 1308   150    58  223   283   222  603    94    25  525    69
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   382 1308   150    58  223   283   222  603    94    25  525    69
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  382 1308   150    58  223   283   222  603    94    25  525    69
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  382 1308   150    58  223   283   222  603    94    25  525    69
OvlAdjVol:                                                                  40
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.59  0.41  2.00 2.00  1.00  1.00 2.60  0.40  2.00 3.00  1.00
Final Sat.:  3200 6042   658  3200 3400  1600  1600 4353   647  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.22  0.23  0.02 0.07  0.18  0.14 0.14  0.15  0.01 0.10  0.04
OvlAdjV/S:                                                                  0.03
Crit Moves:  ****                      ****  ****                 ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:09              Page 100-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #99 Red Hill Ave and Dyer Rd / barranca Pkwy
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.563
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        27               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  4  0  1    2  0  4  0  1    2  0  3  1  0    2  0  4  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     356 1339   345   185  313   147   203  753    99   127  966   282
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  356 1339   345   185  313   147   203  753    99   127  966   282
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   356 1339   345   185  313   147   203  753    99   127  966   282
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  356 1339   345   185  313   147   203  753    99   127  966   282
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  356 1339   345   185  313   147   203  753    99   127  966   282
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 4.00  1.00  2.00 4.00  1.00  2.00 3.54  0.46  2.00 4.00  1.00
Final Sat.:  3200 6800  1600  3200 6800  1600  3200 5956   744  3200 6800  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.20  0.22  0.06 0.05  0.09  0.06 0.13  0.13  0.04 0.14  0.18
Crit Moves:             ****  ****             ****                     ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:09              Page 101-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #100 Red Hill Ave and Alton Pkwy
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.671
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        34               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  2  0  1    2  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      27 1499   217   124  528     4   132  324   166   433   74   267
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   27 1499   217   124  528     4   132  324   166   433   74   267
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    27 1499   217   124  528     4   132  324   166   433   74   267
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   27 1499   217   124  528     4   132  324   166   433   74   267
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   27 1499   217   124  528     4   132  324   166   433   74   267
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 2.00  1.00  2.00 1.00  1.00
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 3400  1600  3200 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.29  0.14  0.08 0.10  0.00  0.08 0.10  0.10  0.14 0.04  0.17
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:10                Page 102-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #101 Red Hill Ave and MacArthur Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.657
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        33               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ignore           Include          Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     125  809    10   286  594  1042   597  275    42    39  818   574
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  125  809    10   286  594  1042   597  275    42    39  818   574
User Adj:    1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
PHF Volume:   125  809    10   286  594     0   597  275    42    39  818     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  125  809    10   286  594     0   597  275    42    39  818     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
FinalVolume:  125  809    10   286  594     0   597  275    42    39  818     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.96  0.04  2.00 3.00  1.00  2.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200 4941    59  3200 5100  1600  3200 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.16  0.17  0.09 0.12  0.00  0.19 0.05  0.03  0.02 0.16  0.00
Crit Moves:             ****  ****            ****                 ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:10              Page 103-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #102 Red Hill Ave and Main St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.774
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        47               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     416  897   242    74  538   292   198  705   191   279 1589    89
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  416  897   242    74  538   292   198  705   191   279 1589    89
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   416  897   242    74  538   292   198  705   191   279 1589    89
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  416  897   242    74  538   292   198  705   191   279 1589    89
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  416  897   242    74  538   292   198  705   191   279 1589    89
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       2.00 2.00  1.00  2.00 2.00  1.00  2.00 2.36  0.64  2.00 2.84  0.16
Final Sat.:  3200 3400  1600  3200 3400  1600  3200 3977  1023  3200 4745   255
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.26  0.15  0.02 0.16  0.18  0.06 0.18  0.19  0.09 0.33  0.35
Crit Moves:  ****                     ****  ****                     ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:11              Page 104-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #103 I-5 SB Ramps and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.431
Loss Time (sec):       5               Average Delay (sec/veh):        18.9
Optimal Cycle:        22               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Ovl             Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  1    2  0  3  0  0    0  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   278    0    61   561  634     0     0  668   183
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   278    0    61   561  634     0     0  668   183
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   278    0    61   561  634     0     0  668   183
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   278    0    61   561  634     0     0  668   183
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   278    0    61   561  634     0     0  668   183
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.92 1.00  0.85  0.92 0.91  1.00  1.00 0.88  0.88
Lanes:       0.00 0.00  0.00  2.00 0.00  1.00  2.00 3.00  0.00  0.00 2.35  0.65
Final Sat.:     0    0     0  3502    0  1615  3502 5187     0     0 3941  1080
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.08 0.00  0.04  0.16 0.12  0.00  0.00 0.17  0.17
Crit Moves:                   ****             ****                   ****
Green/Cycle: 0.00 0.00  0.00  0.18 0.00  0.56  0.37 0.77  0.00  0.00 0.39  0.39
Volume/Cap:  0.00 0.00  0.00  0.43 0.00  0.07  0.43 0.16  0.00  0.00 0.43  0.43
Delay/Veh:    0.0  0.0   0.0  36.6  0.0  10.3  23.7  3.1   0.0   0.0 22.3  22.3
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
```

```
AdjDel/Veh:   0.0  0.0   0.0  36.6  0.0  10.3  23.7  3.1   0.0   0.0 22.3  22.3
LOS by Move:    A    A     A     D    A     B     C    A     A     A    C     C
HCM2k85thQ:     0    0     0     7    0     1    10    3     0     0   11    11
********************************************************************************
Note: Queue reported is the number of cars per lane.
********************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:11                Page 105-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #104 Tustin Ranch Rd and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.606
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        29               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  1    2  0  3  0  0    0  0  3  0  1
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:       0    0     0   653    0    45    54 1795     0     0  548   236
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   653    0    45    54 1795     0     0  548   236
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   653    0    45    54 1795     0     0  548   236
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   653    0    45    54 1795     0     0  548   236
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   653    0    45    54 1795     0     0  548   236
OvlAdjVol:                                                                   0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 0.00  0.00  2.00 0.00  1.00  2.00 3.00  0.00  0.00 3.00  1.00
Final Sat.:     0    0     0  3200    0  1600  3200 5100     0     0 5100  1600
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.20 0.00  0.03  0.02 0.35  0.00  0.00 0.11  0.15
OvlAdjV/S:                                                                0.00
Crit Moves:                    ****                 ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:12                Page 106-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #105 Von Karman Ave and Barranca Pkwy
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):          0.874
Loss Time (sec):       5               Average Delay (sec/veh):       xxxxxx
Optimal Cycle:        74               Level Of Service:                    D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  1  1  0    2  0  2  0  2    2  0  3  0  1    2  0  4  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     224 1290   281    67  343   236   560 1023   143   204  646   220
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  224 1290   281    67  343   236   560 1023   143   204  646   220
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   224 1290   281    67  343   236   560 1023   143   204  646   220
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  224 1290   281    67  343   236   560 1023   143   204  646   220
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  224 1290   281    67  343   236   560 1023   143   204  646   220
OvlAdjVol:                                 0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 1.64  0.36  2.00 2.00  2.00  2.00 3.00  1.00  2.00 4.00  1.00
Final Sat.:  3200 2728   572  3200 3400  3200  3200 5100  1600  3200 6800  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.47  0.49  0.02 0.10  0.07  0.17 0.20  0.09  0.06 0.10  0.14
OvlAdjV/S:                                 0.00
Crit Moves:             ****  ****             ****                       ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:12              Page 107-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #106 Red Hill Avenue and El Camino Real
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.624
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        31               Level Of Service:                  B
******************************************************************************
Street Name:         Red Hill Avenue                   El Camino Real
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    1  0  2  1  0    1  0  1  0  1    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     415 1315   242    20  728    96    70  153   201   199  329    38
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  415 1315   242    20  728    96    70  153   201   199  329    38
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   415 1315   242    20  728    96    70  153   201   199  329    38
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  415 1315   242    20  728    96    70  153   201   199  329    38
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  415 1315   242    20  728    96    70  153   201   199  329    38
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       2.00 3.00  1.00  1.00 2.65  0.35  1.00 1.00  1.00  1.00 0.90  0.10
Final Sat.:  3200 5100  1600  1600 4441   559  1600 1700  1600  1600 1434   166
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.26  0.15  0.01 0.16  0.17  0.04 0.09  0.13  0.12 0.23  0.23
Crit Moves:  ****                     ****  ****                     ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:13                Page 108-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #107 Red Hill Avenue and I-5 NB Ramps
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.626
Loss Time (sec):       5               Average Delay (sec/veh):        23.3
Optimal Cycle:        32               Level Of Service:                 C
*******************************************************************************
Street Name:         Red Hill Avenue                    I-5 NB Ramps
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  0    0  0  3  0  1    0  0  0  0  0    1  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     272 1557     0     0  939   190     0    0     0   256   96   415
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  272 1557     0     0  939   190     0    0     0   256   96   415
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   272 1557     0     0  939   190     0    0     0   256   96   415
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  272 1557     0     0  939   190     0    0     0   256   96   415
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  272 1557     0     0  939   190     0    0     0   256   96   415
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.85  1.00 1.00  1.00  0.83 0.83  0.83
Lanes:       1.00 3.00  0.00  0.00 3.00  1.00  0.00 0.00  0.00  1.45 0.55  1.00
Final Sat.:  1805 5187     0     0 5187  1615     0    0     0  2292  860  1576
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.30  0.00  0.00 0.18  0.12  0.00 0.00  0.00  0.11 0.11  0.26
Crit Moves:  ****                  ****                                    ****
Green/Cycle: 0.24 0.53  0.00  0.00 0.29  0.29  0.00 0.00  0.00  0.42 0.42  0.42
Volume/Cap:  0.63 0.57  0.00  0.00 0.63  0.41  0.00 0.00  0.00  0.27 0.27  0.63
Delay/Veh:   36.8 16.1   0.0   0.0 31.7  29.2   0.0  0.0   0.0  19.0 19.0  23.8
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
```

```
AdjDel/Veh:  36.8 16.1   0.0   0.0 31.7  29.2   0.0  0.0   0.0  19.0 19.0  23.8
LOS by Move:    D    B     A     A    C     C     A    A     A     B    B     C
HCM2k85thQ:    13   18     0     0   15     8     0    0     0     6    6    17
********************************************************************************
Note: Queue reported is the number of cars per lane.
********************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:14              Page 109-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #108 Red Hill Avenue and I-5 SB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.708
Loss Time (sec):       5               Average Delay (sec/veh):        22.8
Optimal Cycle:        40               Level Of Service:                  C
******************************************************************************
Street Name:         Red Hill Avenue                    I-5 SB Ramps
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  1    1  0  3  0  0    0  1  0  0  1    0  0  0  0  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:       0 1521   483   352  846     0   309    3   277     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1521   483   352  846     0   309    3   277     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1521   483   352  846     0   309    3   277     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1521   483   352  846     0   309    3   277     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1521   483   352  846     0   309    3   277     0    0     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  0.85  0.95 0.91  1.00  0.92 0.92  0.85  1.00 1.00  1.00
Lanes:       0.00 4.00  1.00  1.00 3.00  0.00  0.99 0.01  1.00  0.00 0.00  0.00
Final Sat.:     0 6916  1615  1805 5187     0  1733   17  1615     0    0     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.22  0.30  0.20 0.16  0.00  0.18 0.18  0.17  0.00 0.00  0.00
Crit Moves:             ****  ****                 ****
Green/Cycle: 0.00 0.42  0.42  0.28 0.70  0.00  0.25 0.25  0.25  0.00 0.00  0.00
Volume/Cap:  0.00 0.52  0.71  0.71 0.23  0.00  0.71 0.71  0.68  0.00 0.00  0.00
Delay/Veh:    0.0 21.5  27.2  37.3  5.5   0.0  39.3 39.3  38.4   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 21.5  27.2  37.3  5.5   0.0  39.3 39.3  38.4   0.0  0.0   0.0
LOS by Move:    A    C     C     D    A     A     D    D     D     A    A     A
HCM2k85thQ:     0   15    20    17    5     0    15   15    13     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:14              Page 110-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #109 Red Hill Avenue and Nisson Road
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.702
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        37               Level Of Service:                  C
******************************************************************************
Street Name:         Red Hill Avenue                    Nisson Road
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  1  0    1  0  2  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      30 1583    32   168  865    87   247   90    40    48   83   141
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   30 1583    32   168  865    87   247   90    40    48   83   141
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    30 1583    32   168  865    87   247   90    40    48   83   141
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   30 1583    32   168  865    87   247   90    40    48   83   141
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   30 1583    32   168  865    87   247   90    40    48   83   141
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 3.92  0.08  1.00 2.73  0.27  1.00 0.69  0.31  1.00 0.37  0.63
Final Sat.:  1600 6573   127  1600 4561   439  1600 1108   492  1600  593  1007
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.24  0.25  0.11 0.19  0.20  0.15 0.08  0.08  0.03 0.14  0.14
Crit Moves:             ****  ****             ****                   ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:15                Page 111-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #110 Red Hill Avenue and Walnut Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):          0.785
Loss Time (sec):       5               Average Delay (sec/veh):       xxxxxx
Optimal Cycle:        49               Level Of Service:                    C
*******************************************************************************
Street Name:         Red Hill Avenue                   Walnut Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    2  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     287 1395   100   136  422   176   112  269   111   205  682   178
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  287 1395   100   136  422   176   112  269   111   205  682   178
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   287 1395   100   136  422   176   112  269   111   205  682   178
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  287 1395   100   136  422   176   112  269   111   205  682   178
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  287 1395   100   136  422   176   112  269   111   205  682   178
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 2.80  0.20  1.00 2.12  0.88  1.00 1.42  0.58  2.00 1.59  0.41
Final Sat.:  1600 4679   321  1600 3587  1413  1600 2365   935  3200 2638   662
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.18 0.30  0.31  0.09 0.12  0.12  0.07 0.11  0.12  0.06 0.26  0.27
Crit Moves:             ****  ****             ****                    ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:15                Page 112-1
--------------------------------------------------------------------------------
                          Santa Ana Circulation Element
--------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
********************************************************************************
Intersection #111 Red Hill Avenue and Valencia Avenue
********************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.549
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        26               Level Of Service:                  A
********************************************************************************
Street Name:         Red Hill Avenue                 Valencia Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  1  0    1  0  2  1  0    1  0  1  0  1    2  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     220 1637   270   109  438    49    70  189    83   118  171   113
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  220 1637   270   109  438    49    70  189    83   118  171   113
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   220 1637   270   109  438    49    70  189    83   118  171   113
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  220 1637   270   109  438    49    70  189    83   118  171   113
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  220 1637   270   109  438    49    70  189    83   118  171   113
OvlAdjVol:               237                                                 4
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 3.43  0.57  1.00 2.70  0.30  1.00 1.00  1.00  2.00 1.00  1.00
Final Sat.:  1600 5794   906  1600 4517   483  1600 1700  1600  3200 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.28  0.30  0.07 0.10  0.10  0.04 0.11  0.05  0.04 0.10  0.07
OvlAdjV/S:               0.26                                                0.00
Crit Moves:       ****        ****                  ****        ****
********************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:16              Page 113-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #112 Tustin Ranch Road and Warner Avenue North
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.757
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        44               Level Of Service:                  C
*******************************************************************************
Street Name:        Tustin Ranch Road               Warner Avenue North
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  3  0  1    2  0  3  0  0    0  0  0  0  0    3  0  0  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1623   956   351  516     0     0    0     0   479    0   433
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1623   956   351  516     0     0    0     0   479    0   433
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1623   956   351  516     0     0    0     0   479    0   433
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1623   956   351  516     0     0    0     0   479    0   433
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1623   956   351  516     0     0    0     0   479    0   433
OvlAdjVol:              796                                                 82
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 3.00  1.00  2.00 3.00  0.00  0.00 0.00  0.00  3.00 0.00  2.00
Final Sat.:     0 5100  1600  3200 5100     0     0    0     0  4800    0  3200
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.32  0.60  0.11 0.10  0.00  0.00 0.00  0.00  0.10 0.00  0.14
OvlAdjV/S:              0.50                                                0.03
Crit Moves:             ****  ****                          ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:16              Page 114-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #113 Tustin Ranch Road and Walnut Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.630
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Street Name:        Tustin Ranch Road                 Walnut Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Ovl              Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  1  1  0    2  0  2  0  1
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     762 3319   349   454 1206   782   365  447   255   287 1646  1304
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  762 3319   349   454 1206   782   365  447   255   287 1646  1304
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   762 3319   349   454 1206   782   365  447   255   287 1646  1304
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  762 3319   349   454 1206   782   365  447   255   287 1646  1304
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  762 3319   349   454 1206   782   365  447   255   287 1646  1304
OvlAdjVol:               206              600                              1077
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 1.27  0.73  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 2138  1162  3200 3400  1600
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.24 0.65  0.22  0.14 0.24  0.49  0.11 0.21  0.22  0.09 0.48  0.82
OvlAdjV/S:               0.13             0.37                              0.67
Crit Moves:       ****        ****             ****                        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:17              Page 115-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #114 SR-55 SB Ramps and Irvine Boulevard
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.794
Loss Time (sec):       5               Average Delay (sec/veh):        21.5
Optimal Cycle:        53               Level Of Service:                  C
******************************************************************************
Street Name:          SR-55 SB Ramps                  Irvine Boulevard
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected         Permitted       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    1  0  1! 0  1    0  0  2  1  0    1  0  3  0  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:       0    0     0   434    0   259     0  862   581   372 1069     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   434    0   259     0  862   581   372 1069     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   434    0   259     0  862   581   372 1069     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   434    0   259     0  862   581   372 1069     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   434    0   259     0  862   581   372 1069     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.74 1.00  0.73  1.00 0.86  0.86  0.95 0.91  1.00
Lanes:       0.00 0.00  0.00  1.62 0.00  1.38  0.00 2.00  1.00  1.00 3.00  0.00
Final Sat.:     0    0     0  2276    0  1912     0 3251  1625  1805 5187     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.19 0.00  0.14  0.00 0.27  0.36  0.21 0.21  0.00
Crit Moves:                    ****                          ****  ****
Green/Cycle: 0.00 0.00  0.00  0.24 0.00  0.48  0.00 0.45  0.45  0.26 0.71  0.00
Volume/Cap:  0.00 0.00  0.00  0.79 0.00  0.28  0.00 0.59  0.79  0.79 0.29  0.00
Delay/Veh:    0.0  0.0   0.0  40.8  0.0  15.7   0.0 20.9  26.0  43.6  5.3   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0  40.8  0.0  15.7   0.0 20.9  26.0  43.6  5.3   0.0
LOS by Move:    A    A     A     D    A     B     A    C     C     D    A     A
```

```
HCM2k85thQ:     0    0     0    15    0     6     0   17    27    19    7     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2020 NP PM Peak Hour       Thu Oct 22, 2020 13:57:17              Page 116-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #115 SR-55 NB Ramps and Irvine Boulevard
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.809
Loss Time (sec):       5               Average Delay (sec/veh):        19.5
Optimal Cycle:        56               Level Of Service:                  B
*******************************************************************************
Street Name:          SR-55 NB Ramps                  Irvine Boulevard
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:         Permitted       Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1! 0  1    0  0  0  0  0    1  0  3  0  0    0  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     328   16   298     0    0     0   229 1048     0     0 1132   716
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  328   16   298     0    0     0   229 1048     0     0 1132   716
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   328   16   298     0    0     0   229 1048     0     0 1132   716
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  328   16   298     0    0     0   229 1048     0     0 1132   716
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  328   16   298     0    0     0   229 1048     0     0 1132   716
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.86 0.86  0.86  1.00 1.00  1.00  0.95 0.91  1.00  1.00 0.86  0.86
Lanes:       1.50 0.05  1.45  0.00 0.00  0.00  1.00 3.00  0.00  0.00 2.00  1.00
Final Sat.:  2444   79  2370     0    0     0  1805 5187     0     0 3257  1629
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.20  0.13  0.00 0.00  0.00  0.13 0.20  0.00  0.00 0.35  0.44
Crit Moves:       ****                          ****                     ****
Green/Cycle: 0.25 0.25  0.25  0.00 0.00  0.00  0.16 0.70  0.00  0.00 0.54  0.54
Volume/Cap:  0.54 0.81  0.50  0.00 0.00  0.00  0.81 0.29  0.00  0.00 0.64  0.81
Delay/Veh:   33.0 41.5  32.5   0.0  0.0   0.0  56.5  5.7   0.0   0.0 16.4  20.8
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  33.0 41.5  32.5   0.0  0.0   0.0  56.5  5.7   0.0   0.0 16.4  20.8
LOS by Move:    C    D     C     A    A     A     E    A     A     A    B     C
HCM2k85thQ:    10   18     9     0    0     0    14    7     0     0   21    31
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

APPENDIX D.3

ANALYSIS WORKSHEETS –
2045 NP (AM Peak Hour)

Santa Ana Circulation Element

Scenario Report

Scenario:	2045 NP AM Peak Hour
Command:	Default Command
Volume:	2045 NP AM
Geometry:	MPAH
Impact Fee:	Default Impact Fee
Trip Generation:	Default Trip Generation
Trip Distribution:	Default Trip Distribution
Paths:	Default Path
Routes:	Default Route
Configuration:	Default Configuration

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

2045 NP AM Peak Hour Thu Oct 22, 2020 14:09:46 Page 2-1

Santa Ana Circulation Element

Impact Analysis Report
Level Of Service

Intersection	Base LOS	Base Del/Veh	Base V/C	Future LOS	Future Del/Veh	Future V/C	Change in V/C
# 1 Euclid St and 1st St	D	xxxxx	0.858	D	xxxxx	0.858	+ 0.000 V/C
# 2 Euclid St and McFadden Ave	E	xxxxx	0.975	E	xxxxx	0.975	+ 0.000 V/C
# 3 Euclid St and Edinger Ave	E	xxxxx	0.991	E	xxxxx	0.991	+ 0.000 V/C
# 4 Newhope St and Hazard Ave	C	xxxxx	0.777	C	xxxxx	0.777	+ 0.000 V/C
# 5 Newhope St and McFadden Ave	D	xxxxx	0.827	D	xxxxx	0.827	+ 0.000 V/C
# 6 Harbor Blvd and SR-22 WB Off-R	C	28.4	0.738	C	28.4	0.738	+ 0.000 D/V
# 7 Trask Avenue and SR-22 EB On-R	B	12.0	0.516	B	12.0	0.516	+ 0.000 D/V
# 8 Harbor Blvd and Westminster Av	E	xxxxx	0.985	E	xxxxx	0.985	+ 0.000 V/C
# 9 Harbor Blvd and 1st St	C	xxxxx	0.789	C	xxxxx	0.789	+ 0.000 V/C
# 10 Harbor Blvd and McFadden Ave	C	xxxxx	0.788	C	xxxxx	0.788	+ 0.000 V/C
# 11 Harbor Blvd and Edinger Ave	D	xxxxx	0.836	D	xxxxx	0.836	+ 0.000 V/C
# 12 Harbor Blvd and Warner Ave	C	xxxxx	0.789	C	xxxxx	0.789	+ 0.000 V/C
# 13 Harbor Blvd and Segerstrom Ave	E	xxxxx	0.965	E	xxxxx	0.965	+ 0.000 V/C
# 14 MacArthur Blvd and Hyland Ave	B	xxxxx	0.611	B	xxxxx	0.611	+ 0.000 V/C
# 15 MacArthur Blvd and Harbor Blvd	C	xxxxx	0.736	C	xxxxx	0.736	+ 0.000 V/C
# 16 Harbor Blvd and Sunflower Ave	C	xxxxx	0.704	C	xxxxx	0.704	+ 0.000 V/C
# 17 Harbor Blvd and I-405 NB Off-R	B	18.0	0.569	B	18.0	0.569	+ 0.000 D/V
# 18 Harbor Blvd and I-405 SB Off-R	B	15.0	0.612	B	15.0	0.612	+ 0.000 D/V
# 19 Fairview St and Civic Center D	C	xxxxx	0.741	C	xxxxx	0.741	+ 0.000 V/C
# 20 Fairview St and 1st St	D	xxxxx	0.859	D	xxxxx	0.859	+ 0.000 V/C
# 21 Fairview St and McFadden Ave	C	xxxxx	0.799	C	xxxxx	0.799	+ 0.000 V/C
# 22 Fairview St and Edinger Ave	D	xxxxx	0.861	D	xxxxx	0.861	+ 0.000 V/C
# 23 Fairview St and Warner Ave	D	xxxxx	0.816	D	xxxxx	0.816	+ 0.000 V/C
# 24 Fairview St and MacArthur Blvd	B	xxxxx	0.684	B	xxxxx	0.684	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
# 25 Fairview Rd and Sunflower Ave	B	xxxxx	0.697	B	xxxxx	0.697	+ 0.000 V/C
# 26 Greenville St and Edinger Ave	C	xxxxx	0.774	C	xxxxx	0.774	+ 0.000 V/C
# 27 Greenville St and Segerstrom A	D	xxxxx	0.843	D	xxxxx	0.843	+ 0.000 V/C
# 28 Raitt St and McFadden Ave	C	xxxxx	0.778	C	xxxxx	0.778	+ 0.000 V/C
# 29 Raitt St and Edinger Ave	E	xxxxx	0.990	E	xxxxx	0.990	+ 0.000 V/C
# 30 Bear St and MacArthur Blvd	C	xxxxx	0.707	C	xxxxx	0.707	+ 0.000 V/C
# 31 Bristol St and 17th St	D	xxxxx	0.869	D	xxxxx	0.869	+ 0.000 V/C
# 32 Bristol St and Civic Center Dr	E	xxxxx	0.942	E	xxxxx	0.942	+ 0.000 V/C
# 33 Bristol St and Santa Ana Blvd	D	xxxxx	0.806	D	xxxxx	0.806	+ 0.000 V/C
# 34 Bristol St and 1st St	C	xxxxx	0.767	C	xxxxx	0.767	+ 0.000 V/C
# 35 Bristol St and McFadden Ave	E	xxxxx	0.956	E	xxxxx	0.956	+ 0.000 V/C
# 36 Bristol St and Warner Ave	E	xxxxx	0.915	E	xxxxx	0.915	+ 0.000 V/C
# 37 Bristol St and Segerstrom Ave	D	xxxxx	0.811	D	xxxxx	0.811	+ 0.000 V/C
# 38 Bristol St and Alton Ave	A	xxxxx	0.545	A	xxxxx	0.545	+ 0.000 V/C
# 39 Bristol St and MacArthur Blvd	B	xxxxx	0.697	B	xxxxx	0.697	+ 0.000 V/C
# 40 Bristol St and Sunflower Ave	B	xxxxx	0.649	B	xxxxx	0.649	+ 0.000 V/C
# 41 Bristol St and I-405 NB Ramps	C	20.8	0.557	C	20.8	0.557	+ 0.000 D/V
# 42 Bristol St and I-405 SB Ramps	C	23.9	0.696	C	23.9	0.696	+ 0.000 D/V
# 43 Flower St and Santa Ana Blvd	D	xxxxx	0.806	D	xxxxx	0.806	+ 0.000 V/C
# 44 Flower St and 1st St	E	xxxxx	0.926	E	xxxxx	0.926	+ 0.000 V/C
# 45 Flower St and McFadden Ave	E	xxxxx	0.900	E	xxxxx	0.900	+ 0.000 V/C
# 46 Flower St and Segerstrom Ave	C	xxxxx	0.784	C	xxxxx	0.784	+ 0.000 V/C
# 47 Flower St and MacArthur Blvd	B	xxxxx	0.675	B	xxxxx	0.675	+ 0.000 V/C
# 48 Main St and La Veta Ave	A	xxxxx	0.586	A	xxxxx	0.586	+ 0.000 V/C
# 49 Main St and Mainplace Dr / Mem	A	xxxxx	0.512	A	xxxxx	0.512	+ 0.000 V/C
# 50 Main St and 17th St	D	xxxxx	0.884	D	xxxxx	0.884	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
# 51 Main St and Civic Center Dr	C	xxxxx	0.783	C	xxxxx	0.783	+ 0.000 V/C
# 52 Main St and Santa Ana Blvd	E	xxxxx	0.926	E	xxxxx	0.926	+ 0.000 V/C
# 53 Main St and 4th St	A	xxxxx	0.410	A	xxxxx	0.410	+ 0.000 V/C
# 54 Main St and 1st St	B	xxxxx	0.681	B	xxxxx	0.681	+ 0.000 V/C
# 55 Main St and McFadden Ave	D	xxxxx	0.894	D	xxxxx	0.894	+ 0.000 V/C
# 56 Main St and Edinger Ave	C	xxxxx	0.795	C	xxxxx	0.795	+ 0.000 V/C
# 57 Main St and MacArthur Blvd	B	xxxxx	0.680	B	xxxxx	0.680	+ 0.000 V/C
# 58 Penn Wy and 17th St	B	12.2	0.660	B	12.2	0.660	+ 0.000 D/V
# 59 I-5 NB Off Ramps/17th Street	C	30.0	0.710	C	30.0	0.710	+ 0.000 D/V
# 60 Penn Wy and I-5 SB Ramps	C	21.2	0.550	C	21.2	0.550	+ 0.000 D/V
# 61 Santiago St and Civic Center D	F	159.2	1.769	F	159.2	1.769	+ 0.000 V/C
# 62 Santiago St and Santa Ana Blvd	F	xxxxx	1.037	F	xxxxx	1.037	+ 0.000 V/C
# 63 Standard Ave and 4th St	E	xxxxx	0.939	E	xxxxx	0.939	+ 0.000 V/C
# 64 Standard Ave and 1st St	E	xxxxx	0.976	E	xxxxx	0.976	+ 0.000 V/C
# 65 Standard Ave and Mcfadden Ave	D	xxxxx	0.854	D	xxxxx	0.854	+ 0.000 V/C
# 66 Halladay St and Warner Ave	C	xxxxx	0.775	C	xxxxx	0.775	+ 0.000 V/C
# 67 Halladay St and Dyer Rd	C	xxxxx	0.774	C	xxxxx	0.774	+ 0.000 V/C
# 68 SR-55 SB Ramps and MacArthur B	B	19.9	0.608	B	19.9	0.608	+ 0.000 D/V
# 69 SR-55 NB Ramps and MacArthur B	B	19.3	0.712	B	19.3	0.712	+ 0.000 D/V
# 70 SR-55 SB Ramps and Dyer Rd	C	25.7	0.617	C	25.7	0.617	+ 0.000 D/V
# 71 Glassell St and La Veta Ave	D	xxxxx	0.800	D	xxxxx	0.800	+ 0.000 V/C
# 72 Glassell St and SR-22 WB Ramps	C	32.6	0.871	C	32.6	0.871	+ 0.000 D/V
# 73 Grand Ave / Glassell St and SR	C	30.6	0.860	C	30.6	0.860	+ 0.000 D/V
# 74 Grand Ave and Fairhaven Ave	B	xxxxx	0.611	B	xxxxx	0.611	+ 0.000 V/C
# 75 Grand Ave and Santa Clara Ave	D	xxxxx	0.843	D	xxxxx	0.843	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Del/ Veh	V/ C	Future LOS	Del/ Veh	V/ C	Change in
# 76 Grand Ave and 17th St	C	xxxxx	0.794	C	xxxxx	0.794	+ 0.000 V/C
# 77 Grand Ave and I-5 NB Ramps	B	13.2	0.740	B	13.2	0.740	+ 0.000 D/V
# 78 Grand Ave and Santa Ana Blvd	C	26.0	0.832	C	26.0	0.832	+ 0.000 D/V
# 79 Grand Ave and 1st St	C	xxxxx	0.742	C	xxxxx	0.742	+ 0.000 V/C
# 80 Grand Ave and Chestnut Ave	C	xxxxx	0.704	C	xxxxx	0.704	+ 0.000 V/C
# 81 Grand Ave and McFadden Ave	D	xxxxx	0.892	D	xxxxx	0.892	+ 0.000 V/C
# 82 Grand Ave and Edinger Ave	D	xxxxx	0.838	D	xxxxx	0.838	+ 0.000 V/C
# 83 Grand Ave and Warner Ave	B	xxxxx	0.613	B	xxxxx	0.613	+ 0.000 V/C
# 84 SR-55 NB Ramps and Dyer Rd	B	17.1	0.569	B	17.1	0.569	+ 0.000 D/V
# 85 Cambridge St and La Veta Ave	D	31.6	0.971	D	31.6	0.971	+ 0.000 V/C
# 86 Cambridge St and Fairhaven Ave	A	xxxxx	0.563	A	xxxxx	0.563	+ 0.000 V/C
# 87 Mabury St and 1st Street	C	27.4	0.714	C	27.4	0.714	+ 0.000 D/V
# 88 Tustin St and La Veta Ave	A	xxxxx	0.446	A	xxxxx	0.446	+ 0.000 V/C
# 89 Tustin St and SR-22 WB On-Ramp	B	12.2	0.635	B	12.2	0.635	+ 0.000 D/V
# 90 Tustin St and SR-22 EB Off-Ram	C	25.0	0.723	C	25.0	0.723	+ 0.000 D/V
# 91 Tustin Ave and Fairhaven Ave	F	xxxxx	1.195	F	xxxxx	1.195	+ 0.000 V/C
# 92 Tustin Ave and Santa Clara Ave	F	xxxxx	1.037	F	xxxxx	1.037	+ 0.000 V/C
# 93 Tustin Ave and 17th St	E	xxxxx	0.911	E	xxxxx	0.911	+ 0.000 V/C
# 94 Tustin Ave and 4th St	D	xxxxx	0.830	D	xxxxx	0.830	+ 0.000 V/C
# 95 SR-55 SB Ramps / Auto Mall Dr	C	25.2	0.672	C	25.2	0.672	+ 0.000 D/V
# 96 SR-55 NB Ramps / Del Amo Ave a	C	25.4	0.673	C	25.4	0.673	+ 0.000 D/V
# 97 Red Hill Ave and Edinger Ave	B	xxxxx	0.610	B	xxxxx	0.610	+ 0.000 V/C
# 98 Red Hill Ave and Warner Ave	A	xxxxx	0.560	A	xxxxx	0.560	+ 0.000 V/C
# 99 Red Hill Ave and Dyer Rd / bar	A	xxxxx	0.548	A	xxxxx	0.548	+ 0.000 V/C
#100 Red Hill Ave and Alton Pkwy	D	xxxxx	0.855	D	xxxxx	0.855	+ 0.000 V/C
#101 Red Hill Ave and MacArthur Blv	B	xxxxx	0.686	B	xxxxx	0.686	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
#102 Red Hill Ave and Main St	C	xxxxx	0.722	C	xxxxx	0.722	+ 0.000 V/C
#103 I-5 SB Ramps and Santa Ana Blv	B	17.4	0.559	B	17.4	0.559	+ 0.000 D/V
#104 Tustin Ranch Rd and Warner Ave	A	xxxxx	0.520	A	xxxxx	0.520	+ 0.000 V/C
#105 Von Karman Ave and Barranca Pk	E	xxxxx	0.929	E	xxxxx	0.929	+ 0.000 V/C
#106 Red Hill Avenue and El Camino	B	xxxxx	0.650	B	xxxxx	0.650	+ 0.000 V/C
#107 Red Hill Avenue and I-5 NB Ram	C	20.8	0.627	C	20.8	0.627	+ 0.000 D/V
#108 Red Hill Avenue and I-5 SB Ram	C	23.7	0.799	C	23.7	0.799	+ 0.000 D/V
#109 Red Hill Avenue and Nisson Roa	B	xxxxx	0.651	B	xxxxx	0.651	+ 0.000 V/C
#110 Red Hill Avenue and Walnut Ave	B	xxxxx	0.636	B	xxxxx	0.636	+ 0.000 V/C
#111 Red Hill Avenue and Valencia A	B	xxxxx	0.652	B	xxxxx	0.652	+ 0.000 V/C
#112 Tustin Ranch Road and Warner A	A	xxxxx	0.449	A	xxxxx	0.449	+ 0.000 V/C
#113 Tustin Ranch Road and Walnut A	F	xxxxx	1.273	F	xxxxx	1.273	+ 0.000 V/C
#114 SR-55 SB Ramps and Irvine Boul	D	41.0	1.099	D	41.0	1.099	+ 0.000 D/V
#115 SR-55 NB Ramps and Irvine Boul	C	23.5	0.906	C	23.5	0.906	+ 0.000 D/V

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:48                 Page 3-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #1 Euclid St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.858
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        68               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include        WideBypass       WideBypass
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     103  870   149   200 1785   101   252  937   177   190  606   194
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  103  870   149   200 1785   101   252  937   177   190  606   194
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   103  870   149   200 1785   101   252  937   177   190  606   194
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  103  870   149   200 1785   101   252  937   177   190  606   194
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  103  870   149   200 1785   101   252  937   177   190  606   194
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 2.56  0.44  1.00 2.84  0.16  1.00 2.52  0.48  1.00 2.27  0.73
Final Sat.:  1600 4298   702  1600 4743   257  1600 4237   763  1600 3836  1164
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.20  0.21  0.13 0.38  0.39  0.16 0.22  0.23  0.12 0.16  0.17
Crit Moves:  ****                ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:48                 Page 4-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #2 Euclid St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.975
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       172               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     162 1227   146   148 2062   171   255  521   323   151  335   127
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  162 1227   146   148 2062   171   255  521   323   151  335   127
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   162 1227   146   148 2062   171   255  521   323   151  335   127
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  162 1227   146   148 2062   171   255  521   323   151  335   127
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  162 1227   146   148 2062   171   255  521   323   151  335   127
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       1.00 2.68  0.32  1.00 2.77  0.23  1.00 1.23  0.77  1.00 1.45  0.55
Final Sat.:  1600 4490   510  1600 4632   368  1600 2075  1225  1600 2420   880
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.27  0.29  0.09 0.45  0.47  0.16 0.25  0.26  0.09 0.14  0.14
Crit Moves:  ****                ****             ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:49                 Page 5-1
-------------------------------------------------------------------------------
                        Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #3 Euclid St and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.991
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  2  0  1    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     127  801    68   168 2442   224   160  700   428   125  761   139
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  127  801    68   168 2442   224   160  700   428   125  761   139
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   127  801    68   168 2442   224   160  700   428   125  761   139
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  127  801    68   168 2442   224   160  700   428   125  761   139
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  127  801    68   168 2442   224   160  700   428   125  761   139
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.77  0.23  2.00 2.75  0.25  1.00 2.00  1.00  1.00 2.00  1.00
Final Sat.:  3200 4624   376  3200 4597   403  1600 3400  1600  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.17  0.18  0.05 0.53  0.56  0.10 0.21  0.27  0.08 0.22  0.09
Crit Moves:  ****                 ****             ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:50                 Page 6-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #4 Newhope St and Hazard Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.777
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        48               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      78  590    84    88 1302   119   108  276   204   119  397   159
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   78  590    84    88 1302   119   108  276   204   119  397   159
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    78  590    84    88 1302   119   108  276   204   119  397   159
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   78  590    84    88 1302   119   108  276   204   119  397   159
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   78  590    84    88 1302   119   108  276   204   119  397   159
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.03  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       1.00 1.75  0.25  1.00 1.83  0.17  1.00 1.15  0.85  1.00 1.43  0.57
Final Sat.:  1600 2901   399  1600 3032   268  1600 1940  1360  1600 2385   915
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.20  0.21  0.06 0.43  0.44  0.07 0.14  0.15  0.07 0.17  0.17
Crit Moves:  ****                     ****  ****                    ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:50                 Page 7-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #5 Newhope St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.827
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        58               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      77  342   120   122 1213   113   135  492   160   190  484   108
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   77  342   120   122 1213   113   135  492   160   190  484   108
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    77  342   120   122 1213   113   135  492   160   190  484   108
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   77  342   120   122 1213   113   135  492   160   190  484   108
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   77  342   120   122 1213   113   135  492   160   190  484   108
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.48  0.52  1.00 1.83  0.17  1.00 1.51  0.49  1.00 1.64  0.36
Final Sat.:  1600 2469   831  1600 3027   273  1600 2515   785  1600 2716   584
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.14  0.14  0.08 0.40  0.41  0.08 0.20  0.20  0.12 0.18  0.19
Crit Moves:  ****                      ****       ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:51                 Page 8-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #6 Harbor Blvd and SR-22 WB Off-Ramp / Banner Dr
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.738
Loss Time (sec):       5               Average Delay (sec/veh):        28.4
Optimal Cycle:        43               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  0    0  0  2  1  0    0  0  1! 0  0    1  1  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      84 1534     0     0 1465    19    81    0   133   836   44   117
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   84 1534     0     0 1465    19    81    0   133   836   44   117
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    84 1534     0     0 1465    19    81    0   133   836   44   117
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   84 1534     0     0 1465    19    81    0   133   836   44   117
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   84 1534     0     0 1465    19    81    0   133   836   44   117
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.91  0.90 1.00  0.90  0.96 0.96  0.85
Lanes:       1.00 3.00  0.00  0.00 2.96  0.04  0.38 0.00  0.62  1.90 0.10  1.00
Final Sat.:  1805 5187     0     0 5110    66   646    0  1061  3448  181  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.30  0.00  0.00 0.29  0.29  0.13 0.00  0.13  0.24 0.24  0.07
Crit Moves:  ****                 ****        ****                 ****
Green/Cycle: 0.06 0.45  0.00  0.00 0.39  0.39  0.17 0.00  0.17  0.33 0.33  0.33
Volume/Cap:  0.74 0.65  0.00  0.00 0.74  0.74  0.74 0.00  0.74  0.74 0.74  0.22
Delay/Veh:   68.3 22.0   0.0   0.0 27.7  27.7  49.0  0.0  49.0  32.2 32.2  24.5
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  68.3 22.0   0.0   0.0 27.7  27.7  49.0  0.0  49.0  32.2 32.2  24.5
LOS by Move:    E    C     A     A    C     C     D    A     D     C    C     C
HCM2k85thQ:     7   21     0     0   23    23    12    0    12    20   20     4
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:52                  Page 9-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #7 Trask Avenue and SR-22 EB On-Ramp
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.516
Loss Time (sec):       5               Average Delay (sec/veh):        12.0
Optimal Cycle:        26               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    0  0  0  0  0    2  0  1  0  0    0  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0     0    0     0   713  893     0     0  852   159
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0     0    0     0   713  893     0     0  852   159
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0     0    0     0   713  893     0     0  852   159
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0     0    0     0   713  893     0     0  852   159
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0     0    0     0   713  893     0     0  852   159
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  0.92 1.00  1.00  1.00 0.93  0.93
Lanes:       0.00 0.00  0.00  0.00 0.00  0.00  2.00 1.00  0.00  0.00 1.69  0.31
Final Sat.:     0    0     0     0    0     0  3502 1900     0     0 2969   554
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.00 0.00  0.00  0.20 0.47  0.00  0.00 0.29  0.29
Crit Moves:                                     ****                   ****
Green/Cycle: 0.00 0.00  0.00  0.00 0.00  0.00  0.39 0.95  0.00  0.00 0.56  0.56
Volume/Cap:  0.00 0.00  0.00  0.00 0.00  0.00  0.52 0.49  0.00  0.00 0.52  0.52
Delay/Veh:    0.0  0.0   0.0   0.0  0.0   0.0  23.4  0.5   0.0   0.0 14.1  14.1
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0   0.0  0.0   0.0  23.4  0.5   0.0   0.0 14.1  14.1
LOS by Move:    A    A     A     A    A     A     C    A     A     A    B     B
HCM2k85thQ:     0    0     0     0    0     0    13    5     0     0   16    16
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:53                Page 10-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #8 Harbor Blvd and Westminster Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.985
Loss Time (sec):       0               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  2  1  0    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     178 1173   251   258 2021   115   192 1010    36   415 1124   306
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  178 1173   251   258 2021   115   192 1010    36   415 1124   306
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   178 1173   251   258 2021   115   192 1010    36   415 1124   306
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  178 1173   251   258 2021   115   192 1010    36   415 1124   306
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  178 1173   251   258 2021   115   192 1010    36   415 1124   306
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 2.90  0.10  1.00 3.00  1.00
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 4835   165  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.23  0.16  0.16 0.40  0.07  0.12 0.21  0.22  0.26 0.22  0.19
Crit Moves:  ****               ****                   ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:53                Page 11-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #9 Harbor Blvd and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.789
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        50               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      95  756   163   236 1989   129   138  919   178   196  497   116
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   95  756   163   236 1989   129   138  919   178   196  497   116
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    95  756   163   236 1989   129   138  919   178   196  497   116
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   95  756   163   236 1989   129   138  919   178   196  497   116
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   95  756   163   236 1989   129   138  919   178   196  497   116
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  2.00 2.51  0.49  2.00 2.43  0.57
Final Sat.:  1600 5100  1600  1600 5100  1600  3200 4221   779  3200 4092   908
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.15  0.10  0.15 0.39  0.08  0.04 0.22  0.23  0.06 0.12  0.13
Crit Moves:  ****               ****                   ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:54                Page 12-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #10 Harbor Blvd and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.788
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        50               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     104 1059   101   190 2004    67   177  462   138   138  311    89
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  104 1059   101   190 2004    67   177  462   138   138  311    89
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   104 1059   101   190 2004    67   177  462   138   138  311    89
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  104 1059   101   190 2004    67   177  462   138   138  311    89
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  104 1059   101   190 2004    67   177  462   138   138  311    89
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       2.00 3.00  1.00  2.00 2.90  0.10  1.00 1.54  0.46  1.00 1.56  0.44
Final Sat.:  3200 5100  1600  3200 4845   155  1600 2564   736  1600 2588   712
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.21  0.06  0.06 0.41  0.43  0.11 0.18  0.19  0.09 0.12  0.13
Crit Moves:  ****                ****             ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:54                Page 13-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #11 Harbor Blvd and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.836
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        61               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     103  772   146   204 2349    68   123  743   373   191  424   176
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  103  772   146   204 2349    68   123  743   373   191  424   176
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   103  772   146   204 2349    68   123  743   373   191  424   176
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  103  772   146   204 2349    68   123  743   373   191  424   176
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  103  772   146   204 2349    68   123  743   373   191  424   176
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 3400  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.15  0.09  0.06 0.46  0.04  0.04 0.22  0.23  0.06 0.08  0.11
Crit Moves:  ****               ****                   ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:55                Page 14-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #12 Harbor Blvd and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.789
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        50               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     109  665   169   429 1933   116   101 1440   379   138  723   122
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  109  665   169   429 1933   116   101 1440   379   138  723   122
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   109  665   169   429 1933   116   101 1440   379   138  723   122
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  109  665   169   429 1933   116   101 1440   379   138  723   122
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  109  665   169   429 1933   116   101 1440   379   138  723   122
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.39  0.61  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 4027   973  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.17  0.17  0.13 0.38  0.07  0.03 0.28  0.24  0.04 0.14  0.08
Crit Moves:  ****                ****             ****             ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:56                Page 15-1
--------------------------------------------------------------------------------
                         Santa Ana Circulation Element
--------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
********************************************************************************
Intersection #13 Harbor Blvd and Segerstrom Ave
********************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.965
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       152               Level Of Service:                  E
********************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     107  759    48   169 2274    85    82  689   278   140  434    98
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  107  759    48   169 2274    85    82  689   278   140  434    98
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   107  759    48   169 2274    85    82  689   278   140  434    98
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  107  759    48   169 2274    85    82  689   278   140  434    98
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  107  759    48   169 2274    85    82  689   278   140  434    98
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 2.82  0.18  1.00 2.89  0.11  1.00 1.43  0.57  1.00 2.00  1.00
Final Sat.:  3200 4714   286  1600 4827   173  1600 2380   920  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.16  0.17  0.11 0.47  0.49  0.05 0.29  0.30  0.09 0.13  0.06
Crit Moves:  ****                ****             ****  ****
********************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:56                Page 16-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #14 MacArthur Blvd and Hyland Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.611
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        30               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  1  0    1  0  1  0  1    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      86    4    24     8    2    19     7 1934   767    68  517    21
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   86    4    24     8    2    19     7 1934   767    68  517    21
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    86    4    24     8    2    19     7 1934   767    68  517    21
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   86    4    24     8    2    19     7 1934   767    68  517    21
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   86    4    24     8    2    19     7 1934   767    68  517    21
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 0.14  0.86  1.00 1.00  1.00  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200  229  1371  1600 1700  1600  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.02  0.02  0.01 0.00  0.01  0.00 0.38  0.48  0.04 0.10  0.01
Crit Moves:  ****                     ****              ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:57                Page 17-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #15 MacArthur Blvd and Harbor Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.736
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        41               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     131  920    94   295 1701   118   131 1183   357   128  427   127
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  131  920    94   295 1701   118   131 1183   357   128  427   127
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   131  920    94   295 1701   118   131 1183   357   128  427   127
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  131  920    94   295 1701   118   131 1183   357   128  427   127
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  131  920    94   295 1701   118   131 1183   357   128  427   127
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.18  0.06  0.09 0.33  0.07  0.08 0.23  0.22  0.08 0.08  0.08
Crit Moves:  ****               ****             ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:57                Page 18-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #16 Harbor Blvd and Sunflower Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.704
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  1  1  0    1  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     221 1128   209   233 2204    54    13  153    59   139  178   101
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  221 1128   209   233 2204    54    13  153    59   139  178   101
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   221 1128   209   233 2204    54    13  153    59   139  178   101
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  221 1128   209   233 2204    54    13  153    59   139  178   101
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  221 1128   209   233 2204    54    13  153    59   139  178   101
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 1.44  0.56  1.00 1.28  0.72
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 2409   891  1601 2146  1153
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.22  0.13  0.07 0.43  0.03  0.01 0.06  0.07  0.09 0.08  0.09
Crit Moves:  ****               ****                   ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:09:58                Page 19-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #17 Harbor Blvd and I-405 NB Off-Ramp
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.569
Loss Time (sec):       5               Average Delay (sec/veh):        18.0
Optimal Cycle:        28               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  0    0  0  4  0  0    0  0  0  0  0    1  0  1! 0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1915     0     0 1978     0     0    0     0   399    0   702
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1915     0     0 1978     0     0    0     0   399    0   702
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1915     0     0 1978     0     0    0     0   399    0   702
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1915     0     0 1978     0     0    0     0   399    0   702
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1915     0     0 1978     0     0    0     0   399    0   702
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  1.00  1.00 0.91  1.00  1.00 1.00  1.00  0.89 1.00  0.89
Lanes:       0.00 4.00  0.00  0.00 4.00  0.00  0.00 0.00  0.00  1.36 0.00  1.64
Final Sat.:     0 6916     0     0 6916     0     0    0     0  2298    0  2762
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.28  0.00  0.00 0.29  0.00  0.00 0.00  0.00  0.17 0.00  0.25
Crit Moves:  ****                 ****                                     ****
Green/Cycle: 0.00 0.50  0.00  0.00 0.50  0.00  0.00 0.00  0.00  0.45 0.00  0.45
Volume/Cap:  0.00 0.55  0.00  0.00 0.57  0.00  0.00 0.00  0.00  0.39 0.00  0.57
Delay/Veh:    0.0 17.3   0.0   0.0 17.5   0.0   0.0  0.0   0.0  18.6  0.0  20.9
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 17.3   0.0   0.0 17.5   0.0   0.0  0.0   0.0  18.6  0.0  20.9
LOS by Move:    A    B     A     A    B     A     A    A     A     B    A     C
HCM2k85thQ:     0   17     0     0   18     0     0    0     0     9    0    15
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:00                Page 20-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #18 Harbor Blvd and I-405 SB Off-Ramp
******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.612
Loss Time (sec):       5                Average Delay (sec/veh):        15.0
Optimal Cycle:        31                Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Ignore           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  3  0  1    0  0  4  0  0    1  0  1! 0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1963     0     0 1253     0   475    0   529     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1963     0     0 1253     0   475    0   529     0    0     0
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1963     0     0 1253     0   475    0   529     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1963     0     0 1253     0   475    0   529     0    0     0
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1963     0     0 1253     0   475    0   529     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  1.00  1.00 0.91  1.00  0.90 1.00  0.90  1.00 1.00  1.00
Lanes:       0.00 3.00  1.00  0.00 4.00  0.00  1.47 0.00  1.53  0.00 0.00  0.00
Final Sat.:     0 5187  1900     0 6916     0  2519    0  2610     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.38  0.00  0.00 0.18  0.00  0.19 0.00  0.20  0.00 0.00  0.00
Crit Moves:       ****        ****                     ****
Green/Cycle: 0.00 0.62  0.00  0.00 0.62  0.00  0.33 0.00  0.33  0.00 0.00  0.00
Volume/Cap:  0.00 0.61  0.00  0.00 0.29  0.00  0.57 0.00  0.61  0.00 0.00  0.00
Delay/Veh:    0.0 12.0   0.0   0.0  8.9   0.0  28.0  0.0  28.7   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 12.0   0.0   0.0  8.9   0.0  28.0  0.0  28.7   0.0  0.0   0.0
LOS by Move:    A    B     A     A    A     A     C    A     C     A    A     A
HCM2k85thQ:     0   21     0     0    8     0    13    0    15     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #19 Fairview St and Civic Center Dr

Cycle (sec):	100	Critical Vol./Cap.(X):	0.741
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	42	Level Of Service:	C

Approach:	North Bound				South Bound				East Bound				West Bound			
Movement:	L	- T	- R		L	- T	- R		L	- T	- R		L	- T	- R	
Control:	Protected				Protected				Split Phase				Split Phase			
Rights:	WideBypass				Include				Include				Include			
Min. Green:	0	0	0		0	0	0		0	0	0		0	0	0	
Y+R:	4.0	4.0	4.0		4.0	4.0	4.0		4.0	4.0	4.0		4.0	4.0	4.0	
Lanes:	1	0 2	1	0	1	0 2	1	0	0	1 0	1	0	1	1 0	0	1
Volume Module:																
Base Vol:	7	1569	508		332	1915	8		7	25	25		100	3	52	
Growth Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
Initial Bse:	7	1569	508		332	1915	8		7	25	25		100	3	52	
User Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
PHF Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
PHF Volume:	7	1569	508		332	1915	8		7	25	25		100	3	52	
Reduct Vol:	0	0	0		0	0	0		0	0	0		0	0	0	
Reduced Vol:	7	1569	508		332	1915	8		7	25	25		100	3	52	
PCE Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
MLF Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
FinalVolume:	7	1569	508		332	1915	8		7	25	25		100	3	52	
Saturation Flow Module:																
Sat/Lane:	1600	1600	1600		1600	1600	1600		1600	1600	1600		1600	1600	1600	
Adjustment:	1.00	1.06	1.00		1.00	1.04	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
Lanes:	1.00	2.27	0.73		1.00	2.99	0.01		0.24	0.88	0.88		1.94	0.06	1.00	
Final Sat.:	1600	3826	1174		1600	4980	20		393	1404	1404		3107	93	1600	
Capacity Analysis Module:																
Vol/Sat:	0.00	0.41	0.43		0.21	0.38	0.40		0.02	0.02	0.02		0.03	0.03	0.03	
Crit Moves:			****		****					****					****	

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:01                Page 22-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #20 Fairview St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.859
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        68               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     200 1538   289   245 1426   164   200 1153   179   120  539   181
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  200 1538   289   245 1426   164   200 1153   179   120  539   181
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   200 1538   289   245 1426   164   200 1153   179   120  539   181
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  200 1538   289   245 1426   164   200 1153   179   120  539   181
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  200 1538   289   245 1426   164   200 1153   179   120  539   181
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 3.00  1.00  1.00 2.69  0.31  1.00 2.60  0.40  1.00 2.25  0.75
Final Sat.:  1600 5100  1600  1600 4505   495  1600 4355   645  1600 3793  1207
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.30  0.18  0.15 0.32  0.33  0.13 0.26  0.28  0.08 0.14  0.15
Crit Moves:  ****                     ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:02                Page 23-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #21 Fairview St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.799
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        52               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     141 1510   202   154 1878   136   221  522   120   147  380    30
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  141 1510   202   154 1878   136   221  522   120   147  380    30
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   141 1510   202   154 1878   136   221  522   120   147  380    30
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  141 1510   202   154 1878   136   221  522   120   147  380    30
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  141 1510   202   154 1878   136   221  522   120   147  380    30
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.03  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 1.63  0.37  1.00 1.85  0.15
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 2702   598  1600 3066   234
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.30  0.13  0.10 0.37  0.09  0.14 0.19  0.20  0.09 0.12  0.13
Crit Moves:  ****               ****                    ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:02                Page 24-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #22 Fairview St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.861
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        69               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     200  883   123   223 1558   132   361 1002   268   421  553   110
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  200  883   123   223 1558   132   361 1002   268   421  553   110
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   200  883   123   223 1558   132   361 1002   268   421  553   110
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  200  883   123   223 1558   132   361 1002   268   421  553   110
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  200  883   123   223 1558   132   361 1002   268   421  553   110
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 2.63  0.37  2.00 2.77  0.23  2.00 2.37  0.63  2.00 2.50  0.50
Final Sat.:  3200 4413   587  3200 4625   375  3200 3987  1013  3200 4204   796
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.20  0.21  0.07 0.34  0.35  0.11 0.25  0.26  0.13 0.13  0.14
Crit Moves:  ****                ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:03                Page 25-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #23 Fairview St and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.816
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        55               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     222  981   129   194 1543   113    68  991   295   267  807   261
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  222  981   129   194 1543   113    68  991   295   267  807   261
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   222  981   129   194 1543   113    68  991   295   267  807   261
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  222  981   129   194 1543   113    68  991   295   267  807   261
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  222  981   129   194 1543   113    68  991   295   267  807   261
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 2.65  0.35  2.00 2.80  0.20  2.00 2.31  0.69  2.00 2.27  0.73
Final Sat.:  3200 4442   558  3200 4672   328  3200 3899  1101  3200 3827  1173
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.22  0.23  0.06 0.33  0.35  0.02 0.25  0.27  0.08 0.21  0.22
Crit Moves:  ****                ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:03                Page 26-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #24 Fairview St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.684
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     261  811    94   290 1460   163   121  984   145   235  494   140
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  261  811    94   290 1460   163   121  984   145   235  494   140
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   261  811    94   290 1460   163   121  984   145   235  494   140
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  261  811    94   290 1460   163   121  984   145   235  494   140
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  261  811    94   290 1460   163   121  984   145   235  494   140
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.69  0.31  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 4501   499  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.18  0.19  0.09 0.29  0.10  0.04 0.19  0.09  0.07 0.10  0.09
Crit Moves:  ****               ****             ****             ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:04                Page 27-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #25 Fairview Rd and Sunflower Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.697
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        37               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  1  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     185 1071   163   191 1627   104    49  322    65   357  299   154
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  185 1071   163   191 1627   104    49  322    65   357  299   154
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   185 1071   163   191 1627   104    49  322    65   357  299   154
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  185 1071   163   191 1627   104    49  322    65   357  299   154
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  185 1071   163   191 1627   104    49  322    65   357  299   154
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.82  0.18  2.00 1.66  0.34  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 4712   288  3200 2763   537  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.21  0.10  0.06 0.35  0.36  0.02 0.12  0.12  0.11 0.09  0.10
Crit Moves:  ****                ****        ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:05                Page 28-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #26 Greenville St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.774
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        47               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    0  0  0  0  0    0  0  2  1  0    1  0  3  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     186    0   251     0    0     0     0 1821   444   153  813     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  186    0   251     0    0     0     0 1821   444   153  813     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   186    0   251     0    0     0     0 1821   444   153  813     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  186    0   251     0    0     0     0 1821   444   153  813     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  186    0   251     0    0     0     0 1821   444   153  813     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 0.00  1.00  0.00 0.00  0.00  0.00 2.41  0.59  1.00 3.00  0.00
Final Sat.:  1600    0  1600     0    0     0     0 4059   941  1600 5100     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.00  0.16  0.00 0.00  0.00  0.00 0.45  0.47  0.10 0.16  0.00
Crit Moves:             ****                                 ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:05                Page 29-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #27 Greenville St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.843
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        63               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      47  193    78   154  472   160    46 1035   165   190  768    88
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   47  193    78   154  472   160    46 1035   165   190  768    88
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    47  193    78   154  472   160    46 1035   165   190  768    88
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   47  193    78   154  472   160    46 1035   165   190  768    88
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   47  193    78   154  472   160    46 1035   165   190  768    88
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 0.71  0.29  1.00 0.75  0.25  1.00 2.59  0.41  1.00 2.69  0.31
Final Sat.:  1600 1139   461  1600 1195   405  1600 4340   660  1600 4507   493
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.17  0.17  0.10 0.39  0.40  0.03 0.24  0.25  0.12 0.17  0.18
Crit Moves:  ****                ****             ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:06                Page 30-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #28 Raitt St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.778
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        48               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      67  618    98   123  938   128   122  743    95   146  461    82
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   67  618    98   123  938   128   122  743    95   146  461    82
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    67  618    98   123  938   128   122  743    95   146  461    82
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   67  618    98   123  938   128   122  743    95   146  461    82
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   67  618    98   123  938   128   122  743    95   146  461    82
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.73  0.27  1.00 1.76  0.24  1.00 1.77  0.23  1.00 1.70  0.30
Final Sat.:  1600 2862   438  1600 2916   384  1600 2937   363  1600 2817   483
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.22  0.22  0.08 0.32  0.33  0.08 0.25  0.26  0.09 0.16  0.17
Crit Moves:  ****                ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:06                Page 31-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #29 Raitt St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.990
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     197  524   189   163  770    91   324 1980   285   122  954    56
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  197  524   189   163  770    91   324 1980   285   122  954    56
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   197  524   189   163  770    91   324 1980   285   122  954    56
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  197  524   189   163  770    91   324 1980   285   122  954    56
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  197  524   189   163  770    91   324 1980   285   122  954    56
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.03  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       1.00 1.47  0.53  1.00 1.79  0.21  1.00 2.62  0.38  1.00 2.83  0.17
Final Sat.:  1600 2452   848  1600 2962   338  1600 4396   604  1600 4734   266
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.21  0.22  0.10 0.26  0.27  0.20 0.45  0.47  0.08 0.20  0.21
Crit Moves:  ****                     ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:07                Page 32-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #30 Bear St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.707
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  2  0  1    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      71  245   104   199  756   300    92 1581   108    62 1041    88
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   71  245   104   199  756   300    92 1581   108    62 1041    88
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    71  245   104   199  756   300    92 1581   108    62 1041    88
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   71  245   104   199  756   300    92 1581   108    62 1041    88
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   71  245   104   199  756   300    92 1581   108    62 1041    88
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 2.00  1.00  1.00 2.00  1.00  1.00 2.81  0.19  1.00 2.77  0.23
Final Sat.:  1600 3400  1600  1600 3400  1600  1600 4693   307  1600 4626   374
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.07  0.07  0.12 0.22  0.19  0.06 0.34  0.35  0.04 0.23  0.24
Crit Moves:  ****                ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:08                Page 33-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #31 Bristol St and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.869
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        72               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     251 1292   218   487 2001   263   324  963   156   368  845   280
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  251 1292   218   487 2001   263   324  963   156   368  845   280
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   251 1292   218   487 2001   263   324  963   156   368  845   280
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  251 1292   218   487 2001   263   324  963   156   368  845   280
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  251 1292   218   487 2001   263   324  963   156   368  845   280
OvlAdjVol:                                                                  36
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.58  0.42  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 4331   669  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.25  0.14  0.15 0.39  0.16  0.10 0.22  0.23  0.12 0.17  0.17
OvlAdjV/S:                                                                  0.02
Crit Moves:  ****                 ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:08                Page 34-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #32 Bristol St and Civic Center Dr
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.942
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       120               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     133 1178   104   403 1628   101   165  836   103   127  421    87
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  133 1178   104   403 1628   101   165  836   103   127  421    87
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   133 1178   104   403 1628   101   165  836   103   127  421    87
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  133 1178   104   403 1628   101   165  836   103   127  421    87
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  133 1178   104   403 1628   101   165  836   103   127  421    87
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 2.76  0.24  1.00 2.82  0.18  1.00 1.78  0.22  1.00 1.66  0.34
Final Sat.:  1600 4611   389  1600 4720   280  1600 2949   351  1600 2752   548
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.26  0.27  0.25 0.34  0.36  0.10 0.28  0.29  0.08 0.15  0.16
Crit Moves:             ****  ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:09                Page 35-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #33 Bristol St and Santa Ana Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.806
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        53               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      69 1502   209   153 1684    46   171  831    72   185  462    79
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   69 1502   209   153 1684    46   171  831    72   185  462    79
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    69 1502   209   153 1684    46   171  831    72   185  462    79
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   69 1502   209   153 1684    46   171  831    72   185  462    79
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   69 1502   209   153 1684    46   171  831    72   185  462    79
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.63  0.37  1.00 2.92  0.08  1.00 2.76  0.24  1.00 2.56  0.44
Final Sat.:  1600 4414   586  1600 4872   128  1600 4617   383  1600 4299   701
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.34  0.36  0.10 0.35  0.36  0.11 0.18  0.19  0.12 0.11  0.11
Crit Moves:             ****  ****                          ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:10                Page 36-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #34 Bristol St and 1st St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.767
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        46               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     205 1430   181   315 1298   183   200 1231   124    90  678    99
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  205 1430   181   315 1298   183   200 1231   124    90  678    99
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   205 1430   181   315 1298   183   200 1231   124    90  678    99
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  205 1430   181   315 1298   183   200 1231   124    90  678    99
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  205 1430   181   315 1298   183   200 1231   124    90  678    99
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 2.73  0.27  1.00 2.62  0.38
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 4561   439  1600 4388   612
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.28  0.11  0.10 0.25  0.11  0.13 0.27  0.28  0.06 0.15  0.16
Crit Moves:       ****        ****                     ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:10                Page 37-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #35 Bristol St and McFadden Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.956
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       139               Level Of Service:                  E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     125 1117    56   204 1986   205   309  531   261   262  729    84
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  125 1117    56   204 1986   205   309  531   261   262  729    84
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   125 1117    56   204 1986   205   309  531   261   262  729    84
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  125 1117    56   204 1986   205   309  531   261   262  729    84
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  125 1117    56   204 1986   205   309  531   261   262  729    84
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.03  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 1.34  0.66  1.00 1.79  0.21
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 2245  1055  1600 2969   331
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.22  0.04  0.13 0.39  0.13  0.19 0.24  0.25  0.16 0.25  0.25
Crit Moves:  ****               ****        ****                   ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:11                Page 38-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #36 Bristol St and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.915
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        96               Level Of Service:                  E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     221  993   183   600 2033   230   165  919   229   231 1058   180
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  221  993   183   600 2033   230   165  919   229   231 1058   180
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   221  993   183   600 2033   230   165  919   229   231 1058   180
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  221  993   183   600 2033   230   165  919   229   231 1058   180
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  221  993   183   600 2033   230   165  919   229   231 1058   180
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.53  0.47  2.00 2.70  0.30  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200 4253   747  3200 4512   488  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.23  0.24  0.19 0.45  0.47  0.10 0.18  0.14  0.14 0.21  0.11
Crit Moves:  ****                ****        ****        ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:11                Page 39-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #37 Bristol St and Segerstrom Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.811
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        54               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      70  778   146   283 1011   119   280 1354   125   134  607    78
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   70  778   146   283 1011   119   280 1354   125   134  607    78
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    70  778   146   283 1011   119   280 1354   125   134  607    78
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   70  778   146   283 1011   119   280 1354   125   134  607    78
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   70  778   146   283 1011   119   280 1354   125   134  607    78
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.53  0.47  1.00 2.68  0.32  1.00 2.75  0.25  1.00 2.66  0.34
Final Sat.:  1600 4242   758  1600 4495   505  1600 4594   406  1600 4453   547
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.18  0.19  0.18 0.22  0.24  0.17 0.29  0.31  0.08 0.14  0.14
Crit Moves:             ****  ****                           ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:12                Page 40-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #38 Bristol St and Alton Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.545
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        26               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  3  0  1    1  0  1  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      11  739    55   230 1591    36   164  101   211    41   87    31
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   11  739    55   230 1591    36   164  101   211    41   87    31
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    11  739    55   230 1591    36   164  101   211    41   87    31
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   11  739    55   230 1591    36   164  101   211    41   87    31
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   11  739    55   230 1591    36   164  101   211    41   87    31
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       1.00 2.79  0.21  1.00 3.00  1.00  1.00 1.00  1.00  1.00 0.74  0.26
Final Sat.:  1600 4668   332  1600 5100  1600  1600 1700  1600  1600 1180   420
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.16  0.17  0.14 0.31  0.02  0.10 0.06  0.13  0.03 0.07  0.07
Crit Moves:  ****                ****        ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:13                Page 41-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #39 Bristol St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.697
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        37               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     102  531   133   329 1434   150   166 1203   244   159  758   110
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  102  531   133   329 1434   150   166 1203   244   159  758   110
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   102  531   133   329 1434   150   166 1203   244   159  758   110
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  102  531   133   329 1434   150   166 1203   244   159  758   110
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  102  531   133   329 1434   150   166 1203   244   159  758   110
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.72  0.28  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 4545   455  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.10  0.08  0.10 0.32  0.33  0.05 0.24  0.15  0.05 0.15  0.07
Crit Moves:  ****                ****       ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:14                Page 42-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #40 Bristol St and Sunflower Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.649
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        32               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  1    2  0  3  0  1    2  0  2  1  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     111  546   161   242 1370   103   112  926   375   295  480   166
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  111  546   161   242 1370   103   112  926   375   295  480   166
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   111  546   161   242 1370   103   112  926   375   295  480   166
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  111  546   161   242 1370   103   112  926   375   295  480   166
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  111  546   161   242 1370   103   112  926   375   295  480   166
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.85  1.15  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 4755  1845  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.11  0.10  0.08 0.27  0.06  0.04 0.19  0.20  0.09 0.09  0.10
Crit Moves:  ****                ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:14                Page 43-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #41 Bristol St and I-405 NB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.557
Loss Time (sec):       5               Average Delay (sec/veh):        20.8
Optimal Cycle:        28               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  1    0  0  4  1  0    0  0  0  0  2    1  1  1  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1638   210     0 1918     8     0    0    36   145   87   796
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1638   210     0 1918     8     0    0    36   145   87   796
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1638   210     0 1918     8     0    0    36   145   87   796
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1638   210     0 1918     8     0    0    36   145   87   796
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1638   210     0 1918     8     0    0    36   145   87   796
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  0.85  1.00 0.91  0.91  1.00 1.00  0.75  0.92 0.92  0.75
Lanes:       0.00 4.00  1.00  0.00 4.98  0.02  0.00 0.00  2.00  1.88 1.12  2.00
Final Sat.:     0 6916  1615     0 8600    36     0    0  2842  3283 1970  2842
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.24  0.13  0.00 0.22  0.22  0.00 0.00  0.01  0.04 0.04  0.28
Crit Moves:       ****        ****                     ****             ****
Green/Cycle: 0.00 0.42  0.42  0.00 0.42  0.42  0.00 0.00  0.02  0.50 0.50  0.50
Volume/Cap:  0.00 0.56  0.31  0.00 0.52  0.52  0.00 0.00  0.56  0.09 0.09  0.56
Delay/Veh:    0.0 21.9  19.3   0.0 21.4  21.4   0.0  0.0  58.8  13.0 13.0  17.7
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 21.9  19.3   0.0 21.4  21.4   0.0  0.0  58.8  13.0 13.0  17.7
LOS by Move:    A    C     B     A    C     C     A    A     E     B    B     B
HCM2k85thQ:     0   16     7     0   15    15     0    0     2     2    2    15
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:15                Page 44-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #42 Bristol St and I-405 SB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.696
Loss Time (sec):       5               Average Delay (sec/veh):        23.9
Optimal Cycle:        38               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Ignore           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  4  0  0    0  0  2  1  1    3  0  0  0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     125 1225     0     0 1030   886   696    0   636     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  125 1225     0     0 1030   886   696    0   636     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   125 1225     0     0 1030     0   696    0   636     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  125 1225     0     0 1030     0   696    0   636     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  125 1225     0     0 1030     0   696    0   636     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.91  0.92 1.00  0.85  1.00 1.00  1.00
Lanes:       1.00 4.00  0.00  0.00 3.00  1.00  3.00 0.00  1.00  0.00 0.00  0.00
Final Sat.:  1805 6916     0     0 5187  1729  5253    0  1615     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.18  0.00  0.00 0.20  0.00  0.13 0.00  0.39  0.00 0.00  0.00
Crit Moves:  ****                 ****                    ****
Green/Cycle: 0.10 0.38  0.00  0.00 0.29  0.00  0.57 0.00  0.57  0.00 0.00  0.00
Volume/Cap:  0.70 0.46  0.00  0.00 0.70  0.00  0.23 0.00  0.70  0.00 0.00  0.00
Delay/Veh:   54.9 23.1   0.0   0.0 33.4   0.0  10.9  0.0  18.0   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  54.9 23.1   0.0   0.0 33.4   0.0  10.9  0.0  18.0   0.0  0.0   0.0
LOS by Move:    D    C     A     A    C     A     B    A     B     A    A     A
HCM2k85thQ:     8   12     0     0   17     0     6    0    22     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:16                Page 45-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #43 Flower St and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.806
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        53               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit      Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  2  0  1    1  0  3  0  1    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     100  936   136   214  723    97   211 1315   150   143  458   191
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  100  936   136   214  723    97   211 1315   150   143  458   191
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   100  936   136   214  723    97   211 1315   150   143  458   191
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  100  936   136   214  723    97   211 1315   150   143  458   191
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  100  936   136   214  723    97   211 1315   150   143  458   191
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.00  1.00  1.00 2.00  1.00  1.00 3.00  1.00  1.00 2.12  0.88
Final Sat.:  1600 3400  1600  1600 3400  1600  1600 5100  1600  1600 3587  1413
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.28  0.09  0.13 0.21  0.06  0.13 0.26  0.09  0.09 0.13  0.14
Crit Moves:       ****        ****                ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:16                Page 46-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #44 Flower St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.926
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       105               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     139  602   159   334 1058   111   148 1355    54   209  861   123
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  139  602   159   334 1058   111   148 1355    54   209  861   123
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   139  602   159   334 1058   111   148 1355    54   209  861   123
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  139  602   159   334 1058   111   148 1355    54   209  861   123
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  139  602   159   334 1058   111   148 1355    54   209  861   123
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 2.00  1.00  1.00 1.81  0.19  1.00 2.89  0.11  1.00 2.62  0.38
Final Sat.:  1600 3400  1600  1600 2996   304  1600 4816   184  1600 4400   600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.18  0.10  0.21 0.35  0.37  0.09 0.28  0.29  0.13 0.20  0.21
Crit Moves:  ****                     ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:17                Page 47-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #45 Flower St and McFadden Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.900
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        87               Level Of Service:                  E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  1  0  1  0    0  1  0  1  0    0  1  0  1  0    0  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      70  511    44   118  655    95   112 1278    97   113  764   103
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   70  511    44   118  655    95   112 1278    97   113  764   103
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    70  511    44   118  655    95   112 1278    97   113  764   103
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   70  511    44   118  655    95   112 1278    97   113  764   103
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   70  511    44   118  655    95   112 1278    97   113  764   103
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       0.22 1.64  0.14  0.27 1.51  0.22  0.15 1.72  0.13  0.23 1.56  0.21
Final Sat.:   358 2616   225   435 2415   350   241 2750   209   369 2495   336
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.20  0.20  0.07 0.27  0.27  0.07 0.46  0.46  0.07 0.31  0.31
Crit Moves:  ****               ****             ****             ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:17                Page 48-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #46 Flower St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.784
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        49               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      86  451   100    98  544   120   223 1531   427   104  764    84
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   86  451   100    98  544   120   223 1531   427   104  764    84
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    86  451   100    98  544   120   223 1531   427   104  764    84
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   86  451   100    98  544   120   223 1531   427   104  764    84
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   86  451   100    98  544   120   223 1531   427   104  764    84
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 1.64  0.36  1.00 1.64  0.36  1.00 2.35  0.65  1.00 2.70  0.30
Final Sat.:  1600 2719   581  1600 2722   578  1600 3953  1047  1600 4525   475
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.17  0.17  0.06 0.20  0.21  0.14 0.39  0.41  0.07 0.17  0.18
Crit Moves:  ****                ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:18                Page 49-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #47 Flower St and MacArthur Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.675
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        35               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      26  170    88   167  361   270   151 1716    73    62 1049    67
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   26  170    88   167  361   270   151 1716    73    62 1049    67
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    26  170    88   167  361   270   151 1716    73    62 1049    67
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   26  170    88   167  361   270   151 1716    73    62 1049    67
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   26  170    88   167  361   270   151 1716    73    62 1049    67
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.32  0.68  1.00 1.14  0.86  1.00 2.88  0.12  1.00 2.82  0.18
Final Sat.:  1600 2209  1091  1600 1931  1369  1600 4804   196  1600 4712   288
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.08  0.08  0.10 0.19  0.20  0.09 0.36  0.37  0.04 0.22  0.23
Crit Moves:  ****                ****             ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:19                Page 50-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #48 Main St and La Veta Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.586
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        28               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  2  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     105  724   375   198 1034   173   361  510   222   316  276   230
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  105  724   375   198 1034   173   361  510   222   316  276   230
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   105  724   375   198 1034   173   361  510   222   316  276   230
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  105  724   375   198 1034   173   361  510   222   316  276   230
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  105  724   375   198 1034   173   361  510   222   316  276   230
OvlAdjVol:                217                                              131
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.57  0.43  2.00 2.09  0.91  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 4312   688  3200 3544  1456  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.14  0.23  0.06 0.24  0.25  0.11 0.14  0.15  0.10 0.08  0.14
OvlAdjV/S:              0.14                                              0.08
Crit Moves:  ****                      ****              ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:19                Page 51-1
--------------------------------------------------------------------------------
                          Santa Ana Circulation Element
--------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
********************************************************************************
Intersection #49 Main St and Mainplace Dr / Memory Ln
********************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.512
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        24               Level Of Service:                  A
********************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      34  920   301    36 1386   290   185  291    20   132  151    10
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   34  920   301    36 1386   290   185  291    20   132  151    10
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    34  920   301    36 1386   290   185  291    20   132  151    10
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   34  920   301    36 1386   290   185  291    20   132  151    10
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   34  920   301    36 1386   290   185  291    20   132  151    10
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 2.26  0.74  2.00 2.48  0.52  2.00 2.81  0.19  2.00 2.00  1.00
Final Sat.:  3200 3817  1183  3200 4169   831  3200 4691   309  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.24  0.25  0.01 0.33  0.35  0.06 0.06  0.06  0.04 0.04  0.01
Crit Moves:  ****                     ****  ****                    ****
********************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:20                Page 52-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #50 Main St and 17th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.884
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        78               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     133  788   169   237 1322    85   127 1336    67   356 1425    21
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  133  788   169   237 1322    85   127 1336    67   356 1425    21
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   133  788   169   237 1322    85   127 1336    67   356 1425    21
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  133  788   169   237 1322    85   127 1336    67   356 1425    21
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  133  788   169   237 1322    85   127 1336    67   356 1425    21
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       2.00 2.00  1.00  2.00 2.00  1.00  2.00 2.86  0.14  2.00 2.96  0.04
Final Sat.:  3200 3400  1600  3200 3400  1600  3200 4771   229  3200 4930    70
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.23  0.11  0.07 0.39  0.05  0.04 0.28  0.29  0.11 0.29  0.30
Crit Moves:  ****               ****                   ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:20                Page 53-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #51 Main St and Civic Center Dr
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.783
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        49               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     142  925    81    55  970   148   120  727   132    43  566    34
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  142  925    81    55  970   148   120  727   132    43  566    34
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   142  925    81    55  970   148   120  727   132    43  566    34
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  142  925    81    55  970   148   120  727   132    43  566    34
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  142  925    81    55  970   148   120  727   132    43  566    34
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.03  1.00
Lanes:       1.00 1.84  0.16  1.00 1.74  0.26  1.00 1.69  0.31  1.00 1.89  0.11
Final Sat.:  1600 3042   258  1600 2876   424  1600 2808   492  1600 3119   181
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.30  0.31  0.03 0.34  0.35  0.08 0.26  0.27  0.03 0.18  0.19
Crit Moves:  ****                ****             ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:21                Page 54-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #52 Main St and Santa Ana Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.926
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       105               Level Of Service:                  E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  0    0  0  1  1  0    0  0  0  0  0    0  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      66 1050     0     0 1135   100     0    0     0    90 1250    96
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   66 1050     0     0 1135   100     0    0     0    90 1250    96
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    66 1050     0     0 1135   100     0    0     0    90 1250    96
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   66 1050     0     0 1135   100     0    0     0    90 1250    96
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   66 1050     0     0 1135   100     0    0     0    90 1250    96
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       1.00 2.00  0.00  0.00 1.84  0.16  0.00 0.00  0.00  0.13 1.74  0.13
Final Sat.:  1600 3400     0     0 3041   259     0    0     0   201 2786   214
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.31  0.00  0.00 0.37  0.39  0.00 0.00  0.00  0.06 0.45  0.45
Crit Moves:  ****                     ****                          ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:21                Page 55-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #53 Main St and 4th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.410
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        20               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  1  1  0    0  0  1  1  0    0  0  1  1  0    0  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  939    22     0  961    24     0   70    11     0  140    34
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  939    22     0  961    24     0   70    11     0  140    34
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  939    22     0  961    24     0   70    11     0  140    34
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  939    22     0  961    24     0   70    11     0  140    34
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  939    22     0  961    24     0   70    11     0  140    34
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       0.00 1.95  0.05  0.00 1.95  0.05  0.00 1.73  0.27  0.00 1.61  0.39
Final Sat.:     0 3227    73     0 3222    78     0 2865   435     0 2675   625
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.29  0.30  0.00 0.30  0.31  0.00 0.02  0.03  0.00 0.05  0.05
Crit Moves:  ****                     ****  ****                     ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:22                Page 56-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #54 Main St and 1st St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.681
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        35               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  2  0  1    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     103  532    54    77  772    57   106 1241   131    86 1072    60
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  103  532    54    77  772    57   106 1241   131    86 1072    60
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   103  532    54    77  772    57   106 1241   131    86 1072    60
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  103  532    54    77  772    57   106 1241   131    86 1072    60
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  103  532    54    77  772    57   106 1241   131    86 1072    60
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       1.00 1.82  0.18  1.00 2.00  1.00  1.00 2.71  0.29  1.00 2.84  0.16
Final Sat.:  1600 3005   295  1600 3400  1600  1600 4542   458  1600 4746   254
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.18  0.18  0.05 0.23  0.04  0.07 0.27  0.29  0.05 0.23  0.24
Crit Moves:  ****               ****                   ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:23                Page 57-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #55 Main St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.894
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        84               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      93  874    44   162 1259    25    86  815    89   164  438   126
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   93  874    44   162 1259    25    86  815    89   164  438   126
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    93  874    44   162 1259    25    86  815    89   164  438   126
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   93  874    44   162 1259    25    86  815    89   164  438   126
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   93  874    44   162 1259    25    86  815    89   164  438   126
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.04  1.00
Lanes:       1.00 1.90  0.10  1.00 1.96  0.04  1.00 1.80  0.20  1.00 1.55  0.45
Final Sat.:  1600 3147   153  1600 3238    62  1600 2985   315  1600 2585   715
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.28  0.29  0.10 0.39  0.40  0.05 0.27  0.28  0.10 0.17  0.18
Crit Moves:  ****                ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:23                Page 58-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #56 Main St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.795
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        51               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      99  561    61   211  975    51    96 1248   168   108  630    77
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   99  561    61   211  975    51    96 1248   168   108  630    77
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    99  561    61   211  975    51    96 1248   168   108  630    77
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   99  561    61   211  975    51    96 1248   168   108  630    77
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   99  561    61   211  975    51    96 1248   168   108  630    77
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 1.80  0.20  1.00 1.90  0.10  1.00 2.64  0.36  1.00 2.67  0.33
Final Sat.:  1600 2986   314  1600 3141   159  1600 4431   569  1600 4477   523
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.19  0.19  0.13 0.31  0.32  0.06 0.28  0.29  0.07 0.14  0.15
Crit Moves:  ****                ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:24                Page 59-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #57 Main St and MacArthur Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.680
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        35               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      51  295   250   539  709   160   230 1336   242   138  411   206
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   51  295   250   539  709   160   230 1336   242   138  411   206
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    51  295   250   539  709   160   230 1336   242   138  411   206
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   51  295   250   539  709   160   230 1336   242   138  411   206
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   51  295   250   539  709   160   230 1336   242   138  411   206
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.06  0.16  0.17 0.14  0.10  0.07 0.26  0.15  0.04 0.08  0.13
Crit Moves:             ****  ****                   ****        ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:25                Page 60-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #58 Penn Wy and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.660
Loss Time (sec):       5               Average Delay (sec/veh):        12.2
Optimal Cycle:        35               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  0  2    0  0  0  0  0    0  0  2  1  0    1  0  3  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      52    0   260     0    0     0     0 1341   684   214 1722     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   52    0   260     0    0     0     0 1341   684   214 1722     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    52    0   260     0    0     0     0 1341   684   214 1722     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   52    0   260     0    0     0     0 1341   684   214 1722     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   52    0   260     0    0     0     0 1341   684   214 1722     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 1.00  0.75  1.00 1.00  1.00  1.00 0.86  0.86  0.95 0.91  1.00
Lanes:       2.00 0.00  2.00  0.00 0.00  0.00  0.00 2.00  1.00  1.00 3.00  0.00
Final Sat.:  3502    0  2842     0    0     0     0 3282  1641  1805 5187     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.00  0.09  0.00 0.00  0.00  0.00 0.41  0.42  0.12 0.33  0.00
Crit Moves:             ****                                 ****  ****
Green/Cycle: 0.14 0.00  0.14  0.00 0.00  0.00  0.00 0.63  0.63  0.18 0.81  0.00
Volume/Cap:  0.11 0.00  0.66  0.00 0.00  0.00  0.00 0.65  0.66  0.66 0.41  0.00
Delay/Veh:   37.8  0.0  44.9   0.0  0.0   0.0   0.0 11.9  12.2  43.1  2.7   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  37.8  0.0  44.9   0.0  0.0   0.0   0.0 11.9  12.2  43.1  2.7   0.0
LOS by Move:    D    A     D     A    A     A     A    B     B     D    A     A
HCM2k85thQ:     1    0     9     0    0     0     0   22    22    11    9     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:25                Page 61-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #59 I-5 NB Off Ramps/17th Street
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.710
Loss Time (sec):       5               Average Delay (sec/veh):        30.0
Optimal Cycle:        40               Level Of Service:                  C
*******************************************************************************
Street Name:         I-5 NB Off Ramps                    17th Street
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected         Permitted
Rights:           Include          Include          Ignore           Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  1    1  0  0  0  1    1  0  3  0  1    0  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     720   33    21    54    0   279    89  932   337     0 1245    20
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  720   33    21    54    0   279    89  932   337     0 1245    20
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Volume:   720   33    21    54    0   279    89  932     0     0 1245    20
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  720   33    21    54    0   279    89  932     0     0 1245    20
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
FinalVolume:  720   33    21    54    0   279    89  932     0     0 1245    20
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.95  0.85  0.95 1.00  0.85  0.95 0.91  1.00  1.00 0.91  0.91
Lanes:       1.91 0.09  1.00  1.00 0.00  1.00  1.00 3.00  1.00  0.00 2.95  0.05
Final Sat.:  3466  159  1615  1805    0  1615  1805 5187  1900     0 5095    82
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.21 0.21  0.01  0.03 0.00  0.17  0.05 0.18  0.00  0.00 0.24  0.24
Crit Moves:  ****                      ****  ****                   ****
Green/Cycle: 0.29 0.29  0.29  0.24 0.00  0.24  0.07 0.41  0.00  0.00 0.34  0.34
Volume/Cap:  0.71 0.71  0.04  0.12 0.00  0.71  0.71 0.43  0.00  0.00 0.71  0.71
Delay/Veh:   33.8 33.8  25.4  29.6  0.0  40.5  62.7 21.1   0.0   0.0 29.8  29.8
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  33.8 33.8  25.4  29.6  0.0  40.5  62.7 21.1   0.0   0.0 29.8  29.8
LOS by Move:    C    C     C     C    A     D     E    C     A     A    C     C
HCM2k85thQ:    17   17     1     2    0    14     7   12     0     0   20    20
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:26                Page 62-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #60 Penn Wy and I-5 SB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.550
Loss Time (sec):       5               Average Delay (sec/veh):        21.2
Optimal Cycle:        27               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    2  0  2  0  0    0  0  0  0  0    1  0  0  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  260   230   951  196     0     0    0     0   196    0   110
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  260   230   951  196     0     0    0     0   196    0   110
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  260   230   951  196     0     0    0     0   196    0   110
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  260   230   951  196     0     0    0     0   196    0   110
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  260   230   951  196     0     0    0     0   196    0   110
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  0.85  0.92 0.95  1.00  1.00 1.00  1.00  0.95 1.00  0.75
Lanes:       0.00 2.00  1.00  2.00 2.00  0.00  0.00 0.00  0.00  1.00 0.00  2.00
Final Sat.:     0 3610  1615  3502 3610     0     0    0     0  1805    0  2842
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.07  0.14  0.27 0.05  0.00  0.00 0.00  0.00  0.11 0.00  0.04
Crit Moves:             ****  ****                               ****
Green/Cycle: 0.00 0.26  0.26  0.49 0.75  0.00  0.00 0.00  0.00  0.20 0.00  0.69
Volume/Cap:  0.00 0.28  0.55  0.55 0.07  0.00  0.00 0.00  0.00  0.55 0.00  0.06
Delay/Veh:    0.0 29.8  33.6  18.0  3.2   0.0   0.0  0.0   0.0  38.0  0.0   5.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 29.8  33.6  18.0  3.2   0.0   0.0  0.0   0.0  38.0  0.0   5.0
LOS by Move:    A    C     C     B    A     A     A    A     A     D    A     A
HCM2k85thQ:     0    5    10    16    1     0     0    0     0     9    0     1
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:27                Page 63-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM 4-Way Stop Method (Base Volume Alternative)
*******************************************************************************
Intersection #61 Santiago St and Civic Center Dr
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.769
Loss Time (sec):       5               Average Delay (sec/veh):       159.2
Optimal Cycle:         0               Level Of Service:                  F
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Stop Sign        Stop Sign        Stop Sign        Stop Sign
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Lanes:        1  0  0  1  0    1  0  0  1  0    0  1  0  0  1    0  0  1! 0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     487  338    47    10  590   144   182   69   369   108   99    20
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  487  338    47    10  590   144   182   69   369   108   99    20
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   487  338    47    10  590   144   182   69   369   108   99    20
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  487  338    47    10  590   144   182   69   369   108   99    20
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  487  338    47    10  590   144   182   69   369   108   99    20
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 0.88  0.12  1.00 0.80  0.20  0.73 0.27  1.00  0.47 0.44  0.09
Final Sat.:   402  377    52   381  333    81   289  110   453   177  162    33
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     1.21 0.90  0.90  0.03 1.77  1.77  0.63 0.63  0.82  0.61 0.61  0.61
Crit Moves:  ****                ****                     ****  ****
Delay/Veh:  144.0 50.3  50.3  12.3  377 376.5  25.7 25.7  36.9  26.3 26.3  26.3
Delay Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh: 144.0 50.3  50.3  12.3  377 376.5  25.7 25.7  36.9  26.3 26.3  26.3
LOS by Move:    F    F     F     B    F     F     D    D     E     D    D     D
ApproachDel:     102.6            371.6            32.3            26.3
Delay Adj:        1.00             1.00            1.00            1.00
ApprAdjDel:      102.6            371.6            32.3            26.3
LOS by Appr:         F                F               D               D
AllWayAvgQ:  14.8  4.7   4.7   0.0 42.1  42.1   1.5  1.5   3.3   1.4  1.4   1.4
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #62 Santiago St and Santa Ana Blvd

Cycle (sec):	100	Critical Vol./Cap.(X):	1.037
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	180	Level Of Service:	F

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Permitted			Permitted			Protected			Protected		
Rights:	Include			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	1 0	1	1 0	1 0	1	1 0	1 0	1	1 0	1 0	2	0 1
Volume Module:												
Base Vol:	188	611	303	409	972	253	118	732	99	297	699	258
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	188	611	303	409	972	253	118	732	99	297	699	258
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	188	611	303	409	972	253	118	732	99	297	699	258
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	188	611	303	409	972	253	118	732	99	297	699	258
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	188	611	303	409	972	253	118	732	99	297	699	258
Saturation Flow Module:												
Sat/Lane:	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
Adjustment:	1.00	1.05	1.00	1.00	1.04	1.00	1.00	1.04	1.00	1.00	1.06	1.00
Lanes:	1.00	1.34	0.66	1.00	1.59	0.41	1.00	1.76	0.24	1.00	2.00	1.00
Final Sat.:	1600	2239	1061	1600	2639	661	1600	2919	381	1600	3400	1600
Capacity Analysis Module:												
Vol/Sat:	0.12	0.27	0.29	0.26	0.37	0.38	0.07	0.25	0.26	0.19	0.21	0.16
Crit Moves:			****	****					****	****		

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:28                Page 65-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #63 Standard Ave and 4th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.939
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       117               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  2  0  1    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     191  473   248   431  604   332   298  624   219   250  550   340
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  191  473   248   431  604   332   298  624   219   250  550   340
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   191  473   248   431  604   332   298  624   219   250  550   340
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  191  473   248   431  604   332   298  624   219   250  550   340
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  191  473   248   431  604   332   298  624   219   250  550   340
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 2.00  1.00  1.00 2.00  1.00  1.00 1.48  0.52  1.00 1.24  0.76
Final Sat.:  1600 3400  1600  1600 3400  1600  1600 2469   831  1600 2078  1222
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.14  0.16  0.27 0.18  0.21  0.19 0.25  0.26  0.16 0.26  0.28
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #64 Standard Ave and 1st St

Cycle (sec):	100	Critical Vol./Cap.(X):	0.976
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	176	Level Of Service:	E

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Permitted			Permitted			Protected			Protected		
Rights:	Include			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	1 0	1	1 0	1 0	1	1 0	1 0	2	1 0	1 0	2	1 0
Volume Module:												
Base Vol:	45	631	312	123	901	41	161	1959	121	194	1282	120
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	45	631	312	123	901	41	161	1959	121	194	1282	120
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	45	631	312	123	901	41	161	1959	121	194	1282	120
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	45	631	312	123	901	41	161	1959	121	194	1282	120
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	45	631	312	123	901	41	161	1959	121	194	1282	120
Saturation Flow Module:												
Sat/Lane:	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
Adjustment:	1.00	1.05	1.00	1.00	1.03	1.00	1.00	1.04	1.00	1.00	1.05	1.00
Lanes:	1.00	1.34	0.66	1.00	1.91	0.09	1.00	2.83	0.17	1.00	2.74	0.26
Final Sat.:	1600	2241	1059	1600	3161	139	1600	4721	279	1600	4589	411
Capacity Analysis Module:												
Vol/Sat:	0.03	0.28	0.29	0.08	0.29	0.29	0.10	0.41	0.43	0.12	0.28	0.29
Crit Moves:		****	****						****	****		

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:29                Page 67-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #65 Standard Ave and Mcfadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.854
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        66               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      94  360   162   226  547    38    34 1178   142   150  397    89
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   94  360   162   226  547    38    34 1178   142   150  397    89
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    94  360   162   226  547    38    34 1178   142   150  397    89
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   94  360   162   226  547    38    34 1178   142   150  397    89
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   94  360   162   226  547    38    34 1178   142   150  397    89
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.38  0.62  1.00 1.87  0.13  1.00 1.78  0.22  1.00 1.63  0.37
Final Sat.:  1600 2307   993  1600 3092   208  1600 2956   344  1600 2714   586
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.16  0.16  0.14 0.18  0.18  0.02 0.40  0.41  0.09 0.15  0.15
Crit Moves:       ****        ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:30                Page 68-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #66 Halladay St and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.775
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        47               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    0  0  0  0  0    0  0  2  1  0    0  1  2  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      95    0   220     0    0     0     0 1833   207   260  986     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   95    0   220     0    0     0     0 1833   207   260  986     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    95    0   220     0    0     0     0 1833   207   260  986     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   95    0   220     0    0     0     0 1833   207   260  986     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   95    0   220     0    0     0     0 1833   207   260  986     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 0.00  1.00  0.00 0.00  0.00  0.00 2.70  0.30  0.63 2.37  0.00
Final Sat.:  1600    0  1600     0    0     0     0 4513   487  1002 3998     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.00  0.14  0.00 0.00  0.00  0.00 0.41  0.43  0.16 0.25  0.00
Crit Moves:             ****                                 ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:30                Page 69-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #67 Halladay St and Dyer Rd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.774
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        47               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      15   24    65   450   91    96    46 1537    11   104  566    91
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   15   24    65   450   91    96    46 1537    11   104  566    91
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    15   24    65   450   91    96    46 1537    11   104  566    91
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   15   24    65   450   91    96    46 1537    11   104  566    91
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   15   24    65   450   91    96    46 1537    11   104  566    91
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 0.27  0.73  1.00 0.49  0.51  1.00 2.98  0.02  1.00 2.58  0.42
Final Sat.:  1600  431  1169  1600  779   821  1600 4966    34  1600 4335   665
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.06  0.06  0.28 0.12  0.12  0.03 0.31  0.32  0.07 0.13  0.14
Crit Moves:       ****        ****                          ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:31                Page 70-1
--------------------------------------------------------------------------------
                          Santa Ana Circulation Element
--------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
********************************************************************************
Intersection #68 SR-55 SB Ramps and MacArthur Blvd
********************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.608
Loss Time (sec):       5               Average Delay (sec/veh):        19.9
Optimal Cycle:        31               Level Of Service:                  B
********************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  2    0  0  2  1  1    0  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   998    0   903     0 1349   961     0 1187   135
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   998    0   903     0 1349   961     0 1187   135
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:     0    0     0   998    0   903     0 1349     0     0 1187     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   998    0   903     0 1349     0     0 1187     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:    0    0     0   998    0   903     0 1349     0     0 1187     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.92 1.00  0.75  1.00 0.91  0.91  1.00 0.91  1.00
Lanes:       0.00 0.00  0.00  2.00 0.00  2.00  0.00 3.00  1.00  0.00 3.00  1.00
Final Sat.:     0    0     0  3502    0  2842     0 5187  1729     0 5187  1900
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.29 0.00  0.32  0.00 0.26  0.00  0.00 0.23  0.00
Crit Moves:                               ****        ****        ****
Green/Cycle: 0.00 0.00  0.00  0.52 0.00  0.52  0.00 0.43  0.00  0.00 0.43  0.00
Volume/Cap:  0.00 0.00  0.00  0.55 0.00  0.61  0.00 0.61  0.00  0.00 0.54  0.00
Delay/Veh:    0.0  0.0   0.0  16.3  0.0  17.5   0.0 22.6   0.0   0.0 21.5   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0  16.3  0.0  17.5   0.0 22.6   0.0   0.0 21.5   0.0
LOS by Move:    A    A     A     B    A     B     A    C     A     A    C     A
HCM2k85thQ:     0    0     0    16    0    17     0   18     0     0   15     0
********************************************************************************
Note: Queue reported is the number of cars per lane.
********************************************************************************


  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
```

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:32                Page 71-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #69 SR-55 NB Ramps and MacArthur Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.712
Loss Time (sec):       5               Average Delay (sec/veh):        19.3
Optimal Cycle:        40               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Ignore           Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  0  1    0  0  0  0  0    0  0  2  0  2    0  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     946    0  1017     0    0     0     0 1468   726     0  517   244
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  946    0  1017     0    0     0     0 1468   726     0  517   244
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:   946    0     0     0    0     0     0 1468     0     0  517     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  946    0     0     0    0     0     0 1468     0     0  517     0
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:  946    0     0     0    0     0     0 1468     0     0  517     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 1.00  1.00  1.00 1.00  1.00  1.00 0.95  0.88  1.00 0.91  1.00
Lanes:       2.00 0.00  1.00  0.00 0.00  0.00  0.00 2.00  2.00  0.00 3.00  1.00
Final Sat.:  3502    0  1900     0    0     0     0 3610  3344     0 5187  1900
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.27 0.00  0.00  0.00 0.00  0.00  0.00 0.41  0.00  0.00 0.10  0.00
Crit Moves:  ****                                  ****        ****
Green/Cycle: 0.38 0.00  0.00  0.00 0.00  0.00  0.00 0.57  0.00  0.00 0.57  0.00
Volume/Cap:  0.71 0.00  0.00  0.00 0.00  0.00  0.00 0.71  0.00  0.00 0.17  0.00
Delay/Veh:   28.2  0.0   0.0   0.0  0.0   0.0   0.0 16.7   0.0   0.0 10.3   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  28.2  0.0   0.0   0.0  0.0   0.0   0.0 16.7   0.0   0.0 10.3   0.0
LOS by Move:    C    A     A     A    A     A     A    B     A     A    B     A
HCM2k85thQ:    21    0     0     0    0     0     0   26     0     0    4     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:32                Page 72-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #70 SR-55 SB Ramps and Dyer Rd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.617
Loss Time (sec):       5               Average Delay (sec/veh):        25.7
Optimal Cycle:        31               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:            Ovl              Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  2    0  1  1  0  1    1  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     286   34   654    50  242    60    37 1422   303   348  552    92
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  286   34   654    50  242    60    37 1422   303   348  552    92
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   286   34   654    50  242    60    37 1422   303   348  552    92
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  286   34   654    50  242    60    37 1422   303   348  552    92
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  286   34   654    50  242    60    37 1422   303   348  552    92
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.96 0.96  0.75  0.94 0.94  0.85  0.95 0.91  0.85  0.92 0.91  0.85
Lanes:       1.79 0.21  2.00  0.34 1.66  1.00  1.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3250  386  2842   613 2968  1615  1805 5187  1615  3502 5187  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.09  0.23  0.08 0.08  0.04  0.02 0.27  0.19  0.10 0.11  0.06
Crit Moves:             ****        ****              ****        ****
Green/Cycle: 0.21 0.21  0.37  0.13 0.13  0.13  0.10 0.44  0.44  0.16 0.51  0.51
Volume/Cap:  0.42 0.42  0.62  0.62 0.62  0.28  0.21 0.62  0.42  0.62 0.21  0.11
Delay/Veh:   34.4 34.4  26.6  43.4 43.4  39.8  42.1 21.8  19.4  41.1 13.6  12.9
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  34.4 34.4  26.6  43.4 43.4  39.8  42.1 21.8  19.4  41.1 13.6  12.9
LOS by Move:    C    C     C     D    D     D     D    C     B     D    B     B
HCM2k85thQ:     7    7    15     8    8     3     2   19    10     9    5     2
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:33                Page 73-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #71 Glassell St and La Veta Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.800
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        52               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Ovl              Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  1  0  1    1  0  1  1  0    1  0  1  0  1    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     263  412   125    14  295    65    57  293   563   367  387     9
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  263  412   125    14  295    65    57  293   563   367  387     9
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   263  412   125    14  295    65    57  293   563   367  387     9
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  263  412   125    14  295    65    57  293   563   367  387     9
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  263  412   125    14  295    65    57  293   563   367  387     9
OvlAdjVol:                 0                                 431
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.03  1.00
Lanes:       2.00 1.00  1.00  1.00 1.64  0.36  1.00 1.00  1.00  1.00 1.95  0.05
Final Sat.:  3200 1700  1600  1600 2722   578  1600 1700  1600  1600 3227    73
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.24  0.08  0.01 0.11  0.11  0.04 0.17  0.35  0.23 0.12  0.12
OvlAdjV/S:                 0.00                              0.27
Crit Moves:        ****        ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:34                Page 74-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #72 Glassell St and SR-22 WB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.871
Loss Time (sec):       5               Average Delay (sec/veh):        32.6
Optimal Cycle:        75               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected         Permitted      Split Phase      Split Phase
Rights:           Include           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  0    0  0  2  0  1    0  0  0  0  0    1  0  1! 0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     511  574     0     0 1017   473     0    0     0   323    6   483
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  511  574     0     0 1017   473     0    0     0   323    6   483
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   511  574     0     0 1017   473     0    0     0   323    6   483
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  511  574     0     0 1017   473     0    0     0   323    6   483
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  511  574     0     0 1017   473     0    0     0   323    6   483
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.95  1.00  1.00 0.95  0.85  1.00 1.00  1.00  0.86 0.86  0.86
Lanes:       1.00 2.00  0.00  0.00 2.00  1.00  0.00 0.00  0.00  1.39 0.01  1.60
Final Sat.:  1805 3610     0     0 3610  1615     0    0     0  2270   24  2588
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.28 0.16  0.00  0.00 0.28  0.29  0.00 0.00  0.00  0.14 0.25  0.19
Crit Moves:  ****                     ****                          ****
Green/Cycle: 0.33 0.66  0.00  0.00 0.34  0.34  0.00 0.00  0.00  0.29 0.29  0.29
Volume/Cap:  0.87 0.24  0.00  0.00 0.84  0.87  0.00 0.00  0.00  0.49 0.87  0.65
Delay/Veh:   45.1  6.9   0.0   0.0 35.9  45.4   0.0  0.0   0.0  29.7 42.8  32.3
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  45.1  6.9   0.0   0.0 35.9  45.4   0.0  0.0   0.0  29.7 42.8  32.3
LOS by Move:    D    A     A     A    D     D     A    A     A     C    D     C
HCM2k85thQ:    26    6     0     0   26    25     0    0     0    10   22    14
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:34                Page 75-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #73 Grand Ave / Glassell St and SR-22 EB Ramps
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.860
Loss Time (sec):       5               Average Delay (sec/veh):        30.6
Optimal Cycle:        71               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted       Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    1  0  2  0  0    1  0  1! 0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  918   245   373  977     0   270    0  1058     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  918   245   373  977     0   270    0  1058     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  918   245   373  977     0   270    0  1058     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  918   245   373  977     0   270    0  1058     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  918   245   373  977     0   270    0  1058     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  0.85  0.95 0.95  1.00  0.87 1.00  0.87  1.00 1.00  1.00
Lanes:       0.00 2.00  1.00  1.00 2.00  0.00  1.20 0.00  1.80  0.00 0.00  0.00
Final Sat.:     0 3610  1615  1805 3610     0  1992    0  2974     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.25  0.15  0.21 0.27  0.00  0.14 0.00  0.36  0.00 0.00  0.00
Crit Moves:       ****        ****                     ****
Green/Cycle: 0.00 0.30  0.30  0.24 0.54  0.00  0.41 0.00  0.41  0.00 0.00  0.00
Volume/Cap:  0.00 0.86  0.51  0.86 0.50  0.00  0.33 0.00  0.86  0.00 0.00  0.00
Delay/Veh:    0.0 40.4  30.2  52.1 15.0   0.0  19.9  0.0  31.8   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 40.4  30.2  52.1 15.0   0.0  19.9  0.0  31.8   0.0  0.0   0.0
LOS by Move:    A    D     C     D    B     A     B    A     C     A    A     A
HCM2k85thQ:     0   25    10    21   15     0     7    0    28     0    0     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:35                Page 76-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #74 Grand Ave and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.611
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        30               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      21  840   121   207 1718    38    99   60    59   213   24   192
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   21  840   121   207 1718    38    99   60    59   213   24   192
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    21  840   121   207 1718    38    99   60    59   213   24   192
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   21  840   121   207 1718    38    99   60    59   213   24   192
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   21  840   121   207 1718    38    99   60    59   213   24   192
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.62  0.38  1.00 2.94  0.06  1.00 1.01  0.99  1.00 1.00  1.00
Final Sat.:  1600 4396   604  1600 4896   104  1600 1713  1587  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.19  0.20  0.13 0.35  0.37  0.06 0.04  0.04  0.13 0.01  0.12
Crit Moves:  ****                      ****  ****                      ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:36                Page 77-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #75 Grand Ave and Santa Clara Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.843
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        63               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include        WideBypass          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  0  1  0    1  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      75  528   136   345 1687   380   143  233    48   200  385   352
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   75  528   136   345 1687   380   143  233    48   200  385   352
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    75  528   136   345 1687   380   143  233    48   200  385   352
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   75  528   136   345 1687   380   143  233    48   200  385   352
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   75  528   136   345 1687   380   143  233    48   200  385   352
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.00  1.00  1.00 1.06  1.00
Lanes:       1.00 2.39  0.61  1.00 2.45  0.55  1.00 0.83  0.17  1.00 1.00  1.00
Final Sat.:  1600 4017   983  1600 4118   882  1600 1327   273  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.13  0.14  0.22 0.41  0.43  0.09 0.18  0.18  0.13 0.23  0.22
Crit Moves:  ****                      ****  ****                 ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:36                Page 78-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #76 Grand Ave and 17th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.794
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        51               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     186  543   373   340 1426   280   198  739    94   342  894    98
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  186  543   373   340 1426   280   198  739    94   342  894    98
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   186  543   373   340 1426   280   198  739    94   342  894    98
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  186  543   373   340 1426   280   198  739    94   342  894    98
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  186  543   373   340 1426   280   198  739    94   342  894    98
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.00  1.00  1.00 2.51  0.49  2.00 2.66  0.34  2.00 2.70  0.30
Final Sat.:  1600 3400  1600  1600 4212   788  3200 4458   542  3200 4526   474
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.16  0.23  0.21 0.34  0.36  0.06 0.17  0.17  0.11 0.20  0.21
Crit Moves:  ****                     ****       ****       ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:37                Page 79-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #77 Grand Ave and I-5 NB Ramps
******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.740
Loss Time (sec):       5                Average Delay (sec/veh):        13.2
Optimal Cycle:        44                Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Ignore           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    1  0  3  0  0    0  0  0  0  0    2  0  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1056   610    90 2893     0     0    0     0   507    0   140
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1056   610    90 2893     0     0    0     0   507    0   140
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1056     0    90 2893     0     0    0     0   507    0   140
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1056     0    90 2893     0     0    0     0   507    0   140
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1056     0    90 2893     0     0    0     0   507    0   140
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  1.00  0.95 0.91  1.00  1.00 1.00  1.00  0.92 1.00  0.85
Lanes:       0.00 2.00  1.00  1.00 3.00  0.00  0.00 0.00  0.00  2.00 0.00  1.00
Final Sat.:     0 3610  1900  1805 5187     0     0    0     0  3502    0  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.29  0.00  0.05 0.56  0.00  0.00 0.00  0.00  0.14 0.00  0.09
Crit Moves:  ****                 ****                          ****
Green/Cycle: 0.00 0.64  0.00  0.11 0.75  0.00  0.00 0.00  0.00  0.20 0.00  0.20
Volume/Cap:  0.00 0.45  0.00  0.45 0.74  0.00  0.00 0.00  0.00  0.74 0.00  0.44
Delay/Veh:    0.0  9.1   0.0  43.3  7.6   0.0   0.0  0.0   0.0  42.1  0.0  36.4
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  9.1   0.0  43.3  7.6   0.0   0.0  0.0   0.0  42.1  0.0  36.4
LOS by Move:    A    A     A     D    A     A     A    A     A     D    A     D
HCM2k85thQ:     0   13     0     5   28     0     0    0     0    14    0     7
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:38                Page 80-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #78 Grand Ave and Santa Ana Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.832
Loss Time (sec):       5               Average Delay (sec/veh):        26.0
Optimal Cycle:        62               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Ovl             Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  0  2    2  0  1  0  2    0  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      49  694    35   202 1670  1473   268  221   436     6  475    43
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   49  694    35   202 1670  1473   268  221   436     6  475    43
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    49  694    35   202 1670  1473   268  221   436     6  475    43
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   49  694    35   202 1670  1473   268  221   436     6  475    43
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   49  694    35   202 1670  1473   268  221   436     6  475    43
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.90  0.90  0.95 0.95  0.75  0.92 1.00  0.75  0.94 0.94  0.94
Lanes:       1.00 2.86  0.14  1.00 2.00  2.00  2.00 1.00  2.00  0.02 1.82  0.16
Final Sat.:  1805 4903   247  1805 3610  2842  3502 1900  2842    41 3230   292
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.14  0.14  0.11 0.46  0.52  0.08 0.12  0.15  0.15 0.15  0.15
Crit Moves:  ****                 ****                 ****       ****
Green/Cycle: 0.03 0.33  0.33  0.26 0.56  0.74  0.18 0.18  0.18  0.18 0.18  0.18
Volume/Cap:  0.83 0.43  0.43  0.43 0.83  0.70  0.42 0.63  0.83  0.83 0.83  0.83
Delay/Veh:  109.2 26.4  26.4  31.5 21.4   8.1  36.5 41.3  50.1  48.9 48.9  48.9
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh: 109.2 26.4  26.4  31.5 21.4   8.1  36.5 41.3  50.1  48.9 48.9  48.9
LOS by Move:    F    C     C     C    C     A     D    D     D     D    D     D
HCM2k85thQ:     5   10    10     8   35    22     6   11    15    16   16    16
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:38                Page 81-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                       Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #79 Grand Ave and 1st St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.742
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        42               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     208  732    34    99 1432   174   436 1041   295   216  759    87
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  208  732    34    99 1432   174   436 1041   295   216  759    87
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   208  732    34    99 1432   174   436 1041   295   216  759    87
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  208  732    34    99 1432   174   436 1041   295   216  759    87
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  208  732    34    99 1432   174   436 1041   295   216  759    87
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 2.87  0.13  2.00 3.00  1.00  2.00 2.34  0.66  2.00 2.69  0.31
Final Sat.:  3200 4787   213  3200 5100  1600  3200 3940  1060  3200 4506   494
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.15  0.16  0.03 0.28  0.11  0.14 0.26  0.28  0.07 0.17  0.18
Crit Moves:  ****                ****                     ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:39                Page 82-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #80 Grand Ave and Chestnut Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.704
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      53  737   163   161 1937    53    34  239    63   130  384   239
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   53  737   163   161 1937    53    34  239    63   130  384   239
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    53  737   163   161 1937    53    34  239    63   130  384   239
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   53  737   163   161 1937    53    34  239    63   130  384   239
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   53  737   163   161 1937    53    34  239    63   130  384   239
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 2.46  0.54  1.00 2.92  0.08  1.00 1.58  0.42  1.00 1.23  0.77
Final Sat.:  1600 4131   869  1600 4872   128  1600 2632   668  1600 2072  1228
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.18  0.19  0.10 0.40  0.41  0.02 0.09  0.09  0.08 0.19  0.19
Crit Moves:  ****                         ****  ****                   ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:40                Page 83-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #81 Grand Ave and McFadden Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.892
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        82               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     181  764   114   249 1672   163   205  663   201   123  440   111
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  181  764   114   249 1672   163   205  663   201   123  440   111
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   181  764   114   249 1672   163   205  663   201   123  440   111
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  181  764   114   249 1672   163   205  663   201   123  440   111
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  181  764   114   249 1672   163   205  663   201   123  440   111
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 2.61  0.39  1.00 2.73  0.27  1.00 1.53  0.47  1.00 1.60  0.40
Final Sat.:  1600 4377   623  1600 4574   426  1600 2556   744  1600 2655   645
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.17  0.18  0.16 0.37  0.38  0.13 0.26  0.27  0.08 0.17  0.17
Crit Moves:  ****                ****             ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:41                Page 84-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #82 Grand Ave and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.838
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        61               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      47  472    92   243 1244   243   347 1447   139   189  724   158
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   47  472    92   243 1244   243   347 1447   139   189  724   158
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    47  472    92   243 1244   243   347 1447   139   189  724   158
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   47  472    92   243 1244   243   347 1447   139   189  724   158
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   47  472    92   243 1244   243   347 1447   139   189  724   158
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.51  0.49  1.00 2.51  0.49  1.00 2.74  0.26  1.00 2.46  0.54
Final Sat.:  1600 4217   783  1600 4216   784  1600 4579   421  1600 4140   860
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.11  0.12  0.15 0.30  0.31  0.22 0.32  0.33  0.12 0.17  0.18
Crit Moves:  ****                     ****             ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:41                Page 85-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #83 Grand Ave and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.613
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        30               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    2  0  3  0  1    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     142  429   184   183  528   178   333 1188   467    92  406   137
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  142  429   184   183  528   178   333 1188   467    92  406   137
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   142  429   184   183  528   178   333 1188   467    92  406   137
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  142  429   184   183  528   178   333 1188   467    92  406   137
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  142  429   184   183  528   178   333 1188   467    92  406   137
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.10  0.90  1.00 2.24  0.76  2.00 3.00  1.00  2.00 2.24  0.76
Final Sat.:  1600 3559  1441  1600 3790  1210  3200 5100  1600  3200 3789  1211
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.12  0.13  0.11 0.14  0.15  0.10 0.23  0.29  0.03 0.11  0.11
Crit Moves:             ****  ****                           ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:42                Page 86-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #84 SR-55 NB Ramps and Dyer Rd
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.569
Loss Time (sec):       5                Average Delay (sec/veh):        17.1
Optimal Cycle:        28                Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1! 0  1    0  0  0  0  0    0  0  3  0  1    0  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     610    0   499     0    0     0     0 1618   647     0  599   361
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  610    0   499     0    0     0     0 1618   647     0  599   361
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:   610    0   499     0    0     0     0 1618     0     0  599     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  610    0   499     0    0     0     0 1618     0     0  599     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:  610    0   499     0    0     0     0 1618     0     0  599     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.91 1.00  0.91  1.00 1.00  1.00  1.00 0.91  1.00  1.00 0.91  0.91
Lanes:       1.55 0.00  1.45  0.00 0.00  0.00  0.00 3.00  1.00  0.00 3.00  0.00
Final Sat.:  2674    0  2501     0    0     0     0 5187  1900     0 5187     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.23 0.00  0.20  0.00 0.00  0.00  0.00 0.31  0.00  0.00 0.12  0.00
Crit Moves:  ****                                  ****        ****
Green/Cycle: 0.40 0.00  0.40  0.00 0.00  0.00  0.00 0.55  0.00  0.00 0.55  0.00
Volume/Cap:  0.57 0.00  0.50  0.00 0.00  0.00  0.00 0.57  0.00  0.00 0.21  0.00
Delay/Veh:   23.6  0.0  22.6   0.0  0.0   0.0   0.0 15.1   0.0   0.0 11.6   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  23.6  0.0  22.6   0.0  0.0   0.0   0.0 15.1   0.0   0.0 11.6   0.0
LOS by Move:    C    A     C     A    A     A     A    B     A     A    B     A
HCM2k85thQ:    15    0    12     0    0     0     0   18     0     0    5     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:42                Page 87-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM 4-Way Stop Method (Base Volume Alternative)
*******************************************************************************
Intersection #85 Cambridge St and La Veta Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.971
Loss Time (sec):       5               Average Delay (sec/veh):        31.6
Optimal Cycle:         0               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Stop Sign        Stop Sign        Stop Sign        Stop Sign
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Lanes:        1  0  1  0  0    0  0  1  0  1    1  0  0  0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     185  235     0     0  480   245   273    0   436     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  185  235     0     0  480   245   273    0   436     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   185  235     0     0  480   245   273    0   436     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  185  235     0     0  480   245   273    0   436     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  185  235     0     0  480   245   273    0   436     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 1.00  0.00  0.00 1.00  1.00  1.00 0.00  1.00  0.00 0.00  0.00
Final Sat.:   434  463     0     0  494   537   458    0   539     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.43 0.51  xxxx  xxxx 0.97  0.46  0.60 xxxx  0.81  xxxx xxxx  xxxx
Crit Moves:       ****             ****                     ****
Delay/Veh:   16.6 17.7   0.0   0.0 59.7  14.5  21.1  0.0  30.8   0.0  0.0   0.0
Delay Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  16.6 17.7   0.0   0.0 59.7  14.5  21.1  0.0  30.8   0.0  0.0   0.0
LOS by Move:    C    C     *     *    F     B     C    *     D     *    *     *
ApproachDel:       17.2             44.4             27.1           xxxxxx
Delay Adj:         1.00             1.00             1.00            xxxxx
ApprAdjDel:        17.2             44.4             27.1           xxxxxx
LOS by Appr:          C                E                D                *
AllWayAvgQ:   0.7  0.9   0.0   0.0  6.8   0.8   1.4  0.0   3.2   0.0  0.0   0.0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:43                Page 88-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #86 Cambridge St and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.563
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        27               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:            Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    1  0  0  0  1    1  0  2  0  0    0  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   567    0   183    80  216     0     0  195   152
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   567    0   183    80  216     0     0  195   152
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   567    0   183    80  216     0     0  195   152
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   567    0   183    80  216     0     0  195   152
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   567    0   183    80  216     0     0  195   152
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 0.00  0.00  1.00 0.00  1.00  1.00 2.00  0.00  0.00 1.12  0.88
Final Sat.:     0    0     0  1600    0  1600  1600 3400     0     0 1898  1402
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.35 0.00  0.11  0.05 0.06  0.00  0.00 0.10  0.11
Crit Moves:                   ****             ****                     ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:44                Page 89-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #87 Mabury St and 1st Street
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.714
Loss Time (sec):       5               Average Delay (sec/veh):        27.4
Optimal Cycle:        40               Level Of Service:                  C
*******************************************************************************
Street Name:              Mabury                          1st Street
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    1  0  1! 0  1    0  0  2  1  0    1  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:       6    0   157   248  147   554     0 1230    13    38  579     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    6    0   157   248  147   554     0 1230    13    38  579     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     6    0   157   248  147   554     0 1230    13    38  579     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    6    0   157   248  147   554     0 1230    13    38  579     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    6    0   157   248  147   554     0 1230    13    38  579     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 1.00  0.85  0.90 0.90  0.90  1.00 0.91  0.91  0.95 0.91  0.91
Lanes:       1.00 0.00  1.00  1.23 0.27  1.50  0.00 2.97  0.03  1.00 3.00  0.00
Final Sat.:  1805    0  1615  2097  459  2575     0 5128    54  1805 5187     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.10  0.12 0.32  0.22  0.00 0.24  0.24  0.02 0.11  0.00
Crit Moves:             ****       ****             ****        ****
Green/Cycle: 0.14 0.00  0.14  0.45 0.45  0.45  0.00 0.34  0.34  0.03 0.37  0.00
Volume/Cap:  0.02 0.00  0.71  0.26 0.71  0.48  0.00 0.71  0.71  0.71 0.31  0.00
Delay/Veh:   37.5  0.0  51.9  17.3 24.2  19.6   0.0 30.4  30.4  84.9 22.8   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  37.5  0.0  51.9  17.3 24.2  19.6   0.0 30.4  30.4  84.9 22.8   0.0
LOS by Move:    D    A     D     B    C     B     A    C     C     F    C     A
HCM2k85thQ:     0    0    10     6   22    12     0   20    20     4    7     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Attachment 8

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:45                Page 90-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #88 Tustin St and La Veta Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.446
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        22               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  1  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       7  301    87    67 1307     4     9   11    35   307    1    47
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    7  301    87    67 1307     4     9   11    35   307    1    47
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     7  301    87    67 1307     4     9   11    35   307    1    47
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    7  301    87    67 1307     4     9   11    35   307    1    47
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    7  301    87    67 1307     4     9   11    35   307    1    47
OvlAdjVol:                                                                   0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       1.00 2.33  0.67  1.00 2.99  0.01  1.00 1.00  1.00  1.99 0.01  1.00
Final Sat.:  1600 3924  1076  1600 4985    15  1600 1700  1600  3190   10  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.08  0.08  0.04 0.26  0.27  0.01 0.01  0.02  0.10 0.10  0.03
OvlAdjV/S:                                                                0.00
Crit Moves:  ****                      ****             ****       ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:45                Page 91-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #89 Tustin St and SR-22 WB On-Ramp
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.635
Loss Time (sec):       5               Average Delay (sec/veh):        12.2
Optimal Cycle:        33               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected         Permitted       Protected        Protected
Rights:           Include           Include         Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  0    0  0  2  1  0    0  0  0  0  0    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     614  571     0     0 1171   699     0    0     0     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  614  571     0     0 1171   699     0    0     0     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   614  571     0     0 1171   699     0    0     0     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  614  571     0     0 1171   699     0    0     0     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  614  571     0     0 1171   699     0    0     0     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 0.95  1.00  1.00 0.86  0.86  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       2.00 2.00  0.00  0.00 2.00  1.00  0.00 0.00  0.00  0.00 0.00  0.00
Final Sat.:  3502 3610     0     0 3264  1632     0    0     0     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.18 0.16  0.00  0.00 0.36  0.43  0.00 0.00  0.00  0.00 0.00  0.00
Crit Moves:  ****                     ****
Green/Cycle: 0.28 0.95  0.00  0.00 0.67  0.67  0.00 0.00  0.00  0.00 0.00  0.00
Volume/Cap:  0.64 0.17  0.00  0.00 0.53  0.64  0.00 0.00  0.00  0.00 0.00  0.00
Delay/Veh:   33.2  0.2   0.0   0.0  8.4   9.8   0.0  0.0   0.0   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  33.2  0.2   0.0   0.0  8.4   9.8   0.0  0.0   0.0   0.0  0.0   0.0
LOS by Move:    C    A     A     A    A     A     A    A     A     A    A     A
HCM2k85thQ:    14    1     0     0   15    21     0    0     0     0    0     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Attachment 8

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:46                Page 92-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #90 Tustin St and SR-22 EB Off-Ramp / Seba Ave
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.723
Loss Time (sec):       5                Average Delay (sec/veh):        25.0
Optimal Cycle:        42                Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted      Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  1  0    1  0  3  0  0    1  0  1! 0  1    0  0  1! 0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  953     5    17 1049     0   275   27  1182     6    0    43
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  953     5    17 1049     0   275   27  1182     6    0    43
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  953     5    17 1049     0   275   27  1182     6    0    43
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  953     5    17 1049     0   275   27  1182     6    0    43
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  953     5    17 1049     0   275   27  1182     6    0    43
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  0.91  0.14 0.91  1.00  0.87 0.87  0.87  0.88 1.00  0.88
Lanes:       0.00 2.98  0.02  1.00 3.00  0.00  1.18 0.04  1.78  0.12 0.00  0.88
Final Sat.:     0 5155    27   272 5187     0  1961   59  2956   204    0  1460
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.18  0.18  0.06 0.20  0.00  0.14 0.46  0.40  0.03 0.00  0.03
Crit Moves:                      ****             ****        ****
Green/Cycle: 0.00 0.28  0.28  0.28 0.28  0.00  0.63 0.63  0.63  0.04 0.00  0.04
Volume/Cap:  0.00 0.66  0.66  0.22 0.72  0.00  0.22 0.72  0.63  0.72 0.00  0.72
Delay/Veh:    0.0 33.0  33.0  29.2 34.4   0.0   8.0 13.9  12.0  79.1  0.0  79.1
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 33.0  33.0  29.2 34.4   0.0   8.0 13.9  12.0  79.1  0.0  79.1
LOS by Move:    A    C     C     C    C     A     A    B     B     E    A     E
HCM2k85thQ:     0   16    16     1   18     0     5   25    19     5    0     5
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:47                Page 93-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #91 Tustin Ave and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.195
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  1  1  0    1  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     101  586   103   280 2411    48    84  317   546   416  460   601
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  101  586   103   280 2411    48    84  317   546   416  460   601
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   101  586   103   280 2411    48    84  317   546   416  460   601
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  101  586   103   280 2411    48    84  317   546   416  460   601
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  101  586   103   280 2411    48    84  317   546   416  460   601
OvlAdjVol:                                                                 461
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.55  0.45  2.00 2.94  0.06  1.00 1.00  1.00  1.00 1.00  1.00
Final Sat.:  3200 4282   718  3200 4906    94  1600 1700  1600  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.14  0.14  0.09 0.49  0.51  0.05 0.19  0.34  0.26 0.27  0.38
OvlAdjV/S:                                                                 0.29
Crit Moves:  ****                      ****             ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:48                Page 94-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #92 Tustin Ave and Santa Clara Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.037
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    2  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:      83  453    84   151 3094    98   124  314   229   160  332   166
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   83  453    84   151 3094    98   124  314   229   160  332   166
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    83  453    84   151 3094    98   124  314   229   160  332   166
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   83  453    84   151 3094    98   124  314   229   160  332   166
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   83  453    84   151 3094    98   124  314   229   160  332   166
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.53  0.47  2.00 2.91  0.09  1.00 1.16  0.84  1.00 1.33  0.67
Final Sat.:  1600 4249   751  3200 4853   147  1600 1950  1350  1600 2233  1067
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.11  0.11  0.05 0.64  0.67  0.08 0.16  0.17  0.10 0.15  0.16
Crit Moves:  ****                         ****              ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:49                Page 95-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #93 Tustin Ave and 17th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.911
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        93               Level Of Service:                  E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  1  0    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     127  226   269   716 2067    23   230  908   155   664 1047   256
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  127  226   269   716 2067    23   230  908   155   664 1047   256
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   127  226   269   716 2067    23   230  908   155   664 1047   256
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  127  226   269   716 2067    23   230  908   155   664 1047   256
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  127  226   269   716 2067    23   230  908   155   664 1047   256
OvlAdjVol:                 0                                                  0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.00  1.00  2.00 2.97  0.03  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 3400  1600  3200 4947    53  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.07  0.17  0.22 0.42  0.44  0.07 0.18  0.10  0.21 0.21  0.16
OvlAdjV/S:                 0.00                                               0.00
Crit Moves:  ****                          ****        ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:50                Page 96-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #94 Tustin Ave and 4th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.830
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        59               Level Of Service:                 D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    2  0  2  0  1    1  0  2  1  1    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       80  408   365   601  765   237   126  748    31   125  704   457
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    80  408   365   601  765   237   126  748    31   125  704   457
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     80  408   365   601  765   237   126  748    31   125  704   457
Reduct Vol:      0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    80  408   365   601  765   237   126  748    31   125  704   457
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    80  408   365   601  765   237   126  748    31   125  704   457
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.00  1.00  2.00 2.00  1.00  1.00 3.00  1.00  1.00 2.00  1.00
Final Sat.:  1600 3400  1600  3200 3400  1600  1600 5100  1600  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.12  0.23  0.19 0.23  0.15  0.08 0.15  0.02  0.08 0.21  0.29
Crit Moves:             ****  ****             ****                      ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:50                Page 97-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #95 SR-55 SB Ramps / Auto Mall Dr and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.672
Loss Time (sec):       5               Average Delay (sec/veh):        25.2
Optimal Cycle:        36               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  2    1  0  1  0  1    1  0  3  0  1    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     456   68   540    50   30     8    36 1426   527   510 1202   157
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  456   68   540    50   30     8    36 1426   527   510 1202   157
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Volume:   456   68   540    50   30     8    36 1426     0   510 1202   157
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  456   68   540    50   30     8    36 1426     0   510 1202   157
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
FinalVolume:  456   68   540    50   30     8    36 1426     0   510 1202   157
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.96 0.96  0.75  0.95 1.00  0.85  0.95 0.91  1.00  0.92 0.89  0.89
Lanes:       1.74 0.26  2.00  1.00 1.00  1.00  1.00 3.00  1.00  2.00 2.65  0.35
Final Sat.:  3168  472  2842  1805 1900  1615  1805 5187  1900  3502 4510   589
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.14  0.19  0.03 0.02  0.00  0.02 0.27  0.00  0.15 0.27  0.27
Crit Moves:             ****  ****                 ****        ****
Green/Cycle: 0.28 0.28  0.28  0.04 0.04  0.04  0.04 0.41  0.00  0.22 0.58  0.58
Volume/Cap:  0.51 0.51  0.67  0.67 0.38  0.12  0.46 0.67  0.00  0.67 0.46  0.46
Delay/Veh:   30.5 30.5  34.0  68.7 49.8  47.0  50.8 24.9   0.0  38.3 12.0  12.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  30.5 30.5  34.0  68.7 49.8  47.0  50.8 24.9   0.0  38.3 12.0  12.0
LOS by Move:    C    C     C     E    D     D     D    C     A     D    B     B
HCM2k85thQ:    11   11    14     4    2     1     3   20     0    13   13    13
```

```
********************************************************************************
Note: Queue reported is the number of cars per lane.
********************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:51                Page 98-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #96 SR-55 NB Ramps / Del Amo Ave and Newport Avenue
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.673
Loss Time (sec):       5                Average Delay (sec/veh):        25.4
Optimal Cycle:        36                Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    1  0  3  0  1    2  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     392  104    66    21  512   750   269  163   155     8  223     4
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  392  104    66    21  512   750   269  163   155     8  223     4
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   392  104    66    21  512   750   269  163   155     8  223     4
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  392  104    66    21  512   750   269  163   155     8  223     4
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  392  104    66    21  512   750   269  163   155     8  223     4
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 0.86  0.86  0.95 0.91  0.85  0.92 0.88  0.88  0.95 0.95  0.95
Lanes:       2.00 2.00  1.00  1.00 3.00  1.00  2.00 1.03  0.97  1.00 1.96  0.04
Final Sat.:  3502 3257  1629  1805 5187  1615  3502 1715  1631  1805 3536    63
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.03  0.04  0.01 0.10  0.46  0.08 0.10  0.10  0.00 0.06  0.06
Crit Moves:  ****                        ****  ****                   ****
Green/Cycle: 0.17 0.58  0.58  0.17 0.58  0.69  0.11 0.20  0.20  0.01 0.09  0.09
Volume/Cap:  0.67 0.06  0.07  0.07 0.17  0.67  0.67 0.48  0.48  0.48 0.67  0.67
Delay/Veh:   42.2  9.3   9.4  35.3 10.0  10.6  47.0 36.0  36.0  69.3 49.1  49.1
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  42.2  9.3   9.4  35.3 10.0  10.6  47.0 36.0  36.0  69.3 49.1  49.1
LOS by Move:    D    A     A     D    B     B     D    D     D     E    D     D
HCM2k85thQ:    11    1     2     1    4    21     8    8     8     1    8     8
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:52                Page 99-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #97 Red Hill Ave and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.610
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        30               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Ovl            Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     101  374   106   195  828   388   397 1276   271   255 1234   173
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  101  374   106   195  828   388   397 1276   271   255 1234   173
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   101  374   106   195  828   388   397 1276   271   255 1234   173
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  101  374   106   195  828   388   397 1276   271   255 1234   173
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  101  374   106   195  828   388   397 1276   271   255 1234   173
OvlAdjVol:                                 189              221
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.07  0.07  0.06 0.16  0.24  0.12 0.25  0.17  0.08 0.24  0.11
OvlAdjV/S:                                 0.12             0.14
Crit Moves:  ****                  ****        ****                  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:53                Page 100-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #98 Red Hill Ave and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):          0.560
Loss Time (sec):       5               Average Delay (sec/veh):       xxxxxx
Optimal Cycle:        27               Level Of Service:                    A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  1  0    2  0  2  1  0    1  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       68  414    56    20  935   188   273  464   342   120  427    76
Growth Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    68  414    56    20  935   188   273  464   342   120  427    76
User Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:      1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     68  414    56    20  935   188   273  464   342   120  427    76
Reduct Vol:      0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    68  414    56    20  935   188   273  464   342   120  427    76
PCE Adj:      1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:      1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    68  414    56    20  935   188   273  464   342   120  427    76
OvlAdjVol:                                                                   66
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:     1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:   1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:        2.00 3.52  0.48  2.00 2.50  0.50  1.00 2.00  1.00  2.00 3.00  1.00
Final Sat.:   3200 5937   763  3200 4196   804  1600 3400  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:      0.02 0.07  0.07  0.01 0.22  0.23  0.17 0.14  0.21  0.04 0.08  0.05
OvlAdjV/S:                                                                   0.04
Crit Moves:   ****                     ****  ****                 ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:53                Page 101-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #99 Red Hill Ave and Dyer Rd / barranca Pkwy
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):          0.548
Loss Time (sec):       5               Average Delay (sec/veh):       xxxxxx
Optimal Cycle:        26               Level Of Service:                    A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  4  0  1    2  0  4  0  1    2  0  3  1  0    2  0  4  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     152  379   125   163  719    94   124  748   296   511  571   111
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  152  379   125   163  719    94   124  748   296   511  571   111
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   152  379   125   163  719    94   124  748   296   511  571   111
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  152  379   125   163  719    94   124  748   296   511  571   111
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  152  379   125   163  719    94   124  748   296   511  571   111
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 4.00  1.00  2.00 4.00  1.00  2.00 3.00  1.00  2.00 4.00  1.00
Final Sat.:  3200 6800  1600  3200 6800  1600  3200 5100  1600  3200 6800  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.06  0.08  0.05 0.11  0.06  0.04 0.15  0.19  0.16 0.08  0.07
Crit Moves:  ****                ****                ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:54                Page 102-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #100 Red Hill Ave and Alton Pkwy
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.855
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        67               Level Of Service:                 D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  2  0  1    2  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     225  663   415   212  962   154   158  490   490   342  290   163
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  225  663   415   212  962   154   158  490   490   342  290   163
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   225  663   415   212  962   154   158  490   490   342  290   163
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  225  663   415   212  962   154   158  490   490   342  290   163
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  225  663   415   212  962   154   158  490   490   342  290   163
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 2.00  1.00  2.00 1.00  1.00
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 3400  1600  3200 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.13  0.26  0.13 0.19  0.10  0.10 0.14  0.31  0.11 0.17  0.10
Crit Moves:             ****  ****                     ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:55                Page 103-1
------------------------------------------------------------------------------
                          Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #101 Red Hill Ave and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.686
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ignore           Include          Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       83  742    13   186  481   441  1153  596    98    32  308   789
Growth Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    83  742    13   186  481   441  1153  596    98    32  308   789
User Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
PHF Adj:      1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
PHF Volume:     83  742    13   186  481     0  1153  596    98    32  308     0
Reduct Vol:      0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    83  742    13   186  481     0  1153  596    98    32  308     0
PCE Adj:      1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
MLF Adj:      1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
FinalVolume:    83  742    13   186  481     0  1153  596    98    32  308     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:     1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:   1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:        2.00 2.95  0.05  2.00 3.00  1.00  2.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:   3200 4917    83  3200 5100  1600  3200 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:      0.03 0.15  0.16  0.06 0.09  0.00  0.36 0.12  0.06  0.02 0.06  0.00
Crit Moves:             ****  ****            ****                  ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:55                Page 104-1
--------------------------------------------------------------------------------
                          Santa Ana Circulation Element
--------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
********************************************************************************
Intersection #102 Red Hill Ave and Main St
********************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.722
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        40               Level Of Service:                  C
********************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     201  691   449    56  261    90   139 1309   254   154  309    73
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  201  691   449    56  261    90   139 1309   254   154  309    73
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   201  691   449    56  261    90   139 1309   254   154  309    73
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  201  691   449    56  261    90   139 1309   254   154  309    73
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  201  691   449    56  261    90   139 1309   254   154  309    73
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 2.00  1.00  2.00 2.00  1.00  2.00 2.51  0.49  2.00 2.43  0.57
Final Sat.:  3200 3400  1600  3200 3400  1600  3200 4220   780  3200 4083   917
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.20  0.28  0.02 0.08  0.06  0.04 0.31  0.33  0.05 0.08  0.08
Crit Moves:             ****  ****                          ****  ****
********************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:56                Page 105-1
------------------------------------------------------------------------------
                          Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #103 I-5 SB Ramps and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.559
Loss Time (sec):       5               Average Delay (sec/veh):        17.4
Optimal Cycle:        28               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Ovl             Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  1    2  0  3  0  0    0  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   382    0    38   332  569     0     0 1267   370
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   382    0    38   332  569     0     0 1267   370
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   382    0    38   332  569     0     0 1267   370
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   382    0    38   332  569     0     0 1267   370
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   382    0    38   332  569     0     0 1267   370
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.92 1.00  0.85  0.92 0.91  1.00  1.00 0.88  0.88
Lanes:       0.00 0.00  0.00  2.00 0.00  1.00  2.00 3.00  0.00  0.00 2.32  0.68
Final Sat.:     0    0     0  3502    0  1615  3502 5187     0     0 3878  1133
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.11 0.00  0.02  0.09 0.11  0.00  0.00 0.33  0.33
Crit Moves:                   ****             ****                   ****
Green/Cycle: 0.00 0.00  0.00  0.20 0.00  0.37  0.17 0.75  0.00  0.00 0.58  0.58
Volume/Cap:  0.00 0.00  0.00  0.56 0.00  0.06  0.56 0.15  0.00  0.00 0.56  0.56
Delay/Veh:    0.0  0.0   0.0  37.4  0.0  20.7  39.3  3.4   0.0   0.0 13.0  13.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
```

```
AdjDel/Veh:   0.0  0.0   0.0  37.4  0.0  20.7  39.3  3.4   0.0   0.0 13.0  13.0
LOS by Move:    A    A     A     D    A     C     D    A     A     A    B     B
HCM2k85thQ:     0    0     0     9    0     1     9    3     0     0   17    17
********************************************************************************
Note: Queue reported is the number of cars per lane.
********************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:57                Page 106-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #104 Tustin Ranch Rd and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.520
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        25               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  1    2  0  3  0  0    0  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   141    0    18    27  357     0     0 2130   490
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   141    0    18    27  357     0     0 2130   490
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   141    0    18    27  357     0     0 2130   490
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   141    0    18    27  357     0     0 2130   490
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   141    0    18    27  357     0     0 2130   490
OvlAdjVol:                                                                 420
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 0.00  0.00  2.00 0.00  1.00  2.00 3.00  0.00  0.00 3.00  1.00
Final Sat.:     0    0     0  3200    0  1600  3200 5100     0     0 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.04 0.00  0.01  0.01 0.07  0.00  0.00 0.42  0.31
OvlAdjV/S:                                                                 0.26
Crit Moves:                    ****             ****                 ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:58                Page 107-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #105 Von Karman Ave and Barranca Pkwy
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):          0.929
Loss Time (sec):       5               Average Delay (sec/veh):       xxxxxx
Optimal Cycle:       108               Level Of Service:                    E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  1  1  0    2  0  2  0  2    2  0  3  0  1    2  0  4  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     401  533   319   104 1021   446   219  823   275   902 1482    46
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  401  533   319   104 1021   446   219  823   275   902 1482    46
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   401  533   319   104 1021   446   219  823   275   902 1482    46
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  401  533   319   104 1021   446   219  823   275   902 1482    46
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  401  533   319   104 1021   446   219  823   275   902 1482    46
OvlAdjVol:                          227
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 1.25  0.75  2.00 2.00  2.00  2.00 3.00  1.00  2.00 4.00  1.00
Final Sat.:  3200 2102  1198  3200 3400  3200  3200 5100  1600  3200 6800  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.25  0.27  0.03 0.30  0.14  0.07 0.16  0.17  0.28 0.22  0.03
OvlAdjV/S:                          0.07
Crit Moves:  ****                ****                     ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:10:59                Page 108-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #106 Red Hill Avenue and El Camino Real
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.650
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        33               Level Of Service:                  B
*******************************************************************************
Street Name:         Red Hill Avenue                   El Camino Real
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    1  0  2  1  0    1  0  1  0  1    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     230  589   190    19 1372    84    48  108   114   246  202    15
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  230  589   190    19 1372    84    48  108   114   246  202    15
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   230  589   190    19 1372    84    48  108   114   246  202    15
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  230  589   190    19 1372    84    48  108   114   246  202    15
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  230  589   190    19 1372    84    48  108   114   246  202    15
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       2.00 3.00  1.00  1.00 2.83  0.17  1.00 1.00  1.00  1.00 0.93  0.07
Final Sat.:  3200 5100  1600  1600 4723   277  1600 1700  1600  1600 1489   111
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.12  0.12  0.01 0.29  0.30  0.03 0.06  0.07  0.15 0.14  0.14
Crit Moves:  ****                     ****                ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:11:00              Page 109-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #107 Red Hill Avenue and I-5 NB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.627
Loss Time (sec):       5               Average Delay (sec/veh):        20.8
Optimal Cycle:        32               Level Of Service:                 C
******************************************************************************
Street Name:         Red Hill Avenue                    I-5 NB Ramps
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  0    0  0  3  0  1    0  0  0  0  0    2  0  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     254  843     0     0 1171   440     0    0     0   258    0   295
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  254  843     0     0 1171   440     0    0     0   258    0   295
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   254  843     0     0 1171   440     0    0     0   258    0   295
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  254  843     0     0 1171   440     0    0     0   258    0   295
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  254  843     0     0 1171   440     0    0     0   258    0   295
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.85  1.00 1.00  1.00  0.60 1.00  0.85
Lanes:       1.00 3.00  0.00  0.00 3.00  1.00  0.00 0.00  0.00  2.00 0.00  1.00
Final Sat.:  1805 5187     0     0 5187  1615     0    0     0  2267    0  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.16  0.00  0.00 0.23  0.27  0.00 0.00  0.00  0.11 0.00  0.18
Crit Moves:  ****                     ****                                 ****
Green/Cycle: 0.22 0.66  0.00  0.00 0.43  0.43  0.00 0.00  0.00  0.29 0.00  0.29
Volume/Cap:  0.63 0.25  0.00  0.00 0.52  0.63  0.00 0.00  0.00  0.39 0.00  0.63
Delay/Veh:   38.1  7.0   0.0   0.0 20.9  23.8   0.0  0.0   0.0  28.7  0.0  33.4
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
```

```
AdjDel/Veh:  38.1  7.0   0.0   0.0 20.9  23.8   0.0  0.0   0.0  28.7  0.0  33.4
LOS by Move:    D    A     A     A    C     C     A    A     A     C    A     C
HCM2k85thQ:    12    6     0     0   15    17     0    0     0     6    0    13
********************************************************************************
Note: Queue reported is the number of cars per lane.
********************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:11:01              Page 110-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #108 Red Hill Avenue and I-5 SB Ramps
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.799
Loss Time (sec):       5               Average Delay (sec/veh):        23.7
Optimal Cycle:        54               Level Of Service:                  C
*******************************************************************************
Street Name:         Red Hill Avenue                    I-5 SB Ramps
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  1    1  0  3  0  0    0  1  0  0  1    0  0  0  0  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:       0 1191   527   371 1064     0   200    5   367     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1191   527   371 1064     0   200    5   367     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1191   527   371 1064     0   200    5   367     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1191   527   371 1064     0   200    5   367     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1191   527   371 1064     0   200    5   367     0    0     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  0.85  0.95 0.91  1.00  0.95 0.95  0.85  1.00 1.00  1.00
Lanes:       0.00 4.00  1.00  1.00 3.00  0.00  0.98 0.02  1.00  0.00 0.00  0.00
Final Sat.:     0 6916  1615  1805 5187     0  1757   44  1615     0    0     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.17  0.33  0.21 0.21  0.00  0.11 0.11  0.23  0.00 0.00  0.00
Crit Moves:             ****  ****                         ****
Green/Cycle: 0.00 0.41  0.41  0.26 0.67  0.00  0.28 0.28  0.28  0.00 0.00  0.00
Volume/Cap:  0.00 0.42  0.80  0.80 0.31  0.00  0.40 0.40  0.80  0.00 0.00  0.00
Delay/Veh:    0.0 21.2  32.8  44.2  7.1   0.0  29.4 29.4  42.7   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 21.2  32.8  44.2  7.1   0.0  29.4 29.4  42.7   0.0  0.0   0.0
LOS by Move:    A    C     C     D    A     A     C    C     D     A    A     A
HCM2k85thQ:     0   11    24    19    8     0     8    8    19     0    0     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:11:01              Page 111-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #109 Red Hill Avenue and Nisson Road
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.651
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        33               Level Of Service:                  B
******************************************************************************
Street Name:         Red Hill Avenue                    Nisson Road
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  1  0    1  0  2  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      16 1244    23   162 1222   128   242   59    48    49   26   215
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   16 1244    23   162 1222   128   242   59    48    49   26   215
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    16 1244    23   162 1222   128   242   59    48    49   26   215
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   16 1244    23   162 1222   128   242   59    48    49   26   215
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   16 1244    23   162 1222   128   242   59    48    49   26   215
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 3.93  0.07  1.00 2.72  0.28  1.00 0.55  0.45  1.00 0.11  0.89
Final Sat.:  1600 6584   116  1600 4545   455  1600  882   718  1600  173  1427
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.19  0.20  0.10 0.27  0.28  0.15 0.07  0.07  0.03 0.15  0.15
Crit Moves:             ****  ****             ****                     ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:11:02                Page 112-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #110 Red Hill Avenue and Walnut Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.636
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        31               Level Of Service:                  B
*******************************************************************************
Street Name:         Red Hill Avenue                   Walnut Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    2  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     129  502    95   113 1135   127   104  258   254   263  348   166
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  129  502    95   113 1135   127   104  258   254   263  348   166
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   129  502    95   113 1135   127   104  258   254   263  348   166
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  129  502    95   113 1135   127   104  258   254   263  348   166
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  129  502    95   113 1135   127   104  258   254   263  348   166
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.05  1.00
Lanes:       1.00 2.52  0.48  1.00 2.70  0.30  1.00 1.01  0.99  2.00 1.35  0.65
Final Sat.:  1600 4236   764  1600 4517   483  1600 1713  1588  3200 2267  1033
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.12  0.12  0.07 0.25  0.26  0.07 0.15  0.16  0.08 0.15  0.16
Crit Moves:  ****                 ****             ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:11:02                Page 113-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #111 Red Hill Avenue and Valencia Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.652
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        33               Level Of Service:                  B
*******************************************************************************
Street Name:         Red Hill Avenue                 Valencia Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  1  0    1  0  2  1  0    1  0  1  0  1    2  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       98  412   133   126 1082    72    49  343   133   315  433   153
Growth Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    98  412   133   126 1082    72    49  343   133   315  433   153
User Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:      1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     98  412   133   126 1082    72    49  343   133   315  433   153
Reduct Vol:      0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    98  412   133   126 1082    72    49  343   133   315  433   153
PCE Adj:      1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:      1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    98  412   133   126 1082    72    49  343   133   315  433   153
OvlAdjVol:                  0                                                 27
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:     1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:   1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:        1.00 3.02  0.98  1.00 2.81  0.19  1.00 1.00  1.00  2.00 1.00  1.00
Final Sat.:   1600 5138  1562  1600 4701   299  1600 1700  1600  3200 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:      0.06 0.08  0.09  0.08 0.23  0.24  0.03 0.20  0.08  0.10 0.25  0.10
OvlAdjV/S:                0.00                                                0.02
Crit Moves:   ****                      ****        ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:11:03              Page 114-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #112 Tustin Ranch Road and Warner Avenue North
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.449
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        22               Level Of Service:                  A
*******************************************************************************
Street Name:        Tustin Ranch Road               Warner Avenue North
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:            Ovl            Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  3  0  1    2  0  3  0  0    0  0  0  0  0    3  0  0  0  2
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:       0  321   311   403 1140     0     0    0     0   844    0   249
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  321   311   403 1140     0     0    0     0   844    0   249
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  321   311   403 1140     0     0    0     0   844    0   249
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  321   311   403 1140     0     0    0     0   844    0   249
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  321   311   403 1140     0     0    0     0   844    0   249
OvlAdjVol:               30                                                  0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 3.00  1.00  2.00 3.00  0.00  0.00 0.00  0.00  3.00 0.00  2.00
Final Sat.:     0 5100  1600  3200 5100     0     0    0     0  4800    0  3200
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.06  0.19  0.13 0.22  0.00  0.00 0.00  0.00  0.18 0.00  0.08
OvlAdjV/S:              0.02                                                0.00
Crit Moves:  ****               ****                          ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:11:04              Page 115-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #113 Tustin Ranch Road and Walnut Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.273
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Street Name:        Tustin Ranch Road                 Walnut Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Ovl              Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  1  1  0    2  0  2  0  1
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:       92  567   283  1076 3008   401   834 1089   658   187  276   233
Growth Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    92  567   283  1076 3008   401   834 1089   658   187  276   233
User Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:      1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     92  567   283  1076 3008   401   834 1089   658   187  276   233
Reduct Vol:      0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    92  567   283  1076 3008   401   834 1089   658   187  276   233
PCE Adj:      1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:      1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    92  567   283  1076 3008   401   834 1089   658   187  276   233
OvlAdjVol:              190               0                                   0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:     1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:   1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:        2.00 3.00  1.00  2.00 3.00  1.00  2.00 1.25  0.75  2.00 2.00  1.00
Final Sat.:   3200 5100  1600  3200 5100  1600  3200 2095  1205  3200 3400  1600
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:      0.03 0.11  0.18  0.34 0.59  0.25  0.26 0.52  0.55  0.06 0.08  0.15
OvlAdjV/S:              0.12               0.00                                0.00
Crit Moves:   ****                ****                     ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:11:04                Page 116-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #114 SR-55 SB Ramps and Irvine Boulevard
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.099
Loss Time (sec):       5               Average Delay (sec/veh):        41.0
Optimal Cycle:       180               Level Of Service:                 D
*******************************************************************************
Street Name:          SR-55 SB Ramps                  Irvine Boulevard
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected         Permitted       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    1  0  1! 0  1    0  0  2  1  0    1  0  3  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0    65    0    71     0  647  1161   496 1240     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0    65    0    71     0  647  1161   496 1240     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0    65    0    71     0  647  1161   496 1240     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0    65    0    71     0  647  1161   496 1240     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0    65    0    71     0  647  1161   496 1240     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.88 1.00  0.77  1.00 0.82  0.82  0.95 0.91  1.00
Lanes:       0.00 0.00  0.00  1.44 0.00  1.56  0.00 2.00  1.00  1.00 3.00  0.00
Final Sat.:     0    0     0  2417    0  2277     0 3126  1563  1805 5187     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.03 0.00  0.03  0.00 0.21  0.74  0.27 0.24  0.00
Crit Moves:                    ****                          ****  ****
Green/Cycle: 0.00 0.00  0.00  0.02 0.00  0.05  0.00 0.68  0.68  0.25 0.93  0.00
Volume/Cap:  0.00 0.00  0.00  0.90 0.00  0.65  0.00 0.31  1.10  1.10 0.26  0.00
Delay/Veh:    0.0  0.0   0.0  94.5  0.0  54.0   0.0  6.6  70.6 109.4  0.4   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0  94.5  0.0  54.0   0.0  6.6  70.6 109.4  0.4   0.0
LOS by Move:    A    A     A     F    A     D     A    A     E     F    A     A
```

```
HCM2k85thQ:     0    0     0     5    0     4     0    7    77    36    2     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP AM Peak Hour       Thu Oct 22, 2020 14:11:05              Page 117-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #115 SR-55 NB Ramps and Irvine Boulevard
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.906
Loss Time (sec):       5               Average Delay (sec/veh):        23.5
Optimal Cycle:        93               Level Of Service:                  C
*******************************************************************************
Street Name:          SR-55 NB Ramps                  Irvine Boulevard
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:         Permitted       Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1! 0  1    0  0  0  0  0    1  0  3  0  0    0  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     440    0   423     0    0     0   222  526     0     0 1241   863
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  440    0   423     0    0     0   222  526     0     0 1241   863
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   440    0   423     0    0     0   222  526     0     0 1241   863
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  440    0   423     0    0     0   222  526     0     0 1241   863
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  440    0   423     0    0     0   222  526     0     0 1241   863
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.75 1.00  0.74  1.00 1.00  1.00  0.95 0.91  1.00  1.00 0.85  0.85
Lanes:       1.51 0.00  1.49  0.00 0.00  0.00  1.00 3.00  0.00  0.00 2.00  1.00
Final Sat.:  2135    0  2097     0    0     0  1805 5187     0     0 3247  1624
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.21 0.00  0.20  0.00 0.00  0.00  0.12 0.10  0.00  0.00 0.38  0.53
Crit Moves:  ****                             ****                       ****
Green/Cycle: 0.23 0.00  0.45  0.00 0.00  0.00  0.14 0.72  0.00  0.00 0.59  0.59
Volume/Cap:  0.91 0.00  0.44  0.00 0.00  0.00  0.91 0.14  0.00  0.00 0.65  0.91
Delay/Veh:   49.8  0.0  18.8   0.0  0.0   0.0  76.1  4.3   0.0   0.0 14.3  23.8
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  49.8  0.0  18.8   0.0  0.0   0.0  76.1  4.3   0.0   0.0 14.3  23.8
LOS by Move:    D    A     B     A    A     A     E    A     A     A    B     C
HCM2k85thQ:    18    0    10     0    0     0    15    3     0     0   21    42
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

APPENDIX D.4

ANALYSIS WORKSHEETS –
2045 NP (PM Peak Hour)

Santa Ana Circulation Element

Scenario Report

Scenario:	2045 NP PM Peak Hour
Command:	Default Command
Volume:	2045 NP PM
Geometry:	MPAH
Impact Fee:	Default Impact Fee
Trip Generation:	Default Trip Generation
Trip Distribution:	Default Trip Distribution
Paths:	Default Path
Routes:	Default Route
Configuration:	Default Configuration

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

2045 NP PM Peak Hour Thu Oct 22, 2020 14:15:55 Page 2-1

Santa Ana Circulation Element

Impact Analysis Report
Level Of Service

Intersection	Base LOS	Base Del/Veh	Base V/C	Future LOS	Future Del/Veh	Future V/C	Change in V/C
# 1 Euclid St and 1st St	D	xxxxx	0.857	D	xxxxx	0.857	+ 0.000 V/C
# 2 Euclid St and McFadden Ave	D	xxxxx	0.896	D	xxxxx	0.896	+ 0.000 V/C
# 3 Euclid St and Edinger Ave	D	xxxxx	0.888	D	xxxxx	0.888	+ 0.000 V/C
# 4 Newhope St and Hazard Ave	C	xxxxx	0.721	C	xxxxx	0.721	+ 0.000 V/C
# 5 Newhope St and McFadden Ave	C	xxxxx	0.777	C	xxxxx	0.777	+ 0.000 V/C
# 6 Harbor Blvd and SR-22 WB Off-R	C	24.2	0.802	C	24.2	0.802	+ 0.000 D/V
# 7 Trask Avenue and SR-22 EB On-R	B	13.6	0.533	B	13.6	0.533	+ 0.000 D/V
# 8 Harbor Blvd and Westminster Av	D	xxxxx	0.882	D	xxxxx	0.882	+ 0.000 V/C
# 9 Harbor Blvd and 1st St	C	xxxxx	0.778	C	xxxxx	0.778	+ 0.000 V/C
# 10 Harbor Blvd and McFadden Ave	D	xxxxx	0.812	D	xxxxx	0.812	+ 0.000 V/C
# 11 Harbor Blvd and Edinger Ave	C	xxxxx	0.725	C	xxxxx	0.725	+ 0.000 V/C
# 12 Harbor Blvd and Warner Ave	F	xxxxx	1.536	F	xxxxx	1.536	+ 0.000 V/C
# 13 Harbor Blvd and Segerstrom Ave	E	xxxxx	0.921	E	xxxxx	0.921	+ 0.000 V/C
# 14 MacArthur Blvd and Hyland Ave	E	xxxxx	0.917	E	xxxxx	0.917	+ 0.000 V/C
# 15 MacArthur Blvd and Harbor Blvd	C	xxxxx	0.783	C	xxxxx	0.783	+ 0.000 V/C
# 16 Harbor Blvd and Sunflower Ave	C	xxxxx	0.717	C	xxxxx	0.717	+ 0.000 V/C
# 17 Harbor Blvd and I-405 NB Off-R	B	18.3	0.699	B	18.3	0.699	+ 0.000 D/V
# 18 Harbor Blvd and I-405 SB Off-R	B	17.9	0.667	B	17.9	0.667	+ 0.000 D/V
# 19 Fairview St and Civic Center D	C	xxxxx	0.757	C	xxxxx	0.757	+ 0.000 V/C
# 20 Fairview St and 1st St	D	xxxxx	0.898	D	xxxxx	0.898	+ 0.000 V/C
# 21 Fairview St and McFadden Ave	C	xxxxx	0.776	C	xxxxx	0.776	+ 0.000 V/C
# 22 Fairview St and Edinger Ave	E	xxxxx	0.916	E	xxxxx	0.916	+ 0.000 V/C
# 23 Fairview St and Warner Ave	C	xxxxx	0.796	C	xxxxx	0.796	+ 0.000 V/C
# 24 Fairview St and MacArthur Blvd	C	xxxxx	0.768	C	xxxxx	0.768	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
# 25 Fairview Rd and Sunflower Ave	C	xxxxx	0.715	C	xxxxx	0.715	+ 0.000 V/C
# 26 Greenville St and Edinger Ave	A	xxxxx	0.595	A	xxxxx	0.595	+ 0.000 V/C
# 27 Greenville St and Segerstrom A	C	xxxxx	0.777	C	xxxxx	0.777	+ 0.000 V/C
# 28 Raitt St and McFadden Ave	C	xxxxx	0.758	C	xxxxx	0.758	+ 0.000 V/C
# 29 Raitt St and Edinger Ave	E	xxxxx	0.986	E	xxxxx	0.986	+ 0.000 V/C
# 30 Bear St and MacArthur Blvd	D	xxxxx	0.851	D	xxxxx	0.851	+ 0.000 V/C
# 31 Bristol St and 17th St	D	xxxxx	0.823	D	xxxxx	0.823	+ 0.000 V/C
# 32 Bristol St and Civic Center Dr	E	xxxxx	0.911	E	xxxxx	0.911	+ 0.000 V/C
# 33 Bristol St and Santa Ana Blvd	D	xxxxx	0.853	D	xxxxx	0.853	+ 0.000 V/C
# 34 Bristol St and 1st St	D	xxxxx	0.826	D	xxxxx	0.826	+ 0.000 V/C
# 35 Bristol St and McFadden Ave	F	xxxxx	1.028	F	xxxxx	1.028	+ 0.000 V/C
# 36 Bristol St and Warner Ave	D	xxxxx	0.847	D	xxxxx	0.847	+ 0.000 V/C
# 37 Bristol St and Segerstrom Ave	D	xxxxx	0.870	D	xxxxx	0.870	+ 0.000 V/C
# 38 Bristol St and Alton Ave	B	xxxxx	0.633	B	xxxxx	0.633	+ 0.000 V/C
# 39 Bristol St and MacArthur Blvd	C	xxxxx	0.765	C	xxxxx	0.765	+ 0.000 V/C
# 40 Bristol St and Sunflower Ave	B	xxxxx	0.692	B	xxxxx	0.692	+ 0.000 V/C
# 41 Bristol St and I-405 NB Ramps	C	28.5	0.825	C	28.5	0.825	+ 0.000 D/V
# 42 Bristol St and I-405 SB Ramps	B	18.3	0.617	B	18.3	0.617	+ 0.000 D/V
# 43 Flower St and Santa Ana Blvd	D	xxxxx	0.857	D	xxxxx	0.857	+ 0.000 V/C
# 44 Flower St and 1st St	D	xxxxx	0.877	D	xxxxx	0.877	+ 0.000 V/C
# 45 Flower St and McFadden Ave	F	xxxxx	1.037	F	xxxxx	1.037	+ 0.000 V/C
# 46 Flower St and Segerstrom Ave	D	xxxxx	0.866	D	xxxxx	0.866	+ 0.000 V/C
# 47 Flower St and MacArthur Blvd	E	xxxxx	0.900	E	xxxxx	0.900	+ 0.000 V/C
# 48 Main St and La Veta Ave	B	xxxxx	0.696	B	xxxxx	0.696	+ 0.000 V/C
# 49 Main St and Mainplace Dr / Mem	A	xxxxx	0.556	A	xxxxx	0.556	+ 0.000 V/C
# 50 Main St and 17th St	C	xxxxx	0.760	C	xxxxx	0.760	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
# 51 Main St and Civic Center Dr	E	xxxxx	0.965	E	xxxxx	0.965	+ 0.000 V/C
# 52 Main St and Santa Ana Blvd	C	xxxxx	0.792	C	xxxxx	0.792	+ 0.000 V/C
# 53 Main St and 4th St	A	xxxxx	0.447	A	xxxxx	0.447	+ 0.000 V/C
# 54 Main St and 1st St	C	xxxxx	0.744	C	xxxxx	0.744	+ 0.000 V/C
# 55 Main St and McFadden Ave	E	xxxxx	0.925	E	xxxxx	0.925	+ 0.000 V/C
# 56 Main St and Edinger Ave	D	xxxxx	0.867	D	xxxxx	0.867	+ 0.000 V/C
# 57 Main St and MacArthur Blvd	C	xxxxx	0.749	C	xxxxx	0.749	+ 0.000 V/C
# 58 Penn Wy and 17th St	C	25.5	0.872	C	25.5	0.872	+ 0.000 D/V
# 59 I-5 NB Off Ramps/17th Street	B	19.0	0.587	B	19.0	0.587	+ 0.000 D/V
# 60 Penn Wy and I-5 SB Ramps	C	23.0	0.573	C	23.0	0.573	+ 0.000 D/V
# 61 Santiago St and Civic Center D	F	110.0	1.369	F	110.0	1.369	+ 0.000 V/C
# 62 Santiago St and Santa Ana Blvd	F	xxxxx	1.017	F	xxxxx	1.017	+ 0.000 V/C
# 63 Standard Ave and 4th St	D	xxxxx	0.893	D	xxxxx	0.893	+ 0.000 V/C
# 64 Standard Ave and 1st St	E	xxxxx	0.968	E	xxxxx	0.968	+ 0.000 V/C
# 65 Standard Ave and Mcfadden Ave	D	xxxxx	0.828	D	xxxxx	0.828	+ 0.000 V/C
# 66 Halladay St and Warner Ave	E	xxxxx	0.975	E	xxxxx	0.975	+ 0.000 V/C
# 67 Halladay St and Dyer Rd	F	xxxxx	1.057	F	xxxxx	1.057	+ 0.000 V/C
# 68 SR-55 SB Ramps and MacArthur B	B	17.8	0.567	B	17.8	0.567	+ 0.000 D/V
# 69 SR-55 NB Ramps and MacArthur B	B	14.6	0.484	B	14.6	0.484	+ 0.000 D/V
# 70 SR-55 SB Ramps and Dyer Rd	C	26.5	0.663	C	26.5	0.663	+ 0.000 D/V
# 71 Glassell St and La Veta Ave	C	xxxxx	0.744	C	xxxxx	0.744	+ 0.000 V/C
# 72 Glassell St and SR-22 WB Ramps	C	30.5	0.910	C	30.5	0.910	+ 0.000 D/V
# 73 Grand Ave / Glassell St and SR	C	31.6	0.931	C	31.6	0.931	+ 0.000 D/V
# 74 Grand Ave and Fairhaven Ave	C	xxxxx	0.717	C	xxxxx	0.717	+ 0.000 V/C
# 75 Grand Ave and Santa Clara Ave	D	xxxxx	0.808	D	xxxxx	0.808	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
# 76 Grand Ave and 17th St	D	xxxxx	0.856	D	xxxxx	0.856	+ 0.000 V/C
# 77 Grand Ave and I-5 NB Ramps	B	10.1	0.696	B	10.1	0.696	+ 0.000 D/V
# 78 Grand Ave and Santa Ana Blvd	C	25.3	0.721	C	25.3	0.721	+ 0.000 D/V
# 79 Grand Ave and 1st St	C	xxxxx	0.731	C	xxxxx	0.731	+ 0.000 V/C
# 80 Grand Ave and Chestnut Ave	B	xxxxx	0.688	B	xxxxx	0.688	+ 0.000 V/C
# 81 Grand Ave and McFadden Ave	D	xxxxx	0.821	D	xxxxx	0.821	+ 0.000 V/C
# 82 Grand Ave and Edinger Ave	F	xxxxx	1.004	F	xxxxx	1.004	+ 0.000 V/C
# 83 Grand Ave and Warner Ave	D	xxxxx	0.827	D	xxxxx	0.827	+ 0.000 V/C
# 84 SR-55 NB Ramps and Dyer Rd	A	5.7	0.362	A	5.7	0.362	+ 0.000 D/V
# 85 Cambridge St and La Veta Ave	C	19.7	0.779	C	19.7	0.779	+ 0.000 V/C
# 86 Cambridge St and Fairhaven Ave	A	xxxxx	0.454	A	xxxxx	0.454	+ 0.000 V/C
# 87 Mabury St and 1st Street	C	27.1	0.674	C	27.1	0.674	+ 0.000 D/V
# 88 Tustin St and La Veta Ave	A	xxxxx	0.381	A	xxxxx	0.381	+ 0.000 V/C
# 89 Tustin St and SR-22 WB On-Ramp	B	11.1	0.391	B	11.1	0.391	+ 0.000 D/V
# 90 Tustin St and SR-22 EB Off-Ram	C	23.1	0.679	C	23.1	0.679	+ 0.000 D/V
# 91 Tustin Ave and Fairhaven Ave	B	xxxxx	0.685	B	xxxxx	0.685	+ 0.000 V/C
# 92 Tustin Ave and Santa Clara Ave	C	xxxxx	0.709	C	xxxxx	0.709	+ 0.000 V/C
# 93 Tustin Ave and 17th St	C	xxxxx	0.797	C	xxxxx	0.797	+ 0.000 V/C
# 94 Tustin Ave and 4th St	C	xxxxx	0.708	C	xxxxx	0.708	+ 0.000 V/C
# 95 SR-55 SB Ramps / Auto Mall Dr	C	25.5	0.702	C	25.5	0.702	+ 0.000 D/V
# 96 SR-55 NB Ramps / Del Amo Ave a	D	39.1	0.895	D	39.1	0.895	+ 0.000 D/V
# 97 Red Hill Ave and Edinger Ave	D	xxxxx	0.853	D	xxxxx	0.853	+ 0.000 V/C
# 98 Red Hill Ave and Warner Ave	D	xxxxx	0.875	D	xxxxx	0.875	+ 0.000 V/C
# 99 Red Hill Ave and Dyer Rd / bar	A	xxxxx	0.537	A	xxxxx	0.537	+ 0.000 V/C
#100 Red Hill Ave and Alton Pkwy	F	xxxxx	1.184	F	xxxxx	1.184	+ 0.000 V/C
#101 Red Hill Ave and MacArthur Blv	C	xxxxx	0.702	C	xxxxx	0.702	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
#102 Red Hill Ave and Main St	D	xxxxx	0.813	D	xxxxx	0.813	+ 0.000 V/C
#103 I-5 SB Ramps and Santa Ana Blv	B	18.4	0.487	B	18.4	0.487	+ 0.000 D/V
#104 Tustin Ranch Rd and Warner Ave	B	xxxxx	0.645	B	xxxxx	0.645	+ 0.000 V/C
#105 Von Karman Ave and Barranca Pk	F	xxxxx	1.228	F	xxxxx	1.228	+ 0.000 V/C
#106 Red Hill Avenue and El Camino	C	xxxxx	0.779	C	xxxxx	0.779	+ 0.000 V/C
#107 Red Hill Avenue and I-5 NB Ram	C	23.7	0.634	C	23.7	0.634	+ 0.000 D/V
#108 Red Hill Avenue and I-5 SB Ram	C	22.2	0.695	C	22.2	0.695	+ 0.000 D/V
#109 Red Hill Avenue and Nisson Roa	B	xxxxx	0.693	B	xxxxx	0.693	+ 0.000 V/C
#110 Red Hill Avenue and Walnut Ave	C	xxxxx	0.739	C	xxxxx	0.739	+ 0.000 V/C
#111 Red Hill Avenue and Valencia A	C	xxxxx	0.738	C	xxxxx	0.738	+ 0.000 V/C
#112 Tustin Ranch Road and Warner A	D	xxxxx	0.885	D	xxxxx	0.885	+ 0.000 V/C
#113 Tustin Ranch Road and Walnut A	F	xxxxx	1.715	F	xxxxx	1.715	+ 0.000 V/C
#114 SR-55 SB Ramps and Irvine Boul	C	25.6	0.915	C	25.6	0.915	+ 0.000 D/V
#115 SR-55 NB Ramps and Irvine Boul	C	22.9	0.932	C	22.9	0.932	+ 0.000 D/V

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:15:58                  Page 3-1
------------------------------------------------------------------------------
                          Santa Ana Circulation Element
------------------------------------------------------------------------------
                       Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #1 Euclid St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.857
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        67               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include        WideBypass       WideBypass
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     169 1569   126   152  866   164   212  678   106   209  877   209
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  169 1569   126   152  866   164   212  678   106   209  877   209
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   169 1569   126   152  866   164   212  678   106   209  877   209
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  169 1569   126   152  866   164   212  678   106   209  877   209
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  169 1569   126   152  866   164   212  678   106   209  877   209
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.78  0.22  1.00 2.52  0.48  1.00 2.59  0.41  1.00 2.42  0.58
Final Sat.:  1600 4643   357  1600 4236   764  1600 4351   649  1600 4076   924
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.34  0.35  0.10 0.20  0.21  0.13 0.16  0.16  0.13 0.22  0.23
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:15:59                  Page 4-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #2 Euclid St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.896
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        84               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     242 1973   127    96 1179   143   207  475   210   114  479   221
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  242 1973   127    96 1179   143   207  475   210   114  479   221
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   242 1973   127    96 1179   143   207  475   210   114  479   221
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  242 1973   127    96 1179   143   207  475   210   114  479   221
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  242 1973   127    96 1179   143   207  475   210   114  479   221
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.82  0.18  1.00 2.68  0.32  1.00 1.39  0.61  1.00 1.37  0.63
Final Sat.:  1600 4710   290  1600 4481   519  1600 2319   981  1600 2290  1010
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.42  0.44  0.06 0.26  0.28  0.13 0.20  0.21  0.07 0.21  0.22
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:00                  Page 5-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #3 Euclid St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.888
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        80               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  2  0  1    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     539 1610   115   136  897   228   141  544   163   128 1181   191
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  539 1610   115   136  897   228   141  544   163   128 1181   191
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   539 1610   115   136  897   228   141  544   163   128 1181   191
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  539 1610   115   136  897   228   141  544   163   128 1181   191
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  539 1610   115   136  897   228   141  544   163   128 1181   191
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.80  0.20  2.00 2.39  0.61  1.00 2.00  1.00  1.00 2.00  1.00
Final Sat.:  3200 4680   320  3200 4027   973  1600 3400  1600  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.17 0.34  0.36  0.04 0.22  0.23  0.09 0.16  0.10  0.08 0.35  0.12
Crit Moves:  ****                     ****  ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:00                  Page 6-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #4 Newhope St and Hazard Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.721
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        40               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     105 1159    45    46  982   117    75  148    91    88  556   160
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  105 1159    45    46  982   117    75  148    91    88  556   160
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   105 1159    45    46  982   117    75  148    91    88  556   160
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  105 1159    45    46  982   117    75  148    91    88  556   160
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  105 1159    45    46  982   117    75  148    91    88  556   160
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       1.00 1.93  0.07  1.00 1.79  0.21  1.00 1.24  0.76  1.00 1.55  0.45
Final Sat.:  1600 3180   120  1600 2959   341  1600 2082  1218  1600 2585   715
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.36  0.38  0.03 0.33  0.34  0.05 0.07  0.07  0.06 0.22  0.22
Crit Moves:  ****                ****  ****                ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:01                  Page 7-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #5 Newhope St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.777
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        48               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     188 1009   177   140  625   121    61  372    54   104  574   164
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  188 1009   177   140  625   121    61  372    54   104  574   164
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   188 1009   177   140  625   121    61  372    54   104  574   164
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  188 1009   177   140  625   121    61  372    54   104  574   164
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  188 1009   177   140  625   121    61  372    54   104  574   164
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.70  0.30  1.00 1.68  0.32  1.00 1.75  0.25  1.00 1.56  0.44
Final Sat.:  1600 2822   478  1600 2781   519  1600 2894   406  1600 2589   711
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.36  0.37  0.09 0.22  0.23  0.04 0.13  0.13  0.07 0.22  0.23
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:02                  Page 8-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #6 Harbor Blvd and SR-22 WB Off-Ramp / Banner Dr
******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.802
Loss Time (sec):       5                Average Delay (sec/veh):        24.2
Optimal Cycle:        55                Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  0    0  0  2  1  0    0  0  1! 0  0    1  1  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     109 2457     0     0 1801    58   102    0    86   576   78   165
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  109 2457     0     0 1801    58   102    0    86   576   78   165
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   109 2457     0     0 1801    58   102    0    86   576   78   165
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  109 2457     0     0 1801    58   102    0    86   576   78   165
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  109 2457     0     0 1801    58   102    0    86   576   78   165
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.91  0.91 1.00  0.91  0.96 0.96  0.85
Lanes:       1.00 3.00  0.00  0.00 2.91  0.09  0.54 0.00  0.46  1.76 0.24  1.00
Final Sat.:  1805 5187     0     0 5000   161   942    0   794  3206  434  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.47  0.00  0.00 0.36  0.36  0.11 0.00  0.11  0.18 0.18  0.10
Crit Moves:       ****        ****             ****             ****
Green/Cycle: 0.08 0.59  0.00  0.00 0.51  0.51  0.14 0.00  0.14  0.22 0.22  0.22
Volume/Cap:  0.71 0.80  0.00  0.00 0.71  0.71  0.80 0.00  0.80  0.80 0.80  0.46
Delay/Veh:   59.1 17.5   0.0   0.0 20.0  20.0  59.6  0.0  59.6  42.4 42.4  34.4
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  59.1 17.5   0.0   0.0 20.0  20.0  59.6  0.0  59.6  42.4 42.4  34.4
LOS by Move:    E    B     A     A    C     C     E    A     E     D    D     C
HCM2k85thQ:     7   33     0     0   25    25    12    0    12    18   18     7
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:02                  Page 9-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #7 Trask Avenue and SR-22 EB On-Ramp
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.533
Loss Time (sec):       5               Average Delay (sec/veh):        13.6
Optimal Cycle:        26               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    0  0  0  0  0    2  0  1  0  0    0  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0     0    0     0   927  695     0     0  786    74
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0     0    0     0   927  695     0     0  786    74
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0     0    0     0   927  695     0     0  786    74
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0     0    0     0   927  695     0     0  786    74
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0     0    0     0   927  695     0     0  786    74
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  0.92 1.00  1.00  1.00 0.94  0.94
Lanes:       0.00 0.00  0.00  0.00 0.00  0.00  2.00 1.00  0.00  0.00 1.83  0.17
Final Sat.:     0    0     0     0    0     0  3502 1900     0     0 3256   307
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.00 0.00  0.00  0.26 0.37  0.00  0.00 0.24  0.24
Crit Moves:                                     ****                   ****
Green/Cycle: 0.00 0.00  0.00  0.00 0.00  0.00  0.50 0.95  0.00  0.00 0.45  0.45
Volume/Cap:  0.00 0.00  0.00  0.00 0.00  0.00  0.53 0.39  0.00  0.00 0.53  0.53
Delay/Veh:    0.0  0.0   0.0   0.0  0.0   0.0  17.5  0.3   0.0   0.0 20.1  20.1
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0   0.0  0.0   0.0  17.5  0.3   0.0   0.0 20.1  20.1
LOS by Move:    A    A     A     A    A     A     B    A     A     A    C     C
HCM2k85thQ:     0    0     0     0    0     0    15    3     0     0   15    15
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:03                Page 10-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #8 Harbor Blvd and Westminster Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.882
Loss Time (sec):       0               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  2  1  0    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     237 1178   279   254 1752   202   215  768    37   357 1238   281
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  237 1178   279   254 1752   202   215  768    37   357 1238   281
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   237 1178   279   254 1752   202   215  768    37   357 1238   281
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  237 1178   279   254 1752   202   215  768    37   357 1238   281
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  237 1178   279   254 1752   202   215  768    37   357 1238   281
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 2.86  0.14  1.00 3.00  1.00
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 4779   221  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.23  0.17  0.16 0.34  0.13  0.13 0.16  0.17  0.22 0.24  0.18
Crit Moves:  ****               ****                   ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:04                Page 11-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #9 Harbor Blvd and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.778
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        48               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     290 1497   166   245 1073   145   179  730   138   199  929   151
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  290 1497   166   245 1073   145   179  730   138   199  929   151
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   290 1497   166   245 1073   145   179  730   138   199  929   151
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  290 1497   166   245 1073   145   179  730   138   199  929   151
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  290 1497   166   245 1073   145   179  730   138   199  929   151
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  2.00 2.52  0.48  2.00 2.58  0.42
Final Sat.:  1600 5100  1600  1600 5100  1600  3200 4237   763  3200 4329   671
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.18 0.29  0.10  0.15 0.21  0.09  0.06 0.17  0.18  0.06 0.21  0.23
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:04                Page 12-1
--------------------------------------------------------------------------------
                          Santa Ana Circulation Element
--------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
********************************************************************************
Intersection #10 Harbor Blvd and McFadden Ave
********************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.812
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        55               Level Of Service:                  D
********************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     169 1737   127   256 1094    99   241  585    73   198  474   137
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  169 1737   127   256 1094    99   241  585    73   198  474   137
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   169 1737   127   256 1094    99   241  585    73   198  474   137
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  169 1737   127   256 1094    99   241  585    73   198  474   137
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  169 1737   127   256 1094    99   241  585    73   198  474   137
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       2.00 3.00  1.00  2.00 2.75  0.25  1.00 1.78  0.22  1.00 1.55  0.45
Final Sat.:  3200 5100  1600  3200 4602   398  1600 2945   355  1600 2582   718
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.34  0.08  0.08 0.24  0.25  0.15 0.20  0.21  0.12 0.18  0.19
Crit Moves:       ****        ****             ****                       ****
********************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:05                Page 13-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #11 Harbor Blvd and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.725
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        40               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     254 1597   193   290  843    77   109  460    81   196 1138   379
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  254 1597   193   290  843    77   109  460    81   196 1138   379
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   254 1597   193   290  843    77   109  460    81   196 1138   379
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  254 1597   193   290  843    77   109  460    81   196 1138   379
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  254 1597   193   290  843    77   109  460    81   196 1138   379
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.55  0.45  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 4281   719  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.31  0.12  0.09 0.17  0.05  0.03 0.11  0.11  0.06 0.22  0.24
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #12 Harbor Blvd and Warner Ave

Cycle (sec):	100	Critical Vol./Cap.(X):	1.536
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	180	Level Of Service:	F

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Protected			Protected			Protected			Protected		
Rights:	Include			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	2 0	2 1	0	2 0	3 0	1	2 0	3 0	1	2 0	3 0	1
Volume Module:												
Base Vol:	762	3656	275	262	1457	174	217	1539	352	249	2589	827
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	762	3656	275	262	1457	174	217	1539	352	249	2589	827
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	762	3656	275	262	1457	174	217	1539	352	249	2589	827
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	762	3656	275	262	1457	174	217	1539	352	249	2589	827
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	762	3656	275	262	1457	174	217	1539	352	249	2589	827
Saturation Flow Module:												
Sat/Lane:	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
Adjustment:	1.00	1.04	1.00	1.00	1.06	1.00	1.00	1.06	1.00	1.00	1.06	1.00
Lanes:	2.00	2.79	0.21	2.00	3.00	1.00	2.00	3.00	1.00	2.00	3.00	1.00
Final Sat.:	3200	4664	336	3200	5100	1600	3200	5100	1600	3200	5100	1600
Capacity Analysis Module:												
Vol/Sat:	0.24	0.78	0.82	0.08	0.29	0.11	0.07	0.30	0.22	0.08	0.51	0.52
Crit Moves:			****	****			****					****

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:06                Page 15-1
--------------------------------------------------------------------------------
                         Santa Ana Circulation Element
--------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
********************************************************************************
Intersection #13 Harbor Blvd and Segerstrom Ave
********************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.921
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       100               Level Of Service:                  E
********************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     273 1717    55    87  986    87   118  585   192   117 1269   461
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  273 1717    55    87  986    87   118  585   192   117 1269   461
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   273 1717    55    87  986    87   118  585   192   117 1269   461
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  273 1717    55    87  986    87   118  585   192   117 1269   461
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  273 1717    55    87  986    87   118  585   192   117 1269   461
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 2.91  0.09  1.00 2.76  0.24  1.00 1.51  0.49  1.00 2.00  1.00
Final Sat.:  3200 4851   149  1600 4611   389  1600 2509   791  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.35  0.37  0.05 0.21  0.22  0.07 0.23  0.24  0.07 0.37  0.29
Crit Moves:             ****  ****            ****                   ****
********************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:07                Page 16-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #14 MacArthur Blvd and Hyland Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.917
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        98               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  1  0    1  0  1  0  1    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:    1201    7    70    12    4    14    36  891   160    25 2350    12
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse: 1201    7    70    12    4    14    36  891   160    25 2350    12
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:  1201    7    70    12    4    14    36  891   160    25 2350    12
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol: 1201    7    70    12    4    14    36  891   160    25 2350    12
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume: 1201    7    70    12    4    14    36  891   160    25 2350    12
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 0.09  0.91  1.00 1.00  1.00  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200  145  1455  1600 1700  1600  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.38 0.05  0.05  0.01 0.00  0.01  0.02 0.17  0.10  0.02 0.46  0.01
Crit Moves:  ****                      ****  ****                    ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:07                Page 17-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #15 MacArthur Blvd and Harbor Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.783
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        49               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     558 1441    83   204 1028   169   140  489   181    81 1373   258
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  558 1441    83   204 1028   169   140  489   181    81 1373   258
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   558 1441    83   204 1028   169   140  489   181    81 1373   258
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  558 1441    83   204 1028   169   140  489   181    81 1373   258
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  558 1441    83   204 1028   169   140  489   181    81 1373   258
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.17 0.28  0.05  0.06 0.20  0.11  0.09 0.10  0.11  0.05 0.27  0.16
Crit Moves:  ****               ****        ****                   ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:08                Page 18-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #16 Harbor Blvd and Sunflower Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.717
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        39               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  1  1  0    1  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     154 1532   228   114 1417    43    81  220   229   301  632   236
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  154 1532   228   114 1417    43    81  220   229   301  632   236
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   154 1532   228   114 1417    43    81  220   229   301  632   236
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  154 1532   228   114 1417    43    81  220   229   301  632   236
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  154 1532   228   114 1417    43    81  220   229   301  632   236
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 1.00  1.00  1.00 1.39  0.61
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 1700  1600  1600 2322   974
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.30  0.14  0.04 0.28  0.03  0.05 0.13  0.14  0.19 0.27  0.24
Crit Moves:       ****        ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:08                Page 19-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #17 Harbor Blvd and I-405 NB Off-Ramp
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.699
Loss Time (sec):       5               Average Delay (sec/veh):        18.3
Optimal Cycle:        39               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  0    0  0  4  0  0    0  0  0  0  0    1  0  1! 0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1529     0     0 2570     0     0    0     0   496    0   801
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1529     0     0 2570     0     0    0     0   496    0   801
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1529     0     0 2570     0     0    0     0   496    0   801
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1529     0     0 2570     0     0    0     0   496    0   801
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1529     0     0 2570     0     0    0     0   496    0   801
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  1.00  1.00 0.91  1.00  1.00 1.00  1.00  0.89 1.00  0.89
Lanes:       0.00 4.00  0.00  0.00 4.00  0.00  0.00 0.00  0.00  1.38 0.00  1.62
Final Sat.:     0 6916     0     0 6916     0     0    0     0  2337    0  2735
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.22  0.00  0.00 0.37  0.00  0.00 0.00  0.00  0.21 0.00  0.29
Crit Moves:  ****                 ****                                     ****
Green/Cycle: 0.00 0.53  0.00  0.00 0.53  0.00  0.00 0.00  0.00  0.42 0.00  0.42
Volume/Cap:  0.00 0.42  0.00  0.00 0.70  0.00  0.00 0.00  0.00  0.51 0.00  0.70
Delay/Veh:    0.0 14.2   0.0   0.0 18.1   0.0   0.0  0.0   0.0  21.6  0.0  25.1
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 14.2   0.0   0.0 18.1   0.0   0.0  0.0   0.0  21.6  0.0  25.1
LOS by Move:    A    B     A     A    B     A     A    A     A     C    A     C
HCM2k85thQ:     0   12     0     0   25     0     0    0     0    13    0    20
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:09                Page 20-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #18 Harbor Blvd and I-405 SB Off-Ramp
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.667
Loss Time (sec):       5               Average Delay (sec/veh):        17.9
Optimal Cycle:        35               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Ignore           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  3  0  1    0  0  4  0  0    1  0  1! 0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1881     0     0 2281     0   177    0   815     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1881     0     0 2281     0   177    0   815     0    0     0
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1881     0     0 2281     0   177    0   815     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1881     0     0 2281     0   177    0   815     0    0     0
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1881     0     0 2281     0   177    0   815     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  1.00  1.00 0.91  1.00  0.87 1.00  0.87  1.00 1.00  1.00
Lanes:       0.00 3.00  1.00  0.00 4.00  0.00  1.18 0.00  1.82  0.00 0.00  0.00
Final Sat.:     0 5187  1900     0 6916     0  1946    0  3008     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.36  0.00  0.00 0.33  0.00  0.09 0.00  0.27  0.00 0.00  0.00
Crit Moves:       ****        ****                     ****
Green/Cycle: 0.00 0.54  0.00  0.00 0.54  0.00  0.41 0.00  0.41  0.00 0.00  0.00
Volume/Cap:  0.00 0.67  0.00  0.00 0.61  0.00  0.22 0.00  0.67  0.00 0.00  0.00
Delay/Veh:    0.0 17.0   0.0   0.0 15.8   0.0  19.4  0.0  25.3   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 17.0   0.0   0.0 15.8   0.0  19.4  0.0  25.3   0.0  0.0   0.0
LOS by Move:    A    B     A     A    B     A     B    A     C     A    A     A
HCM2k85thQ:     0   23     0     0   20     0     5    0    18     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:10                Page 21-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #19 Fairview St and Civic Center Dr
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.757
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        44               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    0  1  0  1  0    1  1  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       6 1690   475   192 1784     0     2    6     4   424    0   157
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    6 1690   475   192 1784     0     2    6     4   424    0   157
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     6 1690   475   192 1784     0     2    6     4   424    0   157
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    6 1690   475   192 1784     0     2    6     4   424    0   157
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    6 1690   475   192 1784     0     2    6     4   424    0   157
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.00  1.00  1.00 1.06  1.00
Lanes:       1.00 2.34  0.66  1.00 3.00  0.00  0.33 1.00  0.67  2.00 0.00  1.00
Final Sat.:  1600 3947  1053  1600 5000     0   533 1600  1067  3200    0  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.43  0.45  0.12 0.36  0.00  0.00 0.00  0.00  0.13 0.00  0.10
Crit Moves:             ****  ****             ****             ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:10                Page 22-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #20 Fairview St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.898
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        85               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     169 1241   112   236 1468   291   193  781   136   140 1060   164
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  169 1241   112   236 1468   291   193  781   136   140 1060   164
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   169 1241   112   236 1468   291   193  781   136   140 1060   164
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  169 1241   112   236 1468   291   193  781   136   140 1060   164
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  169 1241   112   236 1468   291   193  781   136   140 1060   164
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 3.00  1.00  1.00 2.50  0.50  1.00 2.56  0.44  1.00 2.60  0.40
Final Sat.:  1600 5100  1600  1600 4206   794  1600 4288   712  1600 4357   643
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.24  0.07  0.15 0.35  0.37  0.12 0.18  0.19  0.09 0.24  0.26
Crit Moves:  ****                     ****  ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:11                Page 23-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #21 Fairview St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.776
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        47               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     164 1507   131   191 1553   242   158  427   106   158  545   134
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  164 1507   131   191 1553   242   158  427   106   158  545   134
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   164 1507   131   191 1553   242   158  427   106   158  545   134
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  164 1507   131   191 1553   242   158  427   106   158  545   134
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  164 1507   131   191 1553   242   158  427   106   158  545   134
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 1.60  0.40  1.00 1.61  0.39
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 2664   636  1600 2668   632
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.30  0.08  0.12 0.30  0.15  0.10 0.16  0.17  0.10 0.20  0.21
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:12                Page 24-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #22 Fairview St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.916
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        97               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     184 1759   108   204  635   156   205  628   168   650 1375   302
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  184 1759   108   204  635   156   205  628   168   650 1375   302
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   184 1759   108   204  635   156   205  628   168   650 1375   302
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  184 1759   108   204  635   156   205  628   168   650 1375   302
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  184 1759   108   204  635   156   205  628   168   650 1375   302
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 2.83  0.17  2.00 2.41  0.59  2.00 2.37  0.63  2.00 2.46  0.54
Final Sat.:  3200 4722   278  3200 4053   947  3200 3987  1013  3200 4136   864
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.37  0.39  0.06 0.16  0.16  0.06 0.16  0.17  0.20 0.33  0.35
Crit Moves:             ****  ****            ****                      ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:12                Page 25-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #23 Fairview St and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.796
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        51               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     213 1695   158   182  921    93   168  815   126   168  989   214
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  213 1695   158   182  921    93   168  815   126   168  989   214
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   213 1695   158   182  921    93   168  815   126   168  989   214
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  213 1695   158   182  921    93   168  815   126   168  989   214
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  213 1695   158   182  921    93   168  815   126   168  989   214
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 2.74  0.26  2.00 2.72  0.28  2.00 2.60  0.40  2.00 2.47  0.53
Final Sat.:  3200 4591   409  3200 4560   440  3200 4357   643  3200 4146   854
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.37  0.39  0.06 0.20  0.21  0.05 0.19  0.20  0.05 0.24  0.25
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:13                Page 26-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #24 Fairview St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.768
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        46               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     225 1550    84   171  955    88   240  627   211   167 1272   223
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  225 1550    84   171  955    88   240  627   211   167 1272   223
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   225 1550    84   171  955    88   240  627   211   167 1272   223
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  225 1550    84   171  955    88   240  627   211   167 1272   223
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  225 1550    84   171  955    88   240  627   211   167 1272   223
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.85  0.15  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 4753   247  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.33  0.34  0.05 0.19  0.06  0.08 0.12  0.13  0.05 0.25  0.14
Crit Moves:             ****  ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:13                Page 27-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #25 Fairview Rd and Sunflower Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.715
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        39               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  1  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     192 1725   375   140 1162    81   262  555   123   227  569   148
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  192 1725   375   140 1162    81   262  555   123   227  569   148
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   192 1725   375   140 1162    81   262  555   123   227  569   148
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  192 1725   375   140 1162    81   262  555   123   227  569   148
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  192 1725   375   140 1162    81   262  555   123   227  569   148
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.80  0.20  2.00 1.64  0.36  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 4687   313  3200 2719   581  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.34  0.23  0.04 0.25  0.26  0.08 0.20  0.21  0.07 0.17  0.09
Crit Moves:       ****        ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:14                Page 28-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #26 Greenville St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.595
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        29               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    0  0  0  0  0    0  0  2  1  0    1  0  3  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     293    0   195     0    0     0     0 1061   216   153 1811     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  293    0   195     0    0     0     0 1061   216   153 1811     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   293    0   195     0    0     0     0 1061   216   153 1811     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  293    0   195     0    0     0     0 1061   216   153 1811     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  293    0   195     0    0     0     0 1061   216   153 1811     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 0.00  1.00  0.00 0.00  0.00  0.00 2.49  0.51  1.00 3.00  0.00
Final Sat.:  1600    0  1600     0    0     0     0 4188   812  1600 5100     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.18 0.00  0.12  0.00 0.00  0.00  0.00 0.25  0.27  0.10 0.36  0.00
Crit Moves:  ****                                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:14                Page 29-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #27 Greenville St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.777
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        48               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      50  414    31    52  171    52   127  967    55    37 1414   202
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   50  414    31    52  171    52   127  967    55    37 1414   202
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    50  414    31    52  171    52   127  967    55    37 1414   202
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   50  414    31    52  171    52   127  967    55    37 1414   202
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   50  414    31    52  171    52   127  967    55    37 1414   202
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 0.93  0.07  1.00 0.77  0.23  1.00 2.84  0.16  1.00 2.62  0.38
Final Sat.:  1600 1489   111  1600 1227   373  1600 4742   258  1600 4400   600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.28  0.28  0.03 0.14  0.14  0.08 0.20  0.21  0.02 0.32  0.34
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:15                Page 30-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #28 Raitt St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.758
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        45               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      61  872   136    51  533    86   108  640    56    98  827   114
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   61  872   136    51  533    86   108  640    56    98  827   114
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    61  872   136    51  533    86   108  640    56    98  827   114
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   61  872   136    51  533    86   108  640    56    98  827   114
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   61  872   136    51  533    86   108  640    56    98  827   114
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.03  1.00  1.00 1.04  1.00
Lanes:       1.00 1.73  0.27  1.00 1.72  0.28  1.00 1.84  0.16  1.00 1.76  0.24
Final Sat.:  1600 2868   432  1600 2855   445  1600 3043   257  1600 2912   388
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.30  0.32  0.03 0.19  0.19  0.07 0.21  0.22  0.06 0.28  0.29
Crit Moves:             ****  ****            ****                      ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:16                Page 31-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #29 Raitt St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.986
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     171  736   206   114  396    99   125  862   123   192 2171   194
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  171  736   206   114  396    99   125  862   123   192 2171   194
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   171  736   206   114  396    99   125  862   123   192 2171   194
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  171  736   206   114  396    99   125  862   123   192 2171   194
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  171  736   206   114  396    99   125  862   123   192 2171   194
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 1.56  0.44  1.00 1.60  0.40  1.00 2.63  0.37  1.00 2.75  0.25
Final Sat.:  1600 2600   700  1600 2660   640  1600 4401   599  1600 4606   394
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.28  0.29  0.07 0.15  0.15  0.08 0.20  0.21  0.12 0.47  0.49
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:16                Page 32-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #30 Bear St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.851
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        65               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  2  0  1    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     273 1314   343   115  278    84    80  753    78    67 1211   193
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  273 1314   343   115  278    84    80  753    78    67 1211   193
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   273 1314   343   115  278    84    80  753    78    67 1211   193
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  273 1314   343   115  278    84    80  753    78    67 1211   193
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  273 1314   343   115  278    84    80  753    78    67 1211   193
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.00  1.00  1.00 2.00  1.00  1.00 2.72  0.28  1.00 2.59  0.41
Final Sat.:  1600 3400  1600  1600 3400  1600  1600 4549   451  1600 4340   660
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.17 0.39  0.21  0.07 0.08  0.05  0.05 0.17  0.17  0.04 0.28  0.29
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:17                Page 33-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #31 Bristol St and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.823
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        57               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     375 1823   303   337 1794   305   238  530    96   311 1170   396
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  375 1823   303   337 1794   305   238  530    96   311 1170   396
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   375 1823   303   337 1794   305   238  530    96   311 1170   396
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  375 1823   303   337 1794   305   238  530    96   311 1170   396
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  375 1823   303   337 1794   305   238  530    96   311 1170   396
OvlAdjVol:                                                                 228
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.54  0.46  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 4264   736  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.36  0.19  0.11 0.35  0.19  0.07 0.12  0.13  0.10 0.23  0.25
OvlAdjV/S:                                                                 0.14
Crit Moves:  ****                 ****        ****                 ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:17                Page 34-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #32 Bristol St and Civic Center Dr
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.911
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        93               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     222 1550    81   159 1458   149   195  549    65   184  789    89
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  222 1550    81   159 1458   149   195  549    65   184  789    89
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   222 1550    81   159 1458   149   195  549    65   184  789    89
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  222 1550    81   159 1458   149   195  549    65   184  789    89
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  222 1550    81   159 1458   149   195  549    65   184  789    89
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.03  1.00  1.00 1.03  1.00
Lanes:       1.00 2.85  0.15  1.00 2.72  0.28  1.00 1.79  0.21  1.00 1.80  0.20
Final Sat.:  1600 4762   238  1600 4555   445  1600 2961   339  1600 2976   324
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.33  0.34  0.10 0.32  0.33  0.12 0.19  0.19  0.12 0.27  0.27
Crit Moves:  ****                ****  ****                ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:18                Page 35-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #33 Bristol St and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.853
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        66               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      84 1702    97   117 1558    59   155  428   100   392  624   168
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   84 1702    97   117 1558    59   155  428   100   392  624   168
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    84 1702    97   117 1558    59   155  428   100   392  624   168
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   84 1702    97   117 1558    59   155  428   100   392  624   168
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   84 1702    97   117 1558    59   155  428   100   392  624   168
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.84  0.16  1.00 2.89  0.11  1.00 2.43  0.57  1.00 2.36  0.64
Final Sat.:  1600 4741   259  1600 4825   175  1600 4091   909  1600 3982  1018
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.36  0.37  0.07 0.32  0.34  0.10 0.10  0.11  0.25 0.16  0.16
Crit Moves:             ****  ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:19                Page 36-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #34 Bristol St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.826
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        58               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     392 1693   250   223 1209   273   160  900   115   196 1204   114
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  392 1693   250   223 1209   273   160  900   115   196 1204   114
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   392 1693   250   223 1209   273   160  900   115   196 1204   114
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  392 1693   250   223 1209   273   160  900   115   196 1204   114
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  392 1693   250   223 1209   273   160  900   115   196 1204   114
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 2.66  0.34  1.00 2.74  0.26
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 4456   544  1600 4585   415
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.33  0.16  0.07 0.24  0.17  0.10 0.20  0.21  0.12 0.26  0.27
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:19                Page 37-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #35 Bristol St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.028
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     224 1649    90   111 1554   358   245  478    95   209 1088   127
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  224 1649    90   111 1554   358   245  478    95   209 1088   127
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   224 1649    90   111 1554   358   245  478    95   209 1088   127
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  224 1649    90   111 1554   358   245  478    95   209 1088   127
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  224 1649    90   111 1554   358   245  478    95   209 1088   127
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.03  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 1.67  0.33  1.00 1.79  0.21
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 2769   531  1600 2966   334
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.32  0.06  0.07 0.30  0.22  0.15 0.17  0.18  0.13 0.37  0.38
Crit Moves:  ****               ****        ****                        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:21                Page 38-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #36 Bristol St and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.847
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        64               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     316 1182   216   338 1128   219   176  791   140   251 1481   434
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  316 1182   216   338 1128   219   176  791   140   251 1481   434
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   316 1182   216   338 1128   219   176  791   140   251 1481   434
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  316 1182   216   338 1128   219   176  791   140   251 1481   434
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  316 1182   216   338 1128   219   176  791   140   251 1481   434
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.54  0.46  2.00 2.51  0.49  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200 4258   742  3200 4220   780  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.28  0.29  0.11 0.27  0.28  0.11 0.16  0.09  0.16 0.29  0.27
Crit Moves:             ****  ****            ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:21                Page 39-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #37 Bristol St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.870
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        72               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     182 1347   237   101  927   194   224  803    64   145 1313    66
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  182 1347   237   101  927   194   224  803    64   145 1313    66
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   182 1347   237   101  927   194   224  803    64   145 1313    66
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  182 1347   237   101  927   194   224  803    64   145 1313    66
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  182 1347   237   101  927   194   224  803    64   145 1313    66
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 2.55  0.45  1.00 2.48  0.52  1.00 2.78  0.22  1.00 2.86  0.14
Final Sat.:  1600 4282   718  1600 4169   831  1600 4646   354  1600 4770   230
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.31  0.33  0.06 0.22  0.23  0.14 0.17  0.18  0.09 0.28  0.29
Crit Moves:             ****  ****            ****                      ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:22                Page 40-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #38 Bristol St and Alton Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.633
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        31               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:         WideBypass         Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  3  0  1    1  0  1  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      43 1681   158   116  870    54    25   35    65    91  150    29
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   43 1681   158   116  870    54    25   35    65    91  150    29
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    43 1681   158   116  870    54    25   35    65    91  150    29
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   43 1681   158   116  870    54    25   35    65    91  150    29
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   43 1681   158   116  870    54    25   35    65    91  150    29
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       1.00 2.74  0.26  1.00 3.00  1.00  1.00 1.00  1.00  1.00 0.84  0.16
Final Sat.:  1600 4588   412  1600 5100  1600  1600 1700  1600  1600 1341   259
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.37  0.38  0.07 0.17  0.03  0.02 0.02  0.04  0.06 0.11  0.11
Crit Moves:             ****  ****            ****                 ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:23                Page 41-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #39 Bristol St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.765
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        46               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     321 1369   249   233  858   135   335  746   158   236 1370   259
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  321 1369   249   233  858   135   335  746   158   236 1370   259
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   321 1369   249   233  858   135   335  746   158   236 1370   259
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  321 1369   249   233  858   135   335  746   158   236 1370   259
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  321 1369   249   233  858   135   335  746   158   236 1370   259
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.59  0.41  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 4347   653  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.27  0.16  0.07 0.20  0.21  0.10 0.15  0.10  0.07 0.27  0.16
Crit Moves:       ****        ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:23                Page 42-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #40 Bristol St and Sunflower Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.692
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  1    2  0  3  0  1    2  0  2  1  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     651 1376   222   215  804   230   301  588   228   247  952   303
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  651 1376   222   215  804   230   301  588   228   247  952   303
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   651 1376   222   215  804   230   301  588   228   247  952   303
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  651 1376   222   215  804   230   301  588   228   247  952   303
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  651 1376   222   215  804   230   301  588   228   247  952   303
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.88  1.12  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 4812  1788  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.20 0.27  0.14  0.07 0.16  0.14  0.09 0.12  0.13  0.08 0.19  0.19
Crit Moves:  ****               ****        ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:24                Page 43-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #41 Bristol St and I-405 NB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.825
Loss Time (sec):       5               Average Delay (sec/veh):        28.5
Optimal Cycle:        60               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  1    0  0  4  1  0    0  0  0  0  2    1  1  1  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 2094   183     0 2375    22     0    0   204   350  300  1162
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 2094   183     0 2375    22     0    0   204   350  300  1162
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 2094   183     0 2375    22     0    0   204   350  300  1162
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 2094   183     0 2375    22     0    0   204   350  300  1162
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 2094   183     0 2375    22     0    0   204   350  300  1162
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  0.85  1.00 0.91  0.91  1.00 1.00  0.75  0.93 0.93  0.75
Lanes:       0.00 4.00  1.00  0.00 4.95  0.05  0.00 0.00  2.00  1.62 1.38  2.00
Final Sat.:     0 6916  1615     0 8557    79     0    0  2842  2840 2434  2842
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.30  0.11  0.00 0.28  0.28  0.00 0.00  0.07  0.12 0.12  0.41
Crit Moves:       ****        ****                         ****            ****
Green/Cycle: 0.00 0.37  0.37  0.00 0.37  0.37  0.00 0.00  0.09  0.50 0.50  0.50
Volume/Cap:  0.00 0.82  0.31  0.00 0.76  0.76  0.00 0.00  0.82  0.25 0.25  0.82
Delay/Veh:    0.0 31.0  22.9   0.0 28.8  28.8   0.0  0.0  64.6  14.5 14.5  25.6
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 31.0  22.9   0.0 28.8  28.8   0.0  0.0  64.6  14.5 14.5  25.6
LOS by Move:    A    C     C     A    C     C     A    A     E     B    B     C
HCM2k85thQ:     0   27     6     0   23    23     0    0     9     6    6    28
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:25                Page 44-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #42 Bristol St and I-405 SB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.617
Loss Time (sec):       5               Average Delay (sec/veh):        18.3
Optimal Cycle:        31               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Ignore           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  4  0  0    0  0  2  1  1    3  0  0  0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     128 1570     0     0 1611   942   740    0   331     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  128 1570     0     0 1611   942   740    0   331     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   128 1570     0     0 1611     0   740    0   331     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  128 1570     0     0 1611     0   740    0   331     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  128 1570     0     0 1611     0   740    0   331     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.91  0.92 1.00  0.85  1.00 1.00  1.00
Lanes:       1.00 4.00  0.00  0.00 3.00  1.00  3.00 0.00  1.00  0.00 0.00  0.00
Final Sat.:  1805 6916     0     0 5187  1729  5253    0  1615     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.23  0.00  0.00 0.31  0.00  0.14 0.00  0.20  0.00 0.00  0.00
Crit Moves:  ****                 ****                    ****
Green/Cycle: 0.11 0.62  0.00  0.00 0.50  0.00  0.33 0.00  0.33  0.00 0.00  0.00
Volume/Cap:  0.62 0.37  0.00  0.00 0.62  0.00  0.42 0.00  0.62  0.00 0.00  0.00
Delay/Veh:   47.7  9.5   0.0   0.0 18.4   0.0  26.1  0.0  30.2   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  47.7  9.5   0.0   0.0 18.4   0.0  26.1  0.0  30.2   0.0  0.0   0.0
LOS by Move:    D    A     A     A    B     A     C    A     C     A    A     A
HCM2k85thQ:     7   10     0     0   20     0    10    0    14     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:26                Page 45-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #43 Flower St and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.857
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        68               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit      Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  2  0  1    1  0  3  0  1    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     198 1206    99    87  442    40   357 1029   168   186  649   192
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  198 1206    99    87  442    40   357 1029   168   186  649   192
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   198 1206    99    87  442    40   357 1029   168   186  649   192
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  198 1206    99    87  442    40   357 1029   168   186  649   192
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  198 1206    99    87  442    40   357 1029   168   186  649   192
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00
Lanes:       1.00 2.00  1.00  1.00 2.00  1.00  1.00 3.00  1.00  1.00 2.32  0.68
Final Sat.:  1600 3400  1600  1600 3400  1600  1600 5100  1600  1600 3904  1096
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.35  0.06  0.05 0.13  0.03  0.22 0.20  0.11  0.12 0.17  0.18
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:26                Page 46-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #44 Flower St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.877
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        75               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     224 1063   253   200  549   159   102  895    74   210 1415   147
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  224 1063   253   200  549   159   102  895    74   210 1415   147
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   224 1063   253   200  549   159   102  895    74   210 1415   147
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  224 1063   253   200  549   159   102  895    74   210 1415   147
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  224 1063   253   200  549   159   102  895    74   210 1415   147
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.00  1.00  1.00 1.55  0.45  1.00 2.77  0.23  1.00 2.72  0.28
Final Sat.:  1600 3400  1600  1600 2581   719  1600 4633   367  1600 4548   452
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.31  0.16  0.13 0.21  0.22  0.06 0.19  0.20  0.13 0.31  0.33
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #45 Flower St and McFadden Ave

Cycle (sec):	100	Critical Vol./Cap.(X):	1.037
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	180	Level Of Service:	F

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Permitted			Permitted			Permitted			Permitted		
Rights:	Include			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	0 1	0 1	0	0 1	0 1	0	0 1	0 1	0	0 1	0 1	0
Volume Module:												
Base Vol:	91	1234	76	46	352	57	124	928	37	93	1159	166
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	91	1234	76	46	352	57	124	928	37	93	1159	166
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	91	1234	76	46	352	57	124	928	37	93	1159	166
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	91	1234	76	46	352	57	124	928	37	93	1159	166
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	91	1234	76	46	352	57	124	928	37	93	1159	166
Saturation Flow Module:												
Sat/Lane:	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
Adjustment:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lanes:	0.13	1.76	0.11	0.20	1.55	0.25	0.23	1.70	0.07	0.13	1.64	0.23
Final Sat.:	208	2819	174	324	2476	401	364	2727	109	210	2616	375
Capacity Analysis Module:												
Vol/Sat:	0.06	0.44	0.44	0.03	0.14	0.14	0.08	0.34	0.34	0.06	0.44	0.44
Crit Moves:		****			****			****			****	

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:27                Page 48-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #46 Flower St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.866
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        71               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     122  859    82    84  469   135   203 1011   107    92 1545    99
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  122  859    82    84  469   135   203 1011   107    92 1545    99
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   122  859    82    84  469   135   203 1011   107    92 1545    99
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  122  859    82    84  469   135   203 1011   107    92 1545    99
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  122  859    82    84  469   135   203 1011   107    92 1545    99
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       1.00 1.83  0.17  1.00 1.55  0.45  1.00 2.71  0.29  1.00 2.82  0.18
Final Sat.:  1600 3021   279  1600 2585   715  1600 4541   459  1600 4711   289
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.28  0.29  0.05 0.18  0.19  0.13 0.22  0.23  0.06 0.33  0.34
Crit Moves:             ****  ****            ****                      ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #47 Flower St and MacArthur Blvd

Cycle (sec):	100	Critical Vol./Cap.(X):	0.900
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	87	Level Of Service:	E

Approach:	North Bound				South Bound				East Bound				West Bound			
Movement:	L	- T	- R		L	- T	- R		L	- T	- R		L	- T	- R	
Control:	Permitted				Permitted				Protected				Protected			
Rights:	Include				Include				Include				Include			
Min. Green:	0	0	0		0	0	0		0	0	0		0	0	0	
Y+R:	4.0	4.0	4.0		4.0	4.0	4.0		4.0	4.0	4.0		4.0	4.0	4.0	
Lanes:	1	0 1	1	0	1	0 1	1	0	1	0 2	1	0	1	0 2	1	0
Volume Module:																
Base Vol:	130	621	72		93	224	215		199	947	60		62	1989	177	
Growth Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
Initial Bse:	130	621	72		93	224	215		199	947	60		62	1989	177	
User Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
PHF Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
PHF Volume:	130	621	72		93	224	215		199	947	60		62	1989	177	
Reduct Vol:	0	0	0		0	0	0		0	0	0		0	0	0	
Reduced Vol:	130	621	72		93	224	215		199	947	60		62	1989	177	
PCE Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
MLF Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
FinalVolume:	130	621	72		93	224	215		199	947	60		62	1989	177	
Saturation Flow Module:																
Sat/Lane:	1600	1600	1600		1600	1600	1600		1600	1600	1600		1600	1600	1600	
Adjustment:	1.00	1.03	1.00		1.00	1.06	1.00		1.00	1.04	1.00		1.00	1.05	1.00	
Lanes:	1.00	1.79	0.21		1.00	1.02	0.98		1.00	2.82	0.18		1.00	2.75	0.25	
Final Sat.:	1600	2968	332		1600	1733	1567		1600	4714	286		1600	4608	392	
Capacity Analysis Module:																
Vol/Sat:	0.08	0.21	0.22		0.06	0.13	0.14		0.12	0.20	0.21		0.04	0.43	0.45	
Crit Moves:			****		****				****						****	

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:28                Page 50-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #48 Main St and La Veta Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.696
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        37               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  2  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     347 1059   496   164 1031   266   327  466   209   282  563   226
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  347 1059   496   164 1031   266   327  466   209   282  563   226
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   347 1059   496   164 1031   266   327  466   209   282  563   226
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  347 1059   496   164 1031   266   327  466   209   282  563   226
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  347 1059   496   164 1031   266   327  466   209   282  563   226
OvlAdjVol:               355                                              144
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.38  0.62  2.00 2.07  0.93  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 4016   984  3200 3514  1486  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.21  0.31  0.05 0.26  0.27  0.10 0.13  0.14  0.09 0.17  0.14
OvlAdjV/S:               0.22                                              0.09
Crit Moves:  ****                      ****  ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:29                Page 51-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #49 Main St and Mainplace Dr / Memory Ln
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.556
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        26               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     113 1186   225    52 1083   143   391  433   116   278  227   110
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  113 1186   225    52 1083   143   391  433   116   278  227   110
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   113 1186   225    52 1083   143   391  433   116   278  227   110
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  113 1186   225    52 1083   143   391  433   116   278  227   110
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  113 1186   225    52 1083   143   391  433   116   278  227   110
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 2.52  0.48  2.00 2.65  0.35  2.00 2.37  0.63  2.00 2.00  1.00
Final Sat.:  3200 4235   765  3200 4440   560  3200 3986  1014  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.28  0.29  0.02 0.24  0.26  0.12 0.11  0.11  0.09 0.07  0.07
Crit Moves:             ****  ****                ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:30                Page 52-1
------------------------------------------------------------------------------
                          Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #50 Main St and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.760
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        45               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     197 1019   222   222  969   150   224 1256    74   199 1220    81
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  197 1019   222   222  969   150   224 1256    74   199 1220    81
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   197 1019   222   222  969   150   224 1256    74   199 1220    81
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  197 1019   222   222  969   150   224 1256    74   199 1220    81
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  197 1019   222   222  969   150   224 1256    74   199 1220    81
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       2.00 2.00  1.00  2.00 2.00  1.00  2.00 2.83  0.17  2.00 2.81  0.19
Final Sat.:  3200 3400  1600  3200 3400  1600  3200 4733   267  3200 4701   299
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.30  0.14  0.07 0.28  0.09  0.07 0.27  0.28  0.06 0.26  0.27
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:31                Page 53-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #51 Main St and Civic Center Dr
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.965
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       152               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      92 1169    98    52  853    54   239 1322   158    38  384    39
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   92 1169    98    52  853    54   239 1322   158    38  384    39
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    92 1169    98    52  853    54   239 1322   158    38  384    39
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   92 1169    98    52  853    54   239 1322   158    38  384    39
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   92 1169    98    52  853    54   239 1322   158    38  384    39
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.03  1.00
Lanes:       1.00 1.85  0.15  1.00 1.88  0.12  1.00 1.79  0.21  1.00 1.82  0.18
Final Sat.:  1600 3052   248  1600 3109   191  1600 2958   342  1600 3005   295
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.38  0.40  0.03 0.27  0.28  0.15 0.45  0.46  0.02 0.13  0.13
Crit Moves:             ****  ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:31                Page 54-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #52 Main St and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.792
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        50               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  0    0  0  1  1  0    0  0  0  0  0    0  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      51 1152     0     0 1083    53     0    0     0    92  924   120
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   51 1152     0     0 1083    53     0    0     0    92  924   120
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    51 1152     0     0 1083    53     0    0     0    92  924   120
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   51 1152     0     0 1083    53     0    0     0    92  924   120
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   51 1152     0     0 1083    53     0    0     0    92  924   120
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       1.00 2.00  0.00  0.00 1.91  0.09  0.00 0.00  0.00  0.16 1.63  0.21
Final Sat.:  1600 3400     0     0 3151   149     0    0     0   259 2603   338
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.34  0.00  0.00 0.34  0.36  0.00 0.00  0.00  0.06 0.36  0.35
Crit Moves:  ****                     ****                          ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:32                Page 55-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #53 Main St and 4th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.447
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        22               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  1  1  0    0  0  1  1  0    0  0  1  1  0    0  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  950    45     0  864    39     0   70    39     0  229    58
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  950    45     0  864    39     0   70    39     0  229    58
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  950    45     0  864    39     0   70    39     0  229    58
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  950    45     0  864    39     0   70    39     0  229    58
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  950    45     0  864    39     0   70    39     0  229    58
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       0.00 1.91  0.09  0.00 1.91  0.09  0.00 1.28  0.72  0.00 1.60  0.40
Final Sat.:     0 3155   145     0 3162   138     0 2155  1145     0 2653   647
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.30  0.31  0.00 0.27  0.28  0.00 0.03  0.03  0.00 0.09  0.09
Crit Moves:             ****  ****            ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:33                Page 56-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #54 Main St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.744
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        43               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  2  0  1    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     152  745    65   146  559   119   116 1172    87   111 1244    87
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  152  745    65   146  559   119   116 1172    87   111 1244    87
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   152  745    65   146  559   119   116 1172    87   111 1244    87
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  152  745    65   146  559   119   116 1172    87   111 1244    87
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  152  745    65   146  559   119   116 1172    87   111 1244    87
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.84  0.16  1.00 2.00  1.00  1.00 2.79  0.21  1.00 2.80  0.20
Final Sat.:  1600 3043   257  1600 3400  1600  1600 4668   332  1600 4686   314
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.24  0.25  0.09 0.16  0.07  0.07 0.25  0.26  0.07 0.27  0.28
Crit Moves:             ****  ****            ****                      ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:33                Page 57-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #55 Main St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.925
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       104               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     132 1037    64   123  834    61   182  805    98   133  752   338
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  132 1037    64   123  834    61   182  805    98   133  752   338
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   132 1037    64   123  834    61   182  805    98   133  752   338
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  132 1037    64   123  834    61   182  805    98   133  752   338
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  132 1037    64   123  834    61   182  805    98   133  752   338
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 1.88  0.12  1.00 1.86  0.14  1.00 1.78  0.22  1.00 1.38  0.62
Final Sat.:  1600 3114   186  1600 3082   218  1600 2953   347  1600 2308   992
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.33  0.34  0.08 0.27  0.28  0.11 0.27  0.28  0.08 0.33  0.34
Crit Moves:             ****  ****            ****                      ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #56 Main St and Edinger Ave

Cycle (sec):	100	Critical Vol./Cap.(X):	0.867
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	71	Level Of Service:	D

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Protected			Protected			Protected			Protected		
Rights:	Include			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	1 0	1	1 0	1 0	1	1 0	1 0	2	1 0	1 0	2	1 0
Volume Module:												
Base Vol:	101	1069	49	129	646	88	118	698	78	102	1364	141
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	101	1069	49	129	646	88	118	698	78	102	1364	141
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	101	1069	49	129	646	88	118	698	78	102	1364	141
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	101	1069	49	129	646	88	118	698	78	102	1364	141
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	101	1069	49	129	646	88	118	698	78	102	1364	141
Saturation Flow Module:												
Sat/Lane:	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
Adjustment:	1.00	1.03	1.00	1.00	1.04	1.00	1.00	1.05	1.00	1.00	1.05	1.00
Lanes:	1.00	1.91	0.09	1.00	1.76	0.24	1.00	2.70	0.30	1.00	2.72	0.28
Final Sat.:	1600	3160	140	1600	2916	384	1600	4518	482	1600	4550	450
Capacity Analysis Module:												
Vol/Sat:	0.06	0.34	0.35	0.08	0.22	0.23	0.07	0.15	0.16	0.06	0.30	0.31
Crit Moves:			****	****			****					****

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:35                Page 59-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #57 Main St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.749
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        43               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     446 1067   293   265  345   260   313  643    62   193 1529   444
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  446 1067   293   265  345   260   313  643    62   193 1529   444
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   446 1067   293   265  345   260   313  643    62   193 1529   444
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  446 1067   293   265  345   260   313  643    62   193 1529   444
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  446 1067   293   265  345   260   313  643    62   193 1529   444
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.21  0.18  0.08 0.07  0.16  0.10 0.13  0.04  0.06 0.30  0.28
Crit Moves:  ****                      ****  ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:35                Page 60-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #58 Penn Wy and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.872
Loss Time (sec):       5               Average Delay (sec/veh):        25.5
Optimal Cycle:        76               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  0  2    0  0  0  0  0    0  0  2  1  0    1  0  3  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:    1113    0   543     0    0     0     0 1672   539   123 1440     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse: 1113    0   543     0    0     0     0 1672   539   123 1440     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:  1113    0   543     0    0     0     0 1672   539   123 1440     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol: 1113    0   543     0    0     0     0 1672   539   123 1440     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume: 1113    0   543     0    0     0     0 1672   539   123 1440     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 1.00  0.75  1.00 1.00  1.00  1.00 0.88  0.88  0.95 0.91  1.00
Lanes:       2.00 0.00  2.00  0.00 0.00  0.00  0.00 2.27  0.73  1.00 3.00  0.00
Final Sat.:  3502    0  2842     0    0     0     0 3777  1218  1805 5187     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.32 0.00  0.19  0.00 0.00  0.00  0.00 0.44  0.44  0.07 0.28  0.00
Crit Moves:  ****                                  ****        ****
Green/Cycle: 0.36 0.00  0.36  0.00 0.00  0.00  0.00 0.51  0.51  0.08 0.59  0.00
Volume/Cap:  0.87 0.00  0.52  0.00 0.00  0.00  0.00 0.87  0.87  0.87 0.47  0.00
Delay/Veh:   36.5  0.0  25.5   0.0  0.0   0.0   0.0 25.4  25.4  86.2 12.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  36.5  0.0  25.5   0.0  0.0   0.0   0.0 25.4  25.4  86.2 12.0   0.0
LOS by Move:    D    A     C     A    A     A     A    C     C     F    B     A
HCM2k85thQ:    28    0    12     0    0     0     0   36    36    10   14     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:36                Page 61-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #59 I-5 NB Off Ramps/17th Street
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.587
Loss Time (sec):       5               Average Delay (sec/veh):        19.0
Optimal Cycle:        29               Level Of Service:                  B
******************************************************************************
Street Name:         I-5 NB Off Ramps                    17th Street
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected         Permitted
Rights:           Include          Include          Ignore           Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  1    1  0  0  0  1    1  0  3  0  1    0  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     330   44    17    50    0   130   114 1047   688     0 1564    42
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  330   44    17    50    0   130   114 1047   688     0 1564    42
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Volume:   330   44    17    50    0   130   114 1047     0     0 1564    42
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  330   44    17    50    0   130   114 1047     0     0 1564    42
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
FinalVolume:  330   44    17    50    0   130   114 1047     0     0 1564    42
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.96 0.96  0.85  0.95 1.00  0.85  0.95 0.91  1.00  1.00 0.91  0.91
Lanes:       1.76 0.24  1.00  1.00 0.00  1.00  1.00 3.00  1.00  0.00 2.92  0.08
Final Sat.:  3212  428  1615  1805    0  1615  1805 5187  1900     0 5031   135
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.10  0.01  0.03 0.00  0.08  0.06 0.20  0.00  0.00 0.31  0.31
Crit Moves:       ****                     ****  ****                 ****
Green/Cycle: 0.18 0.18  0.18  0.14 0.00  0.14  0.11 0.64  0.00  0.00 0.53  0.53
Volume/Cap:  0.59 0.59  0.06  0.20 0.00  0.59  0.59 0.32  0.00  0.00 0.59  0.59
Delay/Veh:   39.3 39.3  34.5  38.7  0.0  44.5  47.1  8.3   0.0   0.0 16.4  16.4
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  39.3 39.3  34.5  38.7  0.0  44.5  47.1  8.3   0.0   0.0 16.4  16.4
LOS by Move:    D    D     C     D    A     D     D    A     A     A    B     B
HCM2k85thQ:     9    9     1     2    0     7     7    8     0     0   19    19
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:37                Page 62-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #60 Penn Wy and I-5 SB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.573
Loss Time (sec):       5               Average Delay (sec/veh):        23.0
Optimal Cycle:        29               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    2  0  2  0  0    0  0  0  0  0    1  0  0  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  631   414   592  137     0     0    0     0   214    0   183
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  631   414   592  137     0     0    0     0   214    0   183
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  631   414   592  137     0     0    0     0   214    0   183
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  631   414   592  137     0     0    0     0   214    0   183
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  631   414   592  137     0     0    0     0   214    0   183
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  0.85  0.92 0.95  1.00  1.00 1.00  1.00  0.95 1.00  0.75
Lanes:       0.00 2.00  1.00  2.00 2.00  0.00  0.00 0.00  0.00  1.00 0.00  2.00
Final Sat.:     0 3610  1615  3502 3610     0     0    0     0  1805    0  2842
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.17  0.26  0.17 0.04  0.00  0.00 0.00  0.00  0.12 0.00  0.06
Crit Moves:             ****  ****                               ****
Green/Cycle: 0.00 0.45  0.45  0.30 0.74  0.00  0.00 0.00  0.00  0.21 0.00  0.50
Volume/Cap:  0.00 0.39  0.57  0.57 0.05  0.00  0.00 0.00  0.00  0.57 0.00  0.13
Delay/Veh:    0.0 18.6  21.6  30.7  3.4   0.0   0.0  0.0   0.0  37.8  0.0  13.3
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 18.6  21.6  30.7  3.4   0.0   0.0  0.0   0.0  37.8  0.0  13.3
LOS by Move:    A    B     C     C    A     A     A    A     A     D    A     B
HCM2k85thQ:     0   10    15    13    1     0     0    0     0    10    0     3
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:37                Page 63-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM 4-Way Stop Method (Base Volume Alternative)
*******************************************************************************
Intersection #61 Santiago St and Civic Center Dr
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.369
Loss Time (sec):       5               Average Delay (sec/veh):       110.0
Optimal Cycle:         0               Level Of Service:                  F
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Stop Sign        Stop Sign        Stop Sign        Stop Sign
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Lanes:        1  0  0  1  0    1  0  0  1  0    0  1  0  0  1    0  0  1! 0  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     194  598    60    32  456   117   266   76   269    14   19    18
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  194  598    60    32  456   117   266   76   269    14   19    18
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   194  598    60    32  456   117   266   76   269    14   19    18
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  194  598    60    32  456   117   266   76   269    14   19    18
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  194  598    60    32  456   117   266   76   269    14   19    18
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 0.91  0.09  1.00 0.80  0.20  0.78 0.22  1.00  0.27 0.38  0.35
Final Sat.:   446  437    44   428  375    96   342   98   507   104  141   134
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.44 1.37  1.37  0.07 1.22  1.22  0.78 0.78  0.53  0.13 0.13  0.13
Crit Moves:             ****       ****             ****             ****
Delay/Veh:   16.8  201 200.6  11.6  140 140.1  34.1 34.1  17.5  13.7 13.7  13.7
Delay Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  16.8  201 200.6  11.6  140 140.1  34.1 34.1  17.5  13.7 13.7  13.7
LOS by Move:    C    F     F     B    F     F     D    D     C     B    B     B
ApproachDel:     158.8            133.3             26.8             13.7
Delay Adj:        1.00             1.00             1.00             1.00
ApprAdjDel:      158.8            133.3             26.8             13.7
LOS by Appr:         F                F                D                B
AllWayAvgQ:   0.7 25.4  25.4   0.1 17.0  17.0   2.8  2.8   1.1   0.1  0.1   0.1
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:38                Page 64-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #62 Santiago St and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.017
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     135  833   236   378  639   103   164  673    87   255  546   347
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  135  833   236   378  639   103   164  673    87   255  546   347
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   135  833   236   378  639   103   164  673    87   255  546   347
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  135  833   236   378  639   103   164  673    87   255  546   347
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  135  833   236   378  639   103   164  673    87   255  546   347
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       1.00 1.56  0.44  1.00 1.72  0.28  1.00 1.77  0.23  1.00 2.00  1.00
Final Sat.:  1600 2594   706  1600 2856   444  1600 2934   366  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.32  0.33  0.24 0.22  0.23  0.10 0.23  0.24  0.16 0.16  0.22
Crit Moves:             ****  ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:39                Page 65-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #63 Standard Ave and 4th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.893
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        83               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  2  0  1    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     251  543   214   254  428   297   302  477   201   233  648   351
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  251  543   214   254  428   297   302  477   201   233  648   351
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   251  543   214   254  428   297   302  477   201   233  648   351
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  251  543   214   254  428   297   302  477   201   233  648   351
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  251  543   214   254  428   297   302  477   201   233  648   351
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 2.00  1.00  1.00 2.00  1.00  1.00 1.41  0.59  1.00 1.30  0.70
Final Sat.:  1600 3400  1600  1600 3400  1600  1600 2351   949  1600 2176  1124
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.16 0.16  0.13  0.16 0.13  0.19  0.19 0.20  0.21  0.15 0.30  0.31
Crit Moves:  ****                     ****  ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:39                Page 66-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #64 Standard Ave and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.968
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       159               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     109  724   259   142  679    47   168 1279    65   264 1888   116
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  109  724   259   142  679    47   168 1279    65   264 1888   116
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   109  724   259   142  679    47   168 1279    65   264 1888   116
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  109  724   259   142  679    47   168 1279    65   264 1888   116
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  109  724   259   142  679    47   168 1279    65   264 1888   116
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.47  0.53  1.00 1.87  0.13  1.00 2.85  0.15  1.00 2.83  0.17
Final Sat.:  1600 2457   843  1600 3093   207  1600 4768   232  1600 4722   278
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.29  0.31  0.09 0.22  0.23  0.11 0.27  0.28  0.17 0.40  0.42
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:40                Page 67-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #65 Standard Ave and Mcfadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.828
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        59               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     194  765    94   237  520    90    95  632   108   123  749   217
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  194  765    94   237  520    90    95  632   108   123  749   217
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   194  765    94   237  520    90    95  632   108   123  749   217
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  194  765    94   237  520    90    95  632   108   123  749   217
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  194  765    94   237  520    90    95  632   108   123  749   217
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.78  0.22  1.00 1.70  0.30  1.00 1.71  0.29  1.00 1.55  0.45
Final Sat.:  1600 2950   350  1600 2828   472  1600 2833   467  1600 2581   719
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.26  0.27  0.15 0.18  0.19  0.06 0.22  0.23  0.08 0.29  0.30
Crit Moves:             ****  ****            ****                      ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:41                Page 68-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #66 Halladay St and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.975
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       173               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    0  0  0  0  0    0  1  1  1  0    0  1  2  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     338    0   704     0    0     0     2  868    87   272 2159     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  338    0   704     0    0     0     2  868    87   272 2159     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   338    0   704     0    0     0     2  868    87   272 2159     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  338    0   704     0    0     0     2  868    87   272 2159     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  338    0   704     0    0     0     2  868    87   272 2159     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.02  1.00  1.00 1.05  1.00
Lanes:       1.00 0.00  1.00  0.00 0.00  0.00  0.01 2.72  0.27  0.34 2.66  0.00
Final Sat.:  1600    0  1600     0    0     0    10 4454   436   537 4463     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.21 0.00  0.44  0.00 0.00  0.00  0.00 0.19  0.20  0.17 0.48  0.00
Crit Moves:             ****                   ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:41                Page 69-1
--------------------------------------------------------------------------------
                         Santa Ana Circulation Element
--------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
********************************************************************************
Intersection #67 Halladay St and Dyer Rd
********************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.057
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
********************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      61  266   307   296   39    83   147 1271     9    51 1655   132
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   61  266   307   296   39    83   147 1271     9    51 1655   132
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    61  266   307   296   39    83   147 1271     9    51 1655   132
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   61  266   307   296   39    83   147 1271     9    51 1655   132
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   61  266   307   296   39    83   147 1271     9    51 1655   132
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 0.46  0.54  1.00 0.32  0.68  1.00 2.98  0.02  1.00 2.78  0.22
Final Sat.:  1600  743   857  1600  511  1089  1600 4966    34  1600 4645   355
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.36  0.36  0.19 0.08  0.08  0.09 0.26  0.27  0.03 0.36  0.37
Crit Moves:             ****  ****            ****                      ****
********************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:42                Page 70-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #68 SR-55 SB Ramps and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.567
Loss Time (sec):       5               Average Delay (sec/veh):        17.8
Optimal Cycle:        28               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  2    0  0  2  1  1    0  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   299    0   724     0 1187  1058     0 1474   579
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   299    0   724     0 1187  1058     0 1474   579
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:     0    0     0   299    0   724     0 1187     0     0 1474     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   299    0   724     0 1187     0     0 1474     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:    0    0     0   299    0   724     0 1187     0     0 1474     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.92 1.00  0.75  1.00 0.91  0.91  1.00 0.91  1.00
Lanes:       0.00 0.00  0.00  2.00 0.00  2.00  0.00 3.00  1.00  0.00 3.00  1.00
Final Sat.:     0    0     0  3502    0  2842     0 5187  1729     0 5187  1900
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.09 0.00  0.25  0.00 0.23  0.00  0.00 0.28  0.00
Crit Moves:                               ****  ****                 ****
Green/Cycle: 0.00 0.00  0.00  0.45 0.00  0.45  0.00 0.50  0.00  0.00 0.50  0.00
Volume/Cap:  0.00 0.00  0.00  0.19 0.00  0.57  0.00 0.46  0.00  0.00 0.57  0.00
Delay/Veh:    0.0  0.0   0.0  16.7  0.0  21.0   0.0 16.3   0.0   0.0 17.7   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0  16.7  0.0  21.0   0.0 16.3   0.0   0.0 17.7   0.0
LOS by Move:    A    A     A     B    A     C     A    B     A     A    B     A
HCM2k85thQ:     0    0     0     4    0    15     0   13     0     0   18     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:42                Page 71-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #69 SR-55 NB Ramps and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.484
Loss Time (sec):       5               Average Delay (sec/veh):        14.6
Optimal Cycle:        24               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Ignore           Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  0  1    0  0  0  0  0    0  0  2  0  2    0  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     620    0   412     0    0     0     0  711   731     0 1467  1056
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  620    0   412     0    0     0     0  711   731     0 1467  1056
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:   620    0     0     0    0     0     0  711     0     0 1467     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  620    0     0     0    0     0     0  711     0     0 1467     0
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:  620    0     0     0    0     0     0  711     0     0 1467     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 1.00  1.00  1.00 1.00  1.00  1.00 0.95  0.88  1.00 0.91  1.00
Lanes:       2.00 0.00  1.00  0.00 0.00  0.00  0.00 2.00  2.00  0.00 3.00  1.00
Final Sat.:  3502    0  1900     0    0     0     0 3610  3344     0 5187  1900
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.18 0.00  0.00  0.00 0.00  0.00  0.00 0.20  0.00  0.00 0.28  0.00
Crit Moves:  ****                              ****                   ****
Green/Cycle: 0.37 0.00  0.00  0.00 0.00  0.00  0.00 0.58  0.00  0.00 0.58  0.00
Volume/Cap:  0.48 0.00  0.00  0.00 0.00  0.00  0.00 0.34  0.00  0.00 0.48  0.00
Delay/Veh:   24.7  0.0   0.0   0.0  0.0   0.0   0.0 10.9   0.0   0.0 12.2   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  24.7  0.0   0.0   0.0  0.0   0.0   0.0 10.9   0.0   0.0 12.2   0.0
LOS by Move:    C    A     A     A    A     A     A    B     A     A    B     A
HCM2k85thQ:    12    0     0     0    0     0     0    9     0     0   15     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:43                Page 72-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #70 SR-55 SB Ramps and Dyer Rd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.663
Loss Time (sec):       5               Average Delay (sec/veh):        26.5
Optimal Cycle:        35               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:            Ovl              Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  2    0  1  1  0  1    1  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     386   12   291   103  226   110    59 1379   187   566 1008    65
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  386   12   291   103  226   110    59 1379   187   566 1008    65
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   386   12   291   103  226   110    59 1379   187   566 1008    65
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  386   12   291   103  226   110    59 1379   187   566 1008    65
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  386   12   291   103  226   110    59 1379   187   566 1008    65
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.95  0.75  0.94 0.94  0.85  0.95 0.91  0.85  0.92 0.91  0.85
Lanes:       1.94 0.06  2.00  0.63 1.37  1.00  1.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3516  109  2842  1113 2443  1615  1805 5187  1615  3502 5187  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.11  0.10  0.09 0.09  0.07  0.03 0.27  0.12  0.16 0.19  0.04
Crit Moves:       ****             ****             ****             ****
Green/Cycle: 0.17 0.17  0.41  0.14 0.14  0.14  0.09 0.40  0.40  0.24 0.55  0.55
Volume/Cap:  0.66 0.66  0.25  0.66 0.66  0.49  0.35 0.66  0.29  0.66 0.35  0.07
Delay/Veh:   41.9 41.9  19.5  44.1 44.1  41.4  43.8 25.2  20.5  36.1 12.5  10.5
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  41.9 41.9  19.5  44.1 44.1  41.4  43.8 25.2  20.5  36.1 12.5  10.5
LOS by Move:    D    D     B     D    D     D     D    C     C     D    B     B
HCM2k85thQ:    11   11     5    10   10     6     3   20     6    14   10     1
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:44                Page 73-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #71 Glassell St and La Veta Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.744
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        43               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Ovl              Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  1  0  1    1  0  1  1  0    1  0  1  0  1    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     573  595   194    14  471    35   106  346   594   211  382    15
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  573  595   194    14  471    35   106  346   594   211  382    15
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   573  595   194    14  471    35   106  346   594   211  382    15
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  573  595   194    14  471    35   106  346   594   211  382    15
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  573  595   194    14  471    35   106  346   594   211  382    15
OvlAdjVol:                 0                                  308
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.03  1.00
Lanes:       2.00 1.00  1.00  1.00 1.86  0.14  1.00 1.00  1.00  1.00 1.92  0.08
Final Sat.:  3200 1700  1600  1600 3079   221  1600 1700  1600  1600 3179   121
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.18 0.35  0.12  0.01 0.15  0.16  0.07 0.20  0.37  0.13 0.12  0.12
OvlAdjV/S:               0.00                                0.19
Crit Moves:       ****        ****                  ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:44                Page 74-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #72 Glassell St and SR-22 WB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.910
Loss Time (sec):       5               Average Delay (sec/veh):        30.5
Optimal Cycle:        96               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected         Permitted      Split Phase      Split Phase
Rights:           Include           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  0    0  0  2  0  1    0  0  0  0  0    1  0  1! 0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     660 1079     0     0 1007   293     0    0     0   251    9   446
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  660 1079     0     0 1007   293     0    0     0   251    9   446
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   660 1079     0     0 1007   293     0    0     0   251    9   446
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  660 1079     0     0 1007   293     0    0     0   251    9   446
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  660 1079     0     0 1007   293     0    0     0   251    9   446
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.95  1.00  1.00 0.95  0.85  1.00 1.00  1.00  0.86 0.86  0.86
Lanes:       1.00 2.00  0.00  0.00 2.00  1.00  0.00 0.00  0.00  1.35 0.03  1.62
Final Sat.:  1805 3610     0     0 3610  1615     0    0     0  2200   41  2644
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.37 0.30  0.00  0.00 0.28  0.18  0.00 0.00  0.00  0.11 0.22  0.17
Crit Moves:  ****                 ****                               ****
Green/Cycle: 0.40 0.71  0.00  0.00 0.31  0.31  0.00 0.00  0.00  0.24 0.24  0.24
Volume/Cap:  0.91 0.42  0.00  0.00 0.91  0.59  0.00 0.00  0.00  0.47 0.91  0.70
Delay/Veh:   43.7  6.2   0.0   0.0 44.3  31.3   0.0  0.0   0.0  32.7 51.5  36.8
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  43.7  6.2   0.0   0.0 44.3  31.3   0.0  0.0   0.0  32.7 51.5  36.8
LOS by Move:    D    A     A     A    D     C     A    A     A     C    D     D
HCM2k85thQ:    33   11     0     0   29    13     0    0     0     8   21    14
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:45                Page 75-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #73 Grand Ave / Glassell St and SR-22 EB Ramps
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.931
Loss Time (sec):       5               Average Delay (sec/veh):        31.6
Optimal Cycle:       113               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted       Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    1  0  2  0  0    1  0  1! 0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1450   370   461  824     0   229    4   503     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1450   370   461  824     0   229    4   503     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1450   370   461  824     0   229    4   503     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1450   370   461  824     0   229    4   503     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1450   370   461  824     0   229    4   503     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  0.85  0.95 0.95  1.00  0.86 0.86  0.86  1.00 1.00  1.00
Lanes:       0.00 2.00  1.00  1.00 2.00  0.00  1.31 0.01  1.68  0.00 0.00  0.00
Final Sat.:     0 3610  1615  1805 3610     0  2129   18  2731     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.40  0.23  0.26 0.23  0.00  0.11 0.23  0.18  0.00 0.00  0.00
Crit Moves:       ****        ****                ****
Green/Cycle: 0.00 0.43  0.43  0.27 0.71  0.00  0.24 0.24  0.24  0.00 0.00  0.00
Volume/Cap:  0.00 0.93  0.53  0.93 0.32  0.00  0.44 0.93  0.75  0.00 0.00  0.00
Delay/Veh:    0.0 37.4  21.8  59.8  5.7   0.0  32.2 54.5  38.4   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 37.4  21.8  59.8  5.7   0.0  32.2 54.5  38.4   0.0  0.0   0.0
LOS by Move:    A    D     C     E    A     A     C    D     D     A    A     A
HCM2k85thQ:     0   38    13    27    8     0     8   23    15     0    0     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:46                Page 76-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #74 Grand Ave and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.717
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        39               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      54 1420   284   242  974    89    79   45    33   221   42   157
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   54 1420   284   242  974    89    79   45    33   221   42   157
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    54 1420   284   242  974    89    79   45    33   221   42   157
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   54 1420   284   242  974    89    79   45    33   221   42   157
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   54 1420   284   242  974    89    79   45    33   221   42   157
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 2.50  0.50  1.00 2.75  0.25  1.00 1.15  0.85  1.00 1.00  1.00
Final Sat.:  1600 4200   800  1600 4598   402  1600 1946  1354  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.34  0.36  0.15 0.21  0.22  0.05 0.02  0.02  0.14 0.02  0.10
Crit Moves:             ****  ****                ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:46                Page 77-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #75 Grand Ave and Santa Clara Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.808
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        54               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include        WideBypass          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  0  1  0    1  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     103 1386   288   240  946   240   114  139    26   157  282   300
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  103 1386   288   240  946   240   114  139    26   157  282   300
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   103 1386   288   240  946   240   114  139    26   157  282   300
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  103 1386   288   240  946   240   114  139    26   157  282   300
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  103 1386   288   240  946   240   114  139    26   157  282   300
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.00  1.00  1.00 1.06  1.00
Lanes:       1.00 2.48  0.52  1.00 2.39  0.61  1.00 0.84  0.16  1.00 1.00  1.00
Final Sat.:  1600 4174   826  1600 4029   971  1600 1348   252  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.33  0.35  0.15 0.23  0.25  0.07 0.10  0.10  0.10 0.17  0.19
Crit Moves:             ****  ****             ****                     ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:47                Page 78-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #76 Grand Ave and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.856
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        67               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    2  0  2  1  0    2  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     288 1026   259   294  634   140   321  823   138   279 1031   187
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  288 1026   259   294  634   140   321  823   138   279 1031   187
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   288 1026   259   294  634   140   321  823   138   279 1031   187
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  288 1026   259   294  634   140   321  823   138   279 1031   187
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  288 1026   259   294  634   140   321  823   138   279 1031   187
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.40  0.60  1.00 2.46  0.54  2.00 2.57  0.43  2.00 2.54  0.46
Final Sat.:  1600 4033   967  1600 4132   868  3200 4311   689  3200 4263   737
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.18 0.25  0.27  0.18 0.15  0.16  0.10 0.19  0.20  0.09 0.24  0.25
Crit Moves:             ****  ****             ****                     ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:47                Page 79-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #77 Grand Ave and I-5 NB Ramps
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.696
Loss Time (sec):       5               Average Delay (sec/veh):        10.1
Optimal Cycle:        38               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Ignore           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    1  0  3  0  0    0  0  0  0  0    2  0  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1855  1432    62 1501     0     0    0     0   151    0   182
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1855  1432    62 1501     0     0    0     0   151    0   182
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1855     0    62 1501     0     0    0     0   151    0   182
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1855     0    62 1501     0     0    0     0   151    0   182
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1855     0    62 1501     0     0    0     0   151    0   182
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  1.00  0.95 0.91  1.00  1.00 1.00  1.00  0.92 1.00  0.85
Lanes:       0.00 2.00  1.00  1.00 3.00  0.00  0.00 0.00  0.00  2.00 0.00  1.00
Final Sat.:     0 3610  1900  1805 5187     0     0    0     0  3502    0  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.51  0.00  0.03 0.29  0.00  0.00 0.00  0.00  0.04 0.00  0.11
Crit Moves:       ****        ****                                       ****
Green/Cycle: 0.00 0.74  0.00  0.05 0.79  0.00  0.00 0.00  0.00  0.16 0.00  0.16
Volume/Cap:  0.00 0.70  0.00  0.70 0.37  0.00  0.00 0.00  0.00  0.27 0.00  0.70
Delay/Veh:    0.0  7.8   0.0  68.1  3.2   0.0   0.0  0.0   0.0  36.9  0.0  47.5
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  7.8   0.0  68.1  3.2   0.0   0.0  0.0   0.0  36.9  0.0  47.5
LOS by Move:    A    A     A     E    A     A     A    A     A     D    A     D
HCM2k85thQ:     0   25     0     5    8     0     0    0     0     4    0    10
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:48                Page 80-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #78 Grand Ave and Santa Ana Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.721
Loss Time (sec):       5               Average Delay (sec/veh):        25.3
Optimal Cycle:        41               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Ovl             Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  0  2    2  0  1  0  2    0  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     185 2091    34    38  839   595   377  230   363    34  228   165
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  185 2091    34    38  839   595   377  230   363    34  228   165
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   185 2091    34    38  839   595   377  230   363    34  228   165
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  185 2091    34    38  839   595   377  230   363    34  228   165
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  185 2091    34    38  839   595   377  230   363    34  228   165
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  0.91  0.95 0.95  0.75  0.92 1.00  0.75  0.89 0.89  0.89
Lanes:       1.00 2.95  0.05  1.00 2.00  2.00  2.00 1.00  2.00  0.16 1.07  0.77
Final Sat.:  1805 5094    83  1805 3610  2842  3502 1900  2842   270 1809  1309
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.41  0.41  0.02 0.23  0.21  0.11 0.12  0.13  0.13 0.13  0.13
Crit Moves:       ****        ****                       ****  ****
Green/Cycle: 0.18 0.57  0.57  0.03 0.42  0.59  0.18 0.18  0.18  0.17 0.17  0.17
Volume/Cap:  0.56 0.72  0.72  0.72 0.56  0.35  0.61 0.68  0.72  0.72 0.72  0.72
Delay/Veh:   39.3 16.6  16.6  86.7 22.8  10.6  39.7 44.2  43.9  43.3 43.3  43.3
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  39.3 16.6  16.6  86.7 22.8  10.6  39.7 44.2  43.9  43.3 43.3  43.3
LOS by Move:    D    B     B     F    C     B     D    D     D     D    D     D
HCM2k85thQ:     9   27    27     4   16     8    10   12    12    12   12    12
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:49                Page 81-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #79 Grand Ave and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.731
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        41               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     188 1435    43   113  667   266   326 1080   107   154  958   176
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  188 1435    43   113  667   266   326 1080   107   154  958   176
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   188 1435    43   113  667   266   326 1080   107   154  958   176
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  188 1435    43   113  667   266   326 1080   107   154  958   176
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  188 1435    43   113  667   266   326 1080   107   154  958   176
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 2.91  0.09  2.00 3.00  1.00  2.00 2.73  0.27  2.00 2.53  0.47
Final Sat.:  3200 4860   140  3200 5100  1600  3200 4567   433  3200 4255   745
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.30  0.31  0.04 0.13  0.17  0.10 0.24  0.25  0.05 0.23  0.24
Crit Moves:             ****  ****             ****                     ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:50                Page 82-1
------------------------------------------------------------------------------
                          Santa Ana Circulation Element
------------------------------------------------------------------------------
                       Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #80 Grand Ave and Chestnut Ave
******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.688
Loss Time (sec):       5                Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36                Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     152 1142   198   161  716   121    70  214    47   139  433   252
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  152 1142   198   161  716   121    70  214    47   139  433   252
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   152 1142   198   161  716   121    70  214    47   139  433   252
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  152 1142   198   161  716   121    70  214    47   139  433   252
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  152 1142   198   161  716   121    70  214    47   139  433   252
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 2.56  0.44  1.00 2.57  0.43  1.00 1.64  0.36  1.00 1.26  0.74
Final Sat.:  1600 4291   709  1600 4306   694  1600 2724   576  1600 2123  1177
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.27  0.28  0.10 0.17  0.17  0.04 0.08  0.08  0.09 0.20  0.21
Crit Moves:             ****  ****             ****                     ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:50                Page 83-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #81 Grand Ave and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.821
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        57               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     222 1264   218   153  696   187   122  454    79    96  762   168
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  222 1264   218   153  696   187   122  454    79    96  762   168
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   222 1264   218   153  696   187   122  454    79    96  762   168
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  222 1264   218   153  696   187   122  454    79    96  762   168
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  222 1264   218   153  696   187   122  454    79    96  762   168
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 2.56  0.44  1.00 2.36  0.64  1.00 1.70  0.30  1.00 1.64  0.36
Final Sat.:  1600 4294   706  1600 3983  1017  1600 2826   474  1600 2722   578
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.29  0.31  0.10 0.17  0.18  0.08 0.16  0.17  0.06 0.28  0.29
Crit Moves:             ****  ****             ****                     ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:51                Page 84-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #82 Grand Ave and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.004
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     244 1411   122   203  501   281   182  787    63    93 1673   217
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  244 1411   122   203  501   281   182  787    63    93 1673   217
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   244 1411   122   203  501   281   182  787    63    93 1673   217
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  244 1411   122   203  501   281   182  787    63    93 1673   217
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  244 1411   122   203  501   281   182  787    63    93 1673   217
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.76  0.24  1.00 2.00  1.00  1.00 2.78  0.22  1.00 2.66  0.34
Final Sat.:  1600 4618   382  1600 3400  1600  1600 4644   356  1600 4449   551
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.31  0.32  0.13 0.15  0.18  0.11 0.17  0.18  0.06 0.38  0.39
Crit Moves:             ****  ****            ****                      ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:51                Page 85-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #83 Grand Ave and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.827
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        58               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    2  0  3  0  1    2  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     183  660   146   140  452   208   306  587   127   241 1539   504
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  183  660   146   140  452   208   306  587   127   241 1539   504
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   183  660   146   140  452   208   306  587   127   241 1539   504
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  183  660   146   140  452   208   306  587   127   241 1539   504
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  183  660   146   140  452   208   306  587   127   241 1539   504
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.46  0.54  1.00 2.05  0.95  2.00 3.00  1.00  2.00 2.26  0.74
Final Sat.:  1600 4131   869  1600 3487  1513  3200 5100  1600  3200 3816  1184
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.16  0.17  0.09 0.13  0.14  0.10 0.12  0.08  0.08 0.40  0.43
Crit Moves:             ****  ****             ****                     ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:52                Page 86-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #84 SR-55 NB Ramps and Dyer Rd
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.362
Loss Time (sec):       5                Average Delay (sec/veh):         5.7
Optimal Cycle:        20                Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1! 0  1    0  0  0  0  0    0  0  3  0  1    0  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     181    0    49     0    0     0     0 1183   602     0 1488   929
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  181    0    49     0    0     0     0 1183   602     0 1488   929
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:   181    0    49     0    0     0     0 1183     0     0 1488     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  181    0    49     0    0     0     0 1183     0     0 1488     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:  181    0    49     0    0     0     0 1183     0     0 1488     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.93 1.00  0.93  1.00 1.00  1.00  1.00 0.91  1.00  1.00 0.91  0.91
Lanes:       1.79 0.00  1.21  0.00 0.00  0.00  0.00 3.00  1.00  0.00 3.00  0.00
Final Sat.:  3162    0  2146     0    0     0     0 5187  1900     0 5187     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.00  0.02  0.00 0.00  0.00  0.00 0.23  0.00  0.00 0.29  0.00
Crit Moves:  ****                             ****                   ****
Green/Cycle: 0.16 0.00  0.16  0.00 0.00  0.00  0.00 0.79  0.00  0.00 0.79  0.00
Volume/Cap:  0.36 0.00  0.14  0.00 0.00  0.00  0.00 0.29  0.00  0.00 0.36  0.00
Delay/Veh:   38.0  0.0  36.3   0.0  0.0   0.0   0.0  2.8   0.0   0.0  3.1   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  38.0  0.0  36.3   0.0  0.0   0.0   0.0  2.8   0.0   0.0  3.1   0.0
LOS by Move:    D    A     D     A    A     A     A    A     A     A    A     A
HCM2k85thQ:     5    0     2     0    0     0     0    6     0     0    8     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:53                Page 87-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
             2000 HCM 4-Way Stop Method (Base Volume Alternative)
*******************************************************************************
Intersection #85 Cambridge St and La Veta Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.779
Loss Time (sec):       5               Average Delay (sec/veh):        19.7
Optimal Cycle:         0               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Stop Sign        Stop Sign        Stop Sign        Stop Sign
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Lanes:        1  0  1  0  0    0  0  1  0  1    1  0  0  0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     235  327     0     0  206   191   375    0   247     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  235  327     0     0  206   191   375    0   247     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   235  327     0     0  206   191   375    0   247     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  235  327     0     0  206   191   375    0   247     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  235  327     0     0  206   191   375    0   247     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 1.00  0.00  0.00 1.00  1.00  1.00 0.00  1.00  0.00 0.00  0.00
Final Sat.:   474  510     0     0  485   534   482    0   567     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.50 0.64  xxxx  xxxx 0.42  0.36  0.78 xxxx  0.44  xxxx xxxx  xxxx
Crit Moves:       ****             ****        ****
Delay/Veh:   17.0 20.9   0.0   0.0 14.9  12.6  30.8  0.0  13.4   0.0  0.0   0.0
Delay Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  17.0 20.9   0.0   0.0 14.9  12.6  30.8  0.0  13.4   0.0  0.0   0.0
LOS by Move:    C    C     *     *    B     B     D    *     B     *    *     *
ApproachDel:       19.3             13.8             23.9           xxxxxx
Delay Adj:         1.00             1.00             1.00            xxxxx
ApprAdjDel:        19.3             13.8             23.9           xxxxxx
LOS by Appr:          C                B                C                *
AllWayAvgQ:   0.9  1.6   0.0   0.0  0.7   0.5   2.8  0.0   0.7   0.0  0.0   0.0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:53                Page 88-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #86 Cambridge St and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.454
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        22               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:            Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    1  0  0  0  1    1  0  2  0  0    0  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   219    0    76   132  230     0     0  237   295
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   219    0    76   132  230     0     0  237   295
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   219    0    76   132  230     0     0  237   295
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   219    0    76   132  230     0     0  237   295
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   219    0    76   132  230     0     0  237   295
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 0.00  0.00  1.00 0.00  1.00  1.00 2.00  0.00  0.00 1.00  1.00
Final Sat.:     0    0     0  1600    0  1600  1600 3400     0     0 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.14 0.00  0.05  0.08 0.07  0.00  0.00 0.14  0.18
Crit Moves:                   ****             ****                     ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:54                Page 89-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #87 Mabury St and 1st Street
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.674
Loss Time (sec):       5               Average Delay (sec/veh):        27.1
Optimal Cycle:        36               Level Of Service:                  C
*******************************************************************************
Street Name:              Mabury                          1st Street
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    1  0  1! 0  1    0  0  2  1  0    1  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:      23    0   233   195   83   367     0 1334    21    40  549     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   23    0   233   195   83   367     0 1334    21    40  549     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    23    0   233   195   83   367     0 1334    21    40  549     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   23    0   233   195   83   367     0 1334    21    40  549     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   23    0   233   195   83   367     0 1334    21    40  549     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 1.00  0.85  0.90 0.90  0.90  1.00 0.91  0.91  0.95 0.91  0.91
Lanes:       1.00 0.00  1.00  1.27 0.23  1.50  0.00 2.95  0.05  1.00 3.00  0.00
Final Sat.:  1805    0  1615  2171  390  2576     0 5096    80  1805 5187     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.00  0.14  0.09 0.21  0.14  0.00 0.26  0.26  0.02 0.11  0.00
Crit Moves:             ****        ****              ****        ****
Green/Cycle: 0.21 0.00  0.21  0.32 0.32  0.32  0.00 0.39  0.39  0.03 0.42  0.00
Volume/Cap:  0.06 0.00  0.67  0.28 0.67  0.45  0.00 0.67  0.67  0.67 0.25  0.00
Delay/Veh:   31.4  0.0  41.3  25.8 31.7  27.6   0.0 26.3  26.3  74.4 18.8   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  31.4  0.0  41.3  25.8 31.7  27.6   0.0 26.3  26.3  74.4 18.8   0.0
LOS by Move:    C    A     D     C    C     C     A    C     C     E    B     A
HCM2k85thQ:     1    0    12     6   16    10     0   20    20     4    6     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Attachment 8

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:55                Page 90-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #88 Tustin St and La Veta Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.381
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        19               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  1  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      38  863   205    79  701    13    13    5    20   146    4    90
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   38  863   205    79  701    13    13    5    20   146    4    90
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    38  863   205    79  701    13    13    5    20   146    4    90
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   38  863   205    79  701    13    13    5    20   146    4    90
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   38  863   205    79  701    13    13    5    20   146    4    90
OvlAdjVol:                                                                  11
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       1.00 2.42  0.58  1.00 2.95  0.05  1.00 1.00  1.00  1.95 0.05  1.00
Final Sat.:  1600 4079   921  1600 4913    87  1600 1700  1600  3115   85  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.21  0.22  0.05 0.14  0.15  0.01 0.00  0.01  0.05 0.05  0.06
OvlAdjV/S:                                                                 0.01
Crit Moves:             ****  ****                          ****       ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:55                Page 91-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #89 Tustin St and SR-22 WB On-Ramp
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.391
Loss Time (sec):       5               Average Delay (sec/veh):        11.1
Optimal Cycle:        29               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected         Permitted       Protected        Protected
Rights:           Include           Include         Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  0    0  0  2  1  0    0  0  0  0  0    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     466 1340     0     0  573   294     0    0     0     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  466 1340     0     0  573   294     0    0     0     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   466 1340     0     0  573   294     0    0     0     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  466 1340     0     0  573   294     0    0     0     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  466 1340     0     0  573   294     0    0     0     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 0.95  1.00  1.00 0.86  0.86  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       2.00 2.00  0.00  0.00 2.00  1.00  0.00 0.00  0.00  0.00 0.00  0.00
Final Sat.:  3502 3610     0     0 3282  1641     0    0     0     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.37  0.00  0.00 0.17  0.18  0.00 0.00  0.00  0.00 0.00  0.00
Crit Moves:       ****
Green/Cycle: 0.65 0.95  0.00  0.00 0.30  0.30  0.00 0.00  0.00  0.00 0.00  0.00
Volume/Cap:  0.21 0.39  0.00  0.00 0.57  0.59  0.00 0.00  0.00  0.00 0.00  0.00
Delay/Veh:    7.3  0.3   0.0   0.0 29.9  30.2   0.0  0.0   0.0   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   7.3  0.3   0.0   0.0 29.9  30.2   0.0  0.0   0.0   0.0  0.0   0.0
LOS by Move:    A    A     A     A    C     C     A    A     A     A    A     A
HCM2k85thQ:     5    3     0     0   13    14     0    0     0     0    0     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Attachment 8

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:56                Page 92-1
-------------------------------------------------------------------------------
                        Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #90 Tustin St and SR-22 EB Off-Ramp / Seba Ave
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.679
Loss Time (sec):       5                Average Delay (sec/veh):        23.1
Optimal Cycle:        37                Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted      Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  1  0    1  0  3  0  0    1  0  1! 0  1    0  0  1! 0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1416     4    40  550     0   440   39   558    28    0    67
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1416     4    40  550     0   440   39   558    28    0    67
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1416     4    40  550     0   440   39   558    28    0    67
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1416     4    40  550     0   440   39   558    28    0    67
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1416     4    40  550     0   440   39   558    28    0    67
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  0.91  0.10 0.91  1.00  0.90 0.90  0.90  0.89 1.00  0.89
Lanes:       0.00 2.99  0.01  1.00 3.00  0.00  1.41 0.07  1.52  0.29 0.00  0.71
Final Sat.:     0 5172    15   188 5187     0  2408  124  2596   499    0  1195
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.27  0.27  0.21 0.11  0.00  0.18 0.31  0.21  0.06 0.00  0.06
Crit Moves:       ****                          ****        ****
Green/Cycle: 0.00 0.40  0.40  0.40 0.40  0.00  0.46 0.46  0.46  0.08 0.00  0.08
Volume/Cap:  0.00 0.68  0.68  0.53 0.26  0.00  0.39 0.68  0.46  0.68 0.00  0.68
Delay/Veh:    0.0 25.4  25.4  29.3 20.0   0.0  17.7 22.2  18.5  57.2  0.0  57.2
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 25.4  25.4  29.3 20.0   0.0  17.7 22.2  18.5  57.2  0.0  57.2
LOS by Move:    A    C     C     C    B     A     B    C     B     E    A     E
HCM2k85thQ:     0   21    21     3    6     0    10   20    12     7    0     7
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:57                Page 93-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #91 Tustin Ave and Fairhaven Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.685
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  1  1  0    1  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     280 1492   132   356  940   108    89  200   163   100  220   208
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  280 1492   132   356  940   108    89  200   163   100  220   208
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   280 1492   132   356  940   108    89  200   163   100  220   208
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  280 1492   132   356  940   108    89  200   163   100  220   208
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  280 1492   132   356  940   108    89  200   163   100  220   208
OvlAdjVol:                                                                  30
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.76  0.24  2.00 2.69  0.31  1.00 1.10  0.90  1.00 1.00  1.00
Final Sat.:  3200 4610   390  3200 4505   495  1600 1863  1437  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.32  0.34  0.11 0.21  0.22  0.06 0.11  0.11  0.06 0.13  0.13
OvlAdjV/S:                                                                0.02
Crit Moves:             ****  ****            ****                 ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:58                Page 94-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #92 Tustin Ave and Santa Clara Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.709
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    2  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     191  923   142   199 1574   109    68  213   125   133  166   157
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  191  923   142   199 1574   109    68  213   125   133  166   157
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   191  923   142   199 1574   109    68  213   125   133  166   157
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  191  923   142   199 1574   109    68  213   125   133  166   157
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  191  923   142   199 1574   109    68  213   125   133  166   157
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 2.60  0.40  2.00 2.81  0.19  1.00 1.26  0.74  1.00 1.03  0.97
Final Sat.:  1600 4360   640  3200 4689   311  1600 2117  1183  1600 1745  1555
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.21  0.22  0.06 0.34  0.35  0.04 0.10  0.11  0.08 0.10  0.10
Crit Moves:  ****                      ****             ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:16:59                Page 95-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #93 Tustin Ave and 17th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.797
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        51               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  1  0    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     253 1083   557   377  404    40   493  968   131   243  798   444
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  253 1083   557   377  404    40   493  968   131   243  798   444
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   253 1083   557   377  404    40   493  968   131   243  798   444
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  253 1083   557   377  404    40   493  968   131   243  798   444
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  253 1083   557   377  404    40   493  968   131   243  798   444
OvlAdjVol:               436                                                256
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.00  1.00  2.00 2.73  0.27  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 3400  1600  3200 4568   432  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.32  0.35  0.12 0.09  0.09  0.15 0.19  0.08  0.08 0.16  0.28
OvlAdjV/S:               0.27                                               0.16
Crit Moves:       ****        ****             ****                  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:00                Page 96-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #94 Tustin Ave and 4th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.708
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    2  0  2  0  1    1  0  2  1  1    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       28  299    97   459  339   124   208  743    38   118  798   491
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    28  299    97   459  339   124   208  743    38   118  798   491
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     28  299    97   459  339   124   208  743    38   118  798   491
Reduct Vol:      0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    28  299    97   459  339   124   208  743    38   118  798   491
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    28  299    97   459  339   124   208  743    38   118  798   491
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.27  0.73  2.00 2.00  1.00  1.00 3.00  1.00  1.00 2.00  1.00
Final Sat.:  1600 3824  1176  3200 3400  1600  1600 5100  1600  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.08  0.08  0.14 0.10  0.08  0.13 0.15  0.02  0.07 0.23  0.31
Crit Moves:       ****        ****             ****                       ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:01                Page 97-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #95 SR-55 SB Ramps / Auto Mall Dr and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.702
Loss Time (sec):       5               Average Delay (sec/veh):        25.5
Optimal Cycle:        39               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  2    1  0  1  0  1    1  0  3  0  1    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     401   32   423   110   50    37    47 1677   472   468 1220   146
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  401   32   423   110   50    37    47 1677   472   468 1220   146
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Volume:   401   32   423   110   50    37    47 1677     0   468 1220   146
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  401   32   423   110   50    37    47 1677     0   468 1220   146
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
FinalVolume:  401   32   423   110   50    37    47 1677     0   468 1220   146
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.96 0.96  0.75  0.95 1.00  0.85  0.95 0.91  1.00  0.92 0.90  0.90
Lanes:       1.85 0.15  2.00  1.00 1.00  1.00  1.00 3.00  1.00  2.00 2.68  0.32
Final Sat.:  3364  268  2842  1805 1900  1615  1805 5187  1900  3502 4558   546
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.12  0.15  0.06 0.03  0.02  0.03 0.32  0.00  0.13 0.27  0.27
Crit Moves:             ****  ****                 ****        ****
Green/Cycle: 0.21 0.21  0.21  0.09 0.09  0.09  0.06 0.46  0.00  0.19 0.59  0.59
Volume/Cap:  0.56 0.56  0.70  0.70 0.30  0.26  0.45 0.70  0.00  0.70 0.45  0.45
Delay/Veh:   36.2 36.2  40.2  57.7 43.9  43.7  48.7 22.4   0.0  41.2 11.4  11.4
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  36.2 36.2  40.2  57.7 43.9  43.7  48.7 22.4   0.0  41.2 11.4  11.4
LOS by Move:    D    D     D     E    D     D     D    C     A     D    B     B
HCM2k85thQ:    10   10    13     7    3     2     3   23     0    13   13    13
```

```
********************************************************************************
Note: Queue reported is the number of cars per lane.
********************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:02                Page 98-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #96 SR-55 NB Ramps / Del Amo Ave and Newport Avenue
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.895
Loss Time (sec):       5                Average Delay (sec/veh):        39.1
Optimal Cycle:        87                Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    1  0  3  0  1    2  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     879  262    51    17  209   803   156   54    32    23  348    16
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  879  262    51    17  209   803   156   54    32    23  348    16
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   879  262    51    17  209   803   156   54    32    23  348    16
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  879  262    51    17  209   803   156   54    32    23  348    16
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  879  262    51    17  209   803   156   54    32    23  348    16
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 0.89  0.89  0.95 0.91  0.85  0.92 0.90  0.90  0.95 0.94  0.94
Lanes:       2.00 2.51  0.49  1.00 3.00  1.00  2.00 1.26  0.74  1.00 1.91  0.09
Final Sat.:  3502 4238   825  1805 5187  1615  3502 2140  1268  1805 3427   158
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.25 0.06  0.06  0.01 0.04  0.50  0.04 0.03  0.03  0.01 0.10  0.10
Crit Moves:  ****                         ****  ****                   ****
Green/Cycle: 0.28 0.68  0.68  0.10 0.51  0.56  0.05 0.11  0.11  0.05 0.11  0.11
Volume/Cap:  0.89 0.09  0.09  0.09 0.08  0.89  0.89 0.23  0.23  0.23 0.89  0.89
Delay/Veh:   45.1  5.4   5.4  40.7 12.7  31.0  86.9 41.1  41.1  46.5 65.2  65.2
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  45.1  5.4   5.4  40.7 12.7  31.0  86.9 41.1  41.1  46.5 65.2  65.2
LOS by Move:    D    A     A     D    B     C     F    D     D     D    E     E
HCM2k85thQ:    25    2     2     1    2    36     8    2     2     1   14    14
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:02                Page 99-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #97 Red Hill Ave and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.853
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        66               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Ovl            Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     204 1469   233   105  209   169   410 1051   128    90 1161   567
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  204 1469   233   105  209   169   410 1051   128    90 1161   567
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   204 1469   233   105  209   169   410 1051   128    90 1161   567
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  204 1469   233   105  209   169   410 1051   128    90 1161   567
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  204 1469   233   105  209   169   410 1051   128    90 1161   567
OvlAdjVol:                                  0                26
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.29  0.15  0.03 0.04  0.11  0.13 0.21  0.08  0.03 0.23  0.35
OvlAdjV/S:                                0.00             0.02
Crit Moves:       ****        ****             ****                        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:03              Page 100-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #98 Red Hill Ave and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.875
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        74               Level Of Service:                 D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  1  0    2  0  2  1  0    1  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     374 1281   147    79  304   385   246  668   104    76 1598   210
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  374 1281   147    79  304   385   246  668   104    76 1598   210
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   374 1281   147    79  304   385   246  668   104    76 1598   210
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  374 1281   147    79  304   385   246  668   104    76 1598   210
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  374 1281   147    79  304   385   246  668   104    76 1598   210
OvlAdjVol:                                                                 171
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.59  0.41  2.00 2.00  1.00  1.00 2.60  0.40  2.00 3.00  1.00
Final Sat.:  3200 6041   659  3200 3400  1600  1600 4353   647  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.21  0.22  0.02 0.09  0.24  0.15 0.15  0.16  0.02 0.31  0.13
OvlAdjV/S:                                                                 0.11
Crit Moves:  ****                      ****  ****                 ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:03              Page 101-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #99 Red Hill Ave and Dyer Rd / barranca Pkwy
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.537
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        25               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  4  0  1    2  0  4  0  1    2  0  3  1  0    2  0  4  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     338 1270   327   241  408   192   172  637    84   110  839   245
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  338 1270   327   241  408   192   172  637    84   110  839   245
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   338 1270   327   241  408   192   172  637    84   110  839   245
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  338 1270   327   241  408   192   172  637    84   110  839   245
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  338 1270   327   241  408   192   172  637    84   110  839   245
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 4.00  1.00  2.00 4.00  1.00  2.00 3.53  0.47  2.00 4.00  1.00
Final Sat.:  3200 6800  1600  3200 6800  1600  3200 5954   746  3200 6800  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.19  0.20  0.08 0.06  0.12  0.05 0.11  0.11  0.03 0.12  0.15
Crit Moves:             ****  ****             ****                     ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:04                Page 102-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #100 Red Hill Ave and Alton Pkwy
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.184
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                 F
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  2  0  1    2  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      26 1458   211   122  519     4   434 1065   545  1299  222   801
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   26 1458   211   122  519     4   434 1065   545  1299  222   801
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    26 1458   211   122  519     4   434 1065   545  1299  222   801
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   26 1458   211   122  519     4   434 1065   545  1299  222   801
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   26 1458   211   122  519     4   434 1065   545  1299  222   801
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 2.00  1.00  2.00 1.00  1.00
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 3400  1600  3200 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.29  0.13  0.08 0.10  0.00  0.27 0.31  0.34  0.41 0.13  0.50
Crit Moves:       ****        ****             ****                      ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:04                Page 103-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #101 Red Hill Ave and MacArthur Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.702
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        37               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ignore           Include          Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     175 1133    14   315  654  1148   499  230    35    39  810   568
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  175 1133    14   315  654  1148   499  230    35    39  810   568
User Adj:    1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
PHF Volume:   175 1133    14   315  654     0   499  230    35    39  810     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  175 1133    14   315  654     0   499  230    35    39  810     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
FinalVolume:  175 1133    14   315  654     0   499  230    35    39  810     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.96  0.04  2.00 3.00  1.00  2.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200 4941    59  3200 5100  1600  3200 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.23  0.24  0.10 0.13  0.00  0.16 0.05  0.02  0.02 0.16  0.00
Crit Moves:             ****  ****             ****                   ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:05                Page 104-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #102 Red Hill Ave and Main St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.813
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        55               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     436  941   254    88  640   348   200  714   193   277 1575    88
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  436  941   254    88  640   348   200  714   193   277 1575    88
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   436  941   254    88  640   348   200  714   193   277 1575    88
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  436  941   254    88  640   348   200  714   193   277 1575    88
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  436  941   254    88  640   348   200  714   193   277 1575    88
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       2.00 2.00  1.00  2.00 2.00  1.00  2.00 2.36  0.64  2.00 2.84  0.16
Final Sat.:  3200 3400  1600  3200 3400  1600  3200 3979  1021  3200 4746   254
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.28  0.16  0.03 0.19  0.22  0.06 0.18  0.19  0.09 0.33  0.35
Crit Moves:  ****                     ****  ****                     ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:05                Page 105-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #103 I-5 SB Ramps and Santa Ana Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.487
Loss Time (sec):       5               Average Delay (sec/veh):        18.4
Optimal Cycle:        24               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Ovl             Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  1    2  0  3  0  0    0  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   304    0    67   765  865     0     0  621   170
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   304    0    67   765  865     0     0  621   170
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   304    0    67   765  865     0     0  621   170
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   304    0    67   765  865     0     0  621   170
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   304    0    67   765  865     0     0  621   170
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.92 1.00  0.85  0.92 0.91  1.00  1.00 0.88  0.88
Lanes:       0.00 0.00  0.00  2.00 0.00  1.00  2.00 3.00  0.00  0.00 2.36  0.64
Final Sat.:     0    0     0  3502    0  1615  3502 5187     0     0 3942  1079
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.09 0.00  0.04  0.22 0.17  0.00  0.00 0.16  0.16
Crit Moves:                   ****             ****                   ****
Green/Cycle: 0.00 0.00  0.00  0.18 0.00  0.63  0.45 0.77  0.00  0.00 0.32  0.32
Volume/Cap:  0.00 0.00  0.00  0.49 0.00  0.07  0.49 0.22  0.00  0.00 0.49  0.49
Delay/Veh:    0.0  0.0   0.0  37.6  0.0   7.3  19.7  3.2   0.0   0.0 27.4  27.4
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
```

```
AdjDel/Veh:   0.0  0.0   0.0  37.6  0.0   7.3  19.7  3.2   0.0   0.0 27.4  27.4
LOS by Move:    A    A     A     D    A     A     B    A     A     A    C     C
HCM2k85thQ:     0    0     0     8    0     1    13    4     0     0   11    11
********************************************************************************
Note: Queue reported is the number of cars per lane.
********************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:06                Page 106-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #104 Tustin Ranch Rd and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.645
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        32               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  1    2  0  3  0  0    0  0  3  0  1
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:       0    0     0   553    0    38    65 2154     0     0  856   369
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   553    0    38    65 2154     0     0  856   369
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   553    0    38    65 2154     0     0  856   369
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   553    0    38    65 2154     0     0  856   369
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   553    0    38    65 2154     0     0  856   369
OvlAdjVol:                                                                  92
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 0.00  0.00  2.00 0.00  1.00  2.00 3.00  0.00  0.00 3.00  1.00
Final Sat.:     0    0     0  3200    0  1600  3200 5100     0     0 5100  1600
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.17 0.00  0.02  0.02 0.42  0.00  0.00 0.17  0.23
OvlAdjV/S:                                                                  0.06
Crit Moves:                    ****                 ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:07                Page 107-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #105 Von Karman Ave and Barranca Pkwy
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):          1.228
Loss Time (sec):       5               Average Delay (sec/veh):       xxxxxx
Optimal Cycle:       180               Level Of Service:                    F
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  1  1  0    2  0  2  0  2    2  0  3  0  1    2  0  4  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     346 1992   434    80  407   280   765 1397   195   232  734   250
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  346 1992   434    80  407   280   765 1397   195   232  734   250
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   346 1992   434    80  407   280   765 1397   195   232  734   250
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  346 1992   434    80  407   280   765 1397   195   232  734   250
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  346 1992   434    80  407   280   765 1397   195   232  734   250
OvlAdjVol:                              0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 1.64  0.36  2.00 2.00  2.00  2.00 3.00  1.00  2.00 4.00  1.00
Final Sat.:  3200 2728   572  3200 3400  3200  3200 5100  1600  3200 6800  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.73  0.76  0.03 0.12  0.09  0.24 0.27  0.12  0.07 0.11  0.16
OvlAdjV/S:                              0.00
Crit Moves:             ****  ****            ****                          ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:07              Page 108-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #106 Red Hill Avenue and El Camino Real
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.779
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        48               Level Of Service:                  C
*******************************************************************************
Street Name:         Red Hill Avenue                   El Camino Real
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    1  0  2  1  0    1  0  1  0  1    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     421 1334   246    20  728    96    70  153   201   332  548    63
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  421 1334   246    20  728    96    70  153   201   332  548    63
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   421 1334   246    20  728    96    70  153   201   332  548    63
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  421 1334   246    20  728    96    70  153   201   332  548    63
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  421 1334   246    20  728    96    70  153   201   332  548    63
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       2.00 3.00  1.00  1.00 2.65  0.35  1.00 1.00  1.00  1.00 0.90  0.10
Final Sat.:  3200 5100  1600  1600 4441   559  1600 1700  1600  1600 1435   165
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.26  0.15  0.01 0.16  0.17  0.04 0.09  0.13  0.21 0.38  0.38
Crit Moves:  ****                     ****  ****                     ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:08                Page 109-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #107 Red Hill Avenue and I-5 NB Ramps
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.634
Loss Time (sec):       5               Average Delay (sec/veh):        23.7
Optimal Cycle:        33               Level Of Service:                  C
*******************************************************************************
Street Name:         Red Hill Avenue                    I-5 NB Ramps
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  0    0  0  3  0  1    0  0  0  0  0    1  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     277 1585     0     0  921   186     0    0     0   264   99   428
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  277 1585     0     0  921   186     0    0     0   264   99   428
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   277 1585     0     0  921   186     0    0     0   264   99   428
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  277 1585     0     0  921   186     0    0     0   264   99   428
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  277 1585     0     0  921   186     0    0     0   264   99   428
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.85  1.00 1.00  1.00  0.83 0.83  0.83
Lanes:       1.00 3.00  0.00  0.00 3.00  1.00  0.00 0.00  0.00  1.45 0.55  1.00
Final Sat.:  1805 5187     0     0 5187  1615     0    0     0  2292  860  1576
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.31  0.00  0.00 0.18  0.12  0.00 0.00  0.00  0.12 0.12  0.27
Crit Moves:  ****                 ****                                     ****
Green/Cycle: 0.24 0.52  0.00  0.00 0.28  0.28  0.00 0.00  0.00  0.43 0.43  0.43
Volume/Cap:  0.63 0.59  0.00  0.00 0.63  0.41  0.00 0.00  0.00  0.27 0.27  0.63
Delay/Veh:   37.0 16.8   0.0   0.0 32.5  29.9   0.0  0.0   0.0  18.5 18.5  23.5
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
```

AdjDel/Veh:	37.0	16.8	0.0	0.0	32.5	29.9	0.0	0.0	0.0	18.5	18.5	23.5
LOS by Move:	D	B	A	A	C	C	A	A	A	B	B	C
HCM2k85thQ:	13	19	0	0	15	8	0	0	0	6	6	17

****

Note: Queue reported is the number of cars per lane.

****

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:09              Page 110-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #108 Red Hill Avenue and I-5 SB Ramps
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.695
Loss Time (sec):       5               Average Delay (sec/veh):        22.2
Optimal Cycle:        38               Level Of Service:                  C
*******************************************************************************
Street Name:         Red Hill Avenue                     I-5 SB Ramps
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  1    1  0  3  0  0    0  1  0  0  1    0  0  0  0  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:       0 1551   492   334  802     0   296    3   265     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1551   492   334  802     0   296    3   265     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1551   492   334  802     0   296    3   265     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1551   492   334  802     0   296    3   265     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1551   492   334  802     0   296    3   265     0    0     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  0.85  0.95 0.91  1.00  0.92 0.92  0.85  1.00 1.00  1.00
Lanes:       0.00 4.00  1.00  1.00 3.00  0.00  0.99 0.01  1.00  0.00 0.00  0.00
Final Sat.:     0 6916  1615  1805 5187     0  1732   18  1615     0    0     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.22  0.30  0.19 0.15  0.00  0.17 0.17  0.16  0.00 0.00  0.00
Crit Moves:             ****  ****                 ****
Green/Cycle: 0.00 0.44  0.44  0.27 0.70  0.00  0.25 0.25  0.25  0.00 0.00  0.00
Volume/Cap:  0.00 0.51  0.70  0.70 0.22  0.00  0.70 0.70  0.67  0.00 0.00  0.00
Delay/Veh:    0.0 20.5  25.7  37.5  5.2   0.0  39.2 39.2  38.4   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 20.5  25.7  37.5  5.2   0.0  39.2 39.2  38.4   0.0  0.0   0.0
LOS by Move:    A    C     C     D    A     A     D    D     D     A    A     A
HCM2k85thQ:     0   15    20    16    5     0    15   15    13     0    0     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:10              Page 111-1
-------------------------------------------------------------------------------
                        Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #109 Red Hill Avenue and Nisson Road
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.693
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36               Level Of Service:                  B
*******************************************************************************
Street Name:         Red Hill Avenue                    Nisson Road
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  1  0    1  0  2  1  0    1  0  0  1  0    1  0  0  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:      31 1614    33   146  750    75   247   90    40    48   83   141
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   31 1614    33   146  750    75   247   90    40    48   83   141
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    31 1614    33   146  750    75   247   90    40    48   83   141
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   31 1614    33   146  750    75   247   90    40    48   83   141
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   31 1614    33   146  750    75   247   90    40    48   83   141
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 3.92  0.08  1.00 2.73  0.27  1.00 0.69  0.31  1.00 0.37  0.63
Final Sat.:  1600 6572   128  1600 4564   436  1600 1108   492  1600  593  1007
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.25  0.26  0.09 0.16  0.17  0.15 0.08  0.08  0.03 0.14  0.14
Crit Moves:             ****  ****             ****                   ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:11                Page 112-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #110 Red Hill Avenue and Walnut Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.739
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        42               Level Of Service:                  C
*******************************************************************************
Street Name:         Red Hill Avenue                   Walnut Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    2  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     273 1325    95   128  396   165    88  211    87   196  654   171
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  273 1325    95   128  396   165    88  211    87   196  654   171
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   273 1325    95   128  396   165    88  211    87   196  654   171
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  273 1325    95   128  396   165    88  211    87   196  654   171
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  273 1325    95   128  396   165    88  211    87   196  654   171
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 2.80  0.20  1.00 2.12  0.88  1.00 1.42  0.58  2.00 1.59  0.41
Final Sat.:  1600 4679   321  1600 3588  1412  1600 2366   934  3200 2637   663
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.17 0.28  0.30  0.08 0.11  0.12  0.06 0.09  0.09  0.06 0.25  0.26
Crit Moves:             ****  ****             ****                   ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:12                Page 113-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #111 Red Hill Avenue and Valencia Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.738
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        42               Level Of Service:                  C
*******************************************************************************
Street Name:         Red Hill Avenue                 Valencia Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  1  0    1  0  2  1  0    1  0  1  0  1    2  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     241 1791   295   109  438    49   100  270   119   291  422   279
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  241 1791   295   109  438    49   100  270   119   291  422   279
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   241 1791   295   109  438    49   100  270   119   291  422   279
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  241 1791   295   109  438    49   100  270   119   291  422   279
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  241 1791   295   109  438    49   100  270   119   291  422   279
OvlAdjVol:               213                                               170
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 3.43  0.57  1.00 2.70  0.30  1.00 1.00  1.00  2.00 1.00  1.00
Final Sat.:  1600 5795   905  1600 4517   483  1600 1700  1600  3200 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.31  0.33  0.07 0.10  0.10  0.06 0.16  0.07  0.09 0.25  0.17
OvlAdjV/S:               0.23                                              0.11
Crit Moves:       ****         ****              ****                  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:12              Page 114-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #112 Tustin Ranch Road and Warner Avenue North
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.885
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        79               Level Of Service:                  D
*******************************************************************************
Street Name:        Tustin Ranch Road               Warner Avenue North
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:            Ovl            Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  3  0  1    2  0  3  0  0    0  0  0  0  0    3  0  0  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1916  1128   415  610     0     0    0     0   682    0   616
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1916  1128   415  610     0     0    0     0   682    0   616
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1916  1128   415  610     0     0    0     0   682    0   616
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1916  1128   415  610     0     0    0     0   682    0   616
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1916  1128   415  610     0     0    0     0   682    0   616
OvlAdjVol:               901                                              201
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 3.00  1.00  2.00 3.00  0.00  0.00 0.00  0.00  3.00 0.00  2.00
Final Sat.:     0 5100  1600  3200 5100     0     0    0     0  4800    0  3200
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.38  0.71  0.13 0.12  0.00  0.00 0.00  0.00  0.14 0.00  0.19
OvlAdjV/S:               0.56                                             0.06
Crit Moves:              ****  ****                                ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:13              Page 115-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #113 Tustin Ranch Road and Walnut Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.715
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Street Name:        Tustin Ranch Road                 Walnut Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Ovl              Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  1  1  0    2  0  2  0  1
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     842 3666   385   550 1460   947   329  402   230   297 1703  1349
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  842 3666   385   550 1460   947   329  402   230   297 1703  1349
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   842 3666   385   550 1460   947   329  402   230   297 1703  1349
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  842 3666   385   550 1460   947   329  402   230   297 1703  1349
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  842 3666   385   550 1460   947   329  402   230   297 1703  1349
OvlAdjVol:               237              783                              1074
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 1.27  0.73  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 2135  1165  3200 3400  1600
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.26 0.72  0.24  0.17 0.29  0.59  0.10 0.19  0.20  0.09 0.50  0.84
OvlAdjV/S:               0.15             0.49                              0.67
Crit Moves:       ****        ****             ****                        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:13              Page 116-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #114 SR-55 SB Ramps and Irvine Boulevard
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.915
Loss Time (sec):       5               Average Delay (sec/veh):        25.6
Optimal Cycle:       100               Level Of Service:                 C
*******************************************************************************
Street Name:          SR-55 SB Ramps                  Irvine Boulevard
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected         Permitted       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    1  0  1! 0  1    0  0  2  1  0    1  0  3  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   467    0   279     0  987   665   461 1324     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   467    0   279     0  987   665   461 1324     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   467    0   279     0  987   665   461 1324     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   467    0   279     0  987   665   461 1324     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   467    0   279     0  987   665   461 1324     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.74 1.00  0.73  1.00 0.86  0.86  0.95 0.91  1.00
Lanes:       0.00 0.00  0.00  1.62 0.00  1.38  0.00 2.00  1.00  1.00 3.00  0.00
Final Sat.:     0    0     0  2278    0  1915     0 3251  1625  1805 5187     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.20 0.00  0.15  0.00 0.30  0.41  0.26 0.26  0.00
Crit Moves:                    ****                          ****  ****
Green/Cycle: 0.00 0.00  0.00  0.22 0.00  0.45  0.00 0.45  0.45  0.28 0.73  0.00
Volume/Cap:  0.00 0.00  0.00  0.92 0.00  0.33  0.00 0.68  0.92  0.92 0.35  0.00
Delay/Veh:    0.0  0.0   0.0  52.8  0.0  17.9   0.0 22.7  33.6  56.2  5.1   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0  52.8  0.0  17.9   0.0 22.7  33.6  56.2  5.1   0.0
LOS by Move:    A    A     A     D    A     B     A    C     C     E    A     A
```

```
HCM2k85thQ:     0    0     0    19    0     6     0   21    36    26    9     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 NP PM Peak Hour       Thu Oct 22, 2020 14:17:14              Page 117-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #115 SR-55 NB Ramps and Irvine Boulevard
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.932
Loss Time (sec):       5               Average Delay (sec/veh):        22.9
Optimal Cycle:       113               Level Of Service:                  C
*******************************************************************************
Street Name:          SR-55 NB Ramps                  Irvine Boulevard
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:         Permitted       Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1! 0  1    0  0  0  0  0    1  0  3  0  0    0  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     367   18   333     0    0     0   254 1163     0     0 1336   845
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  367   18   333     0    0     0   254 1163     0     0 1336   845
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   367   18   333     0    0     0   254 1163     0     0 1336   845
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  367   18   333     0    0     0   254 1163     0     0 1336   845
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  367   18   333     0    0     0   254 1163     0     0 1336   845
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.86 0.86  0.86  1.00 1.00  1.00  0.95 0.91  1.00  1.00 0.86  0.86
Lanes:       1.50 0.05  1.45  0.00 0.00  0.00  1.00 3.00  0.00  0.00 2.00  1.00
Final Sat.:  2444   80  2369     0    0     0  1805 5187     0     0 3257  1629
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.23  0.14  0.00 0.00  0.00  0.14 0.22  0.00  0.00 0.41  0.52
Crit Moves:       ****                          ****                     ****
Green/Cycle: 0.24 0.24  0.24  0.00 0.00  0.00  0.15 0.71  0.00  0.00 0.56  0.56
Volume/Cap:  0.62 0.93  0.58  0.00 0.00  0.00  0.93 0.32  0.00  0.00 0.74  0.93
Delay/Veh:   34.8 55.0  34.1   0.0  0.0   0.0  78.6  5.6   0.0   0.0 17.6  27.9
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  34.8 55.0  34.1   0.0  0.0   0.0  78.6  5.6   0.0   0.0 17.6  27.9
LOS by Move:    C    D     C     A    A     A     E    A     A     A    B     C
HCM2k85thQ:    12   23    11     0    0     0    17    8     0     0   26    44
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

APPENDIX D.5

ANALYSIS WORKSHEETS –
2045 WP (AM Peak Hour)

Santa Ana Circulation Element

Scenario Report

Scenario:	2045 WP AM Peak Hour
Command:	Default Command
Volume:	2045 AM
Geometry:	SACE
Impact Fee:	Default Impact Fee
Trip Generation:	Default Trip Generation
Trip Distribution:	Default Trip Distribution
Paths:	Default Path
Routes:	Default Route
Configuration:	Default Configuration

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

2045 WP AM Peak Hour Thu Oct 22, 2020 14:28:14 Page 2-1

Santa Ana Circulation Element

Impact Analysis Report
Level Of Service

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in V/C
# 1 Euclid St and 1st St	C	xxxxx	0.789	C	xxxxx	0.789	+ 0.000 V/C
# 2 Euclid St and McFadden Ave	E	xxxxx	0.906	E	xxxxx	0.906	+ 0.000 V/C
# 3 Euclid St and Edinger Ave	F	xxxxx	1.008	F	xxxxx	1.008	+ 0.000 V/C
# 4 Newhope St and Hazard Ave	A	xxxxx	0.600	A	xxxxx	0.600	+ 0.000 V/C
# 5 Newhope St and McFadden Ave	C	xxxxx	0.728	C	xxxxx	0.728	+ 0.000 V/C
# 6 Harbor Blvd and SR-22 WB Off-R	C	28.5	0.715	C	28.5	0.715	+ 0.000 D/V
# 7 Trask Avenue and SR-22 EB On-R	B	11.0	0.389	B	11.0	0.389	+ 0.000 D/V
# 8 Harbor Blvd and Westminster Av	E	xxxxx	0.936	E	xxxxx	0.936	+ 0.000 V/C
# 9 Harbor Blvd and 1st St	C	xxxxx	0.749	C	xxxxx	0.749	+ 0.000 V/C
# 10 Harbor Blvd and McFadden Ave	C	xxxxx	0.729	C	xxxxx	0.729	+ 0.000 V/C
# 11 Harbor Blvd and Edinger Ave	D	xxxxx	0.857	D	xxxxx	0.857	+ 0.000 V/C
# 12 Harbor Blvd and Warner Ave	C	xxxxx	0.800	C	xxxxx	0.800	+ 0.000 V/C
# 13 Harbor Blvd and Segerstrom Ave	F	xxxxx	1.007	F	xxxxx	1.007	+ 0.000 V/C
# 14 MacArthur Blvd and Hyland Ave	B	xxxxx	0.615	B	xxxxx	0.615	+ 0.000 V/C
# 15 MacArthur Blvd and Harbor Blvd	C	xxxxx	0.747	C	xxxxx	0.747	+ 0.000 V/C
# 16 Harbor Blvd and Sunflower Ave	C	xxxxx	0.705	C	xxxxx	0.705	+ 0.000 V/C
# 17 Harbor Blvd and I-405 NB Off-R	B	17.9	0.573	B	17.9	0.573	+ 0.000 D/V
# 18 Harbor Blvd and I-405 SB Off-R	B	15.0	0.618	B	15.0	0.618	+ 0.000 D/V
# 19 Fairview St and Civic Center D	B	xxxxx	0.676	B	xxxxx	0.676	+ 0.000 V/C
# 20 Fairview St and 1st St	D	xxxxx	0.887	D	xxxxx	0.887	+ 0.000 V/C
# 21 Fairview St and McFadden Ave	D	xxxxx	0.800	D	xxxxx	0.800	+ 0.000 V/C
# 22 Fairview St and Edinger Ave	D	xxxxx	0.882	D	xxxxx	0.882	+ 0.000 V/C
# 23 Fairview St and Warner Ave	D	xxxxx	0.847	D	xxxxx	0.847	+ 0.000 V/C
# 24 Fairview St and MacArthur Blvd	B	xxxxx	0.690	B	xxxxx	0.690	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
# 25 Fairview Rd and Sunflower Ave	B	xxxxx	0.687	B	xxxxx	0.687	+ 0.000 V/C
# 26 Greenville St and Edinger Ave	C	xxxxx	0.742	C	xxxxx	0.742	+ 0.000 V/C
# 27 Greenville St and Segerstrom A	D	xxxxx	0.878	D	xxxxx	0.878	+ 0.000 V/C
# 28 Raitt St and McFadden Ave	C	xxxxx	0.704	C	xxxxx	0.704	+ 0.000 V/C
# 29 Raitt St and Edinger Ave	E	xxxxx	0.926	E	xxxxx	0.926	+ 0.000 V/C
# 30 Bear St and MacArthur Blvd	C	xxxxx	0.756	C	xxxxx	0.756	+ 0.000 V/C
# 31 Bristol St and 17th St	D	xxxxx	0.853	D	xxxxx	0.853	+ 0.000 V/C
# 32 Bristol St and Civic Center Dr	E	xxxxx	0.931	E	xxxxx	0.931	+ 0.000 V/C
# 33 Bristol St and Santa Ana Blvd	C	xxxxx	0.721	C	xxxxx	0.721	+ 0.000 V/C
# 34 Bristol St and 1st St	E	xxxxx	0.902	E	xxxxx	0.902	+ 0.000 V/C
# 35 Bristol St and McFadden Ave	E	xxxxx	0.947	E	xxxxx	0.947	+ 0.000 V/C
# 36 Bristol St and Warner Ave	E	xxxxx	0.956	E	xxxxx	0.956	+ 0.000 V/C
# 37 Bristol St and Segerstrom Ave	D	xxxxx	0.854	D	xxxxx	0.854	+ 0.000 V/C
# 38 Bristol St and Alton Ave	A	xxxxx	0.553	A	xxxxx	0.553	+ 0.000 V/C
# 39 Bristol St and MacArthur Blvd	C	xxxxx	0.759	C	xxxxx	0.759	+ 0.000 V/C
# 40 Bristol St and Sunflower Ave	B	xxxxx	0.682	B	xxxxx	0.682	+ 0.000 V/C
# 41 Bristol St and I-405 NB Ramps	C	20.9	0.568	C	20.9	0.568	+ 0.000 D/V
# 42 Bristol St and I-405 SB Ramps	C	23.6	0.697	C	23.6	0.697	+ 0.000 D/V
# 43 Flower St and Santa Ana Blvd	A	xxxxx	0.586	A	xxxxx	0.586	+ 0.000 V/C
# 44 Flower St and 1st St	E	xxxxx	0.926	E	xxxxx	0.926	+ 0.000 V/C
# 45 Flower St and McFadden Ave	D	xxxxx	0.807	D	xxxxx	0.807	+ 0.000 V/C
# 46 Flower St and Segerstrom Ave	D	xxxxx	0.818	D	xxxxx	0.818	+ 0.000 V/C
# 47 Flower St and MacArthur Blvd	C	xxxxx	0.710	C	xxxxx	0.710	+ 0.000 V/C
# 48 Main St and La Veta Ave	A	xxxxx	0.536	A	xxxxx	0.536	+ 0.000 V/C
# 49 Main St and Mainplace Dr / Mem	A	xxxxx	0.456	A	xxxxx	0.456	+ 0.000 V/C
# 50 Main St and 17th St	D	xxxxx	0.845	D	xxxxx	0.845	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
# 51 Main St and Civic Center Dr	D	xxxxx	0.848	D	xxxxx	0.848	+ 0.000 V/C
# 52 Main St and Santa Ana Blvd	C	xxxxx	0.791	C	xxxxx	0.791	+ 0.000 V/C
# 53 Main St and 4th St	A	xxxxx	0.441	A	xxxxx	0.441	+ 0.000 V/C
# 54 Main St and 1st St	C	xxxxx	0.754	C	xxxxx	0.754	+ 0.000 V/C
# 55 Main St and McFadden Ave	E	xxxxx	0.916	E	xxxxx	0.916	+ 0.000 V/C
# 56 Main St and Edinger Ave	D	xxxxx	0.876	D	xxxxx	0.876	+ 0.000 V/C
# 57 Main St and MacArthur Blvd	C	xxxxx	0.721	C	xxxxx	0.721	+ 0.000 V/C
# 58 Penn Wy and 17th St	B	12.1	0.648	B	12.1	0.648	+ 0.000 D/V
# 59 I-5 NB Off Ramps/17th Street	C	31.4	0.792	C	31.4	0.792	+ 0.000 D/V
# 60 Penn Wy and I-5 SB Ramps	B	19.5	0.462	B	19.5	0.462	+ 0.000 D/V
# 61 Santiago St and Civic Center D	F	62.6	1.147	F	62.6	1.147	+ 0.000 V/C
# 62 Santiago St and Santa Ana Blvd	F	xxxxx	1.444	F	xxxxx	1.444	+ 0.000 V/C
# 63 Standard Ave and 4th St	F	xxxxx	1.340	F	xxxxx	1.340	+ 0.000 V/C
# 64 Standard Ave and 1st St	F	xxxxx	1.515	F	xxxxx	1.515	+ 0.000 V/C
# 65 Standard Ave and Mcfadden Ave	D	xxxxx	0.843	D	xxxxx	0.843	+ 0.000 V/C
# 66 Halladay St and Warner Ave	B	xxxxx	0.692	B	xxxxx	0.692	+ 0.000 V/C
# 67 Halladay St and Dyer Rd	B	xxxxx	0.668	B	xxxxx	0.668	+ 0.000 V/C
# 68 SR-55 SB Ramps and MacArthur B	C	20.2	0.623	C	20.2	0.623	+ 0.000 D/V
# 69 SR-55 NB Ramps and MacArthur B	B	19.5	0.728	B	19.5	0.728	+ 0.000 D/V
# 70 SR-55 SB Ramps and Dyer Rd	C	25.9	0.610	C	25.9	0.610	+ 0.000 D/V
# 71 Glassell St and La Veta Ave	D	xxxxx	0.826	D	xxxxx	0.826	+ 0.000 V/C
# 72 Glassell St and SR-22 WB Ramps	C	30.1	0.841	C	30.1	0.841	+ 0.000 D/V
# 73 Grand Ave / Glassell St and SR	C	29.6	0.842	C	29.6	0.842	+ 0.000 D/V
# 74 Grand Ave and Fairhaven Ave	A	xxxxx	0.569	A	xxxxx	0.569	+ 0.000 V/C
# 75 Grand Ave and Santa Clara Ave	C	xxxxx	0.798	C	xxxxx	0.798	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Del/ Veh	V/ C	Future LOS	Del/ Veh	V/ C	Change in
# 76 Grand Ave and 17th St	D	xxxxx	0.856	D	xxxxx	0.856	+ 0.000 V/C
# 77 Grand Ave and I-5 NB Ramps	B	15.3	0.845	B	15.3	0.845	+ 0.000 D/V
# 78 Grand Ave and Santa Ana Blvd	C	26.3	0.881	C	26.3	0.881	+ 0.000 D/V
# 79 Grand Ave and 1st St	D	xxxxx	0.827	D	xxxxx	0.827	+ 0.000 V/C
# 80 Grand Ave and Chestnut Ave	E	xxxxx	0.935	E	xxxxx	0.935	+ 0.000 V/C
# 81 Grand Ave and McFadden Ave	F	xxxxx	1.011	F	xxxxx	1.011	+ 0.000 V/C
# 82 Grand Ave and Edinger Ave	D	xxxxx	0.897	D	xxxxx	0.897	+ 0.000 V/C
# 83 Grand Ave and Warner Ave	B	xxxxx	0.664	B	xxxxx	0.664	+ 0.000 V/C
# 84 SR-55 NB Ramps and Dyer Rd	B	17.3	0.565	B	17.3	0.565	+ 0.000 D/V
# 85 Cambridge St and La Veta Ave	C	23.4	0.900	C	23.4	0.900	+ 0.000 V/C
# 86 Cambridge St and Fairhaven Ave	B	xxxxx	0.624	B	xxxxx	0.624	+ 0.000 V/C
# 87 Mabury St and 1st Street	C	27.4	0.755	C	27.4	0.755	+ 0.000 D/V
# 88 Tustin St and La Veta Ave	A	xxxxx	0.362	A	xxxxx	0.362	+ 0.000 V/C
# 89 Tustin St and SR-22 WB On-Ramp	B	13.2	0.575	B	13.2	0.575	+ 0.000 D/V
# 90 Tustin St and SR-22 EB Off-Ram	C	23.8	0.718	C	23.8	0.718	+ 0.000 D/V
# 91 Tustin Ave and Fairhaven Ave	F	xxxxx	1.242	F	xxxxx	1.242	+ 0.000 V/C
# 92 Tustin Ave and Santa Clara Ave	F	xxxxx	1.097	F	xxxxx	1.097	+ 0.000 V/C
# 93 Tustin Ave and 17th St	D	xxxxx	0.805	D	xxxxx	0.805	+ 0.000 V/C
# 94 Tustin Ave and 4th St	C	xxxxx	0.791	C	xxxxx	0.791	+ 0.000 V/C
# 95 SR-55 SB Ramps / Auto Mall Dr	C	25.1	0.653	C	25.1	0.653	+ 0.000 D/V
# 96 SR-55 NB Ramps / Del Amo Ave a	C	25.6	0.665	C	25.6	0.665	+ 0.000 D/V
# 97 Red Hill Ave and Edinger Ave	B	xxxxx	0.619	B	xxxxx	0.619	+ 0.000 V/C
# 98 Red Hill Ave and Warner Ave	A	xxxxx	0.580	A	xxxxx	0.580	+ 0.000 V/C
# 99 Red Hill Ave and Dyer Rd / bar	A	xxxxx	0.577	A	xxxxx	0.577	+ 0.000 V/C
#100 Red Hill Ave and Alton Pkwy	E	xxxxx	0.930	E	xxxxx	0.930	+ 0.000 V/C
#101 Red Hill Ave and MacArthur Blv	C	xxxxx	0.709	C	xxxxx	0.709	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
#102 Red Hill Ave and Main St	C	xxxxx	0.733	C	xxxxx	0.733	+ 0.000 V/C
#103 I-5 SB Ramps and Santa Ana Blv	B	17.8	0.480	B	17.8	0.480	+ 0.000 D/V
#104 Tustin Ranch Rd and Warner Ave	A	xxxxx	0.530	A	xxxxx	0.530	+ 0.000 V/C
#105 Von Karman Ave and Barranca Pk	E	xxxxx	0.930	E	xxxxx	0.930	+ 0.000 V/C
#106 Red Hill Avenue and El Camino	B	xxxxx	0.640	B	xxxxx	0.640	+ 0.000 V/C
#107 Red Hill Avenue and I-5 NB Ram	C	20.1	0.631	C	20.1	0.631	+ 0.000 D/V
#108 Red Hill Avenue and I-5 SB Ram	C	24.7	0.824	C	24.7	0.824	+ 0.000 D/V
#109 Red Hill Avenue and Nisson Roa	B	xxxxx	0.655	B	xxxxx	0.655	+ 0.000 V/C
#110 Red Hill Avenue and Walnut Ave	B	xxxxx	0.643	B	xxxxx	0.643	+ 0.000 V/C
#111 Red Hill Avenue and Valencia A	B	xxxxx	0.677	B	xxxxx	0.677	+ 0.000 V/C
#112 Tustin Ranch Road and Warner A	A	xxxxx	0.459	A	xxxxx	0.459	+ 0.000 V/C
#113 Tustin Ranch Road and Walnut A	F	xxxxx	1.313	F	xxxxx	1.313	+ 0.000 V/C
#114 SR-55 SB Ramps and Irvine Boul	E	55.4	1.176	E	55.4	1.176	+ 0.000 D/V
#115 SR-55 NB Ramps and Irvine Boul	C	20.3	0.824	C	20.3	0.824	+ 0.000 D/V

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:16                 Page 3-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #1 Euclid St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.789
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        50               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include        WideBypass       WideBypass
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     100  845   145   194 1725    97   194  721   136   190  606   194
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  100  845   145   194 1725    97   194  721   136   190  606   194
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   100  845   145   194 1725    97   194  721   136   190  606   194
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  100  845   145   194 1725    97   194  721   136   190  606   194
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  100  845   145   194 1725    97   194  721   136   190  606   194
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 2.56  0.44  1.00 2.84  0.16  1.00 2.52  0.48  1.00 2.27  0.73
Final Sat.:  1600 4297   703  1600 4744   256  1600 4238   762  1600 3836  1164
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.20  0.21  0.12 0.36  0.38  0.12 0.17  0.18  0.12 0.16  0.17
Crit Moves:  ****                ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:17                 Page 4-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #2 Euclid St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.906
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        90               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     156 1185   141   146 2031   168   227  463   287   106  234    89
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  156 1185   141   146 2031   168   227  463   287   106  234    89
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   156 1185   141   146 2031   168   227  463   287   106  234    89
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  156 1185   141   146 2031   168   227  463   287   106  234    89
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  156 1185   141   146 2031   168   227  463   287   106  234    89
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       1.00 2.68  0.32  1.00 2.77  0.23  1.00 1.23  0.77  1.00 1.45  0.55
Final Sat.:  1600 4490   510  1600 4633   367  1600 2075  1225  1600 2418   882
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.26  0.28  0.09 0.44  0.46  0.14 0.22  0.23  0.07 0.10  0.10
Crit Moves:  ****                ****             ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:17                 Page 5-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #3 Euclid St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.008
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  2  0  1    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     127  801    68   180 2613   240   136  595   364   133  812   148
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  127  801    68   180 2613   240   136  595   364   133  812   148
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   127  801    68   180 2613   240   136  595   364   133  812   148
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  127  801    68   180 2613   240   136  595   364   133  812   148
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  127  801    68   180 2613   240   136  595   364   133  812   148
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.77  0.23  2.00 2.75  0.25  1.00 2.00  1.00  1.00 2.00  1.00
Final Sat.:  3200 4624   376  3200 4596   404  1600 3400  1600  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.17  0.18  0.06 0.57  0.59  0.09 0.17  0.23  0.08 0.24  0.09
Crit Moves:  ****                     ****  ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:18                 Page 6-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #4 Newhope St and Hazard Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.600
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        29               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      94  708   101    86 1262   116    17   44    33    17   57    23
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   94  708   101    86 1262   116    17   44    33    17   57    23
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    94  708   101    86 1262   116    17   44    33    17   57    23
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   94  708   101    86 1262   116    17   44    33    17   57    23
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   94  708   101    86 1262   116    17   44    33    17   57    23
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.03  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 1.75  0.25  1.00 1.83  0.17  1.00 0.57  0.43  1.00 0.71  0.29
Final Sat.:  1600 2900   400  1600 3031   269  1600  914   686  1600 1140   460
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.24  0.25  0.05 0.42  0.43  0.01 0.05  0.05  0.01 0.05  0.05
Crit Moves:  ****                ****  ****                ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:19                  Page 7-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #5 Newhope St and McFadden Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.728
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        40               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      77  342   120   116 1153   107   106  386   125   122  311    69
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   77  342   120   116 1153   107   106  386   125   122  311    69
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    77  342   120   116 1153   107   106  386   125   122  311    69
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   77  342   120   116 1153   107   106  386   125   122  311    69
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   77  342   120   116 1153   107   106  386   125   122  311    69
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.48  0.52  1.00 1.83  0.17  1.00 1.51  0.49  1.00 1.64  0.36
Final Sat.:  1600 2469   831  1600 3028   272  1600 2517   783  1600 2719   581
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.14  0.14  0.07 0.38  0.39  0.07 0.15  0.16  0.08 0.11  0.12
Crit Moves:  ****                     ****             ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
2000 HCM Operations Method (Base Volume Alternative)

Intersection #6 Harbor Blvd and SR-22 WB Off-Ramp / Banner Dr

Cycle (sec):	100	Critical Vol./Cap.(X):	0.715
Loss Time (sec):	5	Average Delay (sec/veh):	28.5
Optimal Cycle:	40	Level Of Service:	C

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Protected			Protected			Split Phase			Split Phase		
Rights:	Include			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	1 0	3 0	0	0 0	2	1 0	0 0	1! 0	0	1 1	0 0	1
Volume Module:												
Base Vol:	83	1508	0	0	1354	18	81	0	133	836	44	117
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	83	1508	0	0	1354	18	81	0	133	836	44	117
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	83	1508	0	0	1354	18	81	0	133	836	44	117
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	83	1508	0	0	1354	18	81	0	133	836	44	117
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	83	1508	0	0	1354	18	81	0	133	836	44	117
Saturation Flow Module:												
Sat/Lane:	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Adjustment:	0.95	0.91	1.00	1.00	0.91	0.91	0.90	1.00	0.90	0.96	0.96	0.85
Lanes:	1.00	3.00	0.00	0.00	2.96	0.04	0.38	0.00	0.62	1.90	0.10	1.00
Final Sat.:	1805	5187	0	0	5109	68	646	0	1061	3448	181	1615
Capacity Analysis Module:												
Vol/Sat:	0.05	0.29	0.00	0.00	0.27	0.27	0.13	0.00	0.13	0.24	0.24	0.07
Crit Moves:	****				****		****				****	
Green/Cycle:	0.06	0.44	0.00	0.00	0.37	0.37	0.18	0.00	0.18	0.34	0.34	0.34
Volume/Cap:	0.71	0.67	0.00	0.00	0.71	0.71	0.71	0.00	0.71	0.71	0.71	0.21
Delay/Veh:	64.8	23.3	0.0	0.0	28.2	28.2	46.8	0.0	46.8	30.8	30.8	23.7
User DelAdj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
AdjDel/Veh:	64.8	23.3	0.0	0.0	28.2	28.2	46.8	0.0	46.8	30.8	30.8	23.7
LOS by Move:	E	C	A	A	C	C	D	A	D	C	C	C
HCM2k85thQ:	6	21	0	0	21	21	12	0	12	19	19	4

Note: Queue reported is the number of cars per lane.

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:20                  Page 9-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #7 Trask Avenue and SR-22 EB On-Ramp
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.389
Loss Time (sec):       5               Average Delay (sec/veh):        11.0
Optimal Cycle:        21               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    0  0  0  0  0    2  0  1  0  0    0  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0     0    0     0   558  699     0     0  624   117
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0     0    0     0   558  699     0     0  624   117
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0     0    0     0   558  699     0     0  624   117
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0     0    0     0   558  699     0     0  624   117
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0     0    0     0   558  699     0     0  624   117
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  0.92 1.00  1.00  1.00 0.93  0.93
Lanes:       0.00 0.00  0.00  0.00 0.00  0.00  2.00 1.00  0.00  0.00 1.68  0.32
Final Sat.:     0    0     0     0    0     0  3502 1900     0     0 2967   556
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.00 0.00  0.00  0.16 0.37  0.00  0.00 0.21  0.21
Crit Moves:                                     ****                   ****
Green/Cycle: 0.00 0.00  0.00  0.00 0.00  0.00  0.41 0.95  0.00  0.00 0.54  0.54
Volume/Cap:  0.00 0.00  0.00  0.00 0.00  0.00  0.39 0.39  0.00  0.00 0.39  0.39
Delay/Veh:    0.0  0.0   0.0   0.0  0.0   0.0  20.9  0.3   0.0   0.0 13.5  13.5
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0   0.0  0.0   0.0  20.9  0.3   0.0   0.0 13.5  13.5
LOS by Move:    A    A     A     A    A     A     C    A     A     A    B     B
HCM2k85thQ:     0    0     0     0    0     0    10    3     0     0   11    11
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:21                Page 10-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #8 Harbor Blvd and Westminster Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.936
Loss Time (sec):       0               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  2  1  0    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     159 1045   224   251 1970   113   173  910    32   406 1100   299
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  159 1045   224   251 1970   113   173  910    32   406 1100   299
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   159 1045   224   251 1970   113   173  910    32   406 1100   299
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  159 1045   224   251 1970   113   173  910    32   406 1100   299
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  159 1045   224   251 1970   113   173  910    32   406 1100   299
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 2.90  0.10  1.00 3.00  1.00
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 4837   163  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.20  0.14  0.16 0.39  0.07  0.11 0.19  0.20  0.25 0.22  0.19
Crit Moves:  ****               ****                    ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:22                Page 11-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #9 Harbor Blvd and 1st St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.749
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        43               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     102  816   176   223 1876   122   118  788   153   229  580   135
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  102  816   176   223 1876   122   118  788   153   229  580   135
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   102  816   176   223 1876   122   118  788   153   229  580   135
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  102  816   176   223 1876   122   118  788   153   229  580   135
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  102  816   176   223 1876   122   118  788   153   229  580   135
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  2.00 2.51  0.49  2.00 2.43  0.57
Final Sat.:  1600 5100  1600  1600 5100  1600  3200 4220   780  3200 4094   906
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.16  0.11  0.14 0.37  0.08  0.04 0.19  0.20  0.07 0.14  0.15
Crit Moves:  ****                ****                     ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:23                Page 12-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #10 Harbor Blvd and McFadden Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.729
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        40               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    1  0  1  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     101 1026    98   179 1891    63   136  353   106    85  193    55
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  101 1026    98   179 1891    63   136  353   106    85  193    55
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   101 1026    98   179 1891    63   136  353   106    85  193    55
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  101 1026    98   179 1891    63   136  353   106    85  193    55
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  101 1026    98   179 1891    63   136  353   106    85  193    55
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.00  1.00
Lanes:       2.00 3.00  1.00  2.00 2.90  0.10  1.00 1.54  0.46  1.00 0.78  0.22
Final Sat.:  3200 5100  1600  3200 4845   155  1600 2561   739  1600 1245   355
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.20  0.06  0.06 0.39  0.41  0.09 0.14  0.14  0.05 0.16  0.15
Crit Moves:  ****                ****  ****                ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:24                Page 13-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #11 Harbor Blvd and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.857
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        67               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      95  713   135   212 2441    71   123  743   373   211  469   195
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   95  713   135   212 2441    71   123  743   373   211  469   195
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    95  713   135   212 2441    71   123  743   373   211  469   195
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   95  713   135   212 2441    71   123  743   373   211  469   195
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   95  713   135   212 2441    71   123  743   373   211  469   195
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 3400  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.14  0.08  0.07 0.48  0.04  0.04 0.22  0.23  0.07 0.09  0.12
Crit Moves:  ****               ****                   ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:25                Page 14-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #12 Harbor Blvd and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.800
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        52               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     106  647   164   451 2034   122   100 1422   374   125  654   111
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  106  647   164   451 2034   122   100 1422   374   125  654   111
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   106  647   164   451 2034   122   100 1422   374   125  654   111
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  106  647   164   451 2034   122   100 1422   374   125  654   111
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  106  647   164   451 2034   122   100 1422   374   125  654   111
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.39  0.61  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 4029   971  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.16  0.17  0.14 0.40  0.08  0.03 0.28  0.23  0.04 0.13  0.07
Crit Moves:  ****               ****             ****             ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:26                Page 15-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #13 Harbor Blvd and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.007
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     107  759    48   173 2324    87    90  753   303   146  453   103
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  107  759    48   173 2324    87    90  753   303   146  453   103
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   107  759    48   173 2324    87    90  753   303   146  453   103
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  107  759    48   173 2324    87    90  753   303   146  453   103
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  107  759    48   173 2324    87    90  753   303   146  453   103
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 2.82  0.18  1.00 2.89  0.11  1.00 1.43  0.57  1.00 2.00  1.00
Final Sat.:  3200 4714   286  1600 4827   173  1600 2382   918  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.16  0.17  0.11 0.48  0.50  0.06 0.32  0.33  0.09 0.13  0.06
Crit Moves:  ****                ****             ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:27                Page 16-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #14 MacArthur Blvd and Hyland Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.615
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        30               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  1  0    1  0  1  0  1    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      86    4    24     8    2    19     7 1915   760    82  626    26
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   86    4    24     8    2    19     7 1915   760    82  626    26
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    86    4    24     8    2    19     7 1915   760    82  626    26
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   86    4    24     8    2    19     7 1915   760    82  626    26
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   86    4    24     8    2    19     7 1915   760    82  626    26
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 0.14  0.86  1.00 1.00  1.00  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200  229  1371  1600 1700  1600  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.02  0.02  0.01 0.00  0.01  0.00 0.38  0.48  0.05 0.12  0.02
Crit Moves:  ****                     ****              ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:28                Page 17-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #15 MacArthur Blvd and Harbor Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.747
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        43               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     128  898    92   289 1662   115   133 1204   363   152  506   151
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  128  898    92   289 1662   115   133 1204   363   152  506   151
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   128  898    92   289 1662   115   133 1204   363   152  506   151
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  128  898    92   289 1662   115   133 1204   363   152  506   151
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  128  898    92   289 1662   115   133 1204   363   152  506   151
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.18  0.06  0.09 0.33  0.07  0.08 0.24  0.23  0.10 0.10  0.09
Crit Moves:  ****               ****             ****        ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:28                Page 18-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #16 Harbor Blvd and Sunflower Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.705
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  1  1  0    1  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     221 1128   209   242 2284    56     9  109    42   149  190   107
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  221 1128   209   242 2284    56     9  109    42   149  190   107
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   221 1128   209   242 2284    56     9  109    42   149  190   107
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  221 1128   209   242 2284    56     9  109    42   149  190   107
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  221 1128   209   242 2284    56     9  109    42   149  190   107
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.00  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 1.44  0.56  1.00 1.28  0.72
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 2410   890  1604 2045  1151
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.22  0.13  0.08 0.45  0.04  0.01 0.05  0.05  0.09 0.09  0.09
Crit Moves:  ****               ****             ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:29                Page 19-1
-------------------------------------------------------------------------------
                        Santa Ana Circulation Element
-------------------------------------------------------------------------------
                    Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #17 Harbor Blvd and I-405 NB Off-Ramp
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.573
Loss Time (sec):       5               Average Delay (sec/veh):        17.9
Optimal Cycle:        29               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  0    0  0  4  0  0    0  0  0  0  0    1  0  1! 0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1915     0     0 2007     0     0    0     0   399    0   702
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1915     0     0 2007     0     0    0     0   399    0   702
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1915     0     0 2007     0     0    0     0   399    0   702
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1915     0     0 2007     0     0    0     0   399    0   702
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1915     0     0 2007     0     0    0     0   399    0   702
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  1.00  1.00 0.91  1.00  1.00 1.00  1.00  0.89 1.00  0.89
Lanes:       0.00 4.00  0.00  0.00 4.00  0.00  0.00 0.00  0.00  1.36 0.00  1.64
Final Sat.:     0 6916     0     0 6916     0     0    0     0  2298    0  2762
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.28  0.00  0.00 0.29  0.00  0.00 0.00  0.00  0.17 0.00  0.25
Crit Moves:  ****                ****                                     ****
Green/Cycle: 0.00 0.51  0.00  0.00 0.51  0.00  0.00 0.00  0.00  0.44 0.00  0.44
Volume/Cap:  0.00 0.55  0.00  0.00 0.57  0.00  0.00 0.00  0.00  0.39 0.00  0.57
Delay/Veh:    0.0 17.0   0.0   0.0 17.4   0.0   0.0  0.0   0.0  18.8  0.0  21.2
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 17.0   0.0   0.0 17.4   0.0   0.0  0.0   0.0  18.8  0.0  21.2
LOS by Move:    A    B     A     A    B     A     A    A     A     B    A     C
HCM2k85thQ:     0   17     0     0   18     0     0    0     0     9    0    15
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:30                Page 20-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #18 Harbor Blvd and I-405 SB Off-Ramp
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.618
Loss Time (sec):       5               Average Delay (sec/veh):        15.0
Optimal Cycle:        31               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Ignore           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  3  0  1    0  0  4  0  0    1  0  1! 0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1993     0     0 1278     0   475    0   529     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1993     0     0 1278     0   475    0   529     0    0     0
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1993     0     0 1278     0   475    0   529     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1993     0     0 1278     0   475    0   529     0    0     0
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1993     0     0 1278     0   475    0   529     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  1.00  1.00 0.91  1.00  0.90 1.00  0.90  1.00 1.00  1.00
Lanes:       0.00 3.00  1.00  0.00 4.00  0.00  1.47 0.00  1.53  0.00 0.00  0.00
Final Sat.:     0 5187  1900     0 6916     0  2519    0  2610     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.38  0.00  0.00 0.18  0.00  0.19 0.00  0.20  0.00 0.00  0.00
Crit Moves:       ****        ****                     ****
Green/Cycle: 0.00 0.62  0.00  0.00 0.62  0.00  0.33 0.00  0.33  0.00 0.00  0.00
Volume/Cap:  0.00 0.62  0.00  0.00 0.30  0.00  0.57 0.00  0.62  0.00 0.00  0.00
Delay/Veh:    0.0 12.0   0.0   0.0  8.8   0.0  28.3  0.0  29.0   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 12.0   0.0   0.0  8.8   0.0  28.3  0.0  29.0   0.0  0.0   0.0
LOS by Move:    A    B     A     A    A     A     C    A     C     A    A     A
HCM2k85thQ:     0   21     0     0    8     0    13    0    15     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:31                Page 21-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #19 Fairview St and Civic Center Dr
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.676
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        35               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    0  1  0  1  0    1  1  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       7 1435   465   314 1812     8     7   25    25    50    2    26
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    7 1435   465   314 1812     8     7   25    25    50    2    26
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     7 1435   465   314 1812     8     7   25    25    50    2    26
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    7 1435   465   314 1812     8     7   25    25    50    2    26
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    7 1435   465   314 1812     8     7   25    25    50    2    26
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 2.27  0.73  1.00 2.99  0.01  0.24 0.88  0.88  1.92 0.08  1.00
Final Sat.:  1600 3825  1175  1600 4979    21   393 1404  1404  3077  123  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.38  0.40  0.20 0.36  0.38  0.02 0.02  0.02  0.02 0.02  0.02
Crit Moves:             ****  ****                ****            ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:31                Page 22-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #20 Fairview St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.887
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        80               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     196 1508   284   272 1579   181   170  977   151   180  809   271
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  196 1508   284   272 1579   181   170  977   151   180  809   271
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   196 1508   284   272 1579   181   170  977   151   180  809   271
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  196 1508   284   272 1579   181   170  977   151   180  809   271
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  196 1508   284   272 1579   181   170  977   151   180  809   271
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 3.00  1.00  1.00 2.69  0.31  1.00 2.60  0.40  1.00 2.25  0.75
Final Sat.:  1600 5100  1600  1600 4506   494  1600 4357   643  1600 3796  1204
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.30  0.18  0.17 0.35  0.37  0.11 0.22  0.24  0.11 0.21  0.23
Crit Moves:  ****                ****             ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:32                Page 23-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #21 Fairview St and McFadden Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.800
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        52               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     138 1479   198   184 2242   162    92  216    50    93  240    19
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  138 1479   198   184 2242   162    92  216    50    93  240    19
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   138 1479   198   184 2242   162    92  216    50    93  240    19
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  138 1479   198   184 2242   162    92  216    50    93  240    19
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  138 1479   198   184 2242   162    92  216    50    93  240    19
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 0.81  0.19  1.00 0.93  0.07
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 1299   301  1600 1483   117
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.29  0.12  0.12 0.44  0.10  0.06 0.17  0.17  0.06 0.16  0.16
Crit Moves:  ****               ****             ****        ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:32                Page 24-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #22 Fairview St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.882
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        77               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     212  935   131   225 1576   133   361 1002   268   463  608   121
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  212  935   131   225 1576   133   361 1002   268   463  608   121
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   212  935   131   225 1576   133   361 1002   268   463  608   121
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  212  935   131   225 1576   133   361 1002   268   463  608   121
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  212  935   131   225 1576   133   361 1002   268   463  608   121
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 2.63  0.37  2.00 2.77  0.23  2.00 2.37  0.63  2.00 2.50  0.50
Final Sat.:  3200 4410   590  3200 4626   374  3200 3987  1013  3200 4203   797
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.21  0.22  0.07 0.34  0.36  0.11 0.25  0.26  0.14 0.14  0.15
Crit Moves:  ****                ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:33                Page 25-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #23 Fairview St and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.847
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        64               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     235 1039   136   205 1628   119    69 1010   301   277  836   271
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  235 1039   136   205 1628   119    69 1010   301   277  836   271
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   235 1039   136   205 1628   119    69 1010   301   277  836   271
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  235 1039   136   205 1628   119    69 1010   301   277  836   271
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  235 1039   136   205 1628   119    69 1010   301   277  836   271
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 2.65  0.35  2.00 2.80  0.20  2.00 2.31  0.69  2.00 2.27  0.73
Final Sat.:  3200 4444   556  3200 4673   327  3200 3898  1102  3200 3825  1175
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.23  0.24  0.06 0.35  0.36  0.02 0.26  0.27  0.09 0.22  0.23
Crit Moves:  ****                ****              ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:33                Page 26-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #24 Fairview St and MacArthur Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.690
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     280  870   100   269 1357   152   121  984   145   298  627   178
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  280  870   100   269 1357   152   121  984   145   298  627   178
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   280  870   100   269 1357   152   121  984   145   298  627   178
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  280  870   100   269 1357   152   121  984   145   298  627   178
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  280  870   100   269 1357   152   121  984   145   298  627   178
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.69  0.31  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 4505   495  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.19  0.20  0.08 0.27  0.10  0.04 0.19  0.09  0.09 0.12  0.11
Crit Moves:  ****                ****             ****             ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:34                Page 27-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #25 Fairview Rd and Sunflower Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.687
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  1  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     182 1051   160   191 1627   104    44  286    58   357  299   154
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  182 1051   160   191 1627   104    44  286    58   357  299   154
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   182 1051   160   191 1627   104    44  286    58   357  299   154
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  182 1051   160   191 1627   104    44  286    58   357  299   154
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  182 1051   160   191 1627   104    44  286    58   357  299   154
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.82  0.18  2.00 1.66  0.34  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 4712   288  3200 2760   540  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.21  0.10  0.06 0.35  0.36  0.01 0.10  0.11  0.11 0.09  0.10
Crit Moves:  ****                ****             ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:35                Page 28-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #26 Greenville St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.742
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        42               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    0  0  0  0  0    0  0  2  1  0    1  0  3  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     140    0   188     0    0     0     0 1788   436   178  949     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  140    0   188     0    0     0     0 1788   436   178  949     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   140    0   188     0    0     0     0 1788   436   178  949     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  140    0   188     0    0     0     0 1788   436   178  949     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  140    0   188     0    0     0     0 1788   436   178  949     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 0.00  1.00  0.00 0.00  0.00  0.00 2.41  0.59  1.00 3.00  0.00
Final Sat.:  1600    0  1600     0    0     0     0 4059   941  1600 5100     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.00  0.12  0.00 0.00  0.00  0.00 0.44  0.46  0.11 0.19  0.00
Crit Moves:             ****                                 ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:35                Page 29-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #27 Greenville St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.878
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        76               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      47  193    78   154  472   160    50 1127   180   210  847    97
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   47  193    78   154  472   160    50 1127   180   210  847    97
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    47  193    78   154  472   160    50 1127   180   210  847    97
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   47  193    78   154  472   160    50 1127   180   210  847    97
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   47  193    78   154  472   160    50 1127   180   210  847    97
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 0.71  0.29  1.00 0.75  0.25  1.00 2.59  0.41  1.00 2.69  0.31
Final Sat.:  1600 1139   461  1600 1195   405  1600 4339   661  1600 4507   493
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.17  0.17  0.10 0.39  0.40  0.03 0.26  0.27  0.13 0.19  0.20
Crit Moves:  ****                 ****             ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:36                Page 30-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #28 Raitt St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.704
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      34  309    49    69  528    72    52  313    40    60  190    34
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   34  309    49    69  528    72    52  313    40    60  190    34
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    34  309    49    69  528    72    52  313    40    60  190    34
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   34  309    49    69  528    72    52  313    40    60  190    34
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   34  309    49    69  528    72    52  313    40    60  190    34
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 0.86  0.14  1.00 0.88  0.12  1.00 0.89  0.11  1.00 0.85  0.15
Final Sat.:  1600 1381   219  1600 1408   192  1600 1419   181  1600 1357   243
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.22  0.22  0.04 0.38  0.38  0.03 0.22  0.22  0.04 0.14  0.14
Crit Moves:  ****               ****             ****             ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:37                Page 31-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #29 Raitt St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.926
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       105               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      85  228    82    80  376    45   330 2016   290   127  992    59
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   85  228    82    80  376    45   330 2016   290   127  992    59
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    85  228    82    80  376    45   330 2016   290   127  992    59
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   85  228    82    80  376    45   330 2016   290   127  992    59
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   85  228    82    80  376    45   330 2016   290   127  992    59
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       1.00 0.74  0.26  1.00 0.89  0.11  1.00 2.62  0.38  1.00 2.83  0.17
Final Sat.:  1600 1177   423  1600 1429   171  1600 4396   604  1600 4731   269
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.19  0.19  0.05 0.26  0.26  0.21 0.46  0.48  0.08 0.21  0.22
Crit Moves:  ****               ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:37                Page 32-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #30 Bear St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.756
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        44               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  2  0  1    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      61  210    89   192  728   289    99 1690   116   103 1735   147
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   61  210    89   192  728   289    99 1690   116   103 1735   147
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    61  210    89   192  728   289    99 1690   116   103 1735   147
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   61  210    89   192  728   289    99 1690   116   103 1735   147
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   61  210    89   192  728   289    99 1690   116   103 1735   147
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 2.00  1.00  1.00 2.00  1.00  1.00 2.81  0.19  1.00 2.77  0.23
Final Sat.:  1600 3400  1600  1600 3400  1600  1600 4692   308  1600 4625   375
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.06  0.06  0.12 0.21  0.18  0.06 0.36  0.38  0.06 0.38  0.39
Crit Moves:  ****                ****        ****                        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:38                Page 33-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #31 Bristol St and 17th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.853
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        66               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     241 1241   210   449 1845   243   341 1015   164   386  886   293
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  241 1241   210   449 1845   243   341 1015   164   386  886   293
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   241 1241   210   449 1845   243   341 1015   164   386  886   293
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  241 1241   210   449 1845   243   341 1015   164   386  886   293
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  241 1241   210   449 1845   243   341 1015   164   386  886   293
OvlAdjVol:                                                                   69
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.58  0.42  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 4332   668  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.24  0.13  0.14 0.36  0.15  0.11 0.23  0.25  0.12 0.17  0.18
OvlAdjV/S:                                                                 0.04
Crit Moves:  ****                ****                    ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:39                Page 34-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #32 Bristol St and Civic Center Dr
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.931
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       109               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  0  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     129 1141   101   396 1597   100    80  404    50   145  481   100
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  129 1141   101   396 1597   100    80  404    50   145  481   100
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   129 1141   101   396 1597   100    80  404    50   145  481   100
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  129 1141   101   396 1597   100    80  404    50   145  481   100
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  129 1141   101   396 1597   100    80  404    50   145  481   100
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.00  1.00  1.00 1.04  1.00
Lanes:       1.00 2.76  0.24  1.00 2.82  0.18  1.00 0.89  0.11  1.00 1.66  0.34
Final Sat.:  1600 4610   390  1600 4717   283  1600 1424   176  1600 2749   551
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.25  0.26  0.25 0.34  0.35  0.05 0.28  0.28  0.09 0.17  0.18
Crit Moves:             ****  ****                ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:39                Page 35-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #33 Bristol St and Santa Ana Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.721
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        40               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      68 1482   206   172 1891    51    54  264    23    52  129    22
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   68 1482   206   172 1891    51    54  264    23    52  129    22
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    68 1482   206   172 1891    51    54  264    23    52  129    22
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   68 1482   206   172 1891    51    54  264    23    52  129    22
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   68 1482   206   172 1891    51    54  264    23    52  129    22
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 2.63  0.37  1.00 2.92  0.08  1.00 0.92  0.08  1.00 0.85  0.15
Final Sat.:  1600 4414   586  1600 4874   126  1600 1472   128  1600 1367   233
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.34  0.35  0.11 0.39  0.40  0.03 0.18  0.18  0.03 0.09  0.09
Crit Moves:             ****  ****                 ****        ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:40                Page 36-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #34 Bristol St and 1st St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.902
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        88               Level Of Service:                  E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  2  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     208 1451   184   315 1298   183   206 1268   128   126  949   139
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  208 1451   184   315 1298   183   206 1268   128   126  949   139
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   208 1451   184   315 1298   183   206 1268   128   126  949   139
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  208 1451   184   315 1298   183   206 1268   128   126  949   139
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  208 1451   184   315 1298   183   206 1268   128   126  949   139
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 2.72  0.28  1.00 1.74  0.26
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 4560   440  1600 2891   409
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.28  0.12  0.10 0.25  0.11  0.13 0.28  0.29  0.08 0.33  0.34
Crit Moves:       ****        ****             ****                       ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:40                Page 37-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #35 Bristol St and McFadden Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.947
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       126               Level Of Service:                  E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     130 1159    58   228 2223   229   155  266   131   145  405    47
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  130 1159    58   228 2223   229   155  266   131   145  405    47
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   130 1159    58   228 2223   229   155  266   131   145  405    47
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  130 1159    58   228 2223   229   155  266   131   145  405    47
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  130 1159    58   228 2223   229   155  266   131   145  405    47
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 0.67  0.33  1.00 0.90  0.10
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 1072   528  1600 1434   166
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.23  0.04  0.14 0.44  0.14  0.10 0.25  0.25  0.09 0.28  0.28
Crit Moves:  ****               ****        ****                   ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:41                Page 38-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #36 Bristol St and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.956
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       139               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     221  993   183   643 2178   247   172  958   238   231 1058   180
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  221  993   183   643 2178   247   172  958   238   231 1058   180
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   221  993   183   643 2178   247   172  958   238   231 1058   180
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  221  993   183   643 2178   247   172  958   238   231 1058   180
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  221  993   183   643 2178   247   172  958   238   231 1058   180
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.53  0.47  2.00 2.69  0.31  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200 4253   747  3200 4511   489  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.23  0.24  0.20 0.48  0.51  0.11 0.19  0.15  0.14 0.21  0.11
Crit Moves:  ****                ****        ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:42                Page 39-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #37 Bristol St and Segerstrom Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.854
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        66               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      70  778   146   283 1011   119   306 1480   136   157  712    91
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   70  778   146   283 1011   119   306 1480   136   157  712    91
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    70  778   146   283 1011   119   306 1480   136   157  712    91
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   70  778   146   283 1011   119   306 1480   136   157  712    91
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   70  778   146   283 1011   119   306 1480   136   157  712    91
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.53  0.47  1.00 2.68  0.32  1.00 2.75  0.25  1.00 2.66  0.34
Final Sat.:  1600 4242   758  1600 4495   505  1600 4596   404  1600 4456   544
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.18  0.19  0.18 0.22  0.24  0.19 0.32  0.34  0.10 0.16  0.17
Crit Moves:             ****  ****                           ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:42                Page 40-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #38 Bristol St and Alton Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.553
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        26               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:         WideBypass         Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  3  0  1    1  0  1  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      10  702    53   224 1551    36   190  117   244    41   87    31
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   10  702    53   224 1551    36   190  117   244    41   87    31
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    10  702    53   224 1551    36   190  117   244    41   87    31
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   10  702    53   224 1551    36   190  117   244    41   87    31
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   10  702    53   224 1551    36   190  117   244    41   87    31
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       1.00 2.79  0.21  1.00 3.00  1.00  1.00 1.00  1.00  1.00 0.74  0.26
Final Sat.:  1600 4663   337  1600 5100  1600  1600 1700  1600  1600 1180   420
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.15  0.16  0.14 0.30  0.02  0.12 0.07  0.15  0.03 0.07  0.07
Crit Moves:  ****                ****        ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:43                Page 41-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #39 Bristol St and MacArthur Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.759
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        45               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      95  491   123   319 1389   145   211 1531   311   191  910   132
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   95  491   123   319 1389   145   211 1531   311   191  910   132
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    95  491   123   319 1389   145   211 1531   311   191  910   132
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   95  491   123   319 1389   145   211 1531   311   191  910   132
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   95  491   123   319 1389   145   211 1531   311   191  910   132
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.72  0.28  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 4546   454  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.10  0.08  0.10 0.31  0.32  0.07 0.30  0.19  0.06 0.18  0.08
Crit Moves:  ****                ****        ****        ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:43                Page 42-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #40 Bristol St and Sunflower Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.682
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        35               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  1    2  0  3  0  1    2  0  2  1  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     119  583   172   232 1316    99   135 1115   451   295  480   166
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  119  583   172   232 1316    99   135 1115   451   295  480   166
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   119  583   172   232 1316    99   135 1115   451   295  480   166
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  119  583   172   232 1316    99   135 1115   451   295  480   166
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  119  583   172   232 1316    99   135 1115   451   295  480   166
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.85  1.15  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 4757  1843  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.11  0.11  0.07 0.26  0.06  0.04 0.23  0.24  0.09 0.09  0.10
Crit Moves:  ****                ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:44                Page 43-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #41 Bristol St and I-405 NB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.568
Loss Time (sec):       5               Average Delay (sec/veh):        20.9
Optimal Cycle:        28               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  1    0  0  4  1  0    0  0  0  0  2    1  1  1  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1638   210     0 2088     8     0    0    36   147   89   807
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1638   210     0 2088     8     0    0    36   147   89   807
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1638   210     0 2088     8     0    0    36   147   89   807
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1638   210     0 2088     8     0    0    36   147   89   807
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1638   210     0 2088     8     0    0    36   147   89   807
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  0.85  1.00 0.91  0.91  1.00 1.00  0.75  0.92 0.92  0.75
Lanes:       0.00 4.00  1.00  0.00 4.98  0.02  0.00 0.00  2.00  1.87 1.13  2.00
Final Sat.:     0 6916  1615     0 8603    33     0    0  2842  3272 1981  2842
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.24  0.13  0.00 0.24  0.24  0.00 0.00  0.01  0.04 0.04  0.28
Crit Moves:  ****                ****                     ****           ****
Green/Cycle: 0.00 0.43  0.43  0.00 0.43  0.43  0.00 0.00  0.02  0.50 0.50  0.50
Volume/Cap:  0.00 0.55  0.30  0.00 0.57  0.57  0.00 0.00  0.57  0.09 0.09  0.57
Delay/Veh:    0.0 21.7  19.1   0.0 21.8  21.8   0.0  0.0  60.0  13.1 13.1  18.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 21.7  19.1   0.0 21.8  21.8   0.0  0.0  60.0  13.1 13.1  18.0
LOS by Move:    A    C     B     A    C     C     A    A     E     B    B     B
HCM2k85thQ:     0   16     7     0   17    17     0    0     2     2    2    15
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:45                 Page 44-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #42 Bristol St and I-405 SB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.697
Loss Time (sec):       5               Average Delay (sec/veh):        23.6
Optimal Cycle:        38               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Ignore           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  4  0  0    0  0  2  1  1    3  0  0  0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     122 1195     0     0 1097   943   675    0   618     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  122 1195     0     0 1097   943   675    0   618     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   122 1195     0     0 1097     0   675    0   618     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  122 1195     0     0 1097     0   675    0   618     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  122 1195     0     0 1097     0   675    0   618     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.91  0.92 1.00  0.85  1.00 1.00  1.00
Lanes:       1.00 4.00  0.00  0.00 3.00  1.00  3.00 0.00  1.00  0.00 0.00  0.00
Final Sat.:  1805 6916     0     0 5187  1729  5253    0  1615     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.17  0.00  0.00 0.21  0.00  0.13 0.00  0.38  0.00 0.00  0.00
Crit Moves:  ****                 ****                    ****
Green/Cycle: 0.10 0.40  0.00  0.00 0.30  0.00  0.55 0.00  0.55  0.00 0.00  0.00
Volume/Cap:  0.70 0.43  0.00  0.00 0.70  0.00  0.23 0.00  0.70  0.00 0.00  0.00
Delay/Veh:   55.3 21.8   0.0   0.0 32.1   0.0  11.7  0.0  18.9   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  55.3 21.8   0.0   0.0 32.1   0.0  11.7  0.0  18.9   0.0  0.0   0.0
LOS by Move:    E    C     A     A    C     A     B    A     B     A    A     A
HCM2k85thQ:     8   11     0     0   18     0     6    0    22     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:45                Page 45-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #43 Flower St and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.586
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        28               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit      Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  2  0  1    1  0  2  0  1    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      64  593    86   275  929   124    63  394    45   118  377   158
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   64  593    86   275  929   124    63  394    45   118  377   158
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    64  593    86   275  929   124    63  394    45   118  377   158
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   64  593    86   275  929   124    63  394    45   118  377   158
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   64  593    86   275  929   124    63  394    45   118  377   158
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.00  1.00  1.00 2.00  1.00  1.00 2.00  1.00  1.00 2.00  1.00
Final Sat.:  1600 3400  1600  1600 3400  1600  1600 3400  1600  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.17  0.05  0.17 0.27  0.08  0.04 0.12  0.03  0.07 0.11  0.10
Crit Moves:       ****        ****                ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:46                Page 46-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #44 Flower St and 1st St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.926
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       105               Level Of Service:                  E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  0  1    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      89  387   102   366 1158   121   107  983    39   161  664    95
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   89  387   102   366 1158   121   107  983    39   161  664    95
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    89  387   102   366 1158   121   107  983    39   161  664    95
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   89  387   102   366 1158   121   107  983    39   161  664    95
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   89  387   102   366 1158   121   107  983    39   161  664    95
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.04  1.00
Lanes:       1.00 1.00  1.00  1.00 1.81  0.19  1.00 1.92  0.08  1.00 1.75  0.25
Final Sat.:  1600 1700  1600  1600 2997   303  1600 3178   122  1600 2899   401
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.23  0.06  0.23 0.39  0.40  0.07 0.31  0.32  0.10 0.23  0.24
Crit Moves:       ****        ****                          ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:46                Page 47-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #45 Flower St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.807
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        54               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      30  219    19    66  367    53    58  658    50    54  366    49
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   30  219    19    66  367    53    58  658    50    54  366    49
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    30  219    19    66  367    53    58  658    50    54  366    49
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   30  219    19    66  367    53    58  658    50    54  366    49
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   30  219    19    66  367    53    58  658    50    54  366    49
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 0.92  0.08  1.00 0.87  0.13  1.00 0.93  0.07  1.00 0.88  0.12
Final Sat.:  1600 1472   128  1600 1398   202  1600 1487   113  1600 1411   189
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.15  0.15  0.04 0.26  0.26  0.04 0.44  0.44  0.03 0.26  0.26
Crit Moves:  ****               ****             ****             ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:47                Page 48-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #46 Flower St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.818
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        56               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      86  451   100    98  544   120   237 1631   455   115  846    93
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   86  451   100    98  544   120   237 1631   455   115  846    93
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    86  451   100    98  544   120   237 1631   455   115  846    93
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   86  451   100    98  544   120   237 1631   455   115  846    93
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   86  451   100    98  544   120   237 1631   455   115  846    93
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 1.64  0.36  1.00 1.64  0.36  1.00 2.35  0.65  1.00 2.70  0.30
Final Sat.:  1600 2719   581  1600 2722   578  1600 3953  1047  1600 4525   475
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.17  0.17  0.06 0.20  0.21  0.15 0.41  0.43  0.07 0.19  0.20
Crit Moves:  ****                ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:47                Page 49-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #47 Flower St and MacArthur Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.710
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      26  170    88   163  352   264   163 1852    79    79 1329    85
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   26  170    88   163  352   264   163 1852    79    79 1329    85
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    26  170    88   163  352   264   163 1852    79    79 1329    85
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   26  170    88   163  352   264   163 1852    79    79 1329    85
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   26  170    88   163  352   264   163 1852    79    79 1329    85
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.32  0.68  1.00 1.14  0.86  1.00 2.88  0.12  1.00 2.82  0.18
Final Sat.:  1600 2209  1091  1600 1929  1371  1600 4804   196  1600 4711   289
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.08  0.08  0.10 0.18  0.19  0.10 0.39  0.40  0.05 0.28  0.29
Crit Moves:  ****                ****             ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:48                Page 50-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #48 Main St and La Veta Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.536
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        25               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  2  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     123  844   438   161  843   141   350  495   215   334  291   243
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  123  844   438   161  843   141   350  495   215   334  291   243
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   123  844   438   161  843   141   350  495   215   334  291   243
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  123  844   438   161  843   141   350  495   215   334  291   243
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  123  844   438   161  843   141   350  495   215   334  291   243
OvlAdjVol:                271                                              163
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.57  0.43  2.00 2.09  0.91  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 4312   688  3200 3546  1454  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.17  0.27  0.05 0.20  0.20  0.11 0.14  0.15  0.10 0.09  0.15
OvlAdjV/S:                0.17                                             0.10
Crit Moves:  ****                 ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:48                Page 51-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #49 Main St and Mainplace Dr / Memory Ln
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.456
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        22               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      35  955   313    27 1066   223   123  194    13   264  301    20
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   35  955   313    27 1066   223   123  194    13   264  301    20
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    35  955   313    27 1066   223   123  194    13   264  301    20
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   35  955   313    27 1066   223   123  194    13   264  301    20
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   35  955   313    27 1066   223   123  194    13   264  301    20
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 2.26  0.74  2.00 2.48  0.52  2.00 2.81  0.19  2.00 2.00  1.00
Final Sat.:  3200 3815  1185  3200 4170   830  3200 4699   301  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.25  0.26  0.01 0.26  0.27  0.04 0.04  0.04  0.08 0.09  0.01
Crit Moves:  ****                     ****  ****                    ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:49                Page 52-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #50 Main St and 17th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.845
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        63               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     156  929   199   225 1251    81   114 1203    60   369 1475    22
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  156  929   199   225 1251    81   114 1203    60   369 1475    22
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   156  929   199   225 1251    81   114 1203    60   369 1475    22
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  156  929   199   225 1251    81   114 1203    60   369 1475    22
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  156  929   199   225 1251    81   114 1203    60   369 1475    22
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       2.00 2.00  1.00  2.00 2.00  1.00  2.00 2.86  0.14  2.00 2.96  0.04
Final Sat.:  3200 3400  1600  3200 3400  1600  3200 4772   228  3200 4929    71
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.27  0.12  0.07 0.37  0.05  0.04 0.25  0.26  0.12 0.30  0.31
Crit Moves:  ****               ****                   ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:50                Page 53-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #51 Main St and Civic Center Dr
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.848
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        64               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     138  901    79    69 1222   186    75  454    83    52  679    41
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  138  901    79    69 1222   186    75  454    83    52  679    41
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   138  901    79    69 1222   186    75  454    83    52  679    41
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  138  901    79    69 1222   186    75  454    83    52  679    41
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  138  901    79    69 1222   186    75  454    83    52  679    41
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.03  1.00
Lanes:       1.00 1.84  0.16  1.00 1.74  0.26  1.00 1.69  0.31  1.00 1.89  0.11
Final Sat.:  1600 3042   258  1600 2877   423  1600 2805   495  1600 3118   182
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.30  0.31  0.04 0.42  0.44  0.05 0.16  0.17  0.03 0.22  0.23
Crit Moves:  ****                ****  ****                      ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:50                Page 54-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #52 Main St and Santa Ana Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.791
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        50               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  0    0  0  1  1  0    0  0  0  0  0    0  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      66 1050     0     0 1162   103     0    0     0    61  848    65
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   66 1050     0     0 1162   103     0    0     0    61  848    65
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    66 1050     0     0 1162   103     0    0     0    61  848    65
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   66 1050     0     0 1162   103     0    0     0    61  848    65
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   66 1050     0     0 1162   103     0    0     0    61  848    65
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       1.00 2.00  0.00  0.00 1.84  0.16  0.00 0.00  0.00  0.13 1.74  0.13
Final Sat.:  1600 3400     0     0 3039   261     0    0     0   200 2786   214
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.31  0.00  0.00 0.38  0.40  0.00 0.00  0.00  0.04 0.30  0.30
Crit Moves:  ****                     ****                          ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:51                Page 55-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #53 Main St and 4th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.441
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        21               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  1  1  0    0  0  1  1  0    0  0  1  1  0    0  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1052    25     0 1098    27     0   93    14     0  105    26
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1052    25     0 1098    27     0   93    14     0  105    26
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1052    25     0 1098    27     0   93    14     0  105    26
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1052    25     0 1098    27     0   93    14     0  105    26
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1052    25     0 1098    27     0   93    14     0  105    26
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       0.00 1.95  0.05  0.00 1.95  0.05  0.00 1.74  0.26  0.00 1.60  0.40
Final Sat.:     0 3226    74     0 3223    77     0 2881   419     0 2665   635
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.33  0.34  0.00 0.34  0.35  0.00 0.03  0.03  0.00 0.04  0.04
Crit Moves:  ****                     ****  ****                     ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:52                Page 56-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #54 Main St and 1st St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.754
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        44               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  2  0  1    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     103  532    54    94  937    69    69  805    85    78  972    54
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  103  532    54    94  937    69    69  805    85    78  972    54
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   103  532    54    94  937    69    69  805    85    78  972    54
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  103  532    54    94  937    69    69  805    85    78  972    54
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  103  532    54    94  937    69    69  805    85    78  972    54
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.03  1.00
Lanes:       1.00 1.82  0.18  1.00 2.00  1.00  1.00 1.81  0.19  1.00 1.89  0.11
Final Sat.:  1600 3005   295  1600 3400  1600  1600 2994   306  1600 3132   168
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.18  0.18  0.06 0.28  0.04  0.04 0.27  0.28  0.05 0.31  0.32
Crit Moves:  ****                ****        ****                        ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:52                Page 57-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #55 Main St and McFadden Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.916
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        97               Level Of Service:                  E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      93  874    44   184 1434    28    44  419    46    97  259    74
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   93  874    44   184 1434    28    44  419    46    97  259    74
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    93  874    44   184 1434    28    44  419    46    97  259    74
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   93  874    44   184 1434    28    44  419    46    97  259    74
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   93  874    44   184 1434    28    44  419    46    97  259    74
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 1.90  0.10  1.00 1.96  0.04  1.00 0.90  0.10  1.00 0.78  0.22
Final Sat.:  1600 3147   153  1600 3239    61  1600 1442   158  1600 1244   356
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.28  0.29  0.12 0.44  0.46  0.03 0.29  0.29  0.06 0.21  0.21
Crit Moves:  ****                ****        ****        ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:53                Page 58-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #56 Main St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.876
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        75               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     104  589    64   239 1103    58    99 1288   174   149  867   106
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  104  589    64   239 1103    58    99 1288   174   149  867   106
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   104  589    64   239 1103    58    99 1288   174   149  867   106
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  104  589    64   239 1103    58    99 1288   174   149  867   106
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  104  589    64   239 1103    58    99 1288   174   149  867   106
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 1.80  0.20  1.00 1.90  0.10  1.00 2.64  0.36  1.00 2.67  0.33
Final Sat.:  1600 2986   314  1600 3140   160  1600 4429   571  1600 4477   523
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.20  0.20  0.15 0.35  0.36  0.06 0.29  0.30  0.09 0.19  0.20
Crit Moves:  ****                     ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:54                 Page 59-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #57 Main St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.721
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        40               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      60  344   292   539  709   160   230 1336   242   187  556   279
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   60  344   292   539  709   160   230 1336   242   187  556   279
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    60  344   292   539  709   160   230 1336   242   187  556   279
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   60  344   292   539  709   160   230 1336   242   187  556   279
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   60  344   292   539  709   160   230 1336   242   187  556   279
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.07  0.18  0.17 0.14  0.10  0.07 0.26  0.15  0.06 0.11  0.17
Crit Moves:             ****  ****                 ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:54                Page 60-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #58 Penn Wy and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.648
Loss Time (sec):       5               Average Delay (sec/veh):        12.1
Optimal Cycle:        34               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  0  2    0  0  0  0  0    0  0  2  1  0    1  0  3  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      49    0   250     0    0     0     0 1279   652   236 1901     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   49    0   250     0    0     0     0 1279   652   236 1901     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    49    0   250     0    0     0     0 1279   652   236 1901     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   49    0   250     0    0     0     0 1279   652   236 1901     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   49    0   250     0    0     0     0 1279   652   236 1901     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 1.00  0.75  1.00 1.00  1.00  1.00 0.86  0.86  0.95 0.91  1.00
Lanes:       2.00 0.00  2.00  0.00 0.00  0.00  0.00 2.00  1.00  1.00 3.00  0.00
Final Sat.:  3502    0  2842     0    0     0     0 3282  1641  1805 5187     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.00  0.09  0.00 0.00  0.00  0.00 0.39  0.40  0.13 0.37  0.00
Crit Moves:             ****                                 ****  ****
Green/Cycle: 0.14 0.00  0.14  0.00 0.00  0.00  0.00 0.61  0.61  0.20 0.81  0.00
Volume/Cap:  0.10 0.00  0.65  0.00 0.00  0.00  0.00 0.64  0.65  0.65 0.45  0.00
Delay/Veh:   38.0  0.0  44.8   0.0  0.0   0.0   0.0 12.7  13.0  40.7  2.8   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  38.0  0.0  44.8   0.0  0.0   0.0   0.0 12.7  13.0  40.7  2.8   0.0
LOS by Move:    D    A     D     A    A     A     A    B     B     D    A     A
HCM2k85thQ:     1    0     8     0    0     0     0   21    22    12   10     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:55                Page 61-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #59 I-5 NB Off Ramps/17th Street
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.792
Loss Time (sec):       5               Average Delay (sec/veh):        31.4
Optimal Cycle:        53               Level Of Service:                  C
******************************************************************************
Street Name:         I-5 NB Off Ramps                    17th Street
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected         Permitted
Rights:           Include          Include          Ignore           Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  1    1  0  0  0  1    1  0  3  0  1    0  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     720   33    21    60    0   312   101 1062   384     0 1508    24
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  720   33    21    60    0   312   101 1062   384     0 1508    24
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Volume:   720   33    21    60    0   312   101 1062     0     0 1508    24
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  720   33    21    60    0   312   101 1062     0     0 1508    24
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
FinalVolume:  720   33    21    60    0   312   101 1062     0     0 1508    24
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.95  0.85  0.95 1.00  0.85  0.95 0.91  1.00  1.00 0.91  0.91
Lanes:       1.91 0.09  1.00  1.00 0.00  1.00  1.00 3.00  1.00  0.00 2.95  0.05
Final Sat.:  3466  159  1615  1805    0  1615  1805 5187  1900     0 5096    81
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.21 0.21  0.01  0.03 0.00  0.19  0.06 0.20  0.00  0.00 0.30  0.30
Crit Moves:  ****                      ****  ****                    ****
Green/Cycle: 0.26 0.26  0.26  0.24 0.00  0.24  0.07 0.44  0.00  0.00 0.37  0.37
Volume/Cap:  0.79 0.79  0.05  0.14 0.00  0.79  0.79 0.46  0.00  0.00 0.79  0.79
Delay/Veh:   39.0 39.0  27.6  29.7  0.0  45.9  73.6 19.6   0.0   0.0 30.2  30.2
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  39.0 39.0  27.6  29.7  0.0  45.9  73.6 19.6   0.0   0.0 30.2  30.2
LOS by Move:    D    D     C     C    A     D     E    B     A     A    C     C
HCM2k85thQ:    19   19     1     2    0    17     8   13     0     0   25    25
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:56                Page 62-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #60 Penn Wy and I-5 SB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.462
Loss Time (sec):       5               Average Delay (sec/veh):        19.5
Optimal Cycle:        23               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    2  0  2  0  0    0  0  0  0  0    1  0  0  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  192   170   837  173     0     0    0     0   170    0    95
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  192   170   837  173     0     0    0     0   170    0    95
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  192   170   837  173     0     0    0     0   170    0    95
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  192   170   837  173     0     0    0     0   170    0    95
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  192   170   837  173     0     0    0     0   170    0    95
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  0.85  0.92 0.95  1.00  1.00 1.00  1.00  0.95 1.00  0.75
Lanes:       0.00 2.00  1.00  2.00 2.00  0.00  0.00 0.00  0.00  1.00 0.00  2.00
Final Sat.:     0 3610  1615  3502 3610     0     0    0     0  1805    0  2842
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.05  0.11  0.24 0.05  0.00  0.00 0.00  0.00  0.09 0.00  0.03
Crit Moves:             ****  ****                               ****
Green/Cycle: 0.00 0.23  0.23  0.52 0.75  0.00  0.00 0.00  0.00  0.20 0.00  0.72
Volume/Cap:  0.00 0.23  0.46  0.46 0.06  0.00  0.00 0.00  0.00  0.46 0.00  0.05
Delay/Veh:    0.0 31.6  34.2  15.5  3.4   0.0   0.0  0.0   0.0  35.9  0.0   4.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 31.6  34.2  15.5  3.4   0.0   0.0  0.0   0.0  35.9  0.0   4.0
LOS by Move:    A    C     C     B    A     A     A    A     A     D    A     A
HCM2k85thQ:     0    4     8    13    1     0     0    0     0     8    0     1
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:57                Page 63-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM 4-Way Stop Method (Base Volume Alternative)
******************************************************************************
Intersection #61 Santiago St and Civic Center Dr
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.147
Loss Time (sec):       5               Average Delay (sec/veh):        62.6
Optimal Cycle:         0               Level Of Service:                  F
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Stop Sign        Stop Sign        Stop Sign        Stop Sign
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  0  1  0    0  0  1! 0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     318  221    31     6  335    82   212   81   431   126  116    23
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  318  221    31     6  335    82   212   81   431   126  116    23
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   318  221    31     6  335    82   212   81   431   126  116    23
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  318  221    31     6  335    82   212   81   431   126  116    23
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  318  221    31     6  335    82   212   81   431   126  116    23
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 0.88  0.12  1.00 0.80  0.20  1.00 0.16  0.84  0.47 0.44  0.09
Final Sat.:   387  362    51   383  333    81   393   71   376   177  163    32
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.82 0.61  0.61  0.02 1.01  1.01  0.54 1.15  1.15  0.71 0.71  0.71
Crit Moves:  ****                ****             ****                     ****
Delay/Veh:   42.6 24.0  24.0  12.2 75.9  75.9  22.0  116 116.2  32.7 32.7  32.7
Delay Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  42.6 24.0  24.0  12.2 75.9  75.9  22.0  116 116.2  32.7 32.7  32.7
LOS by Move:    E    C     C     B    F     F     C    F     F     D    D     D
ApproachDel:       34.4             75.0             88.6             32.7
Delay Adj:         1.00             1.00             1.00             1.00
ApprAdjDel:        34.4             75.0             88.6             32.7
LOS by Appr:          D                F                F                D
AllWayAvgQ:   3.3  1.4   1.4   0.0  7.4   7.4   1.1 13.1  13.1   2.1  2.1   2.1
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:58                Page 64-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #62 Santiago St and Santa Ana Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.444
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                 F
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  0  1    1  0  1  0  1    1  0  0  1  0    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     188  611   303   409  972   253   118  732    99   297  699   258
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  188  611   303   409  972   253   118  732    99   297  699   258
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   188  611   303   409  972   253   118  732    99   297  699   258
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  188  611   303   409  972   253   118  732    99   297  699   258
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  188  611   303   409  972   253   118  732    99   297  699   258
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00  1.00 1.06  1.00
Lanes:       1.00 1.00  1.00  1.00 1.00  1.00  1.00 0.88  0.12  1.00 2.00  1.00
Final Sat.:  1600 1700  1600  1600 1700  1600  1600 1409   191  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.36  0.19  0.26 0.57  0.16  0.07 0.52  0.52  0.19 0.21  0.16
Crit Moves:  ****               ****            ****        ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:58                Page 65-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #63 Standard Ave and 4th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.340
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  0  1    1  0  1  0  1    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     191  473   248   431  604   332   298  624   219   250  550   340
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  191  473   248   431  604   332   298  624   219   250  550   340
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   191  473   248   431  604   332   298  624   219   250  550   340
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  191  473   248   431  604   332   298  624   219   250  550   340
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  191  473   248   431  604   332   298  624   219   250  550   340
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 1.00  1.00  1.00 1.00  1.00  1.00 0.74  0.26  1.00 0.62  0.38
Final Sat.:  1600 1700  1600  1600 1700  1600  1600 1184   416  1600  989   611
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.28  0.16  0.27 0.36  0.21  0.19 0.53  0.53  0.16 0.56  0.56
Crit Moves:       ****        ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:59                Page 66-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #64 Standard Ave and 1st St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.515
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    0  0  1! 0  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      45  631   312   123  901    41   161 1959   121   194 1282   120
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   45  631   312   123  901    41   161 1959   121   194 1282   120
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    45  631   312   123  901    41   161 1959   121   194 1282   120
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   45  631   312   123  901    41   161 1959   121   194 1282   120
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   45  631   312   123  901    41   161 1959   121   194 1282   120
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.03  1.00  1.00 1.03  1.00
Lanes:       1.00 0.67  0.33  0.11 0.85  0.04  1.00 1.88  0.12  1.00 1.83  0.17
Final Sat.:  1600 1071   529   185 1354    62  1600 3114   186  1600 3026   274
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.59  0.59  0.08 0.67  0.67  0.10 0.63  0.65  0.12 0.42  0.44
Crit Moves:  ****                ****                     ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:28:59                Page 67-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #65 Standard Ave and Mcfadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.843
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        63               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      44  170    77   123  297    21    21  736    89    81  214    48
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   44  170    77   123  297    21    21  736    89    81  214    48
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    44  170    77   123  297    21    21  736    89    81  214    48
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   44  170    77   123  297    21    21  736    89    81  214    48
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   44  170    77   123  297    21    21  736    89    81  214    48
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 0.69  0.31  1.00 0.93  0.07  1.00 0.89  0.11  1.00 0.82  0.18
Final Sat.:  1600 1101   499  1600 1494   106  1600 1427   173  1600 1307   293
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.15  0.15  0.08 0.20  0.20  0.01 0.52  0.52  0.05 0.16  0.16
Crit Moves:  ****               ****            ****            ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:00                Page 68-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #66 Halladay St and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.692
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    0  0  0  0  0    0  0  2  1  0    0  1  2  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      69    0   160     0    0     0     0 1772   200   210  797     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   69    0   160     0    0     0     0 1772   200   210  797     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    69    0   160     0    0     0     0 1772   200   210  797     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   69    0   160     0    0     0     0 1772   200   210  797     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   69    0   160     0    0     0     0 1772   200   210  797     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 0.00  1.00  0.00 0.00  0.00  0.00 2.70  0.30  0.63 2.37  0.00
Final Sat.:  1600    0  1600     0    0     0     0 4513   487  1001 3999     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.00  0.10  0.00 0.00  0.00  0.00 0.39  0.41  0.13 0.20  0.00
Crit Moves:             ****                                 ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:01                Page 69-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #67 Halladay St and Dyer Rd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.668
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        34               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      16   26    71   155   31    33    54 1820    13   126  686   111
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   16   26    71   155   31    33    54 1820    13   126  686   111
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    16   26    71   155   31    33    54 1820    13   126  686   111
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   16   26    71   155   31    33    54 1820    13   126  686   111
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   16   26    71   155   31    33    54 1820    13   126  686   111
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 0.27  0.73  1.00 0.48  0.52  1.00 2.98  0.02  1.00 2.58  0.42
Final Sat.:  1600  429  1171  1600  775   825  1600 4966    34  1600 4331   669
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.06  0.06  0.10 0.04  0.04  0.03 0.37  0.38  0.08 0.16  0.17
Crit Moves:             ****  ****                          ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:01                Page 70-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #68 SR-55 SB Ramps and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.623
Loss Time (sec):       5               Average Delay (sec/veh):        20.2
Optimal Cycle:        32               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  2    0  0  2  1  1    0  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   998    0   903     0 1423  1014     0 1363   155
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   998    0   903     0 1423  1014     0 1363   155
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:     0    0     0   998    0   903     0 1423     0     0 1363     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   998    0   903     0 1423     0     0 1363     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:    0    0     0   998    0   903     0 1423     0     0 1363     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.92 1.00  0.75  1.00 0.91  0.91  1.00 0.91  1.00
Lanes:       0.00 0.00  0.00  2.00 0.00  2.00  0.00 3.00  1.00  0.00 3.00  1.00
Final Sat.:     0    0     0  3502    0  2842     0 5187  1729     0 5187  1900
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.29 0.00  0.32  0.00 0.27  0.00  0.00 0.26  0.00
Crit Moves:                                ****       ****        ****
Green/Cycle: 0.00 0.00  0.00  0.51 0.00  0.51  0.00 0.44  0.00  0.00 0.44  0.00
Volume/Cap:  0.00 0.00  0.00  0.56 0.00  0.62  0.00 0.62  0.00  0.00 0.60  0.00
Delay/Veh:    0.0  0.0   0.0  17.2  0.0  18.5   0.0 22.1   0.0   0.0 21.7   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0  17.2  0.0  18.5   0.0 22.1   0.0   0.0 21.7   0.0
LOS by Move:    A    A     A     B    A     B     A    C     A     A    C     A
HCM2k85thQ:     0    0     0    17    0    18     0   19     0     0   18     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:02                Page 71-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #69 SR-55 NB Ramps and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.728
Loss Time (sec):       5               Average Delay (sec/veh):        19.5
Optimal Cycle:        42               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Ignore           Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  0  1    0  0  0  0  0    0  0  2  0  2    0  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     965    0  1037     0    0     0     0 1503   744     0  591   279
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  965    0  1037     0    0     0     0 1503   744     0  591   279
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:   965    0     0     0    0     0     0 1503     0     0  591     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  965    0     0     0    0     0     0 1503     0     0  591     0
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:  965    0     0     0    0     0     0 1503     0     0  591     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 1.00  1.00  1.00 1.00  1.00  1.00 0.95  0.88  1.00 0.91  1.00
Lanes:       2.00 0.00  1.00  0.00 0.00  0.00  0.00 2.00  2.00  0.00 3.00  1.00
Final Sat.:  3502    0  1900     0    0     0     0 3610  3344     0 5187  1900
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.28 0.00  0.00  0.00 0.00  0.00  0.00 0.42  0.00  0.00 0.11  0.00
Crit Moves:  ****                                  ****        ****
Green/Cycle: 0.38 0.00  0.00  0.00 0.00  0.00  0.00 0.57  0.00  0.00 0.57  0.00
Volume/Cap:  0.73 0.00  0.00  0.00 0.00  0.00  0.00 0.73  0.00  0.00 0.20  0.00
Delay/Veh:   28.7  0.0   0.0   0.0  0.0   0.0   0.0 17.1   0.0   0.0 10.4   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  28.7  0.0   0.0   0.0  0.0   0.0   0.0 17.1   0.0   0.0 10.4   0.0
LOS by Move:    C    A     A     A    A     A     A    B     A     A    B     A
HCM2k85thQ:    21    0     0     0    0     0     0   27     0     0    5     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:02                Page 72-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #70 SR-55 SB Ramps and Dyer Rd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.610
Loss Time (sec):       5               Average Delay (sec/veh):        25.9
Optimal Cycle:        31               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:            Ovl              Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  2    0  1  1  0  1    1  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     312   37   713    50  242    60    34 1282   273   418  663   111
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  312   37   713    50  242    60    34 1282   273   418  663   111
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   312   37   713    50  242    60    34 1282   273   418  663   111
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  312   37   713    50  242    60    34 1282   273   418  663   111
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  312   37   713    50  242    60    34 1282   273   418  663   111
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.96 0.96  0.75  0.94 0.94  0.85  0.95 0.91  0.85  0.92 0.91  0.85
Lanes:       1.79 0.21  2.00  0.34 1.66  1.00  1.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3251  386  2842   613 2968  1615  1805 5187  1615  3502 5187  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.10  0.25  0.08 0.08  0.04  0.02 0.25  0.17  0.12 0.13  0.07
Crit Moves:             ****        ****              ****        ****
Green/Cycle: 0.22 0.22  0.41  0.13 0.13  0.13  0.08 0.41  0.41  0.20 0.52  0.52
Volume/Cap:  0.45 0.45  0.61  0.61 0.61  0.28  0.24 0.61  0.42  0.61 0.24  0.13
Delay/Veh:   34.4 34.4  24.1  43.2 43.2  39.7  44.3 24.0  21.7  38.3 13.1  12.3
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  34.4 34.4  24.1  43.2 43.2  39.7  44.3 24.0  21.7  38.3 13.1  12.3
LOS by Move:    C    C     C     D    D     D     D    C     C     D    B     B
HCM2k85thQ:     8    8    16     8    8     3     2   18     9    11    6     3
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:03                Page 73-1
-------------------------------------------------------------------------------
                        Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #71 Glassell St and La Veta Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.826
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        58               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Ovl              Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  1  0  1    1  0  1  1  0    1  0  1  0  1    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     292  458   139    13  274    60    57  293   563   380  401    10
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  292  458   139    13  274    60    57  293   563   380  401    10
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   292  458   139    13  274    60    57  293   563   380  401    10
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  292  458   139    13  274    60    57  293   563   380  401    10
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  292  458   139    13  274    60    57  293   563   380  401    10
OvlAdjVol:                 0                                 417
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.03  1.00
Lanes:       2.00 1.00  1.00  1.00 1.64  0.36  1.00 1.00  1.00  1.00 1.95  0.05
Final Sat.:  3200 1700  1600  1600 2725   575  1600 1700  1600  1600 3222    78
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.27  0.09  0.01 0.10  0.10  0.04 0.17  0.35  0.24 0.12  0.13
OvlAdjV/S:               0.00                              0.26
Crit Moves:       ****        ****                         ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:04                Page 74-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #72 Glassell St and SR-22 WB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.841
Loss Time (sec):       5               Average Delay (sec/veh):        30.1
Optimal Cycle:        65               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected         Permitted      Split Phase      Split Phase
Rights:           Include           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  0    0  0  2  0  1    0  0  0  0  0    1  0  1! 0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     568  638     0     0 1017   473     0    0     0   247    4   369
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  568  638     0     0 1017   473     0    0     0   247    4   369
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   568  638     0     0 1017   473     0    0     0   247    4   369
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  568  638     0     0 1017   473     0    0     0   247    4   369
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  568  638     0     0 1017   473     0    0     0   247    4   369
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.95  1.00  1.00 0.95  0.85  1.00 1.00  1.00  0.86 0.86  0.86
Lanes:       1.00 2.00  0.00  0.00 2.00  1.00  0.00 0.00  0.00  1.40 0.01  1.59
Final Sat.:  1805 3610     0     0 3610  1615     0    0     0  2271   21  2589
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.31 0.18  0.00  0.00 0.28  0.29  0.00 0.00  0.00  0.11 0.19  0.14
Crit Moves:  ****                     ****                          ****
Green/Cycle: 0.37 0.72  0.00  0.00 0.35  0.35  0.00 0.00  0.00  0.23 0.23  0.23
Volume/Cap:  0.84 0.24  0.00  0.00 0.81  0.84  0.00 0.00  0.00  0.48 0.84  0.63
Delay/Veh:   37.9  4.7   0.0   0.0 33.6  41.0   0.0  0.0   0.0  33.7 45.5  36.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  37.9  4.7   0.0   0.0 33.6  41.0   0.0  0.0   0.0  33.7 45.5  36.0
LOS by Move:    D    A     A     A    C     D     A    A     A     C    D     D
HCM2k85thQ:    27    5     0     0   25    24     0    0     0     8   18    11
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:04                Page 75-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #73 Grand Ave / Glassell St and SR-22 EB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.842
Loss Time (sec):       5               Average Delay (sec/veh):        29.6
Optimal Cycle:        65               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted       Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    1  0  2  0  0    1  0  1! 0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  968   258   345  904     0   258    0  1012     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  968   258   345  904     0   258    0  1012     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  968   258   345  904     0   258    0  1012     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  968   258   345  904     0   258    0  1012     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  968   258   345  904     0   258    0  1012     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  0.85  0.95 0.95  1.00  0.87 1.00  0.87  1.00 1.00  1.00
Lanes:       0.00 2.00  1.00  1.00 2.00  0.00  1.20 0.00  1.80  0.00 0.00  0.00
Final Sat.:     0 3610  1615  1805 3610     0  1992    0  2974     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.27  0.16  0.19 0.25  0.00  0.13 0.00  0.34  0.00 0.00  0.00
Crit Moves:       ****        ****                     ****
Green/Cycle: 0.00 0.32  0.32  0.23 0.55  0.00  0.40 0.00  0.40  0.00 0.00  0.00
Volume/Cap:  0.00 0.84  0.50  0.84 0.46  0.00  0.32 0.00  0.84  0.00 0.00  0.00
Delay/Veh:    0.0 37.5  28.4  51.4 13.9   0.0  20.4  0.0  31.3   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 37.5  28.4  51.4 13.9   0.0  20.4  0.0  31.3   0.0  0.0   0.0
LOS by Move:    A    D     C     D    B     A     C    A     C     A    A     A
HCM2k85thQ:     0   25    10    19   13     0     7    0    27     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:05                Page 76-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #74 Grand Ave and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.569
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        27               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      25 1032   148   184 1531    34    99   60    59   152   17   137
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   25 1032   148   184 1531    34    99   60    59   152   17   137
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    25 1032   148   184 1531    34    99   60    59   152   17   137
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   25 1032   148   184 1531    34    99   60    59   152   17   137
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   25 1032   148   184 1531    34    99   60    59   152   17   137
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       1.00 2.62  0.38  1.00 2.93  0.07  1.00 1.01  0.99  1.00 0.11  0.89
Final Sat.:  1600 4398   602  1600 4896   104  1600 1713  1587  1600  177  1423
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.23  0.25  0.12 0.31  0.33  0.06 0.04  0.04  0.10 0.10  0.10
Crit Moves:             ****  ****             ****                   ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:05                Page 77-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                       Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #75 Grand Ave and Santa Clara Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.798
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        52               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include        WideBypass          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  0  1  0    1  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      92  648   167   307 1503   338   179  291    60   140  270   246
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   92  648   167   307 1503   338   179  291    60   140  270   246
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    92  648   167   307 1503   338   179  291    60   140  270   246
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   92  648   167   307 1503   338   179  291    60   140  270   246
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   92  648   167   307 1503   338   179  291    60   140  270   246
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.00  1.00  1.00 1.06  1.00
Lanes:       1.00 2.39  0.61  1.00 2.45  0.55  1.00 0.83  0.17  1.00 1.00  1.00
Final Sat.:  1600 4016   984  1600 4119   881  1600 1326   274  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.16  0.17  0.19 0.36  0.38  0.11 0.22  0.22  0.09 0.16  0.15
Crit Moves:  ****                      ****       ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:06                Page 78-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #76 Grand Ave and 17th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.856
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        67               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     228  666   458   303 1270   249   246  915   116   401 1047   114
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  228  666   458   303 1270   249   246  915   116   401 1047   114
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   228  666   458   303 1270   249   246  915   116   401 1047   114
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  228  666   458   303 1270   249   246  915   116   401 1047   114
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  228  666   458   303 1270   249   246  915   116   401 1047   114
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.00  1.00  1.00 2.51  0.49  2.00 2.66  0.34  2.00 2.71  0.29
Final Sat.:  1600 3400  1600  1600 4213   787  3200 4460   540  3200 4529   471
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.20  0.29  0.19 0.30  0.32  0.08 0.21  0.21  0.13 0.23  0.24
Crit Moves:             ****  ****                   ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:07                Page 79-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #77 Grand Ave and I-5 NB Ramps
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.845
Loss Time (sec):       5                Average Delay (sec/veh):        15.3
Optimal Cycle:        66                Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Ignore           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    1  0  3  0  0    0  0  0  0  0    2  0  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1145   662   104 3338     0     0    0     0   557    0   154
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1145   662   104 3338     0     0    0     0   557    0   154
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1145     0   104 3338     0     0    0     0   557    0   154
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1145     0   104 3338     0     0    0     0   557    0   154
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1145     0   104 3338     0     0    0     0   557    0   154
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  1.00  0.95 0.91  1.00  1.00 1.00  1.00  0.92 1.00  0.85
Lanes:       0.00 2.00  1.00  1.00 3.00  0.00  0.00 0.00  0.00  2.00 0.00  1.00
Final Sat.:     0 3610  1900  1805 5187     0     0    0     0  3502    0  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.32  0.00  0.06 0.64  0.00  0.00 0.00  0.00  0.16 0.00  0.10
Crit Moves:  ****                 ****                          ****
Green/Cycle: 0.00 0.64  0.00  0.12 0.76  0.00  0.00 0.00  0.00  0.19 0.00  0.19
Volume/Cap:  0.00 0.49  0.00  0.49 0.84  0.00  0.00 0.00  0.00  0.84 0.00  0.51
Delay/Veh:    0.0  9.4   0.0  43.2  9.8   0.0   0.0  0.0   0.0  49.0  0.0  37.8
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  9.4   0.0  43.2  9.8   0.0   0.0  0.0   0.0  49.0  0.0  37.8
LOS by Move:    A    A     A     D    A     A     A    A     A     D    A     D
HCM2k85thQ:     0   15     0     6   39     0     0    0     0    17    0     7
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:07                Page 80-1
------------------------------------------------------------------------------
                          Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #78 Grand Ave and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.881
Loss Time (sec):       5                Average Delay (sec/veh):        26.3
Optimal Cycle:        80                Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include           Ovl             Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  0  2    2  0  1  0  2    0  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      79 1119    57   231 1908  1684   242  200   394     5  407    37
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   79 1119    57   231 1908  1684   242  200   394     5  407    37
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    79 1119    57   231 1908  1684   242  200   394     5  407    37
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   79 1119    57   231 1908  1684   242  200   394     5  407    37
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   79 1119    57   231 1908  1684   242  200   394     5  407    37
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.90  0.90  0.95 0.95  0.75  0.92 1.00  0.75  0.94 0.94  0.94
Lanes:       1.00 2.85  0.15  1.00 2.00  2.00  2.00 1.00  2.00  0.02 1.82  0.16
Final Sat.:  1805 4901   250  1805 3610  2842  3502 1900  2842    40 3230   294
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.23  0.23  0.13 0.53  0.59  0.07 0.11  0.14  0.13 0.13  0.13
Crit Moves:  ****                 ****                    ****  ****
Green/Cycle: 0.05 0.42  0.42  0.23 0.60  0.76  0.16 0.16  0.16  0.14 0.14  0.14
Volume/Cap:  0.88 0.55  0.55  0.55 0.88  0.78  0.44 0.67  0.88  0.88 0.88  0.88
Delay/Veh:  105.1 22.4  22.4  35.2 21.6   9.2  38.7 45.4  59.3  58.3 58.3  58.3
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh: 105.1 22.4  22.4  35.2 21.6   9.2  38.7 45.4  59.3  58.3 58.3  58.3
LOS by Move:    F    C     C     D    C     A     D    D     E     E    E     E
HCM2k85thQ:     7   15    15    10   41    28     6   11    15    15   15    15
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:08                Page 81-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                       Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #79 Grand Ave and 1st St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.827
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        58               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  2  0  1    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     186  655    31   121 1753   213   318  760   216   268  939   107
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  186  655    31   121 1753   213   318  760   216   268  939   107
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   186  655    31   121 1753   213   318  760   216   268  939   107
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  186  655    31   121 1753   213   318  760   216   268  939   107
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  186  655    31   121 1753   213   318  760   216   268  939   107
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.86  0.14  2.00 3.00  1.00  2.00 2.00  1.00  2.00 2.00  1.00
Final Sat.:  3200 4783   217  3200 5100  1600  3200 3400  1600  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.14  0.14  0.04 0.34  0.13  0.10 0.22  0.14  0.08 0.28  0.07
Crit Moves:  ****                ****        ****                ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:09                Page 82-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #80 Grand Ave and Chestnut Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.935
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       113               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      53  737   163   174 2086    57    64  449   118    81  237   148
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   53  737   163   174 2086    57    64  449   118    81  237   148
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    53  737   163   174 2086    57    64  449   118    81  237   148
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   53  737   163   174 2086    57    64  449   118    81  237   148
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   53  737   163   174 2086    57    64  449   118    81  237   148
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 2.46  0.54  1.00 2.92  0.08  1.00 0.79  0.21  1.00 0.62  0.38
Final Sat.:  1600 4131   869  1600 4872   128  1600 1267   333  1600  985   615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.18  0.19  0.11 0.43  0.45  0.04 0.35  0.35  0.05 0.24  0.24
Crit Moves:  ****                      ****       ****        ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:09                Page 83-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #81 Grand Ave and McFadden Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.011
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  0  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     262 1104   165   294 1974   192   109  352   107    95  340    86
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  262 1104   165   294 1974   192   109  352   107    95  340    86
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   262 1104   165   294 1974   192   109  352   107    95  340    86
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  262 1104   165   294 1974   192   109  352   107    95  340    86
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  262 1104   165   294 1974   192   109  352   107    95  340    86
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.00  1.00  1.00 1.04  1.00
Lanes:       1.00 2.61  0.39  1.00 2.73  0.27  1.00 0.77  0.23  1.00 1.60  0.40
Final Sat.:  1600 4376   624  1600 4575   425  1600 1227   373  1600 2654   646
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.16 0.25  0.26  0.18 0.43  0.45  0.07 0.29  0.29  0.06 0.13  0.13
Crit Moves:  ****                     ****       ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:10                Page 84-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #82 Grand Ave and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.897
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        85               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      65  649   127   253 1293   253   396 1654   159   170  651   142
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   65  649   127   253 1293   253   396 1654   159   170  651   142
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    65  649   127   253 1293   253   396 1654   159   170  651   142
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   65  649   127   253 1293   253   396 1654   159   170  651   142
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   65  649   127   253 1293   253   396 1654   159   170  651   142
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.51  0.49  1.00 2.51  0.49  1.00 2.74  0.26  1.00 2.46  0.54
Final Sat.:  1600 4214   786  1600 4214   786  1600 4579   421  1600 4140   860
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.15  0.16  0.16 0.31  0.32  0.25 0.36  0.38  0.11 0.16  0.17
Crit Moves:  ****                 ****            ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:11                Page 85-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #83 Grand Ave and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.664
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        34               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    2  0  3  0  1    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     187  564   241   204  589   199   314 1120   440   140  617   208
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  187  564   241   204  589   199   314 1120   440   140  617   208
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   187  564   241   204  589   199   314 1120   440   140  617   208
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  187  564   241   204  589   199   314 1120   440   140  617   208
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  187  564   241   204  589   199   314 1120   440   140  617   208
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.10  0.90  1.00 2.24  0.76  2.00 3.00  1.00  2.00 2.24  0.76
Final Sat.:  1600 3563  1437  1600 3788  1212  3200 5100  1600  3200 3790  1210
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.16  0.17  0.13 0.16  0.16  0.10 0.22  0.28  0.04 0.16  0.17
Crit Moves:             ****  ****                           ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:12                Page 86-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #84 SR-55 NB Ramps and Dyer Rd
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.565
Loss Time (sec):       5                Average Delay (sec/veh):        17.3
Optimal Cycle:        28                Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1! 0  1    0  0  0  0  0    0  0  3  0  1    0  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     637    0   521     0    0     0     0 1550   620     0  859   517
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  637    0   521     0    0     0     0 1550   620     0  859   517
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:   637    0   521     0    0     0     0 1550     0     0  859     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  637    0   521     0    0     0     0 1550     0     0  859     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:  637    0   521     0    0     0     0 1550     0     0  859     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.91 1.00  0.91  1.00 1.00  1.00  1.00 0.91  1.00  1.00 0.91  0.91
Lanes:       1.55 0.00  1.45  0.00 0.00  0.00  0.00 3.00  1.00  0.00 3.00  0.00
Final Sat.:  2674    0  2501     0    0     0     0 5187  1900     0 5187     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.24 0.00  0.21  0.00 0.00  0.00  0.00 0.30  0.00  0.00 0.17  0.00
Crit Moves:  ****                                  ****        ****
Green/Cycle: 0.42 0.00  0.42  0.00 0.00  0.00  0.00 0.53  0.00  0.00 0.53  0.00
Volume/Cap:  0.57 0.00  0.49  0.00 0.00  0.00  0.00 0.57  0.00  0.00 0.31  0.00
Delay/Veh:   22.3  0.0  21.3   0.0  0.0   0.0   0.0 16.1   0.0   0.0 13.4   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  22.3  0.0  21.3   0.0  0.0   0.0   0.0 16.1   0.0   0.0 13.4   0.0
LOS by Move:    C    A     C     A    A     A     A    B     A     A    B     A
HCM2k85thQ:    15    0    13     0    0     0     0   18     0     0    8     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:13                Page 87-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
             2000 HCM 4-Way Stop Method (Base Volume Alternative)
*******************************************************************************
Intersection #85 Cambridge St and La Veta Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.900
Loss Time (sec):       5               Average Delay (sec/veh):        23.4
Optimal Cycle:         0               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Stop Sign        Stop Sign        Stop Sign        Stop Sign
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Lanes:        1  0  1  0  0    0  0  1  0  1    1  0  0  0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     185  235     0     0  480   245   195    0   312     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  185  235     0     0  480   245   195    0   312     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   185  235     0     0  480   245   195    0   312     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  185  235     0     0  480   245   195    0   312     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  185  235     0     0  480   245   195    0   312     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 1.00  0.00  0.00 1.00  1.00  1.00 0.00  1.00  0.00 0.00  0.00
Final Sat.:   465  498     0     0  534   586   459    0   541     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.40 0.47  xxxx  xxxx 0.90  0.42  0.43 xxxx  0.58  xxxx xxxx  xxxx
Crit Moves:       ****             ****                     ****
Delay/Veh:   15.0 15.6   0.0   0.0 42.9  12.8  15.7  0.0  17.1   0.0  0.0   0.0
Delay Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  15.0 15.6   0.0   0.0 42.9  12.8  15.7  0.0  17.1   0.0  0.0   0.0
LOS by Move:    B    C     *     *    E     B     C    *     C     *    *     *
ApproachDel:       15.3             32.8             16.6           xxxxxx
Delay Adj:         1.00             1.00             1.00            xxxxx
ApprAdjDel:        15.3             32.8             16.6           xxxxxx
LOS by Appr:          C                D                C                *
AllWayAvgQ:   0.6  0.8   0.0   0.0  5.0   0.7   0.7  0.0   1.2   0.0  0.0   0.0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:14                Page 88-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #86 Cambridge St and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.624
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        30               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    1  0  0  0  1    1  0  1  0  0    0  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   618    0   199    69  185     0     0  130   101
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   618    0   199    69  185     0     0  130   101
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   618    0   199    69  185     0     0  130   101
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   618    0   199    69  185     0     0  130   101
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   618    0   199    69  185     0     0  130   101
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       0.00 0.00  0.00  1.00 0.00  1.00  1.00 1.00  0.00  0.00 0.56  0.44
Final Sat.:     0    0     0  1600    0  1600  1600 1700     0     0  900   700
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.39 0.00  0.12  0.04 0.11  0.00  0.00 0.14  0.14
Crit Moves:                   ****             ****                   ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:15                Page 89-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #87 Mabury St and 1st Street
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.755
Loss Time (sec):       5               Average Delay (sec/veh):        27.4
Optimal Cycle:        46               Level Of Service:                  C
*******************************************************************************
Street Name:              Mabury                          1st Street
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    1  0  1! 0  1    0  0  1  1  0    1  0  1  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:       5    0   122   276  164   618     0  922    10    46  701     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    5    0   122   276  164   618     0  922    10    46  701     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     5    0   122   276  164   618     0  922    10    46  701     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    5    0   122   276  164   618     0  922    10    46  701     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    5    0   122   276  164   618     0  922    10    46  701     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 1.00  0.85  0.90 0.90  0.90  1.00 0.95  0.95  0.95 0.95  0.95
Lanes:       1.00 0.00  1.00  1.23 0.27  1.50  0.00 1.98  0.02  1.00 2.00  0.00
Final Sat.:  1805    0  1615  2097  459  2575     0 3564    39  1805 3610     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.08  0.13 0.36  0.24  0.00 0.26  0.26  0.03 0.19  0.00
Crit Moves:             ****       ****             ****        ****
Green/Cycle: 0.10 0.00  0.10  0.47 0.47  0.47  0.00 0.34  0.34  0.03 0.38  0.00
Volume/Cap:  0.03 0.00  0.75  0.28 0.75  0.51  0.00 0.75  0.75  0.75 0.52  0.00
Delay/Veh:   40.7  0.0  61.9  16.0 24.0  18.5   0.0 31.8  31.8  88.8 24.5   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  40.7  0.0  61.9  16.0 24.0  18.5   0.0 31.8  31.8  88.8 24.5   0.0
LOS by Move:    D    A     E     B    C     B     A    C     C     F    C     A
HCM2k85thQ:     0    0     8     7   25    14     0   22    22     5   14     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Attachment 8

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:16                Page 90-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #88 Tustin St and La Veta Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.362
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        19               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  1  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       9  365   105    48  944     3     9   11    35   279    1    43
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    9  365   105    48  944     3     9   11    35   279    1    43
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     9  365   105    48  944     3     9   11    35   279    1    43
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    9  365   105    48  944     3     9   11    35   279    1    43
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    9  365   105    48  944     3     9   11    35   279    1    43
OvlAdjVol:                                                                   0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       1.00 2.33  0.67  1.00 2.99  0.01  1.00 1.00  1.00  1.99 0.01  1.00
Final Sat.:  1600 3928  1072  1600 4985    15  1600 1700  1600  3189   11  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.09  0.10  0.03 0.19  0.20  0.01 0.01  0.02  0.09 0.09  0.03
OvlAdjV/S:                                                                0.00
Crit Moves:  ****                      ****             ****       ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:17                Page 91-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #89 Tustin St and SR-22 WB On-Ramp
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.575
Loss Time (sec):       5               Average Delay (sec/veh):        13.2
Optimal Cycle:        29               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected         Permitted       Protected        Protected
Rights:           Include           Include         Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  0    0  0  2  1  0    0  0  0  0  0    0  0  0  0  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     762  708     0     0  897   536     0    0     0     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  762  708     0     0  897   536     0    0     0     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   762  708     0     0  897   536     0    0     0     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  762  708     0     0  897   536     0    0     0     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  762  708     0     0  897   536     0    0     0     0    0     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 0.95  1.00  1.00 0.86  0.86  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       2.00 2.00  0.00  0.00 2.00  1.00  0.00 0.00  0.00  0.00 0.00  0.00
Final Sat.:  3502 3610     0     0 3264  1632     0    0     0     0    0     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.22 0.20  0.00  0.00 0.27  0.33  0.00 0.00  0.00  0.00 0.00  0.00
Crit Moves:  ****                     ****
Green/Cycle: 0.38 0.95  0.00  0.00 0.57  0.57  0.00 0.00  0.00  0.00 0.00  0.00
Volume/Cap:  0.57 0.21  0.00  0.00 0.48  0.57  0.00 0.00  0.00  0.00 0.00  0.00
Delay/Veh:   25.3  0.2   0.0   0.0 12.8  14.0   0.0  0.0   0.0   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  25.3  0.2   0.0   0.0 12.8  14.0   0.0  0.0   0.0   0.0  0.0   0.0
LOS by Move:    C    A     A     A    B     B     A    A     A     A    A     A
HCM2k85thQ:    15    1     0     0   14    18     0    0     0     0    0     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Attachment 8

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:18                Page 92-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #90 Tustin St and SR-22 EB Off-Ramp / Seba Ave
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.718
Loss Time (sec):       5                Average Delay (sec/veh):        23.8
Optimal Cycle:        41                Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted      Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  1  0    1  0  3  0  0    1  0  1! 0  1    0  0  1! 0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1213     6    13  779     0   252   25  1084     6    0    43
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1213     6    13  779     0   252   25  1084     6    0    43
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1213     6    13  779     0   252   25  1084     6    0    43
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1213     6    13  779     0   252   25  1084     6    0    43
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1213     6    13  779     0   252   25  1084     6    0    43
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  0.91  0.12 0.91  1.00  0.87 0.87  0.87  0.88 1.00  0.88
Lanes:       0.00 2.99  0.01  1.00 3.00  0.00  1.18 0.04  1.78  0.12 0.00  0.88
Final Sat.:     0 5156    26   232 5187     0  1960   60  2956   204    0  1460
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.24  0.24  0.06 0.15  0.00  0.13 0.42  0.37  0.03 0.00  0.03
Crit Moves:       ****                          ****        ****
Green/Cycle: 0.00 0.33  0.33  0.33 0.33  0.00  0.58 0.58  0.58  0.04 0.00  0.04
Volume/Cap:  0.00 0.72  0.72  0.17 0.46  0.00  0.22 0.72  0.63  0.72 0.00  0.72
Delay/Veh:    0.0 31.1  31.1  25.0 26.8   0.0  10.1 16.4  14.4  78.0  0.0  78.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 31.1  31.1  25.0 26.8   0.0  10.1 16.4  14.4  78.0  0.0  78.0
LOS by Move:    A    C     C     C    C     A     B    B     B     E    A     E
HCM2k85thQ:     0   20    20     1   11     0     5   24    19     5    0     5
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:19                Page 93-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #91 Tustin Ave and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.242
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  0  1  0    1  0  0  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     125  720   126   249 2148    42    78  297   511   306  338   442
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  125  720   126   249 2148    42    78  297   511   306  338   442
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   125  720   126   249 2148    42    78  297   511   306  338   442
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  125  720   126   249 2148    42    78  297   511   306  338   442
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  125  720   126   249 2148    42    78  297   511   306  338   442
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       2.00 2.55  0.45  2.00 2.94  0.06  1.00 0.37  0.63  1.00 0.43  0.57
Final Sat.:  3200 4285   715  3200 4908    92  1600  588  1012  1600  693   907
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.17  0.18  0.08 0.44  0.46  0.05 0.51  0.50  0.19 0.49  0.49
Crit Moves:  ****                         ****       ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:19                Page 94-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #92 Tustin Ave and Santa Clara Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.097
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    2  0  2  1  0    1  0  0  1  0    1  0  0  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     102  556   104   135 2756    87   116  293   214   118  244   122
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  102  556   104   135 2756    87   116  293   214   118  244   122
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   102  556   104   135 2756    87   116  293   214   118  244   122
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  102  556   104   135 2756    87   116  293   214   118  244   122
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  102  556   104   135 2756    87   116  293   214   118  244   122
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 2.53  0.47  2.00 2.91  0.09  1.00 0.58  0.42  1.00 0.67  0.33
Final Sat.:  1600 4244   756  3200 4853   147  1600  925   675  1600 1067   533
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.13  0.14  0.04 0.57  0.59  0.07 0.32  0.32  0.07 0.23  0.23
Crit Moves:  ****                          ****       ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:20                Page 95-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #93 Tustin Ave and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.805
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        53               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  1  0    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     155  277   330   638 1841    20   215  849   145   488  770   188
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  155  277   330   638 1841    20   215  849   145   488  770   188
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   155  277   330   638 1841    20   215  849   145   488  770   188
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  155  277   330   638 1841    20   215  849   145   488  770   188
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  155  277   330   638 1841    20   215  849   145   488  770   188
OvlAdjVol:                 86                                                 0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.00  1.00  2.00 2.97  0.03  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 3400  1600  3200 4948    52  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.08  0.21  0.20 0.37  0.39  0.07 0.17  0.09  0.15 0.15  0.12
OvlAdjV/S:                 0.05                                               0.00
Crit Moves:  ****                          ****        ****        ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:21                Page 96-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #94 Tustin Ave and 4th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.791
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        50               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    2  0  2  0  1    1  0  2  1  1    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       40  204   183   743  946   293   159  942    39   129  727   472
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    40  204   183   743  946   293   159  942    39   129  727   472
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     40  204   183   743  946   293   159  942    39   129  727   472
Reduct Vol:      0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    40  204   183   743  946   293   159  942    39   129  727   472
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    40  204   183   743  946   293   159  942    39   129  727   472
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.00  1.00  2.00 2.00  1.00  1.00 3.00  1.00  1.00 2.00  1.00
Final Sat.:  1600 3400  1600  3200 3400  1600  1600 5100  1600  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.06  0.11  0.23 0.28  0.18  0.10 0.18  0.02  0.08 0.21  0.30
Crit Moves:             ****  ****             ****                      ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:22                Page 97-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #95 SR-55 SB Ramps / Auto Mall Dr and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.653
Loss Time (sec):       5               Average Delay (sec/veh):        25.1
Optimal Cycle:        34               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  2    1  0  1  0  1    1  0  3  0  1    2  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     456   68   540    50   30     8    34 1334   493   510 1202   157
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  456   68   540    50   30     8    34 1334   493   510 1202   157
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Volume:   456   68   540    50   30     8    34 1334     0   510 1202   157
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  456   68   540    50   30     8    34 1334     0   510 1202   157
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
FinalVolume:  456   68   540    50   30     8    34 1334     0   510 1202   157
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.96 0.96  0.75  0.95 1.00  0.85  0.95 0.91  1.00  0.92 0.89  0.89
Lanes:       1.74 0.26  2.00  1.00 1.00  1.00  1.00 3.00  1.00  2.00 2.65  0.35
Final Sat.:  3168  472  2842  1805 1900  1615  1805 5187  1900  3502 4510   589
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.14  0.19  0.03 0.02  0.00  0.02 0.26  0.00  0.15 0.27  0.27
Crit Moves:             ****  ****                 ****        ****
Green/Cycle: 0.29 0.29  0.29  0.04 0.04  0.04  0.04 0.39  0.00  0.22 0.58  0.58
Volume/Cap:  0.49 0.49  0.65  0.65 0.37  0.12  0.46 0.65  0.00  0.65 0.46  0.46
Delay/Veh:   29.7 29.7  32.9  65.6 49.5  46.8  51.5 25.5   0.0  37.3 12.4  12.4
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  29.7 29.7  32.9  65.6 49.5  46.8  51.5 25.5   0.0  37.3 12.4  12.4
LOS by Move:    C    C     C     E    D     D     D    C     A     D    B     B
HCM2k85thQ:    11   11    14     4    2     1     3   19     0    13   13    13
```

```
********************************************************************************
Note: Queue reported is the number of cars per lane.
********************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:23                Page 98-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #96 SR-55 NB Ramps / Del Amo Ave and Newport Avenue
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.665
Loss Time (sec):       5                Average Delay (sec/veh):        25.6
Optimal Cycle:        35                Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    1  0  3  0  1    2  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     413  109    69    20  497   728   269  163   155     8  223     4
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  413  109    69    20  497   728   269  163   155     8  223     4
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   413  109    69    20  497   728   269  163   155     8  223     4
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  413  109    69    20  497   728   269  163   155     8  223     4
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  413  109    69    20  497   728   269  163   155     8  223     4
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 0.86  0.86  0.95 0.91  0.85  0.92 0.88  0.88  0.95 0.95  0.95
Lanes:       2.00 2.00  1.00  1.00 3.00  1.00  2.00 1.03  0.97  1.00 1.96  0.04
Final Sat.:  3502 3257  1629  1805 5187  1615  3502 1715  1631  1805 3536    63
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.03  0.04  0.01 0.10  0.45  0.08 0.10  0.10  0.00 0.06  0.06
Crit Moves:  ****                        ****  ****                   ****
Green/Cycle: 0.18 0.59  0.59  0.15 0.56  0.68  0.12 0.20  0.20  0.01 0.09  0.09
Volume/Cap:  0.67 0.06  0.07  0.07 0.17  0.67  0.67 0.47  0.47  0.47 0.67  0.67
Delay/Veh:   41.1  8.9   8.9  36.4 10.6  11.0  46.5 35.8  35.8  68.7 48.6  48.6
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  41.1  8.9   8.9  36.4 10.6  11.0  46.5 35.8  35.8  68.7 48.6  48.6
LOS by Move:    D    A     A     D    B     B     D    D     D     E    D     D
HCM2k85thQ:    11    1     2     1    4    21     8    8     8     1    8     8
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:24                Page 99-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #97 Red Hill Ave and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.619
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        30               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Ovl            Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     122  449   128   203  861   403   397 1276   271   250 1213   170
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  122  449   128   203  861   403   397 1276   271   250 1213   170
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   122  449   128   203  861   403   397 1276   271   250 1213   170
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  122  449   128   203  861   403   397 1276   271   250 1213   170
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  122  449   128   203  861   403   397 1276   271   250 1213   170
OvlAdjVol:                                 205              210
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.09  0.08  0.06 0.17  0.25  0.12 0.25  0.17  0.08 0.24  0.11
OvlAdjV/S:                                 0.13             0.13
Crit Moves:  ****                  ****        ****                   ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:25                Page 100-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #98 Red Hill Ave and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):          0.580
Loss Time (sec):       5               Average Delay (sec/veh):       xxxxxx
Optimal Cycle:        28               Level Of Service:                    A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  1  0    2  0  2  1  0    1  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     118  716    97    20  949   191   239  407   300   152  543    96
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  118  716    97    20  949   191   239  407   300   152  543    96
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   118  716    97    20  949   191   239  407   300   152  543    96
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  118  716    97    20  949   191   239  407   300   152  543    96
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  118  716    97    20  949   191   239  407   300   152  543    96
OvlAdjVol:                                                                  86
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.52  0.48  2.00 2.50  0.50  1.00 2.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5936   764  3200 4196   804  1600 3400  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.12  0.13  0.01 0.23  0.24  0.15 0.12  0.19  0.05 0.11  0.06
OvlAdjV/S:                                                                  0.05
Crit Moves:  ****                      ****  ****                 ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:26                Page 101-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #99 Red Hill Ave and Dyer Rd / barranca Pkwy
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.577
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        27               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  4  0  1    2  0  4  0  1    2  0  3  1  0    2  0  4  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     184  458   151   184  809   106   126  758   300   522  583   114
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  184  458   151   184  809   106   126  758   300   522  583   114
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   184  458   151   184  809   106   126  758   300   522  583   114
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  184  458   151   184  809   106   126  758   300   522  583   114
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  184  458   151   184  809   106   126  758   300   522  583   114
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 4.00  1.00  2.00 4.00  1.00  2.00 3.00  1.00  2.00 4.00  1.00
Final Sat.:  3200 6800  1600  3200 6800  1600  3200 5100  1600  3200 6800  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.07  0.09  0.06 0.12  0.07  0.04 0.15  0.19  0.16 0.09  0.07
Crit Moves:  ****                 ****                 ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:27                Page 102-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #100 Red Hill Ave and Alton Pkwy
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.930
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       109               Level Of Service:                  E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  2  0  1    2  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     235  693   434   233 1059   170   185  574   574   335  284   159
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  235  693   434   233 1059   170   185  574   574   335  284   159
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   235  693   434   233 1059   170   185  574   574   335  284   159
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  235  693   434   233 1059   170   185  574   574   335  284   159
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  235  693   434   233 1059   170   185  574   574   335  284   159
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 2.00  1.00  2.00 1.00  1.00
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 3400  1600  3200 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.14  0.27  0.15 0.21  0.11  0.12 0.17  0.36  0.10 0.17  0.10
Crit Moves:             ****  ****                     ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:28                Page 103-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #101 Red Hill Ave and MacArthur Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.709
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ignore           Include          Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       83  742    13   205  529   485  1194  617   101    34  329   843
Growth Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    83  742    13   205  529   485  1194  617   101    34  329   843
User Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
PHF Adj:      1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
PHF Volume:     83  742    13   205  529     0  1194  617   101    34  329     0
Reduct Vol:      0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    83  742    13   205  529     0  1194  617   101    34  329     0
PCE Adj:      1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
MLF Adj:      1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
FinalVolume:    83  742    13   205  529     0  1194  617   101    34  329     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:     1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:   1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:        2.00 2.95  0.05  2.00 3.00  1.00  2.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:   3200 4917    83  3200 5100  1600  3200 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:      0.03 0.15  0.16  0.06 0.10  0.00  0.37 0.12  0.06  0.02 0.06  0.00
Crit Moves:             ****  ****            ****                 ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:28                Page 104-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #102 Red Hill Ave and Main St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):          0.733
Loss Time (sec):       5               Average Delay (sec/veh):       xxxxxx
Optimal Cycle:        41               Level Of Service:                    C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     201  691   449    78  365   126   139 1309   254   167  335    79
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  201  691   449    78  365   126   139 1309   254   167  335    79
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   201  691   449    78  365   126   139 1309   254   167  335    79
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  201  691   449    78  365   126   139 1309   254   167  335    79
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  201  691   449    78  365   126   139 1309   254   167  335    79
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 2.00  1.00  2.00 2.00  1.00  2.00 2.51  0.49  2.00 2.43  0.57
Final Sat.:  3200 3400  1600  3200 3400  1600  3200 4220   780  3200 4084   916
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.20  0.28  0.02 0.11  0.08  0.04 0.31  0.33  0.05 0.08  0.09
Crit Moves:             ****  ****                     ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:29              Page 105-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #103 I-5 SB Ramps and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.480
Loss Time (sec):       5               Average Delay (sec/veh):        17.8
Optimal Cycle:        24               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Ovl             Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  1    2  0  3  0  0    0  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   382    0    38   287  492     0     0 1027   300
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   382    0    38   287  492     0     0 1027   300
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   382    0    38   287  492     0     0 1027   300
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   382    0    38   287  492     0     0 1027   300
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   382    0    38   287  492     0     0 1027   300
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.92 1.00  0.85  0.92 0.91  1.00  1.00 0.88  0.88
Lanes:       0.00 0.00  0.00  2.00 0.00  1.00  2.00 3.00  0.00  0.00 2.32  0.68
Final Sat.:     0    0     0  3502    0  1615  3502 5187     0     0 3878  1133
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.11 0.00  0.02  0.08 0.09  0.00  0.00 0.26  0.26
Crit Moves:                   ****             ****                   ****
Green/Cycle: 0.00 0.00  0.00  0.23 0.00  0.40  0.17 0.72  0.00  0.00 0.55  0.55
Volume/Cap:  0.00 0.00  0.00  0.48 0.00  0.06  0.48 0.13  0.00  0.00 0.48  0.48
Delay/Veh:    0.0  0.0   0.0  34.0  0.0  18.6  38.1  4.3   0.0   0.0 13.8  13.8
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
```

```
AdjDel/Veh:   0.0  0.0   0.0  34.0  0.0  18.6  38.1  4.3   0.0   0.0 13.8  13.8
LOS by Move:    A    A     A     C    A     B     D    A     A     A    B     B
HCM2k85thQ:     0    0     0     9    0     1     7    3     0     0   14    14
********************************************************************************
Note: Queue reported is the number of cars per lane.
********************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:30                Page 106-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #104 Tustin Ranch Rd and Warner Ave
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):          0.530
Loss Time (sec):       5                Average Delay (sec/veh):       xxxxxx
Optimal Cycle:        25                Level Of Service:                    A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  1    2  0  3  0  0    0  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   174    0    22    27  357     0     0 2130   490
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   174    0    22    27  357     0     0 2130   490
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   174    0    22    27  357     0     0 2130   490
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   174    0    22    27  357     0     0 2130   490
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   174    0    22    27  357     0     0 2130   490
OvlAdjVol:                                                                 403
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 0.00  0.00  2.00 0.00  1.00  2.00 3.00  0.00  0.00 3.00  1.00
Final Sat.:     0    0     0  3200    0  1600  3200 5100     0     0 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.05 0.00  0.01  0.01 0.07  0.00  0.00 0.42  0.31
OvlAdjV/S:                                                                 0.25
Crit Moves:                    ****             ****                 ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:30                Page 107-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #105 Von Karman Ave and Barranca Pkwy
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):          0.930
Loss Time (sec):       5               Average Delay (sec/veh):       xxxxxx
Optimal Cycle:       108               Level Of Service:                    E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  1  1  0    2  0  2  0  2    2  0  3  0  1    2  0  4  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     375  497   298    98  960   420   247  928   310   917 1506    47
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  375  497   298    98  960   420   247  928   310   917 1506    47
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   375  497   298    98  960   420   247  928   310   917 1506    47
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  375  497   298    98  960   420   247  928   310   917 1506    47
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  375  497   298    98  960   420   247  928   310   917 1506    47
OvlAdjVol:                                173
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 1.25  0.75  2.00 2.00  2.00  2.00 3.00  1.00  2.00 4.00  1.00
Final Sat.:  3200 2101  1199  3200 3400  3200  3200 5100  1600  3200 6800  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.24  0.25  0.03 0.28  0.13  0.08 0.18  0.19  0.29 0.22  0.03
OvlAdjV/S:                                0.05
Crit Moves:  ****                 ****                    ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:31                Page 108-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #106 Red Hill Avenue and El Camino Real
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.640
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        32               Level Of Service:                  B
*******************************************************************************
Street Name:         Red Hill Avenue                   El Camino Real
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    1  0  2  1  0    1  0  1  0  1    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     222  569   183    20 1440    88    53  120   126   197  161    12
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  222  569   183    20 1440    88    53  120   126   197  161    12
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   222  569   183    20 1440    88    53  120   126   197  161    12
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  222  569   183    20 1440    88    53  120   126   197  161    12
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  222  569   183    20 1440    88    53  120   126   197  161    12
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       2.00 3.00  1.00  1.00 2.83  0.17  1.00 1.00  1.00  1.00 0.93  0.07
Final Sat.:  3200 5100  1600  1600 4724   276  1600 1700  1600  1600 1489   111
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.11  0.11  0.01 0.30  0.32  0.03 0.07  0.08  0.12 0.11  0.11
Crit Moves:  ****                     ****                ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:31                Page 109-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #107 Red Hill Avenue and I-5 NB Ramps
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.631
Loss Time (sec):       5               Average Delay (sec/veh):        20.1
Optimal Cycle:        32               Level Of Service:                 C
*******************************************************************************
Street Name:         Red Hill Avenue                    I-5 NB Ramps
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  0    0  0  3  0  1    0  0  0  0  0    2  0  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     266  883     0     0 1217   458     0    0     0   238    0   272
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  266  883     0     0 1217   458     0    0     0   238    0   272
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   266  883     0     0 1217   458     0    0     0   238    0   272
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  266  883     0     0 1217   458     0    0     0   238    0   272
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  266  883     0     0 1217   458     0    0     0   238    0   272
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.85  1.00 1.00  1.00  0.60 1.00  0.85
Lanes:       1.00 3.00  0.00  0.00 3.00  1.00  0.00 0.00  0.00  2.00 0.00  1.00
Final Sat.:  1805 5187     0     0 5187  1615     0    0     0  2271    0  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.17  0.00  0.00 0.23  0.28  0.00 0.00  0.00  0.10 0.00  0.17
Crit Moves:  ****                     ****                                 ****
Green/Cycle: 0.23 0.68  0.00  0.00 0.45  0.45  0.00 0.00  0.00  0.27 0.00  0.27
Volume/Cap:  0.63 0.25  0.00  0.00 0.52  0.63  0.00 0.00  0.00  0.39 0.00  0.63
Delay/Veh:   37.5  6.1   0.0   0.0 20.0  23.0   0.0  0.0   0.0  30.4  0.0  35.3
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
```

AdjDel/Veh:	37.5	6.1	0.0	0.0	20.0	23.0	0.0	0.0	0.0	30.4	0.0	35.3
LOS by Move:	D	A	A	A	C	C	A	A	A	C	A	D
HCM2k85thQ:	13	6	0	0	15	17	0	0	0	5	0	13

****

Note: Queue reported is the number of cars per lane.

****

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:32              Page 110-1
-------------------------------------------------------------------------------
                        Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #108 Red Hill Avenue and I-5 SB Ramps
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.824
Loss Time (sec):       5               Average Delay (sec/veh):        24.7
Optimal Cycle:        60               Level Of Service:                  C
*******************************************************************************
Street Name:         Red Hill Avenue                    I-5 SB Ramps
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  1    1  0  3  0  0    0  1  0  0  1    0  0  0  0  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:       0 1191   527   392 1125     0   210    5   386     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1191   527   392 1125     0   210    5   386     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1191   527   392 1125     0   210    5   386     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1191   527   392 1125     0   210    5   386     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1191   527   392 1125     0   210    5   386     0    0     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  0.85  0.95 0.91  1.00  0.95 0.95  0.85  1.00 1.00  1.00
Lanes:       0.00 4.00  1.00  1.00 3.00  0.00  0.98 0.02  1.00  0.00 0.00  0.00
Final Sat.:     0 6916  1615  1805 5187     0  1759   42  1615     0    0     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.17  0.33  0.22 0.22  0.00  0.12 0.12  0.24  0.00 0.00  0.00
Crit Moves:             ****  ****                         ****
Green/Cycle: 0.00 0.40  0.40  0.26 0.66  0.00  0.29 0.29  0.29  0.00 0.00  0.00
Volume/Cap:  0.00 0.43  0.82  0.82 0.33  0.00  0.41 0.41  0.82  0.00 0.00  0.00
Delay/Veh:    0.0 22.1  35.6  45.8  7.4   0.0  29.1 29.1  44.4   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 22.1  35.6  45.8  7.4   0.0  29.1 29.1  44.4   0.0  0.0   0.0
LOS by Move:    A    C     D     D    A     A     C    C     D     A    A     A
HCM2k85thQ:     0   11    25    20    8     0     9    9    20     0    0     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:33              Page 111-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #109 Red Hill Avenue and Nisson Road
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.655
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        33               Level Of Service:                  B
******************************************************************************
Street Name:         Red Hill Avenue                    Nisson Road
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  1  0    1  0  2  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      16 1244    23   169 1274   134   242   59    48    49   26   215
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   16 1244    23   169 1274   134   242   59    48    49   26   215
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    16 1244    23   169 1274   134   242   59    48    49   26   215
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   16 1244    23   169 1274   134   242   59    48    49   26   215
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   16 1244    23   169 1274   134   242   59    48    49   26   215
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 3.93  0.07  1.00 2.71  0.29  1.00 0.55  0.45  1.00 0.11  0.89
Final Sat.:  1600 6584   116  1600 4543   457  1600  882   718  1600  173  1427
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.19  0.20  0.11 0.28  0.29  0.15 0.07  0.07  0.03 0.15  0.15
Crit Moves:             ****  ****             ****                     ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:33                Page 112-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #110 Red Hill Avenue and Walnut Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):          0.643
Loss Time (sec):       5               Average Delay (sec/veh):       xxxxxx
Optimal Cycle:        32               Level Of Service:                    B
*******************************************************************************
Street Name:         Red Hill Avenue                   Walnut Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    2  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     135  525    99   117 1180   132    99  247   244   263  348   166
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  135  525    99   117 1180   132    99  247   244   263  348   166
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   135  525    99   117 1180   132    99  247   244   263  348   166
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  135  525    99   117 1180   132    99  247   244   263  348   166
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  135  525    99   117 1180   132    99  247   244   263  348   166
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.05  1.00
Lanes:       1.00 2.52  0.48  1.00 2.70  0.30  1.00 1.01  0.99  2.00 1.35  0.65
Final Sat.:  1600 4238   762  1600 4517   483  1600 1710  1590  3200 2267  1033
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.12  0.13  0.07 0.26  0.27  0.06 0.14  0.15  0.08 0.15  0.16
Crit Moves:  ****                 ****            ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:34                Page 113-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #111 Red Hill Avenue and Valencia Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.677
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        35               Level Of Service:                  B
*******************************************************************************
Street Name:         Red Hill Avenue                  Valencia Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  1  0    1  0  2  1  0    1  0  1  0  1    2  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     128  542   175   132 1132    76    48  335   130   315  433   153
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  128  542   175   132 1132    76    48  335   130   315  433   153
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   128  542   175   132 1132    76    48  335   130   315  433   153
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  128  542   175   132 1132    76    48  335   130   315  433   153
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  128  542   175   132 1132    76    48  335   130   315  433   153
OvlAdjVol:                21                                                21
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 3.02  0.98  1.00 2.81  0.19  1.00 1.00  1.00  2.00 1.00  1.00
Final Sat.:  1600 5138  1562  1600 4698   302  1600 1700  1600  3200 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.11  0.11  0.08 0.24  0.25  0.03 0.20  0.08  0.10 0.25  0.10
OvlAdjV/S:                0.01                                              0.01
Crit Moves:  ****                      ****        ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:34              Page 114-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #112 Tustin Ranch Road and Warner Avenue North
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.459
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        22               Level Of Service:                  A
*******************************************************************************
Street Name:        Tustin Ranch Road               Warner Avenue North
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  3  0  1    2  0  3  0  0    0  0  0  0  0    3  0  0  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  396   383   412 1165     0     0    0     0   865    0   255
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  396   383   412 1165     0     0    0     0   865    0   255
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  396   383   412 1165     0     0    0     0   865    0   255
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  396   383   412 1165     0     0    0     0   865    0   255
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  396   383   412 1165     0     0    0     0   865    0   255
OvlAdjVol:               95                                                  0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 3.00  1.00  2.00 3.00  0.00  0.00 0.00  0.00  3.00 0.00  2.00
Final Sat.:     0 5100  1600  3200 5100     0     0    0     0  4800    0  3200
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.08  0.24  0.13 0.23  0.00  0.00 0.00  0.00  0.18 0.00  0.08
OvlAdjV/S:              0.06                                                0.00
Crit Moves:  ****               ****                          ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:35              Page 115-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #113 Tustin Ranch Road and Walnut Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.313
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Street Name:        Tustin Ranch Road                 Walnut Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Ovl              Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  1  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     103  630   314  1123 3139   418   856 1118   675   176  260   219
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  103  630   314  1123 3139   418   856 1118   675   176  260   219
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   103  630   314  1123 3139   418   856 1118   675   176  260   219
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  103  630   314  1123 3139   418   856 1118   675   176  260   219
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  103  630   314  1123 3139   418   856 1118   675   176  260   219
OvlAdjVol:               226               0                                 0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 1.25  0.75  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 2095  1205  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.12  0.20  0.35 0.62  0.26  0.27 0.53  0.56  0.06 0.08  0.14
OvlAdjV/S:               0.14              0.00                                0.00
Crit Moves:  ****                 ****                    ****  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:36              Page 116-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #114 SR-55 SB Ramps and Irvine Boulevard
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.176
Loss Time (sec):       5               Average Delay (sec/veh):        55.4
Optimal Cycle:       180               Level Of Service:                  E
******************************************************************************
Street Name:          SR-55 SB Ramps                  Irvine Boulevard
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected         Permitted       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    1  0  1! 0  1    0  0  2  1  0    1  0  3  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0    64    0    70     0  719  1290   480 1201     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0    64    0    70     0  719  1290   480 1201     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0    64    0    70     0  719  1290   480 1201     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0    64    0    70     0  719  1290   480 1201     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0    64    0    70     0  719  1290   480 1201     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.88 1.00  0.79  1.00 0.82  0.82  0.95 0.91  1.00
Lanes:       0.00 0.00  0.00  1.45 0.00  1.55  0.00 2.00  1.00  1.00 3.00  0.00
Final Sat.:     0    0     0  2426    0  2321     0 3126  1563  1805 5187     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.03 0.00  0.03  0.00 0.23  0.83  0.27 0.23  0.00
Crit Moves:                   ****                          ****  ****
Green/Cycle: 0.00 0.00  0.00  0.02 0.00  0.04  0.00 0.70  0.70  0.23 0.93  0.00
Volume/Cap:  0.00 0.00  0.00  0.89 0.00  0.69  0.00 0.33  1.18  1.18 0.25  0.00
Delay/Veh:    0.0  0.0   0.0  91.2  0.0  56.8   0.0  5.8 100.6 140.8  0.4   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0  91.2  0.0  56.8   0.0  5.8 100.6 140.8  0.4   0.0
LOS by Move:    A    A     A     F    A     E     A    A     F     F    A     A
```

```
HCM2k85thQ:     0    0     0     5    0     4     0    7    95    38    2     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP AM Peak Hour       Thu Oct 22, 2020 14:29:36              Page 117-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #115 SR-55 NB Ramps and Irvine Boulevard
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.824
Loss Time (sec):       5               Average Delay (sec/veh):        20.3
Optimal Cycle:        60               Level Of Service:                  C
*******************************************************************************
Street Name:          SR-55 NB Ramps                  Irvine Boulevard
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:         Permitted       Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1! 0  1    0  0  0  0  0    1  0  3  0  0    0  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     395    0   379     0    0     0   204  485     0     0 1133   788
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  395    0   379     0    0     0   204  485     0     0 1133   788
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   395    0   379     0    0     0   204  485     0     0 1133   788
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  395    0   379     0    0     0   204  485     0     0 1133   788
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  395    0   379     0    0     0   204  485     0     0 1133   788
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.75 1.00  0.74  1.00 1.00  1.00  0.95 0.91  1.00  1.00 0.85  0.85
Lanes:       1.51 0.00  1.49  0.00 0.00  0.00  1.00 3.00  0.00  0.00 2.00  1.00
Final Sat.:  2138    0  2097     0    0     0  1805 5187     0     0 3247  1624
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.18 0.00  0.18  0.00 0.00  0.00  0.11 0.09  0.00  0.00 0.35  0.49
Crit Moves:  ****                             ****                       ****
Green/Cycle: 0.22 0.00  0.45  0.00 0.00  0.00  0.14 0.73  0.00  0.00 0.59  0.59
Volume/Cap:  0.83 0.00  0.40  0.00 0.00  0.00  0.82 0.13  0.00  0.00 0.59  0.82
Delay/Veh:   43.0  0.0  18.8   0.0  0.0   0.0  61.5  4.2   0.0   0.0 13.3  18.9
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  43.0  0.0  18.8   0.0  0.0   0.0  61.5  4.2   0.0   0.0 13.3  18.9
LOS by Move:    D    A     B     A    A     A     E    A     A     A    B     B
HCM2k85thQ:    15    0     8     0    0     0    13    3     0     0   18    33
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

APPENDIX D.6

ANALYSIS WORKSHEETS –
2045 WP (PM Peak Hour)

Santa Ana Circulation Element

Scenario Report

Scenario:	2045 WP PM Peak Hour
Command:	Default Command
Volume:	2045 PM
Geometry:	SACE
Impact Fee:	Default Impact Fee
Trip Generation:	Default Trip Generation
Trip Distribution:	Default Trip Distribution
Paths:	Default Path
Routes:	Default Route
Configuration:	Default Configuration

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

2045 WP PM Peak Hour Thu Oct 22, 2020 14:44:05 Page 2-1

Santa Ana Circulation Element

Impact Analysis Report
Level Of Service

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in V/C
# 1 Euclid St and 1st St	C	xxxxx	0.787	C	xxxxx	0.787	+ 0.000 V/C
# 2 Euclid St and McFadden Ave	C	xxxxx	0.793	C	xxxxx	0.793	+ 0.000 V/C
# 3 Euclid St and Edinger Ave	D	xxxxx	0.860	D	xxxxx	0.860	+ 0.000 V/C
# 4 Newhope St and Hazard Ave	A	xxxxx	0.516	A	xxxxx	0.516	+ 0.000 V/C
# 5 Newhope St and McFadden Ave	B	xxxxx	0.684	B	xxxxx	0.684	+ 0.000 V/C
# 6 Harbor Blvd and SR-22 WB Off-R	C	23.8	0.769	C	23.8	0.769	+ 0.000 D/V
# 7 Trask Avenue and SR-22 EB On-R	B	11.0	0.381	B	11.0	0.381	+ 0.000 D/V
# 8 Harbor Blvd and Westminster Av	D	xxxxx	0.842	D	xxxxx	0.842	+ 0.000 V/C
# 9 Harbor Blvd and 1st St	C	xxxxx	0.753	C	xxxxx	0.753	+ 0.000 V/C
# 10 Harbor Blvd and McFadden Ave	C	xxxxx	0.711	C	xxxxx	0.711	+ 0.000 V/C
# 11 Harbor Blvd and Edinger Ave	C	xxxxx	0.722	C	xxxxx	0.722	+ 0.000 V/C
# 12 Harbor Blvd and Warner Ave	F	xxxxx	1.539	F	xxxxx	1.539	+ 0.000 V/C
# 13 Harbor Blvd and Segerstrom Ave	E	xxxxx	0.934	E	xxxxx	0.934	+ 0.000 V/C
# 14 MacArthur Blvd and Hyland Ave	D	xxxxx	0.891	D	xxxxx	0.891	+ 0.000 V/C
# 15 MacArthur Blvd and Harbor Blvd	C	xxxxx	0.788	C	xxxxx	0.788	+ 0.000 V/C
# 16 Harbor Blvd and Sunflower Ave	C	xxxxx	0.711	C	xxxxx	0.711	+ 0.000 V/C
# 17 Harbor Blvd and I-405 NB Off-R	B	18.8	0.710	B	18.8	0.710	+ 0.000 D/V
# 18 Harbor Blvd and I-405 SB Off-R	B	18.1	0.673	B	18.1	0.673	+ 0.000 D/V
# 19 Fairview St and Civic Center D	C	xxxxx	0.707	C	xxxxx	0.707	+ 0.000 V/C
# 20 Fairview St and 1st St	D	xxxxx	0.894	D	xxxxx	0.894	+ 0.000 V/C
# 21 Fairview St and McFadden Ave	B	xxxxx	0.684	B	xxxxx	0.684	+ 0.000 V/C
# 22 Fairview St and Edinger Ave	E	xxxxx	0.920	E	xxxxx	0.920	+ 0.000 V/C
# 23 Fairview St and Warner Ave	D	xxxxx	0.805	D	xxxxx	0.805	+ 0.000 V/C
# 24 Fairview St and MacArthur Blvd	C	xxxxx	0.761	C	xxxxx	0.761	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
# 25 Fairview Rd and Sunflower Ave	B	xxxxx	0.691	B	xxxxx	0.691	+ 0.000 V/C
# 26 Greenville St and Edinger Ave	B	xxxxx	0.647	B	xxxxx	0.647	+ 0.000 V/C
# 27 Greenville St and Segerstrom A	C	xxxxx	0.797	C	xxxxx	0.797	+ 0.000 V/C
# 28 Raitt St and McFadden Ave	B	xxxxx	0.676	B	xxxxx	0.676	+ 0.000 V/C
# 29 Raitt St and Edinger Ave	E	xxxxx	0.988	E	xxxxx	0.988	+ 0.000 V/C
# 30 Bear St and MacArthur Blvd	E	xxxxx	0.904	E	xxxxx	0.904	+ 0.000 V/C
# 31 Bristol St and 17th St	D	xxxxx	0.811	D	xxxxx	0.811	+ 0.000 V/C
# 32 Bristol St and Civic Center Dr	D	xxxxx	0.898	D	xxxxx	0.898	+ 0.000 V/C
# 33 Bristol St and Santa Ana Blvd	C	xxxxx	0.732	C	xxxxx	0.732	+ 0.000 V/C
# 34 Bristol St and 1st St	E	xxxxx	0.972	E	xxxxx	0.972	+ 0.000 V/C
# 35 Bristol St and McFadden Ave	D	xxxxx	0.890	D	xxxxx	0.890	+ 0.000 V/C
# 36 Bristol St and Warner Ave	D	xxxxx	0.871	D	xxxxx	0.871	+ 0.000 V/C
# 37 Bristol St and Segerstrom Ave	E	xxxxx	0.915	E	xxxxx	0.915	+ 0.000 V/C
# 38 Bristol St and Alton Ave	A	xxxxx	0.583	A	xxxxx	0.583	+ 0.000 V/C
# 39 Bristol St and MacArthur Blvd	C	xxxxx	0.796	C	xxxxx	0.796	+ 0.000 V/C
# 40 Bristol St and Sunflower Ave	C	xxxxx	0.744	C	xxxxx	0.744	+ 0.000 V/C
# 41 Bristol St and I-405 NB Ramps	C	29.0	0.854	C	29.0	0.854	+ 0.000 D/V
# 42 Bristol St and I-405 SB Ramps	B	18.2	0.631	B	18.2	0.631	+ 0.000 D/V
# 43 Flower St and Santa Ana Blvd	B	xxxxx	0.668	B	xxxxx	0.668	+ 0.000 V/C
# 44 Flower St and 1st St	F	xxxxx	1.215	F	xxxxx	1.215	+ 0.000 V/C
# 45 Flower St and McFadden Ave	E	xxxxx	0.968	E	xxxxx	0.968	+ 0.000 V/C
# 46 Flower St and Segerstrom Ave	E	xxxxx	0.916	E	xxxxx	0.916	+ 0.000 V/C
# 47 Flower St and MacArthur Blvd	E	xxxxx	0.908	E	xxxxx	0.908	+ 0.000 V/C
# 48 Main St and La Veta Ave	C	xxxxx	0.764	C	xxxxx	0.764	+ 0.000 V/C
# 49 Main St and Mainplace Dr / Mem	A	xxxxx	0.504	A	xxxxx	0.504	+ 0.000 V/C
# 50 Main St and 17th St	C	xxxxx	0.799	C	xxxxx	0.799	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
# 51 Main St and Civic Center Dr	D	xxxxx	0.856	D	xxxxx	0.856	+ 0.000 V/C
# 52 Main St and Santa Ana Blvd	C	xxxxx	0.700	C	xxxxx	0.700	+ 0.000 V/C
# 53 Main St and 4th St	A	xxxxx	0.472	A	xxxxx	0.472	+ 0.000 V/C
# 54 Main St and 1st St	D	xxxxx	0.803	D	xxxxx	0.803	+ 0.000 V/C
# 55 Main St and McFadden Ave	E	xxxxx	0.935	E	xxxxx	0.935	+ 0.000 V/C
# 56 Main St and Edinger Ave	E	xxxxx	0.977	E	xxxxx	0.977	+ 0.000 V/C
# 57 Main St and MacArthur Blvd	C	xxxxx	0.781	C	xxxxx	0.781	+ 0.000 V/C
# 58 Penn Wy and 17th St	C	20.3	0.790	C	20.3	0.790	+ 0.000 D/V
# 59 I-5 NB Off Ramps/17th Street	C	20.3	0.630	C	20.3	0.630	+ 0.000 D/V
# 60 Penn Wy and I-5 SB Ramps	C	22.8	0.433	C	22.8	0.433	+ 0.000 D/V
# 61 Santiago St and Civic Center D	D	27.6	0.896	D	27.6	0.896	+ 0.000 V/C
# 62 Santiago St and Santa Ana Blvd	F	xxxxx	1.411	F	xxxxx	1.411	+ 0.000 V/C
# 63 Standard Ave and 4th St	F	xxxxx	1.341	F	xxxxx	1.341	+ 0.000 V/C
# 64 Standard Ave and 1st St	F	xxxxx	1.484	F	xxxxx	1.484	+ 0.000 V/C
# 65 Standard Ave and Mcfadden Ave	C	xxxxx	0.769	C	xxxxx	0.769	+ 0.000 V/C
# 66 Halladay St and Warner Ave	D	xxxxx	0.824	D	xxxxx	0.824	+ 0.000 V/C
# 67 Halladay St and Dyer Rd	E	xxxxx	0.945	E	xxxxx	0.945	+ 0.000 V/C
# 68 SR-55 SB Ramps and MacArthur B	B	18.4	0.602	B	18.4	0.602	+ 0.000 D/V
# 69 SR-55 NB Ramps and MacArthur B	B	16.2	0.511	B	16.2	0.511	+ 0.000 D/V
# 70 SR-55 SB Ramps and Dyer Rd	C	26.5	0.679	C	26.5	0.679	+ 0.000 D/V
# 71 Glassell St and La Veta Ave	C	xxxxx	0.766	C	xxxxx	0.766	+ 0.000 V/C
# 72 Glassell St and SR-22 WB Ramps	C	33.4	0.943	C	33.4	0.943	+ 0.000 D/V
# 73 Grand Ave / Glassell St and SR	C	31.8	0.927	C	31.8	0.927	+ 0.000 D/V
# 74 Grand Ave and Fairhaven Ave	B	xxxxx	0.665	B	xxxxx	0.665	+ 0.000 V/C
# 75 Grand Ave and Santa Clara Ave	C	xxxxx	0.731	C	xxxxx	0.731	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Del/ Veh	V/ C	Future LOS	Del/ Veh	V/ C	Change in
# 76 Grand Ave and 17th St	D	xxxxx	0.854	D	xxxxx	0.854	+ 0.000 V/C
# 77 Grand Ave and I-5 NB Ramps	B	11.3	0.764	B	11.3	0.764	+ 0.000 D/V
# 78 Grand Ave and Santa Ana Blvd	C	28.5	0.827	C	28.5	0.827	+ 0.000 D/V
# 79 Grand Ave and 1st St	C	xxxxx	0.718	C	xxxxx	0.718	+ 0.000 V/C
# 80 Grand Ave and Chestnut Ave	C	xxxxx	0.783	C	xxxxx	0.783	+ 0.000 V/C
# 81 Grand Ave and McFadden Ave	D	xxxxx	0.813	D	xxxxx	0.813	+ 0.000 V/C
# 82 Grand Ave and Edinger Ave	F	xxxxx	1.079	F	xxxxx	1.079	+ 0.000 V/C
# 83 Grand Ave and Warner Ave	D	xxxxx	0.899	D	xxxxx	0.899	+ 0.000 V/C
# 84 SR-55 NB Ramps and Dyer Rd	A	6.0	0.349	A	6.0	0.349	+ 0.000 D/V
# 85 Cambridge St and La Veta Ave	D	26.1	0.938	D	26.1	0.938	+ 0.000 V/C
# 86 Cambridge St and Fairhaven Ave	A	xxxxx	0.531	A	xxxxx	0.531	+ 0.000 V/C
# 87 Mabury St and 1st Street	C	27.2	0.752	C	27.2	0.752	+ 0.000 D/V
# 88 Tustin St and La Veta Ave	A	xxxxx	0.344	A	xxxxx	0.344	+ 0.000 V/C
# 89 Tustin St and SR-22 WB On-Ramp	A	7.7	0.321	A	7.7	0.321	+ 0.000 D/V
# 90 Tustin St and SR-22 EB Off-Ram	C	23.3	0.625	C	23.3	0.625	+ 0.000 D/V
# 91 Tustin Ave and Fairhaven Ave	C	xxxxx	0.757	C	xxxxx	0.757	+ 0.000 V/C
# 92 Tustin Ave and Santa Clara Ave	C	xxxxx	0.779	C	xxxxx	0.779	+ 0.000 V/C
# 93 Tustin Ave and 17th St	C	xxxxx	0.741	C	xxxxx	0.741	+ 0.000 V/C
# 94 Tustin Ave and 4th St	C	xxxxx	0.784	C	xxxxx	0.784	+ 0.000 V/C
# 95 SR-55 SB Ramps / Auto Mall Dr	C	25.4	0.687	C	25.4	0.687	+ 0.000 D/V
# 96 SR-55 NB Ramps / Del Amo Ave a	D	46.2	0.951	D	46.2	0.951	+ 0.000 D/V
# 97 Red Hill Ave and Edinger Ave	D	xxxxx	0.865	D	xxxxx	0.865	+ 0.000 V/C
# 98 Red Hill Ave and Warner Ave	E	xxxxx	0.952	E	xxxxx	0.952	+ 0.000 V/C
# 99 Red Hill Ave and Dyer Rd / bar	A	xxxxx	0.591	A	xxxxx	0.591	+ 0.000 V/C
#100 Red Hill Ave and Alton Pkwy	F	xxxxx	1.494	F	xxxxx	1.494	+ 0.000 V/C
#101 Red Hill Ave and MacArthur Blv	C	xxxxx	0.722	C	xxxxx	0.722	+ 0.000 V/C

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Intersection	Base LOS	Base Del/ Veh	Base V/ C	Future LOS	Future Del/ Veh	Future V/ C	Change in
#102 Red Hill Ave and Main St	D	xxxxx	0.836	D	xxxxx	0.836	+ 0.000 V/C
#103 I-5 SB Ramps and Santa Ana Blv	B	19.9	0.444	B	19.9	0.444	+ 0.000 D/V
#104 Tustin Ranch Rd and Warner Ave	B	xxxxx	0.671	B	xxxxx	0.671	+ 0.000 V/C
#105 Von Karman Ave and Barranca Pk	F	xxxxx	1.284	F	xxxxx	1.284	+ 0.000 V/C
#106 Red Hill Avenue and El Camino	B	xxxxx	0.696	B	xxxxx	0.696	+ 0.000 V/C
#107 Red Hill Avenue and I-5 NB Ram	C	23.6	0.623	C	23.6	0.623	+ 0.000 D/V
#108 Red Hill Avenue and I-5 SB Ram	C	21.8	0.713	C	21.8	0.713	+ 0.000 D/V
#109 Red Hill Avenue and Nisson Roa	C	xxxxx	0.715	C	xxxxx	0.715	+ 0.000 V/C
#110 Red Hill Avenue and Walnut Ave	C	xxxxx	0.749	C	xxxxx	0.749	+ 0.000 V/C
#111 Red Hill Avenue and Valencia A	C	xxxxx	0.753	C	xxxxx	0.753	+ 0.000 V/C
#112 Tustin Ranch Road and Warner A	E	xxxxx	0.924	E	xxxxx	0.924	+ 0.000 V/C
#113 Tustin Ranch Road and Walnut A	F	xxxxx	1.772	F	xxxxx	1.772	+ 0.000 V/C
#114 SR-55 SB Ramps and Irvine Boul	C	26.5	0.929	C	26.5	0.929	+ 0.000 D/V
#115 SR-55 NB Ramps and Irvine Boul	C	22.3	0.841	C	22.3	0.841	+ 0.000 D/V

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:09                  Page 3-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #1 Euclid St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.787
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        49               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include        WideBypass       WideBypass
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     165 1532   123   137  781   148   201  641   100   168  702   168
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  165 1532   123   137  781   148   201  641   100   168  702   168
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   165 1532   123   137  781   148   201  641   100   168  702   168
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  165 1532   123   137  781   148   201  641   100   168  702   168
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  165 1532   123   137  781   148   201  641   100   168  702   168
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.78  0.22  1.00 2.52  0.48  1.00 2.60  0.40  1.00 2.42  0.58
Final Sat.:  1600 4643   357  1600 4235   765  1600 4352   648  1600 4073   927
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.33  0.34  0.09 0.18  0.19  0.13 0.15  0.15  0.11 0.17  0.18
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:09                  Page 4-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #2 Euclid St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.793
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        51               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     248 2020   130    87 1070   130   134  307   136    86  359   166
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  248 2020   130    87 1070   130   134  307   136    86  359   166
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   248 2020   130    87 1070   130   134  307   136    86  359   166
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  248 2020   130    87 1070   130   134  307   136    86  359   166
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  248 2020   130    87 1070   130   134  307   136    86  359   166
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.82  0.18  1.00 2.68  0.32  1.00 1.39  0.61  1.00 1.37  0.63
Final Sat.:  1600 4710   290  1600 4480   520  1600 2318   982  1600 2288  1012
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.16 0.43  0.45  0.05 0.24  0.25  0.08 0.13  0.14  0.05 0.16  0.16
Crit Moves:             ****  ****            ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:10                  Page 5-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #3 Euclid St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.860
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        69               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  2  0  1    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     551 1648   117   136  897   228   121  467   140   119 1103   179
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  551 1648   117   136  897   228   121  467   140   119 1103   179
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   551 1648   117   136  897   228   121  467   140   119 1103   179
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  551 1648   117   136  897   228   121  467   140   119 1103   179
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  551 1648   117   136  897   228   121  467   140   119 1103   179
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.80  0.20  2.00 2.39  0.61  1.00 2.00  1.00  1.00 2.00  1.00
Final Sat.:  3200 4682   318  3200 4027   973  1600 3400  1600  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.17 0.35  0.37  0.04 0.22  0.23  0.08 0.14  0.09  0.07 0.32  0.11
Crit Moves:             ****  ****            ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:11                  Page 6-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #4 Newhope St and Hazard Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.516
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        24               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     102 1129    44    45  954   114    33   66    40     8   51    15
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  102 1129    44    45  954   114    33   66    40     8   51    15
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   102 1129    44    45  954   114    33   66    40     8   51    15
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  102 1129    44    45  954   114    33   66    40     8   51    15
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  102 1129    44    45  954   114    33   66    40     8   51    15
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 1.92  0.08  1.00 1.79  0.21  1.00 0.62  0.38  1.00 0.77  0.23
Final Sat.:  1600 3180   120  1600 2958   342  1600  996   604  1600 1236   364
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.36  0.37  0.03 0.32  0.33  0.02 0.07  0.07  0.01 0.04  0.04
Crit Moves:             ****  ****                ****        ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:12                  Page 7-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #5 Newhope St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.684
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     188 1009   177   121  539   104    45  273    40    72  398   113
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  188 1009   177   121  539   104    45  273    40    72  398   113
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   188 1009   177   121  539   104    45  273    40    72  398   113
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  188 1009   177   121  539   104    45  273    40    72  398   113
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  188 1009   177   121  539   104    45  273    40    72  398   113
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 1.70  0.30  1.00 1.68  0.32  1.00 1.74  0.26  1.00 1.56  0.44
Final Sat.:  1600 2822   478  1600 2782   518  1600 2891   409  1600 2592   708
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.36  0.37  0.08 0.19  0.20  0.03 0.09  0.10  0.05 0.15  0.16
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:12                  Page 8-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #6 Harbor Blvd and SR-22 WB Off-Ramp / Banner Dr
******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.769
Loss Time (sec):       5                Average Delay (sec/veh):        23.8
Optimal Cycle:        48                Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  0    0  0  2  1  0    0  0  1! 0  0    1  1  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     103 2324     0     0 1823    59   102    0    86   558   75   160
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  103 2324     0     0 1823    59   102    0    86   558   75   160
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   103 2324     0     0 1823    59   102    0    86   558   75   160
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  103 2324     0     0 1823    59   102    0    86   558   75   160
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  103 2324     0     0 1823    59   102    0    86   558   75   160
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.91  0.91 1.00  0.91  0.96 0.96  0.85
Lanes:       1.00 3.00  0.00  0.00 2.91  0.09  0.54 0.00  0.46  1.76 0.24  1.00
Final Sat.:  1805 5187     0     0 4999   162   942    0   794  3209  431  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.45  0.00  0.00 0.36  0.36  0.11 0.00  0.11  0.17 0.17  0.10
Crit Moves:       ****        ****             ****                   ****
Green/Cycle: 0.08 0.58  0.00  0.00 0.50  0.50  0.14 0.00  0.14  0.23 0.23  0.23
Volume/Cap:  0.72 0.77  0.00  0.00 0.72  0.72  0.77 0.00  0.77  0.77 0.77  0.44
Delay/Veh:   61.7 17.0   0.0   0.0 20.4  20.4  55.1  0.0  55.1  40.7 40.7  34.1
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  61.7 17.0   0.0   0.0 20.4  20.4  55.1  0.0  55.1  40.7 40.7  34.1
LOS by Move:    E    B     A     A    C     C     E    A     E     D    D     C
HCM2k85thQ:     7   30     0     0   26    26    11    0    11    17   17     7
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:14                  Page 9-1
-------------------------------------------------------------------------------
                        Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #7 Trask Avenue and SR-22 EB On-Ramp
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.381
Loss Time (sec):       5                Average Delay (sec/veh):        11.0
Optimal Cycle:        20                Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    0  0  0  0  0    2  0  1  0  0    0  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0     0    0     0   785  588     0     0  449    42
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0     0    0     0   785  588     0     0  449    42
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0     0    0     0   785  588     0     0  449    42
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0     0    0     0   785  588     0     0  449    42
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0     0    0     0   785  588     0     0  449    42
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  0.92 1.00  1.00  1.00 0.94  0.94
Lanes:       0.00 0.00  0.00  0.00 0.00  0.00  2.00 1.00  0.00  0.00 1.83  0.17
Final Sat.:     0    0     0     0    0     0  3502 1900     0     0 3258   305
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.00 0.00  0.00  0.22 0.31  0.00  0.00 0.14  0.14
Crit Moves:                                     ****                   ****
Green/Cycle: 0.00 0.00  0.00  0.00 0.00  0.00  0.59 0.95  0.00  0.00 0.36  0.36
Volume/Cap:  0.00 0.00  0.00  0.00 0.00  0.00  0.38 0.33  0.00  0.00 0.38  0.38
Delay/Veh:    0.0  0.0   0.0   0.0  0.0   0.0  11.0  0.3   0.0   0.0 23.8  23.8
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0   0.0  0.0   0.0  11.0  0.3   0.0   0.0 23.8  23.8
LOS by Move:    A    A     A     A    A     A     B    A     A     A    C     C
HCM2k85thQ:     0    0     0     0    0     0    10    3     0     0    9     9
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:15                Page 10-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #8 Harbor Blvd and Westminster Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.842
Loss Time (sec):       0               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       145               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  2  1  0    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     222 1106   262   254 1752   202   227  808    39   294 1018   231
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  222 1106   262   254 1752   202   227  808    39   294 1018   231
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   222 1106   262   254 1752   202   227  808    39   294 1018   231
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  222 1106   262   254 1752   202   227  808    39   294 1018   231
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  222 1106   262   254 1752   202   227  808    39   294 1018   231
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 2.86  0.14  1.00 3.00  1.00
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 4779   221  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.22  0.16  0.16 0.34  0.13  0.14 0.17  0.18  0.18 0.20  0.14
Crit Moves:  ****               ****                   ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:15                Page 11-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #9 Harbor Blvd and 1st St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.753
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        44               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     280 1446   160   240 1053   142   192  784   148   185  865   141
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  280 1446   160   240 1053   142   192  784   148   185  865   141
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   280 1446   160   240 1053   142   192  784   148   185  865   141
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  280 1446   160   240 1053   142   192  784   148   185  865   141
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  280 1446   160   240 1053   142   192  784   148   185  865   141
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  2.00 2.52  0.48  2.00 2.58  0.42
Final Sat.:  1600 5100  1600  1600 5100  1600  3200 4238   762  3200 4327   673
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.17 0.28  0.10  0.15 0.21  0.09  0.06 0.19  0.19  0.06 0.20  0.21
Crit Moves:       ****        ****             ****                       ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:16                Page 12-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #10 Harbor Blvd and McFadden Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.711
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    1  0  1  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     182 1866   136   261 1114   101   147  358    45    63  151    43
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  182 1866   136   261 1114   101   147  358    45    63  151    43
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   182 1866   136   261 1114   101   147  358    45    63  151    43
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  182 1866   136   261 1114   101   147  358    45    63  151    43
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  182 1866   136   261 1114   101   147  358    45    63  151    43
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.00  1.00
Lanes:       2.00 3.00  1.00  2.00 2.75  0.25  1.00 1.78  0.22  1.00 0.78  0.22
Final Sat.:  3200 5100  1600  3200 4601   399  1600 2943   357  1600 1245   355
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.37  0.09  0.08 0.24  0.25  0.09 0.12  0.13  0.04 0.12  0.12
Crit Moves:       ****        ****             ****                   ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:25                Page 13-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #11 Harbor Blvd and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.722
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        40               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     262 1645   199   283  822    75   109  460    81   188 1089   363
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  262 1645   199   283  822    75   109  460    81   188 1089   363
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   262 1645   199   283  822    75   109  460    81   188 1089   363
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  262 1645   199   283  822    75   109  460    81   188 1089   363
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  262 1645   199   283  822    75   109  460    81   188 1089   363
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.55  0.45  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 4281   719  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.32  0.12  0.09 0.16  0.05  0.03 0.11  0.11  0.06 0.21  0.23
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #12 Harbor Blvd and Warner Ave

Cycle (sec):	100	Critical Vol./Cap.(X):	1.539
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	180	Level Of Service:	F

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Protected			Protected			Protected			Protected		
Rights:	Include			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	2 0	2 1	0	2 0	3 0	1	2 0	3 0	1	2 0	3 0	1
Volume Module:												
Base Vol:	768	3685	277	250	1389	166	198	1399	320	253	2626	838
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	768	3685	277	250	1389	166	198	1399	320	253	2626	838
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	768	3685	277	250	1389	166	198	1399	320	253	2626	838
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	768	3685	277	250	1389	166	198	1399	320	253	2626	838
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	768	3685	277	250	1389	166	198	1399	320	253	2626	838
Saturation Flow Module:												
Sat/Lane:	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
Adjustment:	1.00	1.04	1.00	1.00	1.06	1.00	1.00	1.06	1.00	1.00	1.06	1.00
Lanes:	2.00	2.79	0.21	2.00	3.00	1.00	2.00	3.00	1.00	2.00	3.00	1.00
Final Sat.:	3200	4664	336	3200	5100	1600	3200	5100	1600	3200	5100	1600
Capacity Analysis Module:												
Vol/Sat:	0.24	0.79	0.83	0.08	0.27	0.10	0.06	0.27	0.20	0.08	0.51	0.52
Crit Moves:			****	****			****					****

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:31                Page 15-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #13 Harbor Blvd and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.934
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       113               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     275 1732    55    86  973    86   118  585   192   121 1308   475
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  275 1732    55    86  973    86   118  585   192   121 1308   475
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   275 1732    55    86  973    86   118  585   192   121 1308   475
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  275 1732    55    86  973    86   118  585   192   121 1308   475
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  275 1732    55    86  973    86   118  585   192   121 1308   475
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 2.91  0.09  1.00 2.76  0.24  1.00 1.51  0.49  1.00 2.00  1.00
Final Sat.:  3200 4852   148  1600 4610   390  1600 2509   791  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.36  0.37  0.05 0.21  0.22  0.07 0.23  0.24  0.08 0.38  0.30
Crit Moves:             ****  ****            ****                 ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:34                Page 16-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #14 MacArthur Blvd and Hyland Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.891
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        82               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  1  0    1  0  1  0  1    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:    1139    7    66    12    4    14    35  869   156    25 2320    12
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse: 1139    7    66    12    4    14    35  869   156    25 2320    12
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:  1139    7    66    12    4    14    35  869   156    25 2320    12
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol: 1139    7    66    12    4    14    35  869   156    25 2320    12
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume: 1139    7    66    12    4    14    35  869   156    25 2320    12
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 0.10  0.90  1.00 1.00  1.00  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200  153  1447  1600 1700  1600  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.36 0.05  0.05  0.01 0.00  0.01  0.02 0.17  0.10  0.02 0.45  0.01
Crit Moves:  ****                      ****  ****                    ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:36                Page 17-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #15 MacArthur Blvd and Harbor Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.788
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        50               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     527 1362    79   206 1039   170   143  501   185    85 1429   269
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  527 1362    79   206 1039   170   143  501   185    85 1429   269
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   527 1362    79   206 1039   170   143  501   185    85 1429   269
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  527 1362    79   206 1039   170   143  501   185    85 1429   269
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  527 1362    79   206 1039   170   143  501   185    85 1429   269
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.16 0.27  0.05  0.06 0.20  0.11  0.09 0.10  0.12  0.05 0.28  0.17
Crit Moves:  ****               ****        ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:44                Page 18-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #16 Harbor Blvd and Sunflower Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.711
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        38               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  1  1  0    1  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     156 1552   230   118 1464    44    85  230   239   282  592   221
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  156 1552   230   118 1464    44    85  230   239   282  592   221
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   156 1552   230   118 1464    44    85  230   239   282  592   221
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  156 1552   230   118 1464    44    85  230   239   282  592   221
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  156 1552   230   118 1464    44    85  230   239   282  592   221
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 1.00  1.00  1.00 1.39  0.61
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 1700  1600  1600 2322   974
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.30  0.14  0.04 0.29  0.03  0.05 0.14  0.15  0.18 0.25  0.23
Crit Moves:  ****               ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:47                Page 19-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #17 Harbor Blvd and I-405 NB Off-Ramp
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.710
Loss Time (sec):       5               Average Delay (sec/veh):        18.8
Optimal Cycle:        40               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  0    0  0  4  0  0    0  0  0  0  0    1  0  1! 0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1488     0     0 2570     0     0    0     0   513    0   828
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1488     0     0 2570     0     0    0     0   513    0   828
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1488     0     0 2570     0     0    0     0   513    0   828
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1488     0     0 2570     0     0    0     0   513    0   828
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1488     0     0 2570     0     0    0     0   513    0   828
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  1.00  1.00 0.91  1.00  1.00 1.00  1.00  0.89 1.00  0.89
Lanes:       0.00 4.00  0.00  0.00 4.00  0.00  0.00 0.00  0.00  1.38 0.00  1.62
Final Sat.:     0 6916     0     0 6916     0     0    0     0  2337    0  2734
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.22  0.00  0.00 0.37  0.00  0.00 0.00  0.00  0.22 0.00  0.30
Crit Moves:  ****                 ****                                     ****
Green/Cycle: 0.00 0.52  0.00  0.00 0.52  0.00  0.00 0.00  0.00  0.43 0.00  0.43
Volume/Cap:  0.00 0.41  0.00  0.00 0.71  0.00  0.00 0.00  0.00  0.51 0.00  0.71
Delay/Veh:    0.0 14.5   0.0   0.0 18.7   0.0   0.0  0.0   0.0  21.2  0.0  24.9
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 14.5   0.0   0.0 18.7   0.0   0.0  0.0   0.0  21.2  0.0  24.9
LOS by Move:    A    B     A     A    B     A     A    A     A     C    A     C
HCM2k85thQ:     0   12     0     0   25     0     0    0     0    13    0    21
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:52                Page 20-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #18 Harbor Blvd and I-405 SB Off-Ramp
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.673
Loss Time (sec):       5               Average Delay (sec/veh):        18.1
Optimal Cycle:        36               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Ignore           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  3  0  1    0  0  4  0  0    1  0  1! 0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1881     0     0 2254     0   181    0   833     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1881     0     0 2254     0   181    0   833     0    0     0
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1881     0     0 2254     0   181    0   833     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1881     0     0 2254     0   181    0   833     0    0     0
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1881     0     0 2254     0   181    0   833     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  1.00  1.00 0.91  1.00  0.87 1.00  0.87  1.00 1.00  1.00
Lanes:       0.00 3.00  1.00  0.00 4.00  0.00  1.18 0.00  1.82  0.00 0.00  0.00
Final Sat.:     0 5187  1900     0 6916     0  1946    0  3008     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.36  0.00  0.00 0.33  0.00  0.09 0.00  0.28  0.00 0.00  0.00
Crit Moves:       ****        ****                     ****
Green/Cycle: 0.00 0.54  0.00  0.00 0.54  0.00  0.41 0.00  0.41  0.00 0.00  0.00
Volume/Cap:  0.00 0.67  0.00  0.00 0.61  0.00  0.23 0.00  0.67  0.00 0.00  0.00
Delay/Veh:    0.0 17.4   0.0   0.0 16.1   0.0  19.1  0.0  25.2   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 17.4   0.0   0.0 16.1   0.0  19.1  0.0  25.2   0.0  0.0   0.0
LOS by Move:    A    B     A     A    B     A     B    A     C     A    A     A
HCM2k85thQ:     0   23     0     0   20     0     5    0    18     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #19 Fairview St and Civic Center Dr

Cycle (sec):	100	Critical Vol./Cap.(X):	0.707
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	38	Level Of Service:	C

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Protected			Protected			Split Phase			Split Phase		
Rights:	WideBypass			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	1 0	2	1 0	1 0	2	1 0	0 1	0	1 0	1 1	0	0 1
Volume Module:												
Base Vol:	6	1777	499	205	1903	0	2	6	4	164	0	61
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	6	1777	499	205	1903	0	2	6	4	164	0	61
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	6	1777	499	205	1903	0	2	6	4	164	0	61
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	6	1777	499	205	1903	0	2	6	4	164	0	61
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	6	1777	499	205	1903	0	2	6	4	164	0	61
Saturation Flow Module:												
Sat/Lane:	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
Adjustment:	1.00	1.05	1.00	1.00	1.04	1.00	1.00	1.00	1.00	1.00	1.06	1.00
Lanes:	1.00	2.34	0.66	1.00	3.00	0.00	0.33	1.00	0.67	2.00	0.00	1.00
Final Sat.:	1600	3948	1052	1600	5000	0	533	1600	1067	3200	0	1600
Capacity Analysis Module:												
Vol/Sat:	0.00	0.45	0.47	0.13	0.38	0.00	0.00	0.00	0.00	0.05	0.00	0.04
Crit Moves:			****	****			****			****		

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:55                Page 22-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #20 Fairview St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.894
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        83               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     182 1339   121   236 1468   291   215  870   151   126  952   147
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  182 1339   121   236 1468   291   215  870   151   126  952   147
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   182 1339   121   236 1468   291   215  870   151   126  952   147
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  182 1339   121   236 1468   291   215  870   151   126  952   147
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  182 1339   121   236 1468   291   215  870   151   126  952   147
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 3.00  1.00  1.00 2.50  0.50  1.00 2.56  0.44  1.00 2.60  0.40
Final Sat.:  1600 5100  1600  1600 4206   794  1600 4290   710  1600 4358   642
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.26  0.08  0.15 0.35  0.37  0.13 0.20  0.21  0.08 0.22  0.23
Crit Moves:  ****                      ****  ****                      ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:57                Page 23-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #21 Fairview St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.684
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        35               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     174 1596   139   195 1577   246    79  214    53    51  177    43
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  174 1596   139   195 1577   246    79  214    53    51  177    43
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   174 1596   139   195 1577   246    79  214    53    51  177    43
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  174 1596   139   195 1577   246    79  214    53    51  177    43
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  174 1596   139   195 1577   246    79  214    53    51  177    43
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 0.80  0.20  1.00 0.80  0.20
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 1282   318  1600 1287   313
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.31  0.09  0.12 0.31  0.15  0.05 0.17  0.17  0.03 0.14  0.14
Crit Moves:       ****        ****                   ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:44:58                Page 24-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #22 Fairview St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.920
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       100               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     190 1810   111   198  616   151   205  628   168   639 1353   297
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  190 1810   111   198  616   151   205  628   168   639 1353   297
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   190 1810   111   198  616   151   205  628   168   639 1353   297
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  190 1810   111   198  616   151   205  628   168   639 1353   297
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  190 1810   111   198  616   151   205  628   168   639 1353   297
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 2.83  0.17  2.00 2.41  0.59  2.00 2.37  0.63  2.00 2.46  0.54
Final Sat.:  3200 4723   277  3200 4055   945  3200 3987  1013  3200 4136   864
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.38  0.40  0.06 0.15  0.16  0.06 0.16  0.17  0.20 0.33  0.34
Crit Moves:             ****  ****            ****                      ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #23 Fairview St and Warner Ave

Cycle (sec):	100	Critical Vol./Cap.(X):	0.805
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	53	Level Of Service:	D

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Protected			Protected			Protected			Protected		
Rights:	Include			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	2 0	2 1	0	2 0	2 1	0	2 0	2 1	0	2 0	2 1	0
Volume Module:												
Base Vol:	211	1679	156	179	906	92	163	792	123	178	1049	227
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	211	1679	156	179	906	92	163	792	123	178	1049	227
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	211	1679	156	179	906	92	163	792	123	178	1049	227
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	211	1679	156	179	906	92	163	792	123	178	1049	227
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	211	1679	156	179	906	92	163	792	123	178	1049	227
Saturation Flow Module:												
Sat/Lane:	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
Adjustment:	1.00	1.05	1.00	1.00	1.05	1.00	1.00	1.05	1.00	1.00	1.05	1.00
Lanes:	2.00	2.74	0.26	2.00	2.72	0.28	2.00	2.60	0.40	2.00	2.47	0.53
Final Sat.:	3200	4592	408	3200	4558	442	3200	4355	645	3200	4146	854
Capacity Analysis Module:												
Vol/Sat:	0.07	0.37	0.38	0.06	0.20	0.21	0.05	0.18	0.19	0.06	0.25	0.27
Crit Moves:			****	****			****					****

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:00                Page 26-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #24 Fairview St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.761
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        45               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     228 1568    85   162  902    83   253  661   223   159 1210   212
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  228 1568    85   162  902    83   253  661   223   159 1210   212
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   228 1568    85   162  902    83   253  661   223   159 1210   212
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  228 1568    85   162  902    83   253  661   223   159 1210   212
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  228 1568    85   162  902    83   253  661   223   159 1210   212
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.85  0.15  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 4753   247  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.33  0.34  0.05 0.18  0.05  0.08 0.13  0.14  0.05 0.24  0.13
Crit Moves:             ****  ****            ****                 ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:02                Page 27-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #25 Fairview Rd and Sunflower Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.691
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  1  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     190 1705   371   138 1145    79   245  520   115   208  522   136
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  190 1705   371   138 1145    79   245  520   115   208  522   136
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   190 1705   371   138 1145    79   245  520   115   208  522   136
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  190 1705   371   138 1145    79   245  520   115   208  522   136
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  190 1705   371   138 1145    79   245  520   115   208  522   136
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.81  0.19  2.00 1.64  0.36  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 4690   310  3200 2720   580  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.33  0.23  0.04 0.24  0.26  0.08 0.19  0.20  0.07 0.15  0.09
Crit Moves:       ****        ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:03                Page 28-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #26 Greenville St and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.647
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        32               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    0  0  0  0  0    0  0  2  1  0    1  0  3  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     327    0   218     0    0     0     0 1178   240   155 1840     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  327    0   218     0    0     0     0 1178   240   155 1840     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   327    0   218     0    0     0     0 1178   240   155 1840     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  327    0   218     0    0     0     0 1178   240   155 1840     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  327    0   218     0    0     0     0 1178   240   155 1840     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 0.00  1.00  0.00 0.00  0.00  0.00 2.49  0.51  1.00 3.00  0.00
Final Sat.:  1600    0  1600     0    0     0     0 4188   812  1600 5100     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.20 0.00  0.14  0.00 0.00  0.00  0.00 0.28  0.30  0.10 0.36  0.00
Crit Moves:  ****                                          ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:04                Page 29-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #27 Greenville St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.797
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        51               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      50  414    31    44  143    44   138 1049    60    39 1490   213
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   50  414    31    44  143    44   138 1049    60    39 1490   213
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    50  414    31    44  143    44   138 1049    60    39 1490   213
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   50  414    31    44  143    44   138 1049    60    39 1490   213
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   50  414    31    44  143    44   138 1049    60    39 1490   213
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 0.93  0.07  1.00 0.76  0.24  1.00 2.84  0.16  1.00 2.62  0.38
Final Sat.:  1600 1489   111  1600 1224   376  1600 4740   260  1600 4400   600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.28  0.28  0.03 0.12  0.12  0.09 0.22  0.23  0.02 0.34  0.35
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:05                Page 30-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #28 Raitt St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.676
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        35               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      34  482    75    24  252    40    59  347    30    38  318    44
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   34  482    75    24  252    40    59  347    30    38  318    44
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    34  482    75    24  252    40    59  347    30    38  318    44
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   34  482    75    24  252    40    59  347    30    38  318    44
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   34  482    75    24  252    40    59  347    30    38  318    44
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 0.87  0.13  1.00 0.86  0.14  1.00 0.92  0.08  1.00 0.88  0.12
Final Sat.:  1600 1385   215  1600 1381   219  1600 1473   127  1600 1406   194
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.35  0.35  0.02 0.18  0.18  0.04 0.24  0.24  0.02 0.23  0.23
Crit Moves:       ****        ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

2045 WP PM Peak Hour Thu Oct 22, 2020 14:45:07 Page 31-1

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #29 Raitt St and Edinger Ave

Cycle (sec):	100	Critical Vol./Cap.(X):	0.988
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	180	Level Of Service:	E

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Protected			Protected			Protected			Protected		
Rights:	Include			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	1 0	0	1 0	1 0	0	1 0	1 0	2	1 0	1 0	2	1 0
Volume Module:												
Base Vol:	84	361	101	61	209	52	177	1226	175	195	2203	197
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	84	361	101	61	209	52	177	1226	175	195	2203	197
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	84	361	101	61	209	52	177	1226	175	195	2203	197
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	84	361	101	61	209	52	177	1226	175	195	2203	197
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	84	361	101	61	209	52	177	1226	175	195	2203	197
Saturation Flow Module:												
Sat/Lane:	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
Adjustment:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.05	1.00	1.00	1.05	1.00
Lanes:	1.00	0.78	0.22	1.00	0.80	0.20	1.00	2.63	0.37	1.00	2.75	0.25
Final Sat.:	1600	1250	350	1600	1281	319	1600	4400	600	1600	4606	394
Capacity Analysis Module:												
Vol/Sat:	0.05	0.29	0.29	0.04	0.16	0.16	0.11	0.28	0.29	0.12	0.48	0.50
Crit Moves:		****			****			****				****

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:08                Page 32-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #30 Bear St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.904
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        89               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  2  0  1    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     262 1258   328   115  278    84    90  847    88    82 1475   235
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  262 1258   328   115  278    84    90  847    88    82 1475   235
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   262 1258   328   115  278    84    90  847    88    82 1475   235
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  262 1258   328   115  278    84    90  847    88    82 1475   235
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  262 1258   328   115  278    84    90  847    88    82 1475   235
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.00  1.00  1.00 2.00  1.00  1.00 2.72  0.28  1.00 2.59  0.41
Final Sat.:  1600 3400  1600  1600 3400  1600  1600 4548   452  1600 4340   660
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.16 0.37  0.21  0.07 0.08  0.05  0.06 0.19  0.19  0.05 0.34  0.36
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:08                Page 33-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #31 Bristol St and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.811
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        54               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     370 1801   300   347 1847   314   243  543    98   280 1055   357
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  370 1801   300   347 1847   314   243  543    98   280 1055   357
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   370 1801   300   347 1847   314   243  543    98   280 1055   357
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  370 1801   300   347 1847   314   243  543    98   280 1055   357
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  370 1801   300   347 1847   314   243  543    98   280 1055   357
OvlAdjVol:                                                              183
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.54  0.46  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 4266   734  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.35  0.19  0.11 0.36  0.20  0.08 0.13  0.13  0.09 0.21  0.22
OvlAdjV/S:                                                              0.11
Crit Moves:  ****                 ****        ****                 ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:09                Page 34-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #32 Bristol St and Civic Center Dr
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.898
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        85               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  0  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     214 1494    78   173 1589   163   130  366    43   149  635    72
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  214 1494    78   173 1589   163   130  366    43   149  635    72
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   214 1494    78   173 1589   163   130  366    43   149  635    72
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  214 1494    78   173 1589   163   130  366    43   149  635    72
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  214 1494    78   173 1589   163   130  366    43   149  635    72
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.00  1.00  1.00 1.03  1.00
Lanes:       1.00 2.85  0.15  1.00 2.72  0.28  1.00 0.89  0.11  1.00 1.80  0.20
Final Sat.:  1600 4762   238  1600 4553   447  1600 1432   168  1600 2974   326
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.31  0.33  0.11 0.35  0.37  0.08 0.26  0.26  0.09 0.21  0.22
Crit Moves:  ****                ****        ****        ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:10                Page 35-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #33 Bristol St and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.732
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        41               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      85 1722    98   120 1597    60    70  194    45   125  199    54
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   85 1722    98   120 1597    60    70  194    45   125  199    54
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    85 1722    98   120 1597    60    70  194    45   125  199    54
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   85 1722    98   120 1597    60    70  194    45   125  199    54
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   85 1722    98   120 1597    60    70  194    45   125  199    54
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 2.84  0.16  1.00 2.89  0.11  1.00 0.81  0.19  1.00 0.79  0.21
Final Sat.:  1600 4742   258  1600 4826   174  1600 1299   301  1600 1258   342
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.05 0.36  0.38  0.08 0.33  0.35  0.04 0.15  0.15  0.08 0.16  0.16
Crit Moves:             ****  ****                ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:11                Page 36-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #34 Bristol St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.972
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       167               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  2  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     434 1872   276   216 1169   264   259 1454   186   155  953    90
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  434 1872   276   216 1169   264   259 1454   186   155  953    90
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   434 1872   276   216 1169   264   259 1454   186   155  953    90
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  434 1872   276   216 1169   264   259 1454   186   155  953    90
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  434 1872   276   216 1169   264   259 1454   186   155  953    90
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.03  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 2.66  0.34  1.00 1.83  0.17
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 4456   544  1600 3024   276
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.37  0.17  0.07 0.23  0.17  0.16 0.33  0.34  0.10 0.32  0.33
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:13                Page 37-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #35 Bristol St and McFadden Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.890
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        81               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     249 1833    99   116 1618   373   114  222    44    82  424    50
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  249 1833    99   116 1618   373   114  222    44    82  424    50
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   249 1833    99   116 1618   373   114  222    44    82  424    50
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  249 1833    99   116 1618   373   114  222    44    82  424    50
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  249 1833    99   116 1618   373   114  222    44    82  424    50
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 0.83  0.17  1.00 0.89  0.11
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 1335   265  1600 1431   169
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.16 0.36  0.06  0.07 0.32  0.23  0.07 0.17  0.17  0.05 0.30  0.30
Crit Moves:  ****               ****        ****                   ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:14                Page 38-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #36 Bristol St and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.871
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        72               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     312 1170   213   343 1144   223   159  715   126   282 1662   487
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  312 1170   213   343 1144   223   159  715   126   282 1662   487
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   312 1170   213   343 1144   223   159  715   126   282 1662   487
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  312 1170   213   343 1144   223   159  715   126   282 1662   487
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  312 1170   213   343 1144   223   159  715   126   282 1662   487
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.54  0.46  2.00 2.51  0.49  1.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200 4261   739  3200 4217   783  1600 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.27  0.29  0.11 0.27  0.28  0.10 0.14  0.08  0.18 0.33  0.30
Crit Moves:             ****  ****            ****                 ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:15                Page 39-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #37 Bristol St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.915
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        96               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     177 1309   231    98  894   187   279  998    79   156 1408    71
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  177 1309   231    98  894   187   279  998    79   156 1408    71
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   177 1309   231    98  894   187   279  998    79   156 1408    71
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  177 1309   231    98  894   187   279  998    79   156 1408    71
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  177 1309   231    98  894   187   279  998    79   156 1408    71
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 2.55  0.45  1.00 2.48  0.52  1.00 2.78  0.22  1.00 2.86  0.14
Final Sat.:  1600 4280   720  1600 4170   830  1600 4648   352  1600 4770   230
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.31  0.32  0.06 0.21  0.23  0.17 0.21  0.22  0.10 0.30  0.31
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:16                Page 40-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #38 Bristol St and Alton Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.583
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        28               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:         WideBypass         Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  3  0  1    1  0  1  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      43 1667   157   114  858    54    50   70   130     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   43 1667   157   114  858    54    50   70   130     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    43 1667   157   114  858    54    50   70   130     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   43 1667   157   114  858    54    50   70   130     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   43 1667   157   114  858    54    50   70   130     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       1.00 2.74  0.26  1.00 3.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00
Final Sat.:  1600 4587   413  1600 5100  1600  1600 1700  1600  1600 1600     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.36  0.38  0.07 0.17  0.03  0.03 0.04  0.08  0.00 0.00  0.00
Crit Moves:             ****  ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:17                Page 41-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #39 Bristol St and MacArthur Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.796
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        51               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     335 1428   260   237  871   137   357  796   169   247 1432   270
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  335 1428   260   237  871   137   357  796   169   247 1432   270
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   335 1428   260   237  871   137   357  796   169   247 1432   270
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  335 1428   260   237  871   137   357  796   169   247 1432   270
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  335 1428   260   237  871   137   357  796   169   247 1432   270
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.59  0.41  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 4348   652  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.28  0.16  0.07 0.20  0.21  0.11 0.16  0.11  0.08 0.28  0.17
Crit Moves:       ****        ****             ****                   ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #40 Bristol St and Sunflower Ave

Cycle (sec):	100	Critical Vol./Cap.(X):	0.744
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	42	Level Of Service:	C

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Protected			Protected			Protected			Protected		
Rights:	Include			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	2 0	2 1	1	2 0	3 0	1	2 0	2 1	1	2 0	3 0	1
Volume Module:												
Base Vol:	687	1452	234	226	844	242	391	764	296	254	976	311
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	687	1452	234	226	844	242	391	764	296	254	976	311
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	687	1452	234	226	844	242	391	764	296	254	976	311
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	687	1452	234	226	844	242	391	764	296	254	976	311
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	687	1452	234	226	844	242	391	764	296	254	976	311
Saturation Flow Module:												
Sat/Lane:	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
Adjustment:	1.00	1.06	1.00	1.00	1.06	1.00	1.00	1.04	1.00	1.00	1.06	1.00
Lanes:	2.00	3.00	1.00	2.00	3.00	1.00	2.00	2.88	1.12	2.00	3.00	1.00
Final Sat.:	3200	5100	1600	3200	5100	1600	3200	4813	1787	3200	5100	1600
Capacity Analysis Module:												
Vol/Sat:	0.21	0.28	0.15	0.07	0.17	0.15	0.12	0.16	0.17	0.08	0.19	0.19
Crit Moves:	****			****			****			****		

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:21                Page 43-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #41 Bristol St and I-405 NB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.854
Loss Time (sec):       5               Average Delay (sec/veh):        29.0
Optimal Cycle:        69               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  1    0  0  4  1  0    0  0  0  0  2    1  1  1  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 2235   195     0 2458    23     0    0   204   357  306  1184
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 2235   195     0 2458    23     0    0   204   357  306  1184
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 2235   195     0 2458    23     0    0   204   357  306  1184
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 2235   195     0 2458    23     0    0   204   357  306  1184
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 2235   195     0 2458    23     0    0   204   357  306  1184
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  0.85  1.00 0.91  0.91  1.00 1.00  0.75  0.93 0.93  0.75
Lanes:       0.00 4.00  1.00  0.00 4.95  0.05  0.00 0.00  2.00  1.62 1.38  2.00
Final Sat.:     0 6916  1615     0 8556    80     0    0  2842  2840 2434  2842
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.32  0.12  0.00 0.29  0.29  0.00 0.00  0.07  0.13 0.13  0.42
Crit Moves:       ****        ****                         ****            ****
Green/Cycle: 0.00 0.38  0.38  0.00 0.38  0.38  0.00 0.00  0.08  0.49 0.49  0.49
Volume/Cap:  0.00 0.85  0.32  0.00 0.76  0.76  0.00 0.00  0.85  0.26 0.26  0.85
Delay/Veh:    0.0 31.5  22.3   0.0 28.2  28.2   0.0  0.0  69.8  15.1 15.1  27.9
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 31.5  22.3   0.0 28.2  28.2   0.0  0.0  69.8  15.1 15.1  27.9
LOS by Move:    A    C     C     A    C     C     A    A     E     B    B     C
HCM2k85thQ:     0   29     7     0   24    24     0    0     9     6    6    30
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:22                Page 44-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #42 Bristol St and I-405 SB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.631
Loss Time (sec):       5               Average Delay (sec/veh):        18.2
Optimal Cycle:        32               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Ignore           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  4  0  0    0  0  2  1  1    3  0  0  0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     135 1647     0     0 1657   968   740    0   331     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  135 1647     0     0 1657   968   740    0   331     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   135 1647     0     0 1657     0   740    0   331     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  135 1647     0     0 1657     0   740    0   331     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  135 1647     0     0 1657     0   740    0   331     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.91  0.92 1.00  0.85  1.00 1.00  1.00
Lanes:       1.00 4.00  0.00  0.00 3.00  1.00  3.00 0.00  1.00  0.00 0.00  0.00
Final Sat.:  1805 6916     0     0 5187  1729  5253    0  1615     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.24  0.00  0.00 0.32  0.00  0.14 0.00  0.20  0.00 0.00  0.00
Crit Moves:  ****                 ****                    ****
Green/Cycle: 0.12 0.63  0.00  0.00 0.51  0.00  0.32 0.00  0.32  0.00 0.00  0.00
Volume/Cap:  0.63 0.38  0.00  0.00 0.63  0.00  0.43 0.00  0.63  0.00 0.00  0.00
Delay/Veh:   47.9  9.3   0.0   0.0 18.4   0.0  26.7  0.0  31.1   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  47.9  9.3   0.0   0.0 18.4   0.0  26.7  0.0  31.1   0.0  0.0   0.0
LOS by Move:    D    A     A     A    B     A     C    A     C     A    A     A
HCM2k85thQ:     8   10     0     0   21     0    10    0    14     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:24                Page 45-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #43 Flower St and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.668
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        34               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit      Prot+Permit      Prot+Permit
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  2  0  1    1  0  2  0  1    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     215 1307   107    95  486    44   104  300    49   106  371   110
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  215 1307   107    95  486    44   104  300    49   106  371   110
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   215 1307   107    95  486    44   104  300    49   106  371   110
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  215 1307   107    95  486    44   104  300    49   106  371   110
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  215 1307   107    95  486    44   104  300    49   106  371   110
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.00  1.00  1.00 2.00  1.00  1.00 2.00  1.00  1.00 2.00  1.00
Final Sat.:  1600 3400  1600  1600 3400  1600  1600 3400  1600  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.38  0.07  0.06 0.14  0.03  0.07 0.09  0.03  0.07 0.11  0.07
Crit Moves:       ****        ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:26                Page 46-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #44 Flower St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.215
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  0  1    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     211 1000   238   140  383   111   135 1181    98   144  969   101
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  211 1000   238   140  383   111   135 1181    98   144  969   101
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   211 1000   238   140  383   111   135 1181    98   144  969   101
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  211 1000   238   140  383   111   135 1181    98   144  969   101
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  211 1000   238   140  383   111   135 1181    98   144  969   101
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.03  1.00  1.00 1.03  1.00
Lanes:       1.00 1.00  1.00  1.00 1.55  0.45  1.00 1.85  0.15  1.00 1.81  0.19
Final Sat.:  1600 1700  1600  1600 2581   719  1600 3055   245  1600 2998   302
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.59  0.15  0.09 0.15  0.15  0.08 0.39  0.40  0.09 0.32  0.33
Crit Moves:       ****        ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:27                Page 47-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #45 Flower St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.968
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       159               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      54  734    45    26  201    33    56  422    17    43  532    76
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   54  734    45    26  201    33    56  422    17    43  532    76
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    54  734    45    26  201    33    56  422    17    43  532    76
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   54  734    45    26  201    33    56  422    17    43  532    76
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   54  734    45    26  201    33    56  422    17    43  532    76
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 0.94  0.06  1.00 0.86  0.14  1.00 0.96  0.04  1.00 0.88  0.12
Final Sat.:  1600 1508    92  1600 1374   226  1600 1538    62  1600 1400   200
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.49  0.49  0.02 0.15  0.15  0.04 0.27  0.27  0.03 0.38  0.38
Crit Moves:       ****        ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #46 Flower St and Segerstrom Ave

Cycle (sec):	100	Critical Vol./Cap.(X):	0.916
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	97	Level Of Service:	E

Approach:	North Bound				South Bound				East Bound				West Bound			
Movement:	L	- T	- R		L	- T	- R		L	- T	- R		L	- T	- R	
Control:	Permitted				Permitted				Protected				Protected			
Rights:	Include				Include				Include				Include			
Min. Green:	0	0	0		0	0	0		0	0	0		0	0	0	
Y+R:	4.0	4.0	4.0		4.0	4.0	4.0		4.0	4.0	4.0		4.0	4.0	4.0	
Lanes:	1	0 1	1	0	1	0 1	1	0	1	0 2	1	0	1	0 2	1	0
Volume Module:																
Base Vol:	120	843	80		80	449	129		241	1198	126		101	1699	109	
Growth Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
Initial Bse:	120	843	80		80	449	129		241	1198	126		101	1699	109	
User Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
PHF Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
PHF Volume:	120	843	80		80	449	129		241	1198	126		101	1699	109	
Reduct Vol:	0	0	0		0	0	0		0	0	0		0	0	0	
Reduced Vol:	120	843	80		80	449	129		241	1198	126		101	1699	109	
PCE Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
MLF Adj:	1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00		1.00	1.00	1.00	
FinalVolume:	120	843	80		80	449	129		241	1198	126		101	1699	109	
Saturation Flow Module:																
Sat/Lane:	1600	1600	1600		1600	1600	1600		1600	1600	1600		1600	1600	1600	
Adjustment:	1.00	1.03	1.00		1.00	1.04	1.00		1.00	1.05	1.00		1.00	1.04	1.00	
Lanes:	1.00	1.83	0.17		1.00	1.55	0.45		1.00	2.71	0.29		1.00	2.82	0.18	
Final Sat.:	1600	3023	277		1600	2586	714		1600	4543	457		1600	4711	289	
Capacity Analysis Module:																
Vol/Sat:	0.08	0.28	0.29		0.05	0.17	0.18		0.15	0.26	0.28		0.06	0.36	0.38	
Crit Moves:			****		****				****						****	

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:28                Page 49-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #47 Flower St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.908
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        92               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     116  553    65    97  233   224   264 1254    80    61 1967   175
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  116  553    65    97  233   224   264 1254    80    61 1967   175
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   116  553    65    97  233   224   264 1254    80    61 1967   175
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  116  553    65    97  233   224   264 1254    80    61 1967   175
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  116  553    65    97  233   224   264 1254    80    61 1967   175
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 1.79  0.21  1.00 1.02  0.98  1.00 2.82  0.18  1.00 2.75  0.25
Final Sat.:  1600 2963   337  1600 1732  1568  1600 4712   288  1600 4608   392
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.19  0.19  0.06 0.13  0.14  0.17 0.27  0.28  0.04 0.43  0.45
Crit Moves:       ****        ****             ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:29                Page 50-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #48 Main St and La Veta Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.764
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        45               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  2  1  0    2  0  2  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     310  948   444   191 1199   309   347  495   222   332  662   266
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  310  948   444   191 1199   309   347  495   222   332  662   266
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   310  948   444   191 1199   309   347  495   222   332  662   266
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  310  948   444   191 1199   309   347  495   222   332  662   266
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  310  948   444   191 1199   309   347  495   222   332  662   266
OvlAdjVol:                278                                              171
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 2.39  0.61  2.00 2.07  0.93  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 4016   984  3200 3514  1486  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.10 0.19  0.28  0.06 0.30  0.31  0.11 0.14  0.15  0.10 0.19  0.17
OvlAdjV/S:               0.17                                             0.11
Crit Moves:  ****                      ****  ****                  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #49 Main St and Mainplace Dr / Memory Ln

Cycle (sec):	100	Critical Vol./Cap.(X):	0.504
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	24	Level Of Service:	A

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Protected			Protected			Protected			Protected		
Rights:	Include			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	2 0	2	1 0	2 0	2	1 0	2 0	2	1 0	2 0	2	0 1
Volume Module:												
Base Vol:	102	1075	204	48	999	132	195	217	58	370	302	146
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	102	1075	204	48	999	132	195	217	58	370	302	146
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	102	1075	204	48	999	132	195	217	58	370	302	146
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	102	1075	204	48	999	132	195	217	58	370	302	146
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	102	1075	204	48	999	132	195	217	58	370	302	146
Saturation Flow Module:												
Sat/Lane:	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
Adjustment:	1.00	1.05	1.00	1.00	1.05	1.00	1.00	1.05	1.00	1.00	1.06	1.00
Lanes:	2.00	2.52	0.48	2.00	2.65	0.35	2.00	2.37	0.63	2.00	2.00	1.00
Final Sat.:	3200	4234	766	3200	4440	560	3200	3988	1012	3200	3400	1600
Capacity Analysis Module:												
Vol/Sat:	0.03	0.25	0.27	0.02	0.23	0.24	0.06	0.05	0.06	0.12	0.09	0.09
Crit Moves:			****	****					****	****		

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:30                Page 52-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #50 Main St and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.799
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        52               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     239 1237   270   243 1062   164   174  975    58   187 1147    76
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  239 1237   270   243 1062   164   174  975    58   187 1147    76
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   239 1237   270   243 1062   164   174  975    58   187 1147    76
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  239 1237   270   243 1062   164   174  975    58   187 1147    76
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  239 1237   270   243 1062   164   174  975    58   187 1147    76
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       2.00 2.00  1.00  2.00 2.00  1.00  2.00 2.83  0.17  2.00 2.81  0.19
Final Sat.:  3200 3400  1600  3200 3400  1600  3200 4730   270  3200 4702   298
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.36  0.17  0.08 0.31  0.10  0.05 0.21  0.22  0.06 0.24  0.25
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:31                Page 53-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #51 Main St and Civic Center Dr
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.856
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        67               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      98 1234   103    63 1031    65   168  930   111    38  384    39
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   98 1234   103    63 1031    65   168  930   111    38  384    39
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    98 1234   103    63 1031    65   168  930   111    38  384    39
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   98 1234   103    63 1031    65   168  930   111    38  384    39
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   98 1234   103    63 1031    65   168  930   111    38  384    39
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.03  1.00
Lanes:       1.00 1.85  0.15  1.00 1.88  0.12  1.00 1.79  0.21  1.00 1.82  0.18
Final Sat.:  1600 3053   247  1600 3110   190  1600 2959   341  1600 3005   295
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.40  0.42  0.04 0.33  0.34  0.11 0.31  0.33  0.02 0.13  0.13
Crit Moves:             ****  ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:31                Page 54-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #52 Main St and Santa Ana Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.700
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        37               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  0    0  0  1  1  0    0  0  0  0  0    0  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      56 1280     0     0 1108    54     0    0     0    65  656    85
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   56 1280     0     0 1108    54     0    0     0    65  656    85
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    56 1280     0     0 1108    54     0    0     0    65  656    85
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   56 1280     0     0 1108    54     0    0     0    65  656    85
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   56 1280     0     0 1108    54     0    0     0    65  656    85
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       1.00 2.00  0.00  0.00 1.91  0.09  0.00 0.00  0.00  0.16 1.63  0.21
Final Sat.:  1600 3400     0     0 3151   149     0    0     0   258 2604   337
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.38  0.00  0.00 0.35  0.36  0.00 0.00  0.00  0.04 0.25  0.25
Crit Moves:  ****                 ****                           ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:32                Page 55-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #53 Main St and 4th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.472
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        22               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  1  1  0    0  0  1  1  0    0  0  1  1  0    0  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1108    53     0  951    43     0  112    63     0  157    40
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1108    53     0  951    43     0  112    63     0  157    40
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1108    53     0  951    43     0  112    63     0  157    40
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1108    53     0  951    43     0  112    63     0  157    40
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1108    53     0  951    43     0  112    63     0  157    40
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       0.00 1.91  0.09  0.00 1.91  0.09  0.00 1.28  0.72  0.00 1.59  0.41
Final Sat.:     0 3154   146     0 3162   138     0 2148  1152     0 2650   650
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.35  0.36  0.00 0.30  0.31  0.00 0.05  0.05  0.00 0.06  0.06
Crit Moves:             ****  ****            ****                   ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:33                Page 56-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #54 Main St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.803
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        53               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  2  0  1    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     179  875    76   160  615   131    91  921    68    75  834    58
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  179  875    76   160  615   131    91  921    68    75  834    58
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   179  875    76   160  615   131    91  921    68    75  834    58
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  179  875    76   160  615   131    91  921    68    75  834    58
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  179  875    76   160  615   131    91  921    68    75  834    58
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.03  1.00
Lanes:       1.00 1.84  0.16  1.00 2.00  1.00  1.00 1.86  0.14  1.00 1.87  0.13
Final Sat.:  1600 3044   256  1600 3400  1600  1600 3080   220  1600 3092   208
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.29  0.30  0.10 0.18  0.08  0.06 0.30  0.31  0.05 0.27  0.28
Crit Moves:             ****  ****                           ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:34                Page 57-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #55 Main St and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.935
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       113               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Prot+Permit      Prot+Permit       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     149 1169    72   138  933    68    78  345    42    71  400   180
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  149 1169    72   138  933    68    78  345    42    71  400   180
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   149 1169    72   138  933    68    78  345    42    71  400   180
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  149 1169    72   138  933    68    78  345    42    71  400   180
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  149 1169    72   138  933    68    78  345    42    71  400   180
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 1.88  0.12  1.00 1.86  0.14  1.00 0.89  0.11  1.00 0.69  0.31
Final Sat.:  1600 3114   186  1600 3083   217  1600 1426   174  1600 1103   497
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.38  0.39  0.09 0.30  0.31  0.05 0.24  0.24  0.04 0.36  0.36
Crit Moves:             ****  ****            ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:35                Page 58-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #56 Main St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.977
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       177               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  1  0    1  0  1  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     111 1181    54   129  646    88   159  940   105   117 1569   162
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  111 1181    54   129  646    88   159  940   105   117 1569   162
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   111 1181    54   129  646    88   159  940   105   117 1569   162
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  111 1181    54   129  646    88   159  940   105   117 1569   162
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  111 1181    54   129  646    88   159  940   105   117 1569   162
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.03  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 1.91  0.09  1.00 1.76  0.24  1.00 2.70  0.30  1.00 2.72  0.28
Final Sat.:  1600 3160   140  1600 2916   384  1600 4518   482  1600 4551   449
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.37  0.39  0.08 0.22  0.23  0.10 0.21  0.22  0.07 0.34  0.36
Crit Moves:             ****  ****            ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:35                Page 59-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #57 Main St and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.781
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        48               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     488 1169   321   271  352   266   385  792    76   188 1488   432
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  488 1169   321   271  352   266   385  792    76   188 1488   432
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   488 1169   321   271  352   266   385  792    76   188 1488   432
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  488 1169   321   271  352   266   385  792    76   188 1488   432
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  488 1169   321   271  352   266   385  792    76   188 1488   432
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.23  0.20  0.08 0.07  0.17  0.12 0.16  0.05  0.06 0.29  0.27
Crit Moves:  ****                      ****  ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:36                Page 60-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #58 Penn Wy and 17th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.790
Loss Time (sec):       5               Average Delay (sec/veh):        20.3
Optimal Cycle:        52               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  0  2    0  0  0  0  0    0  0  2  1  0    1  0  3  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     795    0   388     0    0     0     0 1712   552   126 1480     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  795    0   388     0    0     0     0 1712   552   126 1480     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   795    0   388     0    0     0     0 1712   552   126 1480     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  795    0   388     0    0     0     0 1712   552   126 1480     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  795    0   388     0    0     0     0 1712   552   126 1480     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 1.00  0.75  1.00 1.00  1.00  1.00 0.88  0.88  0.95 0.91  1.00
Lanes:       2.00 0.00  2.00  0.00 0.00  0.00  0.00 2.27  0.73  1.00 3.00  0.00
Final Sat.:  3502    0  2842     0    0     0     0 3777  1218  1805 5187     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.23 0.00  0.14  0.00 0.00  0.00  0.00 0.45  0.45  0.07 0.29  0.00
Crit Moves:  ****                                  ****        ****
Green/Cycle: 0.29 0.00  0.29  0.00 0.00  0.00  0.00 0.57  0.57  0.09 0.66  0.00
Volume/Cap:  0.79 0.00  0.47  0.00 0.00  0.00  0.00 0.79  0.79  0.79 0.43  0.00
Delay/Veh:   37.1  0.0  29.8   0.0  0.0   0.0   0.0 18.1  18.1  67.4  8.1   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  37.1  0.0  29.8   0.0  0.0   0.0   0.0 18.1  18.1  67.4  8.1   0.0
LOS by Move:    D    A     C     A    A     A     A    B     B     E    A     A
HCM2k85thQ:    20    0     9     0    0     0     0   31    31     9   12     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:37                Page 61-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #59 I-5 NB Off Ramps/17th Street
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.630
Loss Time (sec):       5               Average Delay (sec/veh):        20.3
Optimal Cycle:        32               Level Of Service:                  C
******************************************************************************
Street Name:         I-5 NB Off Ramps                    17th Street
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected         Permitted
Rights:           Include          Include          Ignore           Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  1    1  0  0  0  1    1  0  3  0  1    0  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     375   50    20    55    0   142   128 1168   767     0 1622    44
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  375   50    20    55    0   142   128 1168   767     0 1622    44
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Volume:   375   50    20    55    0   142   128 1168     0     0 1622    44
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  375   50    20    55    0   142   128 1168     0     0 1622    44
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
FinalVolume:  375   50    20    55    0   142   128 1168     0     0 1622    44
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.96 0.96  0.85  0.95 1.00  0.85  0.95 0.91  1.00  1.00 0.91  0.91
Lanes:       1.76 0.24  1.00  1.00 0.00  1.00  1.00 3.00  1.00  0.00 2.92  0.08
Final Sat.:  3212  428  1615  1805    0  1615  1805 5187  1900     0 5030   136
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.12  0.01  0.03 0.00  0.09  0.07 0.23  0.00  0.00 0.32  0.32
Crit Moves:       ****                    ****  ****                    ****
Green/Cycle: 0.19 0.19  0.19  0.14 0.00  0.14  0.11 0.62  0.00  0.00 0.51  0.51
Volume/Cap:  0.63 0.63  0.07  0.22 0.00  0.63  0.63 0.36  0.00  0.00 0.63  0.63
Delay/Veh:   39.5 39.5  33.7  38.6  0.0  46.2  48.6  9.1   0.0   0.0 18.1  18.1
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  39.5 39.5  33.7  38.6  0.0  46.2  48.6  9.1   0.0   0.0 18.1  18.1
LOS by Move:    D    D     C     D    A     D     D    A     A     A    B     B
HCM2k85thQ:    11   11     1     3    0     8     8   10     0     0   21    21
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:38                Page 62-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #60 Penn Wy and I-5 SB Ramps
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.433
Loss Time (sec):       5               Average Delay (sec/veh):        22.8
Optimal Cycle:        22               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    2  0  2  0  0    0  0  0  0  0    1  0  0  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  363   238   508  117     0     0    0     0   214    0   183
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  363   238   508  117     0     0    0     0   214    0   183
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  363   238   508  117     0     0    0     0   214    0   183
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  363   238   508  117     0     0    0     0   214    0   183
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  363   238   508  117     0     0    0     0   214    0   183
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  0.85  0.92 0.95  1.00  1.00 1.00  1.00  0.95 1.00  0.75
Lanes:       0.00 2.00  1.00  2.00 2.00  0.00  0.00 0.00  0.00  1.00 0.00  2.00
Final Sat.:     0 3610  1615  3502 3610     0     0    0     0  1805    0  2842
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.10  0.15  0.15 0.03  0.00  0.00 0.00  0.00  0.12 0.00  0.06
Crit Moves:             ****  ****                               ****
Green/Cycle: 0.00 0.34  0.34  0.34 0.68  0.00  0.00 0.00  0.00  0.27 0.00  0.61
Volume/Cap:  0.00 0.30  0.43  0.43 0.05  0.00  0.00 0.00  0.00  0.43 0.00  0.11
Delay/Veh:    0.0 24.3  26.0  26.1  5.4   0.0   0.0  0.0   0.0  30.5  0.0   8.2
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 24.3  26.0  26.1  5.4   0.0   0.0  0.0   0.0  30.5  0.0   8.2
LOS by Move:    A    C     C     C    A     A     A    A     A     C    A     A
HCM2k85thQ:     0    7     9    10    1     0     0    0     0     9    0     2
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:39                Page 63-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM 4-Way Stop Method (Base Volume Alternative)
*******************************************************************************
Intersection #61 Santiago St and Civic Center Dr
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.896
Loss Time (sec):       5               Average Delay (sec/veh):        27.6
Optimal Cycle:         0               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Stop Sign        Stop Sign        Stop Sign        Stop Sign
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  0  1  0    0  0  1! 0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     133  411    41    20  281    72   266   76   269    14   19    18
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  133  411    41    20  281    72   266   76   269    14   19    18
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   133  411    41    20  281    72   266   76   269    14   19    18
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  133  411    41    20  281    72   266   76   269    14   19    18
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  133  411    41    20  281    72   266   76   269    14   19    18
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 0.91  0.09  1.00 0.80  0.20  1.00 0.22  0.78  0.27 0.38  0.35
Final Sat.:   462  459    46   437  385    99   452  115   406   107  145   138
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.29 0.90  0.90  0.05 0.73  0.73  0.59 0.66  0.66  0.13 0.13  0.13
Crit Moves:           ****        ****                    ****        ****
Delay/Veh:   13.4 44.0  44.0  11.0 26.6  26.6  20.7 21.2  21.2  12.7 12.7  12.7
Delay Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  13.4 44.0  44.0  11.0 26.6  26.6  20.7 21.2  21.2  12.7 12.7  12.7
LOS by Move:    B    E     E     B    D     D     C    C     C     B    B     B
ApproachDel:       37.0             25.8             21.0             12.7
Delay Adj:         1.00             1.00             1.00             1.00
ApprAdjDel:        37.0             25.8             21.0             12.7
LOS by Appr:          E                D                C                B
AllWayAvgQ:   0.4  4.8   4.8   0.0  2.2   2.2   1.3  1.7   1.7   0.1  0.1   0.1
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:40                Page 64-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #62 Santiago St and Santa Ana Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.411
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  0  1    1  0  1  0  1    1  0  0  1  0    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     135  833   236   378  639   103   164  673    87   255  546   347
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  135  833   236   378  639   103   164  673    87   255  546   347
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   135  833   236   378  639   103   164  673    87   255  546   347
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  135  833   236   378  639   103   164  673    87   255  546   347
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  135  833   236   378  639   103   164  673    87   255  546   347
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00  1.00 1.06  1.00
Lanes:       1.00 1.00  1.00  1.00 1.00  1.00  1.00 0.89  0.11  1.00 2.00  1.00
Final Sat.:  1600 1700  1600  1600 1700  1600  1600 1417   183  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.49  0.15  0.24 0.38  0.06  0.10 0.47  0.48  0.16 0.16  0.22
Crit Moves:       ****        ****                          ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #63 Standard Ave and 4th St

Cycle (sec):	100	Critical Vol./Cap.(X):	1.341
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	180	Level Of Service:	F

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Protected			Protected			Protected			Protected		
Rights:	Include			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	1 0	1 0	1	1 0	1 0	1	1 0	0 1	0	1 0	0 1	0
Volume Module:												
Base Vol:	251	543	214	254	428	297	302	477	201	233	648	351
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	251	543	214	254	428	297	302	477	201	233	648	351
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	251	543	214	254	428	297	302	477	201	233	648	351
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	251	543	214	254	428	297	302	477	201	233	648	351
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	251	543	214	254	428	297	302	477	201	233	648	351
Saturation Flow Module:												
Sat/Lane:	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
Adjustment:	1.00	1.06	1.00	1.00	1.06	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lanes:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.70	0.30	1.00	0.65	0.35
Final Sat.:	1600	1700	1600	1600	1700	1600	1600	1126	474	1600	1038	562
Capacity Analysis Module:												
Vol/Sat:	0.16	0.32	0.13	0.16	0.25	0.19	0.19	0.42	0.42	0.15	0.62	0.62
Crit Moves:		****			****			****			****	

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:41                Page 66-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #64 Standard Ave and 1st St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.484
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    0  0  1! 0  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     109  724   259   142  679    47   168 1279    65   264 1888   116
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  109  724   259   142  679    47   168 1279    65   264 1888   116
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   109  724   259   142  679    47   168 1279    65   264 1888   116
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  109  724   259   142  679    47   168 1279    65   264 1888   116
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  109  724   259   142  679    47   168 1279    65   264 1888   116
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.03  1.00  1.00 1.03  1.00
Lanes:       1.00 0.74  0.26  0.16 0.79  0.05  1.00 1.90  0.10  1.00 1.88  0.12
Final Sat.:  1600 1178   422   262 1252    87  1600 3145   155  1600 3115   185
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.61  0.61  0.09 0.54  0.54  0.11 0.41  0.42  0.17 0.61  0.63
Crit Moves:       ****        ****             ****                       ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:42                Page 67-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #65 Standard Ave and Mcfadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.769
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        46               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     103  407    50   110  240    42    53  351    60    68  412   119
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  103  407    50   110  240    42    53  351    60    68  412   119
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   103  407    50   110  240    42    53  351    60    68  412   119
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  103  407    50   110  240    42    53  351    60    68  412   119
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  103  407    50   110  240    42    53  351    60    68  412   119
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 0.89  0.11  1.00 0.85  0.15  1.00 0.85  0.15  1.00 0.78  0.22
Final Sat.:  1600 1425   175  1600 1362   238  1600 1366   234  1600 1241   359
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.29  0.29  0.07 0.18  0.18  0.03 0.26  0.26  0.04 0.33  0.33
Crit Moves:       ****        ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Santa Ana Circulation Element

Level Of Service Computation Report
ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)

Intersection #66 Halladay St and Warner Ave

Cycle (sec):	100	Critical Vol./Cap.(X):	0.824
Loss Time (sec):	5	Average Delay (sec/veh):	xxxxxx
Optimal Cycle:	57	Level Of Service:	D

Approach:	North Bound			South Bound			East Bound			West Bound		
Movement:	L	T	R	L	T	R	L	T	R	L	T	R
Control:	Permitted			Permitted			Permitted			Permitted		
Rights:	Include			Include			Include			Include		
Min. Green:	0	0	0	0	0	0	0	0	0	0	0	0
Y+R:	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Lanes:	1 0	0	0 1	0	0	0 0 0	0	1	1 1 0	0	1	2 0 0
Volume Module:												
Base Vol:	200	0	417	0	0	0	2	955	96	287	2284	0
Growth Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Initial Bse:	200	0	417	0	0	0	2	955	96	287	2284	0
User Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PHF Volume:	200	0	417	0	0	0	2	955	96	287	2284	0
Reduct Vol:	0	0	0	0	0	0	0	0	0	0	0	0
Reduced Vol:	200	0	417	0	0	0	2	955	96	287	2284	0
PCE Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
MLF Adj:	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
FinalVolume:	200	0	417	0	0	0	2	955	96	287	2284	0
Saturation Flow Module:												
Sat/Lane:	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
Adjustment:	1.00	1.06	1.00	1.00	1.06	1.00	1.00	1.02	1.00	1.00	1.05	1.00
Lanes:	1.00	0.00	1.00	0.00	0.00	0.00	0.01	2.72	0.27	0.33	2.67	0.00
Final Sat.:	1600	0	1600	0	0	0	9	4453	438	536	4464	0
Capacity Analysis Module:												
Vol/Sat:	0.13	0.00	0.26	0.00	0.00	0.00	0.00	0.21	0.22	0.18	0.51	0.00
Crit Moves:			****				****				****	

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:44                Page 69-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #67 Halladay St and Dyer Rd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.945
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       124               Level Of Service:                  E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  1  0    1  0  0  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      57  249   287   125   17    35   166 1433    10    52 1680   134
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   57  249   287   125   17    35   166 1433    10    52 1680   134
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    57  249   287   125   17    35   166 1433    10    52 1680   134
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   57  249   287   125   17    35   166 1433    10    52 1680   134
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   57  249   287   125   17    35   166 1433    10    52 1680   134
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 0.46  0.54  1.00 0.33  0.67  1.00 2.98  0.02  1.00 2.78  0.22
Final Sat.:  1600  743   857  1600  523  1077  1600 4967    33  1600 4645   355
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.34  0.33  0.08 0.03  0.03  0.10 0.29  0.30  0.03 0.36  0.38
Crit Moves:       ****        ****             ****                       ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:45                Page 70-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #68 SR-55 SB Ramps and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.602
Loss Time (sec):       5               Average Delay (sec/veh):        18.4
Optimal Cycle:        30               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  2    0  0  2  1  1    0  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   321    0   777     0 1305  1163     0 1547   608
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   321    0   777     0 1305  1163     0 1547   608
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:     0    0     0   321    0   777     0 1305     0     0 1547     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   321    0   777     0 1305     0     0 1547     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:    0    0     0   321    0   777     0 1305     0     0 1547     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.92 1.00  0.75  1.00 0.91  0.91  1.00 0.91  1.00
Lanes:       0.00 0.00  0.00  2.00 0.00  2.00  0.00 3.00  1.00  0.00 3.00  1.00
Final Sat.:     0    0     0  3502    0  2842     0 5187  1729     0 5187  1900
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.09 0.00  0.27  0.00 0.25  0.00  0.00 0.30  0.00
Crit Moves:                               ****  ****                 ****
Green/Cycle: 0.00 0.00  0.00  0.45 0.00  0.45  0.00 0.50  0.00  0.00 0.50  0.00
Volume/Cap:  0.00 0.00  0.00  0.20 0.00  0.60  0.00 0.51  0.00  0.00 0.60  0.00
Delay/Veh:    0.0  0.0   0.0  16.5  0.0  21.3   0.0 17.2   0.0   0.0 18.5   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0  16.5  0.0  21.3   0.0 17.2   0.0   0.0 18.5   0.0
LOS by Move:    A    A     A     B    A     C     A    B     A     A    B     A
HCM2k85thQ:     0    0     0     5    0    16     0   15     0     0   19     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:47                Page 71-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #69 SR-55 NB Ramps and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.511
Loss Time (sec):       5               Average Delay (sec/veh):        16.2
Optimal Cycle:        25               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Ignore           Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  0  0  1    0  0  0  0  0    0  0  2  0  2    0  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     726    0   483     0    0     0     0  764   785     0 1444  1040
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  726    0   483     0    0     0     0  764   785     0 1444  1040
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:   726    0     0     0    0     0     0  764     0     0 1444     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  726    0     0     0    0     0     0  764     0     0 1444     0
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:  726    0     0     0    0     0     0  764     0     0 1444     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 1.00  1.00  1.00 1.00  1.00  1.00 0.95  0.88  1.00 0.91  1.00
Lanes:       2.00 0.00  1.00  0.00 0.00  0.00  0.00 2.00  2.00  0.00 3.00  1.00
Final Sat.:  3502    0  1900     0    0     0     0 3610  3344     0 5187  1900
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.21 0.00  0.00  0.00 0.00  0.00  0.00 0.21  0.00  0.00 0.28  0.00
Crit Moves:  ****                             ****                   ****
Green/Cycle: 0.41 0.00  0.00  0.00 0.00  0.00  0.00 0.54  0.00  0.00 0.54  0.00
Volume/Cap:  0.51 0.00  0.00  0.00 0.00  0.00  0.00 0.39  0.00  0.00 0.51  0.00
Delay/Veh:   22.6  0.0   0.0   0.0  0.0   0.0   0.0 13.3   0.0   0.0 14.5   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  22.6  0.0   0.0   0.0  0.0   0.0   0.0 13.3   0.0   0.0 14.5   0.0
LOS by Move:    C    A     A     A    A     A     A    B     A     A    B     A
HCM2k85thQ:    13    0     0     0    0     0     0   11     0     0   16     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:48                Page 72-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #70 SR-55 SB Ramps and Dyer Rd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.679
Loss Time (sec):       5               Average Delay (sec/veh):        26.5
Optimal Cycle:        37               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:            Ovl              Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  2    0  1  1  0  1    1  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     386   12   291   103  226   110    66 1544   210   507  904    58
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  386   12   291   103  226   110    66 1544   210   507  904    58
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   386   12   291   103  226   110    66 1544   210   507  904    58
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  386   12   291   103  226   110    66 1544   210   507  904    58
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  386   12   291   103  226   110    66 1544   210   507  904    58
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.95  0.75  0.94 0.94  0.85  0.95 0.91  0.85  0.92 0.91  0.85
Lanes:       1.94 0.06  2.00  0.63 1.37  1.00  1.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3516  109  2842  1113 2443  1615  1805 5187  1615  3502 5187  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.11  0.10  0.09 0.09  0.07  0.04 0.30  0.13  0.14 0.17  0.04
Crit Moves:       ****             ****             ****             ****
Green/Cycle: 0.16 0.16  0.38  0.14 0.14  0.14  0.11 0.44  0.44  0.21 0.54  0.54
Volume/Cap:  0.68 0.68  0.27  0.68 0.68  0.50  0.32 0.68  0.30  0.68 0.32  0.07
Delay/Veh:   42.7 42.7  21.9  45.0 45.0  41.8  41.8 23.3  18.4  38.7 12.9  11.1
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  42.7 42.7  21.9  45.0 45.0  41.8  41.8 23.3  18.4  38.7 12.9  11.1
LOS by Move:    D    D     C     D    D     D     D    C     B     D    B     B
HCM2k85thQ:    11   11     6    10   10     6     3   22     7    13    9     1
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:48                Page 73-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #71 Glassell St and La Veta Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.766
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        46               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Ovl              Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  1  0  1    1  0  1  1  0    1  0  1  0  1    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     573  595   194    15  499    37   112  367   631   225  407    16
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  573  595   194    15  499    37   112  367   631   225  407    16
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   573  595   194    15  499    37   112  367   631   225  407    16
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  573  595   194    15  499    37   112  367   631   225  407    16
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  573  595   194    15  499    37   112  367   631   225  407    16
OvlAdjVol:                 0                                  344
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.06  1.00  1.00 1.03  1.00
Lanes:       2.00 1.00  1.00  1.00 1.86  0.14  1.00 1.00  1.00  1.00 1.92  0.08
Final Sat.:  3200 1700  1600  1600 3079   221  1600 1700  1600  1600 3179   121
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.18 0.35  0.12  0.01 0.16  0.17  0.07 0.22  0.39  0.14 0.13  0.13
OvlAdjV/S:                 0.00                                  0.22
Crit Moves:        ****        ****                   ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

```
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:49                Page 74-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #72 Glassell St and SR-22 WB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.943
Loss Time (sec):       5               Average Delay (sec/veh):        33.4
Optimal Cycle:       125               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected         Permitted      Split Phase      Split Phase
Rights:           Include           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  0    0  0  2  0  1    0  0  0  0  0    1  0  1! 0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     640 1045     0     0 1110   323     0    0     0   268    9   476
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  640 1045     0     0 1110   323     0    0     0   268    9   476
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   640 1045     0     0 1110   323     0    0     0   268    9   476
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  640 1045     0     0 1110   323     0    0     0   268    9   476
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  640 1045     0     0 1110   323     0    0     0   268    9   476
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.95  1.00  1.00 0.95  0.85  1.00 1.00  1.00  0.86 0.86  0.86
Lanes:       1.00 2.00  0.00  0.00 2.00  1.00  0.00 0.00  0.00  1.35 0.02  1.63
Final Sat.:  1805 3610     0     0 3610  1615     0    0     0  2201   38  2646
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.35 0.29  0.00  0.00 0.31  0.20  0.00 0.00  0.00  0.12 0.23  0.18
Crit Moves:  ****                 ****                               ****
Green/Cycle: 0.38 0.70  0.00  0.00 0.33  0.33  0.00 0.00  0.00  0.25 0.25  0.25
Volume/Cap:  0.94 0.41  0.00  0.00 0.94  0.61  0.00 0.00  0.00  0.49 0.94  0.73
Delay/Veh:   51.9  6.4   0.0   0.0 47.5  30.5   0.0  0.0   0.0  32.4 56.2  37.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  51.9  6.4   0.0   0.0 47.5  30.5   0.0  0.0   0.0  32.4 56.2  37.0
LOS by Move:    D    A     A     A    D     C     A    A     A     C    E     D
HCM2k85thQ:    34   11     0     0   32    14     0    0     0     9   24    15
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:50                Page 75-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #73 Grand Ave / Glassell St and SR-22 EB Ramps
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.927
Loss Time (sec):       5               Average Delay (sec/veh):        31.8
Optimal Cycle:       109               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted       Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    1  0  2  0  0    1  0  1! 0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1316   336   505  903     0   238    4   522     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1316   336   505  903     0   238    4   522     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1316   336   505  903     0   238    4   522     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1316   336   505  903     0   238    4   522     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1316   336   505  903     0   238    4   522     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  0.85  0.95 0.95  1.00  0.86 0.86  0.86  1.00 1.00  1.00
Lanes:       0.00 2.00  1.00  1.00 2.00  0.00  1.31 0.01  1.68  0.00 0.00  0.00
Final Sat.:     0 3610  1615  1805 3610     0  2130   17  2731     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.36  0.21  0.28 0.25  0.00  0.11 0.24  0.19  0.00 0.00  0.00
Crit Moves:       ****        ****                ****
Green/Cycle: 0.00 0.39  0.39  0.30 0.70  0.00  0.25 0.25  0.25  0.00 0.00  0.00
Volume/Cap:  0.00 0.93  0.53  0.93 0.36  0.00  0.44 0.93  0.75  0.00 0.00  0.00
Delay/Veh:    0.0 39.7  24.1  55.9  6.3   0.0  31.4 52.7  37.5   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 39.7  24.1  55.9  6.3   0.0  31.4 52.7  37.5   0.0  0.0   0.0
LOS by Move:    A    D     C     E    A     A     C    D     D     A    A     A
HCM2k85thQ:     0   36    13    28    9     0     8   23    16     0    0     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:51                Page 76-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #74 Grand Ave and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.665
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        34               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      50 1311   262   242  974    89    79   45    33   153   29   109
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   50 1311   262   242  974    89    79   45    33   153   29   109
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    50 1311   262   242  974    89    79   45    33   153   29   109
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   50 1311   262   242  974    89    79   45    33   153   29   109
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   50 1311   262   242  974    89    79   45    33   153   29   109
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.00  1.00
Lanes:       1.00 2.50  0.50  1.00 2.75  0.25  1.00 1.15  0.85  1.00 0.21  0.79
Final Sat.:  1600 4201   799  1600 4598   402  1600 1946  1354  1600  336  1264
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.31  0.33  0.15 0.21  0.22  0.05 0.02  0.02  0.10 0.09  0.09
Crit Moves:             ****  ****            ****                 ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:52                Page 77-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #75 Grand Ave and Santa Clara Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.731
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        41               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include        WideBypass          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  0  1  0    1  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      95 1280   266   240  946   240   114  139    26   115  206   220
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   95 1280   266   240  946   240   114  139    26   115  206   220
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    95 1280   266   240  946   240   114  139    26   115  206   220
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   95 1280   266   240  946   240   114  139    26   115  206   220
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   95 1280   266   240  946   240   114  139    26   115  206   220
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.00  1.00  1.00 1.06  1.00
Lanes:       1.00 2.48  0.52  1.00 2.39  0.61  1.00 0.84  0.16  1.00 1.00  1.00
Final Sat.:  1600 4174   826  1600 4029   971  1600 1348   252  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.31  0.32  0.15 0.23  0.25  0.07 0.10  0.10  0.07 0.12  0.14
Crit Moves:             ****  ****             ****                     ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:52                Page 78-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                       Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #76 Grand Ave and 17th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.854
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        66               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     266  947   239   294  634   140   371  949   160   284 1046   190
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  266  947   239   294  634   140   371  949   160   284 1046   190
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   266  947   239   294  634   140   371  949   160   284 1046   190
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  266  947   239   294  634   140   371  949   160   284 1046   190
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  266  947   239   294  634   140   371  949   160   284 1046   190
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.40  0.60  1.00 2.46  0.54  2.00 2.57  0.43  2.00 2.54  0.46
Final Sat.:  1600 4033   967  1600 4132   868  3200 4307   693  3200 4262   738
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.17 0.23  0.25  0.18 0.15  0.16  0.12 0.22  0.23  0.09 0.25  0.26
Crit Moves:             ****  ****             ****                     ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:53                Page 79-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #77 Grand Ave and I-5 NB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.764
Loss Time (sec):       5               Average Delay (sec/veh):        11.3
Optimal Cycle:        47               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Ignore           Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  0  1    1  0  3  0  0    0  0  0  0  0    2  0  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 2036  1571    67 1623     0     0    0     0   168    0   202
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 2036  1571    67 1623     0     0    0     0   168    0   202
User Adj:    1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 2036     0    67 1623     0     0    0     0   168    0   202
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 2036     0    67 1623     0     0    0     0   168    0   202
PCE Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 2036     0    67 1623     0     0    0     0   168    0   202
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.95  1.00  0.95 0.91  1.00  1.00 1.00  1.00  0.92 1.00  0.85
Lanes:       0.00 2.00  1.00  1.00 3.00  0.00  0.00 0.00  0.00  2.00 0.00  1.00
Final Sat.:     0 3610  1900  1805 5187     0     0    0     0  3502    0  1615
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.56  0.00  0.04 0.31  0.00  0.00 0.00  0.00  0.05 0.00  0.13
Crit Moves:       ****        ****                                       ****
Green/Cycle: 0.00 0.74  0.00  0.05 0.79  0.00  0.00 0.00  0.00  0.16 0.00  0.16
Volume/Cap:  0.00 0.76  0.00  0.76 0.40  0.00  0.00 0.00  0.00  0.29 0.00  0.76
Delay/Veh:    0.0  9.2   0.0  79.2  3.4   0.0   0.0  0.0   0.0  37.0  0.0  52.4
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  9.2   0.0  79.2  3.4   0.0   0.0  0.0   0.0  37.0  0.0  52.4
LOS by Move:    A    A     A     E    A     A     A    A     A     D    A     D
HCM2k85thQ:     0   30     0     6    9     0     0    0     0     4    0    12
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:54                Page 80-1
------------------------------------------------------------------------------
                          Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #78 Grand Ave and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.827
Loss Time (sec):       5               Average Delay (sec/veh):        28.5
Optimal Cycle:        61               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Ovl             Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  0  2    2  0  1  0  2    0  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     213 2411    40    44  964   684   370  226   356    44  295   213
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  213 2411    40    44  964   684   370  226   356    44  295   213
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   213 2411    40    44  964   684   370  226   356    44  295   213
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  213 2411    40    44  964   684   370  226   356    44  295   213
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  213 2411    40    44  964   684   370  226   356    44  295   213
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  0.91  0.95 0.95  0.75  0.92 1.00  0.75  0.89 0.89  0.89
Lanes:       1.00 2.95  0.05  1.00 2.00  2.00  2.00 1.00  2.00  0.16 1.07  0.77
Final Sat.:  1805 5092    84  1805 3610  2842  3502 1900  2842   270 1810  1307
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.47  0.47  0.02 0.27  0.24  0.11 0.12  0.13  0.16 0.16  0.16
Crit Moves:       ****        ****                      ****        ****
Green/Cycle: 0.18 0.57  0.57  0.03 0.42  0.57  0.15 0.15  0.15  0.20 0.20  0.20
Volume/Cap:  0.64 0.83  0.83  0.83 0.64  0.42  0.70 0.79  0.83  0.83 0.83  0.83
Delay/Veh:   41.9 19.4  19.4 112.6 24.1  12.4  44.4 54.2  53.7  47.0 47.0  47.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  41.9 19.4  19.4 112.6 24.1  12.4  44.4 54.2  53.7  47.0 47.0  47.0
LOS by Move:    D    B     B     F    C     B     D    D     D     D    D     D
HCM2k85thQ:    11   35    35     5   19    11    11   13    13    17   17    17
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:55                Page 81-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #79 Grand Ave and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.718
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        39               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  2  0  1    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     195 1493    45   133  784   313   272  900    89   121  753   138
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  195 1493    45   133  784   313   272  900    89   121  753   138
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   195 1493    45   133  784   313   272  900    89   121  753   138
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  195 1493    45   133  784   313   272  900    89   121  753   138
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  195 1493    45   133  784   313   272  900    89   121  753   138
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.91  0.09  2.00 3.00  1.00  2.00 2.00  1.00  2.00 2.00  1.00
Final Sat.:  3200 4860   140  3200 5100  1600  3200 3400  1600  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.31  0.32  0.04 0.15  0.20  0.09 0.26  0.06  0.04 0.22  0.09
Crit Moves:             ****  ****             ****                   ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:56                Page 82-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                       Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #80 Grand Ave and Chestnut Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.783
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        49               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     180 1352   234   149  664   112    47  143    31    91  283   165
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  180 1352   234   149  664   112    47  143    31    91  283   165
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   180 1352   234   149  664   112    47  143    31    91  283   165
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  180 1352   234   149  664   112    47  143    31    91  283   165
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  180 1352   234   149  664   112    47  143    31    91  283   165
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 2.56  0.44  1.00 2.57  0.43  1.00 0.82  0.18  1.00 0.63  0.37
Final Sat.:  1600 4292   708  1600 4307   693  1600 1315   285  1600 1011   589
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.32  0.33  0.09 0.15  0.16  0.03 0.11  0.11  0.06 0.28  0.28
Crit Moves:             ****  ****             ****                   ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:56                Page 83-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #81 Grand Ave and McFadden Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.813
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        55               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  0  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     232 1320   227   176  800   215    64  238    42    96  762   168
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  232 1320   227   176  800   215    64  238    42    96  762   168
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   232 1320   227   176  800   215    64  238    42    96  762   168
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  232 1320   227   176  800   215    64  238    42    96  762   168
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  232 1320   227   176  800   215    64  238    42    96  762   168
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.00  1.00  1.00 1.04  1.00
Lanes:       1.00 2.56  0.44  1.00 2.36  0.64  1.00 0.85  0.15  1.00 1.64  0.36
Final Sat.:  1600 4296   704  1600 3983  1017  1600 1360   240  1600 2722   578
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.31  0.32  0.11 0.20  0.21  0.04 0.17  0.17  0.06 0.28  0.29
Crit Moves:             ****  ****             ****                     ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:57                Page 84-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #82 Grand Ave and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.079
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     259 1494   129   236  583   327   207  895    72    98 1758   228
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  259 1494   129   236  583   327   207  895    72    98 1758   228
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   259 1494   129   236  583   327   207  895    72    98 1758   228
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  259 1494   129   236  583   327   207  895    72    98 1758   228
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  259 1494   129   236  583   327   207  895    72    98 1758   228
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.76  0.24  1.00 2.00  1.00  1.00 2.78  0.22  1.00 2.66  0.34
Final Sat.:  1600 4618   382  1600 3400  1600  1600 4643   357  1600 4449   551
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.16 0.32  0.34  0.15 0.17  0.20  0.13 0.19  0.20  0.06 0.40  0.41
Crit Moves:             ****  ****             ****                     ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:57                Page 85-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #83 Grand Ave and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.899
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        86               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    2  0  3  0  1    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     218  788   174   178  575   265   342  656   142   244 1556   510
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  218  788   174   178  575   265   342  656   142   244 1556   510
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   218  788   174   178  575   265   342  656   142   244 1556   510
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  218  788   174   178  575   265   342  656   142   244 1556   510
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  218  788   174   178  575   265   342  656   142   244 1556   510
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.46  0.54  1.00 2.05  0.95  2.00 3.00  1.00  2.00 2.26  0.74
Final Sat.:  1600 4132   868  1600 3486  1514  3200 5100  1600  3200 3815  1185
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.19  0.20  0.11 0.16  0.18  0.11 0.13  0.09  0.08 0.41  0.43
Crit Moves:  ****                     ****  ****                     ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:58                Page 86-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #84 SR-55 NB Ramps and Dyer Rd
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.349
Loss Time (sec):       5                Average Delay (sec/veh):         6.0
Optimal Cycle:        19                Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1! 0  1    0  0  0  0  0    0  0  3  0  1    0  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     188    0    51     0    0     0     0 1355   689     0 1411   882
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  188    0    51     0    0     0     0 1355   689     0 1411   882
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
PHF Volume:   188    0    51     0    0     0     0 1355     0     0 1411     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  188    0    51     0    0     0     0 1355     0     0 1411     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  0.00
FinalVolume:  188    0    51     0    0     0     0 1355     0     0 1411     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.93 1.00  0.93  1.00 1.00  1.00  1.00 0.91  1.00  1.00 0.91  0.91
Lanes:       1.79 0.00  1.21  0.00 0.00  0.00  0.00 3.00  1.00  0.00 3.00  0.00
Final Sat.:  3161    0  2147     0    0     0     0 5187  1900     0 5187     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.00  0.02  0.00 0.00  0.00  0.00 0.26  0.00  0.00 0.27  0.00
Crit Moves:  ****                             ****                   ****
Green/Cycle: 0.17 0.00  0.17  0.00 0.00  0.00  0.00 0.78  0.00  0.00 0.78  0.00
Volume/Cap:  0.35 0.00  0.14  0.00 0.00  0.00  0.00 0.34  0.00  0.00 0.35  0.00
Delay/Veh:   36.9  0.0  35.3   0.0  0.0   0.0   0.0  3.3   0.0   0.0  3.4   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  36.9  0.0  35.3   0.0  0.0   0.0   0.0  3.3   0.0   0.0  3.4   0.0
LOS by Move:    D    A     D     A    A     A     A    A     A     A    A     A
HCM2k85thQ:     5    0     2     0    0     0     0    7     0     0    8     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:59                Page 87-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM 4-Way Stop Method (Base Volume Alternative)
******************************************************************************
Intersection #85 Cambridge St and La Veta Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.938
Loss Time (sec):       5               Average Delay (sec/veh):        26.1
Optimal Cycle:         0               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Stop Sign        Stop Sign        Stop Sign        Stop Sign
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Lanes:        1  0  1  0  0    0  0  1  0  1    1  0  0  0  1    0  0  0  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     176  246     0     0  206   191   469    0   309     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  176  246     0     0  206   191   469    0   309     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   176  246     0     0  206   191   469    0   309     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  176  246     0     0  206   191   469    0   309     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  176  246     0     0  206   191   469    0   309     0    0     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Adjustment:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 1.00  0.00  0.00 1.00  1.00  1.00 0.00  1.00  0.00 0.00  0.00
Final Sat.:   454  486     0     0  479   528   500    0   592     0    0     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.39 0.51  xxxx  xxxx 0.43  0.36  0.94 xxxx  0.52  xxxx xxxx  xxxx
Crit Moves:       ****             ****        ****
Delay/Veh:   15.1 16.9   0.0   0.0 15.3  12.9  52.4  0.0  14.9   0.0  0.0   0.0
Delay Adj:   1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  15.1 16.9   0.0   0.0 15.3  12.9  52.4  0.0  14.9   0.0  0.0   0.0
LOS by Move:    C    C     *     *    C     B     F    *     B     *    *     *
ApproachDel:       16.2             14.1             37.5           xxxxxx
Delay Adj:         1.00             1.00             1.00            xxxxx
ApprAdjDel:        16.2             14.1             37.5           xxxxxx
LOS by Appr:          C                B                E                *
AllWayAvgQ:   0.6  0.9   0.0   0.0  0.7   0.5   5.9  0.0   1.0   0.0  0.0   0.0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:45:59                Page 88-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #86 Cambridge St and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.531
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        25               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted        Permitted        Permitted
Rights:            Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    1  0  0  0  1    1  0  1  0  0    0  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   195    0    68    85  148     0     0  218   272
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   195    0    68    85  148     0     0  218   272
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   195    0    68    85  148     0     0  218   272
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   195    0    68    85  148     0     0  218   272
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   195    0    68    85  148     0     0  218   272
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       0.00 0.00  0.00  1.00 0.00  1.00  1.00 1.00  0.00  0.00 0.44  0.56
Final Sat.:     0    0     0  1600    0  1600  1600 1700     0     0  712   888
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.12 0.00  0.04  0.05 0.09  0.00  0.00 0.31  0.31
Crit Moves:                   ****             ****                   ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:00                Page 89-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #87 Mabury St and 1st Street
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.752
Loss Time (sec):       5               Average Delay (sec/veh):        27.2
Optimal Cycle:        46               Level Of Service:                  C
*******************************************************************************
Street Name:              Mabury                          1st Street
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  0  0  1    1  0  1! 0  1    0  0  1  1  0    1  0  1  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:      25    0   256   164   70   310     0 1275    20    31  423     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   25    0   256   164   70   310     0 1275    20    31  423     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    25    0   256   164   70   310     0 1275    20    31  423     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   25    0   256   164   70   310     0 1275    20    31  423     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   25    0   256   164   70   310     0 1275    20    31  423     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 1.00  0.85  0.90 0.90  0.90  1.00 0.95  0.95  0.95 0.95  0.95
Lanes:       1.00 0.00  1.00  1.27 0.23  1.50  0.00 1.97  0.03  1.00 2.00  0.00
Final Sat.:  1805    0  1615  2170  390  2577     0 3547    56  1805 3610     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.01 0.00  0.16  0.08 0.18  0.12  0.00 0.36  0.36  0.02 0.12  0.00
Crit Moves:             ****        ****              ****        ****
Green/Cycle: 0.21 0.00  0.21  0.24 0.24  0.24  0.00 0.48  0.48  0.02 0.50  0.00
Volume/Cap:  0.07 0.00  0.75  0.32 0.75  0.50  0.00 0.75  0.75  0.75 0.23  0.00
Delay/Veh:   31.7  0.0  46.1  31.5 39.8  33.4   0.0 23.2  23.2 103.1 14.2   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  31.7  0.0  46.1  31.5 39.8  33.4   0.0 23.2  23.2 103.1 14.2   0.0
LOS by Move:    C    A     D     C    D     C     A    C     C     F    B     A
HCM2k85thQ:     1    0    14     5   16     9     0   27    27     4    6     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Attachment 8

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:01                Page 90-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #88 Tustin St and La Veta Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.344
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        18               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  1  0  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      31  693   164    96  851    16    13    5    20   134    4    82
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   31  693   164    96  851    16    13    5    20   134    4    82
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    31  693   164    96  851    16    13    5    20   134    4    82
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   31  693   164    96  851    16    13    5    20   134    4    82
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   31  693   164    96  851    16    13    5    20   134    4    82
OvlAdjVol:                                                                   0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       1.00 2.43  0.57  1.00 2.94  0.06  1.00 1.00  1.00  1.94 0.06  1.00
Final Sat.:  1600 4081   919  1600 4911    89  1600 1700  1600  3107   93  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.17  0.18  0.06 0.17  0.18  0.01 0.00  0.01  0.04 0.04  0.05
OvlAdjV/S:                                                                0.00
Crit Moves:             ****  ****                          ****       ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:01                Page 91-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #89 Tustin St and SR-22 WB On-Ramp
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.321
Loss Time (sec):       5               Average Delay (sec/veh):         7.7
Optimal Cycle:        19               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected         Permitted       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  0    0  0  2  1  0    0  0  0  0  0    0  0  0  0  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     383 1100     0     0  642   330     0    0     0     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  383 1100     0     0  642   330     0    0     0     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   383 1100     0     0  642   330     0    0     0     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  383 1100     0     0  642   330     0    0     0     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  383 1100     0     0  642   330     0    0     0     0    0     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 0.95  1.00  1.00 0.86  0.86  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       2.00 2.00  0.00  0.00 2.00  1.00  0.00 0.00  0.00  0.00 0.00  0.00
Final Sat.:  3502 3610     0     0 3282  1641     0    0     0     0    0     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.30  0.00  0.00 0.20  0.20  0.00 0.00  0.00  0.00 0.00  0.00
Crit Moves:  ****                 ****
Green/Cycle: 0.34 0.95  0.00  0.00 0.61  0.61  0.00 0.00  0.00  0.00 0.00  0.00
Volume/Cap:  0.32 0.32  0.00  0.00 0.32  0.33  0.00 0.00  0.00  0.00 0.00  0.00
Delay/Veh:   24.6  0.2   0.0   0.0  9.6   9.6   0.0  0.0   0.0   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  24.6  0.2   0.0   0.0  9.6   9.6   0.0  0.0   0.0   0.0  0.0   0.0
LOS by Move:    C    A     A     A    A     A     A    A     A     A    A     A
HCM2k85thQ:     7    3     0     0    8     8     0    0     0     0    0     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Attachment 8

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:02                Page 92-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #90 Tustin St and SR-22 EB Off-Ramp / Seba Ave
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.625
Loss Time (sec):       5                Average Delay (sec/veh):        23.3
Optimal Cycle:        32                Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:         Permitted        Permitted      Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  2  1  0    1  0  3  0  0    1  0  1! 0  1    0  0  1! 0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1155     3    43  589     0   440   39   558    28    0    67
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1155     3    43  589     0   440   39   558    28    0    67
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1155     3    43  589     0   440   39   558    28    0    67
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1155     3    43  589     0   440   39   558    28    0    67
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1155     3    43  589     0   440   39   558    28    0    67
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  0.91  0.11 0.91  1.00  0.90 0.90  0.90  0.89 1.00  0.89
Lanes:       0.00 2.99  0.01  1.00 3.00  0.00  1.41 0.07  1.52  0.29 0.00  0.71
Final Sat.:     0 5174    13   217 5187     0  2408  124  2596   499    0  1195
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.22  0.22  0.20 0.11  0.00  0.18 0.31  0.21  0.06 0.00  0.06
Crit Moves:       ****                          ****        ****
Green/Cycle: 0.00 0.36  0.36  0.36 0.36  0.00  0.50 0.50  0.50  0.09 0.00  0.09
Volume/Cap:  0.00 0.63  0.63  0.56 0.32  0.00  0.36 0.63  0.43  0.63 0.00  0.63
Delay/Veh:    0.0 27.3  27.3  34.4 23.4   0.0  15.2 18.8  15.8  51.8  0.0  51.8
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 27.3  27.3  34.4 23.4   0.0  15.2 18.8  15.8  51.8  0.0  51.8
LOS by Move:    A    C     C     C    C     A     B    B     B     D    A     D
HCM2k85thQ:     0   17    17     3    7     0     9   19    11     6    0     6
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:03                Page 93-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #91 Tustin Ave and Fairhaven Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.757
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        44               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     258 1377   122   356  940   108    82  185   151    86  191   180
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  258 1377   122   356  940   108    82  185   151    86  191   180
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   258 1377   122   356  940   108    82  185   151    86  191   180
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  258 1377   122   356  940   108    82  185   151    86  191   180
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  258 1377   122   356  940   108    82  185   151    86  191   180
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       2.00 2.76  0.24  2.00 2.69  0.31  1.00 0.55  0.45  1.00 0.51  0.49
Final Sat.:  3200 4609   391  3200 4505   495  1600  881   719  1600  824   776
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.30  0.31  0.11 0.21  0.22  0.05 0.21  0.21  0.05 0.23  0.23
Crit Moves:             ****  ****             ****                   ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:03                Page 94-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #92 Tustin Ave and Santa Clara Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.779
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        48               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    2  0  2  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     176  852   131   199 1574   109    63  198   116   115  144   136
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  176  852   131   199 1574   109    63  198   116   115  144   136
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   176  852   131   199 1574   109    63  198   116   115  144   136
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  176  852   131   199 1574   109    63  198   116   115  144   136
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  176  852   131   199 1574   109    63  198   116   115  144   136
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 2.60  0.40  2.00 2.81  0.19  1.00 0.63  0.37  1.00 0.51  0.49
Final Sat.:  1600 4360   640  3200 4689   311  1600 1009   591  1600  823   777
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.20  0.20  0.06 0.34  0.35  0.04 0.20  0.20  0.07 0.18  0.17
Crit Moves:  ****                      ****       ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:05                Page 95-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #93 Tustin Ave and 17th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.741
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        42               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  1  0    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     233 1000   514   377  404    40   457  898   122   211  693   385
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  233 1000   514   377  404    40   457  898   122   211  693   385
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   233 1000   514   377  404    40   457  898   122   211  693   385
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  233 1000   514   377  404    40   457  898   122   211  693   385
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  233 1000   514   377  404    40   457  898   122   211  693   385
OvlAdjVol:               409                                               197
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.00  1.00  2.00 2.73  0.27  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 3400  1600  3200 4568   432  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.29  0.32  0.12 0.09  0.09  0.14 0.18  0.08  0.07 0.14  0.24
OvlAdjV/S:               0.26                                              0.12
Crit Moves:       ****        ****             ****                 ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:05                Page 96-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #94 Tustin Ave and 4th St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.784
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        49               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    2  0  2  0  1    1  0  2  1  1    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       35  381   123   536  396   145   226  806    41   123  833   513
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    35  381   123   536  396   145   226  806    41   123  833   513
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     35  381   123   536  396   145   226  806    41   123  833   513
Reduct Vol:      0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    35  381   123   536  396   145   226  806    41   123  833   513
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    35  381   123   536  396   145   226  806    41   123  833   513
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 2.27  0.73  2.00 2.00  1.00  1.00 3.00  1.00  1.00 2.00  1.00
Final Sat.:  1600 3829  1171  3200 3400  1600  1600 5100  1600  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.10  0.11  0.17 0.12  0.09  0.14 0.16  0.03  0.08 0.25  0.32
Crit Moves:             ****  ****             ****                       ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:06                Page 97-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #95 SR-55 SB Ramps / Auto Mall Dr and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.687
Loss Time (sec):       5               Average Delay (sec/veh):        25.4
Optimal Cycle:        37               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Ignore           Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  1  0  0  2    1  0  1  0  1    1  0  3  0  1    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     401   32   423   110   50    37    46 1649   464   437 1139   136
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  401   32   423   110   50    37    46 1649   464   437 1139   136
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Volume:   401   32   423   110   50    37    46 1649     0   437 1139   136
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  401   32   423   110   50    37    46 1649     0   437 1139   136
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
FinalVolume:  401   32   423   110   50    37    46 1649     0   437 1139   136
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.96 0.96  0.75  0.95 1.00  0.85  0.95 0.91  1.00  0.92 0.90  0.90
Lanes:       1.85 0.15  2.00  1.00 1.00  1.00  1.00 3.00  1.00  2.00 2.68  0.32
Final Sat.:  3364  268  2842  1805 1900  1615  1805 5187  1900  3502 4560   544
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.12  0.15  0.06 0.03  0.02  0.03 0.32  0.00  0.12 0.25  0.25
Crit Moves:             ****  ****                 ****        ****
Green/Cycle: 0.22 0.22  0.22  0.09 0.09  0.09  0.06 0.46  0.00  0.18 0.58  0.58
Volume/Cap:  0.55 0.55  0.69  0.69 0.30  0.26  0.43 0.69  0.00  0.69 0.43  0.43
Delay/Veh:   35.7 35.7  39.3  56.0 43.6  43.5  48.1 22.0   0.0  41.4 11.6  11.6
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  35.7 35.7  39.3  56.0 43.6  43.5  48.1 22.0   0.0  41.4 11.6  11.6
LOS by Move:    D    D     D     E    D     D     D    C     A     D    B     B
HCM2k85thQ:    10   10    12     7    3     2     3   23     0    12   12    12
```

```
********************************************************************************
Note: Queue reported is the number of cars per lane.
********************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:06                Page 98-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #96 SR-55 NB Ramps / Del Amo Ave and Newport Avenue
*******************************************************************************
Cycle (sec):         100                Critical Vol./Cap.(X):         0.951
Loss Time (sec):       5                Average Delay (sec/veh):        46.2
Optimal Cycle:       134                Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    1  0  3  0  1    2  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     879  262    51    19  231   889   165   57    33    23  348    16
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  879  262    51    19  231   889   165   57    33    23  348    16
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   879  262    51    19  231   889   165   57    33    23  348    16
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  879  262    51    19  231   889   165   57    33    23  348    16
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  879  262    51    19  231   889   165   57    33    23  348    16
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 0.89  0.89  0.95 0.91  0.85  0.92 0.90  0.90  0.95 0.94  0.94
Lanes:       2.00 2.51  0.49  1.00 3.00  1.00  2.00 1.27  0.73  1.00 1.91  0.09
Final Sat.:  3502 4238   825  1805 5187  1615  3502 2161  1251  1805 3427   158
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.25 0.06  0.06  0.01 0.04  0.55  0.05 0.03  0.03  0.01 0.10  0.10
Crit Moves:  ****                         ****  ****                   ****
Green/Cycle: 0.26 0.68  0.68  0.12 0.53  0.58  0.05 0.11  0.11  0.05 0.11  0.11
Volume/Cap:  0.95 0.09  0.09  0.09 0.08  0.95  0.95 0.25  0.25  0.25 0.95  0.95
Delay/Veh:   54.9  5.5   5.5  39.7 11.6  38.3 101.1 41.5  41.5  47.0 77.7  77.7
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  54.9  5.5   5.5  39.7 11.6  38.3 101.1 41.5  41.5  47.0 77.7  77.7
LOS by Move:    D    A     A     D    B     D     F    D     D     D    E     E
HCM2k85thQ:    27    2     2     1    2    44     8    2     2     1   15    15
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:07                Page 99-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #97 Red Hill Ave and Edinger Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.865
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        70               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Ovl            Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  3  0  1    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     208 1501   238   108  214   173   410 1051   128    91 1176   574
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  208 1501   238   108  214   173   410 1051   128    91 1176   574
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   208 1501   238   108  214   173   410 1051   128    91 1176   574
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  208 1501   238   108  214   173   410 1051   128    91 1176   574
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  208 1501   238   108  214   173   410 1051   128    91 1176   574
OvlAdjVol:                                 0                24
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00  2.00 3.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 5100  1600  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.29  0.15  0.03 0.04  0.11  0.13 0.21  0.08  0.03 0.23  0.36
OvlAdjV/S:                                 0.00             0.02
Crit Moves:       ****        ****              ****                        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:08                Page 100-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #98 Red Hill Ave and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):          0.952
Loss Time (sec):       5               Average Delay (sec/veh):       xxxxxx
Optimal Cycle:       132               Level Of Service:                    E
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  1  0    2  0  2  1  0    1  0  2  1  0    2  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     343 1175   135    89  341   432   324  880   137    78 1643   216
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  343 1175   135    89  341   432   324  880   137    78 1643   216
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   343 1175   135    89  341   432   324  880   137    78 1643   216
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  343 1175   135    89  341   432   324  880   137    78 1643   216
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  343 1175   135    89  341   432   324  880   137    78 1643   216
OvlAdjVol:                                                                 172
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.59  0.41  2.00 2.00  1.00  1.00 2.60  0.40  2.00 3.00  1.00
Final Sat.:  3200 6040   660  3200 3400  1600  1600 4353   647  3200 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.19  0.20  0.03 0.10  0.27  0.20 0.20  0.21  0.02 0.32  0.14
OvlAdjV/S:                                                                 0.11
Crit Moves:  ****                      ****  ****                 ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:08                Page 101-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #99 Red Hill Ave and Dyer Rd / barranca Pkwy
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.591
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        28               Level Of Service:                  A
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  4  0  1    2  0  4  0  1    2  0  3  1  0    2  0  4  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     344 1293   333   314  531   249   178  662    87   129  979   286
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  344 1293   333   314  531   249   178  662    87   129  979   286
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   344 1293   333   314  531   249   178  662    87   129  979   286
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  344 1293   333   314  531   249   178  662    87   129  979   286
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  344 1293   333   314  531   249   178  662    87   129  979   286
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 4.00  1.00  2.00 4.00  1.00  2.00 3.54  0.46  2.00 4.00  1.00
Final Sat.:  3200 6800  1600  3200 6800  1600  3200 5957   743  3200 6800  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.19  0.21  0.10 0.08  0.16  0.06 0.11  0.12  0.04 0.14  0.18
Crit Moves:             ****  ****             ****                     ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:09              Page 102-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #100 Red Hill Ave and Alton Pkwy
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.494
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  1    1  0  3  0  1    1  0  2  0  1    2  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      27 1513   219   148  628     5   453 1111   569  2003  342  1235
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   27 1513   219   148  628     5   453 1111   569  2003  342  1235
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    27 1513   219   148  628     5   453 1111   569  2003  342  1235
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   27 1513   219   148  628     5   453 1111   569  2003  342  1235
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   27 1513   219   148  628     5   453 1111   569  2003  342  1235
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 3.00  1.00  1.00 3.00  1.00  1.00 2.00  1.00  2.00 1.00  1.00
Final Sat.:  1600 5100  1600  1600 5100  1600  1600 3400  1600  3200 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.30  0.14  0.09 0.12  0.00  0.28 0.33  0.36  0.63 0.20  0.77
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:10              Page 103-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #101 Red Hill Ave and MacArthur Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.722
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        40               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ignore           Include          Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  3  0  1    2  0  3  0  1    1  0  3  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     179 1160    14   340  707  1240   515  237    36    39  818   574
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  179 1160    14   340  707  1240   515  237    36    39  818   574
User Adj:    1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
PHF Volume:   179 1160    14   340  707     0   515  237    36    39  818     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  179 1160    14   340  707     0   515  237    36    39  818     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00  1.00 1.00  0.00
FinalVolume:  179 1160    14   340  707     0   515  237    36    39  818     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.96  0.04  2.00 3.00  1.00  2.00 3.00  1.00  1.00 3.00  1.00
Final Sat.:  3200 4943    57  3200 5100  1600  3200 5100  1600  1600 5100  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.23  0.24  0.11 0.14  0.00  0.16 0.05  0.02  0.02 0.16  0.00
Crit Moves:             ****  ****             ****                   ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:10              Page 104-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #102 Red Hill Ave and Main St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.836
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        61               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  0  1    2  0  2  0  1    2  0  2  1  0    2  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     467 1006   272    88  640   348   212  757   205   284 1617    91
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  467 1006   272    88  640   348   212  757   205   284 1617    91
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   467 1006   272    88  640   348   212  757   205   284 1617    91
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  467 1006   272    88  640   348   212  757   205   284 1617    91
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  467 1006   272    88  640   348   212  757   205   284 1617    91
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.04  1.00
Lanes:       2.00 2.00  1.00  2.00 2.00  1.00  2.00 2.36  0.64  2.00 2.84  0.16
Final Sat.:  3200 3400  1600  3200 3400  1600  3200 3977  1023  3200 4744   256
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.30  0.17  0.03 0.19  0.22  0.07 0.19  0.20  0.09 0.34  0.36
Crit Moves:  ****                     ****  ****                     ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:11              Page 105-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #103 I-5 SB Ramps and Santa Ana Blvd
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.444
Loss Time (sec):       5               Average Delay (sec/veh):        19.9
Optimal Cycle:        22               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Ovl             Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  1    2  0  3  0  0    0  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   357    0    78   595  672     0     0  590   162
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   357    0    78   595  672     0     0  590   162
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   357    0    78   595  672     0     0  590   162
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   357    0    78   595  672     0     0  590   162
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   357    0    78   595  672     0     0  590   162
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.92 1.00  0.85  0.92 0.91  1.00  1.00 0.88  0.88
Lanes:       0.00 0.00  0.00  2.00 0.00  1.00  2.00 3.00  0.00  0.00 2.35  0.65
Final Sat.:     0    0     0  3502    0  1615  3502 5187     0     0 3939  1082
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.10 0.00  0.05  0.17 0.13  0.00  0.00 0.15  0.15
Crit Moves:                   ****             ****                   ****
Green/Cycle: 0.00 0.00  0.00  0.23 0.00  0.61  0.38 0.72  0.00  0.00 0.34  0.34
Volume/Cap:  0.00 0.00  0.00  0.44 0.00  0.08  0.44 0.18  0.00  0.00 0.44  0.44
Delay/Veh:    0.0  0.0   0.0  33.4  0.0   7.9  23.2  4.5   0.0   0.0 26.0  26.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
```

```
AdjDel/Veh:   0.0  0.0   0.0  33.4  0.0   7.9  23.2  4.5   0.0   0.0 26.0  26.0
LOS by Move:    A    A     A     C    A     A     C    A     A     A    C     C
HCM2k85thQ:     0    0     0     8    0     2    11    4     0     0   10    10
********************************************************************************
Note: Queue reported is the number of cars per lane.
********************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:11                Page 106-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #104 Tustin Ranch Rd and Warner Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.671
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        34               Level Of Service:                  B
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:       Split Phase      Split Phase       Protected        Protected
Rights:           Include          Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    2  0  0  0  1    2  0  3  0  0    0  0  3  0  1
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:       0    0     0   653    0    45    64 2124     0     0  925   398
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   653    0    45    64 2124     0     0  925   398
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   653    0    45    64 2124     0     0  925   398
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   653    0    45    64 2124     0     0  925   398
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   653    0    45    64 2124     0     0  925   398
OvlAdjVol:                                                                  71
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 0.00  0.00  2.00 0.00  1.00  2.00 3.00  0.00  0.00 3.00  1.00
Final Sat.:     0    0     0  3200    0  1600  3200 5100     0     0 5100  1600
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.20 0.00  0.03  0.02 0.42  0.00  0.00 0.18  0.25
OvlAdjV/S:                                                                0.04
Crit Moves:                    ****                 ****        ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:12                Page 107-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #105 Von Karman Ave and Barranca Pkwy
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):          1.284
Loss Time (sec):       5               Average Delay (sec/veh):       xxxxxx
Optimal Cycle:       180               Level Of Service:                    F
*******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  1  1  0    2  0  2  0  2    2  0  3  0  1    2  0  4  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     362 2082   454    80  407   280   785 1435   201   254  805   274
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  362 2082   454    80  407   280   785 1435   201   254  805   274
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   362 2082   454    80  407   280   785 1435   201   254  805   274
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  362 2082   454    80  407   280   785 1435   201   254  805   274
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  362 2082   454    80  407   280   785 1435   201   254  805   274
OvlAdjVol:                              0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 1.64  0.36  2.00 2.00  2.00  2.00 3.00  1.00  2.00 4.00  1.00
Final Sat.:  3200 2727   573  3200 3400  3200  3200 5100  1600  3200 6800  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.76  0.79  0.03 0.12  0.09  0.25 0.28  0.13  0.08 0.12  0.17
OvlAdjV/S:                              0.00
Crit Moves:             ****  ****            ****                         ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:13              Page 108-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #106 Red Hill Avenue and El Camino Real
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.696
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        37               Level Of Service:                  B
*******************************************************************************
Street Name:         Red Hill Avenue                   El Camino Real
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    1  0  2  1  0    1  0  1  0  1    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     433 1372   253    20  728    96    52  113   148   265  439    51
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  433 1372   253    20  728    96    52  113   148   265  439    51
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   433 1372   253    20  728    96    52  113   148   265  439    51
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  433 1372   253    20  728    96    52  113   148   265  439    51
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  433 1372   253    20  728    96    52  113   148   265  439    51
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.00  1.00
Lanes:       2.00 3.00  1.00  1.00 2.65  0.35  1.00 1.00  1.00  1.00 0.90  0.10
Final Sat.:  3200 5100  1600  1600 4441   559  1600 1700  1600  1600 1433   167
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.27  0.16  0.01 0.16  0.17  0.03 0.07  0.09  0.17 0.31  0.31
Crit Moves:  ****                     ****  ****                     ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:13              Page 109-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #107 Red Hill Avenue and I-5 NB Ramps
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.623
Loss Time (sec):       5               Average Delay (sec/veh):        23.6
Optimal Cycle:        32               Level Of Service:                 C
*******************************************************************************
Street Name:         Red Hill Avenue                    I-5 NB Ramps
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  0  0    0  0  3  0  1    0  0  0  0  0    1  1  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     292 1670     0     0  865   175     0    0     0   256   96   415
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  292 1670     0     0  865   175     0    0     0   256   96   415
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   292 1670     0     0  865   175     0    0     0   256   96   415
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  292 1670     0     0  865   175     0    0     0   256   96   415
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  292 1670     0     0  865   175     0    0     0   256   96   415
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.95 0.91  1.00  1.00 0.91  0.85  1.00 1.00  1.00  0.83 0.83  0.83
Lanes:       1.00 3.00  0.00  0.00 3.00  1.00  0.00 0.00  0.00  1.45 0.55  1.00
Final Sat.:  1805 5187     0     0 5187  1615     0    0     0  2292  860  1576
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.16 0.32  0.00  0.00 0.17  0.11  0.00 0.00  0.00  0.11 0.11  0.26
Crit Moves:  ****                  ****                                    ****
Green/Cycle: 0.26 0.53  0.00  0.00 0.27  0.27  0.00 0.00  0.00  0.42 0.42  0.42
Volume/Cap:  0.62 0.61  0.00  0.00 0.62  0.40  0.00 0.00  0.00  0.26 0.26  0.62
Delay/Veh:   35.3 16.9   0.0   0.0 33.1  30.7   0.0  0.0   0.0  18.8 18.8  23.6
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
```

```
AdjDel/Veh:  35.3 16.9   0.0   0.0 33.1  30.7   0.0  0.0   0.0  18.8 18.8  23.6
LOS by Move:    D    B     A     A    C     C     A    A     A     B    B     C
HCM2k85thQ:    13   20     0     0   14     7     0    0     0     6    6    17
********************************************************************************
Note: Queue reported is the number of cars per lane.
********************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:14              Page 110-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #108 Red Hill Avenue and I-5 SB Ramps
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.713
Loss Time (sec):       5               Average Delay (sec/veh):        21.8
Optimal Cycle:        40               Level Of Service:                  C
******************************************************************************
Street Name:         Red Hill Avenue                    I-5 SB Ramps
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  4  0  1    1  0  3  0  0    0  1  0  0  1    0  0  0  0  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:       0 1700   540   310  744     0   296    3   265     0    0     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1700   540   310  744     0   296    3   265     0    0     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1700   540   310  744     0   296    3   265     0    0     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1700   540   310  744     0   296    3   265     0    0     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1700   540   310  744     0   296    3   265     0    0     0
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 0.91  0.85  0.95 0.91  1.00  0.92 0.92  0.85  1.00 1.00  1.00
Lanes:       0.00 4.00  1.00  1.00 3.00  0.00  0.99 0.01  1.00  0.00 0.00  0.00
Final Sat.:     0 6916  1615  1805 5187     0  1732   18  1615     0    0     0
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.25  0.33  0.17 0.14  0.00  0.17 0.17  0.16  0.00 0.00  0.00
Crit Moves:             ****  ****                 ****
Green/Cycle: 0.00 0.47  0.47  0.24 0.71  0.00  0.24 0.24  0.24  0.00 0.00  0.00
Volume/Cap:  0.00 0.52  0.71  0.71 0.20  0.00  0.71 0.71  0.68  0.00 0.00  0.00
Delay/Veh:    0.0 18.8  24.4  40.3  4.9   0.0  40.5 40.5  39.6   0.0  0.0   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0 18.8  24.4  40.3  4.9   0.0  40.5 40.5  39.6   0.0  0.0   0.0
LOS by Move:    A    B     C     D    A     A     D    D     D     A    A     A
HCM2k85thQ:     0   15    21    15    4     0    15   15    13     0    0     0
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:15              Page 111-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #109 Red Hill Avenue and Nisson Road
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.715
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        39               Level Of Service:                  C
******************************************************************************
Street Name:         Red Hill Avenue                    Nisson Road
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  1  0    1  0  2  1  0    1  0  0  1  0    1  0  0  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      34 1769    36   142  730    73   247   90    40    48   83   141
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   34 1769    36   142  730    73   247   90    40    48   83   141
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    34 1769    36   142  730    73   247   90    40    48   83   141
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   34 1769    36   142  730    73   247   90    40    48   83   141
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   34 1769    36   142  730    73   247   90    40    48   83   141
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Lanes:       1.00 3.92  0.08  1.00 2.73  0.27  1.00 0.69  0.31  1.00 0.37  0.63
Final Sat.:  1600 6572   128  1600 4564   436  1600 1108   492  1600  593  1007
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.27  0.28  0.09 0.16  0.17  0.15 0.08  0.08  0.03 0.14  0.14
Crit Moves:             ****  ****             ****                   ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:16                Page 112-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #110 Red Hill Avenue and Walnut Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):          0.749
Loss Time (sec):       5               Average Delay (sec/veh):       xxxxxx
Optimal Cycle:        43               Level Of Service:                    C
*******************************************************************************
Street Name:         Red Hill Avenue                   Walnut Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    2  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     283 1378    99   123  382   160    91  218    90   196  654   171
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  283 1378    99   123  382   160    91  218    90   196  654   171
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   283 1378    99   123  382   160    91  218    90   196  654   171
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  283 1378    99   123  382   160    91  218    90   196  654   171
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  283 1378    99   123  382   160    91  218    90   196  654   171
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 2.80  0.20  1.00 2.11  0.89  1.00 1.42  0.58  2.00 1.59  0.41
Final Sat.:  1600 4678   322  1600 3583  1417  1600 2365   935  3200 2637   663
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.18 0.29  0.31  0.08 0.11  0.11  0.06 0.09  0.10  0.06 0.25  0.26
Crit Moves:             ****  ****             ****                   ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:17              Page 113-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #111 Red Hill Avenue and Valencia Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.753
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        44               Level Of Service:                  C
*******************************************************************************
Street Name:         Red Hill Avenue                 Valencia Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  3  1  0    1  0  2  1  0    1  0  1  0  1    2  0  1  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     248 1849   305   116  467    52   110  297   130   284  412   272
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  248 1849   305   116  467    52   110  297   130   284  412   272
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   248 1849   305   116  467    52   110  297   130   284  412   272
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  248 1849   305   116  467    52   110  297   130   284  412   272
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  248 1849   305   116  467    52   110  297   130   284  412   272
OvlAdjVol:               225                                              156
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 3.43  0.57  1.00 2.70  0.30  1.00 1.00  1.00  2.00 1.00  1.00
Final Sat.:  1600 5794   906  1600 4519   481  1600 1700  1600  3200 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.16 0.32  0.34  0.07 0.10  0.11  0.07 0.17  0.08  0.09 0.24  0.17
OvlAdjV/S:               0.25                                              0.10
Crit Moves:       ****         ****              ****                  ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:17              Page 114-1
-------------------------------------------------------------------------------
                         Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #112 Tustin Ranch Road and Warner Avenue North
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.924
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       103               Level Of Service:                  E
*******************************************************************************
Street Name:        Tustin Ranch Road               Warner Avenue North
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  3  0  1    2  0  3  0  0    0  0  0  0  0    3  0  0  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1995  1175   447  657     0     0    0     0   792    0   716
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1995  1175   447  657     0     0    0     0   792    0   716
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1995  1175   447  657     0     0    0     0   792    0   716
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1995  1175   447  657     0     0    0     0   792    0   716
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1995  1175   447  657     0     0    0     0   792    0   716
OvlAdjVol:               911                                               269
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 3.00  1.00  2.00 3.00  0.00  0.00 0.00  0.00  3.00 0.00  2.00
Final Sat.:     0 5100  1600  3200 5100     0     0    0     0  4800    0  3200
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.39  0.73  0.14 0.13  0.00  0.00 0.00  0.00  0.17 0.00  0.22
OvlAdjV/S:               0.57                                               0.08
Crit Moves:              ****  ****                                ****
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:18              Page 115-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #113 Tustin Ranch Road and Walnut Avenue
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.772
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
******************************************************************************
Street Name:        Tustin Ranch Road                 Walnut Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Ovl              Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  1  1  0    2  0  2  0  1
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     876 3814   401   550 1460   947   329  402   230   307 1760  1394
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  876 3814   401   550 1460   947   329  402   230   307 1760  1394
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   876 3814   401   550 1460   947   329  402   230   307 1760  1394
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  876 3814   401   550 1460   947   329  402   230   307 1760  1394
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  876 3814   401   550 1460   947   329  402   230   307 1760  1394
OvlAdjVol:               247              783                              1119
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 1.27  0.73  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 2135  1165  3200 3400  1600
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.27 0.75  0.25  0.17 0.29  0.59  0.10 0.19  0.20  0.10 0.52  0.87
OvlAdjV/S:               0.15             0.49                              0.70
Crit Moves:       ****        ****             ****                        ****
******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:19              Page 116-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
             2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #114 SR-55 SB Ramps and Irvine Boulevard
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.929
Loss Time (sec):       5               Average Delay (sec/veh):        26.5
Optimal Cycle:       111               Level Of Service:                  C
******************************************************************************
Street Name:          SR-55 SB Ramps                  Irvine Boulevard
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected         Permitted       Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  0  0  0    1  0  1! 0  1    0  0  2  1  0    1  0  3  0  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0    0     0   484    0   289     0 1049   707   425 1222     0
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0    0     0   484    0   289     0 1049   707   425 1222     0
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0    0     0   484    0   289     0 1049   707   425 1222     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0    0     0   484    0   289     0 1049   707   425 1222     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0    0     0   484    0   289     0 1049   707   425 1222     0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  1.00 1.00  1.00  0.74 1.00  0.73  1.00 0.86  0.86  0.95 0.91  1.00
Lanes:       0.00 0.00  0.00  1.62 0.00  1.38  0.00 2.00  1.00  1.00 3.00  0.00
Final Sat.:     0    0     0  2278    0  1915     0 3251  1625  1805 5187     0
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.00  0.00  0.21 0.00  0.15  0.00 0.32  0.44  0.24 0.24  0.00
Crit Moves:                    ****                          ****  ****
Green/Cycle: 0.00 0.00  0.00  0.23 0.00  0.46  0.00 0.47  0.47  0.25 0.72  0.00
Volume/Cap:  0.00 0.00  0.00  0.93 0.00  0.33  0.00 0.69  0.93  0.93 0.33  0.00
Delay/Veh:    0.0  0.0   0.0  54.5  0.0  17.5   0.0 21.7  33.7  61.9  5.1   0.0
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:   0.0  0.0   0.0  54.5  0.0  17.5   0.0 21.7  33.7  61.9  5.1   0.0
LOS by Move:    A    A     A     D    A     B     A    C     C     E    A     A
```

```
HCM2k85thQ:     0    0     0    19    0     7     0   22    39    25    8     0
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

```
  Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA
2045 WP PM Peak Hour       Thu Oct 22, 2020 14:46:19              Page 117-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #115 SR-55 NB Ramps and Irvine Boulevard
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.841
Loss Time (sec):       5               Average Delay (sec/veh):        22.3
Optimal Cycle:        65               Level Of Service:                  C
******************************************************************************
Street Name:          SR-55 NB Ramps                  Irvine Boulevard
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|--------------||--------------||--------------||--------------|
Control:         Permitted       Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1! 0  1    0  0  0  0  0    1  0  3  0  0    0  0  2  1  0
------------|--------------||--------------||--------------||--------------|
Volume Module:
Base Vol:     424   21   386     0    0     0   239 1094     0     0 1043   660
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  424   21   386     0    0     0   239 1094     0     0 1043   660
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   424   21   386     0    0     0   239 1094     0     0 1043   660
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  424   21   386     0    0     0   239 1094     0     0 1043   660
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  424   21   386     0    0     0   239 1094     0     0 1043   660
------------|--------------||--------------||--------------||--------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.86 0.86  0.86  1.00 1.00  1.00  0.95 0.91  1.00  1.00 0.86  0.86
Lanes:       1.50 0.05  1.45  0.00 0.00  0.00  1.00 3.00  0.00  0.00 2.00  1.00
Final Sat.:  2445   80  2372     0    0     0  1805 5187     0     0 3257  1629
------------|--------------||--------------||--------------||--------------|
Capacity Analysis Module:
Vol/Sat:     0.17 0.26  0.16  0.00 0.00  0.00  0.13 0.21  0.00  0.00 0.32  0.41
Crit Moves:       ****                          ****                     ****
Green/Cycle: 0.31 0.31  0.31  0.00 0.00  0.00  0.16 0.64  0.00  0.00 0.48  0.48
Volume/Cap:  0.56 0.84  0.52  0.00 0.00  0.00  0.84 0.33  0.00  0.00 0.66  0.84
Delay/Veh:   29.2 38.7  28.7   0.0  0.0   0.0  60.5  8.3   0.0   0.0 20.4  25.9
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  29.2 38.7  28.7   0.0  0.0   0.0  60.5  8.3   0.0   0.0 20.4  25.9
LOS by Move:    C    D     C     A    A     A     E    A     A     A    C     C
HCM2k85thQ:    12   22    11     0    0     0    15    9     0     0   21    31
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

APPENDIX E
MITIGATION WORKSHEETS

```
MITIG8 - 2045 WP AM Peak HoWed Aug 26, 2020 11:37:24                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #3 Euclid St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.995
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  2  0  1    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     127  801    68   180 2613   240   136  595   364   133  812   148
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  127  801    68   180 2613   240   136  595   364   133  812   148
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  127  801    68   180 2613   240   136  595   364   133  812   148
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   127  801    68   180 2613   240   136  595   364   133  812   148
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  127  801    68   180 2613   240   136  595   364   133  812   148
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  127  801    68   180 2613   240   136  595   364   133  812   148
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.05  1.00
Lanes:       2.00 2.77  0.23  2.00 2.75  0.25  1.00 2.00  1.00  1.00 2.54  0.46
Final Sat.:  3200 4624   376  3200 4596   404  1600 3400  1600  1600 4260   740
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.17  0.18  0.06 0.57  0.59  0.09 0.17  0.23  0.08 0.19  0.20
Crit Moves:  ****                     ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoWed Aug 26, 2020 11:38:30                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #3 Euclid St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.803
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        53               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  2  0  1    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     551 1648   117   136  897   228   121  467   140   119 1103   179
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  551 1648   117   136  897   228   121  467   140   119 1103   179
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  551 1648   117   136  897   228   121  467   140   119 1103   179
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   551 1648   117   136  897   228   121  467   140   119 1103   179
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  551 1648   117   136  897   228   121  467   140   119 1103   179
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  551 1648   117   136  897   228   121  467   140   119 1103   179
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.05  1.00
Lanes:       2.00 2.80  0.20  2.00 2.39  0.61  1.00 2.00  1.00  1.00 2.58  0.42
Final Sat.:  3200 4682   318  3200 4027   973  1600 3400  1600  1600 4330   670
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.17 0.35  0.37  0.04 0.22  0.23  0.08 0.14  0.09  0.07 0.25  0.27
Crit Moves:             ****  ****             ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoWed Aug 26, 2020 11:39:58                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #3 Euclid St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.995
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  0  1    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     127  801    68   180 2613   240   136  595   364   133  812   148
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  127  801    68   180 2613   240   136  595   364   133  812   148
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  127  801    68   180 2613   240   136  595   364   133  812   148
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   127  801    68   180 2613   240   136  595   364   133  812   148
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  127  801    68   180 2613   240   136  595   364   133  812   148
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  127  801    68   180 2613   240   136  595   364   133  812   148
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.77  0.23  2.00 2.75  0.25  2.00 2.00  1.00  1.00 2.00  1.00
Final Sat.:  3200 4624   376  3200 4596   404  3200 3400  1600  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.17  0.18  0.06 0.57  0.59  0.04 0.17  0.23  0.08 0.24  0.09
Crit Moves:  ****                     ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoWed Aug 26, 2020 11:40:46                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #3 Euclid St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.822
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        57               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  0  1    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     551 1648   117   136  897   228   121  467   140   119 1103   179
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  551 1648   117   136  897   228   121  467   140   119 1103   179
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  551 1648   117   136  897   228   121  467   140   119 1103   179
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   551 1648   117   136  897   228   121  467   140   119 1103   179
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  551 1648   117   136  897   228   121  467   140   119 1103   179
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  551 1648   117   136  897   228   121  467   140   119 1103   179
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.80  0.20  2.00 2.39  0.61  2.00 2.00  1.00  1.00 2.00  1.00
Final Sat.:  3200 4682   318  3200 4027   973  3200 3400  1600  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.17 0.35  0.37  0.04 0.22  0.23  0.04 0.14  0.09  0.07 0.32  0.11
Crit Moves:             ****  ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoWed Aug 26, 2020 11:41:36                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #3 Euclid St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.965
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       154               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  0  1    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     127  801    68   180 2613   240   136  595   364   133  812   148
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  127  801    68   180 2613   240   136  595   364   133  812   148
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  127  801    68   180 2613   240   136  595   364   133  812   148
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   127  801    68   180 2613   240   136  595   364   133  812   148
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  127  801    68   180 2613   240   136  595   364   133  812   148
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  127  801    68   180 2613   240   136  595   364   133  812   148
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.77  0.23  2.00 2.75  0.25  2.00 2.00  1.00  2.00 2.00  1.00
Final Sat.:  3200 4624   376  3200 4596   404  3200 3400  1600  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.17  0.18  0.06 0.57  0.59  0.04 0.17  0.23  0.04 0.24  0.09
Crit Moves:  ****                     ****  ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoWed Aug 26, 2020 11:41:57                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #3 Euclid St and Edinger Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.822
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        57               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    2  0  2  0  1    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     551 1648   117   136  897   228   121  467   140   119 1103   179
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  551 1648   117   136  897   228   121  467   140   119 1103   179
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  551 1648   117   136  897   228   121  467   140   119 1103   179
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   551 1648   117   136  897   228   121  467   140   119 1103   179
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  551 1648   117   136  897   228   121  467   140   119 1103   179
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  551 1648   117   136  897   228   121  467   140   119 1103   179
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.80  0.20  2.00 2.39  0.61  2.00 2.00  1.00  2.00 2.00  1.00
Final Sat.:  3200 4682   318  3200 4027   973  3200 3400  1600  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.17 0.35  0.37  0.04 0.22  0.23  0.04 0.14  0.09  0.04 0.32  0.11
Crit Moves:             ****  ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoMon Jun 8, 2020 16:46:00                  Page 1-1
-------------------------------------------------------------------------------
                        Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #13 Harbor Blvd and Segerstrom Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.961
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       147               Level Of Service:                  E
*******************************************************************************
Approach:      North Bound      South Bound      East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    1  0  2  1  0    1  0  1  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     107  759    48   173 2324    87    90  753   303   146  453   103
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  107  759    48   173 2324    87    90  753   303   146  453   103
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   107  759    48   173 2324    87    90  753   303   146  453   103
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  107  759    48   173 2324    87    90  753   303   146  453   103
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  107  759    48   173 2324    87    90  753   303   146  453   103
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 2.82  0.18  1.00 2.89  0.11  1.00 1.43  0.57  2.00 2.00  1.00
Final Sat.:  3200 4714   286  1600 4827   173  1600 2382   918  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.16  0.17  0.11 0.48  0.50  0.06 0.32  0.33  0.05 0.13  0.06
Crit Moves:  ****                 ****              ****  ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoMon Jun 8, 2020 16:45:14                  Page 1-1
--------------------------------------------------------------------------------
                          Santa Ana Circulation Element
--------------------------------------------------------------------------------
                       Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
********************************************************************************
Intersection #13 Harbor Blvd and Segerstrom Ave
********************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.934
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       113               Level Of Service:                  E
********************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    1  0  2  1  0    1  0  1  1  0    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     275 1732    55    86  973    86   118  585   192   121 1308   475
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  275 1732    55    86  973    86   118  585   192   121 1308   475
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   275 1732    55    86  973    86   118  585   192   121 1308   475
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  275 1732    55    86  973    86   118  585   192   121 1308   475
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  275 1732    55    86  973    86   118  585   192   121 1308   475
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00
Lanes:       2.00 2.91  0.09  1.00 2.76  0.24  1.00 1.51  0.49  2.00 2.00  1.00
Final Sat.:  3200 4852   148  1600 4610   390  1600 2509   791  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.09 0.36  0.37  0.05 0.21  0.22  0.07 0.23  0.24  0.04 0.38  0.30
Crit Moves:             ****  ****             ****                   ****
********************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoTue Jun 9, 2020 10:55:11                  Page 1-1
-------------------------------------------------------------------------------
                        Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #34 Bristol St and 1st St
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.788
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        50               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound      East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  2  1  1    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     208 1451   184   315 1298   183   206 1268   128   126  949   139
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  208 1451   184   315 1298   183   206 1268   128   126  949   139
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   208 1451   184   315 1298   183   206 1268   128   126  949   139
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  208 1451   184   315 1298   183   206 1268   128   126  949   139
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  208 1451   184   315 1298   183   206 1268   128   126  949   139
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 3.00  1.00  1.00 2.62  0.38
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 5100  1600  1600 4387   613
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.07 0.28  0.12  0.10 0.25  0.11  0.13 0.25  0.08  0.08 0.22  0.23
Crit Moves:       ****        ****             ****                       ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoTue Jun 9, 2020 10:53:45                  Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #34 Bristol St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.867
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        71               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound      East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    1  0  2  1  1    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     434 1872   276   216 1169   264   259 1454   186   155  953    90
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  434 1872   276   216 1169   264   259 1454   186   155  953    90
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   434 1872   276   216 1169   264   259 1454   186   155  953    90
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  434 1872   276   216 1169   264   259 1454   186   155  953    90
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  434 1872   276   216 1169   264   259 1454   186   155  953    90
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  1.00 3.00  1.00  1.00 2.74  0.26
Final Sat.:  3200 5100  1600  3200 5100  1600  1600 5100  1600  1600 4586   414
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.14 0.37  0.17  0.07 0.23  0.17  0.16 0.29  0.12  0.10 0.21  0.22
Crit Moves:       ****        ****                   ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoTue Jun 9, 2020 11:13:41                  Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #37 Bristol St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.814
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        55               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound      East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  1    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      70  778   146   283 1011   119   306 1480   136   157  712    91
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   70  778   146   283 1011   119   306 1480   136   157  712    91
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    70  778   146   283 1011   119   306 1480   136   157  712    91
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   70  778   146   283 1011   119   306 1480   136   157  712    91
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   70  778   146   283 1011   119   306 1480   136   157  712    91
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 3.00  1.00  1.00 2.68  0.32  1.00 2.75  0.25  1.00 2.66  0.34
Final Sat.:  1600 5100  1600  1600 4495   505  1600 4596   404  1600 4456   544
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.15  0.09  0.18 0.22  0.24  0.19 0.32  0.34  0.10 0.16  0.17
Crit Moves:       ****        ****                     ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoTue Jun 9, 2020 11:12:49                  Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #37 Bristol St and Segerstrom Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.868
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        72               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound      East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:         WideBypass         Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  1    1  0  2  1  0    1  0  2  1  0    1  0  2  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     177 1309   231    98  894   187   279  998    79   156 1408    71
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  177 1309   231    98  894   187   279  998    79   156 1408    71
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   177 1309   231    98  894   187   279  998    79   156 1408    71
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  177 1309   231    98  894   187   279  998    79   156 1408    71
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  177 1309   231    98  894   187   279  998    79   156 1408    71
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 3.00  1.00  1.00 2.48  0.52  1.00 2.78  0.22  1.00 2.86  0.14
Final Sat.:  1600 5100  1600  1600 4170   830  1600 4648   352  1600 4770   230
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.26  0.14  0.06 0.21  0.23  0.17 0.21  0.22  0.10 0.30  0.31
Crit Moves:  ****                     ****  ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoTue Jul 14, 2020 10:11:45                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #44 Flower St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.925
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       104               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      89  387   102   366 1158   121   107  983    39   161  664    95
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   89  387   102   366 1158   121   107  983    39   161  664    95
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:   89  387   102   366 1158   121   107  983    39   161  664    95
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:    89  387   102   366 1158   121   107  983    39   161  664    95
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   89  387   102   366 1158   121   107  983    39   161  664    95
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:   89  387   102   366 1158   121   107  983    39   161  664    95
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.03  1.00  1.00 1.03  1.00  1.00 1.04  1.00
Lanes:       1.00 2.00  1.00  1.00 1.81  0.19  1.00 1.92  0.08  1.00 1.75  0.25
Final Sat.:  1600 3400  1600  1600 2997   303  1600 3178   122  1600 2899   401
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.11  0.06  0.23 0.39  0.40  0.07 0.31  0.32  0.10 0.23  0.24
Crit Moves:  ****                     ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoTue Jul 14, 2020 10:09:24                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #44 Flower St and 1st St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.921
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       101               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  0  1    1  0  1  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     211 1000   238   140  383   111   135 1181    98   144  969   101
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  211 1000   238   140  383   111   135 1181    98   144  969   101
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  211 1000   238   140  383   111   135 1181    98   144  969   101
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   211 1000   238   140  383   111   135 1181    98   144  969   101
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  211 1000   238   140  383   111   135 1181    98   144  969   101
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  211 1000   238   140  383   111   135 1181    98   144  969   101
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.03  1.00  1.00 1.03  1.00
Lanes:       1.00 2.00  1.00  1.00 1.55  0.45  1.00 1.85  0.15  1.00 1.81  0.19
Final Sat.:  1600 3400  1600  1600 2581   719  1600 3055   245  1600 2998   302
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.13 0.29  0.15  0.09 0.15  0.15  0.08 0.39  0.40  0.09 0.32  0.33
Crit Moves:       ****        ****                          ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoThu Jun 11, 2020 14:58:30                 Page 1-1
-------------------------------------------------------------------------------
                        Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #62 Santiago St and Santa Ana Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.241
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Approach:      North Bound      South Bound      East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  0  1    1  0  1  0  1    0  1  0  1  0    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     188  611   303   409  972   253   118  732    99   297  699   258
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  188  611   303   409  972   253   118  732    99   297  699   258
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   188  611   303   409  972   253   118  732    99   297  699   258
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  188  611   303   409  972   253   118  732    99   297  699   258
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  188  611   303   409  972   253   118  732    99   297  699   258
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00  1.00 1.06  1.00
Lanes:       1.00 1.00  1.00  1.00 1.00  1.00  0.25 1.54  0.21  1.00 2.00  1.00
Final Sat.:  1600 1700  1600  1600 1700  1600   398 2468   334  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.36  0.19  0.26 0.57  0.16  0.30 0.30  0.30  0.19 0.21  0.16
Crit Moves:  ****               ****             ****              ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoThu Jun 11, 2020 15:18:08                Page 1-1
-------------------------------------------------------------------------------
                        Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #62 Santiago St and Santa Ana Blvd
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.282
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
*******************************************************************************
Approach:      North Bound      South Bound      East Bound      West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  0  1    1  0  1  0  1    0  1  0  1  0    1  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     135  833   236   378  639   103   164  673    87   255  546   347
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  135  833   236   378  639   103   164  673    87   255  546   347
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   135  833   236   378  639   103   164  673    87   255  546   347
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  135  833   236   378  639   103   164  673    87   255  546   347
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  135  833   236   378  639   103   164  673    87   255  546   347
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.00  1.00  1.00 1.06  1.00
Lanes:       1.00 1.00  1.00  1.00 1.00  1.00  0.35 1.46  0.19  1.00 2.00  1.00
Final Sat.:  1600 1700  1600  1600 1700  1600   568 2331   301  1600 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.49  0.15  0.24 0.38  0.06  0.29 0.29  0.29  0.16 0.16  0.22
Crit Moves:       ****        ****                    ****              ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoTue Jul 14, 2020 09:53:26                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #63 Standard Ave and 4th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.062
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  0  1    1  0  1  0  1    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     191  473   248   431  604   332   298  624   219   250  550   340
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  191  473   248   431  604   332   298  624   219   250  550   340
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  191  473   248   431  604   332   298  624   219   250  550   340
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   191  473   248   431  604   332   298  624   219   250  550   340
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  191  473   248   431  604   332   298  624   219   250  550   340
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  191  473   248   431  604   332   298  624   219   250  550   340
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.48  0.52  1.00 1.24  0.76
Final Sat.:  1600 1700  1600  1600 1700  1600  1600 2469   831  1600 2078  1222
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.28  0.16  0.27 0.36  0.21  0.19 0.25  0.26  0.16 0.26  0.28
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoTue Jul 14, 2020 09:55:45                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #63 Standard Ave and 4th St
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.029
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                 F
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  1  0  1    1  0  1  0  1    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     251  543   214   254  428   297   302  477   201   233  648   351
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  251  543   214   254  428   297   302  477   201   233  648   351
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  251  543   214   254  428   297   302  477   201   233  648   351
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   251  543   214   254  428   297   302  477   201   233  648   351
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  251  543   214   254  428   297   302  477   201   233  648   351
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  251  543   214   254  428   297   302  477   201   233  648   351
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.04  1.00  1.00 1.05  1.00
Lanes:       1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.41  0.59  1.00 1.30  0.70
Final Sat.:  1600 1700  1600  1600 1700  1600  1600 2351   949  1600 2176  1124
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.16 0.32  0.13  0.16 0.25  0.19  0.19 0.20  0.21  0.15 0.30  0.31
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoTue Jun 9, 2020 15:58:28                  Page 1-1
-------------------------------------------------------------------------------
                        Santa Ana Circulation Element
-------------------------------------------------------------------------------
                      Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #81 Grand Ave and McFadden Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.861
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        69               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound      East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     262 1104   165   294 1974   192   109  352   107    95  340    86
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  262 1104   165   294 1974   192   109  352   107    95  340    86
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   262 1104   165   294 1974   192   109  352   107    95  340    86
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  262 1104   165   294 1974   192   109  352   107    95  340    86
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  262 1104   165   294 1974   192   109  352   107    95  340    86
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 2.61  0.39  1.00 2.73  0.27  1.00 1.53  0.47  1.00 1.60  0.40
Final Sat.:  1600 4376   624  1600 4575   425  1600 2554   746  1600 2654   646
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.16 0.25  0.26  0.18 0.43  0.45  0.07 0.14  0.14  0.06 0.13  0.13
Crit Moves:  ****                ****  ****                     ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoTue Jun 9, 2020 15:59:40                  Page 1-1
-------------------------------------------------------------------------------
                          Santa Ana Circulation Element
-------------------------------------------------------------------------------
                       Level Of Service Computation Report
           ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
*******************************************************************************
Intersection #81 Grand Ave and McFadden Ave
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.813
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        55               Level Of Service:                  D
*******************************************************************************
Approach:      North Bound      South Bound      East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    1  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     232 1320   227   176  800   215    64  238    42    96  762   168
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  232 1320   227   176  800   215    64  238    42    96  762   168
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   232 1320   227   176  800   215    64  238    42    96  762   168
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  232 1320   227   176  800   215    64  238    42    96  762   168
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  232 1320   227   176  800   215    64  238    42    96  762   168
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.04  1.00
Lanes:       1.00 2.56  0.44  1.00 2.36  0.64  1.00 1.70  0.30  1.00 1.64  0.36
Final Sat.:  1600 4296   704  1600 3983  1017  1600 2820   480  1600 2722   578
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.31  0.32  0.11 0.20  0.21  0.04 0.08  0.09  0.06 0.28  0.29
Crit Moves:           ****  ****            ****                     ****
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoFri Aug 21, 2020 18:32:50                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #91 Tustin Ave and Fairhaven Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.056
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     125  720   126   249 2148    42    78  297   511   306  338   442
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  125  720   126   249 2148    42    78  297   511   306  338   442
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  125  720   126   249 2148    42    78  297   511   306  338   442
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   125  720   126   249 2148    42    78  297   511   306  338   442
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  125  720   126   249 2148    42    78  297   511   306  338   442
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  125  720   126   249 2148    42    78  297   511   306  338   442
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.55  0.45  2.00 2.94  0.06  1.00 1.00  1.00  1.00 1.00  1.00
Final Sat.:  3200 4285   715  3200 4908    92  1600 1700  1600  1600 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.17  0.18  0.08 0.44  0.46  0.05 0.17  0.32  0.19 0.20  0.28
Crit Moves:  ****                     ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoFri Aug 21, 2020 18:34:16                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #91 Tustin Ave and Fairhaven Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.641
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        32               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    2  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     258 1377   122   356  940   108    82  185   151    86  191   180
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  258 1377   122   356  940   108    82  185   151    86  191   180
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  258 1377   122   356  940   108    82  185   151    86  191   180
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   258 1377   122   356  940   108    82  185   151    86  191   180
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  258 1377   122   356  940   108    82  185   151    86  191   180
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  258 1377   122   356  940   108    82  185   151    86  191   180
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 2.76  0.24  2.00 2.69  0.31  1.00 1.10  0.90  1.00 1.03  0.97
Final Sat.:  3200 4609   391  3200 4505   495  1600 1862  1438  1600 1747  1553
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.08 0.30  0.31  0.11 0.21  0.22  0.05 0.10  0.10  0.05 0.11  0.12
Crit Moves:             ****  ****             ****                     ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoFri Aug 21, 2020 18:34:59                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #92 Tustin Ave and Santa Clara Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.938
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       116               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    2  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     102  556   104   135 2756    87   116  293   214   118  244   122
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  102  556   104   135 2756    87   116  293   214   118  244   122
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  102  556   104   135 2756    87   116  293   214   118  244   122
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   102  556   104   135 2756    87   116  293   214   118  244   122
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  102  556   104   135 2756    87   116  293   214   118  244   122
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  102  556   104   135 2756    87   116  293   214   118  244   122
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       1.00 2.53  0.47  2.00 2.91  0.09  1.00 1.16  0.84  1.00 1.33  0.67
Final Sat.:  1600 4244   756  3200 4853   147  1600 1949  1351  1600 2233  1067
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.06 0.13  0.14  0.04 0.57  0.59  0.07 0.15  0.16  0.07 0.11  0.11
Crit Moves:  ****                      ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoFri Aug 21, 2020 18:35:50                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #92 Tustin Ave and Santa Clara Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.681
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        35               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected         Permitted        Permitted
Rights:           Include          Include           Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  2  1  0    2  0  2  1  0    1  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     176  852   131   199 1574   109    63  198   116   115  144   136
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  176  852   131   199 1574   109    63  198   116   115  144   136
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  176  852   131   199 1574   109    63  198   116   115  144   136
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   176  852   131   199 1574   109    63  198   116   115  144   136
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  176  852   131   199 1574   109    63  198   116   115  144   136
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  176  852   131   199 1574   109    63  198   116   115  144   136
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.04  1.00  1.00 1.05  1.00  1.00 1.06  1.00
Lanes:       1.00 2.60  0.40  2.00 2.81  0.19  1.00 1.26  0.74  1.00 1.03  0.97
Final Sat.:  1600 4360   640  3200 4689   311  1600 2118  1182  1600 1746  1554
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.20  0.20  0.06 0.34  0.35  0.04 0.09  0.10  0.07 0.08  0.09
Crit Moves:  ****                      ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoTue Jun 9, 2020 16:22:34                  Page 1-1
-------------------------------------------------------------------------------
                        Santa Ana Circulation Element
-------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
*******************************************************************************
Intersection #96 SR-55 NB Ramps / Del Amo Ave and Newport Avenue
*******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.460
Loss Time (sec):       5               Average Delay (sec/veh):        24.4
Optimal Cycle:        23               Level Of Service:                  C
*******************************************************************************
Approach:      North Bound      South Bound      East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    1  0  3  0  2    2  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     413  109    69    20  497   728   269  163   155     8  223     4
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  413  109    69    20  497   728   269  163   155     8  223     4
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   413  109    69    20  497   728   269  163   155     8  223     4
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  413  109    69    20  497   728   269  163   155     8  223     4
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  413  109    69    20  497   728   269  163   155     8  223     4
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 0.86  0.86  0.95 0.91  0.75  0.92 0.88  0.88  0.95 0.95  0.95
Lanes:       2.00 2.00  1.00  1.00 3.00  2.00  2.00 1.03  0.97  1.00 1.96  0.04
Final Sat.:  3502 3257  1629  1805 5187  2842  3502 1715  1631  1805 3536    63
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.03  0.04  0.01 0.10  0.26  0.08 0.10  0.10  0.00 0.06  0.06
Crit Moves:  ****                     ****  ****                   ****
Green/Cycle: 0.26 0.51  0.51  0.13 0.39  0.56  0.17 0.29  0.29  0.01 0.14  0.14
Volume/Cap:  0.46 0.07  0.08  0.08 0.25  0.46  0.46 0.33  0.33  0.33 0.46  0.46
Delay/Veh:   31.7 12.3  12.4  38.1 20.7  13.4  38.2 28.0  28.0  56.5 40.4  40.4
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  31.7 12.3  12.4  38.1 20.7  13.4  38.2 28.0  28.0  56.5 40.4  40.4
LOS by Move:    C    B     B     D    C     B     D    C     C     E    D     D
HCM2k85thQ:     9    1     2     1    6    12     7    6     6     1    6     6
*******************************************************************************
Note: Queue reported is the number of cars per lane.
*******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoTue Jun 9, 2020 16:21:12                  Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
              2000 HCM Operations Method (Base Volume Alternative)
******************************************************************************
Intersection #96 SR-55 NB Ramps / Del Amo Ave and Newport Avenue
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.700
Loss Time (sec):       5               Average Delay (sec/veh):        28.5
Optimal Cycle:        39               Level Of Service:                  C
******************************************************************************
Approach:      North Bound      South Bound      East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  2  1  0    1  0  3  0  2    2  0  1  1  0    1  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     879  262    51    19  231   889   165   57    33    23  348    16
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  879  262    51    19  231   889   165   57    33    23  348    16
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   879  262    51    19  231   889   165   57    33    23  348    16
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  879  262    51    19  231   889   165   57    33    23  348    16
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  879  262    51    19  231   889   165   57    33    23  348    16
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1900 1900  1900  1900 1900  1900  1900 1900  1900  1900 1900  1900
Adjustment:  0.92 0.89  0.89  0.95 0.91  0.75  0.92 0.90  0.90  0.95 0.94  0.94
Lanes:       2.00 2.51  0.49  1.00 3.00  2.00  2.00 1.27  0.73  1.00 1.91  0.09
Final Sat.:  3502 4238   825  1805 5187  2842  3502 2161  1251  1805 3427   158
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.25 0.06  0.06  0.01 0.04  0.31  0.05 0.03  0.03  0.01 0.10  0.10
Crit Moves:  ****                     ****  ****                     ****
Green/Cycle: 0.36 0.63  0.63  0.11 0.38  0.45  0.07 0.14  0.14  0.07 0.14  0.14
Volume/Cap:  0.70 0.10  0.10  0.10 0.12  0.70  0.70 0.18  0.18  0.18 0.70  0.70
Delay/Veh:   29.3  7.3   7.3  40.5 20.2  24.1  54.7 37.9  37.9  44.6 44.9  44.9
User DelAdj: 1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
AdjDel/Veh:  29.3  7.3   7.3  40.5 20.2  24.1  54.7 37.9  37.9  44.6 44.9  44.9
LOS by Move:    C    A     A     D    C     C     D    D     D     D    D     D
HCM2k85thQ:    19    2     2     1    3    20     6    2     2     1   11    11
******************************************************************************
Note: Queue reported is the number of cars per lane.
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoFri Aug 21, 2020 18:36:38                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #98 Red Hill Ave and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.559
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        26               Level Of Service:                  A
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  1  0    2  0  2  1  0    2  0  2  1  0    2  0  3  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     118  716    97    20  949   191   239  407   300   152  543    96
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  118  716    97    20  949   191   239  407   300   152  543    96
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  118  716    97    20  949   191   239  407   300   152  543    96
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   118  716    97    20  949   191   239  407   300   152  543    96
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  118  716    97    20  949   191   239  407   300   152  543    96
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  118  716    97    20  949   191   239  407   300   152  543    96
OvlAdjVol:                                                                  90
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.52  0.48  2.00 2.50  0.50  2.00 2.00  1.00  2.00 3.40  0.60
Final Sat.:  3200 5936   764  3200 4196   804  3200 3400  1600  3200 5738   962
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.04 0.12  0.13  0.01 0.23  0.24  0.07 0.12  0.19  0.05 0.09  0.10
OvlAdjV/S:                                                                  0.09
Crit Moves:  ****                      ****              ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoFri Aug 21, 2020 18:37:15                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #98 Red Hill Ave and Warner Ave
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.804
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        53               Level Of Service:                  D
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Include          Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  1  0    2  0  2  1  0    2  0  2  1  0    2  0  3  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     343 1175   135    89  341   432   324  880   137    78 1643   216
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  343 1175   135    89  341   432   324  880   137    78 1643   216
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  343 1175   135    89  341   432   324  880   137    78 1643   216
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   343 1175   135    89  341   432   324  880   137    78 1643   216
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  343 1175   135    89  341   432   324  880   137    78 1643   216
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  343 1175   135    89  341   432   324  880   137    78 1643   216
OvlAdjVol:                                                                 195
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.05  1.00  1.00 1.05  1.00
Lanes:       2.00 3.59  0.41  2.00 2.00  1.00  2.00 2.60  0.40  2.00 3.54  0.46
Final Sat.:  3200 6040   660  3200 3400  1600  3200 4353   647  3200 5956   744
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.19  0.20  0.03 0.10  0.27  0.10 0.20  0.21  0.02 0.28  0.29
OvlAdjV/S:                                                                 0.26
Crit Moves:  ****                      ****  ****                 ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoTue Aug 4, 2020 12:08:30                  Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #100 Red Hill Ave and Alton Pkwy
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.684
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        36               Level Of Service:                  B
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Ignore           Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  4  0  1    1  0  3  0  1    2  0  2  1  1    2  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     235  693   434   233 1059   170   185  574   574   335  284   159
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  235  693   434   233 1059   170   185  574   574   335  284   159
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  235  693   434   233 1059   170   185  574   574   335  284   159
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Volume:   235  693   434   233 1059   170   185  574     0   335  284   159
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  235  693   434   233 1059   170   185  574     0   335  284   159
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
FinalVolume:  235  693   434   233 1059   170   185  574     0   335  284   159
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00
Lanes:       1.00 4.00  1.00  1.00 3.00  1.00  2.00 3.00  1.00  2.00 1.28  0.72
Final Sat.:  1600 6800  1600  1600 5100  1600  3200 5100  1600  3200 2151  1149
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.15 0.10  0.27  0.15 0.21  0.11  0.06 0.11  0.00  0.10 0.13  0.14
Crit Moves:             ****  ****                   ****        ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoTue Aug 4, 2020 12:10:27                  Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #100 Red Hill Ave and Alton Pkwy
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.278
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
******************************************************************************
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Include          Ignore           Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        1  0  4  0  1    1  0  3  0  1    2  0  2  1  1    2  0  1  1  0
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:      27 1513   219   148  628     5   453 1111   569  2003  342  1235
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:   27 1513   219   148  628     5   453 1111   569  2003  342  1235
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:   27 1513   219   148  628     5   453 1111   569  2003  342  1235
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
PHF Volume:    27 1513   219   148  628     5   453 1111     0  2003  342  1235
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:   27 1513   219   148  628     5   453 1111     0  2003  342  1235
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00  1.00 1.00  1.00
FinalVolume:   27 1513   219   148  628     5   453 1111     0  2003  342  1235
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       1.00 4.00  1.00  1.00 3.00  1.00  2.00 3.00  1.00  2.00 1.00  1.00
Final Sat.:  1600 6800  1600  1600 5100  1600  3200 5100  1600  3200 1700  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.02 0.22  0.14  0.09 0.12  0.00  0.14 0.22  0.00  0.63 0.20  0.77
Crit Moves:       ****        ****             ****                       ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoTue Jun 9, 2020 18:03:28                  Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #105 Von Karman Ave and Barranca Pkwy
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.930
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       108               Level Of Service:                  E
******************************************************************************
Approach:      North Bound      South Bound      East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  1  1  0    2  0  2  0  2    2  0  3  0  1    2  0  3  1  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     375  497   298    98  960   420   247  928   310   917 1506    47
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  375  497   298    98  960   420   247  928   310   917 1506    47
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   375  497   298    98  960   420   247  928   310   917 1506    47
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  375  497   298    98  960   420   247  928   310   917 1506    47
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  375  497   298    98  960   420   247  928   310   917 1506    47
OvlAdjVol:                                173
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.05  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 1.25  0.75  2.00 2.00  2.00  2.00 3.00  1.00  2.00 4.00  1.00
Final Sat.:  3200 2101  1199  3200 3400  3200  3200 5100  1600  3200 6800  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.12 0.24  0.25  0.03 0.28  0.13  0.08 0.18  0.19  0.29 0.22  0.03
OvlAdjV/S:                                0.05
Crit Moves:  ****                 ****                   ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoTue Jun 9, 2020 18:02:58                  Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
        ICU 1(Loss as Cycle Length %) Method (Base Volume Alternative)
******************************************************************************
Intersection #105 Von Karman Ave and Barranca Pkwy
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.241
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
******************************************************************************
Approach:      North Bound      South Bound      East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:           Include          Ovl              Include          Include
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  1  1  0    2  0  2  0  2    2  0  3  0  1    2  0  3  1  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     362 2082   454    80  407   280   785 1435   201   254  805   274
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  362 2082   454    80  407   280   785 1435   201   254  805   274
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:   362 2082   454    80  407   280   785 1435   201   254  805   274
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  362 2082   454    80  407   280   785 1435   201   254  805   274
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:  362 2082   454    80  407   280   785 1435   201   254  805   274
OvlAdjVol:                              0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.04  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.05  1.00
Lanes:       2.00 1.64  0.36  2.00 2.00  2.00  2.00 3.00  1.00  2.00 3.73  1.27
Final Sat.:  3200 2727   573  3200 3400  3200  3200 5100  1600  3200 6268  2032
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.11 0.76  0.79  0.03 0.12  0.09  0.25 0.28  0.13  0.08 0.13  0.13
OvlAdjV/S:                              0.00
Crit Moves:             ****  ****            ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoWed Oct 21, 2020 17:59:31                 Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #112 Tustin Ranch Road and Warner Avenue North
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.459
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        22               Level Of Service:                  A
******************************************************************************
Street Name:        Tustin Ranch Road              Warner Avenue North
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  3  0  2    2  0  3  0  0    0  0  0  0  0    3  0  0  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0  396   383   412 1165     0     0    0     0   865    0   255
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0  396   383   412 1165     0     0    0     0   865    0   255
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:    0  396   383   412 1165     0     0    0     0   865    0   255
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0  396   383   412 1165     0     0    0     0   865    0   255
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0  396   383   412 1165     0     0    0     0   865    0   255
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0  396   383   412 1165     0     0    0     0   865    0   255
OvlAdjVol:                  0                                               0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 3.00  2.00  2.00 3.00  0.00  0.00 0.00  0.00  3.00 0.00  2.00
Final Sat.:     0 5100  3200  3200 5100     0     0    0     0  4800    0  3200
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.08  0.12  0.13 0.23  0.00  0.00 0.00  0.00  0.18 0.00  0.08
OvlAdjV/S:               0.00                                               0.00
Crit Moves:  ****                 ****                          ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoWed Oct 21, 2020 17:59:09                Page 1-1
------------------------------------------------------------------------------
                        Santa Ana Circulation Element
------------------------------------------------------------------------------
                     Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #112 Tustin Ranch Road and Warner Avenue North
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         0.746
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:        43               Level Of Service:                  C
******************************************************************************
Street Name:        Tustin Ranch Road               Warner Avenue North
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected       Split Phase      Split Phase
Rights:            Ovl              Include          Include           Ovl
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        0  0  3  0  2    2  0  3  0  0    0  0  0  0  0    3  0  0  0  2
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:       0 1995  1175   447  657     0     0    0     0   792    0   716
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:    0 1995  1175   447  657     0     0    0     0   792    0   716
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:    0 1995  1175   447  657     0     0    0     0   792    0   716
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
PHF Volume:     0 1995  1175   447  657     0     0    0     0   792    0   716
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:    0 1995  1175   447  657     0     0    0     0   792    0   716
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
FinalVolume:    0 1995  1175   447  657     0     0    0     0   792    0   716
OvlAdjVol:               647                                              269
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       0.00 3.00  2.00  2.00 3.00  0.00  0.00 0.00  0.00  3.00 0.00  2.00
Final Sat.:     0 5100  3200  3200 5100     0     0    0     0  4800    0  3200
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.00 0.39  0.37  0.14 0.13  0.00  0.00 0.00  0.00  0.17 0.00  0.22
OvlAdjV/S:               0.20                                              0.08
Crit Moves:       ****        ****                                ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP AM Peak HoThu Oct 22, 2020 12:50:42                 Page 1-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #113 Tustin Ranch Road and Walnut Avenue
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.175
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
******************************************************************************
Street Name:        Tustin Ranch Road                  Walnut Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Ovl            Include          Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  2  0  1    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     103  630   314  1123 3139   418   856 1118   675   176  260   219
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  103  630   314  1123 3139   418   856 1118   675   176  260   219
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  103  630   314  1123 3139   418   856 1118   675   176  260   219
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00
PHF Volume:   103  630   314  1123 3139   418   856 1118   675   176  260     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  103  630   314  1123 3139   418   856 1118   675   176  260     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00
FinalVolume:  103  630   314  1123 3139   418   856 1118   675   176  260     0
OvlAdjVol:               226               0
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.00  1.00  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 3400  1600  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.03 0.12  0.20  0.35 0.62  0.26  0.27 0.33  0.42  0.06 0.08  0.00
OvlAdjV/S:               0.14               0.00
Crit Moves:  ****                 ****                    ****  ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

```
MITIG8 - 2045 WP PM Peak HoThu Oct 22, 2020 12:54:00                 Page 1-1
------------------------------------------------------------------------------
                         Santa Ana Circulation Element
------------------------------------------------------------------------------
                      Level Of Service Computation Report
       ICU 1(Loss as Cycle Length %) Method (Future Volume Alternative)
******************************************************************************
Intersection #113 Tustin Ranch Road and Walnut Avenue
******************************************************************************
Cycle (sec):         100               Critical Vol./Cap.(X):         1.590
Loss Time (sec):       5               Average Delay (sec/veh):      xxxxxx
Optimal Cycle:       180               Level Of Service:                  F
******************************************************************************
Street Name:        Tustin Ranch Road                  Walnut Avenue
Approach:      North Bound      South Bound       East Bound       West Bound
Movement:     L  -  T  -  R    L  -  T  -  R    L  -  T  -  R    L  -  T  -  R
------------|---------------||---------------||---------------||---------------|
Control:        Protected        Protected        Protected        Protected
Rights:            Ovl              Ovl              Include          Ignore
Min. Green:     0    0     0     0    0     0     0    0     0     0    0     0
Y+R:          4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0   4.0  4.0   4.0
Lanes:        2  0  3  0  1    2  0  3  0  1    2  0  2  0  1    2  0  2  0  1
------------|---------------||---------------||---------------||---------------|
Volume Module:
Base Vol:     876 3814   401   550 1460   947   329  402   230   307 1760  1394
Growth Adj:  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00
Initial Bse:  876 3814   401   550 1460   947   329  402   230   307 1760  1394
Added Vol:      0    0     0     0    0     0     0    0     0     0    0     0
PasserByVol:    0    0     0     0    0     0     0    0     0     0    0     0
Initial Fut:  876 3814   401   550 1460   947   329  402   230   307 1760  1394
User Adj:    1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00
PHF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00
PHF Volume:   876 3814   401   550 1460   947   329  402   230   307 1760     0
Reduct Vol:     0    0     0     0    0     0     0    0     0     0    0     0
Reduced Vol:  876 3814   401   550 1460   947   329  402   230   307 1760     0
PCE Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00
MLF Adj:     1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  1.00  1.00 1.00  0.00
FinalVolume:  876 3814   401   550 1460   947   329  402   230   307 1760     0
OvlAdjVol:               247              783
------------|---------------||---------------||---------------||---------------|
Saturation Flow Module:
Sat/Lane:    1600 1600  1600  1600 1600  1600  1600 1600  1600  1600 1600  1600
Adjustment:  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00  1.00 1.06  1.00
Lanes:       2.00 3.00  1.00  2.00 3.00  1.00  2.00 2.00  1.00  2.00 2.00  1.00
Final Sat.:  3200 5100  1600  3200 5100  1600  3200 3400  1600  3200 3400  1600
------------|---------------||---------------||---------------||---------------|
Capacity Analysis Module:
Vol/Sat:     0.27 0.75  0.25  0.17 0.29  0.59  0.10 0.12  0.14  0.10 0.52  0.00
OvlAdjV/S:               0.15             0.49
Crit Moves:       ****        ****             ****                   ****
******************************************************************************
```

Traffix 8.0.0715 (c) 2008 Dowling Assoc. Licensed to IBI GROUP, IRVINE, CA

Attachment 8

APPENDIX F
VMT CALCULATIONS

Base Year 2016										
SCENARIO	I-I	I-X	X-I	Total VMT	TOT_POP	Total Employees	VMT/Capita	TOT_POP	Total Employees - Reduced	VMT / Capita
Citywide	698,590	5,295,496	5,291,968	11,286,054	364,042	176,354	20.9	364,042	139,672	22.4
Countywide	47,482,030	24,809,328	24,994,227	97,285,585	3,179,626	1,710,147	19.9	3,179,626	593,421	25.8

Existing Year 2020										
SCENARIO	I-I	I-X	X-I	Total VMT	TOT_POP	Total Employees	VMT/Capita	TOT_POP	Total Employees - Reduced	VMT / Capita
Citywide	697,779	5,356,504	5,352,841	11,407,124	367,064	177,854	20.9	367,064	140,860	22.5
Countywide	48,242,429	25,463,887	25,637,825	99,344,141	3,228,591	1,747,428	20.0	3,228,591	606,358	25.9

Future Year 2045 Baseline										
SCENARIO	I-I	I-X	X-I	Total VMT	TOT_POP	Total Employees	VMT/Capita	TOT_POP	Total Employees - Reduced	VMT / Capita
Citywide	692,704	5,737,798	5,733,292	12,163,794	385,955	187,226	21.2	385,955	148,283	22.8
Countywide	52,994,916	29,554,879	29,660,308	112,210,103	3,534,620	1,980,433	20.3	3,534,620	687,210	26.6

Future Year 2045 WP - 80% Buildout										
SCENARIO	I-I	I-X	X-I	Total VMT	TOT_POP	Total Employees	VMT/Capita	TOT_POP	Total Employees - Reduced	VMT / Capita
Citywide	637,655	5,432,337	5,448,967	11,518,959	432,421	169,438	19.1	432,421	134,195	20.3
Countywide	52,931,787	29,642,498	29,748,229	112,322,514	3,581,086	1,962,645	20.3	3,581,086	681,038	26.4

*In order to mitigate double-counting, a reduction factor was applied to the employee population to account for the amount of employees who are also residents of the City. Per SCAG Local Profile Report (2019), 20.8% of commuters live in the City. Thus, a reduction of 20.8% was applied to the employee population. (https://www.scag.ca.gov/Documents/SantaAna.pdf)


*In order to mitigate double-counting, a reduction factor was applied to the employee population to account for the amount of employees who are also residents of the County. Per SCAG Local Profile Report (2019), 65.3% of commuters live in the County. Thus, a reduction of 65.3% was applied to the employee population. (https://www.scag.ca.gov/Documents/OrangeCountyLP.pdf)

APPENDIX G

OCTAM VOLUME COMPARISON PLOTS


OCTAM 5.0 – Daily Traffic Volume Comparison Between 2045 80% Buildout and 2045 80% Buildout with Baseline Network

Volume in Thousands

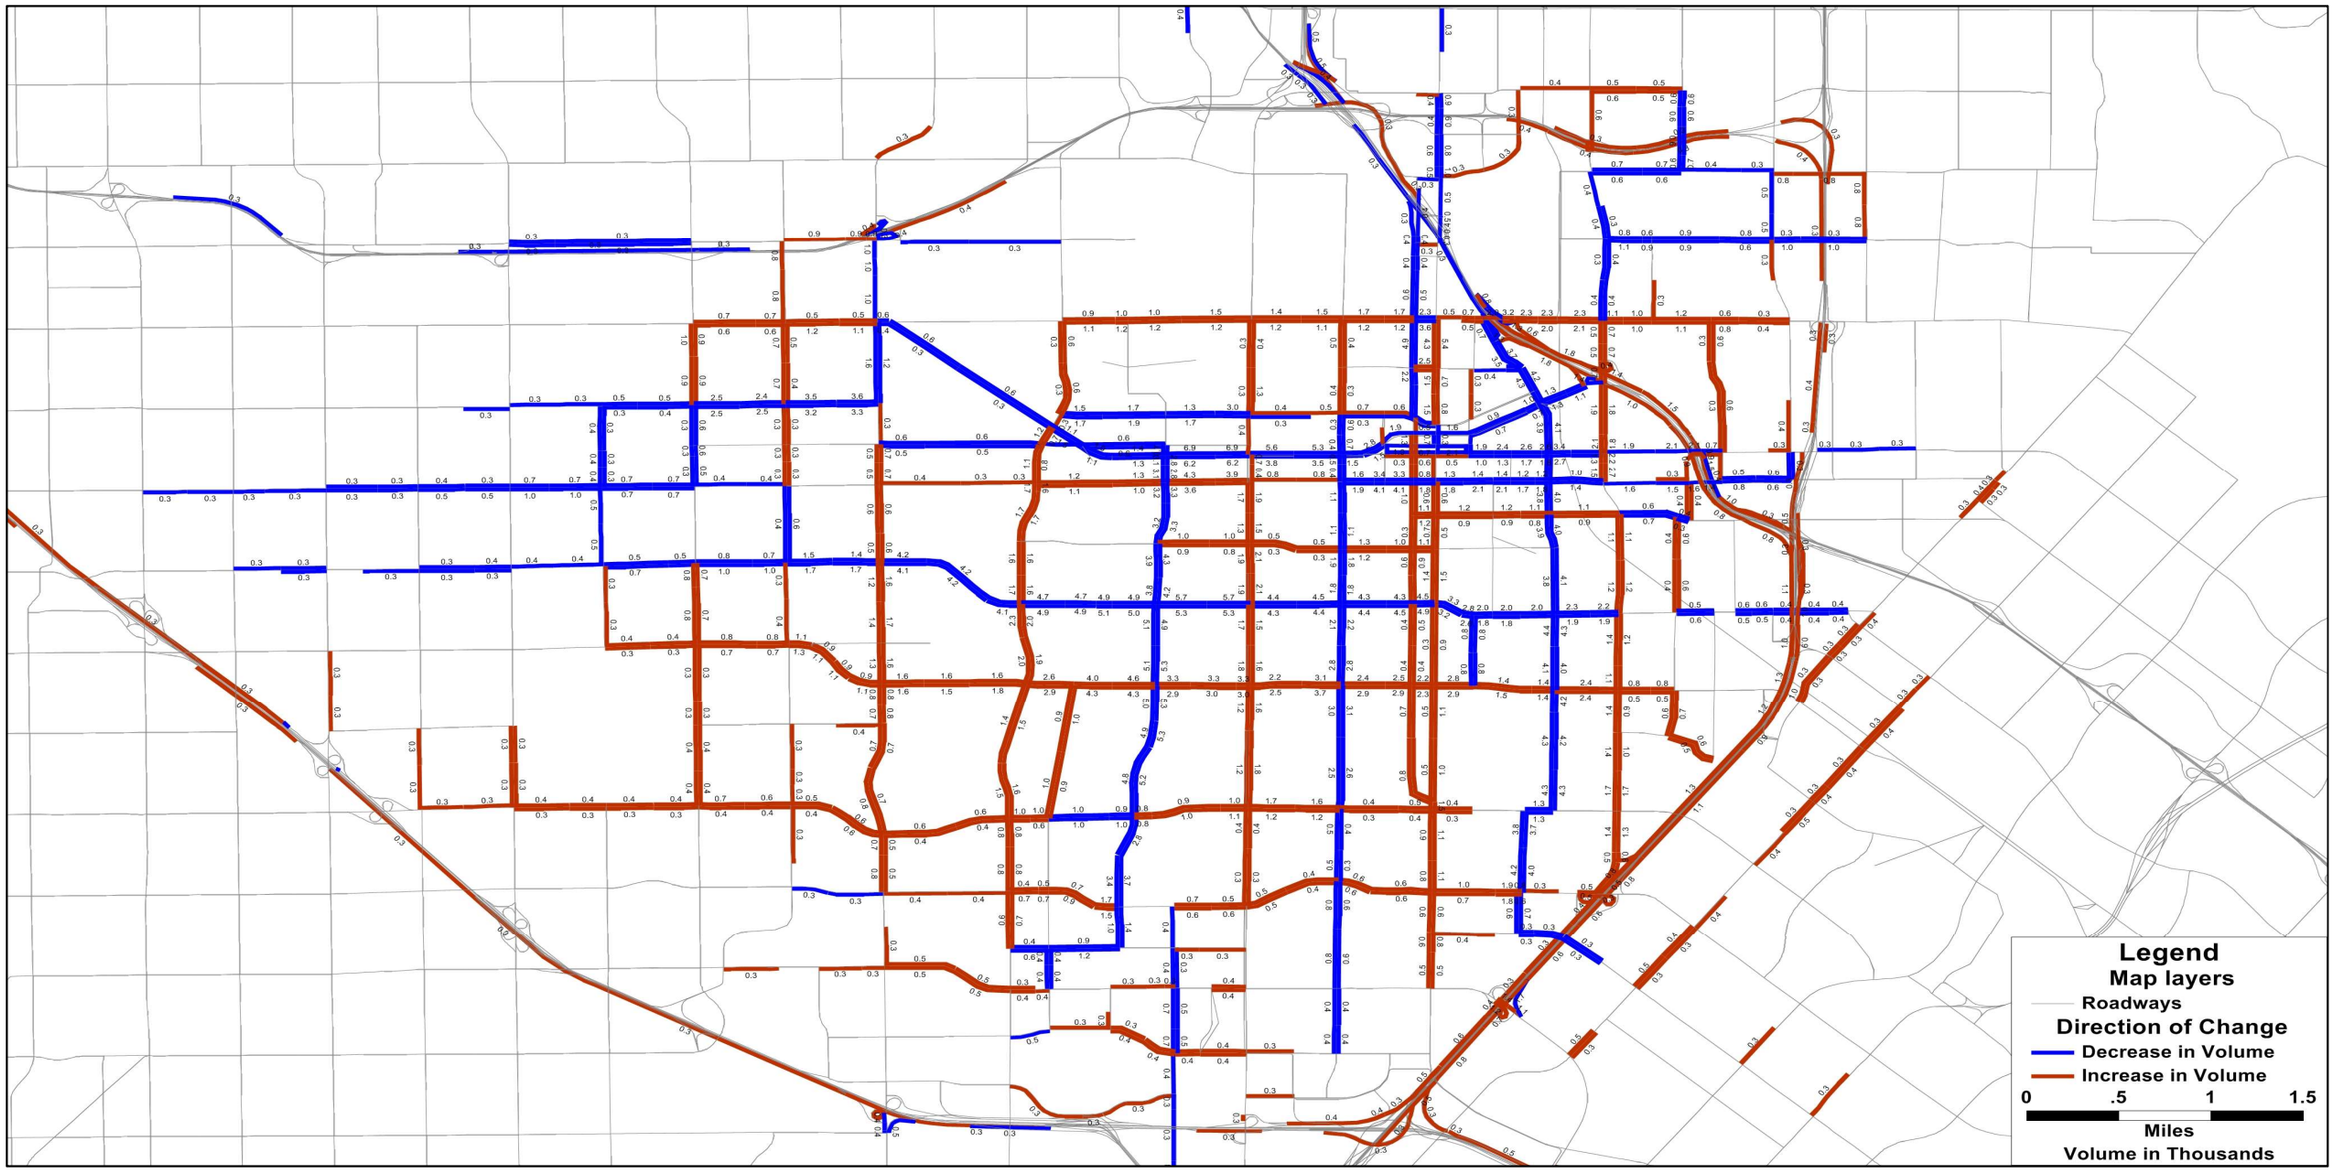


OCTAM 5.0 – AM Peak Traffic Volume Comparison Between 2045 80% Buildout and 2045 80% Buildout with Baseline Network

Volume in Thousands

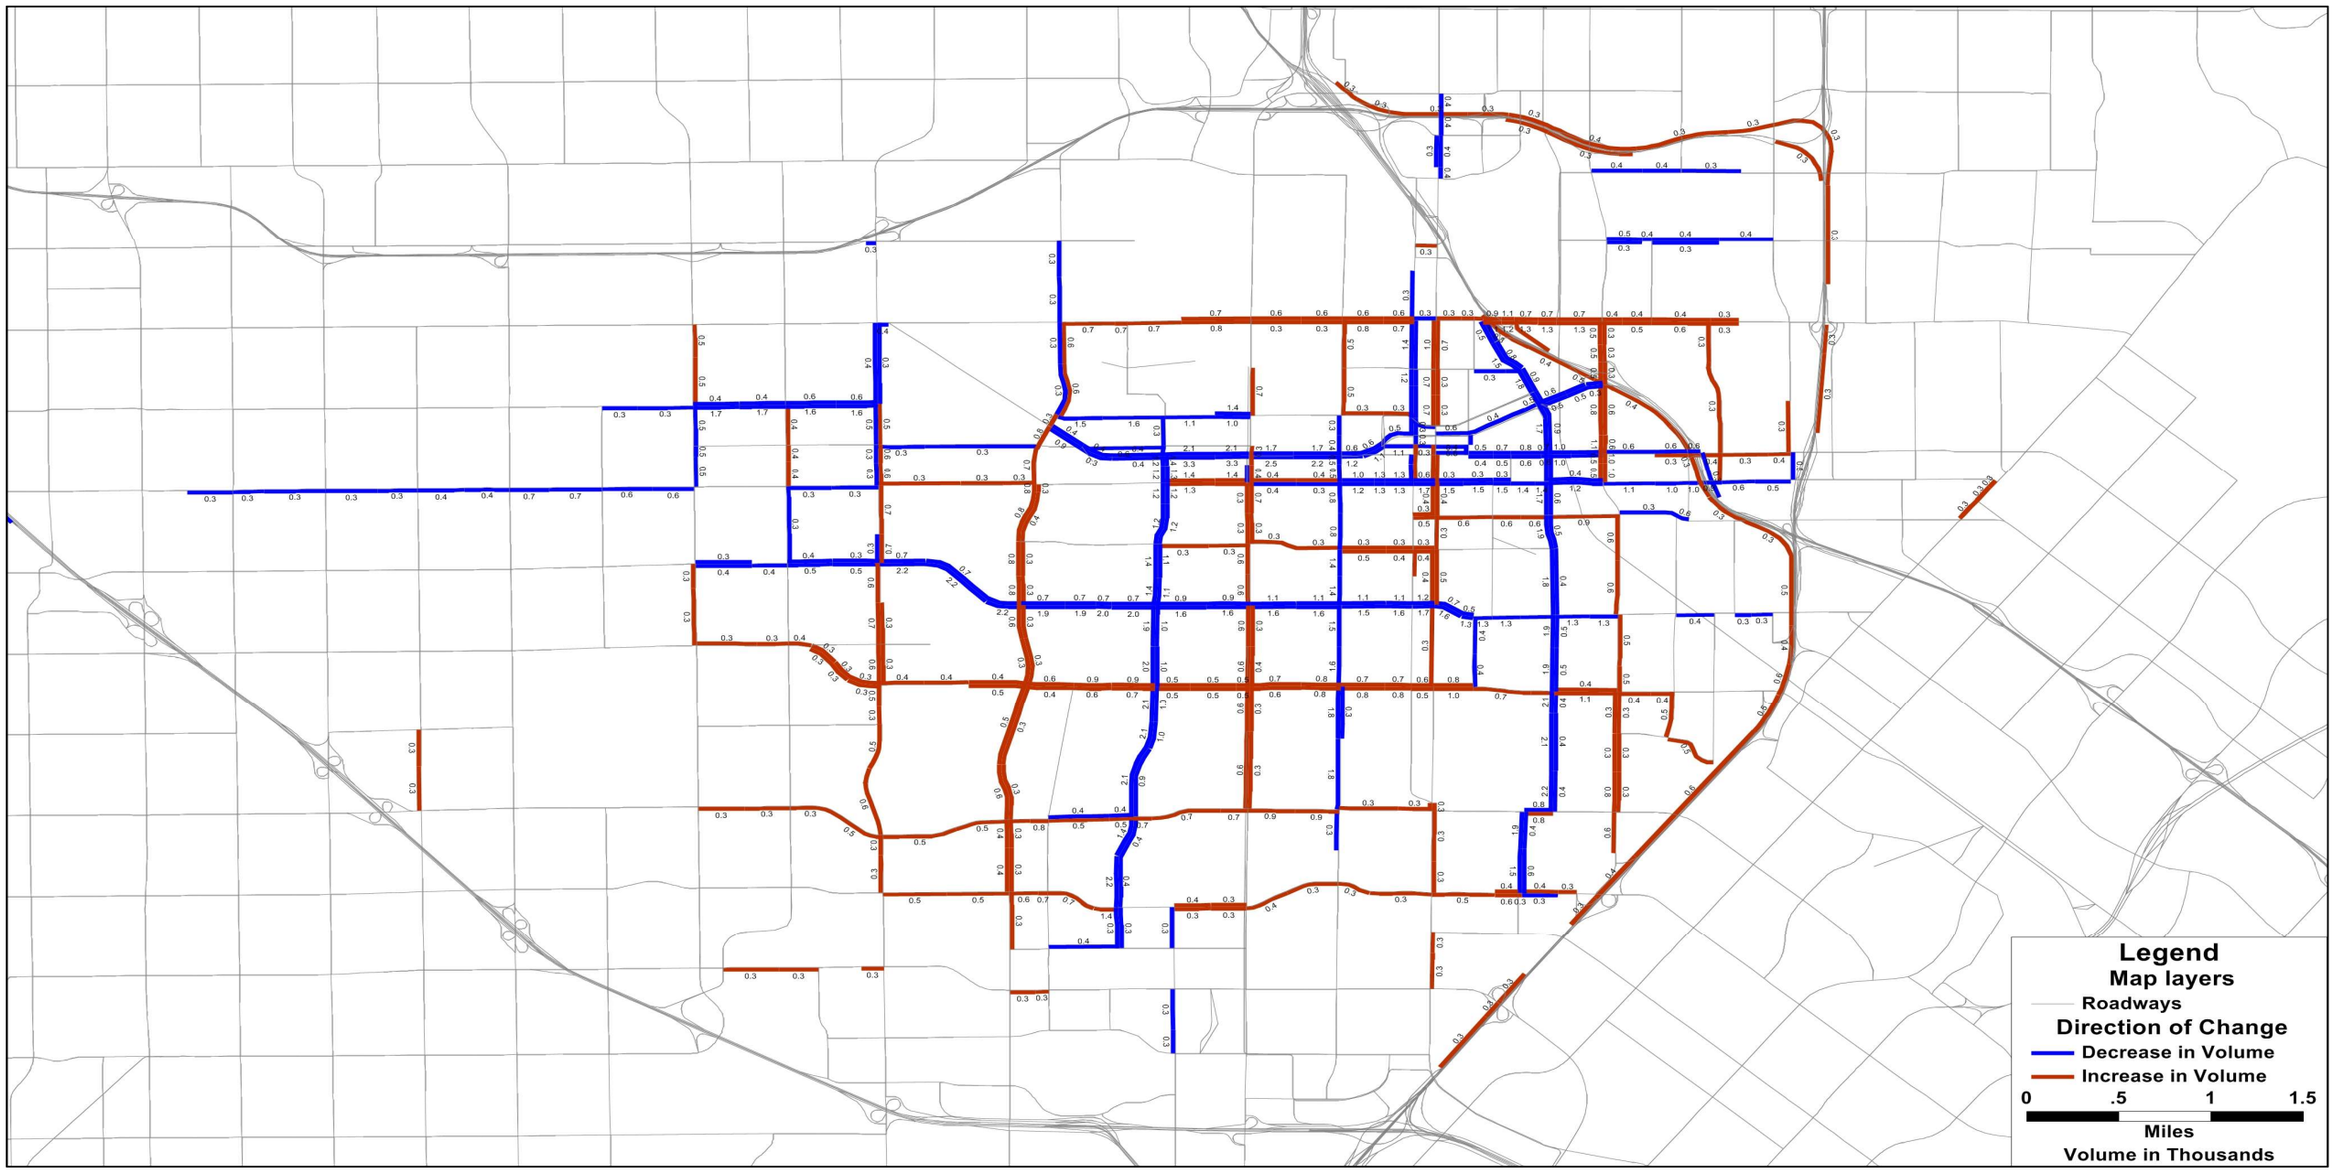

OCTAM 5.0 – PM Peak Traffic Volume Comparison Between 2045 80% Buildout and 2045 80% Buildout with Baseline Network

Volume in Thousands

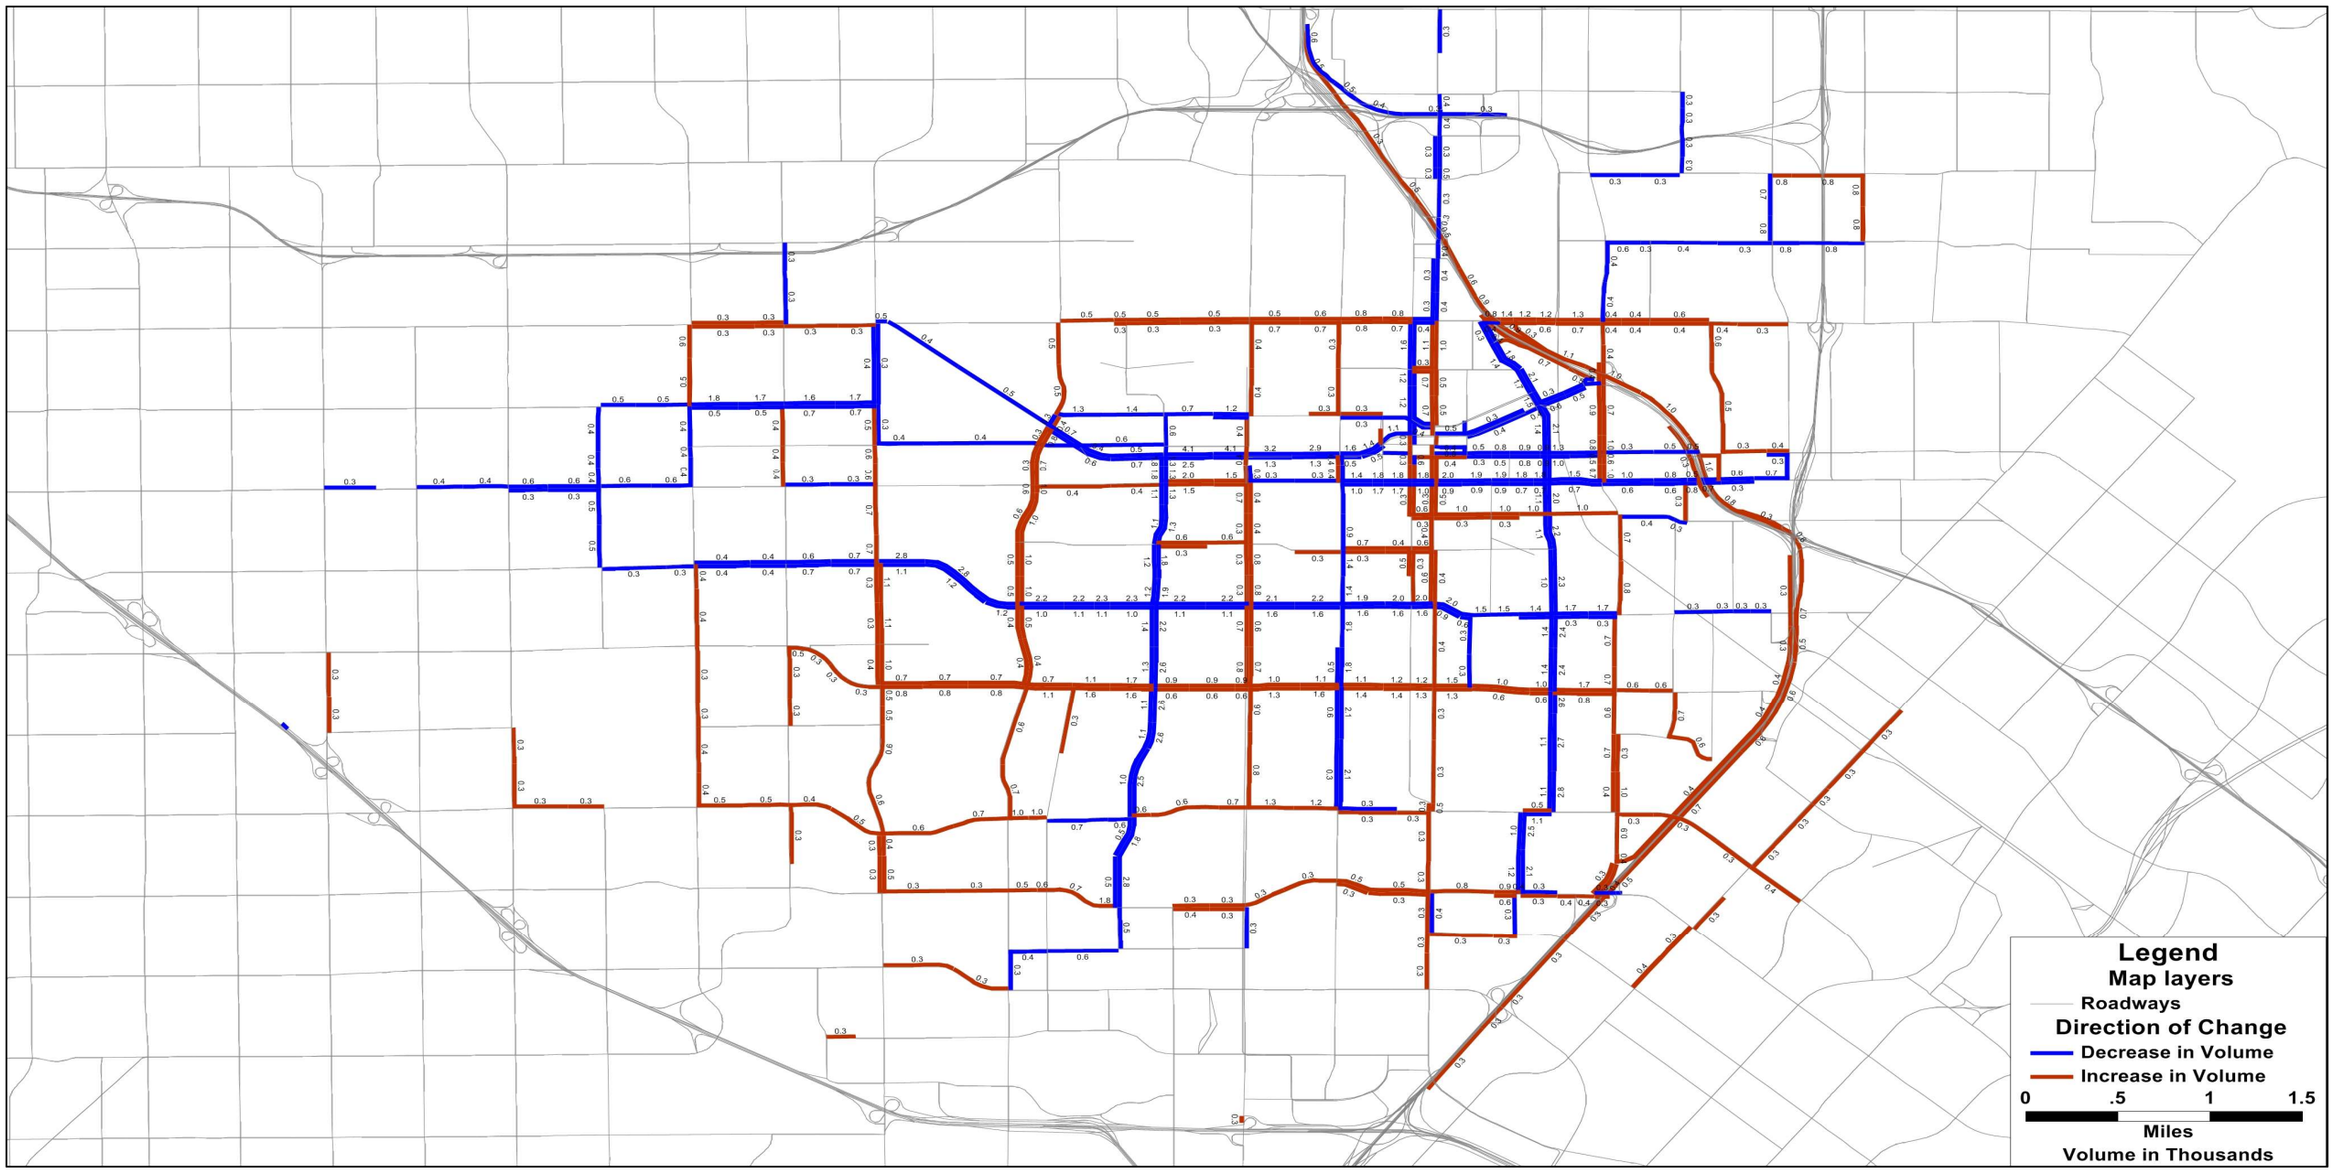

APPENDIX H
COUNTS

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 14, 19

LOCATION: Santa Ana
NORTH & SOUTH: Euclid
EAST & WEST: 1st


PROJECT #: SC2183
LOCATION #: 1
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Euclid			SOUTHBOUND Euclid			EASTBOUND 1st			WESTBOUND 1st				U-TURNS				
	LANES:	NL 1	NT 3	NR 0	SL 1	ST 3	SR 0	EL 1	ET 3	ER 0	WL 1	WT 3	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	7	180	40	42	475	14	33	136	22	23	71	18	1,061	1	0	0	2	3
	7:15 AM	10	203	43	53	504	12	36	138	32	37	109	29	1,206	0	0	0	2	2
	7:30 AM	28	245	48	48	503	19	44	147	38	60	125	42	1,347	0	0	0	1	1
	7:45 AM	34	271	44	47	473	15	62	205	41	47	173	49	1,461	0	0	1	0	1
	8:00 AM	33	264	41	60	432	23	52	210	43	44	168	49	1,419	1	0	0	0	1
	8:15 AM	27	253	44	49	417	45	57	240	29	31	114	46	1,352	1	0	0	2	3
	8:30 AM	21	235	43	58	400	35	41	168	22	37	123	32	1,215	0	0	1	3	4
	8:45 AM	35	179	31	48	377	39	56	117	23	35	141	34	1,115	1	0	0	0	1
	VOLUMES	195	1,830	334	405	3,581	202	381	1,361	250	314	1,024	299	10,176	4	0	2	10	16
	APPROACH %	8%	78%	14%	10%	86%	5%	19%	68%	13%	19%	63%	18%						
	APP/DEPART	2,359	/	2,508	4,188	/	4,139	1,992	/	2,110	1,637	/	1,419	0					
	BEGIN PEAK HR		7:30 AM																
	VOLUMES	122	1,033	177	204	1,825	102	215	802	151	182	580	186	5,579					
	APPROACH %	9%	78%	13%	10%	86%	5%	18%	69%	13%	19%	61%	20%						
	PEAK HR FACTOR		0.954			0.935			0.896			0.881		0.955					
	APP/DEPART	1,332	/	1,433	2,131	/	2,157	1,168	/	1,186	948	/	803	0					
PM	4:00 PM	46	364	41	36	244	43	55	161	20	44	162	58	1,274	0	1	1	1	3
	4:15 PM	45	404	28	44	213	42	44	121	19	39	174	52	1,225	0	0	0	1	1
	4:30 PM	23	318	73	50	283	48	57	161	20	46	170	43	1,292	0	0	1	1	2
	4:45 PM	36	367	29	39	258	47	53	154	20	48	196	61	1,308	0	0	2	2	4
	5:00 PM	34	363	33	43	289	47	46	162	28	59	225	55	1,384	0	0	3	0	3
	5:15 PM	43	371	28	49	261	46	58	169	28	56	226	55	1,390	0	0	2	0	2
	5:30 PM	41	370	23	38	245	56	53	162	25	45	223	58	1,339	1	0	0	0	1
	5:45 PM	39	358	33	53	247	48	52	178	23	54	226	46	1,357	0	0	0	0	0
	VOLUMES	307	2,915	288	352	2,040	377	418	1,268	183	391	1,602	428	10,569	1	1	9	5	16
	APPROACH %	9%	83%	8%	13%	74%	14%	22%	68%	10%	16%	66%	18%						
	APP/DEPART	3,510	/	3,753	2,769	/	2,610	1,869	/	1,912	2,421	/	2,294	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	157	1,462	117	183	1,042	197	209	671	104	214	900	214	5,470					
	APPROACH %	9%	84%	7%	13%	73%	14%	21%	68%	11%	16%	68%	16%						
	PEAK HR FACTOR		0.982			0.938			0.965			0.979		0.984					
	APP/DEPART	1,736	/	1,880	1,422	/	1,361	984	/	971	1,328	/	1,258	0					

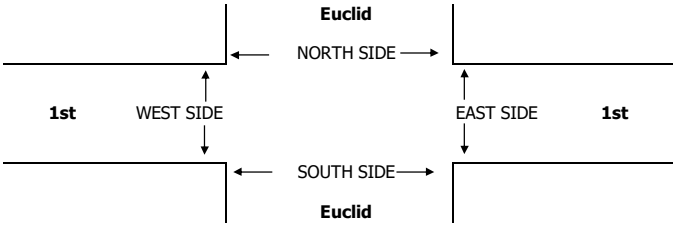

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:30 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	5:00 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Wed, Feb 10, 16

LOCATION: Santa Ana
NORTH & SOUTH: Euclid
EAST & WEST: McFadden


PROJECT #: SC0846
LOCATION #: 30
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Euclid			SOUTHBOUND Euclid			EASTBOUND McFadden			WESTBOUND McFadden				U-TURNS				
	LANES:	NL 1	NT 2	NR 0	SL 1	ST 3	SR 0	EL 1	ET 2	ER 0	WL 1	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	15	164	8	14	479	23	19	68	16	23	52	12	893	0	0	0	0	0
	7:15 AM	16	272	20	26	548	20	27	78	41	17	64	25	1,154	0	0	0	0	0
	7:30 AM	29	263	38	32	395	18	51	118	71	45	65	39	1,164	0	0	0	0	0
	7:45 AM	34	265	27	38	470	34	58	101	81	49	75	38	1,270	0	0	0	0	0
	8:00 AM	43	258	30	26	431	58	55	111	62	41	133	35	1,283	0	0	0	0	0
	8:15 AM	33	271	30	35	535	41	54	114	61	24	80	22	1,300	0	0	0	0	0
	8:30 AM	22	263	15	22	469	31	39	118	48	17	73	34	1,151	0	0	0	0	0
	8:45 AM	20	229	17	20	432	18	34	90	28	20	56	25	989	0	0	0	0	0
	VOLUMES	212	1,985	185	213	3,759	243	337	798	408	236	598	230	9,204	0	0	0	0	0
	APPROACH %	9%	83%	8%	5%	89%	6%	22%	52%	26%	22%	56%	22%						
	APP/DEPART	2,382	/	2,552	4,215	/	4,403	1,543	/	1,196	1,064	/	1,053	0					
	BEGIN PEAK HR		7:30 AM																
	VOLUMES	139	1,057	125	131	1,831	151	218	444	275	159	353	134	5,017					
	APPROACH %	11%	80%	9%	6%	87%	7%	23%	47%	29%	25%	55%	21%						
	PEAK HR FACTOR		0.989			0.865			0.976			0.773		0.965					
	APP/DEPART	1,321	/	1,409	2,113	/	2,265	937	/	700	646	/	643	0					
PM	4:00 PM	29	286	20	25	278	27	45	83	35	14	96	25	963	0	0	0	0	0
	4:15 PM	30	297	15	27	284	35	53	96	47	17	109	30	1,040	0	0	0	0	0
	4:30 PM	34	315	21	22	287	40	55	101	43	21	123	35	1,097	0	0	0	0	0
	4:45 PM	36	327	20	26	300	39	49	98	52	27	130	47	1,151	0	0	0	0	0
	5:00 PM	44	335	23	24	285	35	51	104	40	30	134	53	1,158	0	0	0	0	0
	5:15 PM	34	374	19	22	365	40	40	100	41	34	130	63	1,262	0	0	0	0	0
	5:30 PM	54	334	26	33	351	43	35	100	44	31	117	73	1,241	0	0	0	0	0
	5:45 PM	51	352	17	28	267	36	36	115	29	21	121	64	1,137	0	0	0	0	0
	VOLUMES	312	2,620	161	207	2,417	295	364	797	331	195	960	390	9,049	0	0	0	0	0
	APPROACH %	10%	85%	5%	7%	83%	10%	24%	53%	22%	13%	62%	25%						
	APP/DEPART	3,093	/	3,374	2,919	/	2,943	1,492	/	1,165	1,545	/	1,567	0					
	BEGIN PEAK HR		4:45 PM																
	VOLUMES	168	1,370	88	105	1,301	157	175	402	177	122	511	236	4,812					
	APPROACH %	10%	84%	5%	7%	83%	10%	23%	53%	23%	14%	59%	27%						
	PEAK HR FACTOR		0.952			0.915			0.947			0.957		0.953					
	APP/DEPART	1,626	/	1,781	1,563	/	1,600	754	/	595	869	/	836	0					

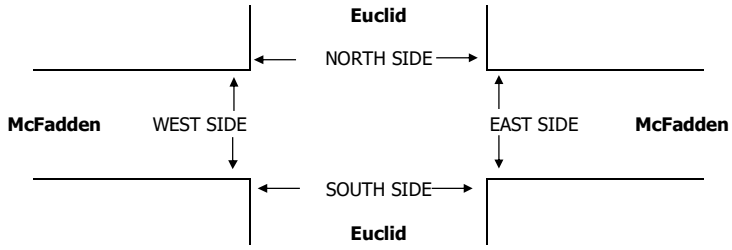

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	8	4	2	8	22	7	1	2	5	15	1	3	0	3	7
	7:15 AM	8	13	6	27	54	6	12	5	27	50	2	1	1	0	4
	7:30 AM	21	52	21	55	149	20	50	19	52	141	1	2	2	3	8
	7:45 AM	7	12	11	4	34	6	8	8	3	25	1	4	3	1	9
	8:00 AM	9	20	4	11	44	3	15	4	7	29	6	5	0	4	15
	8:15 AM	6	4	5	9	24	6	3	4	9	22	0	1	1	0	2
	8:30 AM	4	6	4	2	16	3	5	4	2	14	1	1	0	0	2
	8:45 AM	1	2	2	0	5	1	1	2	0	4	0	1	0	0	1
	TOTAL	64	113	55	116	348	52	95	48	105	300	12	18	7	11	48
PM	4:00 PM	8	14	9	7	38	5	12	7	5	29	3	2	2	2	9
	4:15 PM	8	12	13	4	37	7	8	8	3	26	1	4	5	1	11
	4:30 PM	10	15	8	10	43	4	10	6	6	26	6	5	2	4	17
	4:45 PM	8	4	5	9	26	6	3	4	9	22	2	1	1	0	4
	5:00 PM	35	14	11	51	111	31	12	10	47	100	4	2	1	4	11
	5:15 PM	19	46	15	34	114	16	44	11	33	104	3	2	4	1	10
	5:30 PM	15	24	6	42	87	14	22	6	41	83	1	2	0	1	4
	5:45 PM	6	7	4	11	28	5	7	2	10	24	1	0	2	1	4
	TOTAL	109	136	71	168	484	88	118	54	154	414	21	18	17	14	70

T218

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 14, 19

LOCATION: Santa Ana
NORTH & SOUTH: Euclid
EAST & WEST: Edinger

PROJECT #: SC2183
LOCATION #: 2
CONTROL: SIGNAL

NOTES:


AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND (Euclid)			SOUTHBOUND (Euclid)			EASTBOUND (Edinger)			WESTBOUND (Edinger)			
	LANES:	NL 2	NT 2.5	NR 0.5	SL 2	ST 2.5	SR 0.5	EL 1	ET 2	ER 1	WL 1	WT 2	WR 1	TOTAL
AM	7:00 AM	15	137	5	17	426	24	33	131	88	25	101	18	1,020
	7:15 AM	23	134	8	27	485	31	50	141	86	18	119	24	1,146
	7:30 AM	30	214	8	35	494	39	42	152	124	27	165	32	1,362
	7:45 AM	47	199	18	27	478	57	50	188	138	29	155	29	1,415
	8:00 AM	30	221	16	34	424	30	37	204	109	27	149	30	1,311
	8:15 AM	25	202	29	29	427	41	41	201	84	16	133	18	1,246
	8:30 AM	27	161	13	26	456	45	50	144	87	27	117	21	1,174
	8:45 AM	33	152	19	26	397	33	31	140	86	20	125	26	1,088
	VOLUMES	230	1,420	116	221	3,587	300	334	1,301	802	189	1,064	198	9,762
	APPROACH %	13%	80%	7%	5%	87%	7%	14%	53%	33%	13%	73%	14%	
	APP/DEPART	1,766	/	1,935	4,108	/	4,586	2,437	/	1,640	1,451	/	1,601	0
	BEGIN PEAK HR		7:30 AM											
	VOLUMES	132	836	71	125	1,823	167	170	745	455	99	602	109	5,334
	APPROACH %	13%	80%	7%	6%	86%	8%	12%	54%	33%	12%	74%	13%	
	PEAK HR FACTOR		0.973			0.931			0.911			0.904		0.942
	APP/DEPART	1,039	/	1,107	2,115	/	2,384	1,370	/	942	810	/	901	0
PM	4:00 PM	86	347	11	24	179	36	39	162	39	23	186	22	1,154
	4:15 PM	104	390	27	25	179	41	37	150	36	18	214	21	1,242
	4:30 PM	107	350	19	28	178	47	40	150	46	17	208	32	1,222
	4:45 PM	102	415	34	32	191	46	46	139	41	20	203	35	1,304
	5:00 PM	140	374	27	36	195	48	37	130	55	21	217	36	1,316
	5:15 PM	136	401	29	27	216	63	43	172	45	19	191	29	1,371
	5:30 PM	142	366	20	25	193	44	33	174	43	30	220	34	1,324
	5:45 PM	112	313	25	32	191	43	40	171	38	17	207	32	1,221
	VOLUMES	929	2,956	192	229	1,522	368	315	1,248	343	165	1,646	241	10,154
	APPROACH %	23%	73%	5%	11%	72%	17%	17%	65%	18%	8%	80%	12%	
	APP/DEPART	4,077	/	3,489	2,119	/	2,043	1,906	/	1,664	2,052	/	2,958	0
	BEGIN PEAK HR		4:45 PM											
	VOLUMES	520	1,556	110	120	795	201	159	615	184	90	831	134	5,315
	APPROACH %	24%	71%	5%	11%	71%	18%	17%	64%	19%	9%	79%	13%	
	PEAK HR FACTOR		0.966			0.912			0.921			0.929		0.969
	APP/DEPART	2,186	/	1,836	1,116	/	1,081	958	/	844	1,055	/	1,554	0

U-TURNS

NB	SB	EB	WB	TTL
0	0	0	0	
0	0	0	1	1
0	0	3	1	4
3	0	2	0	5
3	0	2	1	6
3	1	4	0	8
0	0	1	1	2
1	1	2	0	4
2	0	5	0	7
12	2	19	4	37
2	3	1	1	7
1	0	2	0	3
0	1	5	1	7
1	1	2	0	4
3	0	8	0	11
6	1	4	1	12
3	0	1	0	4
0	2	8	0	10
16	8	31	3	58

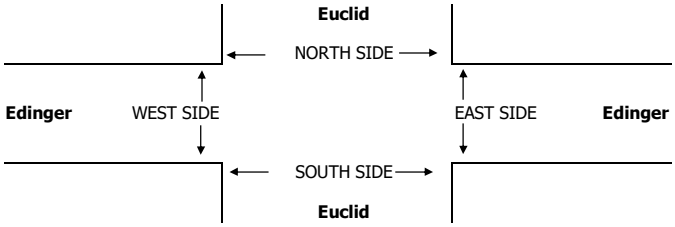

PEDESTRIAN + BIKE CROSSINGS

	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL
7:00 AM	0	0	0	0	0
7:15 AM	0	0	0	0	0
7:30 AM	0	0	0	0	0
7:45 AM	0	0	0	0	0
8:00 AM	0	0	0	0	0
8:15 AM	0	0	0	0	0
8:30 AM	0	0	0	0	0
8:45 AM	0	0	0	0	0
TOTAL	0	0	0	0	0
AM BEGIN PEAK HR	7:30 AM				
4:00 PM	0	0	0	0	0
4:15 PM	0	0	0	0	0
4:30 PM	0	0	0	0	0
4:45 PM	0	0	0	0	0
5:00 PM	0	0	0	0	0
5:15 PM	0	0	0	0	0
5:30 PM	0	0	0	0	0
5:45 PM	0	0	0	0	0
TOTAL	0	0	0	0	0
PM BEGIN PEAK HR	4:45 PM				

PEDESTRIAN CROSSINGS

N SIDE	S SIDE	E SIDE	W SIDE	TOTAL
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0

BICYCLE CROSSINGS

NS	SS	ES	WS	TOTAL
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Wed, Feb 10, 16

LOCATION: Santa Ana
NORTH & SOUTH: Newhope
EAST & WEST: Hazard


PROJECT #: SC0846
LOCATION #: 11
CONTROL: SIGNAL

NOTES:

AM PM MD OTHER OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND (Newhope)			SOUTHBOUND (Newhope)			EASTBOUND (Hazard)			WESTBOUND (Hazard)				U-TURNS				
	LANES:	NL 1	NT 2	NR 0	SL 1	ST 2	SR 0	EL 1	ET 2	ER 0	WL 1	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	10	146	6	7	257	4	13	28	16	4	15	9	515	0	0	0	0	0
	7:15 AM	15	178	15	15	352	21	10	36	28	8	39	9	726	0	0	0	0	0
	7:30 AM	24	190	22	21	308	31	19	50	25	17	39	13	759	0	0	0	0	0
	7:45 AM	40	165	48	37	281	41	26	57	59	10	45	19	828	0	0	0	0	0
	8:00 AM	15	176	15	14	347	25	19	48	29	14	40	24	766	0	0	0	0	0
	8:15 AM	20	174	4	17	316	16	30	59	22	1	23	11	693	0	0	0	0	0
	8:30 AM	13	163	3	17	322	23	22	48	24	9	32	10	686	0	0	0	0	0
	8:45 AM	29	161	11	9	282	13	24	32	26	4	29	12	632	0	0	0	0	0
	VOLUMES	166	1,353	124	137	2,465	174	163	358	229	67	262	107	5,605	0	0	0	0	0
	APPROACH %	10%	82%	8%	5%	89%	6%	22%	48%	31%	15%	60%	25%						
	APP/DEPART	1,643	/	1,623	2,776	/	2,761	750	/	619	436	/	602	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	94	709	100	87	1,288	118	74	191	141	49	163	65	3,079					
	APPROACH %	10%	79%	11%	6%	86%	8%	18%	47%	35%	18%	59%	23%						
	PEAK HR FACTOR		0.892			0.962			0.715			0.888		0.930					
	APP/DEPART	903	/	848	1,493	/	1,478	406	/	378	277	/	375	0					
PM	4:00 PM	20	292	8	11	223	24	24	30	18	3	42	38	733	0	0	0	0	0
	4:15 PM	18	304	12	16	194	17	27	35	17	10	30	37	717	0	0	0	0	0
	4:30 PM	21	340	12	10	199	27	29	49	14	6	41	13	761	0	0	0	0	0
	4:45 PM	27	299	18	13	193	19	24	51	23	8	59	12	746	0	0	0	0	0
	5:00 PM	22	315	9	15	267	35	19	48	29	10	52	7	828	0	0	0	0	0
	5:15 PM	31	298	7	9	252	31	29	49	29	5	54	19	813	0	0	0	0	0
	5:30 PM	28	294	15	14	251	26	29	56	37	12	37	13	812	0	0	0	0	0
	5:45 PM	30	324	17	9	227	27	26	52	30	3	51	16	812	0	0	0	0	0
	VOLUMES	197	2,466	98	97	1,806	206	207	370	197	57	366	155	6,222	0	0	0	0	0
	APPROACH %	7%	89%	4%	5%	86%	10%	27%	48%	25%	10%	63%	27%						
	APP/DEPART	2,761	/	2,828	2,109	/	2,060	774	/	565	578	/	769	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	111	1,231	48	47	997	119	103	205	125	30	194	55	3,265					
	APPROACH %	8%	89%	3%	4%	86%	10%	24%	47%	29%	11%	70%	20%						
	PEAK HR FACTOR		0.937			0.917			0.887			0.894		0.986					
	APP/DEPART	1,390	/	1,389	1,163	/	1,152	433	/	300	279	/	424	0					

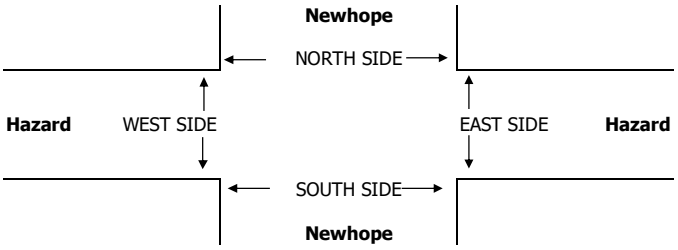

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	1	1	1	0	3	0	0	0	0	0	1	1	1	0	3
	7:15 AM	2	3	1	0	6	1	2	1	0	4	1	1	0	0	2
	7:30 AM	4	3	5	0	12	4	3	4	0	11	0	0	1	0	1
	7:45 AM	1	3	8	2	14	1	3	6	1	11	0	0	2	1	3
	8:00 AM	1	12	8	0	21	1	11	5	0	17	0	1	3	0	4
	8:15 AM	1	6	7	4	18	0	6	5	2	13	1	0	2	2	5
	8:30 AM	14	6	5	0	25	14	6	4	0	24	0	0	1	0	1
	8:45 AM	1	12	2	0	15	1	12	1	0	14	0	0	1	0	1
	TOTAL	25	46	37	6	114	22	43	26	3	94	3	3	11	3	20
PM	4:00 PM	1	0	3	2	6	0	0	3	2	5	1	0	0	0	1
	4:15 PM	1	2	1	3	7	0	0	0	0	0	1	2	1	3	7
	4:30 PM	4	0	2	4	10	4	0	1	3	8	0	0	1	1	2
	4:45 PM	3	0	0	5	8	3	0	0	3	6	0	0	0	2	2
	5:00 PM	0	2	4	1	7	0	1	4	0	5	0	1	0	1	2
	5:15 PM	2	3	5	2	12	1	2	2	0	5	1	1	3	2	7
	5:30 PM	1	4	2	1	8	0	2	1	0	3	1	2	1	1	5
	5:45 PM	2	2	2	2	8	2	1	1	0	4	0	1	1	2	4
	TOTAL	14	13	19	20	66	10	6	12	8	36	4	7	7	12	30

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Wed, Feb 10, 16

LOCATION: Santa Ana
NORTH & SOUTH: Newhope
EAST & WEST: McFadden


PROJECT #: SC0846
LOCATION #: 31
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND (Newhope)			SOUTHBOUND (Newhope)			EASTBOUND (McFadden)			WESTBOUND (McFadden)				U-TURNS				
	LANES:	NL 1	NT 2	NR 0	SL 1	ST 2	SR 0	EL 1	ET 2	ER 0	WL 1	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	5	97	11	18	281	11	10	54	17	11	67	21	603	0	0	0	0	0
	7:15 AM	14	91	15	22	301	19	8	73	38	17	72	17	687	0	0	0	0	0
	7:30 AM	17	94	28	18	318	17	33	113	37	37	112	22	846	0	0	0	0	0
	7:45 AM	38	110	45	29	247	20	24	102	43	49	110	34	851	0	0	0	0	0
	8:00 AM	31	144	60	31	249	37	52	129	38	53	133	22	979	0	0	0	0	0
	8:15 AM	19	123	33	36	322	31	20	128	35	30	76	18	871	0	0	0	0	0
	8:30 AM	9	127	28	22	291	17	25	108	30	35	88	25	805	0	0	0	0	0
	8:45 AM	23	162	38	26	355	23	10	83	21	40	61	31	873	0	0	0	0	0
	VOLUMES	156	948	258	202	2,364	175	182	790	259	272	719	190	6,515	0	0	0	0	0
	APPROACH %	11%	70%	19%	7%	86%	6%	15%	64%	21%	23%	61%	16%						
	APP/DEPART	1,362	/	1,320	2,741	/	2,895	1,231	/	1,250	1,181	/	1,050	0					
	BEGIN PEAK HR		7:30 AM																
	VOLUMES	105	471	166	114	1,136	105	129	472	153	169	431	96	3,547					
	APPROACH %	14%	63%	22%	8%	84%	8%	17%	63%	20%	24%	62%	14%						
	PEAK HR FACTOR		0.789			0.871			0.861			0.837		0.906					
	APP/DEPART	742	/	696	1,355	/	1,458	754	/	752	696	/	641	0					
PM	4:00 PM	37	275	38	37	140	30	15	103	11	35	104	51	876	0	0	0	0	0
	4:15 PM	26	283	41	37	158	26	22	118	17	27	99	40	894	0	0	0	0	0
	4:30 PM	35	278	42	30	134	31	11	104	13	31	103	38	850	0	0	0	0	0
	4:45 PM	42	274	39	22	146	18	11	106	16	26	130	46	876	0	0	0	0	0
	5:00 PM	43	262	42	26	158	32	26	110	18	25	138	39	919	0	0	0	0	0
	5:15 PM	52	260	53	37	169	40	19	108	11	24	135	39	947	0	0	0	0	0
	5:30 PM	50	245	42	48	191	36	20	122	23	32	138	39	986	0	0	0	0	0
	5:45 PM	49	274	45	46	186	28	12	136	17	21	155	44	1,013	0	0	0	0	0
	VOLUMES	334	2,151	342	283	1,282	241	136	907	126	221	1,002	336	7,361	0	0	0	0	0
	APPROACH %	12%	76%	12%	16%	71%	13%	12%	78%	11%	14%	64%	22%						
	APP/DEPART	2,827	/	2,623	1,806	/	1,629	1,169	/	1,532	1,559	/	1,577	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	194	1,041	182	157	704	136	77	476	69	102	566	161	3,865					
	APPROACH %	14%	73%	13%	16%	71%	14%	12%	77%	11%	12%	68%	19%						
	PEAK HR FACTOR		0.963			0.906			0.942			0.942		0.954					
	APP/DEPART	1,417	/	1,279	997	/	875	622	/	815	829	/	896	0					

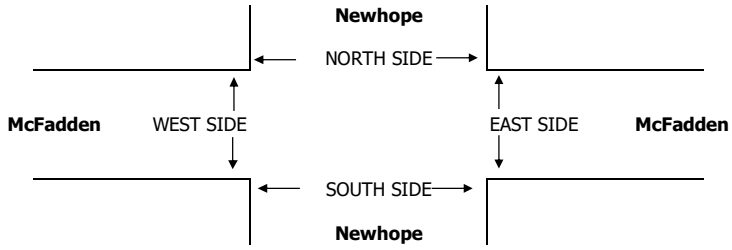

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	1	5	4	0	10	1	4	3	0	8	0	1	1	0	2
	7:15 AM	4	4	7	0	15	1	2	6	0	9	3	2	1	0	6
	7:30 AM	4	24	19	1	48	3	21	18	0	42	1	3	1	1	6
	7:45 AM	13	17	20	32	82	13	16	19	31	79	0	1	1	1	3
	8:00 AM	36	57	47	40	180	35	55	43	38	171	1	2	4	2	9
	8:15 AM	11	30	34	17	92	9	30	32	15	86	2	0	2	2	6
	8:30 AM	5	7	19	4	35	5	6	17	3	31	0	1	2	1	4
	8:45 AM	3	3	14	0	20	3	2	13	0	18	0	1	1	0	2
	TOTAL	77	147	164	94	482	70	136	151	87	444	7	11	13	7	38
PM	4:00 PM	2	2	5	4	13	2	1	5	4	12	0	1	0	0	1
	4:15 PM	4	6	10	6	26	3	2	5	4	14	1	4	5	2	12
	4:30 PM	2	6	1	2	11	2	3	0	2	7	0	3	1	0	4
	4:45 PM	10	17	4	8	39	10	15	4	8	37	0	2	0	0	2
	5:00 PM	15	9	4	4	32	9	6	3	3	21	6	3	1	1	11
	5:15 PM	4	7	8	4	23	4	3	7	4	18	0	4	1	0	5
	5:30 PM	7	4	5	5	21	6	2	3	5	16	1	2	2	0	5
	5:45 PM	5	5	6	1	17	3	3	3	0	9	2	2	3	1	8
	TOTAL	49	56	43	34	182	39	35	30	30	134	10	21	13	4	48

ITM Peak Hour Summary

Prepared by:

National Data & Surveying Services

Harbor Blvd and Banner Dr , Garden Grove

Date: 2014-10-16
Day: Thursday

Project #: Historical
City: Garden Grove

AM Peak Hour	715 AM
NOON Peak Hour	
PM Peak Hour	500 PM

Peak Hour Summary

Southbound Approach (Harbor Blvd)

Lanes	0	3	0		
AM	17	1301	0	1407	AM
NOON	0	0	0	0	NOON
PM	47	1459	0	2166	PM

Eastbound Approach (Banner Dr)

	AM	NOON	PM
	126	0	207
0	71	0	89
1	0	0	0
0	116	0	74
Lanes	AM	NOON	PM

Westbound Approach

	AM	NOON	PM	Lanes
	112	0	163	1
	42	0	76	.5
	803	0	569	1.5
	0	0	0	
	AM	NOON	PM	

CONTROL: Signalized

Northbound Approach

AM	2220	67	1224	0	AM
NOON	0	0	0	0	NOON
PM	2102	84	1914	0	PM
		1	3	1	Lanes

Count Periods	Start	End
AM	7:00 AM	9:00 AM
NOON		
PM	4:00 PM	6:00 PM

Total Ins & Outs

	North Leg		
	1318	1407	AM
	0	0	NOON
	1506	2166	PM

West Leg				East Leg		
AM	NOON	PM		AM	NOON	PM
126	0	207		957	0	808
187	0	163		0	0	0

	South Leg	
AM	2220	1291
NOON	0	0
PM	2102	1998

Total Volume Per Leg

	North Leg	
	2725	AM
	0	NOON
	3672	PM

West Leg			East Leg		
AM	NOON	PM	AM	NOON	PM
313	0	370	957	0	808

	South Leg
AM	3511
NOON	0
PM	4100

ITM Peak Hour Summary

Prepared by:

National Data & Surveying Services

SR-22 EB On-Ramp and Trask Ave , City of Santa Ana

Date: 2013-02-05

Day: Tuesday

Project #: Historical

AM Peak Hour	715 AM
NOON Peak Hour	
PM Peak Hour	400 PM

Peak Hour Summary

Southbound Approach (SR-22 EB On-Ramp)

Lanes	0	0	0		
AM	0	0	0	735	AM
NOON	0	0	0	0	NOON
PM	0	0	0	834	PM

Eastbound Approach (Trask Ave)

Lanes	AM	NOON	PM
	688	0	565
2	607	0	781
1	760	0	585
0	0	0	0
Lanes	AM	NOON	PM

Westbound Approach

	AM	NOON	PM	Lanes
	128	0	53	0
	688	0	565	2
	0	0	0	0
	760	0	585	
	AM	NOON	PM	

CONTROL: Signalized

Count Periods	Start	End
AM	6:00 AM	9:00 AM
NOON		
PM	4:00 PM	7:00 PM

Northbound Approach

AM	0	0	0	0 AM
NOON	0	0	0	0 NOON
PM	0	0	0	0 PM
		0	0	0 Lanes

Total Ins & Outs

	North Leg		
	0	735	AM
	0	0	NOON
	0	834	PM

West Leg AM	West Leg NOON	West Leg PM		East Leg		
688	0	565		816	0	618
1367	0	1366		760	0	585
				AM	NOON	PM

	South Leg	
AM	0	0
NOON	0	0
PM	0	0

Total Volume Per Leg

	North Leg	
	735	AM
	0	NOON
	834	PM

West Leg AM	West Leg NOON	West Leg PM	East Leg		
2055	0	1931	1576	0	1203
			AM	NOON	PM

	South Leg
AM	0
NOON	0
PM	0

T218

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Thu, May 16, 19

LOCATION: Santa Ana
NORTH & SOUTH: Harbor
EAST & WEST: Westminster


PROJECT #: SC2183
LOCATION #: 3
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Harbor			SOUTHBOUND Harbor			EASTBOUND Westminster			WESTBOUND Westminster				U-TURNS				
	LANES:	NL 1	NT 3	NR 1	SL 1	ST 3	SR 1	EL 1	ET 3	ER 0	WL 1	WT 3	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	40	258	41	40	419	20	24	160	3	51	91	25	1,172	7	3	3	4	17
	7:15 AM	28	298	43	43	428	13	23	214	6	50	115	32	1,293	5	3	4	6	18
	7:30 AM	41	336	67	56	439	24	36	237	10	61	156	33	1,496	6	4	8	7	25
	7:45 AM	49	299	74	56	391	22	43	236	2	52	156	38	1,418	9	8	10	5	32
	8:00 AM	48	288	55	55	390	28	43	234	9	48	138	45	1,381	9	4	9	5	27
	8:15 AM	38	238	52	42	426	20	52	210	11	48	118	38	1,293	10	6	13	6	35
	8:30 AM	52	282	41	56	383	36	55	182	8	40	113	35	1,283	13	8	14	5	40
	8:45 AM	44	234	24	35	340	34	37	145	8	48	103	48	1,100	9	2	6	4	21
	VOLUMES	340	2,233	397	383	3,216	197	313	1,618	57	398	990	294	10,436	68	38	67	42	215
	APPROACH %	11%	75%	13%	10%	85%	5%	16%	81%	3%	24%	59%	17%						
	APP/DEPART	2,970	/	2,811	3,796	/	3,697	1,988	/	2,402	1,682	/	1,526	0					
	BEGIN PEAK HR		7:30 AM																
	VOLUMES	176	1,161	248	209	1,646	94	174	917	32	209	568	154	5,588					
	APPROACH %	11%	73%	16%	11%	84%	5%	15%	82%	3%	22%	61%	17%						
	PEAK HR FACTOR		0.892			0.939			0.982			0.931		0.934					
	APP/DEPART	1,585	/	1,471	1,949	/	1,898	1,123	/	1,375	931	/	844	0					
PM	4:00 PM	59	331	66	47	345	48	60	170	4	63	171	50	1,414	9	3	13	8	33
	4:15 PM	60	331	46	44	321	37	45	136	8	54	180	48	1,310	6	2	9	6	23
	4:30 PM	63	336	70	58	299	46	45	127	11	62	181	46	1,344	6	2	7	12	27
	4:45 PM	50	363	72	48	320	41	47	153	14	59	204	49	1,420	8	7	9	5	29
	5:00 PM	69	341	65	48	370	40	49	142	3	57	194	52	1,430	10	4	10	4	28
	5:15 PM	69	320	84	55	369	39	49	177	10	59	216	42	1,489	9	7	13	7	36
	5:30 PM	85	336	100	53	356	43	40	188	4	52	175	36	1,468	12	6	12	3	33
	5:45 PM	70	337	77	57	340	31	39	170	7	50	173	38	1,389	10	1	11	4	26
	VOLUMES	525	2,695	580	410	2,720	325	374	1,263	61	456	1,494	361	11,264	70	32	84	49	235
	APPROACH %	14%	71%	15%	12%	79%	9%	22%	74%	4%	20%	65%	16%						
	APP/DEPART	3,800	/	3,378	3,455	/	3,258	1,698	/	2,270	2,311	/	2,358	0					
	BEGIN PEAK HR		4:45 PM																
	VOLUMES	273	1,360	321	204	1,415	163	185	660	31	227	789	179	5,807					
	APPROACH %	14%	70%	16%	11%	79%	9%	21%	75%	4%	19%	66%	15%						
	PEAK HR FACTOR		0.938			0.962			0.928			0.942		0.975					
	APP/DEPART	1,954	/	1,704	1,782	/	1,693	876	/	1,180	1,195	/	1,230	0					

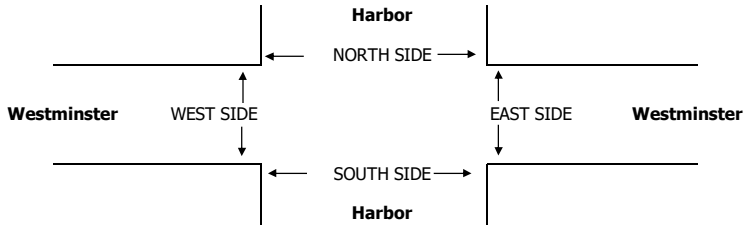

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:30 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:45 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS AVERAGE SHEET

T319

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: AVERAGE FOR THREE DAYS

LOCATION: Santa Ana
NORTH & SOUTH: Harbor
EAST & WEST: 1st

PROJECT #: CMP2019
LOCATION #: 190
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N ◄ W E ► S ▼

Add U-Turns to Left Turns

		NORTHBOUND (Harbor)			SOUTHBOUND (Harbor)			EASTBOUND (1st)			WESTBOUND (1st)			
	LANES:	NL 1	NT 3	NR 1	SL 1	ST 3	SR 1	EL 2	ET 3	ER 0	WL 2	WT 3	WR 0	TOTAL
AM	6:00 AM	11	108	14	18	225	11	21	67	22	11	54	21	583
	6:15 AM	10	125	22	25	289	11	19	108	34	23	78	30	775
	6:30 AM	13	143	22	37	451	15	20	137	33	22	93	30	1,015
	6:45 AM	23	148	20	53	452	15	23	186	36	33	92	30	1,109
	7:00 AM	19	156	32	53	487	20	23	207	42	36	93	35	1,203
	7:15 AM	22	227	45	53	493	25	26	230	40	56	115	38	1,371
	7:30 AM	19	237	61	53	510	26	30	229	47	78	149	36	1,478
	7:45 AM	27	228	52	51	445	38	32	224	44	60	188	37	1,428
	8:00 AM	24	232	42	60	446	32	37	239	47	47	162	31	1,400
	8:15 AM	28	200	38	58	428	20	37	264	56	48	118	32	1,327
	8:30 AM	24	184	35	53	439	24	33	253	38	37	115	36	1,270
	8:45 AM	32	177	34	41	408	22	35	213	40	36	128	32	1,197
	VOLUMES	254	2,165	416	554	5,073	259	338	2,355	480	486	1,385	388	14,272
	APPROACH %	9%	75%	14%	9%	86%	4%	11%	73%	15%	22%	61%	17%	
	APP/DEPART	2,898	/	2,914	5,910	/	6,102	3,205	/	3,326	2,259	/	1,930	
	BEGIN PEAK HR		7:15 AM											
	VOLUMES	115	925	200	224	1,895	122	138	922	179	242	614	143	5,717
	APPROACH %	9%	75%	16%	10%	85%	5%	11%	74%	14%	24%	61%	14%	
	PEAK HR FACTOR		0.958			0.948			0.950			0.875		0.960
	APP/DEPART	1,239	/	1,200	2,240	/	2,337	1,238	/	1,339	999	/	840	
PM	03:00 PM	62	351	56	54	252	31	38	154	31	50	170	36	1,285
	3:15 PM	56	342	61	62	261	33	36	170	29	49	178	35	1,311
	3:30 PM	53	340	54	64	252	34	45	171	33	51	203	41	1,342
	3:45 PM	62	342	39	66	289	39	31	186	30	48	217	45	1,394
	4:00 PM	59	343	48	67	271	34	36	169	35	49	232	49	1,393
	4:15 PM	62	364	45	60	273	36	30	180	28	53	230	38	1,398
	4:30 PM	62	363	33	60	256	34	34	196	38	46	235	41	1,399
	4:45 PM	61	372	39	64	292	34	39	176	28	65	231	36	1,438
	5:00 PM	63	366	35	64	309	37	42	183	29	61	263	42	1,494
	5:15 PM	63	371	42	67	298	44	35	189	31	57	276	39	1,512
	5:30 PM	64	363	40	63	303	43	34	192	44	56	280	43	1,524
	5:45 PM	66	364	46	59	295	39	41	194	39	53	243	49	1,489
	6:00 PM	71	350	43	57	265	35	41	190	35	51	244	41	1,423
	6:15 PM	66	364	40	59	275	34	45	173	39	45	231	47	1,418
	6:30 PM	64	350	49	69	247	48	36	164	36	45	208	37	1,354
	6:45 PM	58	317	45	62	257	36	39	134	35	47	172	40	1,244
	VOLUMES	991	5,664	717	998	4,394	590	602	2,822	541	827	3,613	659	22,717
	APPROACH %	13%	76%	10%	16%	72%	10%	15%	69%	13%	16%	71%	13%	
	APP/DEPART	7,478	/	7,019	6,075	/	5,868	4,063	/	4,537	5,100	/	5,293	
	BEGIN PEAK HR		5:00 PM											
	VOLUMES	284	1,465	162	275	1,205	162	186	758	143	227	1,062	173	6,102
	APPROACH %	15%	77%	8%	17%	73%	10%	17%	70%	13%	16%	73%	12%	
	PEAK HR FACTOR		0.988			0.990			0.969			0.964		0.986
	APP/DEPART	1,911	/	1,811	1,642	/	1,603	1,087	/	1,174	1,462	/	1,514	

U-TURNS

NB	SB	EB	WB	TTL
0	0	0	0	
2	2	0	0	4
2	1	0	0	3
3	2	1	0	6
4	2	3	0	8
4	0	3	0	7
5	1	2	0	8
6	1	4	0	10
5	1	4	0	10
6	3	2	0	12
8	3	2	0	14
9	3	7	0	19
8	4	3	0	16
62	23	32	0	117
7	5	5	0	17
4	10	5	0	19
7	7	4	0	18
3	6	4	0	13
5	7	7	0	19
6	7	5	0	18
8	6	6	0	21
6	6	5	0	17
8	5	8	0	21
7	4	10	0	20
6	6	11	0	23
7	7	5	0	19
9	5	7	0	20
5	6	7	0	18
9	3	5	0	17
8	5	6	0	19
106	94	99	1	299

Right-turn Overlap

NRR X	SRR X	ERR X	WRR X
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0

Harbor — NORTH SIDE

1st — WEST SIDE — EAST SIDE — 1st

SOUTH SIDE — Harbor

ALL PED AND BIKE

	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL
6:00 AM	4	19	4	12	38
6:15 AM	1	14	3	10	28
6:30 AM	2	17	2	12	33
6:45 AM	3	19	4	16	42
7:00 AM	5	19	7	11	42
7:15 AM	7	25	11	30	74
7:30 AM	6	28	9	29	72
7:45 AM	5	21	6	18	51
8:00 AM	5	18	4	17	45
8:15 AM	7	16	7	17	47
8:30 AM	8	16	4	13	41
8:45 AM	8	22	9	17	55
TOTAL	63	234	71	201	568
AM BEGIN PEAK HR			7:15 AM		
3:00 PM	9	26	3	23	62
3:15 PM	16	35	13	25	90
3:30 PM	15	23	8	28	73
3:45 PM	14	29	9	28	80
4:00 PM	13	27	10	28	78
4:15 PM	13	33	5	25	77
4:30 PM	18	20	10	24	72
4:45 PM	13	27	7	22	69
5:00 PM	7	26	3	26	62
5:15 PM	11	33	7	27	78
5:30 PM	12	18	7	19	56
5:45 PM	13	29	9	29	81
6:00 PM	16	19	10	25	70
6:15 PM	10	23	7	22	62
6:30 PM	10	18	3	18	49
6:45 PM	7	21	4	19	52
TOTAL	197	408	116	390	1,110
PM BEGIN PEAK HR			5:00 PM		

PEDESTRIAN CROSSINGS

N SIDE	S SIDE	E SIDE	W SIDE	TOTAL
3	17	4	10	34
1	12	2	10	25
2	15	2	11	30
2	17	3	14	36
4	17	6	9	36
7	24	11	28	71
6	26	8	26	66
3	19	6	17	45
5	16	4	15	39
5	14	6	15	40
5	14	4	12	34
6	19	8	15	47
48	210	64	181	503
21	85	29	85	220
7	23	3	22	55
15	34	12	25	86
13	22	7	25	67
12	27	8	27	74
11	24	8	24	67
12	32	4	24	72
16	18	10	22	66
12	25	6	19	62
4	24	3	23	55
10	29	5	25	69
10	16	5	17	49
11	26	9	25	70
14	17	9	24	64
8	18	7	19	52
8	16	2	13	40
6	18	4	18	46
170	370	102	352	994
35	95	22	91	243

BICYCLE CROSSINGS

NS	SS	ES	WS	TOTAL
1	1	0	2	5
0	2	1	0	3
0	2	0	1	3
1	2	1	3	6
1	2	0	2	5
0	1	0	2	3
1	2	1	3	7
2	2	1	1	6
0	3	0	2	6
2	2	1	1	6
3	2	1	1	7
2	3	1	1	8
15	24	7	20	65
3	8	2	9	22
2	3	0	2	7
1	1	1	0	4
1	2	0	3	6
3	1	1	1	6
2	3	2	4	11
1	2	1	1	5
2	1	1	2	6
2	2	1	3	7
2	1	1	3	7
1	4	2	2	9
2	2	2	1	7
3	3	1	4	11
1	2	1	1	6
1	5	0	4	10
1	2	1	5	9
1	3	0	2	6
27	38	13	38	116
8	11	5	10	34

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Wed, Feb 10, 16

LOCATION: Santa Ana
NORTH & SOUTH: Harbor
EAST & WEST: McFadden


PROJECT #: SC0846
LOCATION #: 32
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Harbor			SOUTHBOUND Harbor			EASTBOUND McFadden			WESTBOUND McFadden				U-TURNS				
	LANES:	NL 2	NT 3	NR 1	SL 2	ST 3	SR 0	EL 1	ET 2	ER 0	WL 1	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	21	170	13	33	480	10	31	54	24	35	57	17	945	5	6	0	0	11
	7:15 AM	20	214	17	34	533	10	24	67	18	45	74	21	1,077	3	9	0	0	12
	7:30 AM	19	238	18	26	536	15	36	95	27	51	102	27	1,190	3	4	0	0	7
	7:45 AM	25	260	34	45	488	12	39	94	30	48	117	30	1,222	3	3	0	0	6
	8:00 AM	32	250	25	55	425	22	47	102	36	44	110	33	1,181	5	10	0	0	15
	8:15 AM	23	269	20	48	395	12	38	127	31	39	84	28	1,114	7	9	0	0	16
	8:30 AM	21	245	30	71	407	26	36	95	27	47	85	18	1,108	8	13	0	0	21
	8:45 AM	15	198	28	47	456	15	21	96	30	47	76	23	1,052	7	11	0	0	18
	VOLUMES	176	1,844	185	359	3,720	122	272	730	223	356	705	197	8,889	41	65	0	0	106
	APPROACH %	8%	84%	8%	9%	89%	3%	22%	60%	18%	28%	56%	16%						
	APP/DEPART	2,205	/	2,378	4,201	/	4,340	1,225	/	1,209	1,258	/	962	0					
	BEGIN PEAK HR		7:30 AM																
	VOLUMES	99	1,017	97	174	1,844	61	160	418	124	182	413	118	4,707					
	APPROACH %	8%	84%	8%	8%	89%	3%	23%	60%	18%	26%	58%	17%						
	PEAK HR FACTOR		0.951			0.901			0.895			0.914		0.963					
	APP/DEPART	1,213	/	1,321	2,079	/	2,168	702	/	663	713	/	555	0					
PM	4:00 PM	51	346	34	67	266	22	34	135	19	44	109	47	1,174	5	12	0	0	17
	4:15 PM	35	416	33	67	277	30	50	130	18	53	125	29	1,263	5	13	0	1	19
	4:30 PM	35	421	36	62	284	24	43	122	22	50	99	26	1,224	5	11	0	1	17
	4:45 PM	38	405	36	74	317	29	46	115	14	44	117	31	1,266	3	14	0	0	17
	5:00 PM	35	425	27	74	286	27	50	117	11	49	121	40	1,262	6	18	0	0	24
	5:15 PM	38	429	29	71	305	15	56	129	15	52	125	38	1,302	5	13	0	0	18
	5:30 PM	47	411	34	66	300	32	52	127	20	48	134	35	1,306	5	10	0	1	16
	5:45 PM	40	384	30	75	332	36	47	126	16	53	106	27	1,272	4	10	0	0	14
	VOLUMES	319	3,237	259	556	2,367	215	378	1,001	135	393	936	273	10,069	38	101	0	3	142
	APPROACH %	8%	85%	7%	18%	75%	7%	25%	66%	9%	25%	58%	17%						
	APP/DEPART	3,815	/	3,989	3,138	/	2,930	1,514	/	1,718	1,602	/	1,432	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	160	1,649	120	286	1,223	110	205	499	62	202	486	140	5,142					
	APPROACH %	8%	85%	6%	18%	76%	7%	27%	65%	8%	24%	59%	17%						
	PEAK HR FACTOR		0.972			0.914			0.958			0.954		0.984					
	APP/DEPART	1,929	/	2,045	1,619	/	1,506	766	/	855	828	/	736	0					

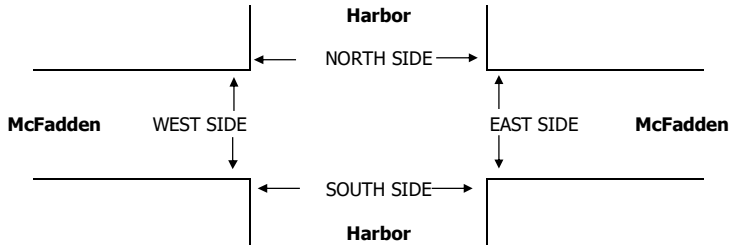

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	3	18	5	4	30	3	14	5	3	25	0	4	0	1	5
	7:15 AM	8	22	14	6	50	6	19	12	2	39	2	3	2	4	11
	7:30 AM	11	8	14	9	42	10	8	12	7	37	1	0	2	2	5
	7:45 AM	16	16	13	8	53	15	12	13	6	46	1	4	0	2	7
	8:00 AM	14	27	22	13	76	12	24	21	11	68	2	3	1	2	8
	8:15 AM	12	17	11	12	52	11	17	11	9	48	1	0	0	3	4
	8:30 AM	9	14	9	6	38	8	12	9	3	32	1	2	0	3	6
	8:45 AM	20	14	14	10	58	16	13	10	9	48	4	1	4	1	10
	TOTAL	93	136	102	68	399	81	119	93	50	343	12	17	9	18	56
PM	4:00 PM	4	27	15	11	57	3	25	13	6	47	1	2	2	5	10
	4:15 PM	17	24	33	19	93	14	22	30	13	79	3	2	3	6	14
	4:30 PM	22	27	19	23	91	14	20	15	16	65	8	7	4	7	26
	4:45 PM	22	28	31	19	100	18	26	27	14	85	4	2	4	5	15
	5:00 PM	14	31	21	7	73	8	27	16	3	54	6	4	5	4	19
	5:15 PM	18	32	22	21	93	17	30	18	20	85	1	2	4	1	8
	5:30 PM	19	17	21	16	73	14	14	15	13	56	5	3	6	3	17
	5:45 PM	9	47	18	13	87	7	42	9	13	71	2	5	9	0	16
	TOTAL	125	233	180	129	667	95	206	143	98	542	30	27	37	31	125

T218

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 14, 19

LOCATION: Santa Ana
NORTH & SOUTH: Harbor
EAST & WEST: Edinger


PROJECT #: SC2183
LOCATION #: 5
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — N / W / E / S

Add U-Turns to Left Turns

		NORTHBOUND Harbor			SOUTHBOUND Harbor			EASTBOUND Edinger			WESTBOUND Edinger				U-TURNS				
	LANES:	NL 2	NT 3	NR 1	SL 2	ST 3	SR 1	EL 2	ET 2.5	ER 0.5	WL 2	WT 3	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	20	139	20	58	478	5	16	144	56	27	90	24	1,077	4	4	0	0	8
	7:15 AM	24	159	40	44	513	12	23	165	79	33	118	49	1,259	5	2	2	1	10
	7:30 AM	28	202	37	55	538	15	25	147	82	63	120	55	1,367	5	5	0	0	10
	7:45 AM	20	226	43	43	552	18	27	138	65	74	125	53	1,384	2	4	1	2	9
	8:00 AM	29	177	24	39	481	15	30	187	93	48	123	44	1,290	3	2	3	1	9
	8:15 AM	20	149	21	43	530	11	33	150	56	39	101	32	1,185	6	3	0	0	9
	8:30 AM	13	164	22	43	489	10	37	129	66	27	105	25	1,130	0	4	1	0	5
	8:45 AM	17	148	25	50	477	6	25	117	47	50	98	28	1,088	2	6	1	0	9
	VOLUMES	171	1,364	232	375	4,058	92	216	1,177	544	361	880	310	9,780	27	30	8	4	69
	APPROACH %	10%	77%	13%	8%	90%	2%	11%	61%	28%	23%	57%	20%						
	APP/DEPART	1,767	/	1,912	4,525	/	4,986	1,937	/	1,758	1,551	/	1,124	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	101	764	144	181	2,084	60	105	637	319	218	486	201	5,300					
	APPROACH %	10%	76%	14%	8%	90%	3%	10%	60%	30%	24%	54%	22%						
	PEAK HR FACTOR		0.873			0.948			0.856			0.898		0.957					
	APP/DEPART	1,009	/	1,077	2,325	/	2,632	1,061	/	953	905	/	638	0					
PM	4:00 PM	58	404	47	60	205	21	41	134	26	47	164	62	1,269	1	5	2	1	9
	4:15 PM	52	416	37	74	229	15	31	127	20	40	203	81	1,325	0	9	1	1	11
	4:30 PM	68	450	43	73	210	20	36	137	26	30	179	72	1,344	1	13	6	1	21
	4:45 PM	65	451	48	63	208	17	35	137	23	25	205	65	1,342	4	4	3	1	12
	5:00 PM	66	434	53	66	197	20	32	128	28	31	190	66	1,311	2	11	7	0	20
	5:15 PM	83	443	48	77	197	18	33	155	18	44	222	62	1,400	4	7	3	0	14
	5:30 PM	65	427	62	74	211	19	32	138	30	38	187	75	1,358	1	14	3	0	18
	5:45 PM	63	410	47	82	198	11	22	154	29	48	190	86	1,340	1	5	3	0	9
	VOLUMES	520	3,435	385	569	1,655	141	262	1,110	200	303	1,540	569	10,689	14	68	28	4	114
	APPROACH %	12%	79%	9%	24%	70%	6%	17%	71%	13%	13%	64%	24%						
	APP/DEPART	4,340	/	4,306	2,365	/	2,168	1,572	/	2,000	2,412	/	2,215	0					
	BEGIN PEAK HR		4:45 PM																
	VOLUMES	279	1,755	211	280	813	74	132	558	99	138	804	268	5,411					
	APPROACH %	12%	78%	9%	24%	70%	6%	17%	71%	13%	11%	66%	22%						
	PEAK HR FACTOR		0.978			0.960			0.958			0.922		0.966					
	APP/DEPART	2,245	/	2,175	1,167	/	1,060	789	/	1,014	1,210	/	1,162	0					

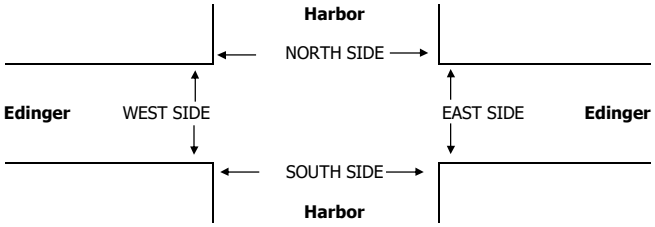

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:15 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:45 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

T319

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, Feb 26, 19

LOCATION: Santa Ana
NORTH & SOUTH: Harbor
EAST & WEST: Warner

PROJECT #: CMP2019
LOCATION #: 191
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns


		NORTHBOUND Harbor			SOUTHBOUND Harbor			EASTBOUND Warner			WESTBOUND Warner			
	LANES:	NL 2	NT 3	NR 0	SL 2	ST 3	SR 1	EL 2	ET 3	ER 1	WL 2	WT 3	WR 1	TOTAL
AM	6:00 AM	10	71	22	50	246	3	2	129	28	26	87	9	683
	6:15 AM	15	56	15	47	302	12	9	136	36	40	99	17	784
	6:30 AM	19	70	11	95	470	27	7	166	35	35	113	10	1,058
	6:45 AM	19	98	24	99	473	22	12	233	58	41	138	14	1,231
	7:00 AM	24	132	33	111	491	13	15	272	73	32	121	14	1,331
	7:15 AM	25	154	40	117	523	16	24	358	89	31	194	22	1,593
	7:30 AM	40	196	40	104	527	32	26	318	106	33	216	30	1,668
	7:45 AM	17	163	38	114	509	36	23	350	78	44	210	37	1,619
	8:00 AM	31	181	58	117	479	37	23	345	87	41	164	43	1,606
	8:15 AM	28	174	54	107	515	29	25	316	69	38	182	23	1,560
	8:30 AM	28	141	42	106	476	29	23	280	95	34	162	27	1,443
	8:45 AM	27	140	42	83	512	29	17	224	85	24	188	22	1,393
	VOLUMES	283	1,576	419	1,150	5,523	285	206	3,127	839	419	1,874	268	15,969
	APPROACH %	12%	69%	18%	17%	79%	4%	5%	75%	20%	16%	73%	10%	
	APP/DEPART	2,278	/	2,049	6,958	/	6,793	4,172	/	4,727	2,561	/	2,400	0
	BEGIN PEAK HR		7:15 AM											
	VOLUMES	113	694	176	452	2,038	121	96	1,371	360	149	784	132	6,486
	APPROACH %	11%	71%	18%	17%	78%	5%	5%	75%	20%	14%	74%	12%	
	PEAK HR FACTOR		0.890			0.985			0.970			0.915		0.972
	APP/DEPART	983	/	922	2,611	/	2,549	1,827	/	2,008	1,065	/	1,007	0
PM	03:00 PM	77	408	43	57	185	22	37	238	49	54	250	91	1,511
	3:15 PM	67	424	26	53	198	27	51	227	41	44	267	87	1,512
	3:30 PM	82	446	34	39	186	30	21	182	53	50	299	106	1,528
	3:45 PM	82	422	30	36	207	24	23	221	53	35	350	120	1,603
	4:00 PM	101	467	46	28	163	22	12	224	46	45	337	94	1,585
	4:15 PM	84	439	40	37	149	19	32	213	49	22	320	94	1,498
	4:30 PM	107	446	53	28	179	21	26	197	40	28	326	106	1,557
	4:45 PM	90	478	24	47	214	17	43	190	38	29	321	109	1,600
	5:00 PM	100	454	28	32	196	28	52	254	50	43	320	122	1,679
	5:15 PM	106	472	31	34	193	27	39	237	47	35	342	99	1,662
	5:30 PM	104	498	24	30	208	22	19	154	63	26	357	109	1,614
	5:45 PM	117	456	29	32	199	22	28	149	43	34	323	90	1,522
	6:00 PM	112	438	27	26	175	20	31	197	50	34	308	73	1,491
	6:15 PM	123	381	26	36	166	26	28	163	35	23	313	91	1,411
	6:30 PM	110	412	26	33	155	31	18	196	29	29	317	53	1,409
	6:45 PM	92	349	32	32	153	19	19	165	30	28	229	54	1,202
	VOLUMES	1,554	6,990	519	580	2,926	377	479	3,207	716	559	4,979	1,498	24,384
	APPROACH %	17%	77%	6%	15%	75%	10%	11%	73%	16%	8%	71%	21%	
	APP/DEPART	9,063	/	8,939	3,883	/	4,218	4,402	/	4,326	7,036	/	6,901	0
	BEGIN PEAK HR		4:45 PM											
	VOLUMES	766	3,676	276	271	1,509	180	238	1,690	386	257	2,673	853	12,775
	APPROACH %	16%	78%	6%	14%	77%	9%	10%	73%	17%	7%	71%	23%	
	PEAK HR FACTOR		1.884			1.763			1.625			1.922		1.902
	APP/DEPART	4,718	/	4,758	1,960	/	2,164	2,314	/	2,239	3,783	/	3,614	0

U-TURNS

NB 0	SB 0	EB 0	WB 0	TTL
5	1	0	2	8
3	1	0	5	9
6	0	0	2	8
4	0	0	2	6
9	1	0	6	16
3	1	1	1	6
3	0	0	3	6
5	2	1	3	11
3	0	1	5	9
2	0	2	3	7
1	0	2	3	6
5	0	0	2	7
49	6	7	37	99
6	1	2	2	11
0	0	2	1	3
3	0	2	6	11
0	0	2	1	3
3	0	0	5	8
3	1	2	0	6
2	0	4	0	6
2	0	3	0	5
5	0	2	2	9
8	1	5	0	14
0	0	0	1	1
1	0	4	1	6
1	0	2	2	5
5	1	0	2	8
2	1	3	1	7
1	0	0	1	2
42	5	33	25	105

Right-turn Overlap

NRR X	SRR X	ERR X	WRR X
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0

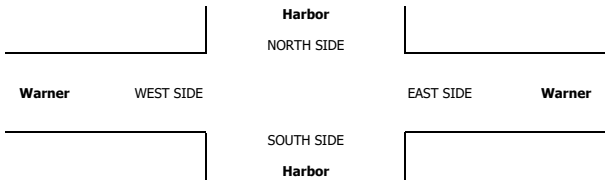

ALL PED AND BIKE

	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL
6:00 AM	1	0	1	1	3
6:15 AM	1	1	2	3	7
6:30 AM	0	8	1	0	9
6:45 AM	0	6	0	2	8
7:00 AM	0	2	1	4	7
7:15 AM	6	6	4	1	17
7:30 AM	3	7	2	2	14
7:45 AM	1	0	0	1	2
8:00 AM	4	13	4	6	27
8:15 AM	1	0	4	0	5
8:30 AM	1	2	0	3	6
8:45 AM	1	0	4	5	10
TOTAL	19	45	23	28	115
AM BEGIN PEAK HR			7:15 AM		
3:00 PM	0	5	5	0	10
3:15 PM	7	2	2	3	14
3:30 PM	4	4	6	2	16
3:45 PM	1	3	3	3	10
4:00 PM	4	8	5	0	17
4:15 PM	2	2	0	4	8
4:30 PM	1	9	9	2	21
4:45 PM	2	2	5	2	11
5:00 PM	2	6	8	1	17
5:15 PM	0	3	8	1	12
5:30 PM	4	2	7	0	13
5:45 PM	0	1	2	1	4
6:00 PM	2	3	6	3	14
6:15 PM	1	1	0	1	3
6:30 PM	1	0	0	0	1
6:45 PM	2	1	0	1	4
TOTAL	33	52	66	24	175
PM BEGIN PEAK HR			4:45 PM		

PEDESTRIAN CROSSINGS

N SIDE	S SIDE	E SIDE	W SIDE	TOTAL
1	0	1	0	2
1	1	1	0	3
0	7	1	0	8
0	5	0	2	7
0	2	1	4	7
6	6	3	1	16
2	5	1	2	10
0	0	0	1	1
3	13	3	6	25
1	0	4	0	5
1	2	0	3	6
1	0	3	4	8
16	41	18	23	98
11	24	7	10	52
0	5	4	0	9
7	2	2	3	14
3	3	6	2	14
1	1	1	3	6
4	7	5	0	16
2	1	0	3	6
0	9	8	1	18
2	2	4	2	10
0	6	6	1	13
0	2	8	1	11
4	2	7	0	13
0	1	0	1	2
1	3	4	2	10
1	0	0	1	2
1	0	0	0	1
2	0	0	0	2
28	44	55	20	147
6	12	25	4	47

BICYCLE CROSSINGS

NS	SS	ES	WS	TOTAL
0	0	0	1	1
0	0	1	3	4
0	1	0	0	1
0	1	0	0	1
0	0	0	0	0
0	0	1	0	1
1	2	1	0	4
1	0	0	0	1
1	0	1	0	2
0	0	0	0	0
0	0	0	0	0
0	0	1	1	2
3	4	5	5	17
3	2	3	0	8
0	0	1	0	1
0	0	0	0	0
1	1	0	0	2
0	2	2	0	4
0	1	0	0	1
0	1	0	1	2
1	0	1	1	3
0	0	1	0	1
2	0	2	0	4
0	1	0	0	1
0	0	2	0	2
1	0	2	1	4
0	1	0	0	1
0	0	0	0	0
0	1	0	1	2
5	8	11	4	28
2	1	3	0	6

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Feb 9, 16

LOCATION: Santa Ana
NORTH & SOUTH: Harbor
EAST & WEST: Segerstrom


PROJECT #: SC0846
LOCATION #: 45
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Harbor			SOUTHBOUND Harbor			EASTBOUND Segerstrom			WESTBOUND Segerstrom				U-TURNS				
		NL	NT	NR	SL	ST	SR	EL	ET	ER	WL	WT	WR	TOTAL	NB	SB	EB	WB	TTL
	LANES:	2	3	0	1	3	0	1	2	0	1	2	1		0	0	0	0	
AM	7:00 AM	19	119	13	39	581	13	10	143	46	19	53	13	1,068	0	0	0	0	0
	7:15 AM	21	169	20	29	555	13	21	198	76	15	48	16	1,181	1	0	0	0	1
	7:30 AM	18	180	12	45	588	24	17	193	77	23	65	20	1,262	0	0	0	0	0
	7:45 AM	31	176	11	39	556	20	18	189	66	37	101	25	1,269	4	0	0	0	4
	8:00 AM	35	233	15	38	503	18	30	167	65	32	107	16	1,259	3	1	1	0	5
	8:15 AM	22	171	10	42	562	20	19	159	77	20	74	17	1,193	2	2	0	0	4
	8:30 AM	20	218	15	24	509	16	19	129	76	14	56	10	1,106	1	0	1	0	2
	8:45 AM	19	202	9	28	501	19	24	132	58	16	64	15	1,087	0	0	0	0	0
	VOLUMES	185	1,468	105	284	4,355	143	158	1,310	541	176	568	132	9,425	11	3	2	0	16
	APPROACH %	11%	84%	6%	6%	91%	3%	8%	65%	27%	20%	65%	15%						
	APP/DEPART	1,758	/	1,759	4,782	/	5,083	2,009	/	1,696	876	/	887	0					
	BEGIN PEAK HR		7:30 AM																
	VOLUMES	106	760	48	164	2,209	82	84	708	285	112	347	78	4,983					
	APPROACH %	12%	83%	5%	7%	90%	3%	8%	66%	26%	21%	65%	15%						
	PEAK HR FACTOR		0.807			0.934			0.938			0.824		0.982					
	APP/DEPART	914	/	924	2,455	/	2,615	1,077	/	917	537	/	527	0					
PM	4:00 PM	47	410	21	32	218	18	37	108	46	19	249	74	1,279	1	4	0	0	5
	4:15 PM	50	455	13	19	198	13	27	101	45	22	263	65	1,271	2	0	0	0	2
	4:30 PM	58	456	12	28	230	18	39	112	43	33	237	84	1,350	1	5	0	0	6
	4:45 PM	66	429	10	23	243	18	25	121	50	31	248	87	1,351	2	1	1	0	4
	5:00 PM	67	455	16	21	254	25	40	151	48	25	251	76	1,429	1	1	4	0	6
	5:15 PM	80	454	16	23	262	26	21	144	43	21	271	114	1,475	0	3	1	0	4
	5:30 PM	74	469	15	20	227	18	20	114	32	18	262	97	1,366	1	2	0	0	3
	5:45 PM	52	479	13	15	223	18	18	122	31	16	261	92	1,340	1	0	0	0	1
	VOLUMES	494	3,607	116	181	1,855	154	227	973	338	185	2,042	689	10,861	9	16	6	0	31
	APPROACH %	12%	86%	3%	8%	85%	7%	15%	63%	22%	6%	70%	24%						
	APP/DEPART	4,217	/	4,533	2,190	/	2,387	1,538	/	1,254	2,916	/	2,687	0					
	BEGIN PEAK HR		4:45 PM																
	VOLUMES	287	1,807	57	87	986	87	106	530	173	95	1,032	374	5,621					
	APPROACH %	13%	84%	3%	8%	85%	8%	13%	66%	21%	6%	69%	25%						
	PEAK HR FACTOR		0.964			0.932			0.846			0.924		0.953					
	APP/DEPART	2,151	/	2,288	1,160	/	1,258	809	/	667	1,501	/	1,408	0					

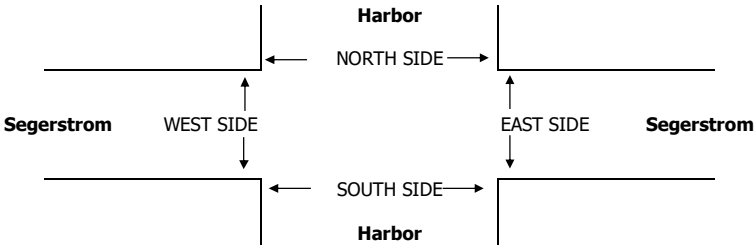

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	1	1	3	5	10	1	0	1	4	6	0	1	2	1	4
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	4	3	2	2	11	1	2	2	1	6	3	1	0	1	5
	7:45 AM	3	1	0	6	10	2	0	0	4	6	1	1	0	2	4
	8:00 AM	0	1	0	2	3	0	1	0	1	2	0	0	0	1	1
	8:15 AM	0	3	0	6	9	0	1	0	5	6	0	2	0	1	3
	8:30 AM	3	4	0	2	9	0	2	0	1	3	3	2	0	1	6
	8:45 AM	2	0	1	2	5	1	0	0	2	3	1	0	1	0	2
	TOTAL	13	13	6	25	57	5	6	3	18	32	8	7	3	7	25
PM	4:00 PM	0	0	3	0	3	0	0	0	0	0	0	0	3	0	3
	4:15 PM	0	0	3	1	4	0	0	2	0	2	0	0	1	1	2
	4:30 PM	2	6	0	4	12	0	1	0	4	5	2	5	0	0	7
	4:45 PM	2	0	1	0	3	2	0	0	0	2	0	0	1	0	1
	5:00 PM	2	3	1	2	8	2	3	0	1	6	0	0	1	1	2
	5:15 PM	2	0	0	0	2	1	0	0	0	1	1	0	0	0	1
	5:30 PM	2	3	1	1	7	1	0	1	1	3	1	3	0	0	4
	5:45 PM	0	0	0	1	1	0	0	0	0	0	0	0	0	1	1
	TOTAL	10	12	9	9	40	6	4	3	6	19	4	8	6	3	21

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Mar 1, 16

LOCATION: Santa Ana
NORTH & SOUTH: Hyland
EAST & WEST: MacArthur


PROJECT #: SC0846
LOCATION #: 9
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Hyland			SOUTHBOUND Hyland			EASTBOUND MacArthur			WESTBOUND MacArthur				U-TURNS				
	LANES:	NL 2	NT 0.5	NR 0.5	SL 1	ST 1	SR 1	EL 1	ET 3	ER 1	WL 1	WT 3	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	10	0	8	2	1	1	1	258	105	12	78	3	479	0	0	0	0	0
	7:15 AM	10	0	2	2	0	13	2	434	157	10	88	5	723	0	0	0	1	1
	7:30 AM	20	0	6	1	0	2	0	505	178	12	92	6	822	0	0	0	0	0
	7:45 AM	10	0	8	1	1	2	3	491	226	22	138	2	904	0	0	0	0	0
	8:00 AM	26	2	2	3	0	1	1	446	183	17	152	6	839	0	0	1	0	1
	8:15 AM	13	1	5	5	0	0	3	412	154	13	106	4	716	0	0	0	0	0
	8:30 AM	9	2	6	1	0	3	5	415	134	20	107	6	708	0	0	0	0	0
	8:45 AM	21	4	13	4	1	0	6	319	111	13	127	4	623	0	0	0	0	0
	VOLUMES	119	9	50	19	3	22	21	3,280	1,248	119	888	36	5,814	0	0	1	1	2
	APPROACH %	67%	5%	28%	43%	7%	50%	0%	72%	27%	11%	85%	3%						
	APP/DEPART	178	/	65	44	/	1,369	4,549	/	3,350	1,043	/	1,030	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	66	2	18	7	1	18	6	1,876	744	61	470	19	3,288					
	APPROACH %	77%	2%	21%	27%	4%	69%	0%	71%	28%	11%	85%	3%						
	PEAK HR FACTOR		0.717			0.433			0.912			0.786		0.909					
	APP/DEPART	86	/	26	26	/	805	2,626	/	1,902	550	/	555	0					
PM	4:00 PM	250	2	18	4	1	6	6	192	29	6	476	2	992	0	0	3	0	3
	4:15 PM	254	3	10	3	0	8	3	184	34	3	582	3	1,087	0	0	2	0	2
	4:30 PM	270	0	15	6	3	2	6	227	45	10	532	5	1,121	0	0	5	0	5
	4:45 PM	282	0	14	3	2	1	9	200	45	6	561	1	1,124	0	0	4	1	5
	5:00 PM	284	2	24	3	0	2	7	218	32	10	556	1	1,139	0	0	4	0	4
	5:15 PM	302	2	18	3	1	7	9	233	38	3	556	5	1,177	0	0	4	1	5
	5:30 PM	286	2	11	2	0	3	9	205	38	5	585	4	1,150	0	0	1	0	1
	5:45 PM	280	2	6	2	2	4	7	195	44	3	566	5	1,116	0	0	2	0	2
	VOLUMES	2,208	13	116	26	9	33	56	1,654	305	46	4,414	26	8,906	0	0	25	2	27
	APPROACH %	94%	1%	5%	38%	13%	49%	3%	82%	15%	1%	98%	1%						
	APP/DEPART	2,337	/	70	68	/	358	2,015	/	1,798	4,486	/	6,680	0					
	BEGIN PEAK HR		4:45 PM																
	VOLUMES	1,154	6	67	11	3	13	34	856	153	24	2,258	11	4,590					
	APPROACH %	94%	0%	5%	41%	11%	48%	3%	82%	15%	1%	98%	0%						
	PEAK HR FACTOR		0.953			0.614			0.931			0.965		0.975					
	APP/DEPART	1,227	/	38	27	/	178	1,043	/	936	2,293	/	3,438	0					

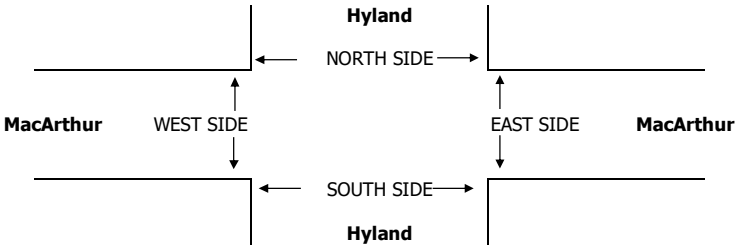

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	2	2	1	0	5	1	2	0	0	3	1	0	1	0	2
	7:30 AM	0	1	0	0	1	0	1	0	0	1	0	0	0	0	0
	7:45 AM	3	2	0	0	5	1	2	0	0	3	2	0	0	0	2
	8:00 AM	1	0	0	0	1	0	0	0	0	0	1	0	0	0	1
	8:15 AM	5	0	0	0	5	5	0	0	0	5	0	0	0	0	0
	8:30 AM	1	1	0	0	2	0	0	0	0	0	1	1	0	0	2
	8:45 AM	1	0	0	0	1	1	0	0	0	1	0	0	0	0	0
	TOTAL	13	6	1	0	20	8	5	0	0	13	5	1	1	0	7
PM	4:00 PM	4	2	0	0	6	1	2	0	0	3	3	0	0	0	3
	4:15 PM	4	1	2	0	7	2	0	1	0	3	2	1	1	0	4
	4:30 PM	3	0	2	0	5	0	0	1	0	1	3	0	1	0	4
	4:45 PM	1	5	3	0	9	0	3	2	0	5	1	2	1	0	4
	5:00 PM	2	1	3	0	6	0	1	2	0	3	2	0	1	0	3
	5:15 PM	3	1	1	0	5	1	0	1	0	2	2	1	0	0	3
	5:30 PM	8	0	0	0	8	1	0	0	0	1	7	0	0	0	7
	5:45 PM	1	1	0	0	2	1	1	0	0	2	0	0	0	0	0
	TOTAL	26	11	11	0	48	6	7	7	0	20	20	4	4	0	28

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 22, 18

LOCATION: Costa Mesa
NORTH & SOUTH: Harbor
EAST & WEST: MacArthur


PROJECT #: SC
LOCATION #: 1
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Harbor			SOUTHBOUND Harbor			EASTBOUND MacArthur			WESTBOUND MacArthur				U-TURNS				
	LANES:	NL 2	NT 3	NR 1	SL 2	ST 3	SR 1	EL 1	ET 3	ER 1	WL 1	WT 3	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	21	181	7	74	415	39	33	217	36	14	54	16	1,107	0	0	0	3	3
	7:15 AM	18	188	9	70	474	26	37	249	65	16	78	28	1,258	0	2	0	3	5
	7:30 AM	27	197	19	89	468	20	36	322	102	29	93	38	1,440	3	0	0	2	5
	7:45 AM	33	212	24	79	422	34	23	293	74	39	125	29	1,387	0	3	0	10	13
	8:00 AM	41	251	24	59	454	35	32	254	76	33	119	38	1,416	1	1	0	10	12
	8:15 AM	24	220	23	82	440	34	32	249	85	29	97	24	1,339	3	0	0	6	9
	8:30 AM	39	192	21	73	412	40	30	212	68	31	80	26	1,224	3	0	0	9	12
	8:45 AM	36	203	23	75	438	39	26	177	78	28	76	28	1,227	4	0	0	6	10
	VOLUMES	239	1,644	150	601	3,523	267	249	1,973	584	219	722	227	10,398	14	6	0	49	69
	APPROACH %	12%	81%	7%	14%	80%	6%	9%	70%	21%	19%	62%	19%						
	APP/DEPART	2,033	/	2,126	4,391	/	4,291	2,806	/	2,767	1,168	/	1,214	0					
	BEGIN PEAK HR		7:30 AM																
	VOLUMES	125	880	90	309	1,784	123	123	1,118	337	130	434	129	5,582					
	APPROACH %	11%	80%	8%	14%	81%	6%	8%	71%	21%	19%	63%	19%						
	PEAK HR FACTOR		0.866			0.960			0.858			0.898		0.969					
	APP/DEPART	1,095	/	1,136	2,216	/	2,230	1,578	/	1,541	693	/	675	0					
PM	4:00 PM	131	418	18	47	237	38	37	138	45	26	358	73	1,566	4	4	0	7	15
	4:15 PM	138	393	32	43	250	41	23	110	41	22	362	55	1,510	3	1	2	8	14
	4:30 PM	144	377	26	48	291	32	38	125	35	32	340	81	1,569	2	7	1	9	19
	4:45 PM	144	358	23	50	244	47	30	105	47	13	370	53	1,484	0	1	0	5	6
	5:00 PM	141	355	22	64	284	67	37	126	55	18	369	61	1,599	1	2	3	2	8
	5:15 PM	147	399	15	46	232	26	32	123	40	22	359	75	1,516	1	3	2	6	12
	5:30 PM	112	407	13	50	253	29	45	99	43	20	346	86	1,503	2	3	3	6	14
	5:45 PM	130	411	16	51	220	34	29	98	30	14	356	69	1,458	0	3	1	6	10
	VOLUMES	1,087	3,118	165	399	2,011	314	271	924	336	167	2,860	553	12,205	13	24	12	49	98
	APPROACH %	25%	71%	4%	15%	74%	12%	18%	60%	22%	5%	80%	15%						
	APP/DEPART	4,370	/	3,954	2,724	/	2,478	1,531	/	1,513	3,580	/	4,260	0					
	BEGIN PEAK HR		4:30 PM																
	VOLUMES	576	1,489	86	208	1,051	172	137	479	177	85	1,438	270	6,168					
	APPROACH %	27%	69%	4%	15%	73%	12%	17%	60%	22%	5%	80%	15%						
	PEAK HR FACTOR		0.959			0.862			0.909			0.983		0.964					
	APP/DEPART	2,151	/	1,903	1,431	/	1,295	793	/	782	1,793	/	2,188	0					

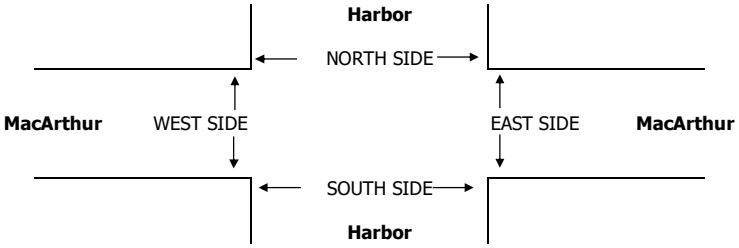

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:30 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:30 PM					0	0	0	0	0					

Attachment 8

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com


DATE:	LOCATION:	Santa Ana	PROJECT #:	SC0846
Tue, Mar 1, 16	NORTH & SOUTH:	Harbor	LOCATION #:	11
	EAST & WEST:	Sunflower	CONTROL:	SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND (Harbor)			SOUTHBOUND (Harbor)			EASTBOUND (Sunflower)			WESTBOUND (Sunflower)				U-TURNS				
		NL	NT	NR	SL	ST	SR	EL	ET	ER	WL	WT	WR	TOTAL	NB	SB	EB	WB	TTL
	LANES:	2	3	0	2	3	1	1	2	0	1.5	1.5	0		0	0	0	0	
AM	7:00 AM	33	170	24	36	445	5	5	22	7	17	31	8	803	0	0	0	0	0
	7:15 AM	48	224	32	58	556	15	0	21	6	16	16	13	1,005	1	0	0	0	1
	7:30 AM	39	272	53	71	616	8	3	32	17	26	34	24	1,195	0	0	0	0	0
	7:45 AM	52	334	70	57	530	16	1	33	8	41	58	19	1,219	2	1	0	0	3
	8:00 AM	69	233	42	50	531	15	4	18	9	41	51	34	1,097	0	0	0	0	0
	8:15 AM	69	246	40	56	453	14	0	17	14	26	34	14	983	1	1	0	0	2
	8:30 AM	54	268	40	62	454	18	2	8	11	13	26	15	971	1	4	0	0	5
	8:45 AM	62	241	27	39	463	13	7	20	8	26	26	15	947	2	1	0	0	3
	VOLUMES	426	1,988	328	429	4,048	104	22	171	80	206	276	142	8,220	7	7	0	0	14
	APPROACH %	16%	73%	12%	9%	88%	2%	8%	63%	29%	33%	44%	23%						
	APP/DEPART	2,742	/	2,159	4,581	/	4,341	273	/	921	624	/	799	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	208	1,063	197	236	2,233	54	8	104	40	124	159	90	4,516					
	APPROACH %	14%	72%	13%	9%	89%	2%	5%	68%	26%	33%	43%	24%						
	PEAK HR FACTOR		0.805			0.908			0.731			0.740		0.926					
	APP/DEPART	1,468	/	1,162	2,523	/	2,400	152	/	536	373	/	418	0					
PM	4:00 PM	39	466	41	31	338	13	12	29	39	65	92	33	1,198	3	3	0	0	6
	4:15 PM	47	493	42	26	300	6	8	21	29	51	110	39	1,172	2	1	0	0	3
	4:30 PM	37	463	58	18	355	11	20	45	57	65	106	44	1,279	2	2	0	0	4
	4:45 PM	48	467	53	30	326	12	9	30	32	55	127	58	1,247	1	2	0	0	3
	5:00 PM	46	358	65	28	330	9	28	56	50	68	132	32	1,202	4	3	0	0	7
	5:15 PM	40	413	76	31	327	8	7	43	42	56	147	57	1,247	1	1	0	0	2
	5:30 PM	41	440	70	35	306	8	8	32	30	53	148	53	1,224	2	3	0	0	5
	5:45 PM	49	485	59	25	266	10	4	31	29	61	151	46	1,216	1	1	0	2	4
	VOLUMES	347	3,585	464	224	2,548	77	96	287	308	474	1,013	362	9,785	16	16	0	2	34
	APPROACH %	8%	82%	11%	8%	89%	3%	14%	42%	45%	26%	55%	20%						
	APP/DEPART	4,396	/	4,059	2,849	/	3,344	691	/	961	1,849	/	1,421	0					
	BEGIN PEAK HR		4:30 PM																
	VOLUMES	171	1,701	252	107	1,338	40	64	174	181	244	512	191	4,975					
	APPROACH %	8%	80%	12%	7%	90%	3%	15%	42%	43%	26%	54%	20%						
	PEAK HR FACTOR		0.935			0.967			0.782			0.911		0.972					
	APP/DEPART	2,124	/	1,964	1,485	/	1,771	419	/	525	947	/	715	0					

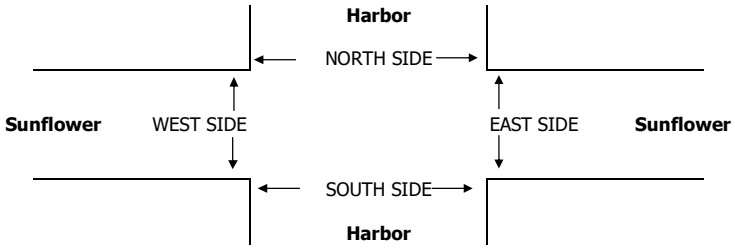

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	1	0	0	0	1	1	0	0	0	1	0	0	0	0	0
	7:15 AM	2	0	0	2	4	2	0	0	0	2	0	0	0	2	2
	7:30 AM	1	1	1	1	4	1	0	1	1	3	0	1	0	0	1
	7:45 AM	4	2	2	2	10	3	0	2	2	7	1	2	0	0	3
	8:00 AM	0	3	0	0	3	0	0	0	0	0	0	3	0	0	3
	8:15 AM	2	1	2	3	8	2	0	2	1	5	0	1	0	2	3
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	4	1	4	3	12	2	0	2	1	5	2	1	2	2	7
	TOTAL	14	8	9	11	42	11	0	7	5	23	3	8	2	6	19
PM	4:00 PM	2	1	4	1	8	1	1	2	0	4	1	0	2	1	4
	4:15 PM	2	0	2	1	5	1	0	1	1	3	1	0	1	0	2
	4:30 PM	3	4	2	2	11	0	0	2	1	3	3	4	0	1	8
	4:45 PM	5	1	3	1	10	3	0	3	1	7	2	1	0	0	3
	5:00 PM	2	1	1	2	6	1	0	0	1	2	1	1	1	1	4
	5:15 PM	2	1	3	1	7	1	0	1	0	2	1	1	2	1	5
	5:30 PM	3	2	2	0	7	2	0	2	0	4	1	2	0	0	3
	5:45 PM	1	1	4	0	6	0	0	4	0	4	1	1	0	0	2
	TOTAL	20	11	21	8	60	9	1	15	4	29	11	10	6	4	31

INTERSECTION TURNING MOVEMENT COUNTS

T319

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, Mar 12, 19

LOCATION: Costa Mesa
NORTH & SOUTH: Harbor
EAST & WEST: NB I-405 Ramps

PROJECT #: CMP2019
LOCATION #: 48
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — N / W / E / S

Add U-Turns to Left Turns

		NORTHBOUND Harbor			SOUTHBOUND Harbor			EASTBOUND NB I-405 Ramps			WESTBOUND NB I-405 Ramps			
	LANES:	NL X	NT 4	NR 2	SL X	ST 5	SR X	EL X	ET X	ER X	WL 1,5	WT X	WR 1,5	TOTAL
AM	6:00 AM	0	118	82	0	193	0	0	0	0	29	0	76	498
	6:15 AM	0	95	79	0	234	0	0	0	0	42	0	87	537
	6:30 AM	0	157	99	0	369	0	0	0	0	51	0	88	764
	6:45 AM	0	177	90	0	441	0	0	0	0	53	0	179	940
	7:00 AM	0	200	119	0	448	0	0	0	0	77	0	156	1,000
	7:15 AM	0	261	133	0	551	0	0	0	0	80	0	169	1,194
	7:30 AM	0	305	132	0	623	0	0	0	0	114	0	172	1,346
	7:45 AM	0	381	161	0	628	0	0	0	0	157	0	230	1,557
	8:00 AM	0	404	130	0	525	0	0	0	0	111	0	204	1,374
	8:15 AM	0	384	135	0	571	0	0	0	0	106	0	211	1,407
	8:30 AM	0	382	144	0	579	0	0	0	0	128	0	240	1,473
	8:45 AM	0	369	112	0	541	0	0	0	0	127	0	218	1,367
	VOLUMES	0	3,233	1,416	0	5,703	0	0	0	0	1,075	0	2,030	13,457
	APPROACH %	0%	70%	30%	0%	100%	0%	0%	0%	0%	35%	0%	65%	
	APP/DEPART	4,649	/	5,263	5,703	/	6,778	0	/	1,416	3,105	/	0	0
	BEGIN PEAK HR		7:45 AM											
	VOLUMES	0	1,551	570	0	2,303	0	0	0	0	502	0	885	5,811
	APPROACH %	0%	73%	27%	0%	100%	0%	0%	0%	0%	36%	0%	64%	
	PEAK HR FACTOR		0.978			0.917			0.000			0.896		0.933
	APP/DEPART	2,121	/	2,436	2,303	/	2,805	0	/	570	1,387	/	0	0
PM	03:00 PM	0	395	118	0	488	0	0	0	0	193	0	240	1,434
	3:15 PM	0	391	135	0	465	0	0	0	0	194	0	233	1,418
	3:30 PM	0	358	113	0	474	0	0	0	0	193	0	291	1,429
	3:45 PM	0	398	105	0	480	0	0	0	0	172	0	268	1,423
	4:00 PM	0	385	137	0	543	0	0	0	0	174	0	280	1,519
	4:15 PM	0	409	151	0	493	0	0	0	0	192	0	267	1,512
	4:30 PM	0	407	156	0	547	0	0	0	0	173	0	287	1,570
	4:45 PM	0	368	112	0	556	0	0	0	0	159	0	301	1,496
	5:00 PM	0	381	188	0	664	0	0	0	0	183	0	265	1,681
	5:15 PM	0	357	148	0	683	0	0	0	0	179	0	267	1,634
	5:30 PM	0	422	117	0	553	0	0	0	0	178	0	241	1,511
	5:45 PM	0	331	139	0	485	0	0	0	0	187	0	234	1,376
	6:00 PM	0	342	155	0	464	0	0	0	0	196	0	242	1,399
	6:15 PM	0	336	124	0	437	0	0	0	0	211	0	260	1,368
	6:30 PM	0	333	79	0	398	0	0	0	0	204	0	233	1,247
	6:45 PM	0	302	89	0	370	0	0	0	0	206	0	180	1,147
	VOLUMES	0	5,915	2,066	0	8,100	0	0	0	0	2,994	0	4,089	23,164
	APPROACH %	0%	74%	26%	0%	100%	0%	0%	0%	0%	42%	0%	58%	
	APP/DEPART	7,981	/	10,004	8,100	/	11,094	0	/	2,066	7,083	/	0	0
	BEGIN PEAK HR		4:30 PM											
	VOLUMES	0	1,513	604	0	2,450	0	0	0	0	694	0	1,120	6,381
	APPROACH %	0%	71%	29%	0%	100%	0%	0%	0%	0%	38%	0%	62%	
	PEAK HR FACTOR		0.930			0.897			0.000			0.986		0.949
	APP/DEPART	2,117	/	2,633	2,450	/	3,144	0	/	604	1,814	/	0	0

U-TURNS					
	NB	SB	EB	WB	TTL
	0	0	0	0	
6:00 AM	0	0	0	0	0
6:15 AM	0	0	0	0	0
6:30 AM	0	0	0	0	0
6:45 AM	0	0	0	0	0
7:00 AM	0	0	0	0	0
7:15 AM	0	0	0	0	0
7:30 AM	0	0	0	0	0
7:45 AM	0	0	0	0	0
8:00 AM	0	0	0	0	0
8:15 AM	0	0	0	0	0
8:30 AM	0	0	0	0	0
8:45 AM	0	0	0	0	0
VOLUMES	0	0	0	0	0
APP/DEPART					
BEGIN PEAK HR					
VOLUMES					
APPROACH %					
PEAK HR FACTOR					
APP/DEPART					
03:00 PM	0	0	0	0	0
3:15 PM	0	0	0	0	0
3:30 PM	0	0	0	0	0
3:45 PM	0	0	0	0	0
4:00 PM	0	0	0	0	0
4:15 PM	0	0	0	0	0
4:30 PM	0	0	0	0	0
4:45 PM	0	0	0	0	0
5:00 PM	0	0	0	0	0
5:15 PM	0	0	0	0	0
5:30 PM	0	0	0	0	0
5:45 PM	0	0	0	0	0
6:00 PM	0	0	0	0	0
6:15 PM	0	0	0	0	0
6:30 PM	0	0	0	0	0
6:45 PM	0	0	0	0	0
VOLUMES	0	0	0	0	0
APPROACH %					
APP/DEPART					
BEGIN PEAK HR					
VOLUMES					
APPROACH %					
PEAK HR FACTOR					
APP/DEPART					

Right-turn Overlap				
NRR X	SRR X	ERR X	WRR X	
0	0	0	0	
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0

Harbor

NORTH SIDE

NB I-405 Ramps WEST SIDE EAST SIDE **NB I-405 Ramps**

SOUTH SIDE

Harbor

	ALL PED AND BIKE				
	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL
6:00 AM	0	0	0	0	0
6:15 AM	0	1	0	0	1
6:30 AM	0	0	1	0	1
6:45 AM	0	1	0	0	1
7:00 AM	0	0	1	0	1
7:15 AM	0	0	2	0	2
7:30 AM	0	0	0	0	0
7:45 AM	0	0	0	0	0
8:00 AM	0	3	0	0	3
8:15 AM	0	1	0	0	1
8:30 AM	0	0	4	0	4
8:45 AM	0	0	2	0	2
TOTAL	0	6	10	0	16
AM BEGIN PEAK HR	7:45 AM				
3:00 PM	0	0	0	0	0
3:15 PM	0	3	1	0	4
3:30 PM	0	0	0	0	0
3:45 PM	0	0	3	0	3
4:00 PM	0	1	1	0	2
4:15 PM	0	0	1	0	1
4:30 PM	0	1	2	0	3
4:45 PM	0	0	1	0	1
5:00 PM	0	2	1	0	3
5:15 PM	0	0	1	0	1
5:30 PM	0	1	0	0	1
5:45 PM	0	2	5	0	7
6:00 PM	0	5	0	0	5
6:15 PM	0	2	0	0	2
6:30 PM	0	1	1	0	2
6:45 PM	0	1	0	0	1
TOTAL	0	19	17	0	36
PM BEGIN PEAK HR	4:30 PM				

PEDESTRIAN CROSSINGS					
	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL
6:00 AM	0	0	0	0	0
6:15 AM	0	0	0	0	0
6:30 AM	0	0	1	0	1
6:45 AM	0	0	0	0	0
7:00 AM	0	0	1	0	1
7:15 AM	0	0	2	0	2
7:30 AM	0	0	0	0	0
7:45 AM	0	0	0	0	0
8:00 AM	0	0	0	0	0
8:15 AM	0	0	0	0	0
8:30 AM	0	0	4	0	4
8:45 AM	0	0	2	0	2
TOTAL	0	0	10	0	10
AM BEGIN PEAK HR	0	0	4	0	4
3:00 PM	0	0	0	0	0
3:15 PM	0	0	1	0	1
3:30 PM	0	0	0	0	0
3:45 PM	0	0	3	0	3
4:00 PM	0	0	1	0	1
4:15 PM	0	0	1	0	1
4:30 PM	0	0	2	0	2
4:45 PM	0	0	1	0	1
5:00 PM	0	0	1	0	1
5:15 PM	0	0	1	0	1
5:30 PM	0	0	0	0	0
5:45 PM	0	0	5	0	5
6:00 PM	0	0	0	0	0
6:15 PM	0	0	0	0	0
6:30 PM	0	0	1	0	1
6:45 PM	0	0	0	0	0
TOTAL	0	0	17	0	17
PM BEGIN PEAK HR	0	0	5	0	5

BICYCLE CROSSINGS					
	NS	SS	ES	WS	TOTAL
6:00 AM	0	0	0	0	0
6:15 AM	0	1	0	0	1
6:30 AM	0	0	0	0	0
6:45 AM	0	1	0	0	1
7:00 AM	0	0	0	0	0
7:15 AM	0	0	0	0	0
7:30 AM	0	0	0	0	0
7:45 AM	0	0	0	0	0
8:00 AM	0	3	0	0	3
8:15 AM	0	1	0	0	1
8:30 AM	0	0	0	0	0
8:45 AM	0	0	0	0	0
TOTAL	0	6	0	0	6
AM BEGIN PEAK HR	0	4	0	0	4
3:00 PM	0	0	0	0	0
3:15 PM	0	3	0	0	3
3:30 PM	0	0	0	0	0
3:45 PM	0	0	0	0	0
4:00 PM	0	1	0	0	1
4:15 PM	0	0	0	0	0
4:30 PM	0	1	0	0	1
4:45 PM	0	0	0	0	0
5:00 PM	0	2	0	0	2
5:15 PM	0	0	0	0	0
5:30 PM	0	1	0	0	1
5:45 PM	0	2	0	0	2
6:00 PM	0	5	0	0	5
6:15 PM	0	2	0	0	2
6:30 PM	0	1	0	0	1
6:45 PM	0	1	0	0	1
TOTAL	0	19	0	0	19
PM BEGIN PEAK HR	0	3	0	0	3

INTERSECTION TURNING MOVEMENT COUNTS

T319

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, Apr 16, 19

LOCATION: Costa Mesa
NORTH & SOUTH: Harbor
EAST & WEST: SB I-405 Ramps

PROJECT #: CMP2019
LOCATION #: 42
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Harbor			SOUTHBOUND Harbor			EASTBOUND SB I-405 Ramps			WESTBOUND SB I-405 Ramps			
	LANES:	NL X	NT 3.5	NR 1.5	SL X	ST 4	SR 1	EL 1.5	ET X	ER 1.5	WL X	WT X	WR X	TOTAL
AM	6:00 AM	0	161	102	0	99	131	63	0	95	0	0	0	651
	6:15 AM	0	160	146	0	146	177	59	0	71	0	0	0	759
	6:30 AM	0	197	226	0	204	258	49	0	86	0	0	0	1,020
	6:45 AM	0	260	244	0	210	229	52	0	90	0	0	0	1,085
	7:00 AM	0	269	289	0	258	313	42	0	110	0	0	0	1,281
	7:15 AM	0	313	349	0	303	349	74	0	89	0	0	0	1,477
	7:30 AM	0	389	353	0	386	344	105	0	96	0	0	0	1,673
	7:45 AM	0	475	309	0	332	271	80	0	99	0	0	0	1,566
	8:00 AM	0	431	327	0	398	266	104	0	113	0	0	0	1,639
	8:15 AM	0	416	277	0	373	260	92	0	116	0	0	0	1,534
	8:30 AM	0	400	276	0	400	265	109	0	127	0	0	0	1,577
	8:45 AM	0	316	258	0	430	198	112	0	120	0	0	0	1,434
	VOLUMES	0	3,787	3,156	0	3,539	3,061	941	0	1,212	0	0	0	15,696
	APPROACH %	0%	55%	45%	0%	54%	46%	44%	0%	56%	0%	0%	0%	
	APP/DEPART	6,943	/	4,728	6,600	/	4,751	2,153	/	3,156	0	/	3,061	0
	BEGIN PEAK HR		7:30 AM											
	VOLUMES	0	1,711	1,266	0	1,489	1,141	381	0	424	0	0	0	6,412
	APPROACH %	0%	57%	43%	0%	57%	43%	47%	0%	53%	0%	0%	0%	
	PEAK HR FACTOR		0.949			0.901			0.927			0.000		0.958
	APP/DEPART	2,977	/	2,092	2,630	/	1,913	805	/	1,266	0	/	1,141	0
PM	03:00 PM	0	468	180	0	456	213	51	0	139	0	0	0	1,507
	3:15 PM	0	467	199	0	444	191	46	0	139	0	0	0	1,486
	3:30 PM	0	411	169	0	428	203	52	0	180	0	0	0	1,443
	3:45 PM	0	478	205	0	447	205	44	0	163	0	0	0	1,542
	4:00 PM	0	483	188	0	495	250	40	0	167	0	0	0	1,623
	4:15 PM	0	454	201	0	465	222	37	0	161	0	0	0	1,540
	4:30 PM	0	440	156	0	508	241	35	0	178	0	0	0	1,558
	4:45 PM	0	451	171	0	546	256	41	0	165	0	0	0	1,630
	5:00 PM	0	503	170	0	534	352	43	0	172	0	0	0	1,774
	5:15 PM	0	448	170	0	537	299	36	0	199	0	0	0	1,689
	5:30 PM	0	448	163	0	497	241	23	0	170	0	0	0	1,542
	5:45 PM	0	427	182	0	511	211	30	0	184	0	0	0	1,545
	6:00 PM	0	406	178	0	451	222	43	0	158	0	0	0	1,458
	6:15 PM	0	426	200	0	469	175	40	0	169	0	0	0	1,479
	6:30 PM	0	399	180	0	443	148	46	0	160	0	0	0	1,376
	6:45 PM	0	351	141	0	381	133	39	0	138	0	0	0	1,183
	VOLUMES	0	7,060	2,853	0	7,612	3,562	646	0	2,642	0	0	0	24,377
	APPROACH %	0%	71%	29%	0%	68%	32%	20%	0%	80%	0%	0%	0%	
	APP/DEPART	9,913	/	7,708	11,176	/	10,254	3,288	/	2,853	0	/	3,562	0
	BEGIN PEAK HR		4:30 PM											
	VOLUMES	0	1,842	667	0	2,125	1,148	155	0	714	0	0	0	6,651
	APPROACH %	0%	73%	27%	0%	65%	35%	18%	0%	82%	0%	0%	0%	
	PEAK HR FACTOR		0.932			0.924			0.924			0.000		0.937
	APP/DEPART	2,509	/	1,997	3,273	/	2,839	869	/	667	0	/	1,148	0

U-TURNS

NB	SB	EB	WB	TTL
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Feb 9, 16

LOCATION: Santa Ana
NORTH & SOUTH: Fairview
EAST & WEST: Civic Center


PROJECT #: SC0846
LOCATION #: 12
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Fairview			SOUTHBOUND Fairview			EASTBOUND Civic Center			WESTBOUND Civic Center				U-TURNS				
		NL	NT	NR	SL	ST	SR	EL	ET	ER	WL	WT	WR	TOTAL	NB	SB	EB	WB	TTL
	LANES:	1	3	0	1	3	0	0.5	1	0.5	1.5	0.5	1		0	0	0	0	
AM	7:00 AM	1	313	65	39	371	1	1	5	4	78	3	22	903	0	3	0	0	3
	7:15 AM	0	331	87	57	342	2	2	6	8	82	1	49	967	0	5	0	0	5
	7:30 AM	2	277	122	68	316	1	2	4	3	67	3	45	910	0	1	0	0	1
	7:45 AM	2	307	123	69	318	1	0	7	7	61	1	32	928	0	1	0	0	1
	8:00 AM	3	272	78	49	332	3	2	2	3	63	6	21	834	0	3	0	0	3
	8:15 AM	2	253	64	28	357	1	0	0	3	48	3	39	798	0	1	0	0	1
	8:30 AM	3	247	56	22	373	0	2	1	8	53	2	29	796	0	1	0	0	1
	8:45 AM	2	236	53	19	335	0	1	3	1	61	1	20	732	0	0	0	0	0
	VOLUMES	15	2,236	648	351	2,744	9	10	28	37	513	20	257	6,868	0	15	0	0	15
	APPROACH %	1%	77%	22%	11%	88%	0%	13%	37%	49%	65%	3%	33%						
	APP/DEPART	2,899	/	2,518	3,104	/	3,294	75	/	1,012	790	/	44	0					
	BEGIN PEAK HR		7:00 AM																
	VOLUMES	5	1,228	397	233	1,347	5	5	22	22	288	8	148	3,708					
	APPROACH %	0%	75%	24%	15%	85%	0%	10%	45%	45%	65%	2%	33%						
	PEAK HR FACTOR		0.943			0.964			0.766			0.841		0.959					
	APP/DEPART	1,630	/	1,391	1,585	/	1,657	49	/	642	444	/	18	0					
PM	4:00 PM	1	335	69	36	307	2	4	1	3	74	0	41	873	0	2	0	0	2
	4:15 PM	3	358	78	22	317	0	0	0	3	76	0	41	898	2	2	0	0	4
	4:30 PM	2	360	82	28	291	0	2	1	2	113	1	34	916	1	1	0	0	2
	4:45 PM	0	337	82	26	314	0	1	1	2	111	0	38	912	0	1	0	0	1
	5:00 PM	1	325	93	29	296	0	1	3	2	112	0	50	912	0	5	0	0	5
	5:15 PM	0	340	99	34	330	0	0	1	1	126	0	32	963	0	2	0	0	2
	5:30 PM	0	351	102	32	342	0	0	0	0	88	0	41	956	0	3	0	0	3
	5:45 PM	3	358	92	43	317	0	0	0	0	94	0	32	939	2	6	0	0	8
	VOLUMES	10	2,764	697	250	2,514	2	8	7	13	794	1	309	7,369	5	22	0	0	27
	APPROACH %	0%	80%	20%	9%	91%	0%	29%	25%	46%	72%	0%	28%						
	APP/DEPART	3,471	/	3,103	2,766	/	3,326	28	/	932	1,104	/	8	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	4	1,374	386	138	1,285	0	1	4	3	420	0	155	3,770					
	APPROACH %	0%	78%	22%	10%	90%	0%	13%	50%	38%	73%	0%	27%						
	PEAK HR FACTOR		0.974			0.951			0.333			0.887		0.979					
	APP/DEPART	1,764	/	1,546	1,423	/	1,710	8	/	512	575	/	2	0					

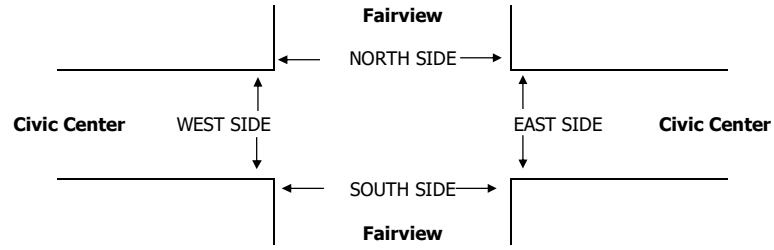

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	30	0	8	16	54	29	0	6	15	50	1	0	2	1	4
	7:15 AM	24	0	0	20	44	23	0	0	18	41	1	0	0	2	3
	7:30 AM	36	0	8	25	69	34	0	4	24	62	2	0	4	1	7
	7:45 AM	33	0	4	25	62	33	0	4	25	62	0	0	0	0	0
	8:00 AM	8	0	1	2	11	6	0	1	1	8	2	0	0	1	3
	8:15 AM	10	0	2	7	19	10	0	2	7	19	0	0	0	0	0
	8:30 AM	4	0	5	2	11	4	0	1	2	7	0	0	4	0	4
	8:45 AM	4	0	2	5	11	3	0	2	4	9	1	0	0	1	2
	TOTAL	149	0	30	102	281	142	0	20	96	258	7	0	10	6	23
PM	4:00 PM	7	0	6	0	13	6	0	4	0	10	1	0	2	0	3
	4:15 PM	10	0	1	5	16	6	0	1	2	9	4	0	0	3	7
	4:30 PM	6	0	2	4	12	6	0	2	3	11	0	0	0	1	1
	4:45 PM	5	0	0	5	10	4	0	0	5	9	1	0	0	0	1
	5:00 PM	5	0	4	5	14	4	0	3	3	10	1	0	1	2	4
	5:15 PM	3	0	4	3	10	1	0	1	0	2	2	0	3	3	8
	5:30 PM	5	0	6	1	12	5	0	3	1	9	0	0	3	0	3
	5:45 PM	2	0	4	2	8	2	0	4	2	8	0	0	0	0	0
	TOTAL	43	0	27	25	95	34	0	18	16	68	9	0	9	9	27

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: FAIRVIEW STREET
E-W Direction: 1ST STREET

File Name : H1702002
Site Code : 00000000
Start Date : 2/7/2017
Page No : 1

Groups Printed- Turning Movements

	FAIRVIEW STREET Southbound				1ST STREET Westbound				FAIRVIEW STREET Northbound				1ST STREET Eastbound				
Start Time	Right	Thru	Left	U-Turn	Right	Thru	Left	U-Turn	Right	Thru	Left	U-Turn	Right	Thru	Left	U-Turn	Int. Total
07:00	20	352	41	1	39	136	32	2	45	284	30	0	54	254	59	0	1349
07:15	28	383	54	1	43	148	49	5	45	283	28	4	34	311	59	0	1475
07:30	40	378	65	2	67	177	47	4	44	302	29	2	34	290	48	0	1529
07:45	53	298	60	3	71	203	38	2	69	303	49	0	52	290	53	4	1548
Total	141	1411	220	7	220	664	166	13	203	1172	136	6	174	1145	219	4	5901
08:00	35	300	54	1	56	182	24	7	62	282	46	0	65	305	47	4	1470
08:15	28	338	53	2	32	123	29	5	39	243	34	0	56	261	53	1	1297
08:30	19	363	50	2	42	116	20	5	43	225	20	0	34	230	48	1	1218
08:45	26	293	33	0	53	127	27	7	40	206	26	4	27	230	50	1	1150
Total	108	1294	190	5	183	548	100	24	184	956	126	4	182	1026	198	7	5135
*** BREAK ***																	
16:00	51	246	45	6	45	275	31	7	30	240	43	0	43	218	30	3	1313
16:15	49	268	48	3	60	220	34	7	41	275	25	0	32	181	49	1	1293
16:30	72	277	56	2	49	281	38	13	36	259	32	2	38	173	40	1	1369
16:45	63	264	42	6	51	274	38	10	31	285	45	3	28	200	49	3	1392
Total	235	1055	191	17	205	1050	141	37	138	1059	145	5	141	772	168	8	5367
17:00	75	299	50	5	45	300	38	7	30	277	43	3	34	214	58	2	1480
17:15	57	346	48	2	39	292	39	7	32	273	25	2	30	213	59	0	1464
17:30	63	279	49	3	51	277	35	5	14	268	42	0	36	212	46	3	1383
17:45	48	302	50	2	45	299	42	11	20	243	34	2	46	205	45	3	1397
Total	243	1226	197	12	180	1168	154	30	96	1061	144	7	146	844	208	8	5724
Grand Total	727	4986	798	41	788	3430	561	104	621	4248	551	22	643	3787	793	27	22127
Apprch %	11.1	76.1	12.2	0.6	16.1	70.2	11.5	2.1	11.4	78.1	10.1	0.4	12.2	72.1	15.1	0.5	
Total %	3.3	22.5	3.6	0.2	3.6	15.5	2.5	0.5	2.8	19.2	2.5	0.1	2.9	17.1	3.6	0.1	


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: FAIRVIEW STREET
E-W Direction: 1ST STREET

File Name : H1702002
Site Code : 00000000
Start Date : 2/7/2017
Page No : 2

	FAIRVIEW STREET Southbound					1ST STREET Westbound					FAIRVIEW STREET Northbound					1ST STREET Eastbound					
Start Time	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	U-Turn	App. Total	Int. Total
Peak Hour Analysis From 07:00 to 08:45 - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 07:15																					
07:15	28	383						49						4	360	34	311	**59**			
07:30	40	378	**65**		**485**	67	177	47	4	295	44	302	29	2	377	34	290	48	0	372	1529
07:45	**53**			**3**		**71**	**203**			**314**	**69**	**303**	**49**		**421**	52	290	53	**4**	399	**1548**
08:00	**35**	**300**	**54**	**1**	**390**	**56**	**182**	**24**	**7**	269	62	282	46	0	390	**65**	305	47	4	**421**	**1470**
Total Volume	156	1359	233	7	1755	237	710	158	18	1123	220	1170	152	6	1548	185	1196	207	8	1596	6022
% App. Total																					
PHF	.736	.887	.896	.583	.905	.835	.874	.806	.643	.894	.797	.965	.776	.375	.919	.712	.961	.877	.500	.948	.973

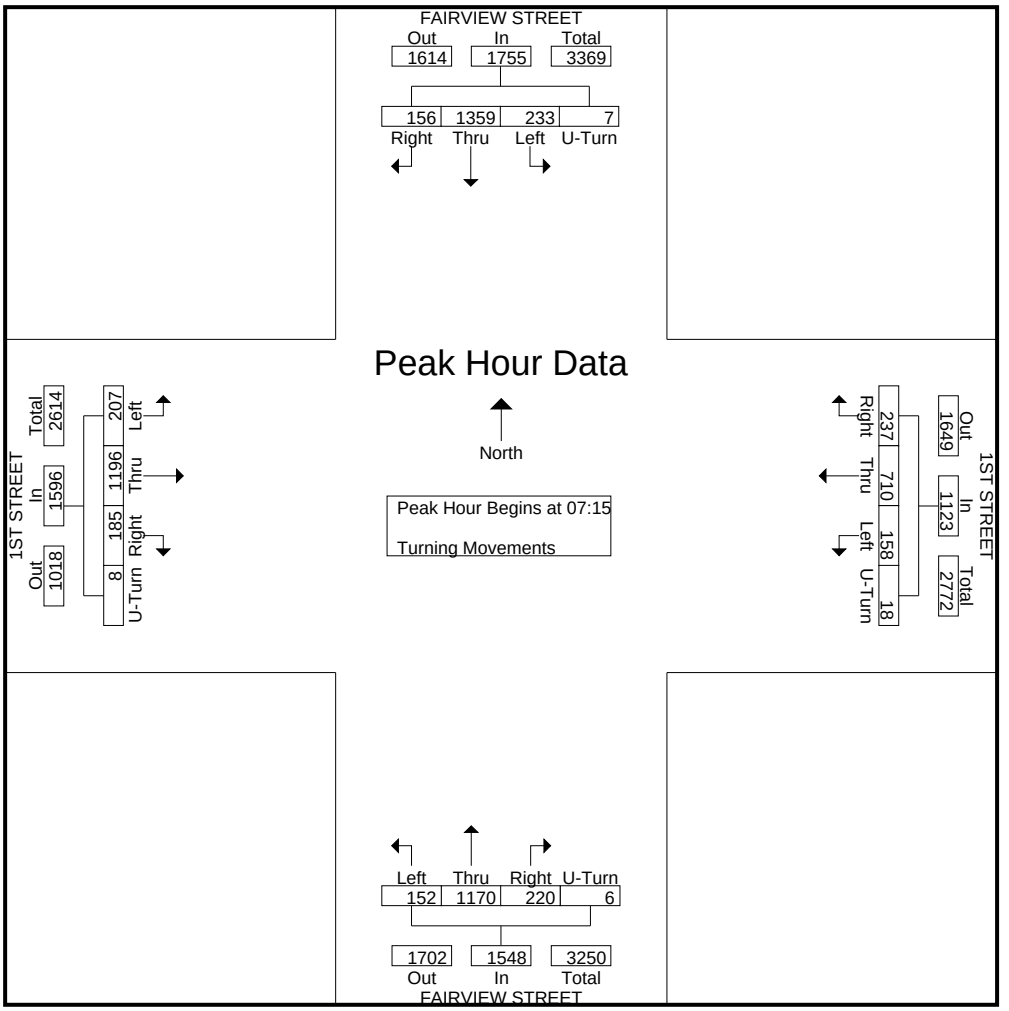


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: FAIRVIEW STREET
E-W Direction: 1ST STREET

File Name : H1702002
Site Code : 00000000
Start Date : 2/7/2017
Page No : 3

	FAIRVIEW STREET Southbound					1ST STREET Westbound					FAIRVIEW STREET Northbound					1ST STREET Eastbound					
Start Time	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	U-Turn	App. Total	Int. Total
Peak Hour Analysis From 16:00 to 17:45 - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 17:00																					
17:00	75	299	50	5	429	45	300	38	7	390	30	**277**	**43**	**3**	**353**	34	**214**			**308**	**1480**
17:15	**57**	**346**	48	2	**453**	39	292	39	7	377	**32**	**273**	**25**	**2**	**332**	**30**	**213**	**59**	0	302	1464
17:30	63	279	49	3	394	**51**	277	35	5	368	14	268	42	0	324	36	212	46	**3**	297	1383
17:45	48	302	50	2	402	45	299	**42**	**11**	**397**						**46**	205	45	3	299	1397
Total Volume	243	1226	197	12	1678	180	1168	154	30	1532	96	1061	144	7	1308	146	844	208	8	1206	5724
% App. Total	14.5	73.1	11.7	0.7		11.7	76.2	10.1	2		7.3	81.1	11	0.5		12.1	70	17.2	0.7		
PHF	.810	.886	.985	.600	.926	.882	.973	.917	.682	.965	.750	.958	.837	.583	.926	.793	.986	.881	.667	.979	.967

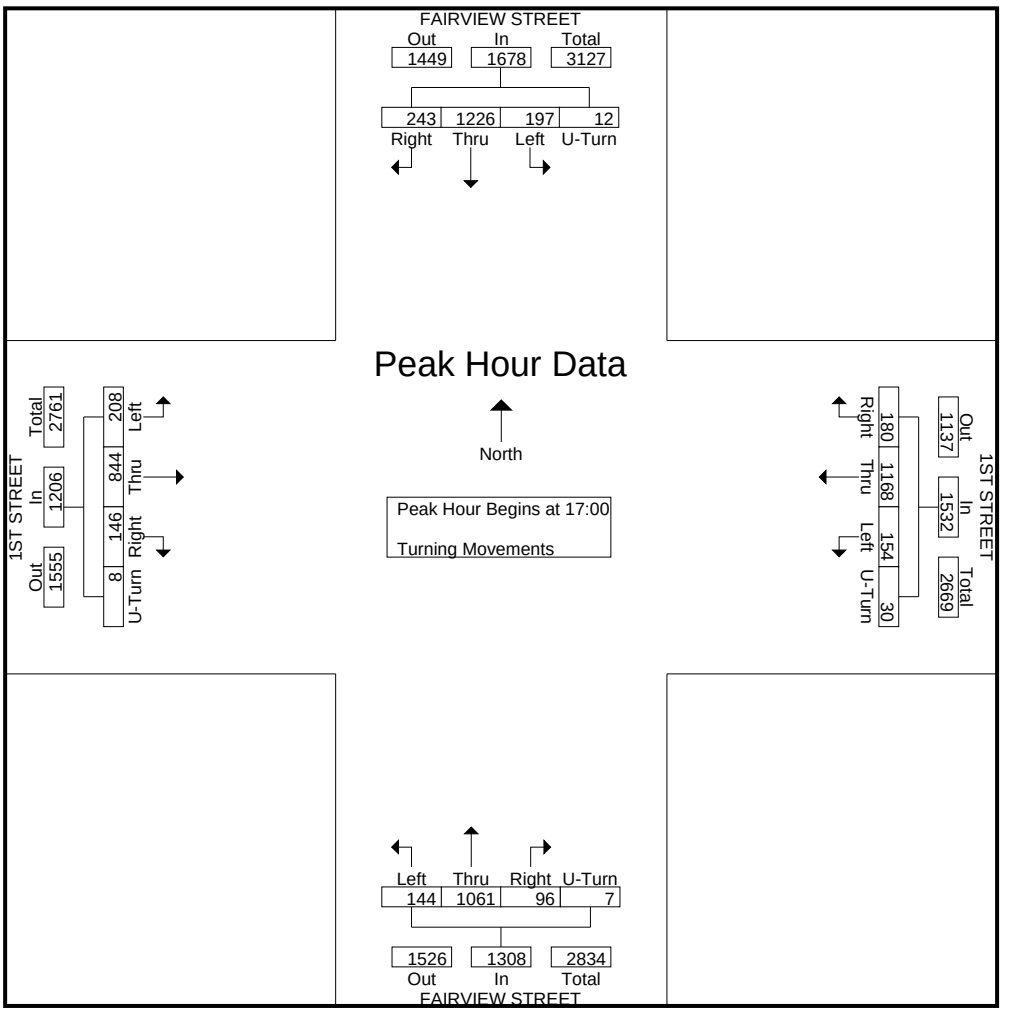

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Feb 9, 16

LOCATION: Santa Ana
NORTH & SOUTH: Fairview
EAST & WEST: McFadden


PROJECT #: SC0846
LOCATION #: 33
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Fairview			SOUTHBOUND Fairview			EASTBOUND McFadden			WESTBOUND McFadden				U-TURNS				
	LANES:	NL 1	NT 3	NR 1	SL 1	ST 3	SR 1	EL 1	ET 2	ER 0	WL 1	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	20	257	19	17	393	28	44	97	23	46	79	14	1,037	0	3	0	0	3
	7:15 AM	20	321	30	14	493	25	57	102	30	54	105	13	1,264	4	3	0	0	7
	7:30 AM	29	325	41	41	426	26	54	128	26	56	152	5	1,309	4	6	0	0	10
	7:45 AM	30	326	51	39	395	39	49	140	37	49	114	11	1,280	0	4	0	0	4
	8:00 AM	37	271	44	42	345	30	52	131	22	27	109	9	1,119	3	10	0	0	13
	8:15 AM	29	239	27	41	344	27	54	130	43	30	88	33	1,085	2	13	0	0	15
	8:30 AM	24	194	19	28	415	27	43	109	56	25	102	18	1,060	1	8	0	0	9
	8:45 AM	19	186	17	38	398	26	34	110	43	33	84	21	1,009	3	7	0	0	10
	VOLUMES	208	2,119	248	260	3,209	228	387	947	280	320	833	124	9,163	17	54	0	0	71
	APPROACH %	8%	82%	10%	7%	87%	6%	24%	59%	17%	25%	65%	10%						
	APP/DEPART	2,575	/	2,684	3,697	/	3,826	1,614	/	1,401	1,277	/	1,252	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	116	1,243	166	136	1,659	120	212	501	115	186	480	38	4,972					
	APPROACH %	8%	82%	11%	7%	87%	6%	26%	61%	14%	26%	68%	5%						
	PEAK HR FACTOR		0.937			0.900			0.916			0.826		0.950					
	APP/DEPART	1,525	/	1,516	1,915	/	1,971	828	/	780	704	/	705	0					
PM	4:00 PM	32	372	34	36	235	43	46	153	21	30	117	32	1,151	0	9	0	0	9
	4:15 PM	42	388	35	34	236	38	40	116	37	30	134	21	1,151	1	3	0	0	4
	4:30 PM	35	369	35	35	277	54	37	146	27	29	133	24	1,201	0	4	0	0	4
	4:45 PM	32	367	38	37	284	46	53	152	29	31	124	16	1,209	0	1	0	0	1
	5:00 PM	48	338	29	35	314	49	53	158	31	38	125	37	1,255	0	4	0	0	4
	5:15 PM	26	346	25	30	300	51	55	141	46	39	150	34	1,243	1	5	0	0	6
	5:30 PM	36	361	41	36	293	48	59	165	39	35	118	28	1,259	0	9	0	0	9
	5:45 PM	42	359	27	47	300	40	67	169	40	39	130	29	1,289	1	3	0	0	4
	VOLUMES	293	2,900	264	290	2,239	369	410	1,200	270	271	1,031	221	9,758	3	38	0	0	41
	APPROACH %	8%	84%	8%	10%	77%	13%	22%	64%	14%	18%	68%	15%						
	APP/DEPART	3,457	/	3,569	2,898	/	2,783	1,880	/	1,716	1,523	/	1,690	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	152	1,404	122	148	1,207	188	234	633	156	151	523	128	5,046					
	APPROACH %	9%	84%	7%	10%	78%	12%	23%	62%	15%	19%	65%	16%						
	PEAK HR FACTOR		0.958			0.969			0.927			0.899		0.979					
	APP/DEPART	1,678	/	1,787	1,543	/	1,516	1,023	/	882	802	/	861	0					

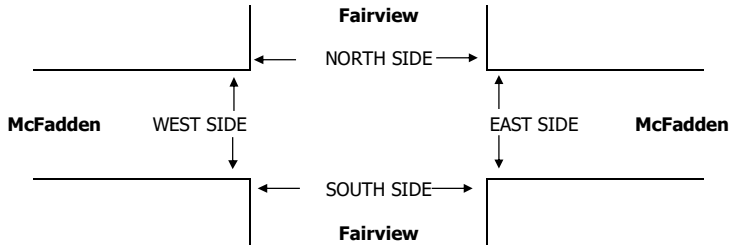

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	18	15	27	25	85	14	14	25	21	74	4	1	2	4	11
	7:15 AM	26	46	46	34	152	26	43	44	30	143	0	3	2	4	9
	7:30 AM	120	117	87	110	434	118	110	82	104	414	2	7	5	6	20
	7:45 AM	83	96	44	81	304	81	90	42	76	289	2	6	2	5	15
	8:00 AM	33	27	28	22	110	27	27	26	21	101	6	0	2	1	9
	8:15 AM	8	39	29	5	81	7	36	26	5	74	1	3	3	0	7
	8:30 AM	12	11	11	13	47	9	10	10	10	39	3	1	1	3	8
	8:45 AM	8	5	9	9	31	8	3	6	8	25	0	2	3	1	6
	TOTAL	308	356	281	299	1,244	290	333	261	275	1,159	18	23	20	24	85
PM	4:00 PM	7	25	33	4	69	6	23	31	1	61	1	2	2	3	8
	4:15 PM	52	4	15	13	84	50	2	13	10	75	2	2	2	3	9
	4:30 PM	12	7	18	9	46	6	6	17	7	36	6	1	1	2	10
	4:45 PM	48	18	18	7	91	46	14	16	5	81	2	4	2	2	10
	5:00 PM	4	6	18	4	32	4	5	15	3	27	0	1	3	1	5
	5:15 PM	18	8	21	13	60	11	6	19	8	44	7	2	2	5	16
	5:30 PM	17	10	24	14	65	11	6	22	7	46	6	4	2	7	19
	5:45 PM	17	16	30	13	76	14	15	28	11	68	3	1	2	2	8
	TOTAL	175	94	177	77	523	148	77	161	52	438	27	17	16	25	85

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Thu, May 16, 19

LOCATION: Santa Ana
NORTH & SOUTH: Fairview
EAST & WEST: Edinger


PROJECT #: SC2183
LOCATION #: 10
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Fairview			SOUTHBOUND Fairview			EASTBOUND Edinger			WESTBOUND Edinger				U-TURNS				
	LANES:	NL 2	NT 3	NR 0	SL 2	ST 3	SR 0	EL 2	ET 3	ER 0	WL 2	WT 3	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	34	179	28	44	430	28	24	127	34	88	86	29	1,131	2	1	0	0	3
	7:15 AM	40	186	27	63	336	21	58	215	54	110	126	22	1,258	1	0	1	0	2
	7:30 AM	55	226	31	50	363	37	66	154	45	96	164	28	1,315	4	0	0	0	4
	7:45 AM	57	231	28	55	359	39	86	154	41	122	171	29	1,372	3	1	0	0	4
	8:00 AM	31	193	26	38	289	43	67	130	39	31	134	49	1,070	1	3	0	1	5
	8:15 AM	35	149	16	36	298	36	48	160	38	57	137	28	1,038	1	1	0	0	2
	8:30 AM	22	138	22	37	424	32	56	154	31	48	101	21	1,086	0	2	0	0	2
	8:45 AM	27	127	12	38	324	33	28	122	40	30	90	22	893	0	2	0	0	2
	VOLUMES	301	1,429	190	361	2,823	269	433	1,216	322	582	1,009	228	9,163	12	10	1	1	24
	APPROACH %	16%	74%	10%	10%	82%	8%	22%	62%	16%	32%	55%	13%						
	APP/DEPART	1,920	/	2,099	3,453	/	3,738	1,971	/	1,758	1,819	/	1,568	0					
	BEGIN PEAK HR		7:00 AM																
	VOLUMES	186	822	114	212	1,488	125	234	650	174	416	547	108	5,076					
	APPROACH %	17%	73%	10%	12%	82%	7%	22%	61%	16%	39%	51%	10%						
	PEAK HR FACTOR		0.888			0.909			0.809			0.832		0.925					
	APP/DEPART	1,122	/	1,165	1,825	/	2,088	1,058	/	974	1,071	/	849	0					
PM	4:00 PM	25	398	32	46	152	31	25	187	39	96	173	40	1,244	0	2	1	0	3
	4:15 PM	45	411	25	63	155	25	49	199	59	93	178	32	1,334	0	0	0	0	0
	4:30 PM	51	473	34	50	159	37	57	173	46	103	204	39	1,426	2	0	0	0	2
	4:45 PM	59	435	26	52	143	39	55	162	44	89	201	43	1,348	5	0	0	0	5
	5:00 PM	31	456	23	31	152	48	66	162	37	84	198	57	1,345	3	0	2	0	5
	5:15 PM	34	444	22	39	140	41	52	173	41	72	192	36	1,286	2	1	0	0	3
	5:30 PM	23	501	26	37	129	32	60	180	30	66	189	36	1,309	0	1	0	1	2
	5:45 PM	29	477	20	37	153	38	57	172	39	56	181	32	1,291	1	0	0	2	3
	VOLUMES	297	3,595	208	355	1,183	291	421	1,408	335	659	1,516	315	10,583	13	4	3	3	23
	APPROACH %	7%	88%	5%	19%	65%	16%	19%	65%	15%	26%	61%	13%						
	APP/DEPART	4,100	/	4,332	1,829	/	2,187	2,164	/	1,970	2,490	/	2,094	0					
	BEGIN PEAK HR		4:15 PM																
	VOLUMES	186	1,775	108	196	609	149	227	696	186	369	781	171	5,453					
	APPROACH %	9%	86%	5%	21%	64%	16%	20%	63%	17%	28%	59%	13%						
	PEAK HR FACTOR		0.927			0.970			0.903			0.954		0.956					
	APP/DEPART	2,069	/	2,171	954	/	1,174	1,109	/	1,000	1,321	/	1,108	0					

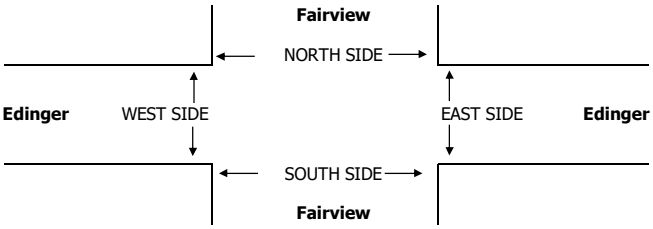

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:00 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:15 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Feb 9, 16

LOCATION: Santa Ana
NORTH & SOUTH: Fairview
EAST & WEST: Warner


PROJECT #: SC0846
LOCATION #: 42
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Fairview			SOUTHBOUND Fairview			EASTBOUND Warner			WESTBOUND Warner				U-TURNS				
	LANES:	NL 2	NT 3	NR 0	SL 2	ST 3	SR 0	EL 2	ET 3	ER 0	WL 2	WT 3	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	30	152	19	57	397	21	18	173	43	48	131	41	1,130	4	3	0	6	13
	7:15 AM	49	211	34	35	427	28	11	272	78	56	193	49	1,443	1	0	0	8	9
	7:30 AM	40	240	38	64	381	26	15	287	84	95	236	87	1,593	2	0	0	9	11
	7:45 AM	65	236	21	51	351	25	16	183	59	89	247	93	1,436	3	1	0	5	9
	8:00 AM	52	227	27	47	405	35	24	228	68	55	213	59	1,440	5	0	1	3	9
	8:15 AM	42	172	29	56	381	32	31	270	72	56	150	38	1,329	3	2	0	6	11
	8:30 AM	42	136	30	47	419	24	24	277	77	47	184	17	1,324	1	1	0	3	5
	8:45 AM	28	174	24	42	410	24	32	193	46	49	171	24	1,217	4	0	1	5	10
	VOLUMES	348	1,548	222	399	3,171	215	171	1,883	527	495	1,525	408	10,912	23	7	2	45	77
	APPROACH %	16%	73%	10%	11%	84%	6%	7%	73%	20%	20%	63%	17%						
	APP/DEPART	2,118	/	2,132	3,785	/	4,171	2,581	/	2,542	2,428	/	2,067	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	206	914	120	197	1,564	114	66	970	289	295	889	288	5,912					
	APPROACH %	17%	74%	10%	11%	83%	6%	5%	73%	22%	20%	60%	20%						
	PEAK HR FACTOR		0.963			0.957			0.858			0.858		0.928					
	APP/DEPART	1,240	/	1,268	1,875	/	2,134	1,325	/	1,311	1,472	/	1,199	0					
PM	4:00 PM	51	414	39	54	212	23	56	210	35	31	197	26	1,348	3	2	0	5	10
	4:15 PM	53	396	42	42	202	25	39	205	42	41	225	37	1,349	4	3	1	7	15
	4:30 PM	43	395	37	46	201	27	47	228	43	46	241	37	1,391	4	3	0	7	14
	4:45 PM	34	415	38	37	209	25	49	231	45	41	230	53	1,407	1	3	0	8	12
	5:00 PM	49	393	41	40	259	23	65	254	47	41	249	50	1,511	5	0	2	12	19
	5:15 PM	47	432	37	51	202	32	44	240	36	38	278	49	1,486	3	2	2	6	13
	5:30 PM	49	419	43	38	233	24	44	217	30	48	283	65	1,493	4	0	1	12	17
	5:45 PM	63	416	33	51	219	13	36	206	29	53	254	66	1,439	2	4	0	12	18
	VOLUMES	389	3,280	310	359	1,737	192	380	1,791	307	339	1,957	383	11,424	26	17	6	69	118
	APPROACH %	10%	82%	8%	16%	76%	8%	15%	72%	12%	13%	73%	14%						
	APP/DEPART	3,979	/	4,054	2,288	/	2,340	2,478	/	2,512	2,679	/	2,518	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	208	1,660	154	180	913	92	189	917	142	180	1,064	230	5,929					
	APPROACH %	10%	82%	8%	15%	77%	8%	15%	73%	11%	12%	72%	16%						
	PEAK HR FACTOR		0.980			0.920			0.852			0.931		0.981					
	APP/DEPART	2,022	/	2,080	1,185	/	1,207	1,248	/	1,287	1,474	/	1,355	0					

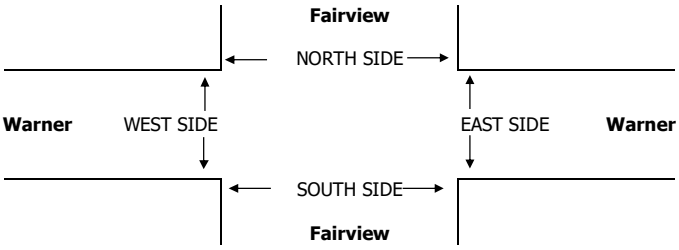

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	1	1	4	0	6	0	1	3	0	4	1	0	1	0	2
	7:15 AM	2	8	6	4	20	0	6	5	4	15	2	2	1	0	5
	7:30 AM	1	3	3	4	11	0	3	3	2	8	1	0	0	2	3
	7:45 AM	2	3	2	4	11	0	3	1	4	8	2	0	1	0	3
	8:00 AM	7	9	6	8	30	2	8	2	8	20	5	1	4	0	10
	8:15 AM	3	5	7	9	24	2	4	7	8	21	1	1	0	1	3
	8:30 AM	1	3	5	2	11	1	1	4	0	6	0	2	1	2	5
	8:45 AM	1	2	4	2	9	1	2	3	1	7	0	0	1	1	2
	TOTAL	18	34	37	33	122	6	28	28	27	89	12	6	9	6	33
PM	4:00 PM	5	16	15	9	45	4	11	9	7	31	1	5	6	2	14
	4:15 PM	6	5	13	2	26	4	3	11	1	19	2	2	2	1	7
	4:30 PM	5	8	7	2	22	4	5	6	1	16	1	3	1	1	6
	4:45 PM	3	6	19	2	30	3	3	13	1	20	0	3	6	1	10
	5:00 PM	1	7	20	3	31	1	4	12	2	19	0	3	8	1	12
	5:15 PM	7	5	9	14	35	3	5	5	9	22	4	0	4	5	13
	5:30 PM	5	0	5	5	15	5	0	4	4	13	0	0	1	1	2
	5:45 PM	1	5	6	3	15	1	2	4	2	9	0	3	2	1	6
	TOTAL	33	52	94	40	219	25	33	64	27	149	8	19	30	13	70

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Thu, May 16, 19

LOCATION: Santa Ana
NORTH & SOUTH: Fairview
EAST & WEST: MacArthur

PROJECT #: SC2183
LOCATION #: 11
CONTROL: SIGNAL


NOTES:

AM / PM / MD / OTHER / OTHER

N ▲ S ▼ W ◄ E ►

Add U-Turns to Left Turns

		NORTHBOUND Fairview			SOUTHBOUND Fairview			EASTBOUND MacArthur			WESTBOUND MacArthur				U-TURNS				
	LANES:	NL 2	NT 3	NR 0	SL 2	ST 3	SR 1	EL 2	ET 3	ER 1	WL 2	WT 3	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	25	129	15	55	313	33	18	188	35	38	81	14	944	5	1	0	3	9
	7:15 AM	48	175	15	63	416	29	20	233	36	51	108	25	1,219	11	1	2	2	16
	7:30 AM	71	199	21	65	381	34	34	248	44	50	113	44	1,304	20	0	0	4	24
	7:45 AM	67	213	22	80	372	54	31	258	37	75	146	37	1,392	24	0	0	2	26
	8:00 AM	59	176	30	95	361	54	38	269	31	56	122	32	1,323	18	0	0	2	20
	8:15 AM	41	193	17	47	303	51	27	230	39	32	131	27	1,138	9	1	0	3	13
	8:30 AM	38	140	10	66	353	22	26	195	40	41	104	21	1,056	4	2	0	1	7
	8:45 AM	30	158	17	54	343	42	26	166	24	40	106	17	1,023	4	0	0	3	7
	VOLUMES	379	1,383	147	525	2,842	319	220	1,787	286	383	911	217	9,399	95	5	2	20	122
	APPROACH %	20%	72%	8%	14%	77%	9%	10%	78%	12%	25%	60%	14%						
	APP/DEPART	1,909	/	1,823	3,686	/	3,586	2,293	/	2,474	1,511	/	1,516	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	245	763	88	303	1,530	171	123	1,008	148	232	489	138	5,238					
	APPROACH %	22%	70%	8%	15%	76%	9%	10%	79%	12%	27%	57%	16%						
	PEAK HR FACTOR		0.907			0.982			0.946			0.832		0.941					
	APP/DEPART	1,096	/	1,023	2,004	/	1,973	1,279	/	1,408	859	/	834	0					
PM	4:00 PM	72	367	32	52	217	34	73	165	59	40	373	47	1,531	3	3	0	5	11
	4:15 PM	66	451	13	38	205	24	65	175	55	36	304	54	1,486	6	6	0	1	13
	4:30 PM	69	424	24	31	235	19	74	196	44	37	322	49	1,524	7	3	1	4	15
	4:45 PM	69	452	27	32	228	23	56	169	49	41	354	67	1,567	4	5	1	9	19
	5:00 PM	47	351	17	64	232	21	80	189	82	47	353	67	1,550	4	7	0	5	16
	5:15 PM	55	428	22	42	250	24	67	169	68	52	322	53	1,552	3	2	0	4	9
	5:30 PM	60	395	32	42	223	26	68	163	44	47	349	64	1,513	8	4	0	6	18
	5:45 PM	71	429	34	39	194	35	46	146	42	47	299	57	1,439	1	5	1	3	10
	VOLUMES	509	3,297	201	340	1,784	206	529	1,372	443	347	2,676	458	12,162	36	35	3	37	111
	APPROACH %	13%	82%	5%	15%	77%	9%	23%	59%	19%	10%	77%	13%						
	APP/DEPART	4,007	/	4,316	2,330	/	2,573	2,344	/	1,915	3,481	/	3,358	0					
	BEGIN PEAK HR		4:30 PM																
	VOLUMES	240	1,655	90	169	945	87	277	723	243	177	1,351	236	6,193					
	APPROACH %	12%	83%	5%	14%	79%	7%	22%	58%	20%	10%	77%	13%						
	PEAK HR FACTOR		0.906			0.947			0.885			0.944		0.988					
	APP/DEPART	1,985	/	2,183	1,201	/	1,361	1,243	/	987	1,764	/	1,662	0					

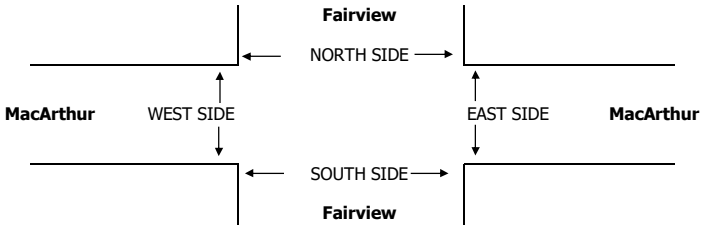

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:15 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:30 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Mar 1, 16

LOCATION: Santa Ana
NORTH & SOUTH: Fairview
EAST & WEST: Sunflower


PROJECT #: SC0846
LOCATION #: 12
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Fairview			SOUTHBOUND Fairview			EASTBOUND Sunflower			WESTBOUND Sunflower				U-TURNS				
	LANES:	NL 2	NT 3	NR 1	SL 2	ST 3	SR 0	EL 2	ET 2	ER 0	WL 2	WT 3	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	27	152	19	17	322	12	10	45	17	47	22	14	704	0	2	0	0	2
	7:15 AM	30	254	31	40	416	23	4	64	10	61	22	18	973	0	5	0	0	5
	7:30 AM	47	294	36	38	411	13	12	76	14	88	58	35	1,122	0	1	2	0	3
	7:45 AM	52	255	32	55	419	31	14	91	14	73	102	46	1,184	1	4	10	0	15
	8:00 AM	48	226	57	63	424	39	17	78	24	72	64	27	1,139	0	4	6	0	10
	8:15 AM	32	224	41	56	376	38	6	59	16	61	34	16	959	0	5	1	0	6
	8:30 AM	29	182	33	37	395	39	11	46	9	40	25	10	856	0	3	3	0	6
	8:45 AM	33	210	22	51	379	32	10	48	9	60	34	9	897	2	2	1	0	5
	VOLUMES	298	1,797	271	357	3,142	227	84	507	113	502	361	175	7,834	3	26	23	0	52
	APPROACH %	13%	76%	11%	10%	84%	6%	12%	72%	16%	48%	35%	17%						
	APP/DEPART	2,366	/	2,059	3,726	/	3,760	704	/	1,109	1,038	/	906	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	177	1,029	156	196	1,670	106	47	309	62	294	246	126	4,418					
	APPROACH %	13%	76%	11%	10%	85%	5%	11%	74%	15%	44%	37%	19%						
	PEAK HR FACTOR		0.903			0.937			0.878			0.753		0.933					
	APP/DEPART	1,362	/	1,198	1,972	/	2,027	418	/	647	666	/	546	0					
PM	4:00 PM	29	400	51	31	238	7	24	61	14	53	112	34	1,054	0	7	1	0	8
	4:15 PM	35	472	74	26	257	15	13	60	11	58	137	43	1,201	1	4	3	1	9
	4:30 PM	32	413	80	24	321	22	37	84	21	71	150	40	1,295	0	2	6	0	8
	4:45 PM	32	436	63	30	277	11	51	83	17	69	169	47	1,285	0	4	5	1	10
	5:00 PM	40	448	67	27	305	27	60	106	26	57	150	46	1,359	0	3	1	0	4
	5:15 PM	46	444	98	31	287	12	52	124	23	60	162	36	1,375	1	5	3	0	9
	5:30 PM	58	450	100	39	308	22	44	90	26	55	153	42	1,387	0	5	4	0	9
	5:45 PM	49	393	112	41	249	18	39	93	16	82	173	42	1,307	2	6	4	0	12
	VOLUMES	321	3,456	645	249	2,242	134	320	701	154	505	1,206	330	10,263	4	36	27	2	69
	APPROACH %	7%	78%	15%	9%	85%	5%	27%	60%	13%	25%	59%	16%						
	APP/DEPART	4,422	/	4,115	2,625	/	2,903	1,175	/	1,561	2,041	/	1,684	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	193	1,735	377	138	1,149	79	195	413	91	254	638	166	5,428					
	APPROACH %	8%	75%	16%	10%	84%	6%	28%	59%	13%	24%	60%	16%						
	PEAK HR FACTOR		0.948			0.925			0.878			0.891		0.978					
	APP/DEPART	2,305	/	2,103	1,366	/	1,497	699	/	909	1,058	/	919	0					

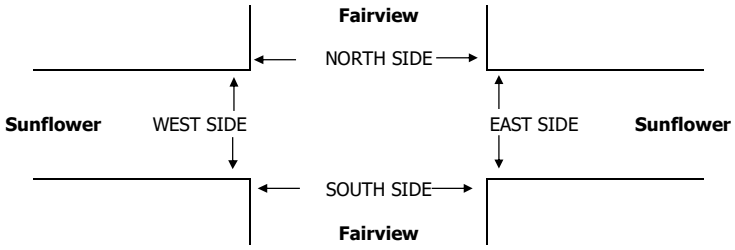

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	3	1	1	3	8	0	1	1	2	4	3	0	0	1	4
	7:15 AM	2	1	1	1	5	0	0	1	1	2	2	1	0	0	3
	7:30 AM	2	3	2	3	10	0	1	1	2	4	2	2	1	1	6
	7:45 AM	3	3	1	3	10	1	1	1	3	6	2	2	0	0	4
	8:00 AM	2	2	2	3	9	0	0	2	2	4	2	2	0	1	5
	8:15 AM	2	7	0	3	12	0	4	0	2	6	2	3	0	1	6
	8:30 AM	2	0	1	5	8	0	0	1	4	5	2	0	0	1	3
	8:45 AM	5	1	0	3	9	2	0	0	3	5	3	1	0	0	4
	TOTAL	21	18	8	24	71	3	7	7	19	36	18	11	1	5	35
PM	4:00 PM	2	2	1	0	5	0	0	1	0	1	2	2	0	0	4
	4:15 PM	1	1	1	2	5	0	1	1	1	3	1	0	0	1	2
	4:30 PM	3	3	4	1	11	0	2	3	1	6	3	1	1	0	5
	4:45 PM	6	4	1	0	11	3	3	0	0	6	3	1	1	0	5
	5:00 PM	5	13	2	0	20	0	3	1	0	4	5	10	1	0	16
	5:15 PM	6	2	2	3	13	4	0	0	2	6	2	2	2	1	7
	5:30 PM	6	5	3	1	15	2	2	2	0	6	4	3	1	1	9
	5:45 PM	3	8	0	3	14	1	3	0	3	7	2	5	0	0	7
	TOTAL	32	38	14	10	94	10	14	8	7	39	22	24	6	3	55

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: GREENVILLE STREET
E-W Direction: EDINGER AVENUE

File Name : H1702003
Site Code : 00000000
Start Date : 2/7/2017

Groups Printed- Turning Movements

	DEAD END Southbound			EDINGER AVENUE Westbound			GREENVILLE AVENUE Northbound			EDINGER AVENUE Eastbound			
Start Time	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	Int. Total
07:00	0	0	0	0	183	30	48	0	32	40	220	0	553
07:15	0	0	0	0	234	36	46	0	38	64	268	0	686
07:30	0	0	0	0	234	59	64	0	48	61	232	0	698
07:45	0	0	0	0	237	41	85	0	62	62	211	0	698
Total	0	0	0	0	888	166	243	0	180	227	931	0	2635
08:00	0	0	0	0	217	22	49	0	31	37	189	0	545
08:15	0	0	0	0	197	8	20	0	20	28	210	0	483
08:30	0	0	0	0	173	11	33	0	24	23	239	0	503
08:45	0	0	0	0	179	21	29	0	23	16	151	0	419
Total	0	0	0	0	766	62	131	0	98	104	789	0	1950
*** BREAK ***													
16:00	0	0	0	0	244	31	51	0	61	50	232	0	669
16:15	0	0	0	0	264	29	54	0	66	44	265	0	722
16:30	0	0	0	0	276	25	52	0	67	41	231	0	692
16:45	0	0	0	0	280	19	55	0	78	49	236	0	717
Total	0	0	0	0	1064	104	212	0	272	184	964	0	2800
17:00	0	0	0	0	270	30	49	0	78	54	245	0	726
17:15	0	0	0	0	274	24	53	0	85	52	208	0	696
17:30	0	0	0	0	270	19	54	0	76	39	264	0	722
17:45	0	0	0	0	275	31	40	0	69	45	199	0	659
Total	0	0	0	0	1089	104	196	0	308	190	916	0	2803
Grand Total	0	0	0	0	3807	436	782	0	858	705	3600	0	10188
Apprch %	0	0	0	0	89.7	10.3	47.7	0	52.3	16.4	83.6	0	
Total %	0	0	0	0	37.4	4.3	7.7	0	8.4	6.9	35.3	0	


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: GREENVILLE STREET
E-W Direction: EDINGER AVENUE

File Name : H1702003
Site Code : 00000000
Start Date : 2/7/2017

	DEAD END Southbound				EDINGER AVENUE Westbound				GREENVILLE AVENUE Northbound				EDINGER AVENUE Eastbound				
Start Time	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 07:00 to 08:45 - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:00																	
07:00	0	0	0	0	0	183	30	213	48	0	32	80	40	220	0	260	553
07:15	0	0	0	0	0	234	36	270	46	0	38	84	**64**	**268**	0	**332**	686
07:30	0	0	0	0	0	234	**59**	**293**	64	0	48	112	61	232	0	293	**698**
07:45	0	0	0	0	0	**237**	41	278	**85**	0	**62**	**147**	62	211	0	273	698
Total Volume	0	0	0	0	0	888	166	1054	243	0	180	423	227	931	0	1158	2635
% App. Total	0	0	0		0	84.3	15.7		57.4	0	42.6		19.6	80.4	0		
PHF	.000	.000	.000	.000	.000	.937	.703	.899	.715	.000	.726	.719	.887	.868	.000	.872	.944

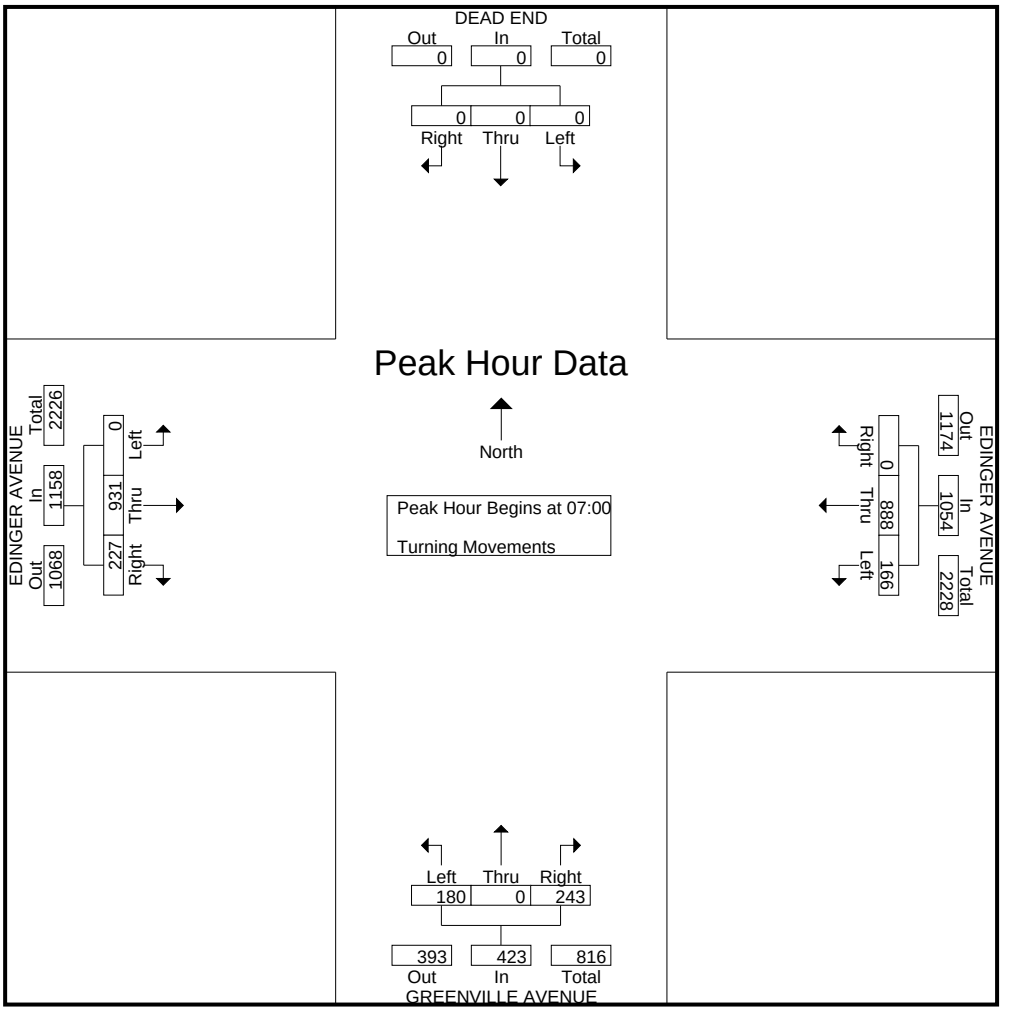


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: GREENVILLE STREET
E-W Direction: EDINGER AVENUE

File Name : H1702003
Site Code : 00000000
Start Date : 2/7/2017
Page No : 3

	DEAD END Southbound				EDINGER AVENUE Westbound				GREENVILLE AVENUE Northbound				EDINGER AVENUE Eastbound				
Start Time	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 16:00 to 17:45 - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 16:45																	
16:45	0	0	0	0	0	**280**	19	299	**55**	0	78	133	49	236	0	285	717
17:00	0	0	0	0	0	270	**30**	**300**	49	0	78	127	**54**	245	0	299	**726**
17:15	0	0	0	0	0	274	24	298	53	0	**85**	**138**	52	208	0	260	696
17:30	0	0	0	0	0	270	19	289	54	0	76	130	39	**264**	0	**303**	722
Total Volume	0	0	0	0	0	1094	92	1186	211	0	317	528	194	953	0	1147	2861
% App. Total	0	0	0		0	92.2	7.8		40	0	60		16.9	83.1	0		
PHF	.000	.000	.000	.000	.000	.977	.767	.988	.959	.000	.932	.957	.898	.902	.000	.946	.985

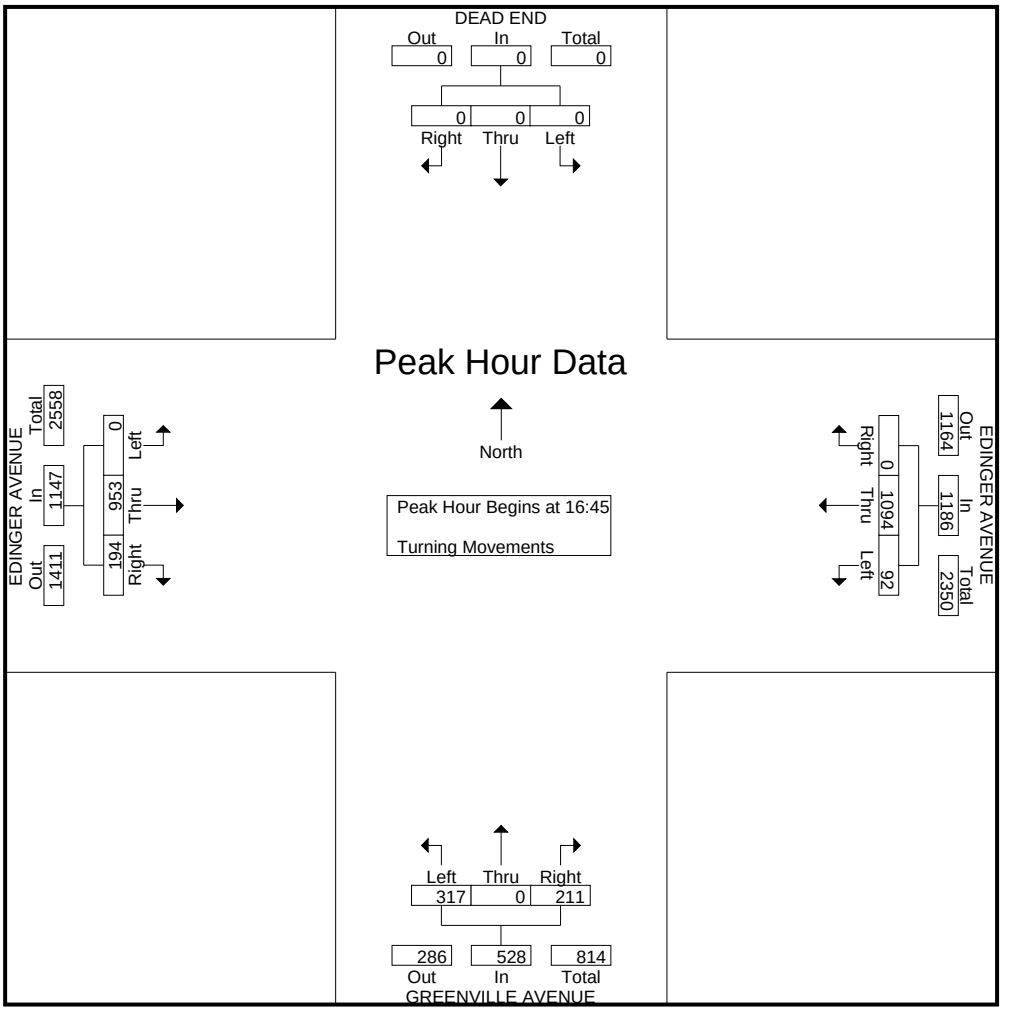

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: GREENVILLE STREET
E-W Direction: SEGERSTROM AVENUE

File Name : H1702004
Site Code : 00000000
Start Date : 2/7/2017

Groups Printed- Turning Movements

	GREENVILLE STREET Southbound			SEGERSTROM AVENUE Westbound			GREENVILLE STREET Northbound			SEGERSTROM AVENUE Eastbound			
Start Time	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	Int. Total
07:00	18	44	21	11	97	9	10	9	6	11	119	5	360
07:15	23	88	27	12	114	24	8	41	6	26	175	10	554
07:30	44	139	49	12	161	40	17	37	9	31	193	10	742
07:45	53	138	45	29	189	57	27	62	12	29	191	5	837
Total	138	409	142	64	561	130	62	149	33	97	678	30	2493
08:00	35	93	28	20	178	38	23	47	18	28	158	7	673
08:15	17	59	32	8	98	6	6	31	10	7	176	9	459
08:30	15	50	14	7	99	1	7	10	5	9	185	7	409
08:45	11	28	8	4	97	6	6	11	3	5	130	6	315
Total	78	230	82	39	472	51	42	99	36	49	649	29	1856
*** BREAK ***													
16:00	8	36	8	25	215	7	4	69	13	7	167	32	591
16:15	12	38	12	25	254	8	4	112	15	12	147	24	663
16:30	14	45	14	27	229	5	6	101	11	5	174	37	668
16:45	6	35	6	24	252	8	9	111	21	8	166	25	671
Total	40	154	40	101	950	28	23	393	60	32	654	118	2593
17:00	13	38	13	35	223	4	7	121	17	12	207	30	720
17:15	14	52	14	37	280	6	12	128	15	10	207	31	806
17:30	15	58	15	38	246	6	5	105	8	11	213	28	748
17:45	17	46	17	33	257	10	10	108	15	12	171	15	711
Total	59	194	59	143	1006	26	34	462	55	45	798	104	2985
Grand Total	315	987	323	347	2989	235	161	1103	184	223	2779	281	9927
Apprch %	19.4	60.7	19.9	9.7	83.7	6.6	11.1	76.2	12.7	6.8	84.6	8.6	
Total %	3.2	9.9	3.3	3.5	30.1	2.4	1.6	11.1	1.9	2.2	28	2.8	


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: GREENVILLE STREET
E-W Direction: SEGERSTROM AVENUE

File Name : H1702004
Site Code : 00000000
Start Date : 2/7/2017

	GREENVILLE STREET Southbound				SEGERSTROM AVENUE Westbound				GREENVILLE STREET Northbound				SEGERSTROM AVENUE Eastbound				
Start Time	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 07:00 to 08:45 - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:15																	
07:15	23	88	27	138	12	114	24	150	8	41	6	55	26	175	**10**	211	554
07:30	44	**139**	**49**	232	12	161	40	213	17	37	9	63	**31**	**193**	10	**234**	742
07:45	**53**	138	45	**236**	**29**	**189**	**57**	**275**	**27**	**62**	12	**101**	29	191	5	225	**837**
08:00	35	93	28	156	20	178	38	236	23	47	**18**	88	28	158	7	193	673
Total Volume	155	458	149	762	73	642	159	874	75	187	45	307	114	717	32	863	2806
% App. Total	20.3	60.1	19.6		8.4	73.5	18.2		24.4	60.9	14.7		13.2	83.1	3.7		
PHF	.731	.824	.760	.807	.629	.849	.697	.795	.694	.754	.625	.760	.919	.929	.800	.922	.838

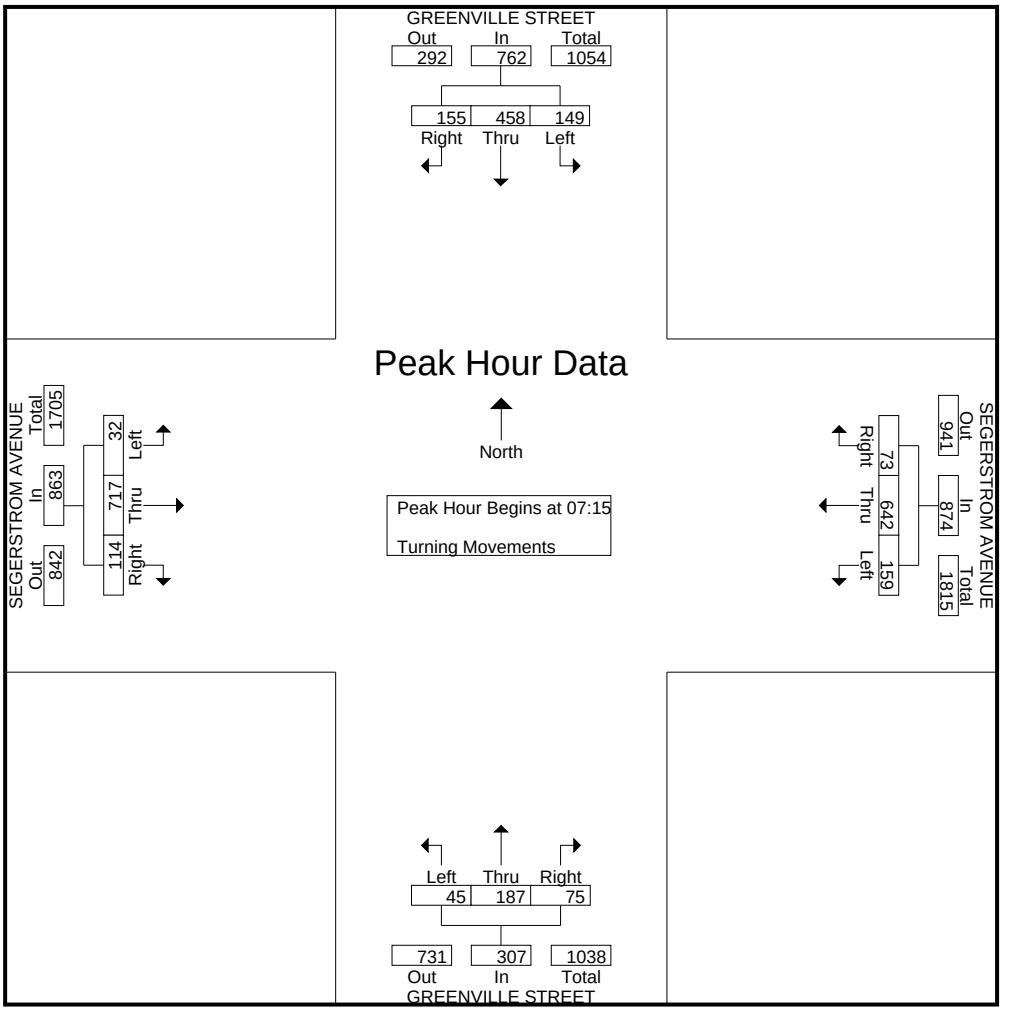


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: GREENVILLE STREET
E-W Direction: SEGERSTROM AVENUE

File Name : H1702004
Site Code : 00000000
Start Date : 2/7/2017
Page No : 3

	GREENVILLE STREET Southbound				SEGERSTROM AVENUE Westbound				GREENVILLE STREET Northbound				SEGERSTROM AVENUE Eastbound				
Start Time	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 16:00 to 17:45 - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 17:00																	
17:00	13	38	13	64	35	223	4	262	7	121	**17**	145	**12**	207	30	249	720
17:15	14	52	14	80	37	**280**	6	**323**	**12**	**128**	15	**155**	10	207	**31**	248	**806**
17:30	15	**58**	15	**88**	**38**	246	6	290	5	105	8	118	11	**213**	28	**252**	748
17:45	**17**	46	**17**	80	33	257	**10**	300	10	108	15	133	12	171	15	198	711
Total Volume	59	194	59	312	143	1006	26	1175	34	462	55	551	45	798	104	947	2985
% App. Total	18.9	62.2	18.9		12.2	85.6	2.2		6.2	83.8	10		4.8	84.3	11		
PHF	.868	.836	.868	.886	.941	.898	.650	.909	.708	.902	.809	.889	.938	.937	.839	.939	.926

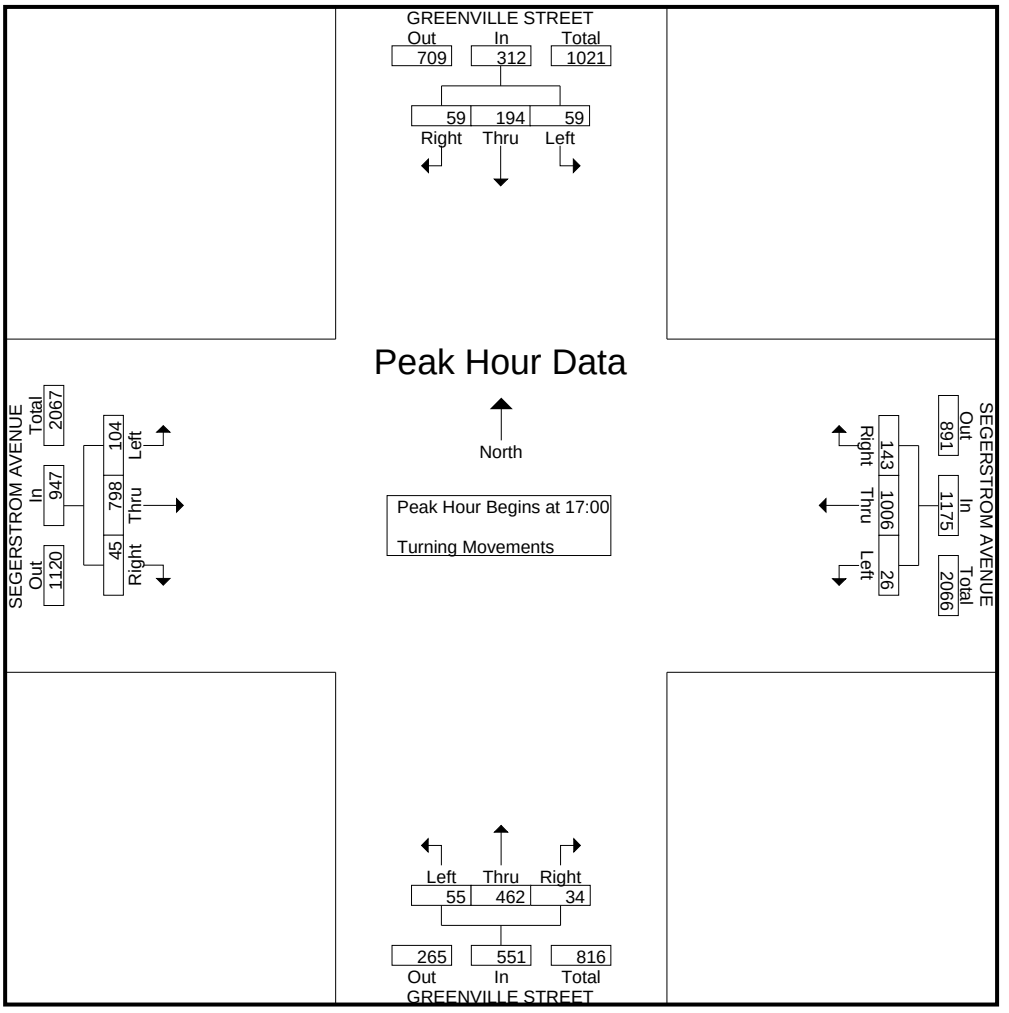

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Feb 9, 16

LOCATION: Santa Ana
NORTH & SOUTH: Raitt
EAST & WEST: McFadden


PROJECT #: SC0846
LOCATION #: 34
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Raitt			SOUTHBOUND Raitt			EASTBOUND McFadden			WESTBOUND McFadden				U-TURNS				
	LANES:	NL 1	NT 2	NR 0	SL 1	ST 2	SR 0	EL 1	ET 2	ER 0	WL 1	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	6	75	22	9	149	13	12	142	21	24	87	10	570	0	0	0	0	0
	7:15 AM	8	109	20	20	231	25	24	130	25	39	124	18	773	0	0	0	0	0
	7:30 AM	8	153	21	27	213	25	24	175	22	54	155	26	903	0	0	0	0	0
	7:45 AM	20	137	18	28	183	27	23	190	25	47	133	22	853	0	0	0	0	0
	8:00 AM	23	148	27	21	105	22	40	181	14	25	108	27	741	0	0	0	0	0
	8:15 AM	9	88	15	20	95	14	24	137	18	13	105	10	548	0	0	0	0	0
	8:30 AM	11	62	16	10	82	14	18	132	11	10	120	14	500	0	0	0	0	0
	8:45 AM	7	63	13	11	58	15	16	123	2	12	109	13	442	0	0	0	0	0
	VOLUMES	92	835	152	146	1,116	155	181	1,210	138	224	941	140	5,330	0	0	0	0	0
	APPROACH %	9%	77%	14%	10%	79%	11%	12%	79%	9%	17%	72%	11%						
	APP/DEPART	1,079	/	1,156	1,417	/	1,478	1,529	/	1,508	1,305	/	1,188	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	59	547	86	96	732	99	111	676	86	165	520	93	3,270					
	APPROACH %	9%	79%	12%	10%	79%	11%	13%	77%	10%	21%	67%	12%						
	PEAK HR FACTOR		0.874			0.840			0.917			0.828		0.905					
	APP/DEPART	692	/	751	927	/	983	873	/	858	778	/	678	0					
PM	4:00 PM	12	184	34	11	91	12	23	157	8	18	114	17	681	0	0	0	0	0
	4:15 PM	13	171	32	8	93	17	15	160	6	31	174	21	741	0	0	0	0	0
	4:30 PM	16	191	29	11	92	17	28	151	11	21	158	22	747	0	0	0	0	0
	4:45 PM	12	198	17	11	109	13	19	160	11	19	184	25	778	0	0	0	0	0
	5:00 PM	18	181	39	10	98	12	24	180	14	24	158	29	787	0	0	0	0	0
	5:15 PM	11	209	31	9	114	21	30	172	10	12	193	29	841	0	0	0	0	0
	5:30 PM	17	210	30	11	121	18	37	190	18	21	166	22	861	0	0	0	0	0
	5:45 PM	9	202	24	13	122	22	30	175	20	27	196	18	858	0	0	0	0	0
	VOLUMES	108	1,546	236	84	840	132	206	1,345	98	173	1,343	183	6,294	0	0	0	0	0
	APPROACH %	6%	82%	12%	8%	80%	13%	12%	82%	6%	10%	79%	11%						
	APP/DEPART	1,890	/	1,935	1,056	/	1,111	1,649	/	1,665	1,699	/	1,583	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	55	802	124	43	455	73	121	717	62	84	713	98	3,347					
	APPROACH %	6%	82%	13%	8%	80%	13%	13%	80%	7%	9%	80%	11%						
	PEAK HR FACTOR		0.954			0.909			0.918			0.928		0.972					
	APP/DEPART	981	/	1,021	571	/	601	900	/	884	895	/	841	0					

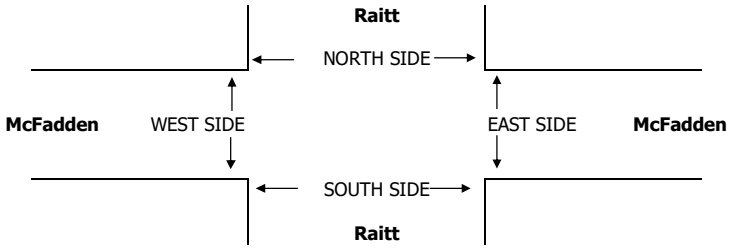

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	19	8	1	16	44	17	6	1	14	38	2	2	0	2	6
	7:15 AM	12	8	6	24	50	9	6	3	22	40	3	2	3	2	10
	7:30 AM	23	30	12	36	101	23	28	10	35	96	0	2	2	1	5
	7:45 AM	62	19	13	44	138	60	18	11	42	131	2	1	2	2	7
	8:00 AM	16	15	5	27	63	13	12	1	25	51	3	3	4	2	12
	8:15 AM	6	19	2	12	39	4	18	1	12	35	2	1	1	0	4
	8:30 AM	11	14	0	10	35	10	12	0	10	32	1	2	0	0	3
	8:45 AM	5	8	4	3	20	4	7	4	3	18	1	1	0	0	2
	TOTAL	154	121	43	172	490	140	107	31	163	441	14	14	12	9	49
PM	4:00 PM	13	14	7	17	51	11	13	5	17	46	2	1	2	0	5
	4:15 PM	9	17	4	14	44	6	11	3	12	32	3	6	1	2	12
	4:30 PM	12	5	7	6	30	9	2	7	6	24	3	3	0	0	6
	4:45 PM	7	11	4	12	34	5	7	2	12	26	2	4	2	0	8
	5:00 PM	7	9	3	15	34	3	7	2	15	27	4	2	1	0	7
	5:15 PM	13	16	14	15	58	12	15	13	15	55	1	1	1	0	3
	5:30 PM	6	12	1	20	39	5	7	0	19	31	1	5	1	1	8
	5:45 PM	12	17	5	13	47	7	14	5	12	38	5	3	0	1	9
	TOTAL	79	101	45	112	337	58	76	37	108	279	21	25	8	4	58

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Feb 9, 16

LOCATION: Santa Ana
NORTH & SOUTH: Raitt
EAST & WEST: Edinger


PROJECT #: SC0846
LOCATION #: 40
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Raitt			SOUTHBOUND Raitt			EASTBOUND Edinger			WESTBOUND Edinger				U-TURNS				
	LANES:	NL 1	NT 2	NR 0	SL 1	ST 2	SR 0	EL 1	ET 2	ER 0	WL 1	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	20	71	19	25	121	29	22	198	28	22	198	7	760	0	0	0	0	0
	7:15 AM	33	93	33	25	173	32	45	240	42	24	250	13	1,003	0	0	0	0	0
	7:30 AM	55	125	42	48	193	14	38	222	37	36	223	11	1,044	0	0	0	0	0
	7:45 AM	45	123	45	36	178	15	41	254	24	32	215	11	1,019	0	0	0	0	0
	8:00 AM	47	140	53	37	144	20	34	252	36	20	192	16	991	0	0	0	0	0
	8:15 AM	28	82	28	32	71	15	11	249	33	14	160	16	739	0	0	0	0	0
	8:30 AM	10	56	22	35	57	8	8	205	9	17	171	11	609	0	0	0	0	0
	8:45 AM	19	44	19	24	61	11	13	205	8	15	151	11	581	0	0	0	0	0
	VOLUMES	257	734	261	262	998	144	212	1,825	217	180	1,560	96	6,746	0	0	0	0	0
	APPROACH %	21%	59%	21%	19%	71%	10%	9%	81%	10%	10%	85%	5%						
	APP/DEPART	1,252	/	1,042	1,404	/	1,395	2,254	/	2,348	1,836	/	1,961	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	180	481	173	146	688	81	158	968	139	112	880	51	4,057					
	APPROACH %	22%	58%	21%	16%	75%	9%	12%	77%	11%	11%	84%	5%						
	PEAK HR FACTOR		0.869			0.897			0.967			0.909		0.972					
	APP/DEPART	834	/	690	915	/	939	1,265	/	1,287	1,043	/	1,141	0					
PM	4:00 PM	32	190	58	16	71	20	24	244	25	14	245	19	958	0	0	0	0	0
	4:15 PM	35	173	61	22	81	21	30	210	30	16	240	28	947	0	0	0	0	0
	4:30 PM	51	169	32	32	64	26	29	222	18	23	231	28	925	0	0	0	0	0
	4:45 PM	50	203	56	24	93	26	34	214	28	17	235	26	1,006	0	0	0	0	0
	5:00 PM	50	198	47	29	76	18	31	227	34	19	257	16	1,002	0	0	0	0	0
	5:15 PM	37	193	63	32	90	25	34	216	31	20	244	20	1,005	0	0	0	0	0
	5:30 PM	36	193	55	17	107	21	30	255	26	21	238	27	1,026	0	0	0	0	0
	5:45 PM	59	200	55	28	96	28	38	225	40	22	195	20	1,006	0	0	0	0	0
	VOLUMES	350	1,519	427	200	678	185	250	1,813	232	152	1,885	184	7,875	0	0	0	0	0
	APPROACH %	15%	66%	19%	19%	64%	17%	11%	79%	10%	7%	85%	8%						
	APP/DEPART	2,296	/	1,953	1,063	/	1,062	2,295	/	2,440	2,221	/	2,420	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	182	784	220	106	369	92	133	923	131	82	934	83	4,039					
	APPROACH %	15%	66%	19%	19%	65%	16%	11%	78%	11%	7%	85%	8%						
	PEAK HR FACTOR		0.944			0.933			0.954			0.941		0.984					
	APP/DEPART	1,186	/	1,000	567	/	582	1,187	/	1,249	1,099	/	1,208	0					

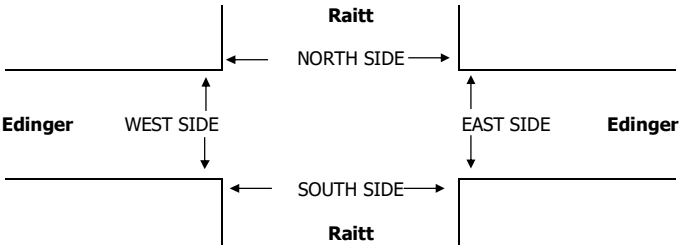

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	12	32	8	17	69	10	26	6	16	58	2	6	2	1	11
	7:15 AM	48	33	7	27	115	46	27	7	26	106	2	6	0	1	9
	7:30 AM	86	52	24	78	240	81	47	24	75	227	5	5	0	3	13
	7:45 AM	91	65	41	70	267	87	60	39	68	254	4	5	2	2	13
	8:00 AM	51	57	29	55	192	48	53	28	52	181	3	4	1	3	11
	8:15 AM	11	29	8	15	63	10	28	7	15	60	1	1	1	0	3
	8:30 AM	7	4	2	2	15	6	2	2	2	12	1	2	0	0	3
	8:45 AM	8	3	2	5	18	8	2	2	5	17	0	1	0	0	1
	TOTAL	314	275	121	269	979	296	245	115	259	915	18	30	6	10	64
PM	4:00 PM	27	27	14	16	84	19	23	13	13	68	8	4	1	3	16
	4:15 PM	12	13	7	3	35	7	11	5	3	26	5	2	2	0	9
	4:30 PM	17	22	5	11	55	7	14	4	6	31	10	8	1	5	24
	4:45 PM	27	31	22	22	102	20	29	19	18	86	7	2	3	4	16
	5:00 PM	11	24	9	21	65	10	17	9	20	56	1	7	0	1	9
	5:15 PM	21	25	8	17	71	15	18	4	15	52	6	7	4	2	19
	5:30 PM	25	16	12	12	65	21	9	7	12	49	4	7	5	0	16
	5:45 PM	7	12	3	11	33	6	3	3	6	18	1	9	0	5	15
	TOTAL	147	170	80	113	510	105	124	64	93	386	42	46	16	20	124

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: BEAR STREET
E-W Direction: MACARTHUR BOULEVARD

File Name : H1702005
Site Code : 00000000
Start Date : 2/7/2017

Groups Printed- Turning Movements

	BEAR STREET Southbound			MACARTHUR BOULEVARD Westbound			BEAR STREET Northbound			MACARTHUR BOULEVARD Eastbound			
Start Time	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	Int. Total
07:00	22	100	28	11	160	5	26	63	9	17	271	9	721
07:15	56	154	42	19	294	16	27	66	21	23	382	11	1111
07:30	77	198	53	30	380	13	25	49	24	26	434	19	1328
07:45	111	199	45	31	342	17	30	72	20	36	392	34	1329
Total	266	651	168	91	1176	51	108	250	74	102	1479	73	4489
08:00	47	182	53	17	129	21	33	84	13	25	406	30	1040
08:15	26	155	43	13	136	14	36	85	5	27	346	14	900
08:30	18	127	37	6	109	11	36	69	10	53	386	7	869
08:45	19	95	23	14	110	16	34	46	10	30	276	10	683
Total	110	559	156	50	484	62	139	284	38	135	1414	61	3492
*** BREAK ***													
16:00	16	43	18	53	395	17	67	196	39	25	210	14	1093
16:15	13	74	19	66	388	16	59	210	59	18	214	16	1152
16:30	14	60	27	62	417	25	62	214	46	24	223	15	1189
16:45	17	62	24	65	396	25	59	227	51	20	213	21	1180
Total	60	239	88	246	1596	83	247	847	195	87	860	66	4614
17:00	17	63	25	69	386	18	58	242	46	20	240	29	1213
17:15	21	75	36	66	399	20	68	244	56	20	206	18	1229
17:30	24	63	23	58	442	27	58	220	41	31	224	26	1237
17:45	32	66	28	59	416	29	56	204	48	18	198	22	1176
Total	94	267	112	252	1643	94	240	910	191	89	868	95	4855
Grand Total	530	1716	524	639	4899	290	734	2291	498	413	4621	295	17450
Apprch %	19.1	61.9	18.9	11	84.1	5	20.8	65	14.1	7.8	86.7	5.5	
Total %	3	9.8	3	3.7	28.1	1.7	4.2	13.1	2.9	2.4	26.5	1.7	


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: BEAR STREET
E-W Direction: MACARTHUR BOULEVARD

File Name : H1702005
Site Code : 00000000
Start Date : 2/7/2017
Page No : 2

	BEAR STREET Southbound				MACARTHUR BOULEVARD Westbound				BEAR STREET Northbound				MACARTHUR BOULEVARD Eastbound				
Start Time	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 07:00 to 08:45 - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:15																	
07:15	56	154	42	252	19	294	16	329	27	66	21	114	23	382	11	416	1111
07:30	77	198	**53**	328	30	**380**	13	**423**	25	49	**24**	98	26	**434**	19	**479**	1328
07:45	**111**	**199**	45	**355**	**31**	342	17	390	30	72	20	122	**36**	392	**34**	462	**1329**
08:00	47	182	53	282	17	129	**21**	167	**33**	**84**	13	**130**	25	406	30	461	1040
Total Volume	291	733	193	1217	97	1145	67	1309	115	271	78	464	110	1614	94	1818	4808
% App. Total	23.9	60.2	15.9		7.4	87.5	5.1		24.8	58.4	16.8		6.1	88.8	5.2		
PHF	.655	.921	.910	.857	.782	.753	.798	.774	.871	.807	.813	.892	.764	.930	.691	.949	.904

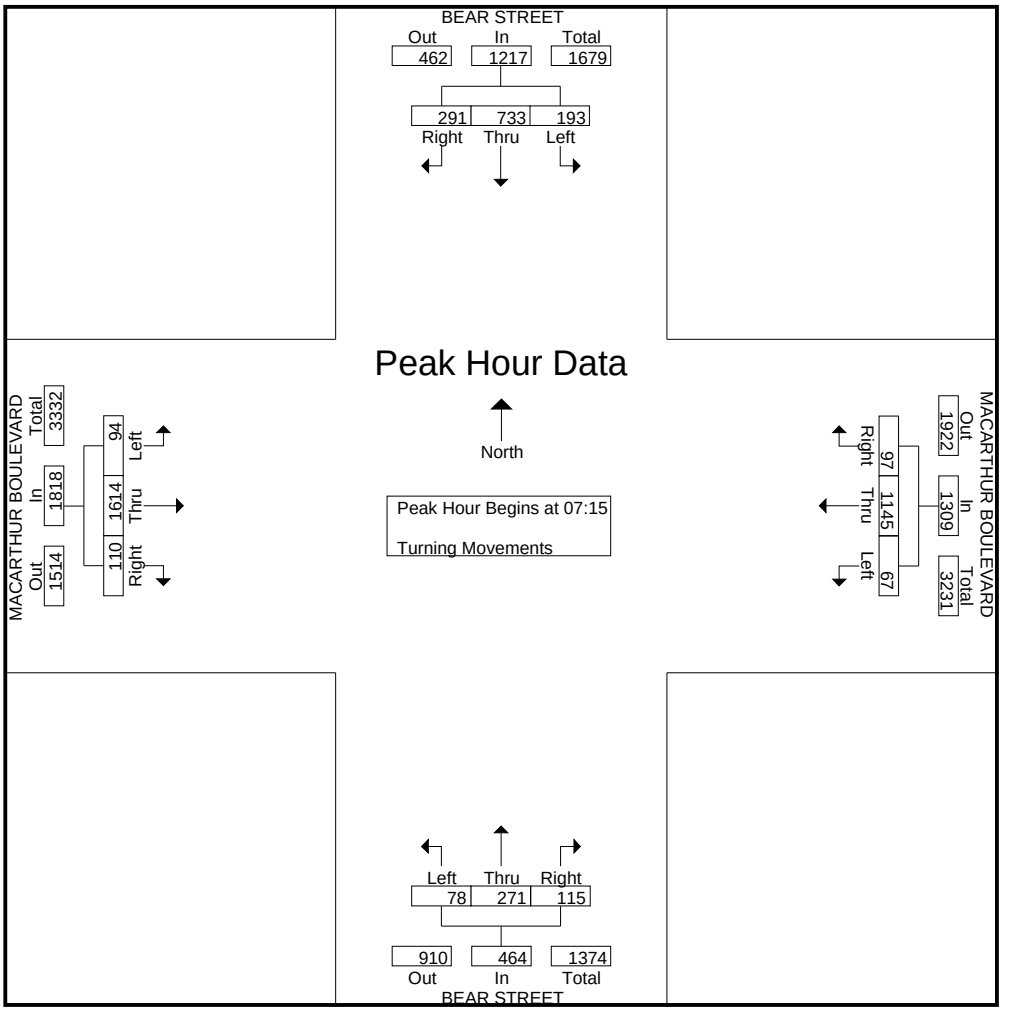


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: BEAR STREET
E-W Direction: MACARTHUR BOULEVARD

File Name : H1702005
Site Code : 00000000
Start Date : 2/7/2017
Page No : 3

	BEAR STREET Southbound				MACARTHUR BOULEVARD Westbound				BEAR STREET Northbound				MACARTHUR BOULEVARD Eastbound				
Start Time	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 16:00 to 17:45 - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 16:45																	
16:45	17	62	24	103	65	396	25	486	59	227	51	337	20	213	21	254	1180
17:00	17	63	25	105	**69**	386	18	473	58	242	46	346	20	**240**	**29**	**289**	1213
17:15	21	**75**	**36**	**132**	66	399	20	485	**68**	**244**	**56**	**368**	20	206	18	244	1229
17:30	**24**	63	23	110	58	**442**	**27**	**527**	58	220	41	319	**31**	224	26	281	**1237**
Total Volume	79	263	108	450	258	1623	90	1971	243	933	194	1370	91	883	94	1068	4859
% App. Total	17.6	58.4	24		13.1	82.3	4.6		17.7	68.1	14.2		8.5	82.7	8.8		
PHF	.823	.877	.750	.852	.935	.918	.833	.935	.893	.956	.866	.931	.734	.920	.810	.924	.982

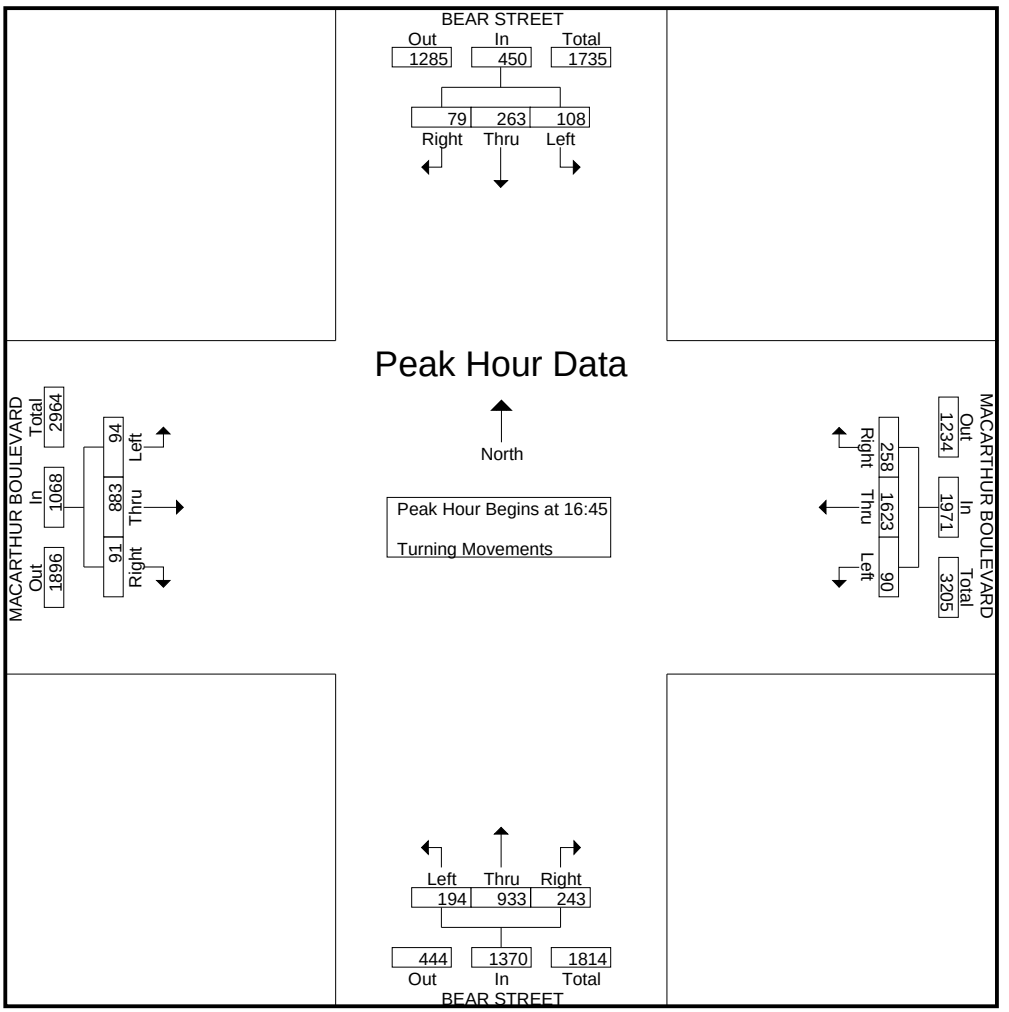

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 14, 19

LOCATION: Santa Ana
NORTH & SOUTH: Bristol
EAST & WEST: 17th


PROJECT #: SC2183
LOCATION #: 12
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Bristol			SOUTHBOUND Bristol			EASTBOUND 17th			WESTBOUND 17th				U-TURNS				
	LANES:	NL 2	NT 3	NR 1	SL 2	ST 2	SR 1	EL 2	ET 3	ER 0	WL 2	WT 3	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	23	254	42	59	328	28	47	230	34	46	116	51	1,258	4	0	0	2	6
	7:15 AM	32	285	28	83	324	26	67	258	35	48	141	69	1,396	3	0	0	3	6
	7:30 AM	45	270	41	102	342	21	78	281	38	76	202	92	1,588	3	0	0	8	11
	7:45 AM	59	234	49	94	311	40	86	250	33	87	225	73	1,541	2	1	1	8	12
	8:00 AM	39	248	39	83	368	46	71	183	42	91	184	51	1,445	4	0	0	11	15
	8:15 AM	47	226	36	52	341	72	85	239	41	101	204	54	1,498	7	0	1	2	10
	8:30 AM	39	256	43	53	361	61	63	203	26	51	129	22	1,307	5	0	0	5	10
	8:45 AM	37	246	38	65	280	63	55	174	37	51	93	31	1,170	5	1	1	6	13
	VOLUMES	321	2,019	316	591	2,655	357	552	1,818	286	551	1,294	443	11,203	33	2	3	45	83
	APPROACH %	12%	76%	12%	16%	74%	10%	21%	68%	11%	24%	57%	19%						
	APP/DEPART	2,656	/	3,013	3,603	/	3,480	2,656	/	2,768	2,288	/	1,942	0					
	BEGIN PEAK HR		7:30 AM																
	VOLUMES	190	978	165	331	1,362	179	320	953	154	355	815	270	6,072					
	APPROACH %	14%	73%	12%	18%	73%	10%	22%	67%	11%	25%	57%	19%						
	PEAK HR FACTOR		0.936			0.942			0.899			0.935		0.956					
	APP/DEPART	1,333	/	1,567	1,872	/	1,858	1,427	/	1,477	1,440	/	1,170	0					
PM	4:00 PM	43	282	37	68	272	60	85	168	25	48	260	76	1,424	2	2	2	7	13
	4:15 PM	45	282	37	66	295	50	61	178	33	63	234	67	1,411	4	1	0	12	17
	4:30 PM	40	277	26	53	286	48	69	193	34	55	308	71	1,460	2	1	0	7	10
	4:45 PM	36	281	40	68	308	45	74	177	28	70	255	87	1,469	3	0	2	6	11
	5:00 PM	61	284	58	50	311	56	85	192	40	57	286	107	1,587	5	0	1	7	13
	5:15 PM	53	264	41	62	317	54	97	223	30	71	247	81	1,540	2	0	2	8	12
	5:30 PM	55	304	42	75	322	57	71	163	37	77	265	93	1,561	2	0	1	8	11
	5:45 PM	64	284	48	53	330	50	79	164	27	76	260	77	1,512	8	0	0	11	19
	VOLUMES	397	2,258	329	495	2,441	420	621	1,458	254	517	2,115	659	11,964	28	4	8	66	106
	APPROACH %	13%	76%	11%	15%	73%	13%	27%	62%	11%	16%	64%	20%						
	APP/DEPART	2,984	/	3,534	3,356	/	3,174	2,333	/	2,344	3,291	/	2,912	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	233	1,136	189	240	1,280	217	332	742	134	281	1,058	358	6,200					
	APPROACH %	15%	73%	12%	14%	74%	12%	27%	61%	11%	17%	62%	21%						
	PEAK HR FACTOR		0.967			0.956			0.863			0.943		0.977					
	APP/DEPART	1,558	/	1,822	1,737	/	1,678	1,208	/	1,205	1,697	/	1,495	0					

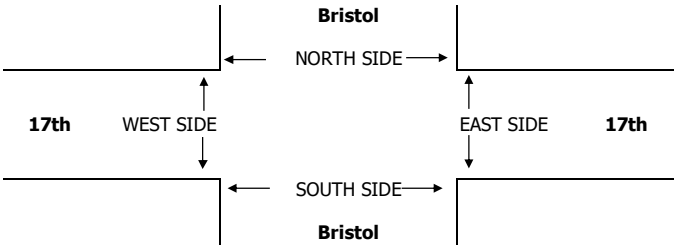

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:30 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	5:00 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Wed, Feb 10, 16

LOCATION: Santa Ana
NORTH & SOUTH: Bristol
EAST & WEST: Civic Center


PROJECT #: SC0846
LOCATION #: 13
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Bristol			SOUTHBOUND Bristol			EASTBOUND Civic Center			WESTBOUND Civic Center				U-TURNS				
	LANES:	NL 1	NT 3	NR 0	SL 1	ST 3	SR 0	EL 1	ET 2	ER 0	WL 1	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	15	257	12	66	336	19	35	100	24	26	44	8	942	2	1	0	0	3
	7:15 AM	31	265	11	104	263	15	44	153	27	22	61	6	1,002	2	0	0	0	2
	7:30 AM	28	256	15	83	297	22	49	195	28	25	77	14	1,089	1	1	0	0	2
	7:45 AM	39	306	21	87	291	16	37	217	18	21	103	17	1,173	0	4	0	0	4
	8:00 AM	37	240	17	72	288	27	29	182	28	45	136	25	1,126	3	5	0	0	8
	8:15 AM	14	242	39	63	357	11	28	131	15	25	69	23	1,017	0	5	0	6	11
	8:30 AM	18	267	27	70	357	14	24	101	14	15	63	14	984	3	3	0	0	6
	8:45 AM	13	259	19	57	326	17	21	94	20	23	53	13	915	4	2	0	0	6
	VOLUMES	195	2,092	161	602	2,515	141	267	1,173	174	202	606	120	8,248	15	21	0	6	42
	APPROACH %	8%	85%	7%	18%	77%	4%	17%	73%	11%	22%	65%	13%						
	APP/DEPART	2,448	/	2,500	3,258	/	2,900	1,614	/	1,921	928	/	927	0					
	BEGIN PEAK HR		7:30 AM																
	VOLUMES	118	1,044	92	305	1,233	76	143	725	89	116	385	79	4,405					
	APPROACH %	9%	83%	7%	19%	76%	5%	15%	76%	9%	20%	66%	14%						
	PEAK HR FACTOR		0.857			0.936			0.880			0.704		0.939					
	APP/DEPART	1,254	/	1,281	1,614	/	1,436	957	/	1,113	580	/	575	0					
PM	4:00 PM	28	247	15	25	206	20	35	108	16	28	93	32	853	8	7	0	0	15
	4:15 PM	44	335	16	37	311	29	37	101	12	21	86	33	1,062	9	5	0	0	14
	4:30 PM	36	314	26	32	330	28	25	60	13	38	134	31	1,067	5	6	0	0	11
	4:45 PM	41	314	20	30	296	30	56	80	17	41	133	52	1,110	4	3	4	0	11
	5:00 PM	42	341	23	30	280	28	45	92	14	38	178	34	1,145	1	1	0	0	2
	5:15 PM	55	371	21	38	311	30	32	153	13	38	212	17	1,291	6	3	0	0	9
	5:30 PM	43	334	18	33	310	29	44	119	12	37	160	17	1,156	7	7	0	0	14
	5:45 PM	52	298	8	29	300	36	61	149	21	49	144	10	1,157	5	3	0	0	8
	VOLUMES	341	2,554	147	254	2,344	230	335	862	118	290	1,140	226	8,841	45	35	4	0	84
	APPROACH %	11%	84%	5%	9%	83%	8%	25%	66%	9%	18%	69%	14%						
	APP/DEPART	3,042	/	3,146	2,828	/	2,797	1,315	/	1,228	1,656	/	1,670	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	192	1,344	70	130	1,201	123	182	513	60	162	694	78	4,749					
	APPROACH %	12%	84%	4%	9%	83%	8%	24%	68%	8%	17%	74%	8%						
	PEAK HR FACTOR		0.898			0.959			0.817			0.875		0.920					
	APP/DEPART	1,606	/	1,618	1,454	/	1,442	755	/	699	934	/	990	0					

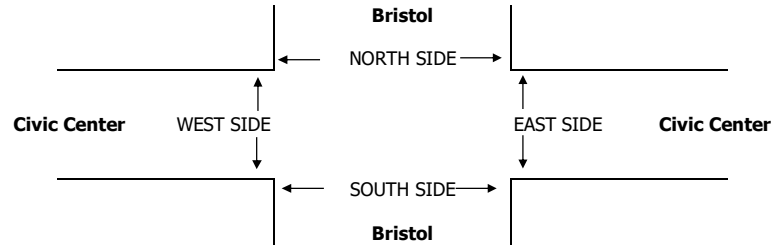

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	2	7	10	5	24	2	7	8	5	22	0	0	2	0	2
	7:15 AM	10	4	8	11	33	8	3	8	7	26	2	1	0	4	7
	7:30 AM	9	12	3	10	34	7	10	3	6	26	2	2	0	4	8
	7:45 AM	10	10	5	12	37	10	9	2	12	33	0	1	3	0	4
	8:00 AM	7	6	2	6	21	5	6	2	5	18	2	0	0	1	3
	8:15 AM	7	9	2	2	20	7	8	0	2	17	0	1	2	0	3
	8:30 AM	1	9	3	5	18	1	6	3	2	12	0	3	0	3	6
	8:45 AM	3	6	2	12	23	2	6	1	10	19	1	0	1	2	4
	TOTAL	49	63	35	63	210	42	55	27	49	173	7	8	8	14	37
PM	4:00 PM	1	6	2	6	15	1	4	1	5	11	0	2	1	1	4
	4:15 PM	1	11	0	5	17	1	8	0	4	13	0	3	0	1	4
	4:30 PM	1	11	1	9	22	0	11	1	6	18	1	0	0	3	4
	4:45 PM	0	11	0	5	16	0	10	0	3	13	0	1	0	2	3
	5:00 PM	1	11	3	9	24	0	7	3	7	17	1	4	0	2	7
	5:15 PM	5	8	2	11	26	4	8	2	9	23	1	0	0	2	3
	5:30 PM	5	11	4	7	27	5	9	4	6	24	0	2	0	1	3
	5:45 PM	7	18	0	7	32	7	17	0	5	29	0	1	0	2	3
	TOTAL	21	87	12	59	179	18	74	11	45	148	3	13	1	14	31

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Feb 9, 16

LOCATION: Santa Ana
NORTH & SOUTH: Bristol
EAST & WEST: Santa Ana


PROJECT #: SC0846
LOCATION #: 21
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Bristol			SOUTHBOUND Bristol			EASTBOUND Santa Ana			WESTBOUND Santa Ana				U-TURNS				
	LANES:	NL 1	NT 3	NR 0	SL 1	ST 3	SR 0	EL 1	ET 2	ER 0	WL 1	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	12	299	16	24	375	3	21	53	17	25	26	9	880	0	0	0	0	0
	7:15 AM	16	341	36	33	399	9	13	72	8	24	54	4	1,009	0	3	0	0	3
	7:30 AM	16	360	52	26	369	7	29	110	9	30	64	13	1,085	0	1	0	0	1
	7:45 AM	23	352	55	39	309	12	19	136	12	21	79	8	1,065	2	6	0	0	8
	8:00 AM	7	310	46	33	371	11	18	69	4	17	33	14	933	0	6	0	0	6
	8:15 AM	12	274	25	36	369	7	9	29	3	20	23	12	819	3	2	0	0	5
	8:30 AM	11	237	21	23	307	8	13	25	7	21	15	12	700	1	3	0	0	4
	8:45 AM	5	292	14	31	345	4	8	26	2	10	18	11	766	0	5	0	0	5
	VOLUMES	102	2,465	265	245	2,844	61	130	520	62	168	312	83	7,257	6	26	0	0	32
	APPROACH %	4%	87%	9%	8%	90%	2%	18%	73%	9%	30%	55%	15%						
	APP/DEPART	2,832	/	2,704	3,150	/	3,080	712	/	1,004	563	/	469	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	62	1,363	189	131	1,448	39	79	387	33	92	230	39	4,092					
	APPROACH %	4%	84%	12%	8%	89%	2%	16%	78%	7%	25%	64%	11%						
	PEAK HR FACTOR		0.938			0.917			0.747			0.836		0.943					
	APP/DEPART	1,614	/	1,497	1,618	/	1,575	499	/	691	361	/	329	0					
PM	4:00 PM	5	338	23	30	351	12	19	30	7	43	59	11	928	0	5	0	0	5
	4:15 PM	6	345	21	25	387	13	9	35	4	31	57	18	951	0	8	0	0	8
	4:30 PM	13	345	26	29	353	18	12	42	7	38	64	23	970	3	3	0	0	6
	4:45 PM	10	361	15	18	352	7	11	34	5	42	76	23	954	1	8	0	0	9
	5:00 PM	19	333	16	20	289	14	9	32	9	64	88	29	922	3	6	0	0	9
	5:15 PM	21	386	19	27	357	14	11	41	6	61	96	27	1,066	2	5	0	0	7
	5:30 PM	13	399	21	22	353	14	15	39	14	50	85	22	1,047	1	5	0	0	6
	5:45 PM	19	346	27	31	348	8	21	44	7	48	87	18	1,004	3	7	0	0	10
	VOLUMES	106	2,853	168	202	2,790	100	107	297	59	377	612	171	7,842	13	47	0	0	60
	APPROACH %	3%	91%	5%	7%	90%	3%	23%	64%	13%	33%	53%	15%						
	APP/DEPART	3,127	/	3,178	3,092	/	3,239	463	/	620	1,160	/	805	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	72	1,464	83	100	1,347	50	56	156	36	223	356	96	4,039					
	APPROACH %	4%	90%	5%	7%	90%	3%	23%	63%	15%	33%	53%	14%						
	PEAK HR FACTOR		0.935			0.940			0.861			0.917		0.947					
	APP/DEPART	1,619	/	1,639	1,497	/	1,615	248	/	316	675	/	469	0					

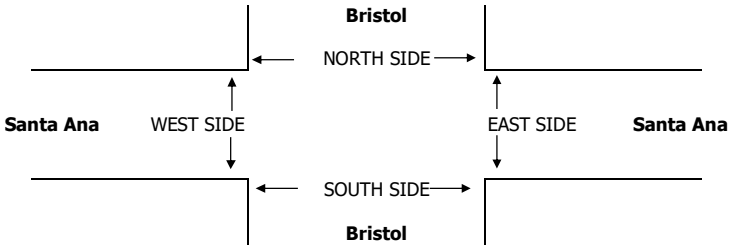

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	13	6	9	9	37	13	4	6	8	31	0	2	3	1	6
	7:15 AM	42	16	13	11	82	40	16	12	7	75	2	0	1	4	7
	7:30 AM	40	26	14	26	106	39	26	12	23	100	1	0	2	3	6
	7:45 AM	43	21	5	17	86	40	20	2	16	78	3	1	3	1	8
	8:00 AM	32	7	10	12	61	31	7	9	10	57	1	0	1	2	4
	8:15 AM	5	3	5	7	20	5	3	4	6	18	0	0	1	1	2
	8:30 AM	16	10	5	6	37	15	5	3	3	26	1	5	2	3	11
	8:45 AM	7	13	8	4	32	5	12	7	2	26	2	1	1	2	6
	TOTAL	198	102	69	92	461	188	93	55	75	411	10	9	14	17	50
PM	4:00 PM	5	10	7	9	31	5	6	4	8	23	0	4	3	1	8
	4:15 PM	8	13	13	10	44	6	11	5	8	30	2	2	8	2	14
	4:30 PM	12	3	6	10	31	10	2	6	9	27	2	1	0	1	4
	4:45 PM	1	3	4	10	18	0	3	4	8	15	1	0	0	2	3
	5:00 PM	6	15	11	10	42	6	10	7	7	30	0	5	4	3	12
	5:15 PM	21	7	18	17	63	20	7	12	16	55	1	0	6	1	8
	5:30 PM	36	18	12	30	96	29	18	9	24	80	7	0	3	6	16
	5:45 PM	26	11	28	11	76	24	11	22	9	66	2	0	6	2	10
	TOTAL	115	80	99	107	401	100	68	69	89	326	15	12	30	18	75

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com


DATE:	LOCATION:	Santa Ana	PROJECT #:	SC2183
Tue, May 14, 19	NORTH & SOUTH:	Bristol	LOCATION #:	13
	EAST & WEST:	1st	CONTROL:	SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Bristol			SOUTHBOUND Bristol			EASTBOUND 1st			WESTBOUND 1st				U-TURNS				
	LANES:	NL 2	NT 3	NR 1	SL 2	ST 3	SR 1	EL 1	ET 3	ER 0	WL 1	WT 3	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	36	259	34	58	271	47	43	290	22	28	124	17	1,229	2	2	0	0	4
	7:15 AM	39	329	43	65	316	34	36	318	32	23	145	23	1,403	2	1	0	1	4
	7:30 AM	46	328	36	88	284	51	53	332	28	30	204	28	1,508	3	3	0	0	6
	7:45 AM	57	346	48	74	259	37	62	314	30	25	258	36	1,546	2	2	0	0	4
	8:00 AM	39	262	33	45	262	36	52	291	36	28	197	30	1,311	2	3	0	0	5
	8:15 AM	35	266	40	56	275	32	44	293	29	29	179	23	1,301	1	3	0	0	4
	8:30 AM	23	240	58	63	248	34	55	299	24	22	143	41	1,250	3	0	0	0	3
	8:45 AM	24	202	37	57	229	31	36	285	26	17	137	24	1,105	1	0	0	0	1
	VOLUMES	299	2,232	329	506	2,144	302	381	2,422	227	202	1,387	222	10,653	16	14	0	1	31
	APPROACH %	10%	78%	12%	17%	73%	10%	13%	80%	7%	11%	77%	12%						
	APP/DEPART	2,860	/	2,849	2,952	/	2,588	3,030	/	3,244	1,811	/	1,972	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	181	1,265	160	272	1,121	158	203	1,255	126	106	804	117	5,768					
	APPROACH %	11%	79%	10%	18%	72%	10%	13%	79%	8%	10%	78%	11%						
	PEAK HR FACTOR		0.890			0.917			0.959			0.805		0.933					
	APP/DEPART	1,606	/	1,594	1,551	/	1,361	1,584	/	1,679	1,027	/	1,134	0					
PM	4:00 PM	72	301	45	37	155	34	49	244	38	47	256	28	1,306	5	3	0	2	10
	4:15 PM	66	288	50	39	176	39	43	279	36	41	293	38	1,388	5	3	0	1	9
	4:30 PM	63	284	54	51	260	54	58	283	39	58	328	27	1,559	4	5	1	2	12
	4:45 PM	70	290	40	64	266	72	42	255	42	45	339	25	1,550	7	3	1	1	12
	5:00 PM	87	338	47	42	275	59	46	231	32	50	304	33	1,544	10	1	0	2	13
	5:15 PM	63	310	39	46	302	64	41	282	21	61	345	39	1,613	4	3	0	0	7
	5:30 PM	66	317	46	50	279	59	57	261	20	47	307	34	1,543	2	1	1	3	7
	5:45 PM	63	335	53	54	246	63	48	253	33	39	287	30	1,504	3	1	0	2	6
	VOLUMES	550	2,463	374	383	1,959	444	384	2,088	261	388	2,459	254	12,007	40	20	3	13	76
	APPROACH %	16%	73%	11%	14%	70%	16%	14%	76%	10%	13%	79%	8%						
	APP/DEPART	3,387	/	3,118	2,786	/	2,635	2,733	/	2,838	3,101	/	3,416	0					
	BEGIN PEAK HR		4:30 PM																
	VOLUMES	283	1,222	180	203	1,103	249	187	1,051	134	214	1,316	124	6,266					
	APPROACH %	17%	73%	11%	13%	71%	16%	14%	77%	10%	13%	80%	7%						
	PEAK HR FACTOR		0.892			0.944			0.903			0.929		0.971					
	APP/DEPART	1,685	/	1,543	1,555	/	1,471	1,372	/	1,427	1,654	/	1,825	0					

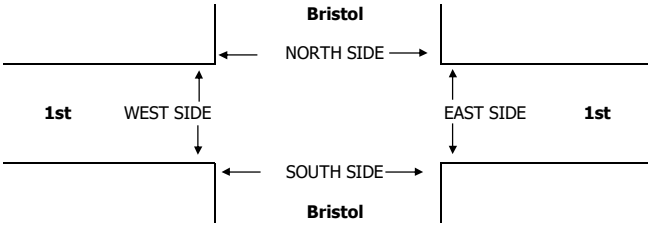

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:15 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:30 PM					0	0	0	0	0					

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: BRISTOL STREET
E-W Direction: MCFADDEN AVENUE

File Name : H1702008
Site Code : 00000000
Start Date : 2/7/2017
Page No : 1

Groups Printed- Turning Movements

	BRISTOL STREET Southbound				MCFADDEN AVENUE Westbound			BRISTOL STREET Northbound				MCFADDEN AVENUE Eastbound			
Start Time	Right	Thru	Left	U-Turn	Right	Thru	Left	Right	Thru	Left	U-Turn	Right	Thru	Left	Int. Total
07:00	41	347	20	6	18	80	43	9	170	18	0	53	94	41	940
07:15	49	378	27	6	12	103	43	11	246	26	1	53	119	72	1146
07:30	28	388	30	8	9	110	34	18	264	35	0	53	115	80	1172
07:45	52	391	34	11	12	111	33	12	255	35	2	62	110	46	1166
Total	170	1504	111	31	51	404	153	50	935	114	3	221	438	239	4424
08:00	28	367	27	13	15	95	40	10	258	18	0	57	114	68	1110
08:15	25	350	28	5	14	66	23	14	174	19	2	33	76	48	877
08:30	24	323	16	6	10	74	24	10	218	19	0	32	81	47	884
08:45	25	320	23	7	11	54	26	11	193	24	1	22	78	47	842
Total	102	1360	94	31	50	289	113	45	843	80	3	144	349	210	3713
*** BREAK ***															
16:00	47	257	17	15	26	100	34	18	382	48	5	23	111	67	1150
16:15	61	258	27	6	22	102	31	17	368	41	2	24	98	71	1128
16:30	64	246	23	14	14	118	40	24	363	49	5	25	114	68	1167
16:45	62	268	21	14	19	116	32	19	384	46	3	30	122	57	1193
Total	234	1029	88	49	81	436	137	78	1497	184	15	102	445	263	4638
17:00	66	296	19	16	15	127	19	15	376	57	4	23	118	67	1218
17:15	65	298	25	8	12	122	22	30	382	43	2	23	136	63	1231
17:30	69	274	16	8	11	124	21	18	377	60	3	23	120	67	1191
17:45	56	286	19	16	11	121	28	22	320	64	1	28	113	71	1156
Total	256	1154	79	48	49	494	90	85	1455	224	10	97	487	268	4796
Grand Total	762	5047	372	159	231	1623	493	258	4730	602	31	564	1719	980	17571
Apprch %	12	79.6	5.9	2.5	9.8	69.2	21	4.6	84.1	10.7	0.6	17.3	52.7	30	
Total %	4.3	28.7	2.1	0.9	1.3	9.2	2.8	1.5	26.9	3.4	0.2	3.2	9.8	5.6	


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: BRISTOL STREET
E-W Direction: MCFADDEN AVENUE

File Name : H1702008
Site Code : 00000000
Start Date : 2/7/2017
Page No : 2

	BRISTOL STREET Southbound					MCFADDEN AVENUE Westbound				BRISTOL STREET Northbound					MCFADDEN AVENUE Eastbound				
Start Time	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 07:00 to 08:45 - Peak 1 of 1																			
Peak Hour for Entire Intersection Begins at 07:15																			
07:15	49	378	27	6	460	12	103	43	158	11	246	26	1	284	53	119			
07:30	28	388	30	8	454	9	110	34	153	18	**264**	**35**	0	**317**	53	115	**80**	**248**	**1172**
07:45	**52**	**391**	**34**	11	**488**	12	**111**	33	156	12	255	35	**2**	304	**62**	110	46	218	1166
08:00	28	367	27	**13**	435	**15**													
Total Volume	157	1524	118	38	1837	48	419	150	617	51	1023	114	3	1191	225	458	266	949	4594
% App. Total	8.5	83	6.4	2.1		7.8	67.9	24.3		4.3	85.9	9.6	0.3		23.7	48.3	28		
PHF	.755	.974	.868	.731	.941	.800	.944	.872	.976	.708	.969	.814	.375	.939	.907	.962	.831	.957	.980

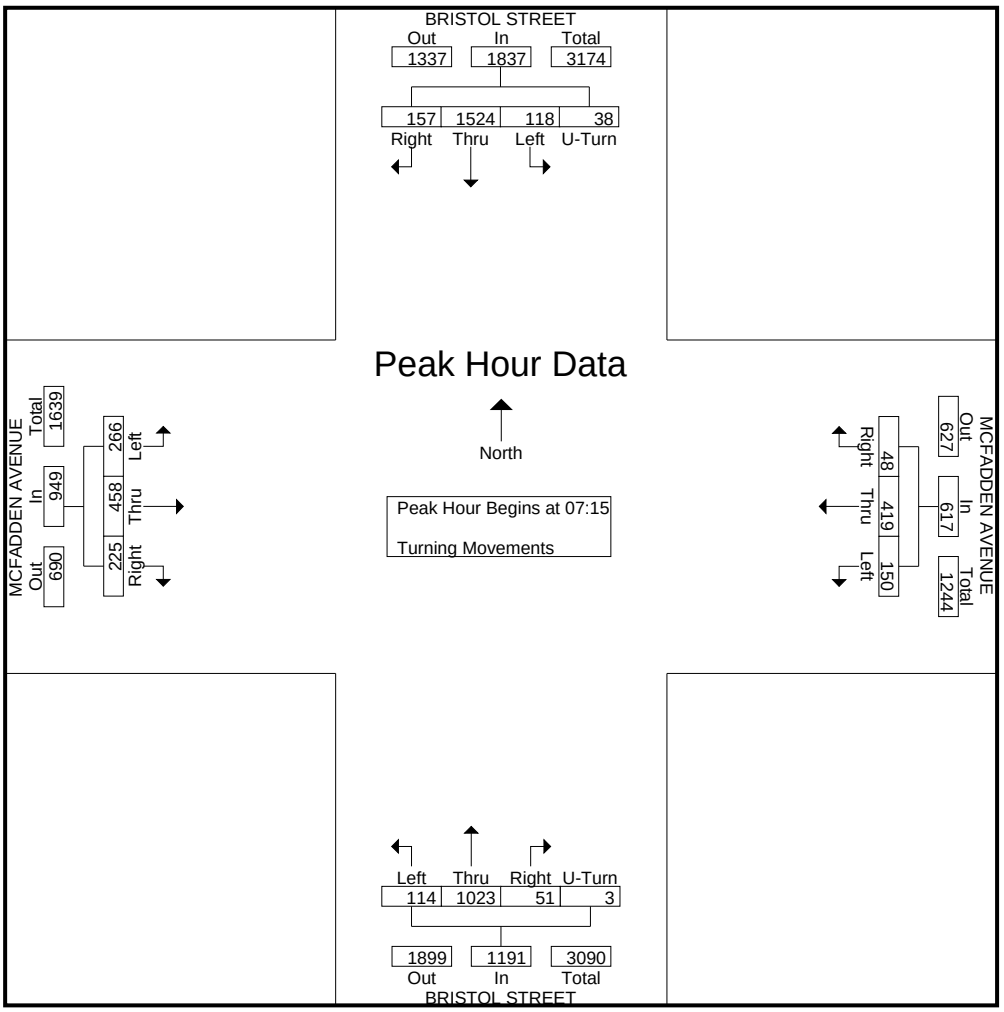


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: BRISTOL STREET
E-W Direction: MCFADDEN AVENUE

File Name : H1702008
Site Code : 00000000
Start Date : 2/7/2017
Page No : 3

	BRISTOL STREET Southbound					MCFADDEN AVENUE Westbound				BRISTOL STREET Northbound					MCFADDEN AVENUE Eastbound				
Start Time	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 16:00 to 17:45 - Peak 1 of 1																			
Peak Hour for Entire Intersection Begins at 16:45																			
16:45	62	268	21	14	365	19	116	32	167	19	384				**30**				
17:00	66	296	19	**16**	**397**	15	**127**	19	161	15	376	57	**4**	452	23	118	**67**	208	1218
17:15	65	**298**	**25**	8	396	12	122	22	156	**30**	382	43	2	457	23	**136**	63	**222**	**1231**
17:30	**69**	274	16	8	367	11	124	21	156	18	377	**60**	3	**458**	23	120	67	210	1191
Total Volume	262	1136	81	46	1525	57	489	94	640	82	1519	206	12	1819	99	496	254	849	4833
% App. Total	17.2	74.5	5.3	3		8.9	76.4	14.7		4.5	83.5	11.3	0.7		11.7	58.4	29.9		
PHF	.949	.953	.810	.719	.960	.750	.963	.734	.958	.683	.989	.858	.750	.993	.825	.912	.948	.956	.982

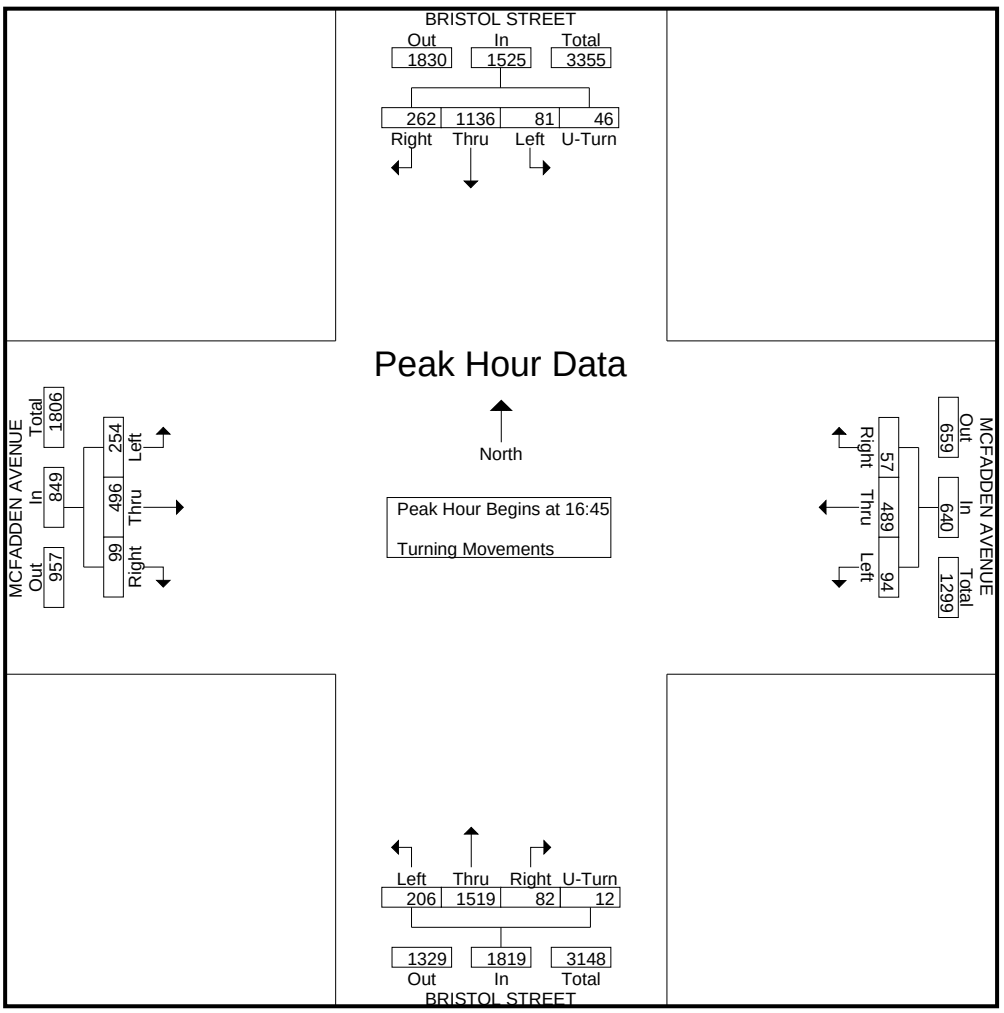

T218

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Thu, May 16, 19

LOCATION: Santa Ana
NORTH & SOUTH: Bristol
EAST & WEST: Warner


PROJECT #: SC2183
LOCATION #: 15
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND (Bristol)			SOUTHBOUND (Bristol)			EASTBOUND (Warner)			WESTBOUND (Warner)				U-TURNS				
	LANES:	NL 2	NT 2	NR 1	SL 2	ST 3	SR 0	EL 1	ET 3	ER 1	WL 1	WT 3	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	40	125	29	104	291	34	30	297	55	36	143	25	1,209	0	2	0	0	2
	7:15 AM	43	163	24	110	327	37	48	304	71	35	199	25	1,386	2	0	0	1	3
	7:30 AM	49	182	42	79	336	33	52	292	64	54	230	35	1,448	1	1	0	1	3
	7:45 AM	53	250	34	90	316	36	50	266	72	49	243	37	1,496	0	1	0	1	2
	8:00 AM	45	258	57	103	315	40	53	275	76	48	179	47	1,496	0	1	0	0	1
	8:15 AM	36	272	81	84	324	40	53	217	72	35	126	41	1,381	0	0	0	0	0
	8:30 AM	26	205	62	74	322	36	48	221	65	49	127	29	1,264	1	0	0	2	3
	8:45 AM	36	127	35	72	310	35	33	197	72	52	110	30	1,109	0	2	0	0	2
	VOLUMES	328	1,582	364	716	2,541	291	367	2,069	547	358	1,357	269	10,789	4	7	0	5	16
	APPROACH %	14%	70%	16%	20%	72%	8%	12%	69%	18%	18%	68%	14%						
	APP/DEPART	2,274	/	2,225	3,548	/	3,445	2,983	/	3,147	1,984	/	1,972	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	190	853	157	382	1,294	146	203	1,137	283	186	851	144	5,826					
	APPROACH %	16%	71%	13%	21%	71%	8%	13%	70%	17%	16%	72%	12%						
	PEAK HR FACTOR		0.833			0.961			0.959			0.897		0.974					
	APP/DEPART	1,200	/	1,203	1,822	/	1,763	1,623	/	1,676	1,181	/	1,184	0					
PM	4:00 PM	68	304	50	84	211	30	53	206	36	32	219	93	1,386	0	0	1	0	1
	4:15 PM	80	289	54	72	192	43	43	227	36	35	247	79	1,397	1	0	1	1	3
	4:30 PM	73	295	54	44	205	35	44	208	44	45	243	77	1,367	2	0	0	2	4
	4:45 PM	80	284	44	77	195	36	51	193	36	38	255	72	1,361	2	0	0	0	2
	5:00 PM	72	277	56	55	237	47	53	231	35	53	265	68	1,449	2	0	0	1	3
	5:15 PM	59	254	50	81	202	42	51	210	46	36	257	69	1,357	0	2	1	0	3
	5:30 PM	70	291	63	66	176	36	54	207	49	40	260	72	1,384	1	0	2	0	3
	5:45 PM	72	282	50	70	192	47	54	207	30	42	260	67	1,373	0	1	0	0	1
	VOLUMES	574	2,276	421	549	1,610	316	403	1,689	312	321	2,006	597	11,074	8	3	5	4	20
	APPROACH %	18%	70%	13%	22%	65%	13%	17%	70%	13%	11%	69%	20%						
	APP/DEPART	3,271	/	3,274	2,475	/	2,247	2,404	/	2,660	2,924	/	2,893	0					
	BEGIN PEAK HR		4:15 PM																
	VOLUMES	305	1,145	208	248	829	161	191	859	151	171	1,010	296	5,574					
	APPROACH %	18%	69%	13%	20%	67%	13%	16%	72%	13%	12%	68%	20%						
	PEAK HR FACTOR		0.980			0.913			0.941			0.957		0.962					
	APP/DEPART	1,658	/	1,631	1,238	/	1,154	1,201	/	1,319	1,477	/	1,470	0					

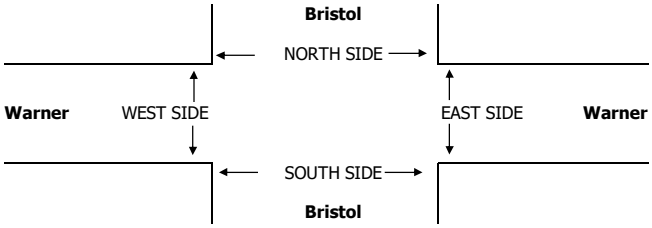

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:15 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:15 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Feb 9, 16

LOCATION: Santa Ana
NORTH & SOUTH: Bristol
EAST & WEST: Segerstrom


PROJECT #: SC0846
LOCATION #: 46
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Bristol			SOUTHBOUND Bristol			EASTBOUND Segerstrom			WESTBOUND Segerstrom				U-TURNS				
		NL	NT	NR	SL	ST	SR	EL	ET	ER	WL	WT	WR	TOTAL	NB	SB	EB	WB	TTL
	LANES:	1	3	0	1	3	0	1	2	0	1	2	0		0	0	0	0	
AM	7:00 AM	6	92	12	45	252	33	14	166	16	19	100	11	766	0	0	0	0	0
	7:15 AM	12	143	29	62	244	39	41	232	10	23	122	11	968	0	0	0	0	0
	7:30 AM	17	188	30	80	249	25	26	232	24	25	171	18	1,085	0	0	0	0	0
	7:45 AM	22	176	32	76	234	21	64	220	20	44	151	24	1,084	0	0	0	0	0
	8:00 AM	11	189	39	53	244	29	50	193	26	25	88	15	962	0	0	0	0	0
	8:15 AM	12	179	23	38	250	25	49	166	21	26	62	12	863	1	0	0	0	1
	8:30 AM	4	236	21	27	259	36	56	164	20	18	51	12	904	0	0	0	0	0
	8:45 AM	9	223	13	33	265	36	55	143	18	16	77	22	910	0	0	0	0	0
	VOLUMES	93	1,426	199	414	1,997	244	355	1,516	155	196	822	125	7,542	1	0	0	0	1
	APPROACH %	5%	83%	12%	16%	75%	9%	18%	75%	8%	17%	72%	11%						
	APP/DEPART	1,718	/	1,906	2,655	/	2,349	2,026	/	2,129	1,143	/	1,158	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	62	696	130	271	971	114	181	877	80	117	532	68	4,099					
	APPROACH %	7%	78%	15%	20%	72%	8%	16%	77%	7%	16%	74%	9%						
	PEAK HR FACTOR		0.929			0.958			0.936			0.818		0.944					
	APP/DEPART	888	/	945	1,356	/	1,168	1,138	/	1,278	717	/	708	0					
PM	4:00 PM	33	218	38	20	165	31	43	135	11	32	248	24	998	0	0	0	0	0
	4:15 PM	17	229	32	20	179	43	48	141	15	30	259	16	1,029	0	1	0	0	1
	4:30 PM	21	269	29	21	188	27	53	152	11	26	249	13	1,059	0	0	0	0	0
	4:45 PM	30	328	43	25	183	35	45	139	6	37	243	20	1,134	0	0	0	0	0
	5:00 PM	38	320	50	26	195	39	47	154	11	34	272	10	1,196	1	0	0	0	1
	5:15 PM	38	319	69	26	185	40	47	191	13	29	258	15	1,230	0	0	0	0	0
	5:30 PM	46	321	49	16	200	48	46	189	13	19	250	18	1,215	0	0	0	0	0
	5:45 PM	50	310	55	20	230	42	52	154	17	32	252	8	1,222	1	0	0	0	1
	VOLUMES	273	2,314	365	174	1,525	305	381	1,255	97	239	2,031	124	9,083	2	1	0	0	3
	APPROACH %	9%	78%	12%	9%	76%	15%	22%	72%	6%	10%	85%	5%						
	APP/DEPART	2,952	/	2,820	2,004	/	1,863	1,733	/	1,793	2,394	/	2,607	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	172	1,270	223	88	810	169	192	688	54	114	1,032	51	4,863					
	APPROACH %	10%	76%	13%	8%	76%	16%	21%	74%	6%	10%	86%	4%						
	PEAK HR FACTOR		0.977			0.914			0.930			0.947		0.988					
	APP/DEPART	1,665	/	1,513	1,067	/	980	934	/	999	1,197	/	1,371	0					

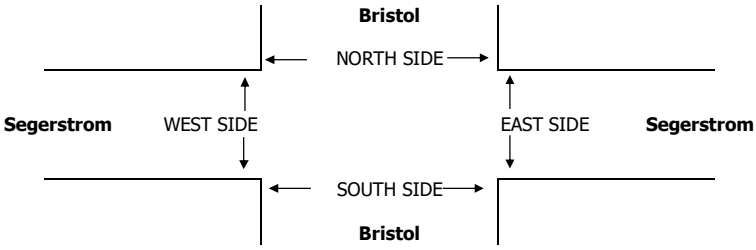

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	8	6	4	3	21	1	3	4	1	9	7	3	0	2	12
	7:15 AM	3	16	0	3	22	2	7	0	1	10	1	9	0	2	12
	7:30 AM	11	7	8	6	32	1	2	7	5	15	10	5	1	1	17
	7:45 AM	4	7	2	4	17	0	0	2	3	5	4	7	0	1	12
	8:00 AM	1	2	5	3	11	0	0	5	2	7	1	2	0	1	4
	8:15 AM	2	0	3	2	7	1	0	3	1	5	1	0	0	1	2
	8:30 AM	4	3	1	2	10	2	0	0	1	3	2	3	1	1	7
	8:45 AM	2	2	5	3	12	2	1	4	3	10	0	1	1	0	2
	TOTAL	35	43	28	26	132	9	13	25	17	64	26	30	3	9	68
PM	4:00 PM	16	3	10	8	37	3	1	6	4	14	13	2	4	4	23
	4:15 PM	10	6	3	5	24	0	1	2	1	4	10	5	1	4	20
	4:30 PM	16	5	8	7	36	1	3	4	3	11	15	2	4	4	25
	4:45 PM	6	5	6	6	23	1	0	4	3	8	5	5	2	3	15
	5:00 PM	9	2	6	6	23	0	2	5	4	11	9	0	1	2	12
	5:15 PM	13	1	4	7	25	1	1	3	6	11	12	0	1	1	14
	5:30 PM	8	3	17	2	30	3	1	16	1	21	5	2	1	1	9
	5:45 PM	6	0	3	4	13	1	0	1	3	5	5	0	2	1	8
	TOTAL	84	25	57	45	211	10	9	41	25	85	74	16	16	20	126

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: BRISTOL STREET
E-W Direction: ALTON AVENUE

File Name : H1702006
Site Code : 00000000
Start Date : 2/15/2017
Page No : 1

Groups Printed- Turning Movements

	BRISTOL STREET Southbound				ALTON AVENUE Westbound			BRISTOL STREET Northbound				ALTON AVENUE Eastbound				
Start Time	Right	Thru	Left	U-Turn	Right	Thru	Left	Right	Thru	Left	U-Turn	Right	Thru	Left	Peds	Int. Total
07:00	30	305	9	0	7	6	2	2	122	7	1	31	9	28	0	559
07:15	47	369	4	0	7	10	11	3	137	15	0	34	19	36	0	692
07:30	82	373	8	0	14	31	6	1	166	12	0	55	42	50	0	840
07:45	64	388	11	0	9	33	6	1	148	10	2	52	28	74	0	826
Total	223	1435	32	0	37	80	25	7	573	44	3	172	98	188	0	2917
08:00	27	394	11	0	9	10	7	1	158	8	0	43	24	76	0	768
08:15	21	343	7	0	10	11	4	2	143	6	0	35	15	75	0	672
08:30	19	312	6	0	11	7	3	0	142	6	2	20	16	36	0	580
08:45	18	306	13	1	4	12	4	3	126	7	0	13	12	18	0	537
Total	85	1355	37	1	34	40	18	6	569	27	2	111	67	205	0	2557
*** BREAK ***																
16:00	21	204	10	0	28	17	7	8	448	37	1	12	19	41	0	853
16:15	24	200	11	2	15	23	8	3	381	33	4	17	17	39	0	777
16:30	24	214	12	0	27	20	10	5	406	30	7	14	26	43	0	838
16:45	28	219	16	1	21	34	7	8	417	36	4	12	29	48	0	880
Total	97	837	49	3	91	94	32	24	1652	136	16	55	91	171	0	3348
17:00	31	204	9	1	26	26	7	5	383	35	3	13	26	45	0	814
17:15	27	212	17	1	25	51	7	5	405	48	6	23	22	46	0	895
17:30	25	234	12	1	16	34	7	7	426	34	3	24	24	50	0	897
17:45	25	220	19	0	29	34	7	9	381	37	3	22	23	35	0	844
Total	108	870	57	3	96	145	28	26	1595	154	15	82	95	176	0	3450
Grand Total	513	4497	175	7	258	359	103	63	4389	361	36	420	351	740	0	12272
Apprch %	9.9	86.6	3.4	0.1	35.8	49.9	14.3	1.3	90.5	7.4	0.7	27.8	23.2	49	0	
Total %	4.2	36.6	1.4	0.1	2.1	2.9	0.8	0.5	35.8	2.9	0.3	3.4	2.9	6	0	

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: BRISTOL STREET
E-W Direction: MACARTHUR BOULEVARD

File Name : H1702007
Site Code : 00000000
Start Date : 2/7/2017
Page No : 1

Groups Printed- Turning Movements

	BRISTOL STREET Southbound				MACARTHUR BOULEVARD Westbound				BRISTOL STREET Northbound				MACARTHUR BOULEVARD Eastbound				
Start Time	Right	Thru	Left	U-Turn	Right	Thru	Left	U-Turn	Right	Thru	Left	U-Turn	Right	Thru	Left	U-Turn	Int. Total
07:00	20	276	34	0	26	139	44	0	21	78	15	4	23	172	23	0	875
07:15	37	323	48	1	30	241	41	4	16	86	10	2	19	291	37	1	1187
07:30	45	328	70	0	39	360	38	1	24	98	22	3	66	384	35	0	1513
07:45	34	336	83	1	33	292	49	2	28	121	30	5	69	324	51	1	1459
Total	136	1263	235	2	128	1032	172	7	89	383	77	14	177	1171	146	2	5034
08:00	32	379	86	1	31	122	39	4	26	119	11	2	64	351	50	1	1318
08:15	32	334	75	0	25	109	46	6	38	125	13	3	75	294	47	1	1223
08:30	20	274	44	0	32	92	51	8	34	107	11	1	70	332	62	0	1138
08:45	27	262	35	3	14	113	59	8	25	113	17	7	55	258	37	0	1033
Total	111	1249	240	4	102	436	195	26	123	464	52	13	264	1235	196	2	4712
*** BREAK ***																	
16:00	23	170	42	8	55	344	68	2	61	313	73	4	27	176	87	1	1454
16:15	30	174	39	6	59	370	83	0	56	350	62	11	31	166	92	1	1530
16:30	30	198	48	6	57	378	70	0	58	340	59	14	32	197	82	0	1569
16:45	27	183	57	5	74	355	61	0	72	346	67	13	46	195	87	0	1588
Total	110	725	186	25	245	1447	282	2	247	1349	261	42	136	734	348	2	6141
17:00	26	191	39	8	59	366	76	0	73	353	56	8	39	209	89	1	1593
17:15	31	210	45	11	74	385	63	0	58	350	67	13	45	190	80	2	1624
17:30	41	212	44	7	74	384	57	0	49	337	86	15	34	178	86	1	1605
17:45	34	213	57	7	92	339	61	0	51	295	91	16	45	183	89	1	1574
Total	132	826	185	33	299	1474	257	0	231	1335	300	52	163	760	344	5	6396
Grand Total	489	4063	846	64	774	4389	906	35	690	3531	690	121	740	3900	1034	11	22283
Apprch %	9	74.4	15.5	1.2	12.7	71.9	14.8	0.6	13.7	70.2	13.7	2.4	13	68.6	18.2	0.2	
Total %	2.2	18.2	3.8	0.3	3.5	19.7	4.1	0.2	3.1	15.8	3.1	0.5	3.3	17.5	4.6	0	


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: BRISTOL STREET
E-W Direction: MACARTHUR BOULEVARD

File Name : H1702007
Site Code : 00000000
Start Date : 2/7/2017
Page No : 2

	BRISTOL STREET Southbound					MACARTHUR BOULEVARD Westbound					BRISTOL STREET Northbound					MACARTHUR BOULEVARD Eastbound					
Start Time	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	U-Turn	App. Total	Int. Total
Peak Hour Analysis From 07:00 to 08:45 - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 07:30																					
07:30	45	328	70	0	443	39	360	38	1	438	24	98	22	3	147	66	**384**	**35**	**0**	**485**	**1513**
07:45	**34**	**336**	**83**	**1**	**454**	**33**	**292**	**49**	2	376	28	121	**30**	**5**	**184**	69	324	**51**	**1**	445	1459
08:00	32	**379**	**86**		**498**	31	122	39	4	196	26	119	11	2	158	64	351	50	1	466	1318
08:15	32	334	75	0	441	25	109	46	**6**	186	**38**	**125**	13	3	179	**75**	294	47	1	417	1223
Total Volume	143	1377	314	2	1836	128	883	172	13	1196	116	463	76	13	668	274	1353	183	3	1813	5513
% App. Total																					
PHF	.794	.908	.913	.500	.922	.821	.613	.878	.542	.683	.763	.926	.633	.650	.908	.913	.881	.897	.750	.935	.911

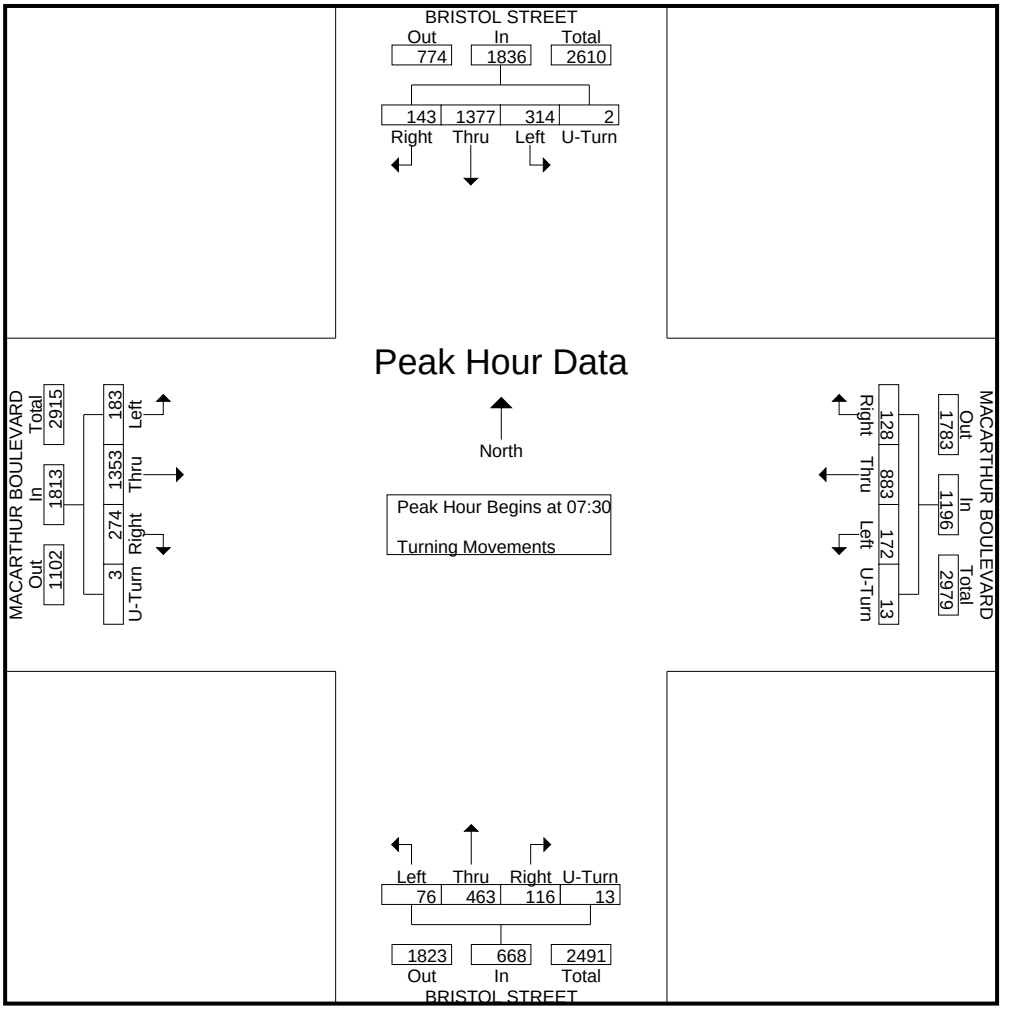


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: BRISTOL STREET
E-W Direction: MACARTHUR BOULEVARD

File Name : H1702007
Site Code : 00000000
Start Date : 2/7/2017
Page No : 3

	BRISTOL STREET Southbound					MACARTHUR BOULEVARD Westbound					BRISTOL STREET Northbound					MACARTHUR BOULEVARD Eastbound					
Start Time	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	U-Turn	App. Total	Int. Total
Peak Hour Analysis From 16:00 to 17:45 - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 16:45																					
16:45	27	183	57	5	272	74									498	46					
17:00	26	191	39	8	264	59	366	**76**	0	501	**73**	**353**	56	8	490	39	**209**	**89**	1	**338**	
17:15	**31**	**210**	**45**	**11**	**297**	**74**	**385**	**63**	**0**	**522**	**58**	**350**	**67**	**13**	**488**	**45**	**190**	**80**	**2**	317	**1624**
17:30	**41**	**212**	44	7	**304**	74	384	57	0	515	49	337	**86**	**15**	**487**	**34**	**178**	**86**	**1**	**299**	**1605**
Total Volume	125	796	185	31	1137	281	1490	257	0	2028	252	1386	276	49	1963	164	772	342	4	1282	6410
% App. Total	11	70	16.3	2.7		13.9	73.5	12.7	0		12.8	70.6	14.1	2.5		12.8	60.2	26.7	0.3		
PHF	.762	.939	.811	.705	.935	.949	.968	.845	.000	.971	.863	.982	.802	.817	.985	.891	.923	.961	.500	.948	.987

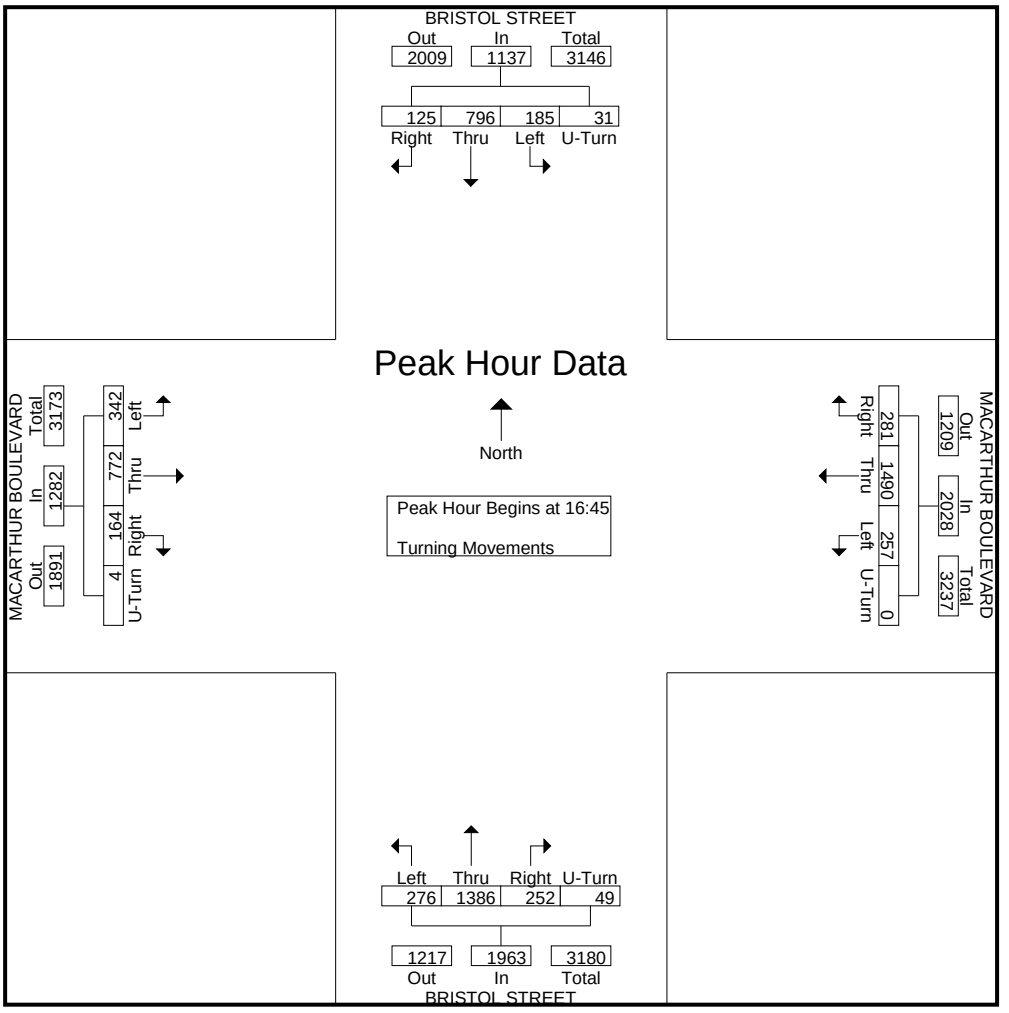

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Mar 1, 16

LOCATION: Santa Ana
NORTH & SOUTH: Bristol
EAST & WEST: Sunflower


PROJECT #: SC0846
LOCATION #: 14
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Bristol			SOUTHBOUND Bristol			EASTBOUND Sunflower			WESTBOUND Sunflower				U-TURNS				
	LANES:	NL 2	NT 2.5	NR 1.5	SL 2	ST 3	SR 1	EL 2	ET 2.5	ER 1.5	WL 2	WT 3	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	20	112	12	30	301	14	15	94	61	59	55	32	805	0	2	0	4	6
	7:15 AM	16	121	19	41	356	9	16	115	79	54	68	25	919	0	0	0	2	2
	7:30 AM	20	97	26	43	351	18	34	205	85	74	108	34	1,095	0	2	0	3	5
	7:45 AM	32	104	35	84	339	29	15	265	111	49	140	34	1,237	2	0	0	0	2
	8:00 AM	23	103	26	47	284	29	27	259	101	55	76	35	1,065	2	0	0	4	6
	8:15 AM	15	139	43	61	359	23	33	176	69	58	60	29	1,065	3	1	0	5	9
	8:30 AM	17	117	28	47	254	27	23	134	69	69	51	38	874	1	1	0	7	9
	8:45 AM	20	114	28	56	285	26	22	98	63	49	82	33	876	0	1	0	7	8
	VOLUMES	163	907	217	409	2,529	175	185	1,346	638	467	640	260	7,936	8	7	0	32	47
	APPROACH %	13%	70%	17%	13%	81%	6%	9%	62%	29%	34%	47%	19%						
	APP/DEPART	1,287	/	1,359	3,113	/	3,610	2,169	/	1,997	1,367	/	970	0					
	BEGIN PEAK HR		7:30 AM																
	VOLUMES	90	443	130	235	1,333	99	109	905	366	236	384	132	4,462					
	APPROACH %	14%	67%	20%	14%	80%	6%	8%	66%	27%	31%	51%	18%						
	PEAK HR FACTOR		0.841			0.922			0.882			0.843		0.902					
	APP/DEPART	663	/	687	1,667	/	1,930	1,380	/	1,279	752	/	566	0					
PM	4:00 PM	139	353	49	33	143	36	63	104	49	42	162	65	1,238	3	1	4	3	11
	4:15 PM	152	356	47	28	158	46	81	125	47	52	168	63	1,323	5	2	6	4	17
	4:30 PM	148	341	54	44	185	41	64	102	39	56	218	83	1,375	6	5	3	7	21
	4:45 PM	150	347	44	43	152	38	67	111	53	65	253	70	1,393	4	2	7	8	21
	5:00 PM	138	339	67	48	167	44	68	122	47	52	228	80	1,400	6	2	3	5	16
	5:15 PM	165	318	46	40	173	50	68	131	53	62	246	87	1,439	4	4	3	6	17
	5:30 PM	155	331	48	57	188	54	73	149	54	53	259	64	1,485	0	4	5	6	15
	5:45 PM	161	321	50	48	192	58	72	148	59	85	239	78	1,511	2	2	4	6	14
	VOLUMES	1,208	2,706	405	341	1,358	367	556	992	401	467	1,773	590	11,164	30	22	35	45	132
	APPROACH %	28%	63%	9%	17%	66%	18%	29%	51%	21%	17%	63%	21%						
	APP/DEPART	4,319	/	3,839	2,066	/	2,211	1,949	/	1,761	2,830	/	3,353	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	619	1,309	211	193	720	206	281	550	213	252	972	309	5,835					
	APPROACH %	29%	61%	10%	17%	64%	18%	27%	53%	20%	16%	63%	20%						
	PEAK HR FACTOR		0.983			0.936			0.935			0.953		0.965					
	APP/DEPART	2,139	/	1,896	1,119	/	1,174	1,044	/	965	1,533	/	1,800	0					

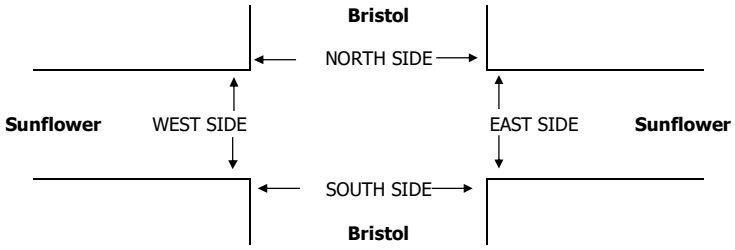

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	13	5	4	4	26	13	2	4	4	23	0	3	0	0	3
	7:15 AM	3	1	5	0	9	3	0	3	0	6	0	1	2	0	3
	7:30 AM	3	3	1	5	12	3	3	1	4	11	0	0	0	1	1
	7:45 AM	3	4	0	2	9	3	2	0	2	7	0	2	0	0	2
	8:00 AM	5	3	0	2	10	4	3	0	2	9	1	0	0	0	1
	8:15 AM	5	2	2	3	12	5	1	1	2	9	0	1	1	1	3
	8:30 AM	13	6	6	1	26	11	5	6	1	23	2	1	0	0	3
	8:45 AM	6	3	2	6	17	5	3	2	5	15	1	0	0	1	2
	TOTAL	51	27	20	23	121	47	19	17	20	103	4	8	3	3	18
PM	4:00 PM	13	4	7	8	32	12	4	6	8	30	1	0	1	0	2
	4:15 PM	9	5	5	1	20	7	5	5	1	18	2	0	0	0	2
	4:30 PM	21	13	5	11	50	17	11	5	9	42	4	2	0	2	8
	4:45 PM	18	9	3	11	41	15	8	3	11	37	3	1	0	0	4
	5:00 PM	11	4	13	10	38	11	3	9	10	33	0	1	4	0	5
	5:15 PM	8	4	7	6	25	8	4	6	6	24	0	0	1	0	1
	5:30 PM	13	5	5	6	29	12	4	4	5	25	1	1	1	1	4
	5:45 PM	16	5	7	5	33	16	4	6	5	31	0	1	1	0	2
	TOTAL	109	49	52	58	268	98	43	44	55	240	11	6	8	3	28

Prepared by National Data & Surveying Services

Bristol St & I-405 NB Ramps

Peak Hour Turning Movement Count

ID: Historical
City: Costa Mesa

Day: Thursday
Date: 10/11/2018

PEAK HOURS

AM: 07:45 AM - 08:45 AM
NOON: NONE
PM: 04:45 PM - 05:45 PM

COUNT PERIODS

AM: 07:00 AM - 09:00 AM
NOON: NONE
PM: 04:00 PM - 06:00 PM

Bristol St — SOUTHBOUND

AM	7	1928	0	0	2110	AM
NOON	0	0	0	0	0	NOON
PM	19	2105	0	0	3212	PM

I-405 NB Ramps — EASTBOUND

AM	NOON	PM		
78	0	318	⇦	
0	0	0	↶	0
0	0	0	↱	0
0	0	0	→	0
33	0	190	↷	2
AM	NOON	PM		

I-405 NB Ramps — WESTBOUND

PM	NOON	AM		
1160	0	651	↶	2
299	0	71	←	1.5
349	0	118	↩	1.5
0	0	0	↩	0
179	0	187	⇨	
PM	NOON	AM		

0	5	0	0	
				0 0 4 1


CONTROL: Signalized

TEV	4454 AM	0 NOON	6353 PM
PHF	0.97		0.97


Bristol St — NORTHBOUND

PM	2644	0	0	2052	179	PM
NOON	0	0	0	0	0	NOON
AM	2079	0	0	1459	187	AM


Total Vehicles (AM)




Total Vehicles (AM)




Total Vehicles (NOON)




Total Vehicles (NOON)




Pedestrians (Crosswalks)

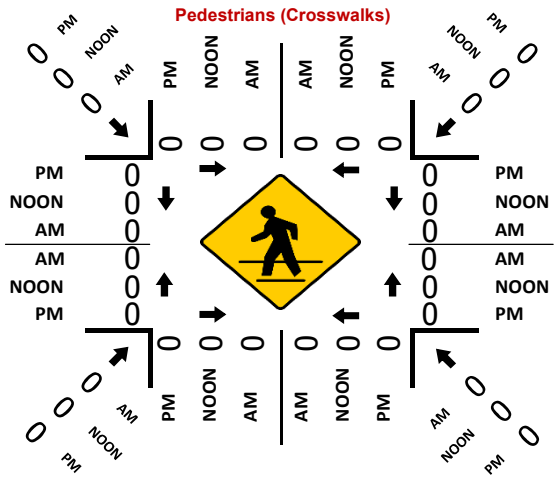

Total Vehicles (PM)



Total Vehicles (PM)



Prepared by National Data & Surveying Services

Bristol St & I-405 SB Ramps

Peak Hour Turning Movement Count

ID: Historical
City: Costa Mesa

Day: Thursday
Date: 10/11/2018

PEAK HOURS

AM	07:45 AM - 08:45 AM
NOON	NONE
PM	05:00 PM - 06:00 PM

COUNT PERIODS

AM	07:00 AM - 09:00 AM
NOON	NONE
PM	04:00 PM - 06:00 PM

Bristol St — SOUTHBOUND

AM	830	965	0	0	1647	AM
NOON	0	0	0	0	0	NOON
PM	862	1476	0	3	2252	PM
	2	3	0	0		

I-405 SB Ramps — EASTBOUND

AM	NOON	PM	
940	0	986	
0	0	0	0
561	0	725	3
0	0	0	0
513	0	324	1
AM	NOON	PM	

CONTROL

Signalized

TEV	4065	0	5038
	AM	NOON	PM
PHF	0.96		0.94


I-405 SB Ramps — WESTBOUND

PM	NOON	AM	
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	
PM	NOON	AM	


Bristol St — NORTHBOUND

	0	1	4	0		
PM	1800	0	124	1524	0	PM
NOON	0	0	0	0	0	NOON
AM	1478	0	110	1086	0	AM


Total Vehicles (AM)




Total Vehicles (AM)




Total Vehicles (NOON)




Total Vehicles (NOON)




Pedestrians (Crosswalks)

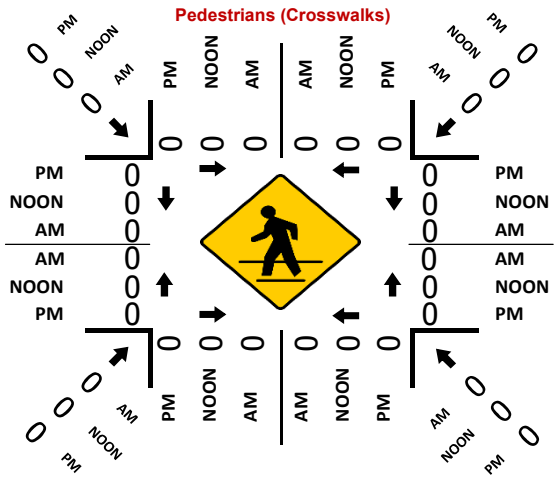

Total Vehicles (PM)



Total Vehicles (PM)



INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Thu, Feb 11, 16

LOCATION: Santa Ana
NORTH & SOUTH: Flower
EAST & WEST: Santa Ana


PROJECT #: SC0846
LOCATION #: 23
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Flower			SOUTHBOUND Flower			EASTBOUND Santa Ana			WESTBOUND Santa Ana				U-TURNS				
	LANES:	NL 1	NT 2	NR 1	SL 1	ST 2	SR 1	EL 1	ET 3	ER 1	WL 1	WT 2	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	11	120	17	30	104	24	11	85	18	16	63	26	525	0	0	0	0	0
	7:15 AM	14	199	19	36	131	20	24	146	24	22	78	25	738	0	0	0	0	0
	7:30 AM	17	234	36	38	156	17	26	202	20	35	92	33	906	0	0	0	0	0
	7:45 AM	26	194	35	50	156	25	33	193	23	18	73	22	848	0	0	0	0	0
	8:00 AM	26	152	23	37	102	11	26	141	10	22	67	49	666	1	0	0	0	1
	8:15 AM	10	95	28	47	85	20	20	104	14	10	51	35	519	0	0	0	0	0
	8:30 AM	13	128	19	26	86	9	6	50	11	14	42	25	429	1	0	0	0	1
	8:45 AM	20	105	13	24	63	4	15	52	8	18	36	26	384	2	0	0	0	2
	VOLUMES	137	1,227	190	288	883	130	161	973	128	155	502	241	5,015	4	0	0	0	4
	APPROACH %	9%	79%	12%	22%	68%	10%	13%	77%	10%	17%	56%	27%						
	APP/DEPART	1,554	/	1,629	1,301	/	1,170	1,262	/	1,451	898	/	765	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	83	779	113	161	545	73	109	682	77	97	310	129	3,158					
	APPROACH %	9%	80%	12%	21%	70%	9%	13%	79%	9%	18%	58%	24%						
	PEAK HR FACTOR		0.849			0.843			0.871			0.838		0.871					
	APP/DEPART	975	/	1,017	779	/	720	868	/	956	536	/	465	0					
PM	4:00 PM	19	161	17	28	111	14	19	84	11	26	82	20	592	0	0	0	0	0
	4:15 PM	25	148	23	23	94	7	13	105	17	37	71	30	593	0	0	0	0	0
	4:30 PM	18	152	13	30	123	11	42	123	13	34	98	33	690	0	0	0	0	0
	4:45 PM	31	171	18	39	133	10	26	82	20	25	97	25	677	0	0	0	0	0
	5:00 PM	26	152	16	24	125	9	47	103	15	43	149	56	765	1	0	0	0	1
	5:15 PM	33	210	12	19	120	14	22	90	13	46	125	29	733	0	0	0	0	0
	5:30 PM	29	191	13	17	131	13	33	95	12	26	119	35	714	1	0	0	0	1
	5:45 PM	24	206	14	9	90	7	15	69	11	30	98	28	601	0	0	0	0	0
	VOLUMES	205	1,391	126	189	927	85	217	751	112	267	839	256	5,365	2	0	0	0	2
	APPROACH %	12%	81%	7%	16%	77%	7%	20%	70%	10%	20%	62%	19%						
	APP/DEPART	1,722	/	1,864	1,201	/	1,308	1,080	/	1,066	1,362	/	1,127	0					
	BEGIN PEAK HR		4:45 PM																
	VOLUMES	119	724	59	99	509	46	128	370	60	140	490	145	2,889					
	APPROACH %	13%	80%	7%	15%	78%	7%	23%	66%	11%	18%	63%	19%						
	PEAK HR FACTOR		0.884			0.898			0.845			0.781		0.944					
	APP/DEPART	902	/	997	654	/	711	558	/	528	775	/	653	0					

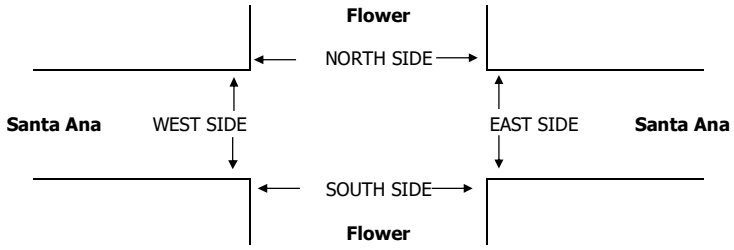

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	7	10	13	18	48	1	1	9	14	25	6	9	4	4	23
	7:15 AM	7	9	27	23	66	3	0	26	16	45	4	9	1	7	21
	7:30 AM	6	8	23	20	57	1	1	16	17	35	5	7	7	3	22
	7:45 AM	2	4	55	25	86	0	0	53	22	75	2	4	2	3	11
	8:00 AM	3	8	17	12	40	2	0	17	9	28	1	8	0	3	12
	8:15 AM	5	9	17	6	37	0	4	16	3	23	5	5	1	3	14
	8:30 AM	10	15	15	9	49	0	0	11	9	20	10	15	4	0	29
	8:45 AM	11	24	9	26	70	4	1	8	26	39	7	23	1	0	31
	TOTAL	51	87	176	139	453	11	7	156	116	290	40	80	20	23	163
PM	4:00 PM	2	7	7	22	38	0	2	5	17	24	2	5	2	5	14
	4:15 PM	8	14	9	26	57	4	0	8	24	36	4	14	1	2	21
	4:30 PM	10	5	8	10	33	1	1	6	9	17	9	4	2	1	16
	4:45 PM	2	3	10	13	28	0	1	8	9	18	2	2	2	4	10
	5:00 PM	1	9	6	12	28	0	1	5	12	18	1	8	1	0	10
	5:15 PM	5	5	6	4	20	1	3	3	3	10	4	2	3	1	10
	5:30 PM	1	3	5	8	17	1	2	4	8	15	0	1	1	0	2
	5:45 PM	4	3	5	10	22	1	0	2	9	12	3	3	3	1	10
	TOTAL	33	49	56	105	243	8	10	41	91	150	25	39	15	14	93

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: FLOWER STREET
E-W Direction: 1ST STREET

File Name : H1702009
Site Code : 00000000
Start Date : 2/9/2017
Page No : 1

Groups Printed- Turning Movements

	FLOWER STREET Southbound			1ST STREET Westbound				FLOWER STREET Northbound				1ST STREET Eastbound			
Start Time	Right	Thru	Left	Right	Thru	Left	U-Turn	Right	Thru	Left	U-Turn	Right	Thru	Left	Int. Total
07:00	13	106	37	21	158	32	2	37	110	22	1	18	324	25	906
07:15	12	113	35	35	201	42	10	44	143	39	0	15	383	39	1111
07:30	16	132	55	21	205	39	18	32	155	32	1	18	364	35	1123
07:45	13	162	46	40	235	45	12	41	175	40	0	16	363	39	1227
Total	54	513	173	117	799	158	42	154	583	133	2	67	1434	138	4367
08:00	15	130	33	23	194	29	7	37	111	22	0	9	359	47	1016
08:15	17	58	32	23	168	39	6	32	78	21	1	15	329	37	856
08:30	15	61	35	20	145	28	0	28	69	16	2	9	319	33	780
08:45	24	60	39	16	139	17	1	29	61	18	0	17	293	25	739
Total	71	309	139	82	646	113	14	126	319	77	3	50	1300	142	3391
*** BREAK ***															
16:00	30	82	49	28	305	52	3	28	97	34	0	21	288	35	1052
16:15	34	94	46	29	358	41	2	28	142	35	2	16	271	44	1142
16:30	22	140	37	20	336	40	8	29	122	35	0	16	264	31	1100
16:45	26	114	51	31	360	53	3	33	143	25	0	25	291	34	1189
Total	112	430	183	108	1359	186	16	118	504	129	2	78	1114	144	4483
17:00	37	115	47	36	327	53	3	39	159	34	3	18	312	35	1218
17:15	34	110	40	34	364	45	2	35	150	35	0	25	293	29	1196
17:30	34	113	27	41	322	39	5	37	154	29	2	30	285	36	1154
17:45	25	118	36	47	317	43	8	27	141	34	1	23	303	32	1155
Total	130	456	150	158	1330	180	18	138	604	132	6	96	1193	132	4723
Grand Total	367	1708	645	465	4134	637	90	536	2010	471	13	291	5041	556	16964
Apprch %	13.5	62.8	23.7	8.7	77.6	12	1.7	17.7	66.3	15.5	0.4	4.9	85.6	9.4	
Total %	2.2	10.1	3.8	2.7	24.4	3.8	0.5	3.2	11.8	2.8	0.1	1.7	29.7	3.3	


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: FLOWER STREET
E-W Direction: 1ST STREET

File Name : H1702009
Site Code : 00000000
Start Date : 2/9/2017
Page No : 2

	FLOWER STREET Southbound				1ST STREET Westbound					FLOWER STREET Northbound					1ST STREET Eastbound				
Start Time	Right	Thru	Left	App. Total	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 07:00 to 08:45 - Peak 1 of 1																			
Peak Hour for Entire Intersection Begins at 07:15																			
07:15	12	113	35	160	35	201	42	10	288	44								383	437	1111
07:30	16	132	**55**	203	21	205	39	**18**					**1**	220	**18**	364	35	417	1123
07:45	13	**162**	46	**221**	**40**	**235**	**45**	12	**332**		**175**	**40**	0	**256**	16	363	39	418	**1227**
08:00	**15**	**130**	**33**	**178**	**23**	**194**	**29**	**7**	**253**	**37**	**111**	**22**	**0**	**170**	**9**	**359**	**47**	415	1016
Total Volume	56	537	169	762	119	835	155	47	1156	154	584	133	1	872	58	1469	160	1687	4477
% App. Total	7.3	70.5	22.2		10.3	72.2	13.4	4.1		17.7	67	15.3	0.1		3.4	87.1	9.5		
PHF	.875	.829	.768	.862	.744	.888	.861	.653	.870	.875	.834	.831	.250	.852	.806	.959	.851	.965	.912

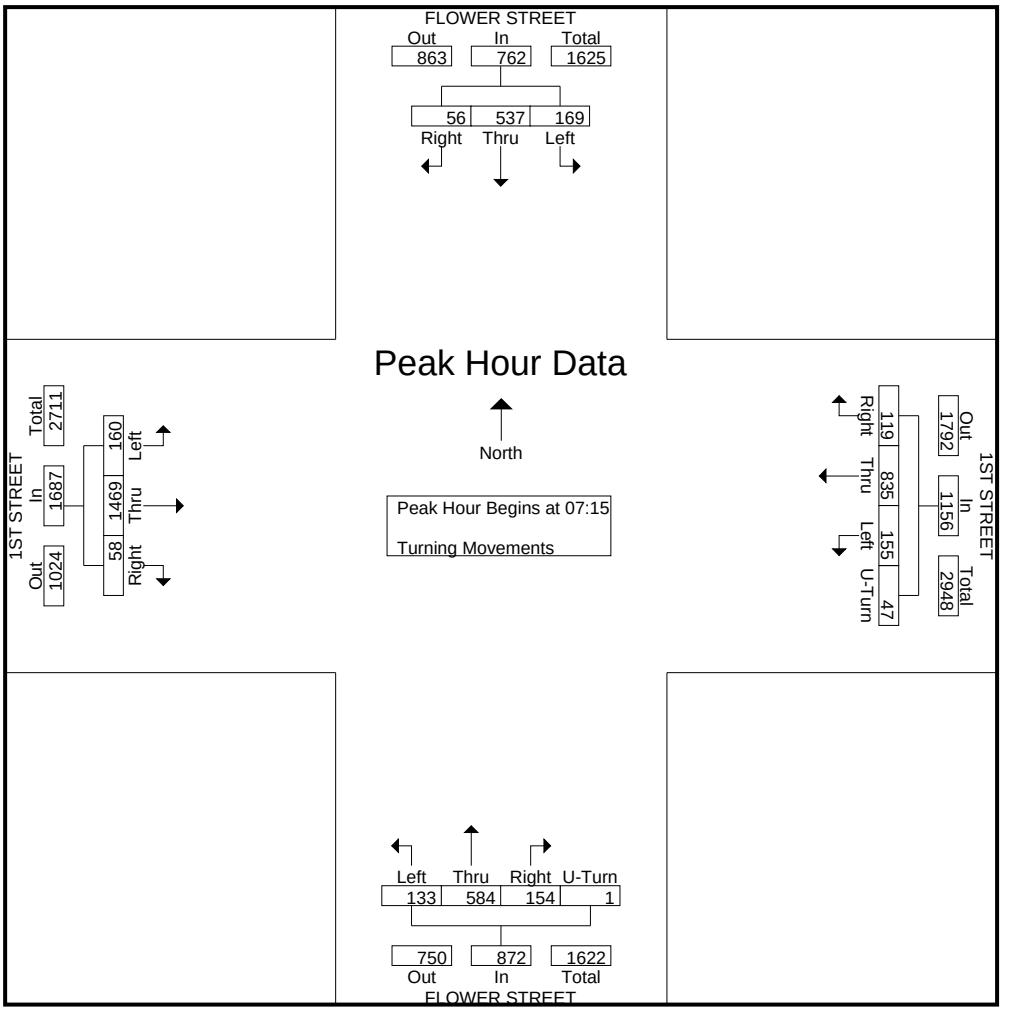


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: FLOWER STREET
E-W Direction: 1ST STREET

File Name : H1702009
Site Code : 00000000
Start Date : 2/9/2017
Page No : 3

	FLOWER STREET Southbound				1ST STREET Westbound					FLOWER STREET Northbound					1ST STREET Eastbound				
Start Time	Right	Thru	Left	App. Total	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	U-Turn	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 16:00 to 17:45 - Peak 1 of 1																			
Peak Hour for Entire Intersection Begins at 16:45																			
16:45	26	114	51				53		447	33	143	25	0	201	25	291	34	350	1189
17:00	37	**115**	47	**199**						**39**	**159**	34	**3**	**235**	18	**312**	35	**365**	**1218**
17:15	**34**	**110**	**40**	**184**	**34**	**364**	**45**	**2**	**445**	**35**	**150**	**35**	0	220	25	293	29	347	1196
17:30	34	113	27	174	**41**	322	39	**5**							**30**	285	**36**	351	1154
Total Volume	131	452	165	748	142	1373	190	13	1718	144	606	123	5	878	98	1181	134	1413	4757
% App. Total	17.5	60.4	22.1		8.3	79.9	11.1	0.8		16.4	69	14	0.6		6.9	83.6	9.5		
PHF	.885	.983	.809	.940	.866	.943	.896	.650	.961	.923	.953	.879	.417	.934	.817	.946	.931	.968	.976

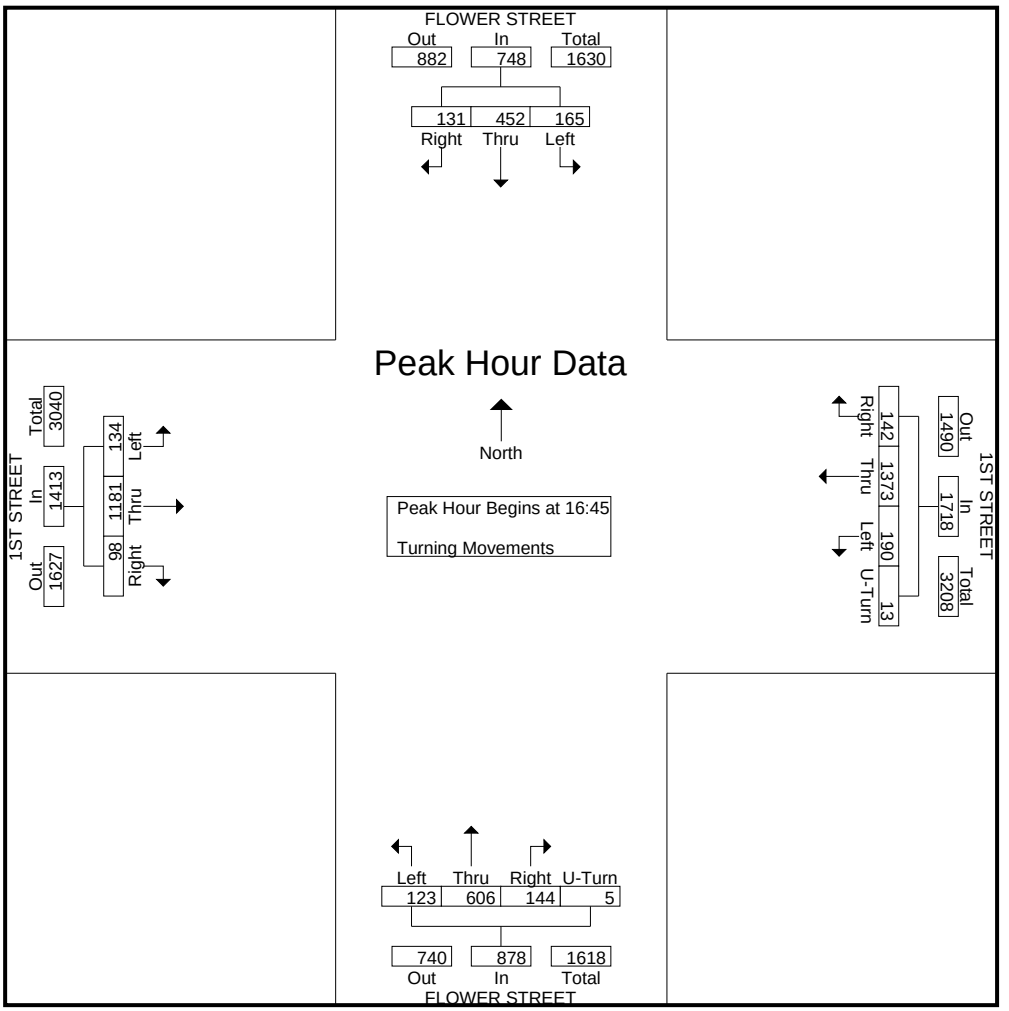

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Thu, Feb 11, 16

LOCATION: Santa Ana
NORTH & SOUTH: Flower
EAST & WEST: McFadden


PROJECT #: SC0846
LOCATION #: 36
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Flower			SOUTHBOUND Flower			EASTBOUND McFadden			WESTBOUND McFadden				U-TURNS				
	LANES:	NL 1	NT 1	NR 0	SL 1	ST 1	SR 0	EL 1	ET 1	ER 0	WL 1	WT 1	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	8	75	5	14	75	8	12	86	10	8	79	5	385	0	0	0	0	0
	7:15 AM	8	102	8	10	89	10	13	134	12	12	92	15	505	0	0	0	0	0
	7:30 AM	13	105	10	14	85	13	13	139	19	16	120	15	562	0	0	0	0	0
	7:45 AM	15	111	8	18	90	15	11	145	5	22	112	13	565	0	0	0	0	0
	8:00 AM	21	102	10	21	88	12	12	140	6	11	91	12	526	0	0	0	0	0
	8:15 AM	9	82	8	15	66	7	13	89	6	13	66	4	378	0	0	0	0	0
	8:30 AM	5	64	10	10	79	8	10	81	4	9	59	8	347	0	0	0	0	0
	8:45 AM	7	63	6	9	54	10	9	90	4	11	76	3	342	0	0	0	0	0
	VOLUMES	86	704	65	111	626	83	93	904	66	102	695	75	3,610	0	0	0	0	0
	APPROACH %	10%	82%	8%	14%	76%	10%	9%	85%	6%	12%	80%	9%						
	APP/DEPART	855	/	872	820	/	794	1,063	/	1,080	872	/	864	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	57	420	36	63	352	50	49	558	42	61	415	55	2,158					
	APPROACH %	11%	82%	7%	14%	76%	11%	8%	86%	6%	11%	78%	10%						
	PEAK HR FACTOR		0.957			0.945			0.949			0.879		0.955					
	APP/DEPART	513	/	524	465	/	455	649	/	657	531	/	522	0					
PM	4:00 PM	11	106	6	6	65	9	9	121	9	9	126	18	495	0	0	0	0	0
	4:15 PM	10	137	5	8	93	13	8	106	4	12	136	15	547	0	0	0	0	0
	4:30 PM	12	119	5	14	64	18	12	100	2	15	126	13	500	0	0	0	0	0
	4:45 PM	8	135	7	8	75	17	10	110	4	9	148	7	538	0	0	0	0	0
	5:00 PM	10	135	9	14	60	9	15	109	4	6	131	17	519	0	0	0	0	0
	5:15 PM	9	143	10	10	95	16	15	100	3	13	145	21	580	0	0	0	0	0
	5:30 PM	10	139	7	10	105	10	15	127	5	10	142	21	601	0	0	0	0	0
	5:45 PM	11	127	7	10	78	19	16	123	6	17	153	22	589	0	0	0	0	0
	VOLUMES	81	1,041	56	80	635	111	100	896	37	91	1,107	134	4,369	0	0	0	0	0
	APPROACH %	7%	88%	5%	10%	77%	13%	10%	87%	4%	7%	83%	10%						
	APP/DEPART	1,178	/	1,275	826	/	763	1,033	/	1,032	1,332	/	1,299	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	40	544	33	44	338	54	61	459	18	46	571	81	2,289					
	APPROACH %	6%	88%	5%	10%	78%	12%	11%	85%	3%	7%	82%	12%						
	PEAK HR FACTOR		0.952			0.872			0.915			0.909		0.952					
	APP/DEPART	617	/	686	436	/	402	538	/	536	698	/	665	0					

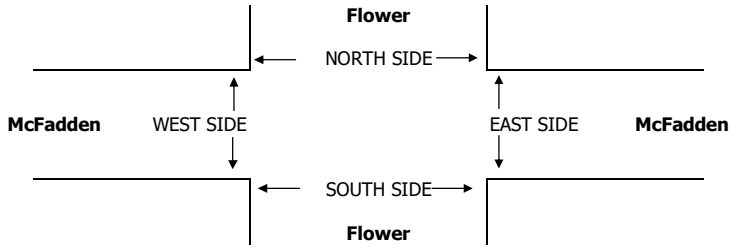

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	8	9	9	5	31	2	1	7	5	15	6	8	2	0	16
	7:15 AM	7	2	3	4	16	1	0	2	4	7	6	2	1	0	9
	7:30 AM	15	9	7	14	45	1	0	7	12	20	14	9	0	2	25
	7:45 AM	8	19	9	15	51	3	0	8	15	26	5	19	1	0	25
	8:00 AM	4	5	3	9	21	2	0	3	9	14	2	5	0	0	7
	8:15 AM	3	7	5	11	26	3	2	4	9	18	0	5	1	2	8
	8:30 AM	2	2	2	6	12	1	1	1	4	7	1	1	1	2	5
	8:45 AM	2	2	0	4	8	0	0	0	4	4	2	2	0	0	4
	TOTAL	49	55	38	68	210	13	4	32	62	111	36	51	6	6	99
PM	4:00 PM	10	7	13	10	40	3	0	11	9	23	7	7	2	1	17
	4:15 PM	7	8	7	5	27	0	1	7	5	13	7	7	0	0	14
	4:30 PM	4	3	3	3	13	3	0	2	2	7	1	3	1	1	6
	4:45 PM	3	7	6	6	22	2	0	6	6	14	1	7	0	0	8
	5:00 PM	8	3	0	8	19	2	0	0	6	8	6	3	0	2	11
	5:15 PM	4	6	7	7	24	1	1	6	6	14	3	5	1	1	10
	5:30 PM	11	8	8	7	34	1	0	8	7	16	10	8	0	0	18
	5:45 PM	6	11	4	4	25	1	4	4	2	11	5	7	0	2	14
	TOTAL	53	53	48	50	204	13	6	44	43	106	40	47	4	7	98

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Feb 9, 16

LOCATION: Santa Ana
NORTH & SOUTH: Flower
EAST & WEST: Segerstrom


PROJECT #: SC0846
LOCATION #: 47
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Flower			SOUTHBOUND Flower			EASTBOUND Segerstrom			WESTBOUND Segerstrom				U-TURNS				
	LANES:	NL 1	NT 2	NR 0	SL 1	ST 2	SR 0	EL 1	ET 2	ER 0	WL 1	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	16	50	12	28	108	31	33	200	68	18	96	10	670	0	0	0	0	0
	7:15 AM	16	84	14	25	149	16	24	252	65	18	114	11	788	0	0	0	0	0
	7:30 AM	14	96	27	21	155	27	37	272	91	20	181	17	958	0	0	0	0	0
	7:45 AM	14	88	17	20	110	41	54	299	61	15	133	19	871	0	0	0	0	0
	8:00 AM	10	52	9	32	95	18	29	287	44	9	77	5	667	0	0	0	0	0
	8:15 AM	11	42	10	26	99	9	10	204	16	8	82	6	523	0	0	0	0	0
	8:30 AM	14	51	9	40	82	5	4	190	20	7	63	2	487	0	0	0	0	0
	8:45 AM	10	32	11	24	80	5	5	179	21	2	83	9	461	0	0	0	0	0
	VOLUMES	105	495	109	216	878	152	196	1,883	386	97	829	79	5,425	0	0	0	0	0
	APPROACH %	15%	70%	15%	17%	70%	12%	8%	76%	16%	10%	82%	8%						
	APP/DEPART	709	/	770	1,246	/	1,361	2,465	/	2,208	1,005	/	1,086	0					
	BEGIN PEAK HR		7:00 AM																
	VOLUMES	60	318	70	94	522	115	148	1,023	285	71	524	57	3,287					
	APPROACH %	13%	71%	16%	13%	71%	16%	10%	70%	20%	11%	80%	9%						
	PEAK HR FACTOR		0.818			0.900			0.879			0.748		0.858					
	APP/DEPART	448	/	523	731	/	878	1,456	/	1,187	652	/	699	0					
PM	4:00 PM	35	162	18	21	71	15	38	138	19	16	281	32	846	0	0	0	0	0
	4:15 PM	26	157	17	13	69	18	28	156	13	13	277	23	810	0	0	0	0	0
	4:30 PM	43	185	23	13	83	10	29	152	29	20	287	18	892	0	0	0	0	0
	4:45 PM	26	194	22	20	72	21	31	153	19	20	296	30	904	0	0	0	0	0
	5:00 PM	29	201	24	15	81	28	52	170	13	20	274	19	926	0	0	0	0	0
	5:15 PM	31	219	20	17	80	22	44	211	23	16	317	19	1,019	0	0	0	0	0
	5:30 PM	30	208	16	15	97	22	33	199	23	19	315	17	994	0	0	0	0	0
	5:45 PM	25	182	16	16	96	29	22	175	20	17	302	22	922	0	0	0	0	0
	VOLUMES	245	1,508	156	130	649	165	277	1,354	159	141	2,349	180	7,313	0	0	0	0	0
	APPROACH %	13%	79%	8%	14%	69%	17%	15%	76%	9%	5%	88%	7%						
	APP/DEPART	1,909	/	1,965	944	/	949	1,790	/	1,640	2,670	/	2,759	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	115	810	76	63	354	101	151	755	79	72	1,208	77	3,861					
	APPROACH %	11%	81%	8%	12%	68%	19%	15%	77%	8%	5%	89%	6%						
	PEAK HR FACTOR		0.927			0.918			0.886			0.964		0.947					
	APP/DEPART	1,001	/	1,038	518	/	505	985	/	894	1,357	/	1,424	0					

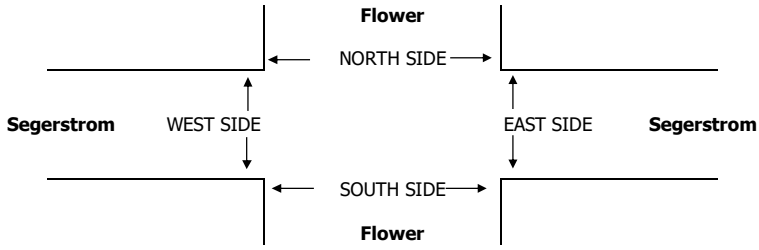

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	5	5	1	8	19	3	4	1	8	16	2	1	0	0	3
	7:15 AM	8	17	6	28	59	5	14	5	26	50	3	3	1	2	9
	7:30 AM	27	34	9	54	124	26	32	9	53	120	1	2	0	1	4
	7:45 AM	27	56	20	132	235	27	55	19	132	233	0	1	1	0	2
	8:00 AM	1	2	0	11	14	1	2	0	11	14	0	0	0	0	0
	8:15 AM	2	2	2	8	14	2	2	0	6	10	0	0	2	2	4
	8:30 AM	1	1	2	2	6	0	1	1	1	3	1	0	1	1	3
	8:45 AM	1	1	0	1	3	0	0	0	1	1	1	1	0	0	2
	TOTAL	72	118	40	244	474	64	110	35	238	447	8	8	5	6	27
PM	4:00 PM	1	11	3	11	26	0	11	3	11	25	1	0	0	0	1
	4:15 PM	2	9	4	2	17	1	6	2	2	11	1	3	2	0	6
	4:30 PM	3	7	2	8	20	1	6	2	6	15	2	1	0	2	5
	4:45 PM	5	7	1	12	25	4	5	1	11	21	1	2	0	1	4
	5:00 PM	3	5	4	14	26	1	4	1	10	16	2	1	3	4	10
	5:15 PM	1	5	8	5	19	0	2	7	5	14	1	3	1	0	5
	5:30 PM	4	6	1	4	15	2	6	1	4	13	2	0	0	0	2
	5:45 PM	6	7	0	4	17	3	7	0	2	12	3	0	0	2	5
	TOTAL	25	57	23	60	165	12	47	17	51	127	13	10	6	9	38

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Feb 9, 16

LOCATION: Santa Ana
NORTH & SOUTH: Flower
EAST & WEST: MacArthur


PROJECT #: SC0846
LOCATION #: 53
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Flower			SOUTHBOUND Flower			EASTBOUND MacArthur			WESTBOUND MacArthur				U-TURNS				
	LANES:	NL 1	NT 2	NR 0	SL 1	ST 2	SR 0	EL 1	ET 3	ER 0	WL 1	WT 3	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	9	26	20	36	60	51	28	315	14	6	142	9	716	0	0	0	0	0
	7:15 AM	5	32	17	40	70	54	54	424	15	11	218	17	957	0	0	0	1	1
	7:30 AM	6	44	25	35	88	100	45	478	16	16	297	16	1,166	0	0	1	0	1
	7:45 AM	4	35	13	45	104	67	30	460	27	12	197	15	1,009	0	0	1	1	2
	8:00 AM	6	25	15	36	76	32	29	443	18	12	161	7	860	0	0	1	0	1
	8:15 AM	9	32	15	47	82	21	24	438	33	10	171	13	895	0	0	0	1	1
	8:30 AM	10	27	16	36	47	20	23	368	21	17	148	17	750	0	0	0	0	0
	8:45 AM	10	21	12	30	65	24	13	329	16	8	128	11	667	0	0	0	0	0
	VOLUMES	59	242	133	305	592	369	246	3,255	160	92	1,462	105	7,020	0	0	3	3	6
	APPROACH %	14%	56%	31%	24%	47%	29%	7%	89%	4%	6%	88%	6%						
	APP/DEPART	434	/	590	1,266	/	841	3,661	/	3,696	1,659	/	1,893	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	21	136	70	156	338	253	158	1,805	76	51	873	55	3,992					
	APPROACH %	9%	60%	31%	21%	45%	34%	8%	89%	4%	5%	89%	6%						
	PEAK HR FACTOR		0.757			0.837			0.946			0.744		0.856					
	APP/DEPART	227	/	346	747	/	463	2,039	/	2,033	979	/	1,150	0					
PM	4:00 PM	17	121	16	25	44	36	46	240	14	10	454	35	1,058	0	0	0	0	0
	4:15 PM	22	134	7	18	39	31	45	217	10	15	476	38	1,052	0	0	1	1	2
	4:30 PM	23	124	15	15	51	49	45	249	11	15	477	33	1,107	0	0	0	3	3
	4:45 PM	22	144	17	15	39	39	56	244	10	8	451	38	1,083	0	0	1	0	1
	5:00 PM	35	167	13	19	44	45	49	242	15	12	504	44	1,189	0	0	0	0	0
	5:15 PM	33	190	17	17	52	41	49	221	21	16	464	45	1,166	0	0	1	0	1
	5:30 PM	38	140	28	24	49	54	47	245	10	15	463	35	1,148	0	0	0	0	0
	5:45 PM	21	112	13	21	52	49	55	247	14	16	480	46	1,126	0	0	0	0	0
	VOLUMES	211	1,132	126	154	370	344	392	1,905	105	107	3,769	314	8,929	0	0	3	4	7
	APPROACH %	14%	77%	9%	18%	43%	40%	16%	79%	4%	3%	90%	7%						
	APP/DEPART	1,469	/	1,835	868	/	578	2,402	/	2,189	4,190	/	4,327	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	127	609	71	81	197	189	200	955	60	59	1,911	170	4,629					
	APPROACH %	16%	75%	9%	17%	42%	40%	16%	79%	5%	3%	89%	8%						
	PEAK HR FACTOR		0.841			0.919			0.961			0.955		0.973					
	APP/DEPART	807	/	978	467	/	316	1,215	/	1,107	2,140	/	2,228	0					

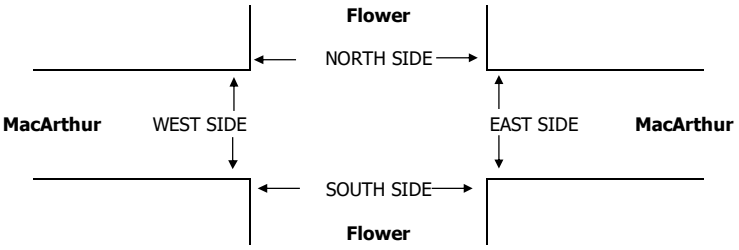

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	1	3	5	4	13	1	3	4	3	11	0	0	1	1	2
	7:15 AM	2	6	3	14	25	2	6	3	14	25	0	0	0	0	0
	7:30 AM	4	6	8	3	21	3	6	8	3	20	1	0	0	0	1
	7:45 AM	2	12	5	6	25	2	12	5	6	25	0	0	0	0	0
	8:00 AM	1	8	3	1	13	1	8	3	1	13	0	0	0	0	0
	8:15 AM	0	20	3	7	30	0	20	2	5	27	0	0	1	2	3
	8:30 AM	1	11	7	3	22	0	10	5	2	17	1	1	2	1	5
	8:45 AM	1	2	3	1	7	1	2	2	1	6	0	0	1	0	1
	TOTAL	12	68	37	39	156	10	67	32	35	144	2	1	5	4	12
PM	4:00 PM	3	10	2	4	19	2	9	1	4	16	1	1	1	0	3
	4:15 PM	5	3	1	2	11	5	3	1	1	10	0	0	0	1	1
	4:30 PM	4	4	0	0	8	1	3	0	0	4	3	1	0	0	4
	4:45 PM	2	2	2	2	8	1	1	0	2	4	1	1	2	0	4
	5:00 PM	1	4	5	7	17	1	4	2	7	14	0	0	3	0	3
	5:15 PM	4	2	5	0	11	3	2	5	0	10	1	0	0	0	1
	5:30 PM	0	2	3	3	8	0	1	3	1	5	0	1	0	2	3
	5:45 PM	5	4	10	2	21	3	4	9	2	18	2	0	1	0	3
	TOTAL	24	31	28	20	103	16	27	21	17	81	8	4	7	3	22

Prepared by National Data & Surveying Services

Main St & La Veta Ave

Peak Hour Turning Movement Count

ID: Historical
City: Orange

Day: Tuesday
Date: 08/28/2018

PEAK HOURS

AM	07:30 AM - 08:30 AM
NOON	NONE
PM	05:00 PM - 06:00 PM

COUNT PERIODS

AM	07:00 AM - 09:00 AM
NOON	NONE
PM	04:00 PM - 06:00 PM

Main St — SOUTHBOUND

AM	169	1013	194	0	1135	AM
NOON	0	0	0	0	0	NOON
PM	230	893	142	0	1410	PM
	0	3	2	0		

La Veta Ave — EASTBOUND

AM	NOON	PM	
521	0	1032	
0	0	0	0
343	0	290	2
485	0	413	3
210	0	185	0
AM	NOON	PM	

La Veta Ave — WESTBOUND

PM	NOON	AM	
201	0	225	1
502	0	270	2
251	0	309	2
0	0	0	0
985	0	973	
PM	NOON	AM	


CONTROL: Signalized

TEV	4161	0	4756
	AM	NOON	PM
PHF	0.95		0.90


Main St — NORTHBOUND

PM	1329	0	300	919	430	PM
NOON	0	0	0	0	0	NOON
AM	1532	0	82	567	294	AM
		0	2	3	1	


Total Vehicles (AM)




Total Vehicles (AM)




Total Vehicles (NOON)




Total Vehicles (NOON)




Pedestrians (Crosswalks)

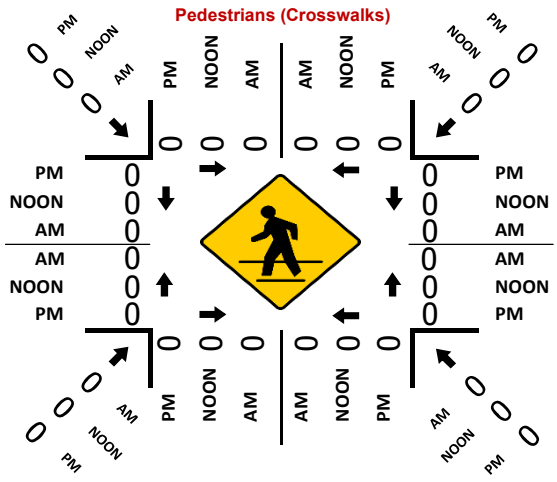

Total Vehicles (PM)



Total Vehicles (PM)



INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 14, 19

LOCATION: Santa Ana
NORTH & SOUTH: Main
EAST & WEST: Mainplace


PROJECT #: SC2183
LOCATION #: 16
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Main			SOUTHBOUND Main			EASTBOUND Mainplace			WESTBOUND Mainplace				U-TURNS				
	LANES:	NL 2	NT 3	NR 0	SL 2	ST 3	SR 0	EL 2	ET 2.5	ER 0.5	WL 2	WT 2	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	3	121	34	5	255	43	16	23	5	27	46	1	579	1	2	0	0	3
	7:15 AM	8	140	43	4	355	62	31	31	7	31	37	6	755	0	0	0	0	0
	7:30 AM	0	165	72	9	328	66	39	67	3	62	58	2	871	0	2	0	0	2
	7:45 AM	8	237	70	10	306	60	35	65	5	50	73	3	922	1	1	0	1	3
	8:00 AM	6	177	52	8	307	53	38	63	4	51	47	4	810	1	1	0	1	3
	8:15 AM	13	177	53	4	290	78	34	35	3	33	45	5	770	1	1	0	0	2
	8:30 AM	6	165	38	6	219	61	36	37	12	35	36	5	656	0	0	0	0	0
	8:45 AM	12	160	46	9	233	46	20	19	10	29	36	4	624	1	4	0	1	6
	VOLUMES	56	1,342	408	55	2,293	469	249	340	49	318	378	30	5,987	5	11	0	3	19
	APPROACH %	3%	74%	23%	2%	81%	17%	39%	53%	8%	44%	52%	4%						
	APP/DEPART	1,806	/	1,632	2,817	/	2,662	638	/	795	726	/	898	0					
	BEGIN PEAK HR		7:30 AM																
	VOLUMES	27	756	247	31	1,231	257	146	230	15	196	223	14	3,373					
	APPROACH %	3%	73%	24%	2%	81%	17%	37%	59%	4%	45%	52%	3%						
	PEAK HR FACTOR		0.817			0.942			0.897			0.859		0.915					
	APP/DEPART	1,030	/	921	1,519	/	1,443	391	/	505	433	/	504	0					
PM	4:00 PM	9	201	37	15	241	40	46	54	28	27	39	14	751	0	6	0	0	6
	4:15 PM	17	194	35	16	277	41	53	65	21	48	29	8	804	1	2	0	2	5
	4:30 PM	21	218	26	9	267	36	60	61	33	36	41	8	816	2	3	0	1	6
	4:45 PM	23	213	37	12	257	27	66	80	13	46	42	16	832	1	5	0	0	6
	5:00 PM	22	247	57	19	243	43	69	79	25	51	34	24	913	2	6	0	0	8
	5:15 PM	25	246	43	8	282	33	83	92	26	50	42	18	948	1	5	0	0	6
	5:30 PM	19	229	40	11	262	34	72	70	22	36	31	14	840	0	4	0	1	5
	5:45 PM	28	208	39	12	187	30	61	62	15	28	29	12	711	0	6	0	3	9
	VOLUMES	164	1,756	314	102	2,016	284	510	563	183	322	287	114	6,615	7	37	0	7	51
	APPROACH %	7%	79%	14%	4%	84%	12%	41%	45%	15%	45%	40%	16%						
	APP/DEPART	2,234	/	2,417	2,402	/	2,521	1,256	/	949	723	/	728	0					
	BEGIN PEAK HR		4:45 PM																
	VOLUMES	89	935	177	50	1,044	137	290	321	86	183	149	72	3,533					
	APPROACH %	7%	78%	15%	4%	85%	11%	42%	46%	12%	45%	37%	18%						
	PEAK HR FACTOR		0.921			0.953			0.867			0.918		0.932					
	APP/DEPART	1,201	/	1,317	1,231	/	1,316	697	/	529	404	/	371	0					

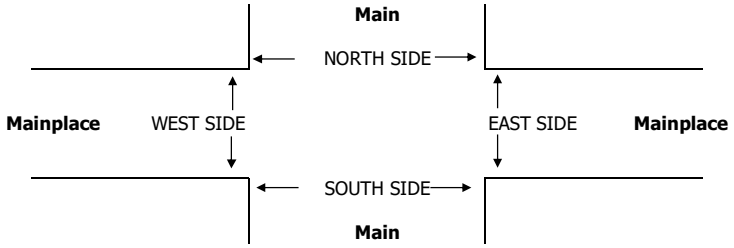

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:30 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:45 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 14, 19

LOCATION: Santa Ana
NORTH & SOUTH: Main
EAST & WEST: 17th


PROJECT #: SC2183
LOCATION #: 17
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Main			SOUTHBOUND Main			EASTBOUND 17th			WESTBOUND 17th				U-TURNS				
	LANES:	NL 2	NT 2	NR 1	SL 2	ST 2	SR 0	EL 2	ET 3	ER 0	WL 2	WT 3	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	19	107	16	23	233	12	27	300	16	64	222	6	1,045	0	0	1	3	4
	7:15 AM	27	164	20	37	287	13	26	301	22	64	294	5	1,260	0	0	0	1	1
	7:30 AM	33	190	37	48	288	14	20	302	14	88	337	4	1,375	0	0	0	2	2
	7:45 AM	36	218	62	61	268	23	29	304	14	100	347	4	1,466	0	0	1	1	2
	8:00 AM	30	180	42	47	232	19	39	305	10	69	309	5	1,287	0	0	1	3	4
	8:15 AM	29	130	15	43	220	13	30	287	23	48	255	15	1,108	0	0	2	2	4
	8:30 AM	16	125	35	34	201	17	26	265	24	39	220	11	1,013	0	0	1	3	4
	8:45 AM	22	138	14	30	195	15	29	218	17	32	192	18	920	0	0	1	2	3
	VOLUMES	212	1,252	241	323	1,924	126	226	2,282	140	504	2,176	68	9,474	0	0	7	17	24
	APPROACH %	12%	73%	14%	14%	81%	5%	9%	86%	5%	18%	79%	2%						
	APP/DEPART	1,705	/	1,539	2,373	/	2,551	2,648	/	2,863	2,748	/	2,521	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	126	752	161	193	1,075	69	114	1,212	60	321	1,287	18	5,388					
	APPROACH %	12%	72%	15%	14%	80%	5%	8%	87%	4%	20%	79%	1%						
	PEAK HR FACTOR		0.822			0.950			0.979			0.901		0.919					
	APP/DEPART	1,039	/	882	1,337	/	1,449	1,386	/	1,573	1,626	/	1,484	0					
PM	4:00 PM	39	236	54	33	164	28	43	273	20	47	263	17	1,217	0	1	2	3	6
	4:15 PM	56	253	49	40	188	30	48	300	26	37	259	20	1,306	0	0	2	1	3
	4:30 PM	47	243	49	44	196	26	47	283	15	50	279	24	1,303	0	1	2	2	5
	4:45 PM	45	255	63	42	193	22	56	313	18	55	291	16	1,369	0	0	1	2	3
	5:00 PM	47	257	58	45	172	37	67	328	13	34	249	11	1,318	0	0	8	0	8
	5:15 PM	52	254	36	46	175	41	49	325	22	32	228	16	1,276	0	0	2	1	3
	5:30 PM	46	242	41	51	176	31	46	291	18	37	299	13	1,291	0	0	2	0	2
	5:45 PM	38	263	40	50	158	19	59	276	22	41	280	7	1,253	0	0	3	2	5
	VOLUMES	370	2,003	390	351	1,422	234	415	2,389	154	333	2,148	124	10,333	0	2	22	11	35
	APPROACH %	13%	72%	14%	17%	71%	12%	14%	81%	5%	13%	82%	5%						
	APP/DEPART	2,763	/	2,522	2,007	/	1,898	2,958	/	3,139	2,605	/	2,774	0					
	BEGIN PEAK HR		4:15 PM																
	VOLUMES	195	1,008	219	171	749	115	218	1,224	72	176	1,078	71	5,296					
	APPROACH %	14%	71%	15%	17%	72%	11%	14%	81%	5%	13%	81%	5%						
	PEAK HR FACTOR		0.979			0.973			0.928			0.915		0.967					
	APP/DEPART	1,422	/	1,285	1,035	/	992	1,514	/	1,618	1,325	/	1,401	0					

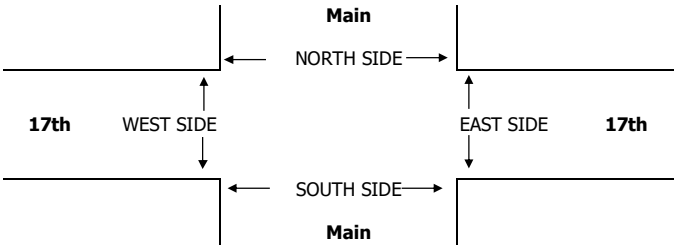

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:15 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:15 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Thu, Feb 11, 16

LOCATION: Santa Ana
NORTH & SOUTH: Main
EAST & WEST: Civic Center


PROJECT #: SC0846
LOCATION #: 14
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Main			SOUTHBOUND Main			EASTBOUND Civic Center			WESTBOUND Civic Center				U-TURNS				
	LANES:	NL 1	NT 2	NR 0	SL 1	ST 2	SR 0	EL 1	ET 2	ER 0	WL 1	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	19	158	9	12	248	29	8	80	16	6	65	3	653	0	0	0	0	0
	7:15 AM	35	205	12	13	242	21	19	106	27	8	125	12	825	0	0	0	0	0
	7:30 AM	35	219	13	15	251	47	20	112	16	9	137	5	879	0	0	0	0	0
	7:45 AM	30	234	25	16	257	47	20	159	25	14	166	10	1,003	0	0	0	0	0
	8:00 AM	32	207	25	12	251	37	27	146	27	10	115	5	894	0	0	0	0	0
	8:15 AM	32	188	17	17	254	42	19	64	24	6	80	14	757	0	0	0	0	0
	8:30 AM	31	189	10	13	251	22	15	63	39	9	68	5	715	0	0	0	0	0
	8:45 AM	20	175	8	8	203	22	17	53	32	3	49	5	595	0	0	0	0	0
	VOLUMES	234	1,575	119	106	1,957	267	145	783	206	65	805	59	6,321	0	0	0	0	0
	APPROACH %	12%	82%	6%	5%	84%	11%	13%	69%	18%	7%	87%	6%						
	APP/DEPART	1,928	/	1,779	2,330	/	2,228	1,134	/	1,008	929	/	1,306	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	132	865	75	56	1,001	152	86	523	95	41	543	32	3,601					
	APPROACH %	12%	81%	7%	5%	83%	13%	12%	74%	13%	7%	88%	5%						
	PEAK HR FACTOR		0.927			0.945			0.863			0.811		0.898					
	APP/DEPART	1,072	/	983	1,209	/	1,137	704	/	654	616	/	827	0					
PM	4:00 PM	17	275	24	10	199	10	30	126	29	14	59	5	798	0	0	0	0	0
	4:15 PM	17	238	13	9	201	19	34	118	22	7	57	12	747	0	0	0	0	0
	4:30 PM	27	291	12	6	227	10	39	187	24	6	77	14	920	1	0	0	0	1
	4:45 PM	17	278	25	18	240	21	51	228	22	6	87	9	1,002	0	0	0	0	0
	5:00 PM	18	245	24	23	248	18	42	241	36	16	119	4	1,034	0	0	0	0	0
	5:15 PM	23	268	29	11	241	11	20	190	18	8	86	10	915	0	0	0	0	0
	5:30 PM	24	258	16	8	210	21	14	120	30	17	76	17	811	0	0	0	0	0
	5:45 PM	23	271	16	13	226	15	11	97	15	9	76	9	781	0	0	0	0	0
	VOLUMES	166	2,124	159	98	1,792	125	241	1,307	196	83	637	80	7,008	1	0	0	0	1
	APPROACH %	7%	87%	6%	5%	89%	6%	14%	75%	11%	10%	80%	10%						
	APP/DEPART	2,449	/	2,445	2,015	/	2,072	1,744	/	1,564	800	/	927	0					
	BEGIN PEAK HR		4:30 PM																
	VOLUMES	85	1,082	90	58	956	60	152	846	100	36	369	37	3,871					
	APPROACH %	7%	86%	7%	5%	89%	6%	14%	77%	9%	8%	83%	8%						
	PEAK HR FACTOR		0.952			0.929			0.861			0.795		0.936					
	APP/DEPART	1,257	/	1,271	1,074	/	1,093	1,098	/	994	442	/	513	0					

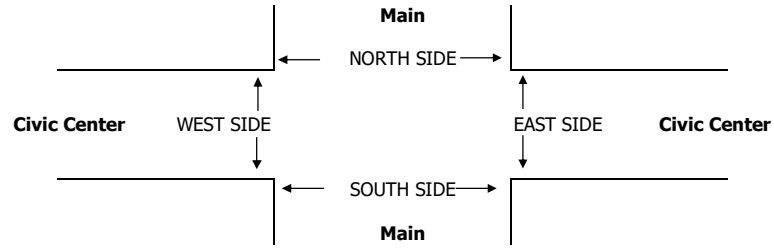

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	9	1	2	3	15	9	0	2	3	14	0	1	0	0	1
	7:15 AM	1	1	15	3	20	1	1	14	3	19	0	0	1	0	1
	7:30 AM	1	7	6	2	16	0	6	4	2	12	1	1	2	0	4
	7:45 AM	0	6	6	6	18	0	4	6	4	14	0	2	0	2	4
	8:00 AM	8	5	8	1	22	8	2	8	1	19	0	3	0	0	3
	8:15 AM	18	1	8	8	35	17	1	6	7	31	1	0	2	1	4
	8:30 AM	13	6	7	7	33	13	6	5	7	31	0	0	2	0	2
	8:45 AM	12	0	10	5	27	12	0	7	4	23	0	0	3	1	4
	TOTAL	62	27	62	35	186	60	20	52	31	163	2	7	10	4	23
PM	4:00 PM	6	6	8	7	27	6	5	5	7	23	0	1	3	0	4
	4:15 PM	7	4	7	19	37	7	4	6	15	32	0	0	1	4	5
	4:30 PM	10	7	15	6	38	10	6	14	5	35	0	1	1	1	3
	4:45 PM	6	4	11	3	24	6	3	9	3	21	0	1	2	0	3
	5:00 PM	48	9	16	1	74	48	5	14	1	68	0	4	2	0	6
	5:15 PM	5	5	7	1	18	4	2	7	1	14	1	3	0	0	4
	5:30 PM	8	3	6	2	19	8	3	6	2	19	0	0	0	0	0
	5:45 PM	6	3	15	1	25	6	0	11	1	18	0	3	4	0	7
	TOTAL	96	41	85	40	262	95	28	72	35	230	1	13	13	5	32

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Thu, Feb 11, 16

LOCATION: Santa Ana
NORTH & SOUTH: Main
EAST & WEST: Santa Ana


PROJECT #: SC0846
LOCATION #: 26
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Main			SOUTHBOUND Main			EASTBOUND Santa Ana			WESTBOUND Santa Ana				U-TURNS				
	LANES:	NL 1	NT 2	NR X	SL X	ST 2	SR 0	EL X	ET X	ER X	WL 0.5	WT 2	WR 0.5	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	10	149	0	0	240	25	0	0	0	14	152	6	596	0	0	0	0	0
	7:15 AM	16	220	0	0	273	22	0	0	0	19	153	14	717	0	0	0	0	0
	7:30 AM	16	241	0	0	270	26	0	0	0	15	233	15	816	0	0	0	0	0
	7:45 AM	15	334	0	0	258	17	0	0	0	8	203	15	850	0	0	0	0	0
	8:00 AM	18	245	0	0	262	29	0	0	0	16	225	18	813	0	0	0	0	0
	8:15 AM	11	207	0	0	235	42	0	0	0	17	148	15	675	0	0	0	0	0
	8:30 AM	15	217	0	0	288	28	0	0	0	15	144	9	716	0	0	0	0	0
	8:45 AM	15	167	0	0	203	26	0	0	0	13	116	14	554	0	0	0	0	0
	VOLUMES	116	1,780	0	0	2,029	215	0	0	0	117	1,374	106	5,737	0	0	0	0	0
	APPROACH %	6%	94%	0%	0%	90%	10%	0%	0%	0%	7%	86%	7%						
	APP/DEPART	1,896	/	1,886	2,244	/	2,146	0	/	0	1,597	/	1,705	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	65	1,040	0	0	1,063	94	0	0	0	58	814	62	3,196					
	APPROACH %	6%	94%	0%	0%	92%	8%	0%	0%	0%	6%	87%	7%						
	PEAK HR FACTOR		0.792			0.977			0.000			0.888		0.940					
	APP/DEPART	1,105	/	1,102	1,157	/	1,121	0	/	0	934	/	973	0					
PM	4:00 PM	12	261	0	0	219	9	0	0	0	17	146	18	682	0	0	0	0	0
	4:15 PM	10	251	0	0	218	12	0	0	0	2	113	13	619	0	0	0	0	0
	4:30 PM	12	302	0	0	217	7	0	0	0	15	122	17	692	0	0	0	0	0
	4:45 PM	10	330	0	0	247	12	0	0	0	15	157	19	790	0	0	0	0	0
	5:00 PM	16	250	0	0	300	15	0	0	0	18	127	25	751	0	0	0	0	0
	5:15 PM	14	319	0	0	263	12	0	0	0	15	177	20	820	0	0	0	0	0
	5:30 PM	11	282	0	0	230	11	0	0	0	14	169	17	734	0	0	0	0	0
	5:45 PM	6	254	0	0	252	10	0	0	0	15	147	20	704	0	0	0	0	0
	VOLUMES	91	2,249	0	0	1,946	88	0	0	0	111	1,158	149	5,792	0	0	0	0	0
	APPROACH %	4%	96%	0%	0%	96%	4%	0%	0%	0%	8%	82%	11%						
	APP/DEPART	2,340	/	2,398	2,034	/	2,057	0	/	0	1,418	/	1,337	0					
	BEGIN PEAK HR		4:45 PM																
	VOLUMES	51	1,181	0	0	1,040	50	0	0	0	62	630	81	3,095					
	APPROACH %	4%	96%	0%	0%	95%	5%	0%	0%	0%	8%	82%	10%						
	PEAK HR FACTOR		0.906			0.865			0.000			0.912		0.944					
	APP/DEPART	1,232	/	1,262	1,090	/	1,102	0	/	0	773	/	731	0					

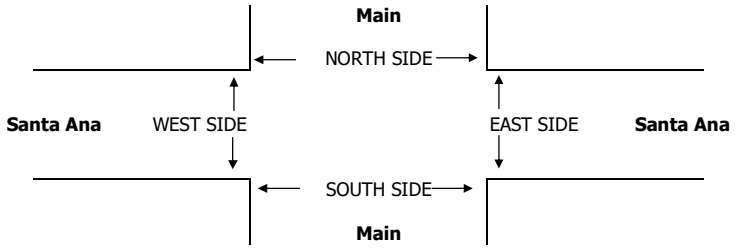

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	7	7	2	4	20	4	5	2	4	15	3	2	0	0	5
	7:15 AM	11	13	17	7	48	11	11	14	7	43	0	2	3	0	5
	7:30 AM	7	20	22	6	55	6	18	21	6	51	1	2	1	0	4
	7:45 AM	6	5	6	6	23	6	5	6	5	22	0	0	0	1	1
	8:00 AM	8	5	8	4	25	6	4	7	3	20	2	1	1	1	5
	8:15 AM	4	3	5	6	18	3	2	5	4	14	1	1	0	2	4
	8:30 AM	4	2	7	8	21	2	2	6	7	17	2	0	1	1	4
	8:45 AM	1	0	6	2	9	1	0	3	2	6	0	0	3	0	3
	TOTAL	48	55	73	43	219	39	47	64	38	188	9	8	9	5	31
PM	4:00 PM	7	5	6	8	26	5	4	5	6	20	2	1	1	2	6
	4:15 PM	4	4	7	14	29	4	4	7	14	29	0	0	0	0	0
	4:30 PM	11	8	10	15	44	8	7	9	13	37	3	1	1	2	7
	4:45 PM	12	2	11	9	34	11	2	10	6	29	1	0	1	3	5
	5:00 PM	9	8	6	21	44	8	6	5	20	39	1	2	1	1	5
	5:15 PM	8	18	6	21	53	8	18	6	21	53	0	0	0	0	0
	5:30 PM	12	2	10	9	33	10	1	9	7	27	2	1	1	2	6
	5:45 PM	3	3	10	11	27	3	2	8	9	22	0	1	2	2	5
	TOTAL	66	50	66	108	290	57	44	59	96	256	9	6	7	12	34

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Thu, Feb 11, 16

LOCATION: Santa Ana
NORTH & SOUTH: Main
EAST & WEST: 4th


PROJECT #: SC0846
LOCATION #: 25
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Main			SOUTHBOUND Main			EASTBOUND 4th			WESTBOUND 4th				U-TURNS				
	LANES:	NL 0	NT 2	NR 0	SL 0	ST 2	SR 0	EL 0	ET 1	ER 0	WL 0	WT 1	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	0	169	4	0	244	8	0	12	5	0	10	6	458	0	0	0	0	0
	7:15 AM	0	202	5	0	276	4	0	21	2	0	18	6	534	0	0	0	0	0
	7:30 AM	0	251	4	0	258	7	0	25	2	0	27	9	583	0	0	0	0	0
	7:45 AM	0	271	9	0	261	3	0	25	3	0	35	5	612	0	0	0	0	0
	8:00 AM	0	214	4	0	260	11	0	18	6	0	29	6	548	0	0	0	0	0
	8:15 AM	0	184	8	2	239	11	0	16	7	0	48	7	522	0	0	0	0	0
	8:30 AM	0	208	7	0	272	8	1	14	3	1	43	11	568	0	0	0	0	0
	8:45 AM	0	168	5	0	216	5	0	13	5	1	29	13	455	0	0	0	0	0
	VOLUMES	0	1,667	46	2	2,026	57	1	144	33	2	239	63	4,280	0	0	0	0	0
	APPROACH %	0%	97%	3%	0%	97%	3%	1%	81%	19%	1%	79%	21%						
	APP/DEPART	1,713	/	1,731	2,085	/	2,061	178	/	192	304	/	296	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	0	938	22	0	1,055	25	0	89	13	0	109	26	2,277					
	APPROACH %	0%	98%	2%	0%	98%	2%	0%	87%	13%	0%	81%	19%						
	PEAK HR FACTOR		0.857			0.964			0.911			0.844		0.930					
	APP/DEPART	960	/	964	1,080	/	1,068	102	/	111	135	/	134	0					
PM	4:00 PM	0	254	12	0	206	7	0	32	12	0	37	19	579	0	0	0	0	0
	4:15 PM	2	239	9	0	195	7	1	27	6	1	41	8	536	0	0	0	0	0
	4:30 PM	0	261	20	0	224	8	1	24	10	2	40	10	600	0	0	0	0	0
	4:45 PM	0	270	16	0	220	13	0	27	8	1	43	14	612	0	0	0	0	0
	5:00 PM	0	235	8	0	274	12	2	17	17	3	38	14	620	0	0	0	0	0
	5:15 PM	0	259	7	0	257	10	1	27	14	0	45	8	628	0	0	0	0	0
	5:30 PM	0	249	17	0	245	10	1	23	13	0	47	8	613	0	0	0	0	0
	5:45 PM	0	247	10	0	220	14	0	17	22	2	38	22	592	0	0	0	0	0
	VOLUMES	2	2,014	99	0	1,841	81	6	194	102	9	329	103	4,780	0	0	0	0	0
	APPROACH %	0%	95%	5%	0%	96%	4%	2%	64%	34%	2%	75%	23%						
	APP/DEPART	2,115	/	2,123	1,922	/	1,952	302	/	293	441	/	412	0					
	BEGIN PEAK HR		4:45 PM																
	VOLUMES	0	1,013	48	0	996	45	4	94	52	4	173	44	2,473					
	APPROACH %	0%	95%	5%	0%	96%	4%	3%	63%	35%	2%	78%	20%						
	PEAK HR FACTOR		0.927			0.910			0.893			0.953		0.984					
	APP/DEPART	1,061	/	1,061	1,041	/	1,052	150	/	142	221	/	218	0					

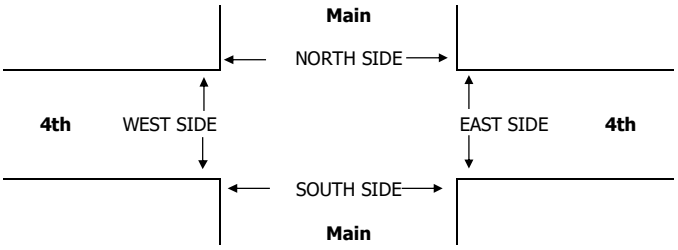

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	4	6	1	3	14	3	5	1	3	12	1	1	0	0	2
	7:15 AM	8	0	9	3	20	7	0	9	3	19	1	0	0	0	1
	7:30 AM	4	6	5	4	19	4	5	1	4	14	0	1	4	0	5
	7:45 AM	3	12	9	5	29	3	11	8	4	26	0	1	1	1	3
	8:00 AM	6	14	3	4	27	6	14	3	4	27	0	0	0	0	0
	8:15 AM	10	17	2	7	36	10	13	1	7	31	0	4	1	0	5
	8:30 AM	15	12	13	12	52	13	11	12	12	48	2	1	1	0	4
	8:45 AM	10	12	7	8	37	8	9	4	8	29	2	3	3	0	8
	TOTAL	60	79	49	46	234	54	68	39	45	206	6	11	10	1	28
PM	4:00 PM	32	44	24	26	126	32	44	23	24	123	0	0	1	2	3
	4:15 PM	48	61	28	31	168	46	60	27	31	164	2	1	1	0	4
	4:30 PM	39	76	31	39	185	37	71	27	34	169	2	5	4	5	16
	4:45 PM	32	66	18	23	139	31	66	16	23	136	1	0	2	0	3
	5:00 PM	51	42	13	28	134	51	40	12	26	129	0	2	1	2	5
	5:15 PM	29	45	16	24	114	28	45	16	22	111	1	0	0	2	3
	5:30 PM	39	71	22	33	165	35	71	21	29	156	4	0	1	4	9
	5:45 PM	34	41	20	21	116	34	40	17	20	111	0	1	3	1	5
	TOTAL	304	446	172	225	1,147	294	437	159	209	1,099	10	9	13	16	48

T218

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 14, 19

LOCATION: Santa Ana
NORTH & SOUTH: Main
EAST & WEST: 1st


PROJECT #: SC2183
LOCATION #: 18
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N ◄ W E ► S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Main			SOUTHBOUND Main			EASTBOUND 1st			WESTBOUND 1st				U-TURNS				
	LANES:	NL 1	NT 2	NR 0	SL 1	ST 2	SR 1	EL 1	ET 3	ER 0	WL 1	WT 3	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	21	110	8	17	205	15	24	398	30	14	167	9	1,018	0	0	0	0	0
	7:15 AM	23	143	14	23	226	13	26	298	29	25	251	9	1,080	0	0	0	2	2
	7:30 AM	37	166	8	23	213	23	28	362	44	21	285	13	1,223	0	0	0	0	0
	7:45 AM	27	168	13	23	232	17	30	362	42	21	311	22	1,268	0	0	0	0	0
	8:00 AM	27	113	24	18	202	11	33	357	30	20	239	16	1,090	0	0	0	0	0
	8:15 AM	35	119	15	24	198	12	21	326	40	15	240	19	1,064	0	0	0	0	0
	8:30 AM	34	132	20	18	225	12	31	318	36	26	214	14	1,080	0	0	0	0	0
	8:45 AM	14	128	16	22	193	16	35	276	45	23	197	19	984	0	0	0	0	0
	VOLUMES	218	1,079	118	168	1,694	119	228	2,697	296	165	1,904	121	8,807	0	0	0	2	2
	APPROACH %	15%	76%	8%	8%	86%	6%	7%	84%	9%	8%	87%	6%						
	APP/DEPART	1,415	/	1,428	1,981	/	2,153	3,221	/	2,985	2,190	/	2,241	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	114	590	59	87	873	64	117	1,379	145	87	1,086	60	4,661					
	APPROACH %	15%	77%	8%	8%	85%	6%	7%	84%	9%	7%	88%	5%						
	PEAK HR FACTOR		0.904			0.941			0.945			0.871		0.919					
	APP/DEPART	763	/	767	1,024	/	1,103	1,641	/	1,527	1,233	/	1,264	0					
PM	4:00 PM	34	204	15	34	135	30	34	233	26	32	287	17	1,081	0	0	1	1	2
	4:15 PM	38	219	24	35	171	34	37	272	19	26	306	10	1,191	0	0	0	2	2
	4:30 PM	33	214	20	35	160	32	35	285	25	26	294	19	1,178	0	0	0	1	1
	4:45 PM	43	191	20	48	150	32	39	312	18	18	306	24	1,201	0	0	0	0	0
	5:00 PM	40	206	15	40	173	30	21	272	26	31	316	20	1,190	0	0	0	0	0
	5:15 PM	43	197	21	43	169	38	30	315	18	32	316	23	1,245	0	0	1	0	1
	5:30 PM	41	223	15	42	172	41	28	302	27	31	324	21	1,267	0	0	0	0	0
	5:45 PM	39	194	17	43	160	41	22	291	25	26	302	30	1,190	0	0	0	0	0
	VOLUMES	311	1,648	147	320	1,290	278	246	2,282	184	222	2,451	164	9,543	0	0	2	4	6
	APPROACH %	15%	78%	7%	17%	68%	15%	9%	84%	7%	8%	86%	6%						
	APP/DEPART	2,106	/	2,056	1,888	/	1,692	2,712	/	2,753	2,837	/	3,042	0					
	BEGIN PEAK HR		4:45 PM																
	VOLUMES	167	817	71	173	664	141	118	1,201	89	112	1,262	88	4,903					
	APPROACH %	16%	77%	7%	18%	68%	14%	8%	85%	6%	8%	86%	6%						
	PEAK HR FACTOR		0.945			0.959			0.954			0.972		0.967					
	APP/DEPART	1,055	/	1,022	978	/	865	1,408	/	1,445	1,462	/	1,571	0					

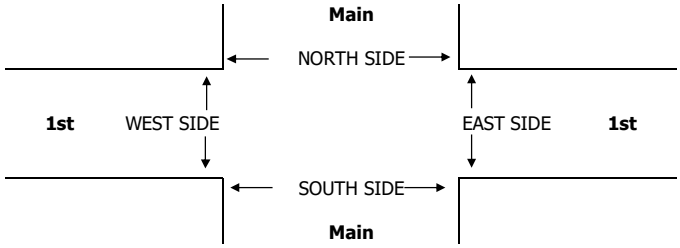

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:15 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:45 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Thu, Feb 11, 16

LOCATION: Santa Ana
NORTH & SOUTH: Main
EAST & WEST: McFadden


PROJECT #: SC0846
LOCATION #: 37
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Main			SOUTHBOUND Main			EASTBOUND McFadden			WESTBOUND McFadden				U-TURNS				
	LANES:	NL 1	NT 2	NR 0	SL 1	ST 2	SR 0	EL 1	ET 1	ER 0	WL 1	WT 1	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	14	149	6	40	242	6	5	93	5	18	70	21	669	0	0	0	0	0
	7:15 AM	15	179	10	47	309	3	8	97	12	30	99	31	840	0	0	0	0	0
	7:30 AM	26	234	5	36	337	8	12	93	11	40	96	22	920	0	0	0	0	0
	7:45 AM	27	216	15	46	343	5	12	98	6	32	87	24	911	0	0	0	0	0
	8:00 AM	17	176	10	39	321	9	8	92	12	32	76	25	817	0	0	0	0	0
	8:15 AM	17	153	14	42	318	4	8	84	10	8	51	11	720	0	0	0	0	0
	8:30 AM	22	173	11	25	247	14	14	68	11	11	49	28	673	0	0	0	0	0
	8:45 AM	19	148	7	30	302	8	9	68	15	14	79	8	707	0	0	0	0	0
	VOLUMES	157	1,428	78	305	2,419	57	76	693	82	185	607	170	6,257	0	0	0	0	0
	APPROACH %	9%	86%	5%	11%	87%	2%	9%	81%	10%	19%	63%	18%						
	APP/DEPART	1,663	/	1,674	2,781	/	2,686	851	/	1,076	962	/	821	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	85	805	40	168	1,310	25	40	380	41	134	358	102	3,488					
	APPROACH %	9%	87%	4%	11%	87%	2%	9%	82%	9%	23%	60%	17%						
	PEAK HR FACTOR		0.877			0.954			0.985			0.928		0.948					
	APP/DEPART	930	/	947	1,503	/	1,485	461	/	588	594	/	468	0					
PM	4:00 PM	35	268	13	30	175	13	18	80	13	17	112	31	805	0	0	0	0	0
	4:15 PM	37	291	8	38	174	14	12	77	15	22	123	57	868	0	0	0	0	0
	4:30 PM	31	283	17	33	195	19	18	77	7	20	121	49	870	0	0	0	0	0
	4:45 PM	34	283	11	27	189	10	21	83	10	21	121	40	850	0	0	0	0	0
	5:00 PM	39	286	12	33	198	7	17	82	9	10	117	60	870	0	0	0	0	0
	5:15 PM	32	256	17	29	229	21	18	84	11	23	115	41	876	0	0	0	1	1
	5:30 PM	35	292	28	36	276	23	20	68	10	27	96	49	960	0	0	0	0	0
	5:45 PM	34	268	11	30	169	12	19	97	10	21	133	57	861	0	0	0	0	0
	VOLUMES	277	2,227	117	256	1,605	119	143	648	85	161	938	384	6,960	0	0	0	1	1
	APPROACH %	11%	85%	4%	13%	81%	6%	16%	74%	10%	11%	63%	26%						
	APP/DEPART	2,621	/	2,754	1,980	/	1,850	876	/	1,022	1,483	/	1,334	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	140	1,102	68	128	872	63	74	331	40	81	461	207	3,567					
	APPROACH %	11%	84%	5%	12%	82%	6%	17%	74%	9%	11%	62%	28%						
	PEAK HR FACTOR		0.923			0.793			0.883			0.887		0.929					
	APP/DEPART	1,310	/	1,383	1,063	/	992	445	/	528	749	/	664	0					

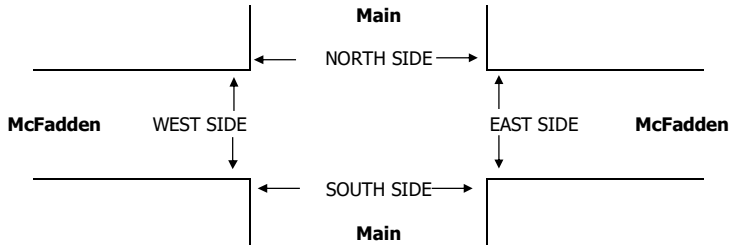

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	6	2	5	4	17	4	2	4	4	14	2	0	1	0	3
	7:15 AM	4	5	11	5	25	4	5	11	5	25	0	0	0	0	0
	7:30 AM	9	16	20	20	65	8	16	18	18	60	1	0	2	2	5
	7:45 AM	9	9	30	32	80	8	9	29	29	75	1	0	1	3	5
	8:00 AM	7	14	12	25	58	6	13	12	25	56	1	1	0	0	2
	8:15 AM	6	5	8	13	32	5	5	8	11	29	1	0	0	2	3
	8:30 AM	7	6	9	4	26	4	3	8	3	18	3	3	1	1	8
	8:45 AM	4	2	13	19	38	2	2	12	14	30	2	0	1	5	8
	TOTAL	52	59	108	122	341	41	55	102	109	307	11	4	6	13	34
PM	4:00 PM	10	11	20	22	63	8	10	18	17	53	2	1	2	5	10
	4:15 PM	5	8	13	17	43	4	6	9	17	36	1	2	4	0	7
	4:30 PM	14	13	26	22	75	12	8	22	20	62	2	5	4	2	13
	4:45 PM	21	30	29	15	95	18	25	29	13	85	3	5	0	2	10
	5:00 PM	11	3	12	9	35	10	2	8	4	24	1	1	4	5	11
	5:15 PM	13	13	19	18	63	12	12	18	16	58	1	1	1	2	5
	5:30 PM	9	10	15	12	46	8	9	14	12	43	1	1	1	0	3
	5:45 PM	12	13	8	27	60	10	10	8	25	53	2	3	0	2	7
	TOTAL	95	101	142	142	480	82	82	126	124	414	13	19	16	18	66

T218

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Thu, May 16, 19

LOCATION: Santa Ana
NORTH & SOUTH: Main
EAST & WEST: Edinger


PROJECT #: SC2183
LOCATION #: 19
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND (Main)			SOUTHBOUND (Main)			EASTBOUND (Edinger)			WESTBOUND (Edinger)				U-TURNS				
	LANES:	NL 1	NT 2	NR 0	SL 1	ST 2	SR 0	EL 1	ET 2	ER 1	WL 1	WT 3	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	18	115	19	34	247	18	14	241	38	20	149	15	928	0	0	0	0	0
	7:15 AM	21	158	17	47	248	14	15	243	35	28	184	26	1,036	0	0	2	3	5
	7:30 AM	27	171	18	61	265	17	9	246	38	31	159	21	1,063	0	0	0	2	2
	7:45 AM	28	128	13	59	244	12	23	250	28	38	165	24	1,012	0	0	1	2	3
	8:00 AM	31	153	18	58	284	11	27	222	28	23	193	15	1,063	0	0	0	1	1
	8:15 AM	23	126	19	47	265	9	19	212	21	17	194	22	974	0	0	0	1	1
	8:30 AM	21	102	21	34	233	13	32	220	37	24	141	16	894	0	0	0	3	3
	8:45 AM	10	104	21	22	272	18	18	183	25	27	100	20	820	0	0	1	2	3
	VOLUMES	179	1,057	146	362	2,058	112	157	1,817	250	208	1,285	159	7,790	0	0	4	14	18
	APPROACH %	13%	76%	11%	14%	81%	4%	7%	82%	11%	13%	78%	10%						
	APP/DEPART	1,382	/	1,369	2,532	/	2,502	2,224	/	2,339	1,652	/	1,580	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	107	610	66	225	1,041	54	74	961	129	120	701	86	4,174					
	APPROACH %	14%	78%	8%	17%	79%	4%	6%	83%	11%	13%	77%	9%						
	PEAK HR FACTOR		0.906			0.935			0.967			0.953		0.982					
	APP/DEPART	783	/	767	1,320	/	1,282	1,164	/	1,260	907	/	865	0					
PM	4:00 PM	21	237	17	32	121	22	41	171	26	20	297	39	1,044	0	0	0	0	0
	4:15 PM	27	226	11	34	133	34	38	180	26	28	316	31	1,084	0	0	1	1	2
	4:30 PM	23	253	14	21	139	9	21	195	17	18	328	27	1,065	0	0	1	2	3
	4:45 PM	14	272	13	20	146	30	29	160	15	13	297	30	1,039	0	0	0	0	0
	5:00 PM	29	250	12	39	137	13	34	164	23	23	330	29	1,083	0	0	2	2	4
	5:15 PM	33	243	15	33	148	20	36	203	23	27	325	32	1,138	0	0	0	2	2
	5:30 PM	18	259	9	28	180	26	22	194	24	23	320	33	1,136	0	0	1	1	2
	5:45 PM	18	287	11	20	137	23	33	183	13	23	308	38	1,094	0	0	0	2	2
	VOLUMES	183	2,027	102	227	1,141	177	254	1,450	167	175	2,521	259	8,683	0	0	5	10	15
	APPROACH %	8%	88%	4%	15%	74%	11%	14%	77%	9%	6%	85%	9%						
	APP/DEPART	2,312	/	2,535	1,545	/	1,473	1,871	/	1,789	2,955	/	2,886	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	98	1,039	47	120	602	82	125	744	83	96	1,283	132	4,451					
	APPROACH %	8%	88%	4%	15%	75%	10%	13%	78%	9%	6%	85%	9%						
	PEAK HR FACTOR		0.937			0.859			0.908			0.984		0.978					
	APP/DEPART	1,184	/	1,293	804	/	774	952	/	918	1,511	/	1,466	0					

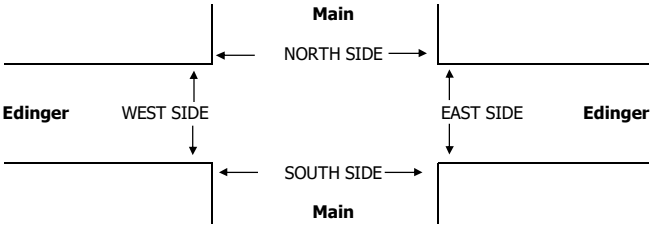

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:15 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	5:00 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 14, 19

LOCATION: Santa Ana
NORTH & SOUTH: Main
EAST & WEST: MacArthur


PROJECT #: SC2183
LOCATION #: 20
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N ◄ W E ► S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Main			SOUTHBOUND Main			EASTBOUND MacArthur			WESTBOUND MacArthur				U-TURNS				
	LANES:	NL 2	NT 3	NR 1	SL 2	ST 3	SR 1	EL 2	ET 3	ER 1	WL 2	WT 3	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	11	59	34	159	178	36	35	308	35	43	109	54	1,061	3	8	7	0	18
	7:15 AM	15	53	64	156	193	54	32	358	58	31	106	66	1,186	3	5	1	0	9
	7:30 AM	12	84	67	188	221	66	60	372	61	42	123	40	1,336	2	16	2	1	21
	7:45 AM	13	88	72	157	233	40	84	349	72	36	109	46	1,299	4	8	2	1	15
	8:00 AM	13	82	58	137	192	30	61	300	58	35	92	63	1,121	3	7	1	1	12
	8:15 AM	12	63	43	146	217	43	50	304	73	41	95	47	1,134	1	6	4	1	12
	8:30 AM	13	53	63	131	216	31	53	339	72	36	92	42	1,141	4	3	2	4	13
	8:45 AM	13	49	65	129	198	37	44	301	75	40	88	40	1,079	4	6	2	3	15
	VOLUMES	102	531	466	1,203	1,648	337	419	2,631	504	304	814	398	9,357	24	59	21	11	115
	APPROACH %	9%	48%	42%	38%	52%	11%	12%	74%	14%	20%	54%	26%						
	APP/DEPART	1,099	/	1,386	3,188	/	2,469	3,554	/	4,252	1,516	/	1,250	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	53	307	261	638	839	190	237	1,379	249	144	430	215	4,942					
	APPROACH %	9%	49%	42%	38%	50%	11%	13%	74%	13%	18%	54%	27%						
	PEAK HR FACTOR		0.897			0.877			0.923			0.962		0.925					
	APP/DEPART	621	/	789	1,667	/	1,241	1,865	/	2,245	789	/	667	0					
PM	4:00 PM	97	244	95	68	71	61	51	132	18	34	362	125	1,358	5	2	0	3	10
	4:15 PM	88	277	79	69	85	55	49	145	17	36	405	118	1,423	3	6	3	2	14
	4:30 PM	113	256	78	67	85	67	65	131	14	43	373	107	1,399	7	2	3	2	14
	4:45 PM	109	215	85	75	87	52	72	150	16	43	384	133	1,421	6	8	11	2	27
	5:00 PM	118	285	75	58	81	65	66	153	10	43	408	97	1,459	8	4	3	2	17
	5:15 PM	123	333	89	76	82	80	70	180	15	51	397	107	1,603	3	8	4	1	16
	5:30 PM	125	272	77	72	98	63	79	143	16	49	381	123	1,498	6	10	4	3	23
	5:45 PM	117	267	76	74	103	67	80	130	17	53	368	124	1,476	4	6	5	2	17
	VOLUMES	890	2,149	654	559	692	510	532	1,164	123	352	3,078	934	11,637	42	46	33	17	138
	APPROACH %	24%	58%	18%	32%	39%	29%	29%	64%	7%	8%	71%	21%						
	APP/DEPART	3,693	/	3,628	1,761	/	1,192	1,819	/	2,348	4,364	/	4,469	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	483	1,157	317	280	364	275	295	606	58	196	1,554	451	6,036					
	APPROACH %	25%	59%	16%	30%	40%	30%	31%	63%	6%	9%	71%	20%						
	PEAK HR FACTOR		0.898			0.942			0.905			0.991		0.941					
	APP/DEPART	1,957	/	1,915	919	/	631	959	/	1,183	2,201	/	2,307	0					

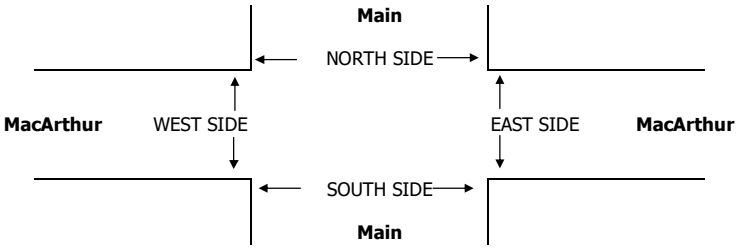

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:15 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	5:00 PM					0	0	0	0	0					

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: PENN WAY
E-W Direction: 17TH STREET

File Name : H1702011
Site Code : 00000000
Start Date : 2/9/2017
Page No : 1

Groups Printed- Turning Movements

	DEAD END Southbound			17TH STREET Westbound				PENN WAY Northbound				17TH STREET Eastbound			
Start Time	Right	Thru	Left	Right	Thru	Left	Peds	Right	Thru	Left	Peds	Right	Thru	Left	Int. Total
07:00	0	0	0	0	298	46	0	44	0	7	0	164	280	0	839
07:15	0	0	0	0	394	55	0	70	0	10	0	163	260	0	952
07:30	0	0	0	0	471	47	0	53	0	6	0	165	321	0	1063
07:45	0	0	0	0	461	68	1	50	0	14	0	162	288	0	1044
Total	0	0	0	0	1624	216	1	217	0	37	0	654	1149	0	3898
08:00	0	0	0	0	345	37	0	37	0	11	0	122	332	0	884
08:15	0	0	0	0	280	37	0	38	0	7	0	137	280	0	779
08:30	0	0	0	0	299	32	0	41	0	7	1	116	255	0	751
08:45	0	0	0	0	307	25	0	52	0	14	0	99	231	0	728
Total	0	0	0	0	1231	131	0	168	0	39	1	474	1098	0	3142
*** BREAK ***															
16:00	0	0	0	0	327	28	1	98	0	23	1	102	326	0	906
16:15	0	0	0	0	405	26	0	78	0	21	0	106	304	0	940
16:30	0	0	0	0	350	40	1	89	0	18	0	111	335	0	944
16:45	0	0	0	0	360	30	0	98	0	19	1	113	329	0	950
Total	0	0	0	0	1442	124	2	363	0	81	2	432	1294	0	3740
17:00	0	0	0	0	335	30	1	108	0	24	0	149	413	0	1060
17:15	0	0	0	0	394	27	0	99	0	27	0	118	388	0	1053
17:30	0	0	0	0	337	35	1	110	0	15	1	122	339	0	960
17:45	0	0	0	0	331	27	0	84	0	17	1	108	403	0	971
Total	0	0	0	0	1397	119	2	401	0	83	2	497	1543	0	4044
Grand Total	0	0	0	0	5694	590	5	1149	0	240	5	2057	5084	0	14824
Apprch %	0	0	0	0	90.5	9.4	0.1	82.4	0	17.2	0.4	28.8	71.2	0	
Total %	0	0	0	0	38.4	4	0	7.8	0	1.6	0	13.9	34.3	0	


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: PENN WAY
E-W Direction: 17TH STREET

File Name : H1702011
Site Code : 00000000
Start Date : 2/9/2017
Page No : 2

	DEAD END Southbound				17TH STREET Westbound					PENN WAY Northbound					17TH STREET Eastbound				
Start Time	Right	Thru	Left	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 07:00 to 08:45 - Peak 1 of 1																			
Peak Hour for Entire Intersection Begins at 07:15																			
07:15	0	0	0	0	0	394	55	0	449	70				80					
07:30	0	0	0	0	0	471	47	0	518	53	0	6	0	59	165	321	0	**486**	**1063**
07:45	**0**	**0**	**0**	**0**	**0**	**461**	**68**	**1**	**530**	**50**	**0**	**14**	0	64	162	288	0	450	1044
08:00	0	0	0	0	0	345	37	0	382	37	0	11	0	48	122	**332**	0	454	884
Total Volume	0	0	0	0	0	1671	207	1	1879	210	0	41	0	251	612	1201	0	1813	3943
% App. Total	0	0	0		0	88.9	11	0.1		83.7	0	16.3	0		33.8	66.2	0		
PHF	.000	.000	.000	.000	.000	.887	.761	.250	.886	.750	.000	.732	.000	.784	.927	.904	.000	.933	.927

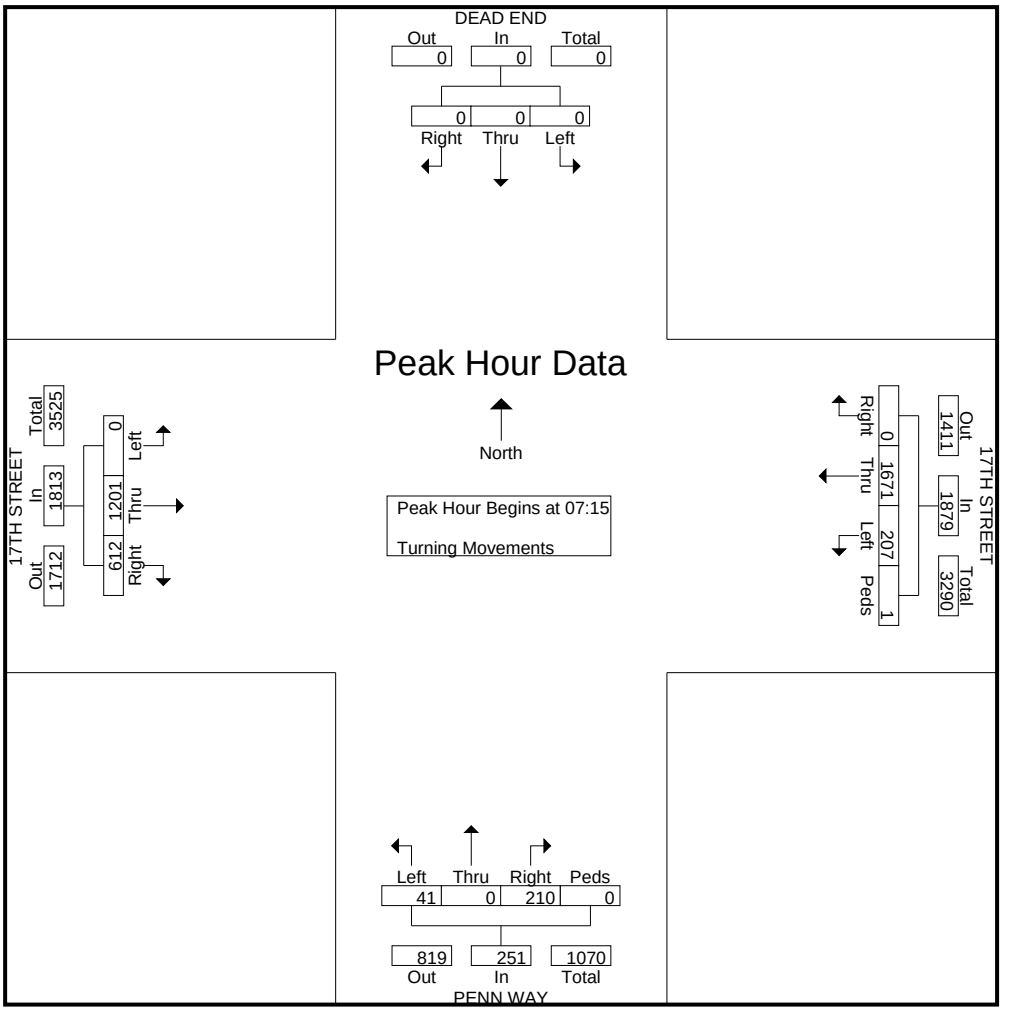


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: PENN WAY
E-W Direction: 17TH STREET

File Name : H1702011
Site Code : 00000000
Start Date : 2/9/2017
Page No : 3

	DEAD END Southbound				17TH STREET Westbound					PENN WAY Northbound					17TH STREET Eastbound				
Start Time	Right	Thru	Left	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 16:00 to 17:45 - Peak 1 of 1																			
Peak Hour for Entire Intersection Begins at 17:00																			
17:00	0	0	0	0	0	335	30	1	366	108	0	24	0	132	149	413	0	**562**	**1060**
17:15	**0**	**0**	**0**	**0**	**0**	**394**	**27**	**0**	**421**	**99**	**0**	**27**	0	126	118	388	0	506	1053
17:30	0	0	0	0	0	337	**35**	1	373	**110**	0	15	**1**	126	122	339	0	461	960
17:45	0	0	0	0	0	331	27	0	358	84	0	17	1	102	108	403	0	511	971
Total Volume	0	0	0	0	0	1397	119	2	1518	401	0	83	2	486	497	1543	0	2040	4044
% App. Total	0	0	0		0	92	7.8	0.1		82.5	0	17.1	0.4		24.4	75.6	0		
PHF	.000	.000	.000	.000	.000	.886	.850	.500	.901	.911	.000	.769	.500	.920	.834	.934	.000	.907	.954

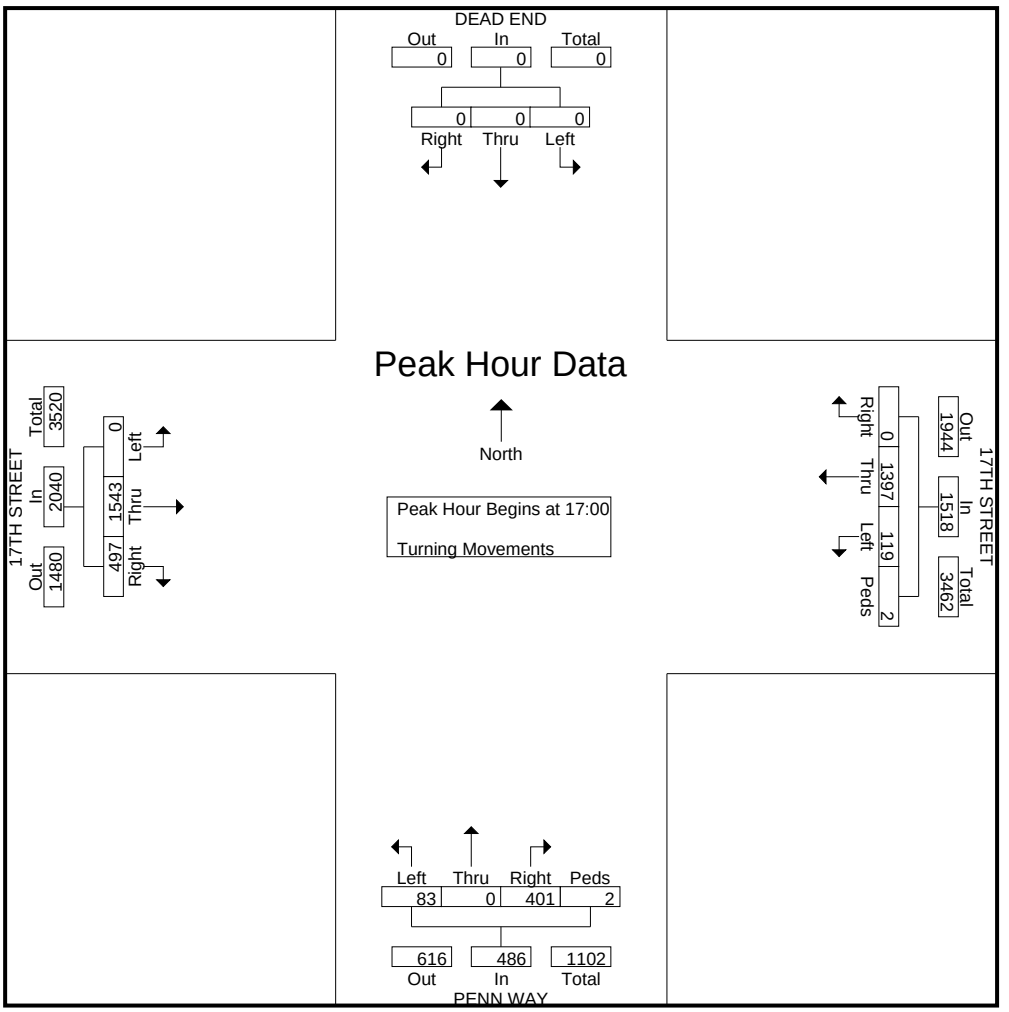

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 14, 19

LOCATION: Santa Ana
NORTH & SOUTH: I-5 NB Ramps
EAST & WEST: 17th


PROJECT #: SC2183
LOCATION #: 30
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — N / W / E / S

Add U-Turns to Left Turns

		NORTHBOUND I-5 NB Ramps			SOUTHBOUND I-5 NB Ramps			EASTBOUND 17th			WESTBOUND 17th				U-TURNS				
	LANES:	NL 1.5	NT 0.5	NR 1	SL 1	ST X	SR 1	EL 1	ET 3	ER 1	WL X	WT 3	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	129	11	9	7	0	51	21	188	65	0	200	1	682	0	0	3	0	3
	7:15 AM	180	16	1	15	0	54	15	255	65	0	259	4	864	0	0	5	0	5
	7:30 AM	220	5	10	14	0	69	21	266	91	0	304	7	1,007	0	0	4	0	4
	7:45 AM	201	8	6	15	0	100	29	276	108	0	365	4	1,112	0	0	7	0	7
	8:00 AM	159	5	4	12	0	69	33	232	108	0	304	4	930	0	0	11	0	11
	8:15 AM	151	5	11	9	0	48	20	227	52	0	206	6	735	0	0	2	0	2
	8:30 AM	130	12	11	5	0	45	23	223	60	0	201	8	718	0	0	4	0	4
	8:45 AM	110	8	3	12	0	35	16	192	67	0	202	9	654	0	0	5	0	5
	VOLUMES	1,280	70	55	89	0	471	178	1,859	616	0	2,041	43	6,702	0	0	41	0	41
	APPROACH %	91%	5%	4%	16%	0%	84%	7%	70%	23%	0%	98%	2%						
	APP/DEPART	1,405	/	250	560	/	616	2,653	/	2,003	2,084	/	3,833	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	760	34	21	56	0	292	98	1,029	372	0	1,232	19	3,913					
	APPROACH %	93%	4%	3%	16%	0%	84%	7%	69%	25%	0%	98%	2%						
	PEAK HR FACTOR		0.867			0.757			0.907			0.848		0.880					
	APP/DEPART	815	/	124	348	/	372	1,499	/	1,106	1,251	/	2,311	0					
PM	4:00 PM	81	9	5	5	0	24	26	240	157	0	353	10	910	0	0	8	0	8
	4:15 PM	88	14	4	15	0	33	28	251	128	0	374	9	944	0	0	5	0	5
	4:30 PM	86	8	3	6	0	33	27	228	202	0	367	13	973	0	0	3	0	3
	4:45 PM	83	12	6	9	0	32	29	286	176	0	377	7	1,017	0	0	8	0	8
	5:00 PM	84	11	4	20	0	33	34	323	208	0	391	11	1,119	0	0	6	0	6
	5:15 PM	80	23	4	9	0	42	29	262	141	0	303	9	902	0	0	4	0	4
	5:30 PM	71	14	6	11	0	39	31	241	113	0	361	14	901	0	0	4	0	4
	5:45 PM	94	12	7	17	0	34	29	273	93	0	341	5	905	0	0	10	0	10
	VOLUMES	667	103	39	92	0	270	233	2,104	1,218	0	2,867	78	7,671	0	0	48	0	48
	APPROACH %	82%	13%	5%	25%	0%	75%	7%	59%	34%	0%	97%	3%						
	APP/DEPART	809	/	366	362	/	1,218	3,555	/	2,235	2,945	/	3,852	0					
	BEGIN PEAK HR		4:15 PM																
	VOLUMES	341	45	17	50	0	131	118	1,088	714	0	1,509	40	4,053					
	APPROACH %	85%	11%	4%	28%	0%	72%	6%	57%	37%	0%	97%	3%						
	PEAK HR FACTOR		0.950			0.854			0.850			0.963		0.905					
	APP/DEPART	403	/	181	181	/	714	1,920	/	1,155	1,549	/	2,003	0					

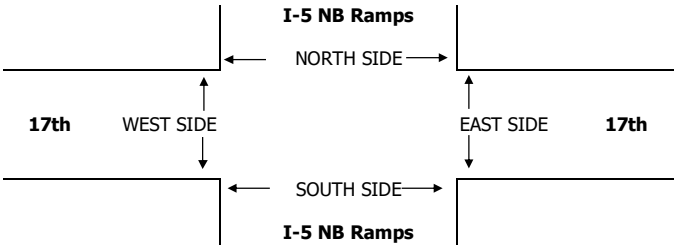

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR			7:15 AM			0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR			4:15 PM			0	0	0	0	0					

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: PENN WAY
E-W Direction: I-5 SB RAMPS

File Name : H1702012
Site Code : 00000000
Start Date : 2/9/2017

Groups Printed- Turning Movements

	PENN WAY Southbound			I-5 SB RAMPS Westbound			PENN WAY Northbound			DEAD END Eastbound			
Start Time	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	Int. Total
07:00	0	31	198	22	0	44	18	29	0	0	0	0	342
07:15	0	32	196	36	0	39	32	41	0	0	0	0	376
07:30	0	37	191	19	0	38	35	40	0	0	0	0	360
07:45	0	60	190	20	0	52	50	43	0	0	0	0	415
Total	0	160	775	97	0	173	135	153	0	0	0	0	1493
08:00	0	30	144	21	0	48	37	27	0	0	0	0	307
08:15	0	28	153	20	0	17	32	28	0	0	0	0	278
08:30	0	20	139	34	0	21	19	17	0	0	0	0	250
08:45	0	18	113	31	0	23	18	33	0	0	0	0	236
Total	0	96	549	106	0	109	106	105	0	0	0	0	1071
*** BREAK ***													
16:00	0	25	111	57	0	40	44	64	0	0	0	0	341
16:15	0	22	114	45	0	51	37	59	0	0	0	0	328
16:30	0	33	105	31	0	46	69	74	0	0	0	0	358
16:45	0	30	130	43	0	52	51	70	0	0	0	0	376
Total	0	110	460	176	0	189	201	267	0	0	0	0	1403
17:00	0	32	152	40	0	41	77	94	0	0	0	0	436
17:15	0	30	119	34	0	37	63	92	0	0	0	0	375
17:30	0	31	132	28	0	39	40	96	0	0	0	0	366
17:45	0	39	112	27	0	29	22	74	0	0	0	0	303
Total	0	132	515	129	0	146	202	356	0	0	0	0	1480
Grand Total	0	498	2299	508	0	617	644	881	0	0	0	0	5447
Apprch %	0	17.8	82.2	45.2	0	54.8	42.2	57.8	0	0	0	0	
Total %	0	9.1	42.2	9.3	0	11.3	11.8	16.2	0	0	0	0	


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: PENN WAY
E-W Direction: I-5 SB RAMPS

File Name : H1702012
Site Code : 00000000
Start Date : 2/9/2017

	PENN WAY Southbound				I-5 SB RAMPS Westbound				PENN WAY Northbound				DEAD END Eastbound				
Start Time	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 07:00 to 08:45 - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:00																	
07:00	0	31	**198**	229	22	0	44	66	18	29	0	47	0	0	0	0	342
07:15	0	32	196	228	**36**	0	39	**75**	32	41	0	73	0	0	0	0	376
07:30	0	37	191	228	19	0	38	57	35	40	0	75	0	0	0	0	360
07:45	0	**60**	190	**250**	20	0	**52**	72	**50**	**43**	0	**93**	0	0	0	0	**415**
Total Volume	0	160	775	935	97	0	173	270	135	153	0	288	0	0	0	0	1493
% App. Total	0	17.1	82.9		35.9	0	64.1		46.9	53.1	0		0	0	0		
PHF	.000	.667	.979	.935	.674	.000	.832	.900	.675	.890	.000	.774	.000	.000	.000	.000	.899

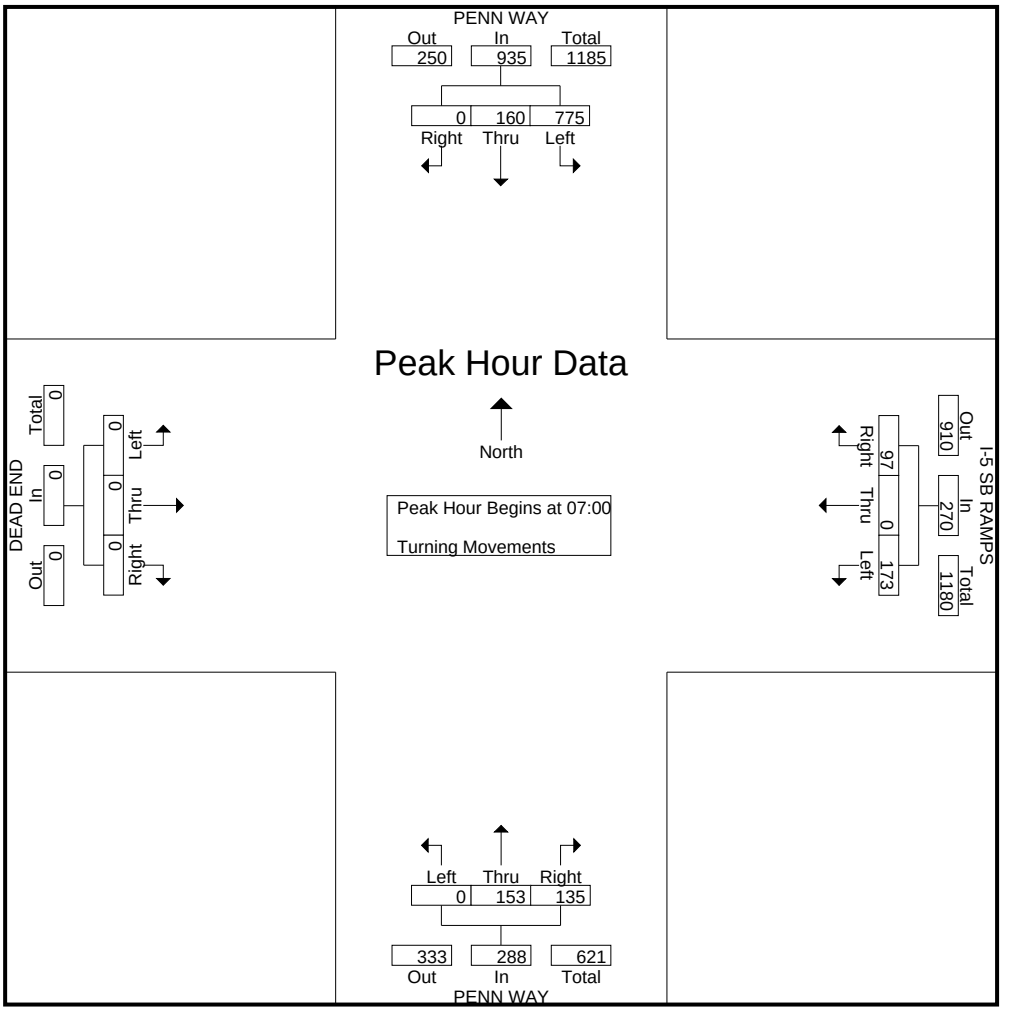


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: PENN WAY
E-W Direction: I-5 SB RAMPS

File Name : H1702012
Site Code : 00000000
Start Date : 2/9/2017

	PENN WAY Southbound				I-5 SB RAMPS Westbound				PENN WAY Northbound				DEAD END Eastbound				
Start Time	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 16:00 to 17:45 - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 16:45																	
16:45	0	30	130	160	**43**	0	**52**	**95**	51	70	0	121	0	0	0	0	376
17:00	0	**32**	**152**	**184**	40	0	41	81	**77**	94	0	**171**	0	0	0	0	**436**
17:15	0	30	119	149	34	0	37	71	63	92	0	155	0	0	0	0	375
17:30	0	31	132	163	28	0	39	67	40	**96**	0	136	0	0	0	0	366
Total Volume	0	123	533	656	145	0	169	314	231	352	0	583	0	0	0	0	1553
% App. Total	0	18.8	81.2		46.2	0	53.8		39.6	60.4	0		0	0	0		
PHF	.000	.961	.877	.891	.843	.000	.813	.826	.750	.917	.000	.852	.000	.000	.000	.000	.890

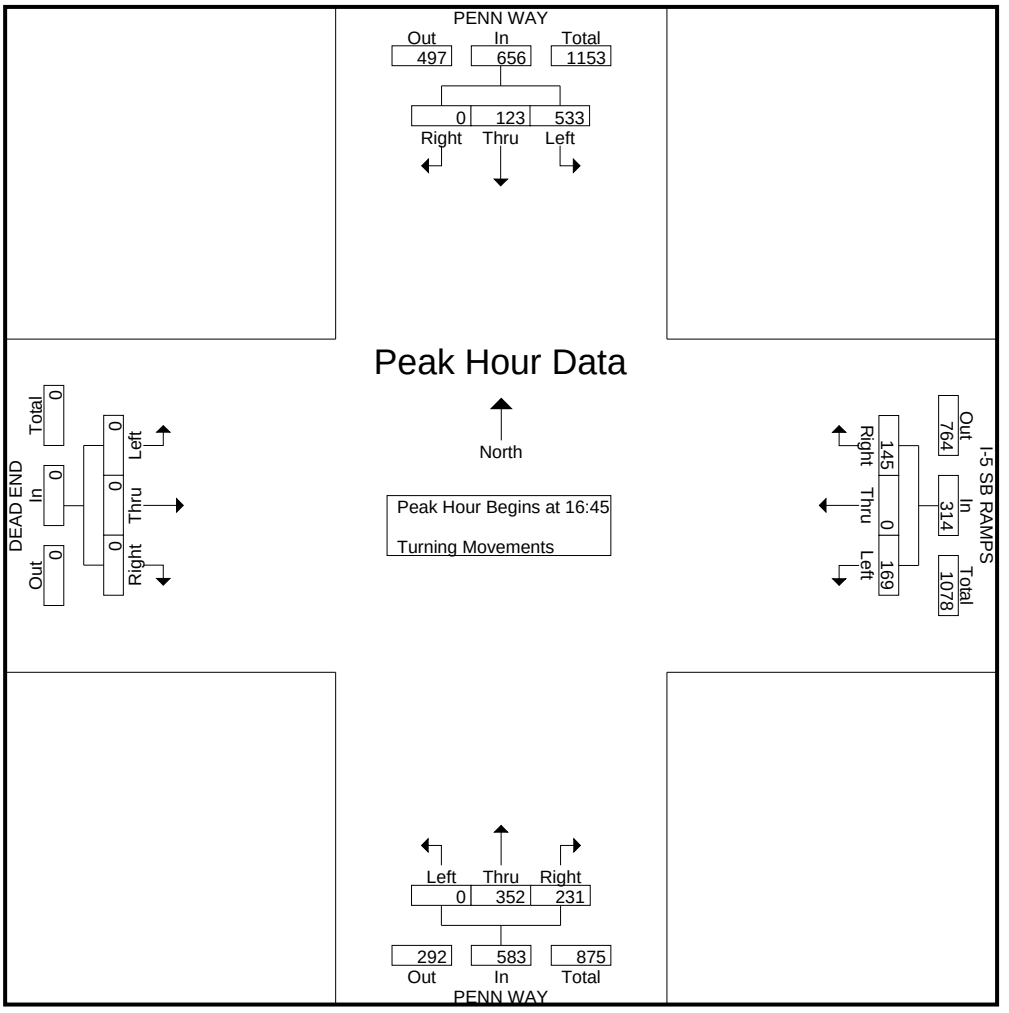

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: SANTIAGO STREET
E-W Direction: CIVIC CENTER DRIVE

File Name : H1702013
Site Code : 00000000
Start Date : 2/9/2017
Page No : 1

Groups Printed- Turning Movements

	SANTIAGO STREET Southbound			CIVIC CENTER DRIVE Westbound			SANTIAGO STREET Northbound			CIVIC CENTER DRIVE Eastbound			
Start Time	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	Int. Total
07:00	12	60	0	1	6	8	1	22	15	33	4	16	178
07:15	15	73	0	3	12	14	1	20	37	47	9	30	261
07:30	22	82	0	4	14	14	6	41	55	67	11	31	347
07:45	16	70	3	2	23	25	6	44	69	63	13	29	363
Total	65	285	3	10	55	61	14	127	176	210	37	106	1149
08:00	18	69	1	3	15	16	6	33	38	61	11	27	298
08:15	9	35	1	1	1	7	5	19	29	27	8	12	154
08:30	5	44	1	3	1	6	3	8	18	26	9	9	133
08:45	5	43	0	0	1	4	3	18	25	20	6	15	140
Total	37	191	3	7	18	33	17	78	110	134	34	63	725
*** BREAK ***													
16:00	5	52	0	1	4	3	3	46	18	45	6	37	220
16:15	10	41	2	2	3	4	4	59	15	32	8	33	213
16:30	7	48	1	2	3	1	2	48	26	44	12	64	258
16:45	14	47	2	5	3	3	12	59	27	68	20	67	327
Total	36	188	5	10	13	11	21	212	86	189	46	201	1018
17:00	16	38	3	6	8	2	8	70	25	90	20	77	363
17:15	6	47	3	4	4	2	5	76	24	54	16	66	307
17:30	10	49	4	2	3	6	4	85	18	49	17	48	295
17:45	10	51	1	1	6	3	6	65	22	37	11	50	263
Total	42	185	11	13	21	13	23	296	89	230	64	241	1228
Grand Total	180	849	22	40	107	118	75	713	461	763	181	611	4120
Apprch %	17.1	80.8	2.1	15.1	40.4	44.5	6	57.1	36.9	49.1	11.6	39.3	
Total %	4.4	20.6	0.5	1	2.6	2.9	1.8	17.3	11.2	18.5	4.4	14.8	


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: SANTIAGO STREET
E-W Direction: CIVIC CENTER DRIVE

File Name : H1702013
Site Code : 00000000
Start Date : 2/9/2017

	SANTIAGO STREET Southbound				CIVIC CENTER DRIVE Westbound				SANTIAGO STREET Northbound				CIVIC CENTER DRIVE Eastbound				
Start Time	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 07:00 to 08:45 - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:15																	
07:15	15	73	0	88	3	12	14	29	1	20	37	58	47	9	30	86	261
07:30	**22**	**82**	0	**104**	**4**	14	14	32	**6**	41	55	102	**67**	11	**31**	**109**	347
07:45	16	70	**3**	89	2	**23**	**25**	**50**	6	**44**	**69**	**119**	63	**13**	29	105	**363**
08:00	18	69	1	88	3	15	16	34	6	33	38	77	61	11	27	99	298
Total Volume	71	294	4	369	12	64	69	145	19	138	199	356	238	44	117	399	1269
% App. Total	19.2	79.7	1.1		8.3	44.1	47.6		5.3	38.8	55.9		59.6	11	29.3		
PHF	.807	.896	.333	.887	.750	.696	.690	.725	.792	.784	.721	.748	.888	.846	.944	.915	.874

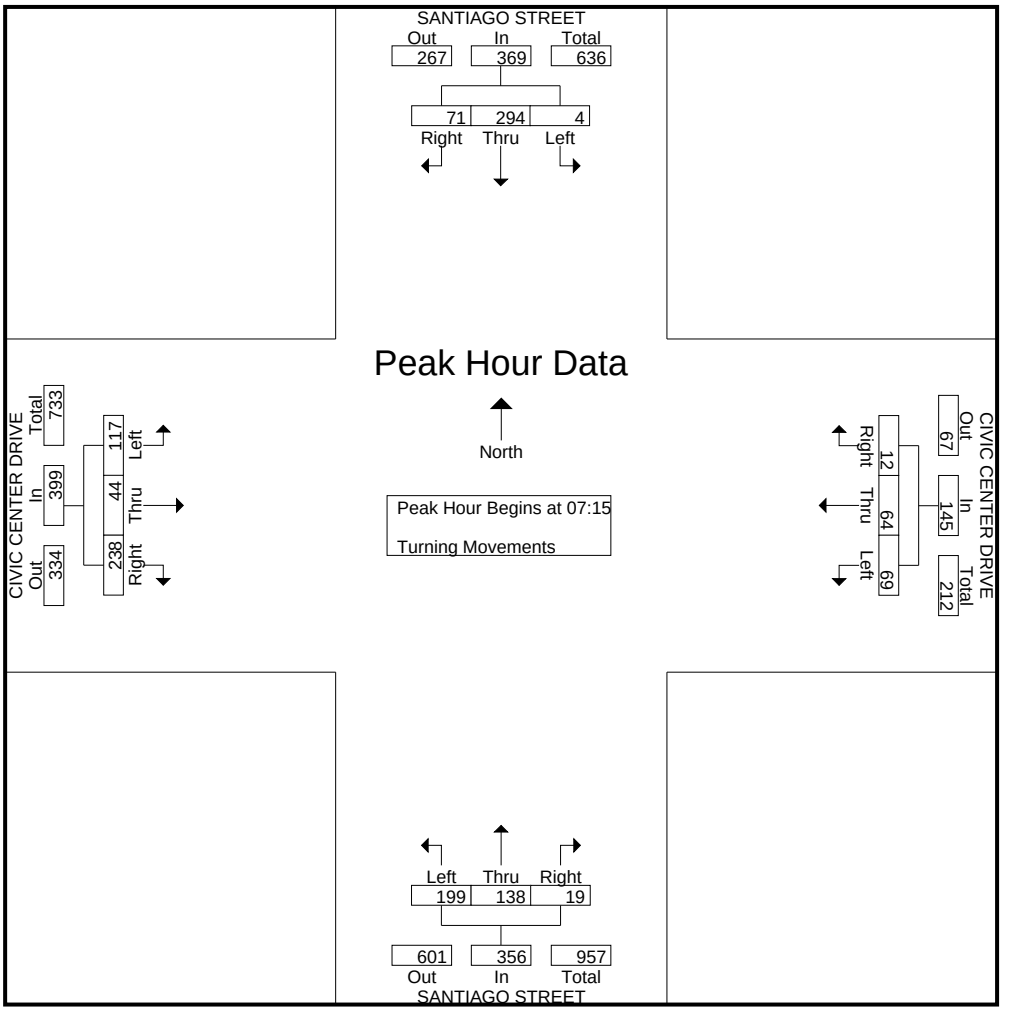


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: SANTIAGO STREET
E-W Direction: CIVIC CENTER DRIVE

File Name : H1702013
Site Code : 00000000
Start Date : 2/9/2017

	SANTIAGO STREET Southbound				CIVIC CENTER DRIVE Westbound				SANTIAGO STREET Northbound				CIVIC CENTER DRIVE Eastbound				
Start Time	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 16:00 to 17:45 - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 16:45																	
16:45	14	47	2	**63**	5	3	3	11	**12**	59	**27**	98	68	**20**	67	155	327
17:00	**16**	38	3	57	**6**	**8**	2	**16**	8	70	25	103	**90**	20	**77**	**187**	**363**
17:15	6	47	3	56	4	4	2	10	5	76	24	105	54	16	66	136	307
17:30	10	**49**	**4**	63	2	3	**6**	11	4	**85**	18	**107**	49	17	48	114	295
Total Volume	46	181	12	239	17	18	13	48	29	290	94	413	261	73	258	592	1292
% App. Total	19.2	75.7	5		35.4	37.5	27.1		7	70.2	22.8		44.1	12.3	43.6		
PHF	.719	.923	.750	.948	.708	.563	.542	.750	.604	.853	.870	.965	.725	.913	.838	.791	.890

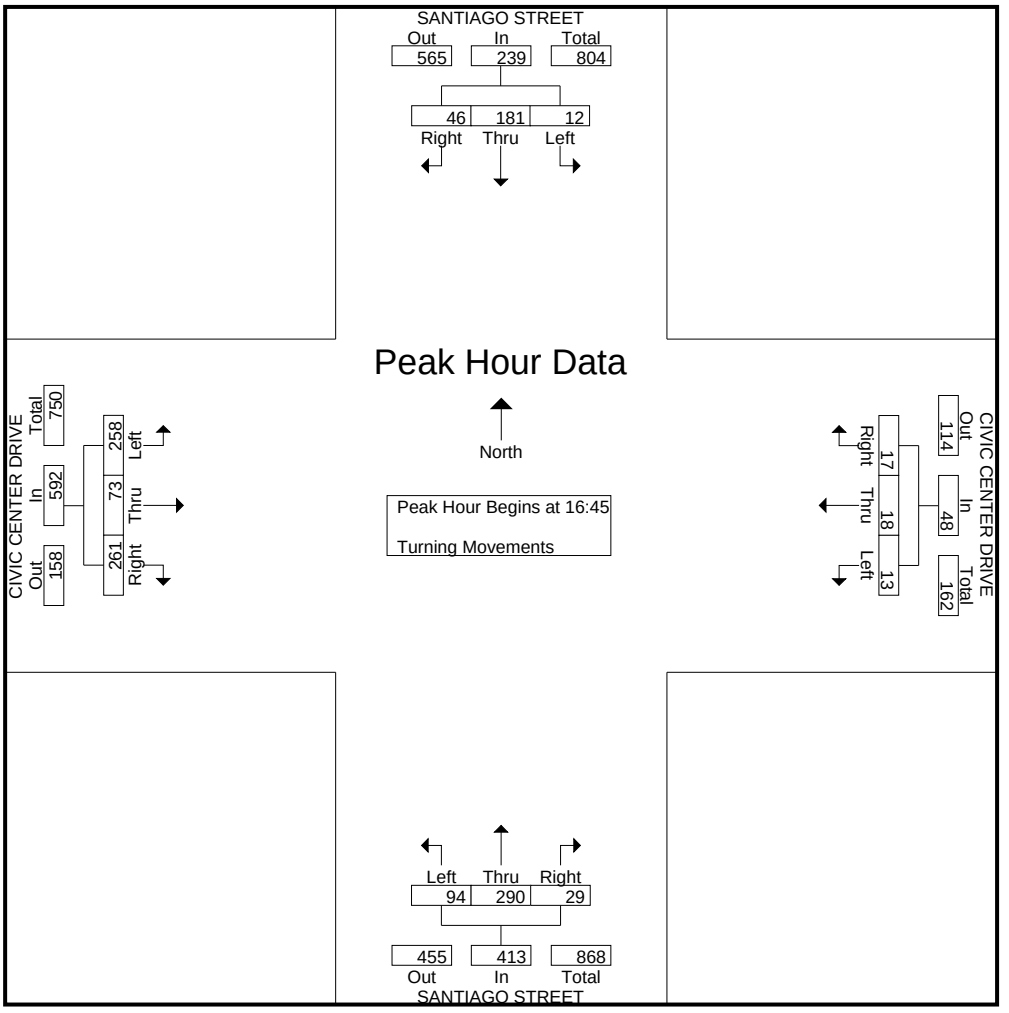

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Thu, Feb 11, 16

LOCATION: Santa Ana
NORTH & SOUTH: Santiago
EAST & WEST: Santa Ana


PROJECT #: SC0846
LOCATION #: 15
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Santiago			SOUTHBOUND Santiago			EASTBOUND Santa Ana			WESTBOUND Santa Ana				U-TURNS				
	LANES:	NL 1	NT 1	NR 1	SL 1	ST 1	SR 1	EL 1	ET 2	ER 0	WL 1	WT 2	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	6	12	16	52	27	20	6	77	5	32	137	34	424	0	0	0	9	9
	7:15 AM	7	11	18	69	31	24	3	128	1	17	162	41	512	0	0	0	6	6
	7:30 AM	5	17	9	85	31	36	11	139	4	31	212	67	647	0	0	0	12	12
	7:45 AM	2	16	11	62	62	32	24	104	1	33	250	102	699	0	0	0	5	5
	8:00 AM	9	24	15	82	30	35	8	84	7	22	151	50	517	0	0	0	6	6
	8:15 AM	4	14	19	46	21	16	9	68	4	16	148	35	400	0	0	0	1	1
	8:30 AM	2	12	17	39	15	18	1	69	2	20	139	27	361	0	0	0	2	2
	8:45 AM	2	7	19	40	22	15	1	48	9	17	123	25	328	0	0	0	2	2
	VOLUMES	37	113	124	475	239	196	63	717	33	188	1,322	381	3,888	0	0	0	43	43
	APPROACH %	14%	41%	45%	52%	26%	22%	8%	88%	4%	10%	70%	20%						
	APP/DEPART	274	/	557	910	/	417	813	/	1,359	1,891	/	1,555	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	23	68	53	298	154	127	46	455	13	103	775	260	2,375					
	APPROACH %	16%	47%	37%	51%	27%	22%	9%	89%	3%	9%	68%	23%						
	PEAK HR FACTOR		0.750			0.928			0.834			0.739		0.849					
	APP/DEPART	144	/	374	579	/	241	514	/	835	1,138	/	925	0					
PM	4:00 PM	3	28	16	60	21	15	7	109	12	22	90	32	415	0	0	0	6	6
	4:15 PM	3	21	14	45	24	25	6	127	1	17	77	29	389	0	0	0	4	4
	4:30 PM	8	20	16	61	23	15	21	147	2	21	123	55	512	0	0	0	3	3
	4:45 PM	5	30	14	77	29	14	17	159	8	16	132	46	547	0	0	0	5	5
	5:00 PM	8	38	24	70	28	10	16	175	4	17	102	34	526	0	0	0	8	8
	5:15 PM	13	39	26	77	35	19	14	142	5	16	115	44	545	0	0	0	2	2
	5:30 PM	6	22	19	55	31	22	13	93	6	18	111	26	422	0	0	0	8	8
	5:45 PM	11	42	17	62	29	24	9	90	3	23	101	51	462	0	0	0	10	10
	VOLUMES	57	240	146	507	220	144	103	1,042	41	150	851	317	3,818	0	0	0	46	46
	APPROACH %	13%	54%	33%	58%	25%	17%	9%	88%	3%	11%	65%	24%						
	APP/DEPART	443	/	660	871	/	365	1,186	/	1,741	1,318	/	1,052	0					
	BEGIN PEAK HR		4:30 PM																
	VOLUMES	34	127	80	285	115	58	68	623	19	70	472	179	2,130					
	APPROACH %	14%	53%	33%	62%	25%	13%	10%	88%	3%	10%	65%	25%						
	PEAK HR FACTOR		0.772			0.874			0.910			0.906		0.973					
	APP/DEPART	241	/	374	458	/	186	710	/	1,006	721	/	564	0					

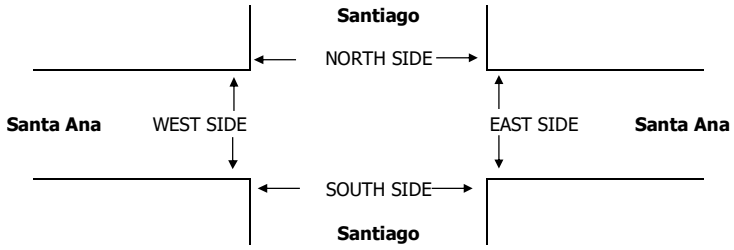

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	9	18	12	8	47	9	16	9	8	42	0	2	3	0	5
	7:15 AM	14	6	8	6	34	11	4	7	6	28	3	2	1	0	6
	7:30 AM	9	4	8	7	28	9	4	6	7	26	0	0	2	0	2
	7:45 AM	1	4	5	2	12	1	4	5	2	12	0	0	0	0	0
	8:00 AM	1	1	6	1	9	1	0	5	1	7	0	1	1	0	2
	8:15 AM	0	1	2	1	4	0	0	0	1	1	0	1	2	0	3
	8:30 AM	2	1	2	2	7	1	1	2	2	6	1	0	0	0	1
	8:45 AM	0	6	3	3	12	0	5	1	3	9	0	1	2	0	3
	TOTAL	36	41	46	30	153	32	34	35	30	131	4	7	11	0	22
PM	4:00 PM	4	6	5	5	20	0	5	4	3	12	4	1	1	2	8
	4:15 PM	0	4	4	1	9	0	4	3	1	8	0	0	1	0	1
	4:30 PM	4	2	5	1	12	4	2	5	1	12	0	0	0	0	0
	4:45 PM	2	2	5	0	9	0	2	3	0	5	2	0	2	0	4
	5:00 PM	3	15	8	4	30	2	13	8	2	25	1	2	0	2	5
	5:15 PM	3	10	7	10	30	3	9	7	9	28	0	1	0	1	2
	5:30 PM	2	8	9	7	26	1	7	7	6	21	1	1	2	1	5
	5:45 PM	1	0	1	6	8	1	0	1	5	7	0	0	0	1	1
	TOTAL	19	47	44	34	144	11	42	38	27	118	8	5	6	7	26

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: STANDARD AVENUE
E-W Direction: 1ST STREET

File Name : H1702014
Site Code : 00000000
Start Date : 2/9/2017
Page No : 1

Groups Printed- Turning Movements

	STANDARD AVENUE Southbound			1ST STREET Westbound			STANDARD AVENUE Northbound			1ST STREET Eastbound				
Start Time	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	U-Turn	Int. Total
07:00	0	41	6	1	179	10	28	43	17	50	282	10	2	669
07:15	3	49	7	1	228	10	19	42	23	39	376	21	2	820
07:30	4	61	3	5	255	14	43	55	28	60	324	20	2	874
07:45	3	65	8	2	282	19	27	47	36	70	291	19	3	872
Total	10	216	24	9	944	53	117	187	104	219	1273	70	9	3235
08:00	1	49	6	3	217	19	26	41	17	38	287	15	1	720
08:15	4	47	3	4	204	13	19	41	20	52	333	8	4	752
08:30	7	19	4	2	177	5	14	32	21	37	284	8	1	611
08:45	2	29	2	5	171	19	22	31	17	22	304	9	3	636
Total	14	144	15	14	769	56	81	145	75	149	1208	40	9	2719
*** BREAK ***														
16:00	5	41	5	3	251	17	19	78	53	31	272	22	2	799
16:15	4	39	2	4	251	23	34	98	43	36	294	19	2	849
16:30	2	37	5	4	243	17	30	79	44	28	311	20	2	822
16:45	2	33	1	6	265	29	23	79	45	26	297	26	4	836
Total	13	150	13	17	1010	86	106	334	185	121	1174	87	10	3306
17:00	8	45	9	6	246	24	51	93	35	30	311	24	6	888
17:15	2	48	2	4	297	21	23	81	39	34	300	37	2	890
17:30	5	50	3	7	281	24	13	98	49	37	290	42	15	914
17:45	7	40	4	3	290	19	28	84	56	24	281	33	12	881
Total	22	183	18	20	1114	88	115	356	179	125	1182	136	35	3573
Grand Total	59	693	70	60	3837	283	419	1022	543	614	4837	333	63	12833
Apprch %	7.2	84.3	8.5	1.4	91.8	6.8	21.1	51.5	27.4	10.5	82.7	5.7	1.1	
Total %	0.5	5.4	0.5	0.5	29.9	2.2	3.3	8	4.2	4.8	37.7	2.6	0.5	


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: STANDARD AVENUE
E-W Direction: 1ST STREET

File Name : H1702014
Site Code : 00000000
Start Date : 2/9/2017
Page No : 2

	STANDARD AVENUE Southbound				1ST STREET Westbound				STANDARD AVENUE Northbound				1ST STREET Eastbound					
Start Time	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	U-Turn	App. Total	Int. Total
Peak Hour Analysis From 07:00 to 08:45 - Peak 1 of 1																		
Peak Hour for Entire Intersection Begins at 07:15																		
07:15	3	49	7	59	1	228	10	239	19	42	23	84	39	376	21	2	438	820
07:30	4	61	3	68	**5**	255	14	274	**43**	**55**	28	**126**	60	324	20	2	406	**874**
07:45	**3**	**65**	**8**	**76**	**2**	**282**	**19**	**303**	**27**	**47**	**36**	110	**70**	291	19	**3**	383	872
08:00	1	49	6	56	3	217	19	239	26	41	17	84	38	287	15	1	341	720
Total Volume	11	224	24	259	11	982	62	1055	115	185	104	404	207	1278	75	8	1568	3286
% App. Total	4.2	86.5	9.3		1	93.1	5.9		28.5	45.8	25.7		13.2	81.5	4.8	0.5		
PHF	.688	.862	.750	.852	.550	.871	.816	.870	.669	.841	.722	.802	.739	.850	.893	.667	.895	.940

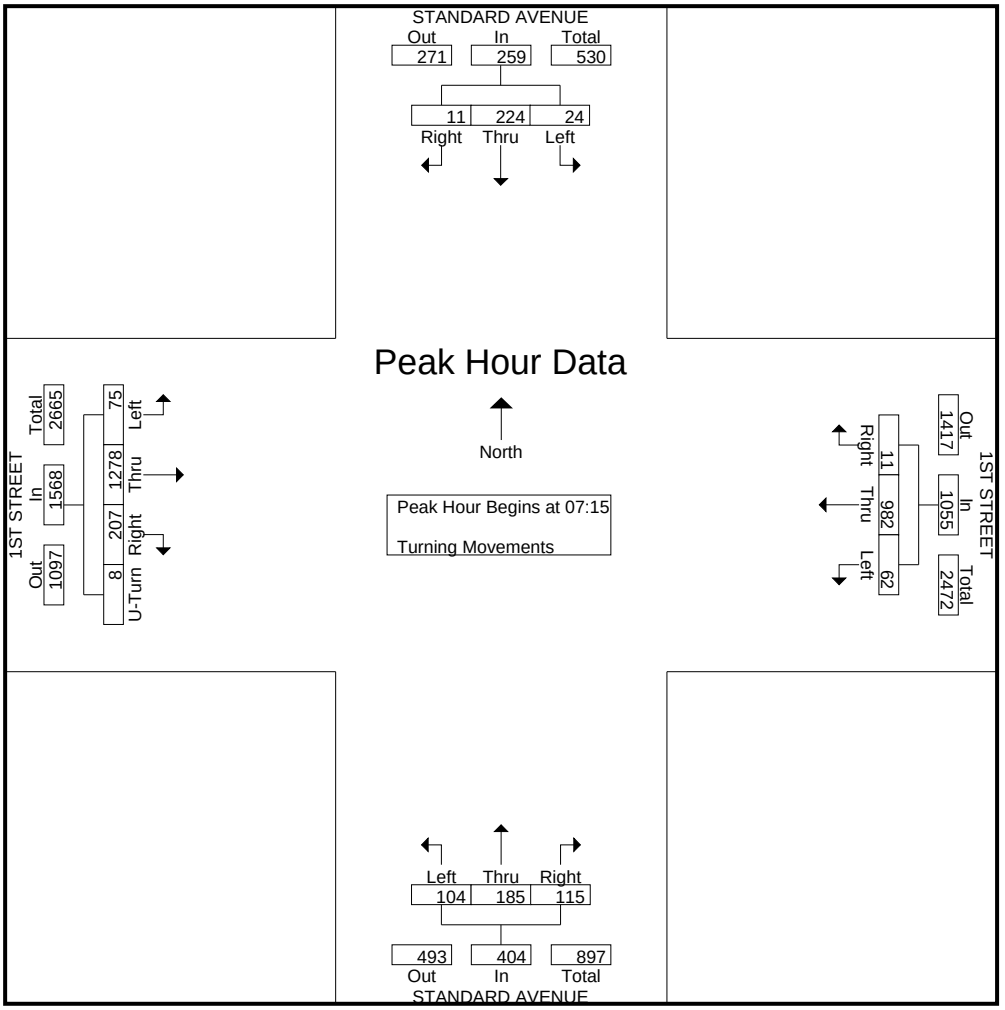


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: STANDARD AVENUE
E-W Direction: 1ST STREET

File Name : H1702014
Site Code : 00000000
Start Date : 2/9/2017
Page No : 3

	STANDARD AVENUE Southbound				1ST STREET Westbound				STANDARD AVENUE Northbound				1ST STREET Eastbound					
Start Time	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	U-Turn	App. Total	Int. Total
Peak Hour Analysis From 16:00 to 17:45 - Peak 1 of 1																		
Peak Hour for Entire Intersection Begins at 17:00																		
17:00	8	45	9	62	6	246	24	276	**51**	93	35	**179**	30	**311**	24	6	371	888
17:15	2	48	2	52	4	**297**	21	**322**										
17:30	**5**	**50**	3	58	**7**	281	24	312	13	**98**	49	160	**37**	290	**42**	**15**	**384**	**914**
17:45	**7**	**40**	**4**	**51**	**3**	**290**	**19**	**312**	**28**	**84**	**56**	168	24	281	33	12	350	881
Total Volume	22	183	18	223	20	1114	88	1222	115	356	179	650	125	1182	136	35	1478	3573
% App. Total	9.9	82.1	8.1		1.6	91.2	7.2		17.7	54.8	27.5		8.5	80	9.2	2.4		
PHF	.688	.915	.500	.899	.714	.938	.917	.949	.564	.908	.799	.908	.845	.950	.810	.583	.962	.977

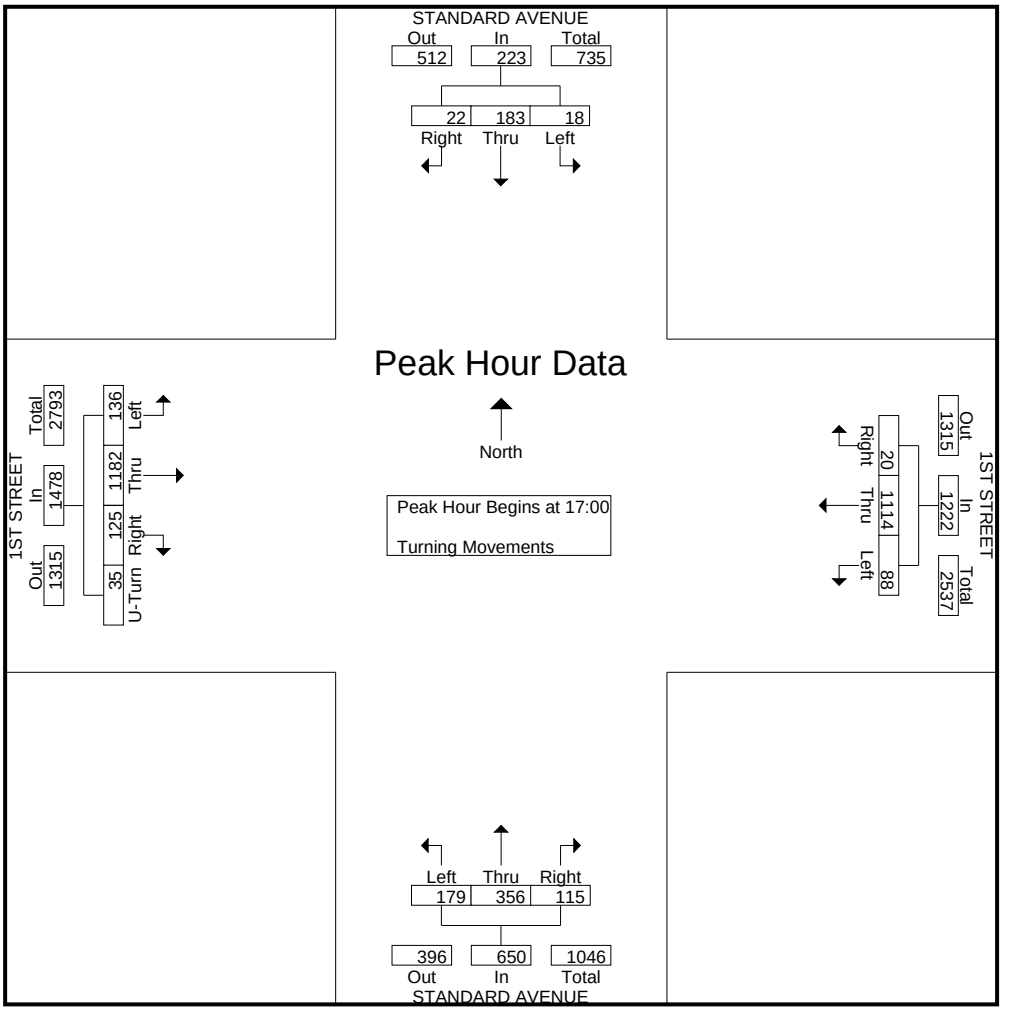

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 15, 18

LOCATION: Santa Ana Zed
NORTH & SOUTH: Standard
EAST & WEST: McFadden


PROJECT #: SC1791
LOCATION #: 63
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Standard			SOUTHBOUND Standard			EASTBOUND McFadden			WESTBOUND McFadden				U-TURNS				
	LANES:	NL 1	NT 2	NR 0	SL 1	ST 2	SR 0	EL 1	ET 2	ER 0	WL 1	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	9	50	30	49	91	6	5	131	15	18	62	9	475	0	0	0	0	0
	7:15 AM	16	62	34	45	84	13	5	146	17	27	76	12	537	0	0	0	0	0
	7:30 AM	18	88	35	58	153	10	3	162	21	25	80	19	672	0	0	0	0	0
	7:45 AM	16	68	27	67	161	7	5	140	15	47	102	23	678	0	0	0	0	0
	8:00 AM	22	60	29	45	122	6	3	129	16	36	100	26	594	0	0	0	0	0
	8:15 AM	17	53	25	26	75	5	11	135	10	23	75	7	462	0	0	0	0	0
	8:30 AM	16	48	18	23	57	3	7	84	12	16	51	2	337	0	0	0	0	0
	8:45 AM	14	44	20	25	58	1	4	91	12	11	59	6	345	0	0	0	0	0
	VOLUMES	128	473	218	338	801	51	43	1,018	118	203	605	104	4,100	0	0	0	0	0
	APPROACH %	16%	58%	27%	28%	67%	4%	4%	86%	10%	22%	66%	11%						
	APP/DEPART	819	/	620	1,190	/	1,122	1,179	/	1,574	912	/	784	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	72	278	125	215	520	36	16	577	69	135	358	80	2,481					
	APPROACH %	15%	59%	26%	28%	67%	5%	2%	87%	10%	24%	62%	14%						
	PEAK HR FACTOR		0.842			0.820			0.890			0.833		0.915					
	APP/DEPART	475	/	374	771	/	724	662	/	917	573	/	466	0					

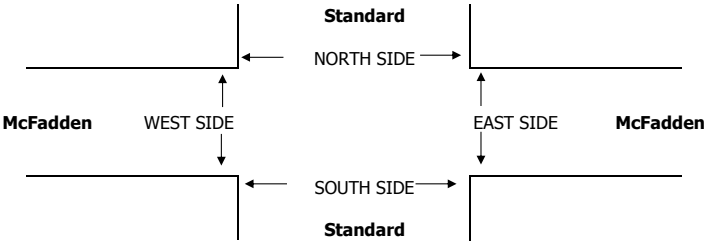



		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	9	22	18	13	62	9	19	17	9	54	0	3	1	4	8
	7:15 AM	20	26	39	10	95	19	24	37	8	88	1	2	2	2	7
	7:30 AM	19	32	25	27	103	16	31	21	23	91	3	1	4	4	12
	7:45 AM	12	43	55	29	139	10	42	51	28	131	2	1	4	1	8
	8:00 AM	8	27	24	19	78	7	26	21	19	73	1	1	3	0	5
	8:15 AM	17	19	16	13	65	16	19	15	10	60	1	0	1	3	5
	8:30 AM	7	20	13	13	53	6	19	12	11	48	1	1	1	2	5
	8:45 AM	6	13	4	8	31	5	12	3	8	28	1	1	1	0	3
	TOTAL	98	202	194	132	626	88	192	177	116	573	10	10	17	16	53
	AM BEGIN PEAK HR			7:15 AM			52	123	130	78	383					

Attachment 8

AimTD LLC

TURNING MOVEMENT COUNTS

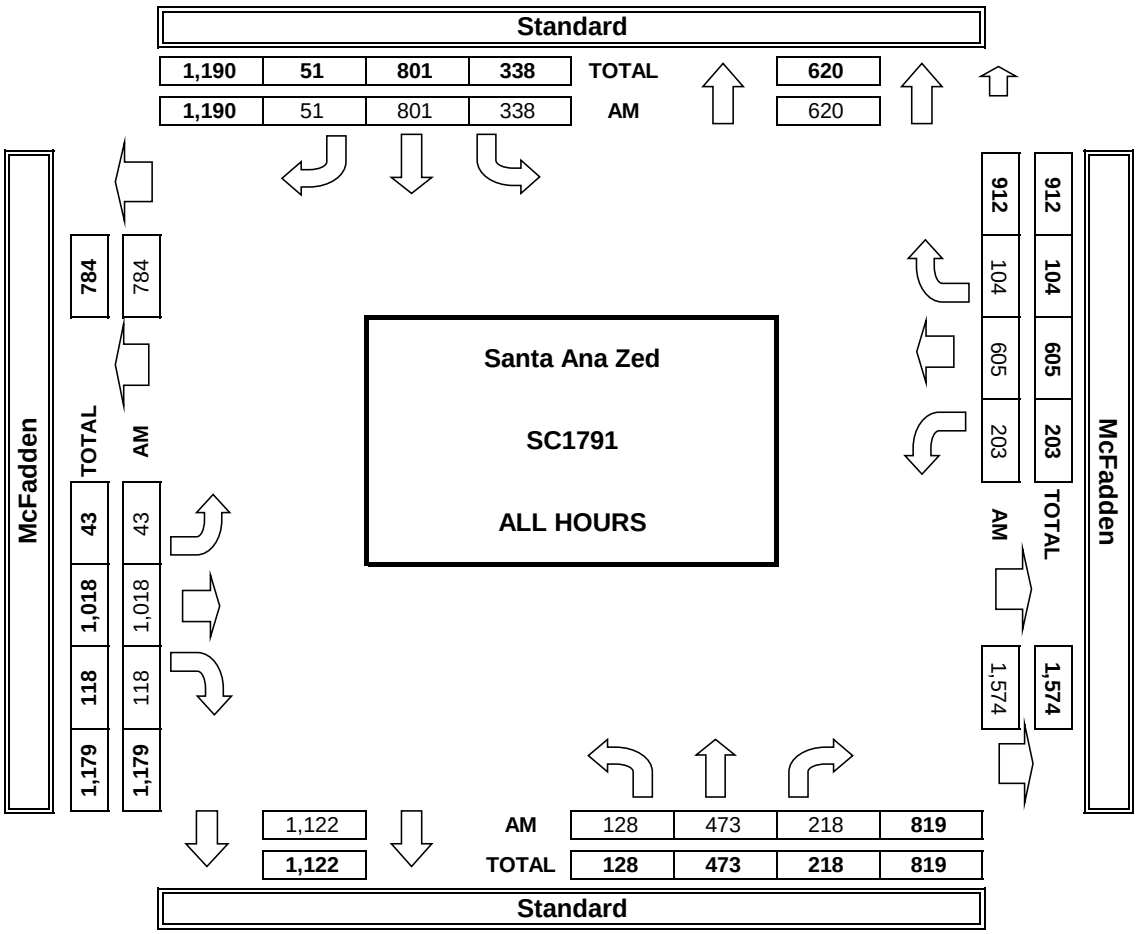

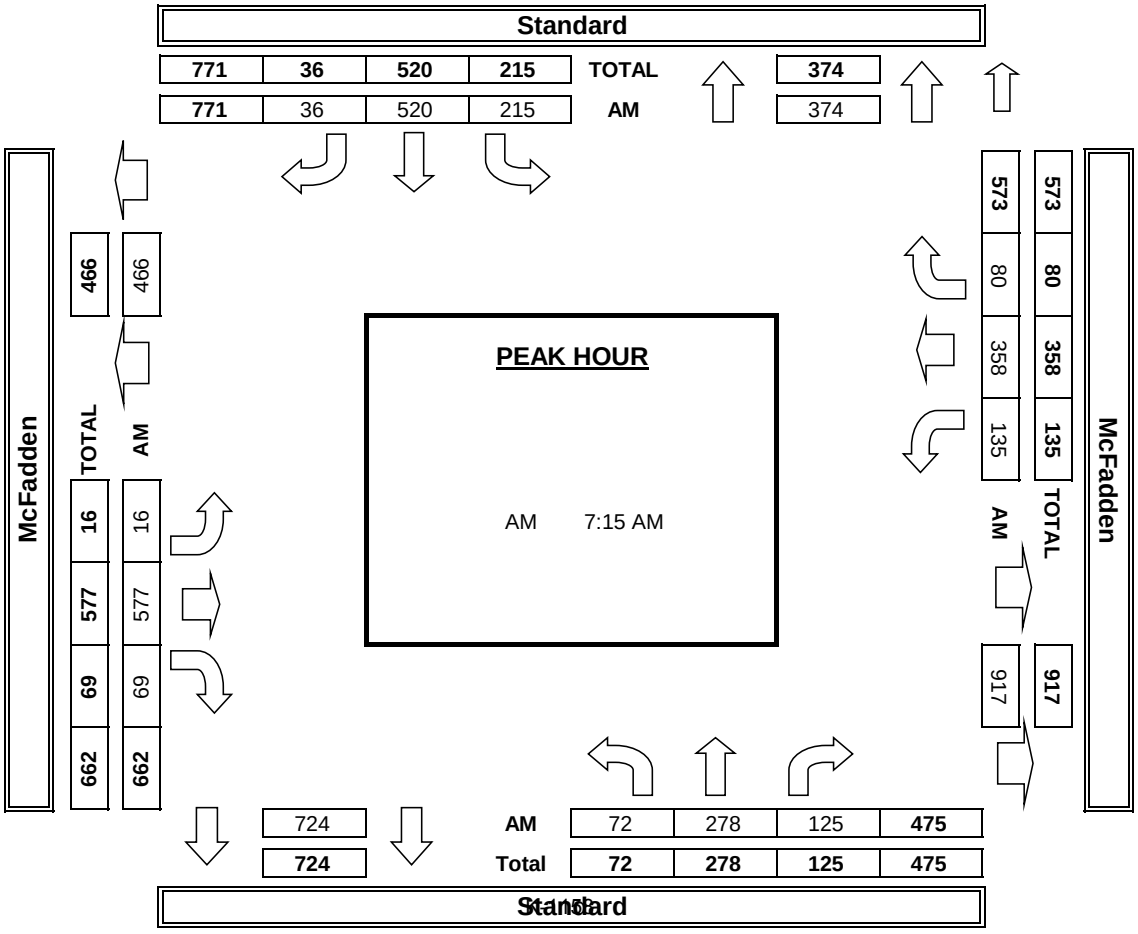

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 15, 18

LOCATION: Santa Ana Zed
NORTH & SOUTH: Standard
EAST & WEST: McFadden


PROJECT #: SC1791
LOCATION #: 63
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns


		NORTHBOUND Standard			SOUTHBOUND Standard			EASTBOUND McFadden			WESTBOUND McFadden				U-TURNS				
	LANES:	NL 1	NT 2	NR 0	SL 1	ST 2	SR 0	EL 1	ET 2	ER 0	WL 1	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
PM	2:00 PM	28	66	29	29	42	11	6	71	13	17	110	21	443	0	0	0	0	0
	2:15 PM	19	79	21	28	57	12	9	102	16	26	100	19	488	0	0	0	0	0
	2:30 PM	39	86	34	23	66	9	12	89	10	33	147	26	574	0	0	0	0	0
	2:45 PM	42	111	27	33	65	12	10	99	10	43	146	31	629	0	0	0	0	0
	3:00 PM	35	131	33	31	63	7	16	94	15	46	149	55	675	0	0	0	0	0
	3:15 PM	38	125	28	28	53	7	5	96	14	34	124	34	586	0	0	0	0	0
	3:30 PM	29	136	23	36	89	6	11	82	13	36	167	40	668	0	0	0	0	0
	3:45 PM	43	146	24	38	76	6	11	83	6	36	176	46	691	0	0	0	0	0
	VOLUMES	273	880	219	246	511	70	80	716	97	271	1,119	272	4,754	0	0	0	0	0
	APPROACH %	20%	64%	16%	30%	62%	8%	9%	80%	11%	16%	67%	16%						
	APP/DEPART	1,372	/	1,232	827	/	879	893	/	1,181	1,662	/	1,462	0					
	BEGIN PEAK HR		3:00 PM																
	VOLUMES	145	538	108	133	281	26	43	355	48	152	616	175	2,620					
	APPROACH %	18%	68%	14%	30%	64%	6%	10%	80%	11%	16%	65%	19%						
	PEAK HR FACTOR		0.928			0.840			0.892			0.914		0.948					
	APP/DEPART	791	/	756	440	/	481	446	/	596	943	/	787	0					
PM	4:00 PM	45	158	25	24	71	8	16	90	10	27	167	45	686	0	0	0	0	0
	4:15 PM	37	137	22	26	59	6	9	82	11	28	173	23	613	0	0	0	0	0
	4:30 PM	40	171	21	28	51	10	10	87	7	27	183	44	679	0	0	0	0	0
	4:45 PM	27	174	16	21	51	14	18	84	13	26	161	47	652	0	0	0	0	0
	5:00 PM	41	159	25	28	60	7	17	81	13	28	170	46	675	0	0	0	0	0
	5:15 PM	51	182	21	36	70	12	7	92	15	29	196	57	768	0	0	0	0	0
	5:30 PM	37	167	19	33	82	19	17	81	17	29	176	47	724	0	0	0	0	0
	5:45 PM	36	145	15	37	82	12	10	90	13	28	155	51	674	0	0	0	0	0
	VOLUMES	314	1,293	164	233	526	88	104	687	99	222	1,381	360	5,471	0	0	0	0	0
	APPROACH %	18%	73%	9%	28%	62%	10%	12%	77%	11%	11%	70%	18%						
	APP/DEPART	1,771	/	1,757	847	/	847	890	/	1,084	1,963	/	1,783	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	165	653	80	134	294	50	51	344	58	114	697	201	2,841					
	APPROACH %	18%	73%	9%	28%	62%	10%	11%	76%	13%	11%	69%	20%						
	PEAK HR FACTOR		0.884			0.892			0.985			0.897		0.925					
	APP/DEPART	898	/	905	478	/	466	453	/	558	1,012	/	912	0					

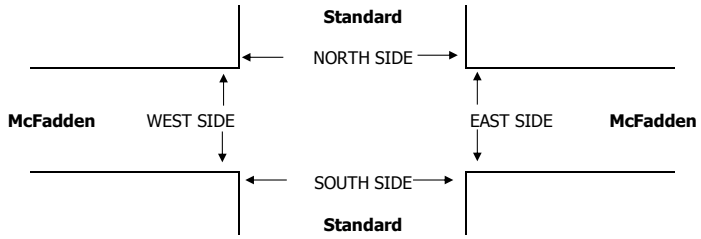


		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
PM	2:00 PM	17	16	28	14	75	12	15	27	14	68	5	1	1	0	7
	2:15 PM	26	20	29	16	91	26	20	29	16	91	0	0	0	0	0
	2:30 PM	29	25	34	28	116	25	24	31	25	105	4	1	3	3	11
	2:45 PM	31	47	45	21	144	27	45	42	19	133	4	2	3	2	11
	3:00 PM	62	47	47	39	195	54	45	44	38	181	8	2	3	1	14
	3:15 PM	43	46	49	28	166	40	46	49	28	163	3	0	0	0	3
	3:30 PM	23	29	41	23	116	17	29	38	22	106	6	0	3	1	10
	3:45 PM	19	17	28	8	72	15	15	27	7	64	4	2	1	1	8
	TOTAL	250	247	301	177	975	216	239	287	169	911	34	8	14	8	64
	AM BEGIN PEAK HR	3:00 PM					126	135	158	95	514					
PM	4:00 PM	10	27	24	21	82	10	26	24	19	79	0	1	0	2	3
	4:15 PM	20	30	18	22	90	15	29	17	18	79	5	1	1	4	11
	4:30 PM	12	30	15	21	78	10	29	15	18	72	2	1	0	3	6
	4:45 PM	21	14	18	23	76	16	14	13	20	63	5	0	5	3	13
	5:00 PM	15	19	22	18	74	12	18	22	17	69	3	1	0	1	5
	5:15 PM	33	23	33	26	115	29	22	30	23	104	4	1	3	3	11
	5:30 PM	17	21	16	28	82	15	16	15	21	67	2	5	1	7	15
	5:45 PM	17	24	21	32	94	15	16	20	29	80	2	8	1	3	14
	TOTAL	145	188	167	191	691	122	170	156	165	613	23	18	11	26	78
	PM BEGIN PEAK HR	5:00 PM					71	72	87	90	320					

AimTD LLC

TURNING MOVEMENT COUNTS

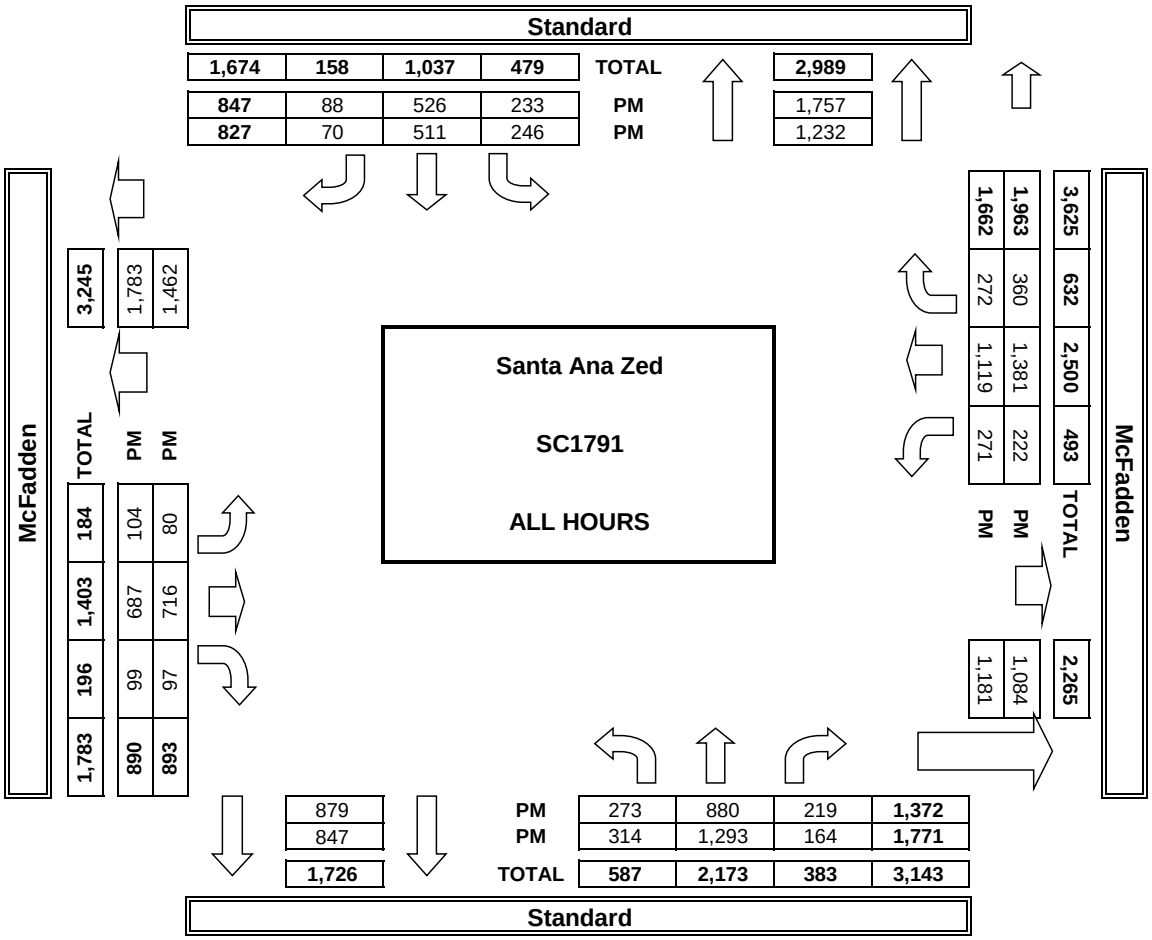

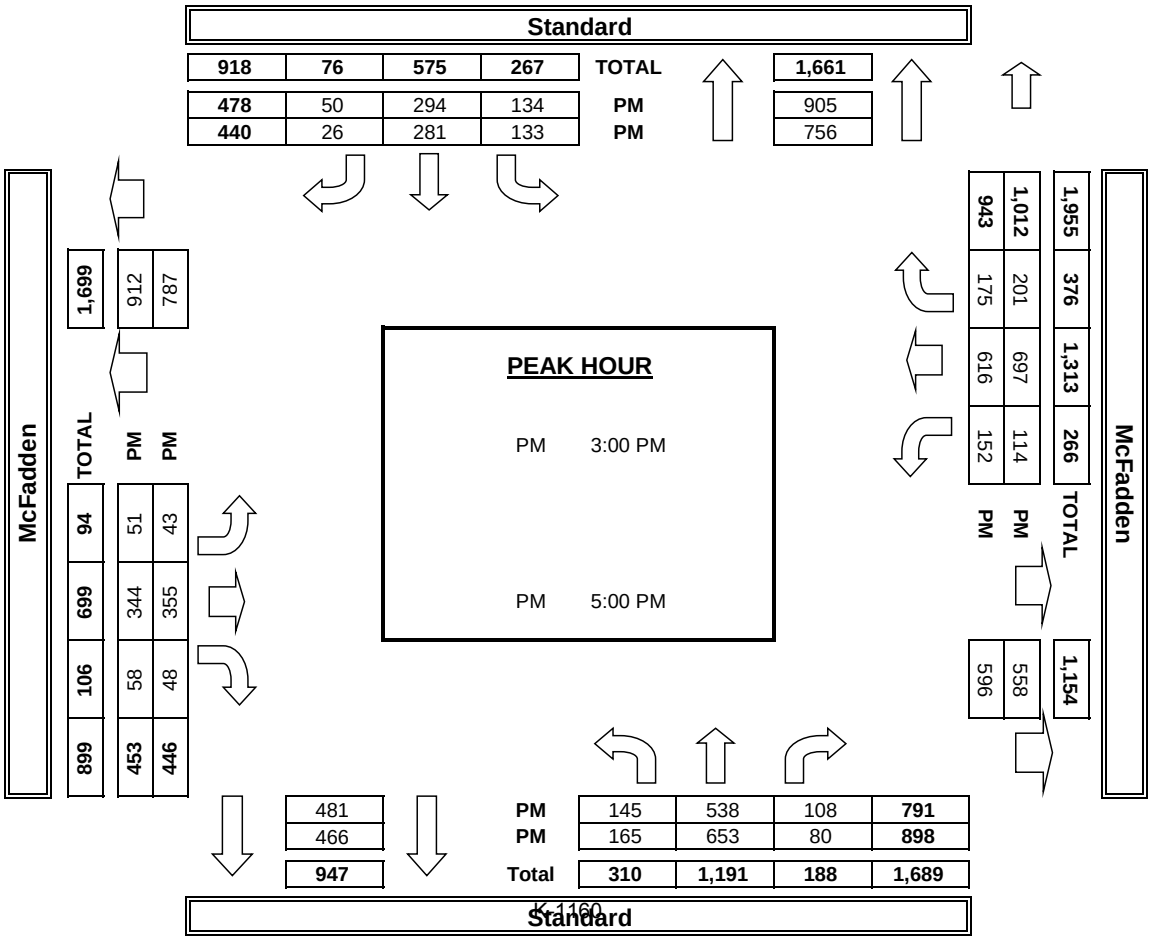

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Feb 9, 16

LOCATION: Santa Ana
NORTH & SOUTH: Halladay
EAST & WEST: Warner


PROJECT #: SC0846
LOCATION #: 44
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Halladay			SOUTHBOUND Halladay			EASTBOUND Warner			WESTBOUND Warner				U-TURNS				
		NL	NT	NR	SL	ST	SR	EL	ET	ER	WL	WT	WR	TOTAL	NB	SB	EB	WB	TTL
	LANES:	1	X	1	X	X	X	X	2	0	0	2	X		0	0	0	0	
AM	7:00 AM	13	0	6	0	0	0	0	247	29	18	151	0	464	0	0	0	0	0
	7:15 AM	10	0	24	0	0	0	0	293	28	36	139	0	530	0	0	0	0	0
	7:30 AM	14	0	24	0	0	0	0	308	46	39	181	0	612	0	0	0	0	0
	7:45 AM	10	0	22	0	0	0	0	323	42	45	146	0	588	0	0	0	0	0
	8:00 AM	7	0	26	0	0	0	0	308	23	33	117	0	514	0	0	0	0	0
	8:15 AM	7	0	21	0	0	0	0	298	17	24	114	0	481	0	0	0	0	0
	8:30 AM	12	0	24	0	0	0	0	245	22	16	134	0	453	0	0	0	0	0
	8:45 AM	14	0	26	0	0	0	0	188	14	24	132	0	398	0	0	0	0	0
	VOLUMES	87	0	173	0	0	0	0	2,210	221	235	1,114	0	4,040	0	0	0	0	0
	APPROACH %	33%	0%	67%	0%	0%	0%	0%	91%	9%	17%	83%	0%						
	APP/DEPART	260	/	0	0	/	456	2,431	/	2,383	1,349	/	1,201	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	41	0	96	0	0	0	0	1,232	139	153	583	0	2,244					
	APPROACH %	30%	0%	70%	0%	0%	0%	0%	90%	10%	21%	79%	0%						
	PEAK HR FACTOR		0.901			0.000			0.939			0.836		0.917					
	APP/DEPART	137	/	0	0	/	292	1,371	/	1,328	736	/	624	0					
PM	4:00 PM	39	0	75	0	0	0	0	197	12	26	236	0	585	0	0	0	0	0
	4:15 PM	29	0	80	0	0	0	0	204	17	22	211	0	563	0	0	0	0	0
	4:30 PM	35	0	81	0	0	0	0	219	22	26	270	0	653	0	0	0	0	0
	4:45 PM	32	0	70	0	0	0	1	205	11	32	244	0	595	0	0	1	0	1
	5:00 PM	44	0	84	0	0	0	0	210	20	30	295	0	683	0	0	0	0	0
	5:15 PM	51	0	103	0	0	0	0	255	36	47	268	0	760	0	0	0	0	0
	5:30 PM	38	0	83	0	0	0	0	204	25	41	231	0	622	0	0	0	0	0
	5:45 PM	30	0	85	0	0	0	0	202	24	37	217	0	595	0	0	0	0	0
	VOLUMES	298	0	661	0	0	0	1	1,696	167	261	1,972	0	5,056	0	0	1	0	1
	APPROACH %	31%	0%	69%	0%	0%	0%	0%	91%	9%	12%	88%	0%						
	APP/DEPART	959	/	0	0	/	428	1,864	/	2,357	2,233	/	2,271	0					
	BEGIN PEAK HR		4:30 PM																
	VOLUMES	162	0	338	0	0	0	1	889	89	135	1,077	0	2,691					
	APPROACH %	32%	0%	68%	0%	0%	0%	0%	91%	9%	11%	89%	0%						
	PEAK HR FACTOR		0.812			0.000			0.841			0.932		0.885					
	APP/DEPART	500	/	0	0	/	224	979	/	1,227	1,212	/	1,240	0					

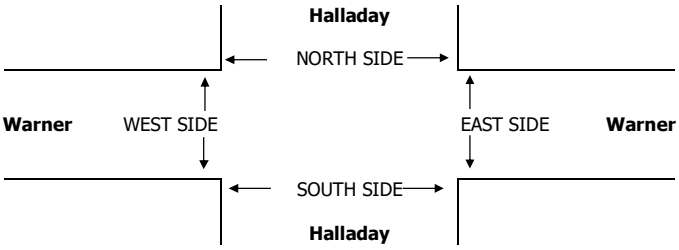

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	8	8	0	0	0	8	8	0	0	0	0	0
	7:15 AM	0	1	0	2	3	0	1	0	2	3	0	0	0	0	0
	7:30 AM	1	1	0	1	3	0	1	0	1	2	1	0	0	0	1
	7:45 AM	0	0	0	2	2	0	0	0	2	2	0	0	0	0	0
	8:00 AM	0	3	0	2	5	0	2	0	2	4	0	1	0	0	1
	8:15 AM	0	0	0	5	5	0	0	0	4	4	0	0	0	1	1
	8:30 AM	0	1	0	1	2	0	0	0	1	1	0	1	0	0	1
	8:45 AM	0	0	0	7	7	0	0	0	7	7	0	0	0	0	0
	TOTAL	1	6	0	28	35	0	4	0	27	31	1	2	0	1	4
PM	4:00 PM	0	1	0	5	6	0	0	0	5	5	0	1	0	0	1
	4:15 PM	0	1	0	4	5	0	1	0	3	4	0	0	0	1	1
	4:30 PM	0	0	0	7	7	0	0	0	6	6	0	0	0	1	1
	4:45 PM	1	0	0	6	7	0	0	0	2	2	1	0	0	4	5
	5:00 PM	0	2	0	9	11	0	2	0	8	10	0	0	0	1	1
	5:15 PM	0	1	0	16	17	0	0	0	15	15	0	1	0	1	2
	5:30 PM	0	0	0	5	5	0	0	0	4	4	0	0	0	1	1
	5:45 PM	0	2	0	2	4	0	1	0	2	3	0	1	0	0	1
	TOTAL	1	7	0	54	62	0	4	0	45	49	1	3	0	9	13

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 14, 19

LOCATION: Santa Ana
NORTH & SOUTH: Halladay
EAST & WEST: Dyer


PROJECT #: SC2183
LOCATION #: 21
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — N / W / E / S

Add U-Turns to Left Turns

		NORTHBOUND Halladay			SOUTHBOUND Halladay			EASTBOUND Dyer			WESTBOUND Dyer				U-TURNS				
	LANES:	NL 1	NT 1	NR 0	SL 1	ST 0	SR 1	EL 1	ET 3	ER 0	WL 1	WT 3	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	1	4	14	37	8	9	2	266	1	25	152	33	552	0	0	0	0	0
	7:15 AM	1	3	14	44	5	8	9	334	5	33	147	33	636	0	0	0	0	0
	7:30 AM	1	4	8	51	8	13	11	363	0	20	175	26	680	0	0	0	0	0
	7:45 AM	4	5	10	43	9	7	9	358	2	20	161	21	649	0	0	0	0	0
	8:00 AM	4	5	16	43	14	10	11	306	2	40	136	20	607	0	0	0	0	0
	8:15 AM	2	6	12	52	14	8	5	290	3	41	149	19	601	0	0	0	1	1
	8:30 AM	3	5	8	46	8	6	4	288	7	34	140	18	567	0	0	0	1	1
	8:45 AM	0	3	12	35	14	9	6	235	6	27	148	18	513	0	0	0	0	0
	VOLUMES	16	35	94	351	80	70	57	2,440	26	240	1,208	188	4,805	0	0	0	2	2
	APPROACH %	11%	24%	65%	70%	16%	14%	2%	97%	1%	15%	74%	11%						
	APP/DEPART	145	/	280	501	/	344	2,523	/	2,887	1,636	/	1,294	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	10	17	48	181	36	38	40	1,361	9	113	619	100	2,572					
	APPROACH %	13%	23%	64%	71%	14%	15%	3%	97%	1%	14%	74%	12%						
	PEAK HR FACTOR		0.750			0.885			0.943			0.941		0.946					
	APP/DEPART	75	/	157	255	/	158	1,410	/	1,590	832	/	667	0					
PM	4:00 PM	5	43	50	37	3	12	21	287	0	14	280	21	773	0	0	0	1	1
	4:15 PM	7	37	56	33	6	10	31	281	4	19	312	25	821	0	0	0	1	1
	4:30 PM	15	36	56	35	3	10	43	335	1	12	362	26	934	0	0	0	0	0
	4:45 PM	8	32	51	26	3	4	30	308	1	11	331	34	839	0	0	0	0	0
	5:00 PM	15	61	56	28	5	11	34	338	4	14	333	30	929	0	0	0	1	1
	5:15 PM	2	49	42	23	3	6	41	304	2	7	410	24	913	0	0	0	0	0
	5:30 PM	7	44	46	27	8	3	37	337	2	15	345	40	911	0	0	0	0	0
	5:45 PM	3	48	45	20	9	10	35	320	1	15	298	32	836	0	0	0	1	1
	VOLUMES	62	350	402	229	40	66	272	2,510	15	107	2,671	232	6,956	0	0	0	4	4
	APPROACH %	8%	43%	49%	68%	12%	20%	10%	90%	1%	4%	89%	8%						
	APP/DEPART	814	/	854	335	/	158	2,797	/	3,145	3,010	/	2,799	0					
	BEGIN PEAK HR		4:30 PM																
	VOLUMES	40	178	205	112	14	31	148	1,285	8	44	1,436	114	3,615					
	APPROACH %	9%	42%	48%	71%	9%	20%	10%	89%	1%	3%	90%	7%						
	PEAK HR FACTOR		0.801			0.818			0.951			0.904		0.968					
	APP/DEPART	423	/	440	157	/	65	1,441	/	1,603	1,594	/	1,507	0					

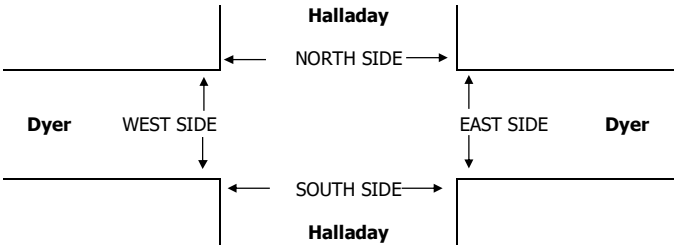

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:15 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:30 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 14, 19

LOCATION: Santa Ana
NORTH & SOUTH: SR-55 SB Ramps
EAST & WEST: MacArthur


PROJECT #: SC2183
LOCATION #: 23
CONTROL: SIGNAL

NOTES: PM WB queue

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND SR-55 SB Ramps			SOUTHBOUND SR-55 SB Ramps			EASTBOUND MacArthur			WESTBOUND MacArthur				U-TURNS				
	LANES:	NL X	NT X	NR X	SL 2	ST X	SR 2	EL X	ET 3	ER 2	WL X	WT 3	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	0	0	0	236	0	222	0	299	232	0	239	22	1,250	0	0	0	0	0
	7:15 AM	0	0	0	233	0	229	0	324	267	0	246	33	1,332	0	0	0	0	0
	7:30 AM	0	0	0	208	0	215	0	397	280	0	305	31	1,436	0	0	0	0	0
	7:45 AM	0	0	0	256	0	229	0	378	246	0	318	38	1,465	0	0	0	0	0
	8:00 AM	0	0	0	242	0	209	0	342	238	0	314	39	1,384	0	0	0	0	0
	8:15 AM	0	0	0	245	0	208	0	309	252	0	325	35	1,374	0	0	0	0	0
	8:30 AM	0	0	0	204	0	144	0	339	250	0	277	55	1,269	0	0	0	0	0
	8:45 AM	0	0	0	237	0	165	0	287	197	0	248	64	1,198	0	0	0	0	0
	VOLUMES	0	0	0	1,861	0	1,621	0	2,675	1,962	0	2,272	317	10,708	0	0	0	0	0
	APPROACH %	0%	0%	0%	53%	0%	47%	0%	58%	42%	0%	88%	12%						
	APP/DEPART	0	/	317	3,482	/	1,962	4,637	/	4,536	2,589	/	3,893	0					
	BEGIN PEAK HR		7:30 AM																
	VOLUMES	0	0	0	951	0	861	0	1,426	1,016	0	1,262	143	5,659					
	APPROACH %	0%	0%	0%	52%	0%	48%	0%	58%	42%	0%	90%	10%						
	PEAK HR FACTOR		0.000			0.934			0.902			0.976		0.966					
	APP/DEPART	0	/	143	1,812	/	1,016	2,442	/	2,377	1,405	/	2,123	0					
PM	4:00 PM	0	0	0	62	0	132	0	326	263	0	389	160	1,332	0	0	0	0	0
	4:15 PM	0	0	0	71	0	187	0	275	234	0	357	148	1,272	0	0	0	0	0
	4:30 PM	0	0	0	74	0	170	0	277	269	0	415	153	1,358	0	0	0	0	0
	4:45 PM	0	0	0	69	0	176	0	274	239	0	366	133	1,257	0	0	0	0	0
	5:00 PM	0	0	0	63	0	166	0	319	282	0	370	178	1,378	0	0	0	0	0
	5:15 PM	0	0	0	79	0	178	0	285	239	0	365	132	1,278	0	0	0	0	0
	5:30 PM	0	0	0	61	0	180	0	291	206	0	370	125	1,233	0	0	0	0	0
	5:45 PM	0	0	0	93	0	171	0	245	187	0	350	105	1,151	0	0	0	0	0
	VOLUMES	0	0	0	572	0	1,360	0	2,292	1,919	0	2,982	1,134	10,259	0	0	0	0	0
	APPROACH %	0%	0%	0%	30%	0%	70%	0%	54%	46%	0%	72%	28%						
	APP/DEPART	0	/	1,134	1,932	/	1,919	4,211	/	2,864	4,116	/	4,342	0					
	BEGIN PEAK HR		4:30 PM																
	VOLUMES	0	0	0	285	0	690	0	1,155	1,029	0	1,516	596	5,271					
	APPROACH %	0%	0%	0%	29%	0%	71%	0%	53%	47%	0%	72%	28%						
	PEAK HR FACTOR		0.000			0.948			0.908			0.930		0.956					
	APP/DEPART	0	/	596	975	/	1,029	2,184	/	1,440	2,112	/	2,206	0					

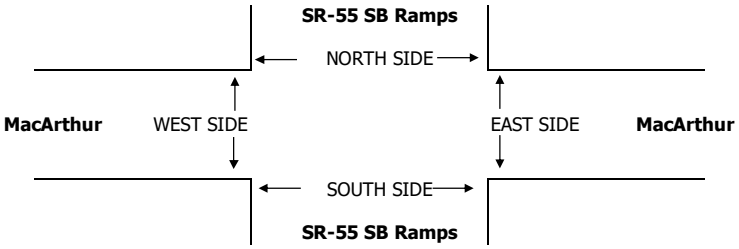

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:30 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:30 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 14, 19

LOCATION: Santa Ana
NORTH & SOUTH: SR-55 NB Ramps
EAST & WEST: MacArthur


PROJECT #: SC2183
LOCATION #: 22
CONTROL: SIGNAL

NOTES: PM WB queue

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☐ Add U-Turns to Left Turns

		NORTHBOUND SR-55 NB Ramps			SOUTHBOUND SR-55 NB Ramps			EASTBOUND MacArthur			WESTBOUND MacArthur				U-TURNS				
	LANES:	NL 2	NT X	NR 1	SL X	ST X	SR X	EL X	ET 2	ER 2	WL X	WT 3	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	183	0	210	0	0	0	0	388	146	0	75	55	1,057	0	0	0	0	0
	7:15 AM	188	0	207	0	0	0	0	365	193	0	88	48	1,089	0	0	0	0	0
	7:30 AM	232	0	201	0	0	0	0	374	237	0	106	48	1,198	0	0	0	0	0
	7:45 AM	215	0	264	0	0	0	0	423	219	0	142	62	1,325	0	0	0	0	0
	8:00 AM	233	0	239	0	0	0	0	399	183	0	118	68	1,240	0	0	0	0	0
	8:15 AM	219	0	262	0	0	0	0	397	149	0	145	63	1,235	0	0	0	0	0
	8:30 AM	209	0	203	0	0	0	0	366	182	0	130	66	1,156	0	0	0	0	0
	8:45 AM	176	0	247	0	0	0	0	374	146	0	134	74	1,151	0	0	0	0	0
	VOLUMES	1,655	0	1,833	0	0	0	0	3,086	1,455	0	938	484	9,451	0	0	0	0	0
	APPROACH %	47%	0%	53%	0%	0%	0%	0%	68%	32%	0%	66%	34%						
	APP/DEPART	3,488	/	484	0	/	1,455	4,541	/	4,919	1,422	/	2,593	0					
	BEGIN PEAK HR		7:30 AM																
	VOLUMES	899	0	966	0	0	0	0	1,593	788	0	511	241	4,998					
	APPROACH %	48%	0%	52%	0%	0%	0%	0%	67%	33%	0%	68%	32%						
	PEAK HR FACTOR		0.969			0.000			0.927			0.904		0.943					
	APP/DEPART	1,865	/	241	0	/	788	2,381	/	2,559	752	/	1,410	0					
PM	4:00 PM	164	0	132	0	0	0	0	178	215	0	391	248	1,328	0	0	0	0	0
	4:15 PM	144	0	122	0	0	0	0	183	160	0	355	271	1,235	0	0	1	0	1
	4:30 PM	167	0	77	0	0	0	0	178	171	0	404	267	1,264	0	0	0	0	0
	4:45 PM	159	0	90	0	0	0	0	164	177	0	336	284	1,210	0	0	0	0	0
	5:00 PM	131	0	67	0	0	0	0	211	175	0	419	273	1,276	0	0	0	0	0
	5:15 PM	160	0	70	0	0	0	0	206	160	0	336	227	1,159	0	0	0	0	0
	5:30 PM	158	0	110	0	0	0	0	235	121	0	338	214	1,176	0	0	0	0	0
	5:45 PM	152	0	93	0	0	0	0	181	151	0	297	218	1,092	0	0	0	0	0
	VOLUMES	1,235	0	761	0	0	0	0	1,536	1,330	0	2,876	2,002	9,741	0	0	1	0	1
	APPROACH %	62%	0%	38%	0%	0%	0%	0%	54%	46%	0%	59%	41%						
	APP/DEPART	1,996	/	2,002	0	/	1,330	2,867	/	2,297	4,878	/	4,112	0					
	BEGIN PEAK HR		4:00 PM																
	VOLUMES	634	0	421	0	0	0	0	703	723	0	1,486	1,070	5,038					
	APPROACH %	60%	0%	40%	0%	0%	0%	0%	49%	51%	0%	58%	42%						
	PEAK HR FACTOR		0.891			0.000			0.908			0.952		0.948					
	APP/DEPART	1,055	/	1,070	0	/	723	1,427	/	1,124	2,556	/	2,121	0					

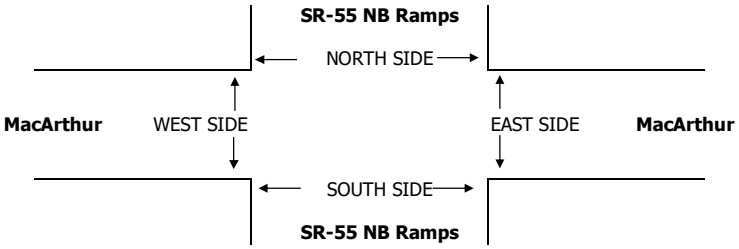

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:30 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:00 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Thu, May 16, 19

LOCATION: Santa Ana
NORTH & SOUTH: SR-55 SB Ramps
EAST & WEST: Dyer


PROJECT #: SC2183
LOCATION #: 28
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N ◄ W E ► S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND SR-55 SB Ramps			SOUTHBOUND SR-55 SB Ramps			EASTBOUND Dyer			WESTBOUND Dyer				U-TURNS				
	LANES:	NL 1.5	NT 0.5	NR 2	SL 0.5	ST 1.5	SR 1	EL 1	ET 3	ER 1	WL 2	WT 3	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	73	5	119	7	46	12	3	254	66	76	129	23	813	0	0	0	0	0
	7:15 AM	56	2	140	5	53	16	7	320	68	79	161	18	925	0	0	0	1	1
	7:30 AM	64	7	127	12	72	16	2	344	81	95	153	21	994	0	0	0	0	0
	7:45 AM	51	6	125	5	68	16	14	331	64	101	166	38	985	0	0	0	0	0
	8:00 AM	65	6	120	14	47	11	6	314	76	90	167	27	943	0	0	0	1	1
	8:15 AM	38	6	128	18	52	16	12	335	61	117	154	20	957	0	0	0	0	0
	8:30 AM	45	3	88	18	41	18	7	243	70	131	137	18	819	0	0	0	0	0
	8:45 AM	46	0	73	18	37	12	12	235	61	92	170	19	775	0	0	0	0	0
	VOLUMES	438	35	920	97	416	117	63	2,376	547	781	1,237	184	7,211	0	0	0	2	2
	APPROACH %	31%	3%	66%	15%	66%	19%	2%	80%	18%	35%	56%	8%						
	APP/DEPART	1,393	/	282	630	/	1,742	2,986	/	3,395	2,202	/	1,792	0					
	BEGIN PEAK HR		7:30 AM																
	VOLUMES	218	25	500	49	239	59	34	1,324	282	403	640	106	3,879					
	APPROACH %	29%	3%	67%	14%	69%	17%	2%	81%	17%	35%	56%	9%						
	PEAK HR FACTOR		0.938			0.868			0.960			0.942		0.976					
	APP/DEPART	743	/	165	347	/	923	1,640	/	1,874	1,149	/	917	0					
PM	4:00 PM	74	1	43	30	57	19	18	308	62	113	219	14	958	0	0	0	0	0
	4:15 PM	74	0	56	21	34	14	16	336	42	107	258	11	969	0	0	0	0	0
	4:30 PM	64	2	55	26	55	24	11	383	51	138	238	9	1,056	0	1	0	1	2
	4:45 PM	84	2	63	15	39	22	15	370	48	127	233	23	1,041	0	0	1	0	1
	5:00 PM	74	4	49	40	61	36	19	372	57	138	257	15	1,122	0	0	0	0	0
	5:15 PM	93	1	70	20	68	26	19	382	48	147	253	16	1,143	0	0	0	1	1
	5:30 PM	59	1	56	23	40	16	23	341	32	97	243	18	949	0	0	1	0	1
	5:45 PM	83	2	68	17	47	22	31	346	40	95	196	15	962	0	0	0	0	0
	VOLUMES	605	13	460	192	401	179	152	2,838	380	962	1,897	121	8,200	0	1	2	2	5
	APPROACH %	56%	1%	43%	25%	52%	23%	5%	84%	11%	32%	64%	4%						
	APP/DEPART	1,078	/	285	772	/	1,741	3,370	/	3,491	2,980	/	2,683	0					
	BEGIN PEAK HR		4:30 PM																
	VOLUMES	315	9	237	101	223	108	64	1,507	204	550	981	63	4,362					
	APPROACH %	56%	2%	42%	23%	52%	25%	4%	85%	11%	35%	62%	4%						
	PEAK HR FACTOR		0.855			0.788			0.988			0.958		0.954					
	APP/DEPART	561	/	136	432	/	975	1,775	/	1,846	1,594	/	1,405	0					

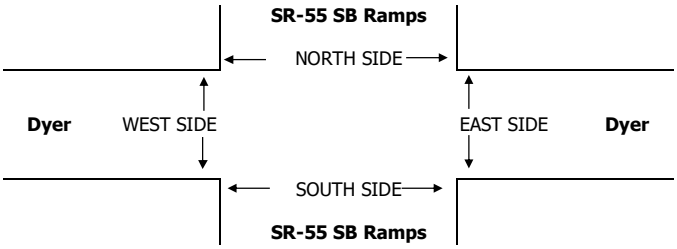

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:30 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:30 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Mar 1, 16

LOCATION: Santa Ana
NORTH & SOUTH: Glassell
EAST & WEST: La Veta


PROJECT #: SC0846
LOCATION #: 5
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Glassell			SOUTHBOUND Glassell			EASTBOUND La Veta			WESTBOUND La Veta				U-TURNS				
		NL	NT	NR	SL	ST	SR	EL	ET	ER	WL	WT	WR	TOTAL	NB	SB	EB	WB	TTL
	LANES:	2	1	1	1	2	0	1	1	1	1	2	0		0	0	0	0	
AM	7:00 AM	23	68	11	1	70	14	8	28	80	44	33	1	381	0	0	0	0	0
	7:15 AM	61	73	17	3	94	16	8	37	85	57	39	1	491	0	0	0	0	0
	7:30 AM	58	85	22	1	104	17	6	54	100	65	58	0	570	0	0	0	0	0
	7:45 AM	70	93	27	3	72	17	15	61	107	53	65	1	584	0	0	0	0	0
	8:00 AM	76	121	43	9	74	19	10	45	82	52	61	1	593	0	0	0	0	0
	8:15 AM	48	96	28	3	94	22	5	27	71	56	55	3	508	0	0	0	0	0
	8:30 AM	47	94	16	1	47	9	6	36	82	35	30	0	403	0	0	0	0	0
	8:45 AM	44	112	29	0	30	12	14	34	67	32	43	0	417	0	0	0	0	0
	VOLUMES	427	742	193	21	585	126	72	322	674	394	384	7	3,947	0	0	0	0	0
	APPROACH %	31%	54%	14%	3%	80%	17%	7%	30%	63%	50%	49%	1%						
	APP/DEPART	1,362	/	821	732	/	1,653	1,068	/	536	785	/	937	0					
	BEGIN PEAK HR		7:30 AM																
	VOLUMES	252	395	120	16	344	75	36	187	360	226	239	5	2,255					
	APPROACH %	33%	51%	16%	4%	79%	17%	6%	32%	62%	48%	51%	1%						
	PEAK HR FACTOR		0.799			0.891			0.796			0.955		0.951					
	APP/DEPART	767	/	436	435	/	930	583	/	323	470	/	566	0					
PM	4:00 PM	62	122	38	2	107	5	19	69	92	35	54	3	608	0	0	0	0	0
	4:15 PM	72	111	60	5	103	11	16	53	100	31	33	2	597	0	0	0	0	0
	4:30 PM	89	104	42	3	114	9	16	34	79	29	36	1	556	0	0	0	0	0
	4:45 PM	91	114	40	1	118	14	12	45	79	23	38	2	577	0	0	0	0	0
	5:00 PM	106	131	45	3	105	7	20	58	128	33	49	2	687	0	0	0	0	0
	5:15 PM	109	132	38	5	125	11	24	82	112	33	61	3	735	0	0	0	0	0
	5:30 PM	122	117	36	3	120	8	13	61	95	40	58	2	675	0	0	0	0	0
	5:45 PM	116	90	34	3	129	9	21	56	108	42	101	3	712	0	0	0	0	0
	VOLUMES	767	921	333	25	921	74	141	458	793	266	430	18	5,147	0	0	0	0	0
	APPROACH %	38%	46%	16%	2%	90%	7%	10%	33%	57%	37%	60%	3%						
	APP/DEPART	2,021	/	1,080	1,020	/	1,980	1,392	/	816	714	/	1,271	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	453	470	153	14	479	35	78	257	443	148	269	10	2,809					
	APPROACH %	42%	44%	14%	3%	91%	7%	10%	33%	57%	35%	63%	2%						
	PEAK HR FACTOR		0.954			0.936			0.892			0.731		0.955					
	APP/DEPART	1,076	/	558	528	/	1,070	778	/	424	427	/	757	0					

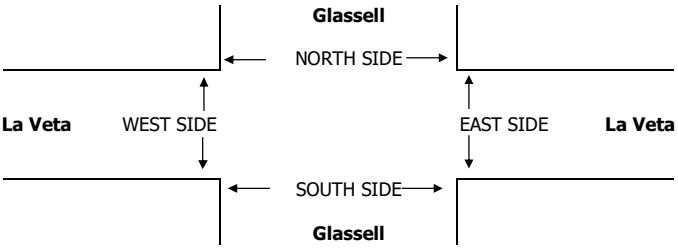

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	1	3	0	1	5	0	2	0	1	3	1	1	0	0	2
	7:15 AM	2	0	2	2	6	2	0	1	2	5	0	0	1	0	1
	7:30 AM	3	1	1	1	6	3	1	1	0	5	0	0	0	1	1
	7:45 AM	2	3	3	0	8	1	3	2	0	6	1	0	1	0	2
	8:00 AM	0	2	2	2	6	0	2	1	2	5	0	0	1	0	1
	8:15 AM	2	2	2	1	7	1	2	1	0	4	1	0	1	1	3
	8:30 AM	6	1	0	3	10	6	1	0	2	9	0	0	0	1	1
	8:45 AM	4	0	3	3	10	4	0	2	2	8	0	0	1	1	2
	TOTAL	20	12	13	13	58	17	11	8	9	45	3	1	5	4	13
PM	4:00 PM	1	5	2	2	10	1	5	2	0	8	0	0	0	2	2
	4:15 PM	2	3	1	5	11	2	3	1	2	8	0	0	0	3	3
	4:30 PM	2	1	0	5	8	2	1	0	3	6	0	0	0	2	2
	4:45 PM	5	2	0	5	12	4	1	0	3	8	1	1	0	2	4
	5:00 PM	8	0	6	2	16	7	0	6	1	14	1	0	0	1	2
	5:15 PM	5	1	3	2	11	4	1	3	2	10	1	0	0	0	1
	5:30 PM	5	3	3	0	11	4	3	3	0	10	1	0	0	0	1
	5:45 PM	4	0	3	5	12	4	0	1	5	10	0	0	2	0	2
	TOTAL	32	15	18	26	91	28	14	16	16	74	4	1	2	10	17

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Mar 1, 16

LOCATION: Santa Ana
NORTH & SOUTH: Glassell
EAST & WEST: SR-22 WB Off-Ramps


PROJECT #: SC0846
LOCATION #: 1
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — N / W / E / S

Add U-Turns to Left Turns

		NORTHBOUND Glassell			SOUTHBOUND Glassell			EASTBOUND SR-22 WB Off-Ramps			WESTBOUND SR-22 WB Off-Ramps				U-TURNS				
	LANES:	NL 1	NT 2	NR X	SL X	ST 2	SR 1	EL X	ET X	ER X	WL 1.5	WT 0	WR 1.5	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	62	71	0	0	133	56	0	0	0	61	0	44	427	0	0	0	0	0
	7:15 AM	107	93	0	0	177	63	0	0	0	79	4	89	612	0	0	0	0	0
	7:30 AM	109	124	0	0	174	76	0	0	0	67	0	101	651	0	0	0	0	0
	7:45 AM	139	164	0	0	207	102	0	0	0	60	0	113	785	0	0	0	0	0
	8:00 AM	125	158	0	0	156	91	0	0	0	67	0	106	703	0	0	0	0	0
	8:15 AM	103	127	0	0	166	67	0	0	0	67	0	70	600	0	0	0	0	0
	8:30 AM	99	98	0	0	142	44	0	0	0	92	0	70	545	0	0	0	0	0
	8:45 AM	94	129	0	0	103	50	0	0	0	69	0	76	521	0	0	0	0	0
	VOLUMES	838	964	0	0	1,258	549	0	0	0	562	4	669	4,844	0	0	0	0	0
	APPROACH %	47%	53%	0%	0%	70%	30%	0%	0%	0%	46%	0%	54%						
	APP/DEPART	1,802	/	1,633	1,807	/	1,820	0	/	0	1,235	/	1,391	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	480	539	0	0	714	332	0	0	0	273	4	409	2,751					
	APPROACH %	47%	53%	0%	0%	68%	32%	0%	0%	0%	40%	1%	60%						
	PEAK HR FACTOR		0.841			0.846			0.000			0.991		0.876					
	APP/DEPART	1,019	/	948	1,046	/	987	0	/	0	686	/	816	0					
PM	4:00 PM	99	134	0	0	171	45	0	0	0	31	1	52	533	0	0	0	0	0
	4:15 PM	126	219	0	0	221	53	0	0	0	54	0	58	731	0	0	0	0	0
	4:30 PM	123	188	0	0	182	55	0	0	0	53	0	62	663	0	0	0	0	0
	4:45 PM	129	207	0	0	198	40	0	0	0	51	0	72	697	0	0	0	0	0
	5:00 PM	138	239	0	0	198	68	0	0	0	39	1	88	771	0	0	0	0	0
	5:15 PM	113	210	0	0	230	69	0	0	0	43	1	86	752	0	0	0	0	0
	5:30 PM	144	225	0	0	200	47	0	0	0	55	2	66	739	0	0	0	0	0
	5:45 PM	140	200	0	0	215	61	0	0	0	56	2	103	777	1	0	0	0	1
	VOLUMES	1,012	1,622	0	0	1,615	438	0	0	0	382	7	587	5,663	1	0	0	0	1
	APPROACH %	38%	62%	0%	0%	79%	21%	0%	0%	0%	39%	1%	60%						
	APP/DEPART	2,634	/	2,209	2,053	/	1,998	0	/	0	976	/	1,456	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	535	874	0	0	843	245	0	0	0	193	6	343	3,039					
	APPROACH %	38%	62%	0%	0%	77%	23%	0%	0%	0%	36%	1%	63%						
	PEAK HR FACTOR		0.934			0.910			0.000			0.842		0.978					
	APP/DEPART	1,409	/	1,217	1,088	/	1,037	0	/	0	542	/	785	0					

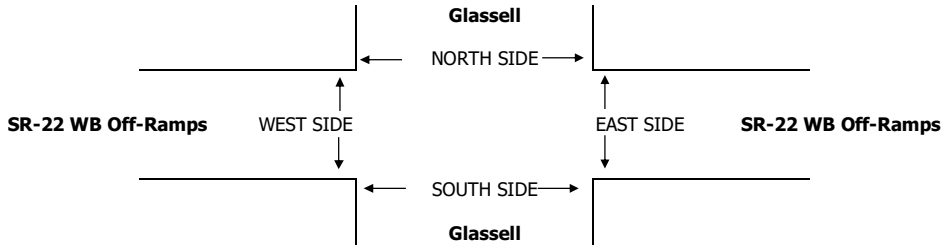

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	3	1	4	0	0	1	0	1	0	0	2	1	3
	7:15 AM	0	0	3	1	4	0	0	2	0	2	0	0	1	1	2
	7:30 AM	0	0	3	1	4	0	0	2	0	2	0	0	1	1	2
	7:45 AM	0	0	1	1	2	0	0	1	0	1	0	0	0	1	1
	8:00 AM	0	0	4	3	7	0	0	2	3	5	0	0	2	0	2
	8:15 AM	0	0	3	1	4	0	0	1	0	1	0	0	2	1	3
	8:30 AM	0	0	2	3	5	0	0	1	2	3	0	0	1	1	2
	8:45 AM	0	0	2	1	3	0	0	1	0	1	0	0	1	1	2
	TOTAL	0	0	21	12	33	0	0	11	5	16	0	0	10	7	17
PM	4:00 PM	0	0	4	5	9	0	0	2	4	6	0	0	2	1	3
	4:15 PM	0	0	8	1	9	0	0	4	1	5	0	0	4	0	4
	4:30 PM	0	0	3	2	5	0	0	2	0	2	0	0	1	2	3
	4:45 PM	0	0	5	6	11	0	0	2	3	5	0	0	3	3	6
	5:00 PM	0	0	6	2	8	0	0	4	0	4	0	0	2	2	4
	5:15 PM	0	0	5	0	5	0	0	2	0	2	0	0	3	0	3
	5:30 PM	0	0	6	0	6	0	0	3	0	3	0	0	3	0	3
	5:45 PM	0	0	6	2	8	0	0	4	0	4	0	0	2	2	4
	TOTAL	0	0	43	18	61	0	0	23	8	31	0	0	20	10	30

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Mar 1, 16

LOCATION: Santa Ana
NORTH & SOUTH: Glassell
EAST & WEST: SR-22 EB On-Ramps


PROJECT #: SC0846
LOCATION #: 2
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Glassell			SOUTHBOUND Glassell			EASTBOUND SR-22 EB On-Ramps			WESTBOUND SR-22 EB On-Ramps				U-TURNS				
	LANES:	NL X	NT 2	NR 1	SL 1	ST 2	SR X	EL 1.3	ET 0.3	ER 1.3	WL X	WT X	WR X	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	0	113	51	79	158	0	35	0	209	0	0	0	645	0	0	0	0	0
	7:15 AM	0	167	51	58	192	0	46	0	239	0	0	0	753	0	0	0	0	0
	7:30 AM	0	185	66	81	159	0	57	0	236	0	0	0	784	0	0	0	0	0
	7:45 AM	0	222	50	71	182	0	84	0	241	0	0	0	850	0	0	0	0	0
	8:00 AM	0	212	42	59	171	0	60	0	256	0	0	0	800	0	0	0	0	0
	8:15 AM	0	147	40	70	162	0	53	1	271	0	0	0	744	0	0	0	0	0
	8:30 AM	0	157	41	43	159	0	60	1	233	0	0	0	694	0	0	0	0	0
	8:45 AM	0	145	36	53	128	0	71	0	208	0	0	0	641	0	0	0	0	0
	VOLUMES	0	1,348	377	514	1,311	0	466	2	1,893	0	0	0	5,911	0	0	0	0	0
	APPROACH %	0%	78%	22%	28%	72%	0%	20%	0%	80%	0%	0%	0%						
	APP/DEPART	1,725	/	1,814	1,825	/	3,204	2,361	/	893	0	/	0	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	0	786	209	269	704	0	247	0	972	0	0	0	3,187					
	APPROACH %	0%	79%	21%	28%	72%	0%	20%	0%	80%	0%	0%	0%						
	PEAK HR FACTOR		0.915			0.961			0.938			0.000		0.937					
	APP/DEPART	995	/	1,033	973	/	1,676	1,219	/	478	0	/	0	0					
PM	4:00 PM	0	237	78	85	155	0	64	0	116	0	0	0	735	0	0	0	0	0
	4:15 PM	0	226	64	92	164	0	86	0	126	0	0	0	758	0	1	0	0	1
	4:30 PM	0	253	63	77	146	0	59	0	121	0	0	0	719	0	0	0	0	0
	4:45 PM	0	265	58	91	138	0	77	0	129	0	0	0	758	0	0	0	0	0
	5:00 PM	0	276	69	100	160	0	67	0	147	0	0	0	819	0	0	0	0	0
	5:15 PM	0	277	85	87	157	0	53	2	119	0	0	0	780	0	0	0	0	0
	5:30 PM	0	310	71	87	165	0	44	0	111	0	0	0	788	0	0	0	0	0
	5:45 PM	0	292	70	92	172	0	56	1	106	0	0	0	789	0	0	0	0	0
	VOLUMES	0	2,136	558	711	1,257	0	506	3	975	0	0	0	6,146	0	1	0	0	1
	APPROACH %	0%	79%	21%	36%	64%	0%	34%	0%	66%	0%	0%	0%						
	APP/DEPART	2,694	/	2,643	1,968	/	2,232	1,484	/	1,271	0	/	0	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	0	1,155	295	366	654	0	220	3	483	0	0	0	3,176					
	APPROACH %	0%	80%	20%	36%	64%	0%	31%	0%	68%	0%	0%	0%						
	PEAK HR FACTOR		0.951			0.966			0.825			0.000		0.969					
	APP/DEPART	1,450	/	1,375	1,020	/	1,137	706	/	664	0	/	0	0					

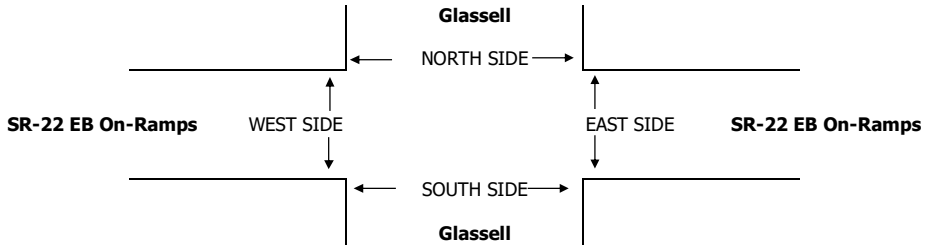

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	3	1	4	0	0	1	0	1	0	0	2	1	3
	7:15 AM	0	0	4	1	5	0	0	2	0	2	0	0	2	1	3
	7:30 AM	0	0	1	1	2	0	0	1	0	1	0	0	0	1	1
	7:45 AM	0	0	3	1	4	0	0	2	1	3	0	0	1	0	1
	8:00 AM	0	0	4	2	6	0	0	2	2	4	0	0	2	0	2
	8:15 AM	0	0	2	1	3	0	0	1	0	1	0	0	1	1	2
	8:30 AM	0	0	2	4	6	0	0	1	2	3	0	0	1	2	3
	8:45 AM	0	1	2	0	3	0	1	1	0	2	0	0	1	0	1
	TOTAL	0	1	21	11	33	0	1	11	5	17	0	0	10	6	16
PM	4:00 PM	0	0	6	5	11	0	0	2	4	6	0	0	4	1	5
	4:15 PM	0	0	7	2	9	0	0	5	1	6	0	0	2	1	3
	4:30 PM	0	0	4	3	7	0	0	2	1	3	0	0	2	2	4
	4:45 PM	0	0	5	5	10	0	0	2	2	4	0	0	3	3	6
	5:00 PM	0	0	7	1	8	0	0	4	0	4	0	0	3	1	4
	5:15 PM	0	2	5	0	7	0	2	3	0	5	0	0	2	0	2
	5:30 PM	0	0	6	0	6	0	0	3	0	3	0	0	3	0	3
	5:45 PM	0	0	11	3	14	0	0	8	0	8	0	0	3	3	6
	TOTAL	0	2	51	19	72	0	2	29	8	39	0	0	22	11	33

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Thu, Feb 11, 16

LOCATION: Santa Ana
NORTH & SOUTH: Grand
EAST & WEST: Fairhaven


PROJECT #: SC0846
LOCATION #: 2
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Grand			SOUTHBOUND Grand			EASTBOUND Fairhaven			WESTBOUND Fairhaven				U-TURNS				
	LANES:	NL 1	NT 3	NR 0	SL 1	ST 2	SR 1	EL 1	ET 2	ER 0	WL 1	WT 1	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	4	146	15	32	350	6	19	6	11	38	3	30	660	1	0	0	0	1
	7:15 AM	3	169	23	27	367	7	18	15	13	55	3	55	755	3	0	0	0	3
	7:30 AM	6	198	30	45	341	12	26	13	20	56	2	57	806	1	0	0	0	1
	7:45 AM	3	183	31	50	333	8	29	22	13	63	9	52	796	1	1	0	0	2
	8:00 AM	5	158	17	45	346	3	22	7	10	70	12	56	751	2	0	0	0	2
	8:15 AM	9	152	27	28	387	3	19	5	11	66	5	35	747	2	1	0	0	3
	8:30 AM	6	154	7	36	342	16	26	6	8	62	4	42	709	2	0	0	0	2
	8:45 AM	2	164	22	31	335	11	15	6	9	47	1	41	684	1	0	0	0	1
	VOLUMES	38	1,324	172	294	2,801	66	174	80	95	457	39	368	5,908	13	2	0	0	15
	APPROACH %	2%	86%	11%	9%	89%	2%	50%	23%	27%	53%	5%	43%						
	APP/DEPART	1,534	/	1,868	3,161	/	3,366	349	/	544	864	/	130	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	17	708	101	167	1,387	30	95	57	56	244	26	220	3,108					
	APPROACH %	2%	86%	12%	11%	88%	2%	46%	27%	27%	50%	5%	45%						
	PEAK HR FACTOR		0.882			0.988			0.813			0.888		0.964					
	APP/DEPART	826	/	1,024	1,584	/	1,694	208	/	324	490	/	66	0					
PM	4:00 PM	11	271	36	31	181	12	14	11	3	40	6	31	647	4	2	0	0	6
	4:15 PM	17	254	36	36	206	18	21	6	4	44	7	29	678	3	0	0	0	3
	4:30 PM	15	306	34	45	187	14	12	4	4	44	9	24	698	5	3	0	0	8
	4:45 PM	9	313	47	45	203	21	13	7	7	44	7	36	752	3	1	0	0	4
	5:00 PM	9	303	53	54	164	23	25	12	7	54	4	38	746	3	4	0	0	7
	5:15 PM	11	293	62	58	238	16	12	7	4	56	9	47	813	1	4	0	0	5
	5:30 PM	14	297	60	58	218	17	23	13	11	61	18	45	835	3	1	0	0	4
	5:45 PM	10	273	58	43	239	22	15	11	9	74	15	43	812	1	1	0	0	2
	VOLUMES	96	2,310	386	370	1,636	143	135	71	49	417	75	293	5,981	23	16	0	0	39
	APPROACH %	3%	83%	14%	17%	76%	7%	53%	28%	19%	53%	10%	37%						
	APP/DEPART	2,792	/	2,754	2,149	/	2,125	255	/	811	785	/	291	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	44	1,166	233	213	859	78	75	43	31	245	46	173	3,206					
	APPROACH %	3%	81%	16%	19%	75%	7%	50%	29%	21%	53%	10%	37%						
	PEAK HR FACTOR		0.972			0.921			0.793			0.879		0.960					
	APP/DEPART	1,443	/	1,424	1,150	/	1,143	149	/	479	464	/	160	0					

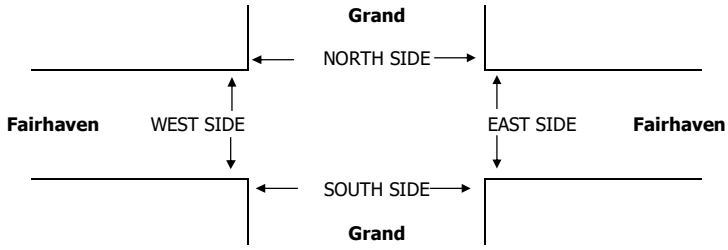

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	6	3	1	10	0	6	1	1	8	0	0	2	0	2
	7:15 AM	0	2	2	0	4	0	2	2	0	4	0	0	0	0	0
	7:30 AM	2	18	9	3	32	2	18	9	1	30	0	0	0	2	2
	7:45 AM	18	22	18	8	66	18	22	16	8	64	0	0	2	0	2
	8:00 AM	6	13	1	3	23	6	13	1	2	22	0	0	0	1	1
	8:15 AM	1	3	1	1	6	1	3	1	1	6	0	0	0	0	0
	8:30 AM	2	3	3	2	10	2	3	1	1	7	0	0	2	1	3
	8:45 AM	2	1	4	0	7	2	0	3	0	5	0	1	1	0	2
	TOTAL	31	68	41	18	158	31	67	34	14	146	0	1	7	4	12
PM	4:00 PM	3	4	1	1	9	3	4	1	0	8	0	0	0	1	1
	4:15 PM	4	2	1	1	8	4	1	1	1	7	0	1	0	0	1
	4:30 PM	2	3	4	2	11	2	2	3	0	7	0	1	1	2	4
	4:45 PM	1	6	2	3	12	1	6	2	3	12	0	0	0	0	0
	5:00 PM	6	8	4	0	18	5	8	3	0	16	1	0	1	0	2
	5:15 PM	3	4	9	3	19	2	3	5	0	10	1	1	4	3	9
	5:30 PM	8	6	2	5	21	8	6	2	2	18	0	0	0	3	3
	5:45 PM	0	10	14	1	25	0	10	8	1	19	0	0	6	0	6
	TOTAL	27	43	37	16	123	25	40	25	7	97	2	3	12	9	26

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: GRAND AVENUE
E-W Direction: SANTA CLARA AVENUE

File Name : H1702015
Site Code :
Start Date : 2/9/2017
Page No : 1

Groups Printed- Turning Movements

	GRAND AVENUE Southbound				SANTA CLARA AVENUE Westbound			GRAND AVENUE Northbound			SANTA CLARA AVENUE Eastbound			
Start Time	Right	Thru	Left	Peds	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	Int. Total
07:00	47	415	37	1	39	31	17	17	88	7	10	31	26	766
07:15	78	364	64	0	47	54	19	28	83	13	11	56	35	852
07:30	84	333	80	1	67	58	33	31	131	15	13	65	26	937
07:45	76	317	83	0	52	51	36	37	133	29	16	58	32	920
Total	285	1429	264	2	205	194	105	113	435	64	50	210	119	3475
08:00	71	362	54	0	38	61	28	19	102	7	6	47	45	840
08:15	70	442	35	0	32	47	30	24	91	5	6	32	26	840
08:30	46	429	54	0	29	18	22	19	118	10	15	20	20	800
08:45	45	338	48	0	30	17	25	20	104	11	12	25	21	696
Total	232	1571	191	0	129	143	105	82	415	33	39	124	112	3176
*** BREAK ***														
16:00	45	163	42	1	44	56	35	42	249	22	5	32	33	769
16:15	47	168	38	1	25	46	38	62	268	18	10	31	37	789
16:30	26	195	31	0	43	45	36	55	280	18	11	36	36	812
16:45	43	170	48	1	49	57	25	47	276	17	14	34	36	817
Total	161	696	159	3	161	204	134	206	1073	75	40	133	142	3187
17:00	61	201	40	2	87	68	32	64	297	16	7	56	43	974
17:15	60	234	60	2	52	63	29	59	286	28	7	39	46	965
17:30	48	179	56	0	59	55	37	50	287	26	8	43	27	875
17:45	44	228	57	1	54	50	34	65	280	15	12	50	38	928
Total	213	842	213	5	252	236	132	238	1150	85	34	188	154	3742
Grand Total	891	4538	827	10	747	777	476	639	3073	257	163	655	527	13580
Apprch %	14.2	72.4	13.2	0.2	37.3	38.8	23.8	16.1	77.4	6.5	12.1	48.7	39.2	
Total %	6.6	33.4	6.1	0.1	5.5	5.7	3.5	4.7	22.6	1.9	1.2	4.8	3.9	


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: GRAND AVENUE
E-W Direction: SANTA CLARA AVENUE

File Name : H1702015
Site Code :
Start Date : 2/9/2017
Page No : 2

	GRAND AVENUE Southbound					SANTA CLARA AVENUE Westbound				GRAND AVENUE Northbound				SANTA CLARA AVENUE Eastbound				
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 07:00 to 08:45 - Peak 1 of 1																		
Peak Hour for Entire Intersection Begins at 07:15																		
07:15	78	**364**	64	0	**506**	47	54	19	120	28	83	13	124	11	56	35	102	852
07:30	**84**	333	80	**1**	498	**67**	58	33	**158**	31	131	15	177	13	**65**	26	104	**937**
07:45	76	317	**83**	0	476	52	51	**36**	139	**37**	**133**	**29**	**199**	**16**	58	32	**106**	920
08:00	71	362	54	0	487	38	**61**	28	127	19	102	7	128	6	47	**45**	98	840
Total Volume	309	1376	281	1	1967	204	224	116	544	115	449	64	628	46	226	138	410	3549
% App. Total	15.7	70	14.3	0.1		37.5	41.2	21.3		18.3	71.5	10.2		11.2	55.1	33.7		
PHF	.920	.945	.846	.250	.972	.761	.918	.806	.861	.777	.844	.552	.789	.719	.869	.767	.967	.947

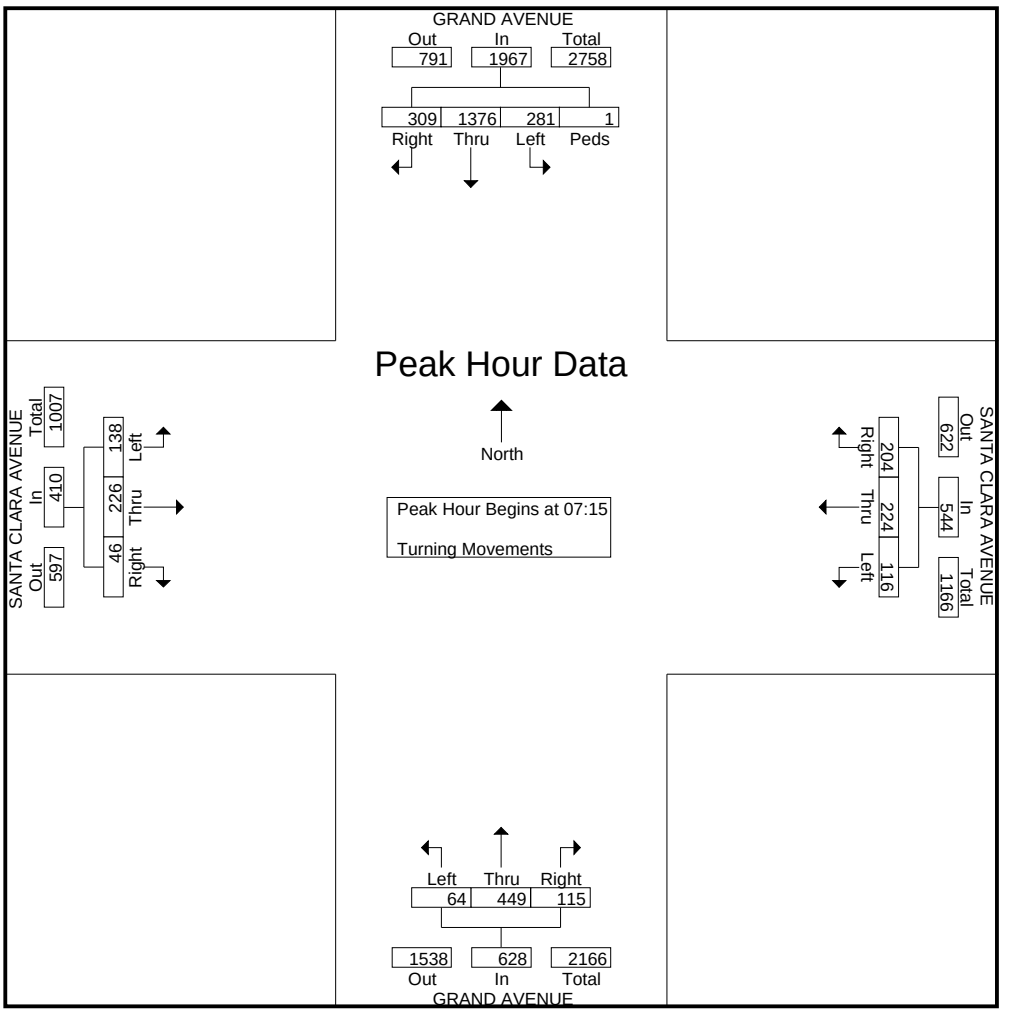


Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

City: SANTA ANA
N-S Direction: GRAND AVENUE
E-W Direction: SANTA CLARA AVENUE

File Name : H1702015
Site Code :
Start Date : 2/9/2017
Page No : 3

	GRAND AVENUE Southbound					SANTA CLARA AVENUE Westbound				GRAND AVENUE Northbound				SANTA CLARA AVENUE Eastbound				
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Right	Thru	Left	App. Total	Int. Total
Peak Hour Analysis From 16:00 to 17:45 - Peak 1 of 1																		
Peak Hour for Entire Intersection Begins at 17:00																		
17:00	**61**	201	40	**2**	304	**87**	**68**	32	**187**	64	**297**	16	**377**	7	**56**	43	**106**	**974**
17:15	60	**234**	**60**	2	**356**	52	63	29	144	59	286	**28**	373	7	39	**46**	92	965
17:30	48	179	56	0	283	59	55	**37**	151	50	287	26	363	8	43	27	78	875
17:45	44	228	57	1	330	54	50	34	138	**65**	280	15	360	**12**	50	38	100	928
Total Volume	213	842	213	5	1273	252	236	132	620	238	1150	85	1473	34	188	154	376	3742
% App. Total	16.7	66.1	16.7	0.4		40.6	38.1	21.3		16.2	78.1	5.8		9	50	41		
PHF	.873	.900	.888	.625	.894	.724	.868	.892	.829	.915	.968	.759	.977	.708	.839	.837	.887	.960

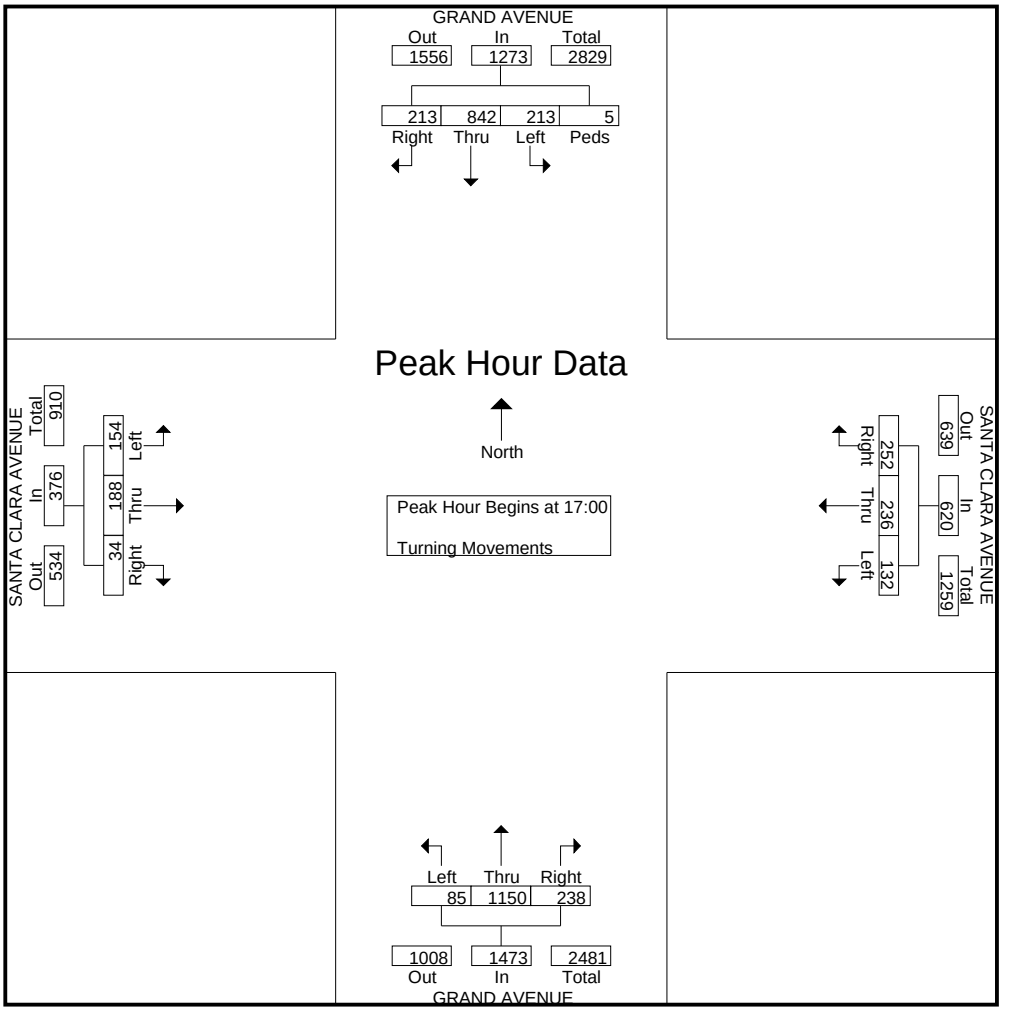

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 14, 19

LOCATION: Santa Ana
NORTH & SOUTH: Grand
EAST & WEST: 17th


PROJECT #: SC2183
LOCATION #: 24
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Grand			SOUTHBOUND Grand			EASTBOUND 17th			WESTBOUND 17th				U-TURNS				
	LANES:	NL 1	NT 3	NR 0	SL 1	ST 2	SR 1	EL 2	ET 3	ER 0	WL 2	WT 3	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	24	85	43	45	293	34	38	137	41	46	115	10	911	1	0	5	0	6
	7:15 AM	32	100	80	51	301	46	46	183	31	67	176	18	1,131	3	0	5	0	8
	7:30 AM	49	146	87	60	309	60	64	216	31	89	210	26	1,347	1	0	6	0	7
	7:45 AM	43	137	97	77	289	73	53	217	17	84	236	24	1,347	2	0	3	0	5
	8:00 AM	37	88	59	95	287	53	58	210	25	65	177	19	1,173	0	0	4	0	4
	8:15 AM	36	70	56	67	314	39	35	169	34	59	132	15	1,026	3	0	5	0	8
	8:30 AM	44	93	50	62	305	35	33	137	35	48	114	26	982	1	0	12	0	13
	8:45 AM	41	77	50	80	293	45	30	144	30	46	113	13	962	1	0	2	0	3
	VOLUMES	306	796	522	537	2,391	385	357	1,413	244	504	1,273	151	8,879	12	0	42	0	54
	APPROACH %	19%	49%	32%	16%	72%	12%	18%	70%	12%	26%	66%	8%						
	APP/DEPART	1,624	/	1,262	3,313	/	3,151	2,014	/	2,472	1,928	/	1,994	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	161	471	323	283	1,186	232	221	826	104	305	799	87	4,998					
	APPROACH %	17%	49%	34%	17%	70%	14%	19%	72%	9%	26%	67%	7%						
	PEAK HR FACTOR		0.847			0.969			0.925			0.866		0.928					
	APP/DEPART	955	/	761	1,701	/	1,601	1,151	/	1,432	1,191	/	1,204	0					
PM	4:00 PM	76	196	78	49	111	33	54	171	24	60	246	58	1,156	0	0	5	0	5
	4:15 PM	64	193	55	55	132	51	62	204	29	59	255	50	1,209	0	0	8	0	8
	4:30 PM	64	222	62	45	105	28	69	185	25	79	251	45	1,180	0	0	13	0	13
	4:45 PM	68	211	58	59	111	24	72	196	39	74	292	51	1,255	2	0	9	0	11
	5:00 PM	61	186	47	72	154	31	111	232	42	80	262	36	1,314	1	0	13	0	14
	5:15 PM	52	212	49	77	157	29	82	242	39	68	287	46	1,340	1	0	6	0	7
	5:30 PM	62	259	64	59	154	42	77	207	27	75	255	66	1,347	1	0	11	0	12
	5:45 PM	68	249	48	66	126	52	75	168	40	61	213	49	1,215	3	0	14	0	17
	VOLUMES	515	1,728	461	482	1,050	290	602	1,605	265	556	2,061	401	10,016	8	0	79	0	87
	APPROACH %	19%	64%	17%	26%	58%	16%	24%	65%	11%	18%	68%	13%						
	APP/DEPART	2,704	/	2,652	1,822	/	1,879	2,472	/	2,548	3,018	/	2,937	0					
	BEGIN PEAK HR		4:45 PM																
	VOLUMES	243	868	218	267	576	126	342	877	147	297	1,096	199	5,256					
	APPROACH %	18%	65%	16%	28%	59%	13%	25%	64%	11%	19%	69%	13%						
	PEAK HR FACTOR		0.863			0.921			0.887			0.954		0.976					
	APP/DEPART	1,329	/	1,370	969	/	1,025	1,366	/	1,362	1,592	/	1,499	0					

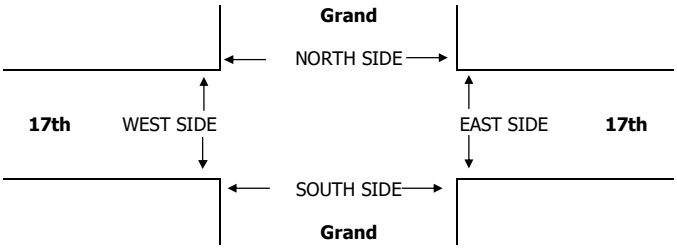

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR			7:15 AM			0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR			4:45 PM			0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

T816

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Thu, Feb 16, 17

LOCATION: Santa Ana
NORTH & SOUTH: Grand
EAST & WEST: I-5 NB Ramps


PROJECT #: SC1220
LOCATION #: 3
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — N / W / E / S

☑ Add U-Turns to Left Turns

		NORTHBOUND Grand			SOUTHBOUND Grand			EASTBOUND I-5 NB Ramps			WESTBOUND I-5 NB Ramps				U-TURNS				
	LANES:	NL X	NT 2	NR 1	SL 1	ST 3	SR X	EL X	ET X	ER X	WL 2	WT X	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	0	123	106	19	411	0	0	0	0	104	0	31	794	0	3	0	0	3
	7:15 AM	0	184	108	8	495	0	0	0	0	97	0	15	907	0	3	0	0	3
	7:30 AM	0	226	137	12	482	0	0	0	0	94	0	31	982	0	1	0	0	1
	7:45 AM	0	229	117	20	425	0	0	0	0	131	0	43	965	0	7	0	0	7
	8:00 AM	0	167	103	16	412	0	0	0	0	120	0	33	851	0	6	0	0	6
	8:15 AM	0	147	103	12	389	0	0	0	0	97	0	41	789	0	5	0	0	5
	8:30 AM	0	153	104	9	380	0	0	0	0	93	0	33	772	0	4	0	0	4
	8:45 AM	0	151	96	6	354	0	0	0	0	115	0	37	759	0	0	0	0	0
	VOLUMES	0	1,380	874	102	3,348	0	0	0	0	851	0	264	6,819	0	29	0	0	29
	APPROACH %	0%	61%	39%	3%	97%	0%	0%	0%	0%	76%	0%	24%						
	APP/DEPART	2,254	/	1,673	3,450	/	4,199	0	/	947	1,115	/	0	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	0	806	465	56	1,814	0	0	0	0	442	0	122	3,705					
	APPROACH %	0%	63%	37%	3%	97%	0%	0%	0%	0%	78%	0%	22%						
	PEAK HR FACTOR		0.875			0.929			0.000			0.810		0.943					
	APP/DEPART	1,271	/	945	1,870	/	2,256	0	/	504	564	/	0	0					
PM	4:00 PM	0	292	260	12	217	0	0	0	0	38	0	38	857	0	8	0	0	8
	4:15 PM	0	286	262	14	210	0	0	0	0	43	0	46	861	0	7	0	0	7
	4:30 PM	0	313	244	14	223	0	0	0	0	50	0	46	890	0	7	0	0	7
	4:45 PM	0	337	221	8	262	0	0	0	0	37	0	36	901	0	7	0	0	7
	5:00 PM	0	307	246	12	280	0	0	0	0	22	0	42	909	0	6	0	0	6
	5:15 PM	0	335	273	12	273	0	0	0	0	42	0	28	963	0	6	0	0	6
	5:30 PM	0	286	233	12	285	0	0	0	0	30	0	51	897	0	6	0	0	6
	5:45 PM	0	330	219	10	291	0	0	0	0	44	0	45	939	0	5	0	0	5
	VOLUMES	0	2,486	1,958	94	2,041	0	0	0	0	306	0	332	7,217	0	52	0	0	52
	APPROACH %	0%	56%	44%	4%	96%	0%	0%	0%	0%	48%	0%	52%						
	APP/DEPART	4,444	/	2,870	2,135	/	2,347	0	/	2,000	638	/	0	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	0	1,258	971	46	1,129	0	0	0	0	138	0	166	3,708					
	APPROACH %	0%	56%	44%	4%	96%	0%	0%	0%	0%	45%	0%	55%						
	PEAK HR FACTOR		0.917			0.976			0.000			0.854		0.963					
	APP/DEPART	2,229	/	1,447	1,175	/	1,267	0	/	994	304	/	0	0					

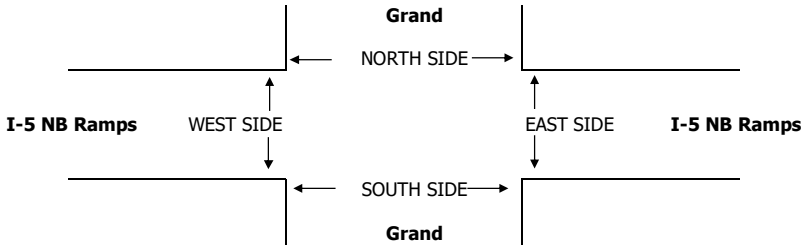

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

INTERSECTION TURNING MOVEMENT COUNTS

T816

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Thu, Feb 16, 17

LOCATION: Santa Ana
NORTH & SOUTH: Grand
EAST & WEST: Santa Ana


PROJECT #: SC1220
LOCATION #: 2
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N ◄ W E ► S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Grand			SOUTHBOUND Grand			EASTBOUND Santa Ana			WESTBOUND Santa Ana				U-TURNS				
	LANES:	NL 1	NT 2.5	NR 0.5	SL 1	ST 2	SR 2	EL 2	ET 1	ER 2	WL 0.5	WT 1	WR 0.5	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	14	210	14	25	256	235	30	35	126	2	25	8	980	0	0	0	0	0
	7:15 AM	12	194	11	49	263	241	62	49	90	1	51	8	1,031	1	0	0	0	1
	7:30 AM	18	292	18	37	308	253	60	61	99	2	123	9	1,280	2	0	0	0	2
	7:45 AM	18	273	13	22	307	239	75	51	97	0	141	9	1,245	0	0	0	0	0
	8:00 AM	20	214	7	28	253	265	58	49	129	1	47	7	1,078	0	1	0	0	1
	8:15 AM	19	214	9	10	271	219	45	33	98	3	27	3	951	4	0	0	0	4
	8:30 AM	22	198	10	15	275	186	46	25	99	3	32	3	914	2	0	0	0	2
	8:45 AM	17	186	5	13	286	181	49	22	95	5	24	11	894	1	0	0	0	1
	VOLUMES	140	1,781	87	199	2,219	1,819	425	325	833	17	470	58	8,373	10	1	0	0	11
	APPROACH %	7%	89%	4%	5%	52%	43%	27%	21%	53%	3%	86%	11%						
	APP/DEPART	2,008	/	2,265	4,237	/	3,079	1,583	/	610	545	/	2,419	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	68	973	49	136	1,131	998	255	210	415	4	362	33	4,634					
	APPROACH %	6%	89%	4%	6%	50%	44%	29%	24%	47%	1%	91%	8%						
	PEAK HR FACTOR		0.831			0.947			0.932			0.665		0.905					
	APP/DEPART	1,090	/	1,262	2,265	/	1,553	880	/	394	399	/	1,425	0					
PM	4:00 PM	31	435	3	5	131	103	63	18	68	4	19	12	892	0	1	0	0	1
	4:15 PM	33	417	3	12	160	98	87	22	91	4	26	23	976	2	1	0	0	3
	4:30 PM	50	461	3	5	126	122	95	24	88	6	45	21	1,046	1	1	0	0	2
	4:45 PM	40	441	4	9	167	118	87	23	105	3	41	18	1,056	0	0	0	0	0
	5:00 PM	48	427	5	5	190	120	85	91	77	3	34	22	1,107	0	0	0	0	0
	5:15 PM	47	483	5	8	177	126	80	47	69	7	40	20	1,109	5	1	0	0	6
	5:30 PM	38	457	13	12	177	137	73	37	84	5	33	23	1,089	1	0	0	0	1
	5:45 PM	29	465	7	8	183	133	80	19	76	4	23	29	1,056	2	0	0	0	2
	VOLUMES	316	3,586	43	64	1,311	957	650	281	658	36	261	168	8,331	11	4	0	0	15
	APPROACH %	8%	91%	1%	3%	56%	41%	41%	18%	41%	8%	56%	36%						
	APP/DEPART	3,945	/	4,408	2,332	/	2,016	1,589	/	384	465	/	1,523	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	162	1,832	30	33	727	516	318	194	306	19	130	94	4,361					
	APPROACH %	8%	91%	1%	3%	57%	40%	39%	24%	37%	8%	53%	39%						
	PEAK HR FACTOR		0.946			0.979			0.808			0.907		0.983					
	APP/DEPART	2,024	/	2,245	1,276	/	1,060	818	/	256	243	/	800	0					

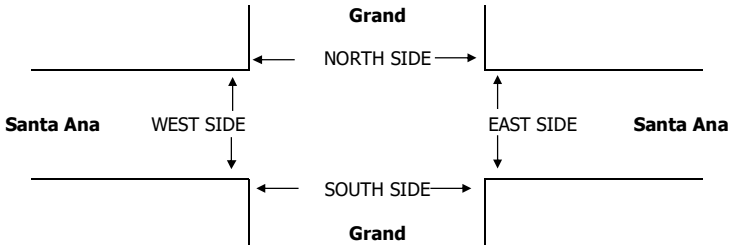

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Thu, May 16, 19

LOCATION: Santa Ana
NORTH & SOUTH: Grand
EAST & WEST: 1st


PROJECT #: SC2183
LOCATION #: 25
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N ◄ W E ► S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Grand			SOUTHBOUND Grand			EASTBOUND 1st			WESTBOUND 1st				U-TURNS				
	LANES:	NL 2	NT 3	NR 0	SL 2	ST 3	SR 1	EL 2	ET 3	ER 0	WL 2	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	14	109	12	23	348	25	48	241	26	50	192	18	1,106	0	0	0	1	1
	7:15 AM	42	163	8	25	357	47	64	246	37	50	212	23	1,274	0	0	1	0	1
	7:30 AM	63	223	10	25	379	36	91	169	70	76	233	28	1,403	0	2	2	0	4
	7:45 AM	69	197	9	18	351	38	94	177	62	71	233	24	1,343	0	1	0	2	3
	8:00 AM	36	160	7	30	330	51	79	193	53	47	180	23	1,189	0	0	1	2	3
	8:15 AM	35	136	11	22	381	35	67	249	34	47	182	25	1,224	0	0	2	1	3
	8:30 AM	42	146	6	24	342	39	63	250	43	44	191	30	1,220	0	1	2	2	5
	8:45 AM	35	138	7	19	346	35	48	257	56	53	180	27	1,201	0	0	0	4	4
	VOLUMES	336	1,272	70	186	2,834	306	554	1,782	381	438	1,603	198	9,960	0	4	8	12	24
	APPROACH %	20%	76%	4%	6%	85%	9%	20%	66%	14%	20%	72%	9%						
	APP/DEPART	1,678	/	2,020	3,326	/	3,641	2,717	/	2,046	2,239	/	2,253	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	210	743	34	98	1,417	172	328	785	222	244	858	98	5,209					
	APPROACH %	21%	75%	3%	6%	84%	10%	25%	59%	17%	20%	72%	8%						
	PEAK HR FACTOR		0.834			0.959			0.962			0.890		0.928					
	APP/DEPART	987	/	1,168	1,687	/	1,879	1,335	/	918	1,200	/	1,244	0					
PM	4:00 PM	42	338	10	27	149	75	67	224	26	31	238	34	1,261	0	2	3	1	6
	4:15 PM	31	300	12	35	181	63	69	201	23	33	213	57	1,218	0	1	2	4	7
	4:30 PM	47	299	7	34	191	75	63	240	20	39	232	44	1,291	2	2	0	3	7
	4:45 PM	43	311	8	22	178	66	75	243	21	46	248	36	1,297	0	0	4	5	9
	5:00 PM	37	279	10	27	149	61	88	265	21	36	239	45	1,257	0	4	3	2	9
	5:15 PM	37	279	7	22	190	47	71	216	28	30	231	49	1,207	0	3	1	0	4
	5:30 PM	37	250	8	21	168	69	85	204	26	26	223	40	1,157	0	2	3	0	5
	5:45 PM	43	269	11	18	166	66	93	225	18	34	221	55	1,219	0	2	0	2	4
	VOLUMES	317	2,325	73	206	1,372	522	611	1,818	183	275	1,845	360	9,907	2	16	16	17	51
	APPROACH %	12%	86%	3%	10%	65%	25%	23%	70%	7%	11%	74%	15%						
	APP/DEPART	2,715	/	3,296	2,100	/	1,815	2,612	/	2,098	2,480	/	2,698	0					
	BEGIN PEAK HR		4:00 PM																
	VOLUMES	163	1,248	37	118	699	279	274	908	90	149	931	171	5,067					
	APPROACH %	11%	86%	3%	11%	64%	25%	22%	71%	7%	12%	74%	14%						
	PEAK HR FACTOR		0.928			0.913			0.938			0.948		0.977					
	APP/DEPART	1,448	/	1,689	1,096	/	927	1,272	/	1,071	1,251	/	1,380	0					

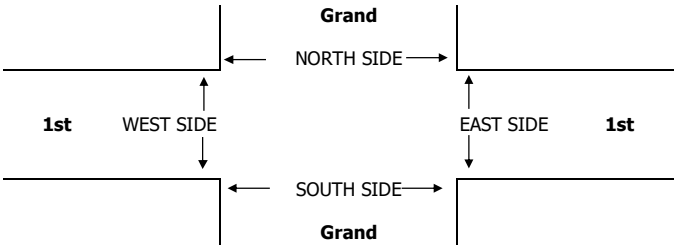

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:15 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:00 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Thu, Feb 11, 16

LOCATION: Santa Ana
NORTH & SOUTH: Grand
EAST & WEST: Chestnut


PROJECT #: SC0846
LOCATION #: 29
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

		NORTHBOUND Grand			SOUTHBOUND Grand			EASTBOUND Chestnut			WESTBOUND Chestnut				U-TURNS				
	LANES:	NL 1	NT 3	NR 0	SL 1	ST 3	SR 0	EL 1	ET 2	ER 0	WL 1	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	10	136	30	31	363	21	15	77	22	23	28	41	797	0	0	0	0	0
	7:15 AM	9	152	44	39	406	14	21	114	35	21	82	53	990	0	0	0	0	0
	7:30 AM	15	186	48	41	443	9	13	135	34	21	109	54	1,108	0	1	0	0	1
	7:45 AM	16	184	47	31	473	10	12	89	19	40	105	66	1,092	0	0	0	0	0
	8:00 AM	10	186	17	32	396	14	11	64	17	31	37	34	849	0	0	0	0	0
	8:15 AM	4	138	26	32	403	14	18	70	21	17	27	32	802	0	0	0	0	0
	8:30 AM	5	157	20	30	360	9	15	54	21	16	38	35	760	0	0	0	0	0
	8:45 AM	13	133	21	24	346	22	18	39	11	15	39	21	702	0	0	0	0	0
	VOLUMES	82	1,272	253	260	3,190	113	123	642	180	184	465	336	7,100	0	1	0	0	1
	APPROACH %	5%	79%	16%	7%	90%	3%	13%	68%	19%	19%	47%	34%						
	APP/DEPART	1,607	/	1,732	3,563	/	3,554	945	/	1,154	985	/	660	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	50	708	156	143	1,718	47	57	402	105	113	333	207	4,039					
	APPROACH %	5%	77%	17%	7%	90%	2%	10%	71%	19%	17%	51%	32%						
	PEAK HR FACTOR		0.918			0.928			0.775			0.774		0.911					
	APP/DEPART	914	/	973	1,908	/	1,936	564	/	700	653	/	430	0					
PM	4:00 PM	40	279	50	37	166	21	15	82	14	29	69	58	860	0	0	0	0	0
	4:15 PM	25	246	42	35	152	22	22	58	11	32	97	45	787	0	0	0	0	0
	4:30 PM	42	243	41	32	162	34	26	69	21	21	76	46	813	0	1	0	0	1
	4:45 PM	27	241	41	39	158	30	26	64	13	20	78	37	774	0	1	0	0	1
	5:00 PM	28	182	20	24	176	35	23	59	13	26	96	43	725	0	0	0	0	0
	5:15 PM	35	232	42	36	192	19	25	81	13	18	74	26	793	0	0	0	1	1
	5:30 PM	30	222	61	31	184	21	16	86	16	26	84	62	839	0	0	0	0	0
	5:45 PM	18	278	42	28	163	22	25	66	14	33	84	45	818	0	2	0	0	2
	VOLUMES	245	1,923	339	262	1,353	204	178	565	115	205	658	362	6,409	0	4	0	1	5
	APPROACH %	10%	77%	14%	14%	74%	11%	21%	66%	13%	17%	54%	30%						
	APP/DEPART	2,507	/	2,467	1,819	/	1,672	858	/	1,163	1,225	/	1,107	0					
	BEGIN PEAK HR		4:00 PM																
	VOLUMES	134	1,009	174	143	638	107	89	273	59	102	320	186	3,234					
	APPROACH %	10%	77%	13%	16%	72%	12%	21%	65%	14%	17%	53%	31%						
	PEAK HR FACTOR		0.892			0.974			0.907			0.874		0.940					
	APP/DEPART	1,317	/	1,286	888	/	799	421	/	588	608	/	561	0					

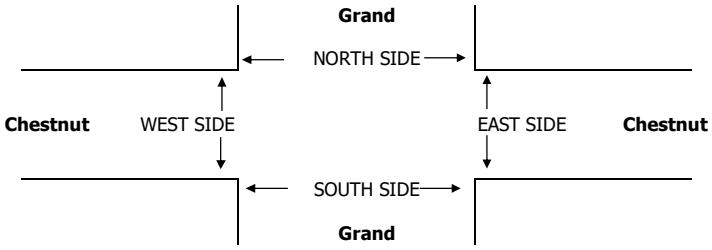

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	18	9	10	2	39	17	8	7	2	34	1	1	3	0	5
	7:15 AM	59	25	29	13	126	57	20	29	12	118	2	5	0	1	8
	7:30 AM	178	35	63	42	318	175	33	62	39	309	3	2	1	3	9
	7:45 AM	122	11	20	21	174	119	10	19	18	166	3	1	1	3	8
	8:00 AM	4	3	2	2	11	3	1	1	2	7	1	2	1	0	4
	8:15 AM	2	6	7	0	15	2	5	5	0	12	0	1	2	0	3
	8:30 AM	5	2	3	2	12	4	1	2	2	9	1	1	1	0	3
	8:45 AM	0	1	2	1	4	0	0	2	1	3	0	1	0	0	1
	TOTAL	388	92	136	83	699	377	78	127	76	658	11	14	9	7	41
PM	4:00 PM	69	11	4	17	101	68	9	3	16	96	1	2	1	1	5
	4:15 PM	29	9	4	7	49	27	7	2	6	42	2	2	2	1	7
	4:30 PM	28	6	9	7	50	23	4	5	5	37	5	2	4	2	13
	4:45 PM	9	4	6	8	27	6	1	2	5	14	3	3	4	3	13
	5:00 PM	10	8	7	4	29	10	4	5	2	21	0	4	2	2	8
	5:15 PM	6	1	3	2	12	4	1	2	1	8	2	0	1	1	4
	5:30 PM	6	7	6	6	25	1	7	2	4	14	5	0	4	2	11
	5:45 PM	5	4	3	6	18	4	4	2	5	15	1	0	1	1	3
	TOTAL	162	50	42	57	311	143	37	23	44	247	19	13	19	13	64

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Feb 9, 16

LOCATION: Santa Ana
NORTH & SOUTH: Grand
EAST & WEST: McFadden


PROJECT #: SC0846
LOCATION #: 38
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Grand			SOUTHBOUND Grand			EASTBOUND McFadden			WESTBOUND McFadden				U-TURNS				
	LANES:	NL 1	NT 3	NR 0	SL 1	ST 3	SR 0	EL 1	ET 2	ER 0	WL 1	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	22	137	16	40	320	28	37	136	31	22	90	20	899	0	0	0	0	0
	7:15 AM	28	144	22	54	321	35	46	156	48	25	93	14	986	0	0	0	0	0
	7:30 AM	37	180	29	44	439	41	48	127	52	20	81	26	1,124	0	0	0	0	0
	7:45 AM	50	192	24	68	362	43	43	135	43	28	133	29	1,150	0	0	0	0	0
	8:00 AM	49	177	28	61	405	29	41	159	31	39	96	32	1,147	0	0	0	0	0
	8:15 AM	19	130	28	45	317	29	28	143	20	29	78	29	895	0	0	0	0	0
	8:30 AM	16	125	18	35	329	21	31	106	21	25	57	9	793	0	0	0	0	0
	8:45 AM	13	114	18	47	270	27	25	87	17	18	70	30	736	0	0	0	0	0
	VOLUMES	234	1,199	183	394	2,763	253	299	1,049	263	206	698	189	7,730	0	0	0	0	0
	APPROACH %	14%	74%	11%	12%	81%	7%	19%	65%	16%	19%	64%	17%						
	APP/DEPART	1,616	/	1,687	3,410	/	3,232	1,611	/	1,626	1,093	/	1,185	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	164	693	103	227	1,527	148	178	577	174	112	403	101	4,407					
	APPROACH %	17%	72%	11%	12%	80%	8%	19%	62%	19%	18%	65%	16%						
	PEAK HR FACTOR		0.902			0.907			0.929			0.811		0.958					
	APP/DEPART	960	/	972	1,902	/	1,813	929	/	907	616	/	715	0					
PM	4:00 PM	39	278	39	28	135	53	33	96	19	24	138	35	917	0	0	0	0	0
	4:15 PM	42	244	50	41	143	56	28	93	19	21	169	26	932	0	0	0	0	0
	4:30 PM	52	280	47	40	161	33	30	99	25	17	163	34	981	0	0	0	0	0
	4:45 PM	52	285	47	30	118	56	25	96	16	16	143	36	920	0	0	0	0	0
	5:00 PM	42	264	41	34	172	36	38	127	24	27	178	39	1,022	0	0	0	0	0
	5:15 PM	48	276	55	28	150	36	30	135	14	22	175	36	1,005	0	0	0	0	0
	5:30 PM	39	291	61	35	123	49	20	96	20	22	176	26	958	0	0	0	0	0
	5:45 PM	27	275	50	22	130	45	21	121	14	15	160	37	917	0	0	0	0	0
	VOLUMES	341	2,193	390	258	1,132	364	225	863	151	164	1,302	269	7,652	0	0	0	0	0
	APPROACH %	12%	75%	13%	15%	65%	21%	18%	70%	12%	9%	75%	16%						
	APP/DEPART	2,924	/	2,687	1,754	/	1,447	1,239	/	1,511	1,735	/	2,007	0					
	BEGIN PEAK HR		4:30 PM																
	VOLUMES	194	1,105	190	132	601	161	123	457	79	82	659	145	3,928					
	APPROACH %	13%	74%	13%	15%	67%	18%	19%	69%	12%	9%	74%	16%						
	PEAK HR FACTOR		0.969			0.924			0.872			0.908		0.961					
	APP/DEPART	1,489	/	1,373	894	/	762	659	/	779	886	/	1,014	0					

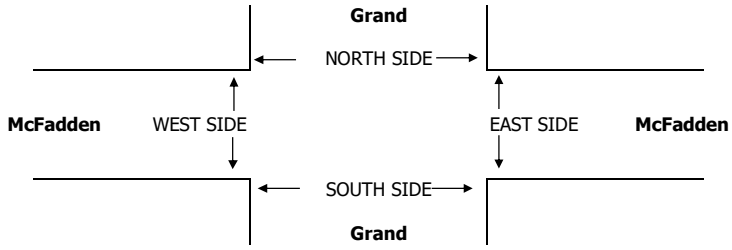

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	14	11	8	7	40	10	8	7	4	29	4	3	1	3	11
	7:15 AM	23	31	13	23	90	19	30	12	20	81	4	1	1	3	9
	7:30 AM	23	51	22	21	117	21	49	22	18	110	2	2	0	3	7
	7:45 AM	52	105	38	55	250	50	104	38	49	241	2	1	0	6	9
	8:00 AM	17	26	5	8	56	16	24	4	6	50	1	2	1	2	6
	8:15 AM	11	7	6	5	29	9	7	5	5	26	2	0	1	0	3
	8:30 AM	13	8	9	6	36	9	8	7	6	30	4	0	2	0	6
	8:45 AM	5	2	2	3	12	3	2	2	3	10	2	0	0	0	2
	TOTAL	158	241	103	128	630	137	232	97	111	577	21	9	6	17	53
PM	4:00 PM	21	18	14	7	60	16	12	12	7	47	5	6	2	0	13
	4:15 PM	16	11	8	8	43	13	10	5	7	35	3	1	3	1	8
	4:30 PM	12	19	14	21	66	6	15	11	16	48	6	4	3	5	18
	4:45 PM	10	9	7	3	29	7	4	5	2	18	3	5	2	1	11
	5:00 PM	16	11	12	7	46	13	10	12	6	41	3	1	0	1	5
	5:15 PM	18	15	6	4	43	14	11	6	4	35	4	4	0	0	8
	5:30 PM	7	13	2	5	27	4	9	2	2	17	3	4	0	3	10
	5:45 PM	15	13	3	3	34	11	8	1	1	21	4	5	2	2	13
	TOTAL	115	109	66	58	348	84	79	54	45	262	31	30	12	13	86

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Thu, May 16, 19

LOCATION: Santa Ana
NORTH & SOUTH: Grand
EAST & WEST: Edinger


PROJECT #: SC2183
LOCATION #: 26
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N ◄ W E ► S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Grand			SOUTHBOUND Grand			EASTBOUND Edinger			WESTBOUND Edinger				U-TURNS				
	LANES:	NL 1	NT 3	NR 0	SL 1	ST 3	SR 0	EL 1	ET 3	ER 0	WL 1	WT 3	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	11	97	25	61	253	50	63	309	35	18	141	30	1,093	0	0	0	0	0
	7:15 AM	4	119	20	58	263	55	82	333	19	30	125	27	1,135	0	0	0	1	1
	7:30 AM	15	143	26	54	288	49	88	328	33	46	144	34	1,248	0	0	1	3	4
	7:45 AM	9	120	28	51	274	68	90	320	34	45	160	35	1,234	0	0	1	2	3
	8:00 AM	18	85	17	58	309	49	55	337	40	28	144	28	1,168	0	0	0	1	1
	8:15 AM	25	94	31	58	249	43	48	306	28	22	191	33	1,128	0	0	3	2	5
	8:30 AM	11	94	25	52	237	39	50	239	34	29	125	33	968	0	0	3	4	7
	8:45 AM	15	105	25	46	236	37	44	245	39	24	109	32	957	0	0	2	5	7
	VOLUMES	108	857	197	438	2,109	390	520	2,417	262	242	1,139	252	8,931	0	0	10	18	28
	APPROACH %	9%	74%	17%	15%	72%	13%	16%	76%	8%	15%	70%	15%						
	APP/DEPART	1,162	/	1,619	2,937	/	2,595	3,199	/	3,070	1,633	/	1,647	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	46	467	91	221	1,134	221	315	1,318	126	149	573	124	4,785					
	APPROACH %	8%	77%	15%	14%	72%	14%	18%	75%	7%	18%	68%	15%						
	PEAK HR FACTOR		0.821			0.947			0.979			0.881		0.959					
	APP/DEPART	604	/	904	1,576	/	1,402	1,759	/	1,637	846	/	842	0					
PM	4:00 PM	70	317	45	41	88	52	57	193	14	23	299	43	1,242	0	0	2	1	3
	4:15 PM	59	317	35	36	92	62	32	190	13	21	332	54	1,243	0	0	1	3	4
	4:30 PM	68	323	23	44	111	73	52	186	16	26	321	39	1,282	0	0	4	1	5
	4:45 PM	54	334	35	38	111	54	46	190	24	20	331	45	1,282	0	0	2	0	2
	5:00 PM	65	356	28	48	122	75	53	211	17	17	328	38	1,358	0	0	5	2	7
	5:15 PM	65	348	28	29	87	49	44	229	15	19	335	49	1,297	0	0	2	3	5
	5:30 PM	55	345	28	48	83	48	56	229	13	17	325	39	1,286	0	0	0	0	0
	5:45 PM	41	300	22	36	66	64	55	181	11	14	336	45	1,171	0	0	1	0	1
	VOLUMES	477	2,640	244	320	760	477	395	1,609	123	157	2,607	352	10,161	0	0	17	10	27
	APPROACH %	14%	79%	7%	21%	49%	31%	19%	76%	6%	5%	84%	11%						
	APP/DEPART	3,361	/	3,370	1,557	/	1,030	2,127	/	2,183	3,116	/	3,578	0					
	BEGIN PEAK HR		4:45 PM																
	VOLUMES	239	1,383	119	163	403	226	199	859	69	73	1,319	171	5,223					
	APPROACH %	14%	79%	7%	21%	51%	29%	18%	76%	6%	5%	84%	11%						
	PEAK HR FACTOR		0.969			0.808			0.945			0.970		0.962					
	APP/DEPART	1,741	/	1,744	792	/	540	1,127	/	1,146	1,563	/	1,793	0					

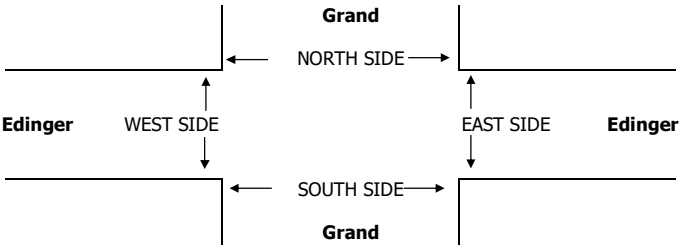

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:15 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:45 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Thu, May 16, 19

LOCATION: Santa Ana
NORTH & SOUTH: Grand
EAST & WEST: Warner


PROJECT #: SC2183
LOCATION #: 27
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N ◄ W E ► S ▼

Add U-Turns to Left Turns

		NORTHBOUND Grand			SOUTHBOUND Grand			EASTBOUND Warner			WESTBOUND Warner				U-TURNS				
	LANES:	NL 1	NT 3	NR 0	SL 1	ST 3	SR 0	EL 2	ET 3	ER 1	WL 2	WT 2	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	41	102	39	31	90	48	46	182	77	10	73	14	753	0	0	0	0	0
	7:15 AM	50	116	50	42	124	53	67	206	82	26	74	24	914	0	0	0	0	0
	7:30 AM	46	125	49	47	158	44	62	207	108	19	114	23	1,002	0	0	1	0	1
	7:45 AM	36	133	51	60	146	50	57	286	89	21	107	39	1,075	0	0	0	0	0
	8:00 AM	35	130	65	48	140	45	67	205	76	21	89	43	964	0	1	0	0	1
	8:15 AM	26	98	56	52	128	52	75	188	56	23	113	27	894	1	0	0	0	1
	8:30 AM	32	87	40	57	142	51	49	188	49	26	84	13	818	0	0	0	0	0
	8:45 AM	30	87	32	58	125	30	66	169	55	19	91	37	799	0	0	0	0	0
	VOLUMES	296	878	382	395	1,053	373	489	1,631	592	165	745	220	7,219	1	1	1	0	3
	APPROACH %	19%	56%	25%	22%	58%	20%	18%	60%	22%	15%	66%	19%						
	APP/DEPART	1,556	/	1,587	1,821	/	1,811	2,712	/	2,407	1,130	/	1,414	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	167	504	215	197	568	192	253	904	355	87	384	129	3,955					
	APPROACH %	19%	57%	24%	21%	59%	20%	17%	60%	23%	15%	64%	22%						
	PEAK HR FACTOR		0.963			0.935			0.875			0.898		0.920					
	APP/DEPART	886	/	886	957	/	1,010	1,512	/	1,315	600	/	744	0					
PM	4:00 PM	45	159	48	29	68	61	108	146	35	28	242	82	1,051	0	0	0	0	0
	4:15 PM	51	222	40	26	73	56	93	125	36	36	204	76	1,038	0	0	0	2	2
	4:30 PM	56	211	32	32	106	57	86	120	42	45	211	71	1,069	0	1	0	0	1
	4:45 PM	65	249	45	29	132	54	77	163	36	40	248	65	1,203	0	0	0	0	0
	5:00 PM	60	188	43	38	131	62	84	164	36	49	220	81	1,156	0	0	0	0	0
	5:15 PM	56	218	46	31	104	60	86	161	39	29	254	91	1,175	0	1	0	0	1
	5:30 PM	58	209	57	46	99	38	91	161	29	31	232	75	1,126	0	0	0	1	1
	5:45 PM	53	233	40	24	75	58	75	159	15	23	208	79	1,042	0	0	0	0	0
	VOLUMES	444	1,689	351	255	788	446	700	1,199	268	281	1,819	620	8,860	0	2	0	3	5
	APPROACH %	18%	68%	14%	17%	53%	30%	32%	55%	12%	10%	67%	23%						
	APP/DEPART	2,484	/	3,011	1,489	/	1,334	2,167	/	1,806	2,720	/	2,709	0					
	BEGIN PEAK HR		4:45 PM																
	VOLUMES	239	864	191	144	466	214	338	649	140	149	954	312	4,660					
	APPROACH %	18%	67%	15%	17%	57%	26%	30%	58%	12%	11%	67%	22%						
	PEAK HR FACTOR		0.901			0.892			0.985			0.946		0.968					
	APP/DEPART	1,294	/	1,515	824	/	754	1,127	/	984	1,415	/	1,407	0					

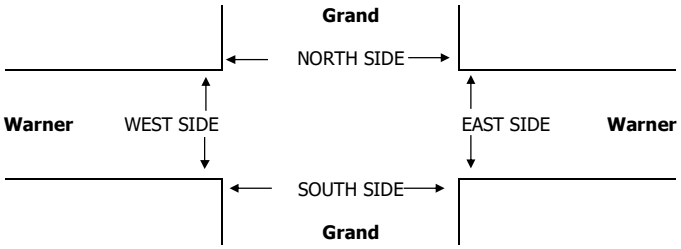

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR			7:15 AM			0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR			4:45 PM			0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Thu, May 16, 19

LOCATION: Santa Ana
NORTH & SOUTH: SR-55 NB Ramps
EAST & WEST: Dyer


PROJECT #: SC2183
LOCATION #: 29
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N ◄ W E ► S ▼

☐ Add U-Turns to Left Turns

		NORTHBOUND SR-55 NB Ramps			SOUTHBOUND SR-55 NB Ramps			EASTBOUND Dyer			WESTBOUND Dyer				U-TURNS				
	LANES:	NL 1.5	NT X	NR 1.5	SL X	ST X	SR X	EL X	ET 3	ER 1	WL X	WT 3	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	171	0	88	0	0	0	0	333	152	0	120	84	948	0	0	0	0	0
	7:15 AM	167	0	116	0	0	0	0	357	172	0	152	69	1,033	0	0	0	0	0
	7:30 AM	142	0	114	0	0	0	0	390	139	0	157	95	1,037	0	0	0	0	0
	7:45 AM	169	0	121	0	0	0	0	385	158	0	179	82	1,094	0	0	0	0	0
	8:00 AM	128	0	99	0	0	0	0	366	142	0	168	110	1,013	0	0	1	0	1
	8:15 AM	112	0	117	0	0	0	0	376	167	0	207	141	1,120	0	0	0	0	0
	8:30 AM	110	0	107	0	0	0	0	300	146	0	195	97	955	0	0	0	0	0
	8:45 AM	140	0	99	0	0	0	0	276	139	0	200	89	943	0	0	0	0	0
	VOLUMES	1,139	0	861	0	0	0	0	2,783	1,215	0	1,378	767	8,144	0	0	1	0	1
	APPROACH %	57%	0%	43%	0%	0%	0%	0%	70%	30%	0%	64%	36%						
	APP/DEPART	2,000	/	767	0	/	1,215	3,999	/	3,644	2,145	/	2,518	0					
	BEGIN PEAK HR		7:30 AM																
	VOLUMES	551	0	451	0	0	0	0	1,517	606	0	711	428	4,265					
	APPROACH %	55%	0%	45%	0%	0%	0%	0%	71%	29%	0%	62%	38%						
	PEAK HR FACTOR		0.864			0.000			0.978			0.818		0.952					
	APP/DEPART	1,002	/	428	0	/	606	2,124	/	1,968	1,139	/	1,263	0					
PM	4:00 PM	56	0	16	0	0	0	0	241	175	0	342	249	1,079	0	0	0	0	0
	4:15 PM	37	0	16	0	0	0	0	279	169	0	370	258	1,129	0	0	0	0	0
	4:30 PM	42	0	8	0	0	0	0	278	170	0	366	248	1,112	0	0	0	0	0
	4:45 PM	48	0	14	0	0	0	0	312	155	0	360	241	1,130	0	0	0	0	0
	5:00 PM	40	0	11	0	0	0	0	320	177	0	399	241	1,188	0	0	0	0	0
	5:15 PM	42	0	14	0	0	0	0	351	176	0	395	242	1,220	0	0	0	0	0
	5:30 PM	56	0	11	0	0	0	0	342	166	0	375	231	1,181	0	0	0	0	0
	5:45 PM	38	0	24	0	0	0	0	278	138	0	318	197	993	0	0	0	0	0
	VOLUMES	359	0	114	0	0	0	0	2,401	1,326	0	2,925	1,907	9,032	0	0	0	0	0
	APPROACH %	76%	0%	24%	0%	0%	0%	0%	64%	36%	0%	61%	39%						
	APP/DEPART	473	/	1,907	0	/	1,326	3,727	/	2,515	4,832	/	3,284	0					
	BEGIN PEAK HR		4:45 PM																
	VOLUMES	186	0	50	0	0	0	0	1,325	674	0	1,529	955	4,719					
	APPROACH %	79%	0%	21%	0%	0%	0%	0%	66%	34%	0%	62%	38%						
	PEAK HR FACTOR		0.881			0.000			0.948			0.970		0.967					
	APP/DEPART	236	/	955	0	/	674	1,999	/	1,375	2,484	/	1,715	0					

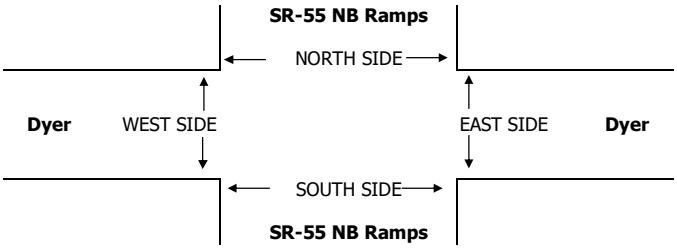

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	AM BEGIN PEAK HR	7:30 AM					0	0	0	0	0					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	PM BEGIN PEAK HR	4:45 PM					0	0	0	0	0					

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 pacific@aimtd.com

DATE: Tue, Mar 1, 16

LOCATION: Santa Ana
NORTH & SOUTH: Cambridge
EAST & WEST: La Veta

PROJECT #: SC0846
LOCATION #: 6
CONTROL: STOP ALL

NOTES:


AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☑ Add U-Turns to Left Turns

		NORTHBOUND Cambridge			SOUTHBOUND Cambridge			EASTBOUND La Veta			WESTBOUND La Veta			
		NL	NT	NR	SL	ST	SR	EL	ET	ER	WL	WT	WR	TOTAL
	LANES:	1	1	X	X	1	1	1	X	1	X	X	X	
AM	7:00 AM	19	21	0	0	76	37	16	0	20	0	0	0	189
	7:15 AM	22	34	0	0	114	47	18	0	40	0	0	0	275
	7:30 AM	35	46	0	0	113	62	33	0	46	0	0	0	335
	7:45 AM	51	68	0	0	106	68	43	0	50	0	0	0	386
	8:00 AM	45	48	0	0	128	58	18	0	43	0	0	0	340
	8:15 AM	27	32	0	0	112	55	23	0	24	0	0	0	273
	8:30 AM	16	27	0	0	63	36	15	0	14	0	0	0	171
	8:45 AM	12	36	0	0	65	48	23	0	18	0	0	0	202
	VOLUMES	227	312	0	0	777	411	189	0	255	0	0	0	2,171
	APPROACH %	42%	58%	0%	0%	65%	35%	43%	0%	57%	0%	0%	0%	
	APP/DEPART	539	/	501	1,188	/	1,032	444	/	0	0	/	638	0
	BEGIN PEAK HR		7:15 AM											
	VOLUMES	153	196	0	0	461	235	112	0	179	0	0	0	1,336
	APPROACH %	44%	56%	0%	0%	66%	34%	38%	0%	62%	0%	0%	0%	
	PEAK HR FACTOR		0.733			0.935			0.782			0.000		0.865
	APP/DEPART	349	/	308	696	/	640	291	/	0	0	/	388	0
PM	4:00 PM	22	37	0	0	49	27	59	0	28	0	0	0	222
	4:15 PM	25	47	0	0	30	33	59	0	30	0	0	0	224
	4:30 PM	29	49	0	0	49	23	49	0	22	0	0	0	221
	4:45 PM	34	60	0	0	43	30	53	0	33	0	0	0	253
	5:00 PM	36	62	0	0	40	33	40	0	31	0	0	0	242
	5:15 PM	41	60	0	0	47	48	67	0	35	0	0	0	298
	5:30 PM	45	63	0	0	59	52	55	0	42	0	0	0	316
	5:45 PM	61	70	0	0	42	40	48	0	30	0	0	0	291
	VOLUMES	293	448	0	0	359	286	430	0	251	0	0	0	2,067
	APPROACH %	40%	60%	0%	0%	56%	44%	63%	0%	37%	0%	0%	0%	
	APP/DEPART	741	/	878	645	/	612	681	/	0	0	/	577	0
	BEGIN PEAK HR		5:00 PM											
	VOLUMES	183	255	0	0	188	173	210	0	138	0	0	0	1,147
	APPROACH %	42%	58%	0%	0%	52%	48%	60%	0%	40%	0%	0%	0%	
	PEAK HR FACTOR		0.836			0.813			0.853			0.000		0.907
	APP/DEPART	438	/	465	361	/	327	348	/	0	0	/	355	0

U-TURNS

NB	SB	EB	WB	TTL
0	0	0	0	
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
0	0	0	0	0
2	0	0	0	2

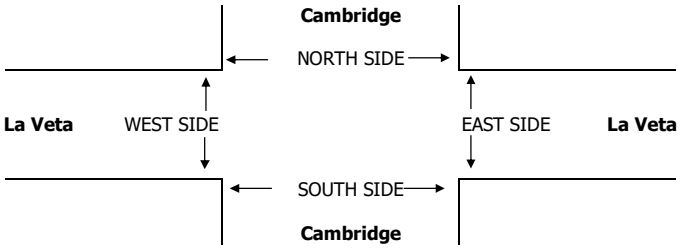

PEDESTRIAN + BIKE CROSSINGS

		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL
AM	7:00 AM	0	1	1	3	5
	7:15 AM	1	2	1	1	5
	7:30 AM	4	1	0	5	10
	7:45 AM	0	4	0	3	7
	8:00 AM	0	0	0	0	0
	8:15 AM	0	0	0	0	0
	8:30 AM	0	1	1	0	2
	8:45 AM	0	0	1	4	5
	TOTAL	5	9	4	16	34
PM	4:00 PM	0	1	2	3	6
	4:15 PM	1	0	0	1	2
	4:30 PM	0	1	0	2	3
	4:45 PM	0	1	0	0	1
	5:00 PM	0	0	0	2	2
	5:15 PM	1	1	0	2	4
	5:30 PM	0	0	3	4	7
	5:45 PM	0	0	0	0	0
	TOTAL	2	4	5	14	25

PEDESTRIAN CROSSINGS

N SIDE	S SIDE	E SIDE	W SIDE	TOTAL
0	0	0	2	2
0	2	0	0	2
4	1	0	1	6
0	4	0	1	5
0	0	0	0	0
0	0	0	0	0
0	1	0	0	1
0	0	0	2	2
4	8	0	6	18
0	0	0	0	0
1	0	0	1	2
0	1	0	0	1
0	1	0	0	1
0	0	0	0	0
1	1	0	1	3
0	0	1	2	3
0	0	0	0	0
2	3	1	4	10

BICYCLE CROSSINGS

NS	SS	ES	WS	TOTAL
0	1	1	1	3
1	0	1	1	3
0	0	0	4	4
0	0	0	2	2
0	0	0	0	0
0	0	0	0	0
0	0	1	0	1
0	0	1	2	3
1	1	4	10	16
0	1	2	3	6
0	0	0	0	0
0	0	0	2	2
0	0	0	0	0
0	0	0	2	2
0	0	0	1	1
0	0	2	2	4
0	0	0	0	0
0	1	4	10	15

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Cambridge Street
E/W: Fairhaven Avenue
Weather: Clear

File Name : 86_SNA_Cambridge_Fairhaven AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Cambridge Street Southbound			Fairhaven Avenue Westbound			Fairhaven Avenue Eastbound			
Start Time	Left	Right	App. Total	Thru	Right	App. Total	Left	Thru	App. Total	Int. Total
07:00 AM	74	26	100	16	15	31	5	36	41	172
07:15 AM	97	37	134	45	23	68	12	27	39	241
07:30 AM	117	58	175	59	42	101	16	50	66	342
07:45 AM	131	62	193	71	45	116	24	67	91	400
Total	419	183	602	191	125	316	57	180	237	1155
08:00 AM	122	56	178	62	57	119	13	69	82	379
08:15 AM	103	33	136	44	40	84	16	59	75	295
08:30 AM	73	34	107	37	26	63	9	41	50	220
08:45 AM	64	35	99	27	27	54	14	35	49	202
Total	362	158	520	170	150	320	52	204	256	1096
Grand Total	781	341	1122	361	275	636	109	384	493	2251
Apprch %	69.6	30.4		56.8	43.2		22.1	77.9		
Total %	34.7	15.1	49.8	16	12.2	28.3	4.8	17.1	21.9	


	Cambridge Street Southbound			Fairhaven Avenue Westbound			Fairhaven Avenue Eastbound			
Start Time	Left	Right	App. Total	Thru	Right	App. Total	Left	Thru	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1										
Peak Hour for Entire Intersection Begins at 07:30 AM										
07:30 AM	117	58	175	59	42	101	16	50	66	342
07:45 AM	**131**	**62**	**193**	**71**	45	116	**24**	67	**91**	**400**
08:00 AM	122	56	178	62	**57**	**119**	13	**69**	82	379
08:15 AM	103	33	136	44	40	84	16	59	75	295
Total Volume	473	209	682	236	184	420	69	245	314	1416
% App. Total	69.4	30.6		56.2	43.8		22	78		
PHF	.903	.843	.883	.831	.807	.882	.719	.888	.863	.885

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Cambridge Street
E/W: Fairhaven Avenue
Weather: Clear

File Name : 86_SNA_Cambridge_Fairhaven AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

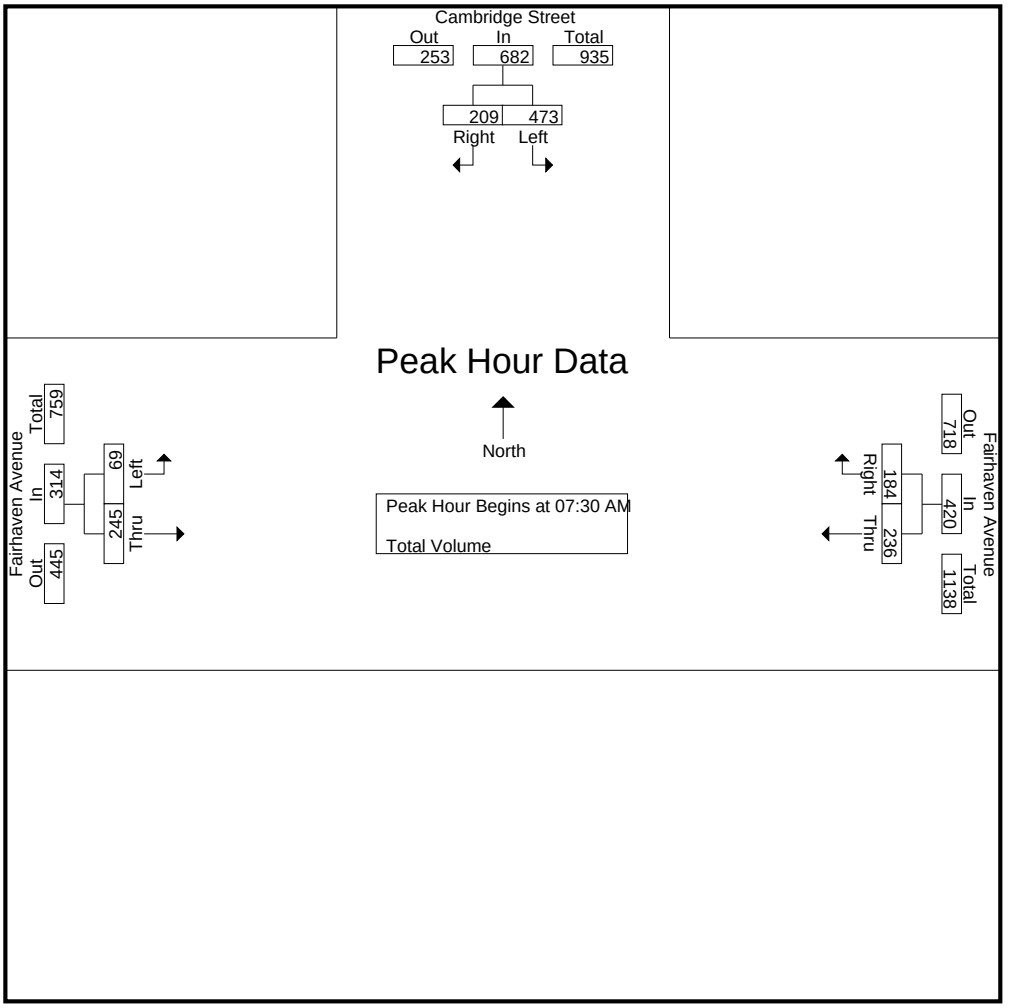

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	07:30 AM			07:30 AM			07:30 AM		
+0 mins.	117	58	175	59	42	101	16	50	66
+15 mins.	**131**	**62**	**193**	**71**	45	116	**24**	67	**91**
+30 mins.	122	56	178	62	**57**	**119**	13	**69**	82
+45 mins.	103	33	136	44	40	84	16	59	75
Total Volume	473	209	682	236	184	420	69	245	314
% App. Total	69.4	30.6		56.2	43.8		22	78	
PHF	.903	.843	.883	.831	.807	.882	.719	.888	.863

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Cambridge Street
E/W: Fairhaven Avenue
Weather: Clear

File Name : 86_SNA_Cambridge_Fairhaven PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Cambridge Street Southbound			Fairhaven Avenue Westbound			Fairhaven Avenue Eastbound			
Start Time	Left	Right	App. Total	Thru	Right	App. Total	Left	Thru	App. Total	Int. Total
04:00 PM	41	19	60	39	46	85	15	40	55	200
04:15 PM	47	14	61	53	57	110	37	47	84	255
04:30 PM	40	20	60	45	52	97	31	63	94	251
04:45 PM	41	19	60	49	71	120	31	48	79	259
Total	169	72	241	186	226	412	114	198	312	965
05:00 PM	51	20	71	76	58	134	22	53	75	280
05:15 PM	38	20	58	47	59	106	42	79	121	285
05:30 PM	42	22	64	49	54	103	30	56	86	253
05:45 PM	39	20	59	52	62	114	33	62	95	268
Total	170	82	252	224	233	457	127	250	377	1086
Grand Total	339	154	493	410	459	869	241	448	689	2051
Apprch %	68.8	31.2		47.2	52.8		35	65		
Total %	16.5	7.5	24	20	22.4	42.4	11.8	21.8	33.6	


	Cambridge Street Southbound			Fairhaven Avenue Westbound			Fairhaven Avenue Eastbound			
Start Time	Left	Right	App. Total	Thru	Right	App. Total	Left	Thru	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1										
Peak Hour for Entire Intersection Begins at 05:00 PM										
05:00 PM	**51**	20	**71**	**76**	58	**134**	22	53	75	280
05:15 PM	38	20	58	47	59	106	**42**	**79**	**121**	**285**
05:30 PM	42	**22**	64	49	54	103	30	56	86	253
05:45 PM	39	20	59	52	**62**	114	33	62	95	268
Total Volume	170	82	252	224	233	457	127	250	377	1086
% App. Total	67.5	32.5		49	51		33.7	66.3		
PHF	.833	.932	.887	.737	.940	.853	.756	.791	.779	.953

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Cambridge Street
E/W: Fairhaven Avenue
Weather: Clear

File Name : 86_SNA_Cambridge_Fairhaven PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

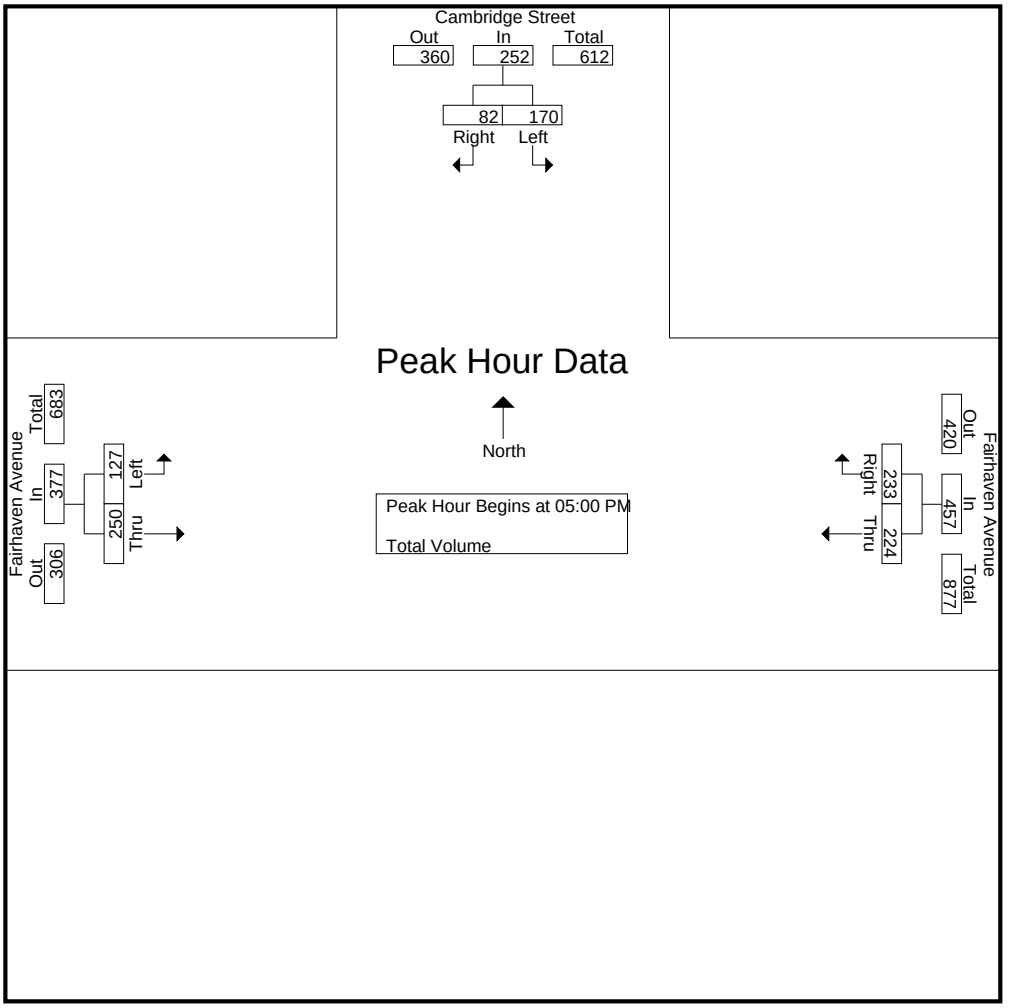

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	04:45 PM			04:45 PM			05:00 PM		
+0 mins.	41	19	60	49	**71**	120	22	53	75
+15 mins.	**51**	20	**71**	**76**	58	**134**	**42**	**79**	**121**
+30 mins.	38	20	58	47	59	106	30	56	86
+45 mins.	42	**22**	64	49	54	103	33	62	95
Total Volume	172	81	253	221	242	463	127	250	377
% App. Total	68	32		47.7	52.3		33.7	66.3	
PHF	.843	.920	.891	.727	.852	.864	.756	.791	.779

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Mabury St/Elk Lane
E/W: E First Street
Weather: Clear

File Name : 87_SNA_Mabury_1st AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Mabury Street Southbound				E First Street Westbound				Elk Lane Northbound				E First Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	57	32	132	221	6	91	0	97	2	0	52	54	0	262	8	270	642
07:15 AM	50	30	157	237	6	144	0	150	3	0	58	61	0	264	2	266	714
07:30 AM	53	37	134	224	12	191	0	203	3	0	75	78	0	265	2	267	772
07:45 AM	67	35	139	241	13	190	0	203	3	0	67	70	0	256	3	259	773
Total	227	134	562	923	37	616	0	653	11	0	252	263	0	1047	15	1062	2901
08:00 AM	58	38	114	210	8	171	0	179	2	0	52	54	0	277	2	279	722
08:15 AM	60	31	146	237	13	149	0	162	2	0	50	52	0	264	4	268	719
08:30 AM	61	31	122	214	13	131	0	144	3	0	46	49	0	291	3	294	701
08:45 AM	56	35	130	221	3	127	0	130	1	0	48	49	0	282	4	286	686
Total	235	135	512	882	37	578	0	615	8	0	196	204	0	1114	13	1127	2828
Grand Total	462	269	1074	1805	74	1194	0	1268	19	0	448	467	0	2161	28	2189	5729
Apprch %	25.6	14.9	59.5		5.8	94.2	0		4.1	0	95.9		0	98.7	1.3		
Total %	8.1	4.7	18.7	31.5	1.3	20.8	0	22.1	0.3	0	7.8	8.2	0	37.7	0.5	38.2	


	Mabury Street Southbound				E First Street Westbound				Elk Lane Northbound				E First Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:30 AM																	
07:30 AM	53	37	134	224	12	**191**	0	**203**	**3**	0	**75**	**78**	0	265	2	267	772
07:45 AM	**67**	35	139	**241**	**13**	190	0	203	3	0	67	70	0	256	3	259	**773**
08:00 AM	58	**38**	114	210	8	171	0	179	2	0	52	54	0	**277**	2	**279**	722
08:15 AM	60	31	**146**	237	13	149	0	162	2	0	50	52	0	264	**4**	268	719
Total Volume	238	141	533	912	46	701	0	747	10	0	244	254	0	1062	11	1073	2986
% App. Total	26.1	15.5	58.4		6.2	93.8	0		3.9	0	96.1		0	99	1		
PHF	.888	.928	.913	.946	.885	.918	.000	.920	.833	.000	.813	.814	.000	.958	.688	.961	.966

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Mabury St/Elk Lane
E/W: E First Street
Weather: Clear

File Name : 87_SNA_Mabury_1st AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

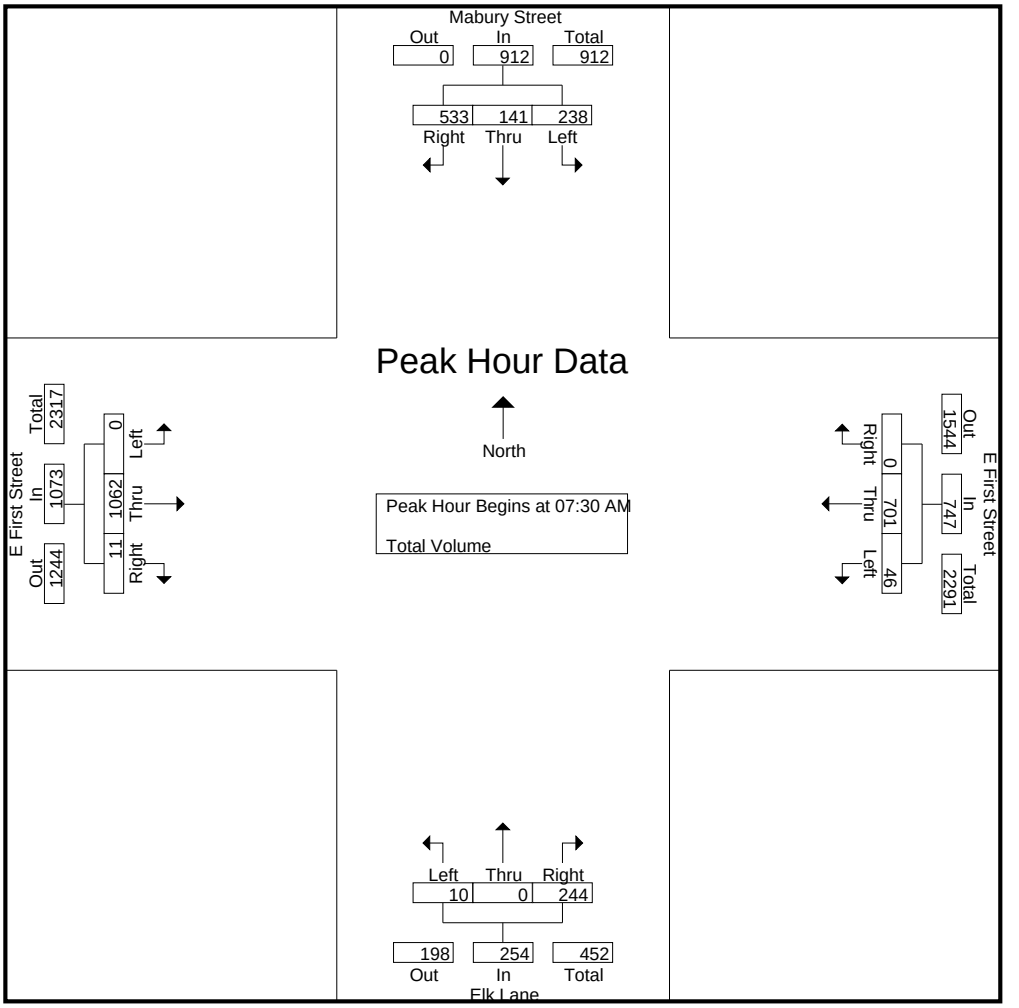

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	07:00 AM				07:30 AM				07:00 AM				08:00 AM			
+0 mins.	57	32	132	221	12	**191**	0	**203**	2	0	52	54	0	277	2	279
+15 mins.	50	30	**157**	237	**13**	190	0	203	**3**	0	58	61	0	264	**4**	268
+30 mins.	53	**37**	134	224	8	171	0	179	3	0	**75**	**78**	0	**291**	3	**294**
+45 mins.	**67**	35	139	**241**	13	149	0	162	3	0	67	70	0	282	4	286
Total Volume	227	134	562	923	46	701	0	747	11	0	252	263	0	1114	13	1127
% App. Total	24.6	14.5	60.9		6.2	93.8	0		4.2	0	95.8		0	98.8	1.2	
PHF	.847	.905	.895	.957	.885	.918	.000	.920	.917	.000	.840	.843	.000	.957	.813	.958

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Mabury St/Elk Lane
E/W: E First Street
Weather: Clear

File Name : 87_SNA_Mabury_1st PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Mabury Street Southbound				E First Street Westbound				Elk Lane Northbound				E First Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	64	29	90	183	10	151	0	161	10	0	75	85	0	332	2	334	763
04:15 PM	39	15	97	151	15	153	0	168	4	0	55	59	0	314	4	318	696
04:30 PM	58	31	98	187	5	141	0	146	6	0	89	95	0	295	4	299	727
04:45 PM	37	23	100	160	12	126	0	138	5	0	70	75	0	379	4	383	756
Total	198	98	385	681	42	571	0	613	25	0	289	314	0	1320	14	1334	2942
05:00 PM	59	21	109	189	8	151	0	159	3	0	49	52	0	374	6	380	780
05:15 PM	64	25	96	185	13	166	0	179	9	0	75	84	0	351	8	359	807
05:30 PM	47	19	85	151	7	106	0	113	8	0	62	70	0	408	6	414	748
05:45 PM	54	28	106	188	15	99	0	114	5	0	72	77	0	327	7	334	713
Total	224	93	396	713	43	522	0	565	25	0	258	283	0	1460	27	1487	3048
Grand Total	422	191	781	1394	85	1093	0	1178	50	0	547	597	0	2780	41	2821	5990
Apprch %	30.3	13.7	56		7.2	92.8	0		8.4	0	91.6		0	98.5	1.5		
Total %	7	3.2	13	23.3	1.4	18.2	0	19.7	0.8	0	9.1	10	0	46.4	0.7	47.1	


	Mabury Street Southbound				E First Street Westbound				Elk Lane Northbound				E First Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:45 PM																	
04:45 PM	37	23	100	160	12	126	0	138	5	0	70	75	0	379	4	383	756
05:00 PM	59	21	**109**	**189**	8	151	0	159	3	0	49	52	0	374	6	380	780
05:15 PM	**64**	**25**	96	185	**13**	**166**	0	**179**	**9**	0	**75**	**84**	0	351	**8**	359	**807**
05:30 PM	47	19	85	151	7	106	0	113	8	0	62	70	0	**408**	6	**414**	748
Total Volume	207	88	390	685	40	549	0	589	25	0	256	281	0	1512	24	1536	3091
% App. Total	30.2	12.8	56.9		6.8	93.2	0		8.9	0	91.1		0	98.4	1.6		
PHF	.809	.880	.894	.906	.769	.827	.000	.823	.694	.000	.853	.836	.000	.926	.750	.928	.958

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Mabury St/Elk Lane
E/W: E First Street
Weather: Clear

File Name : 87_SNA_Mabury_1st PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

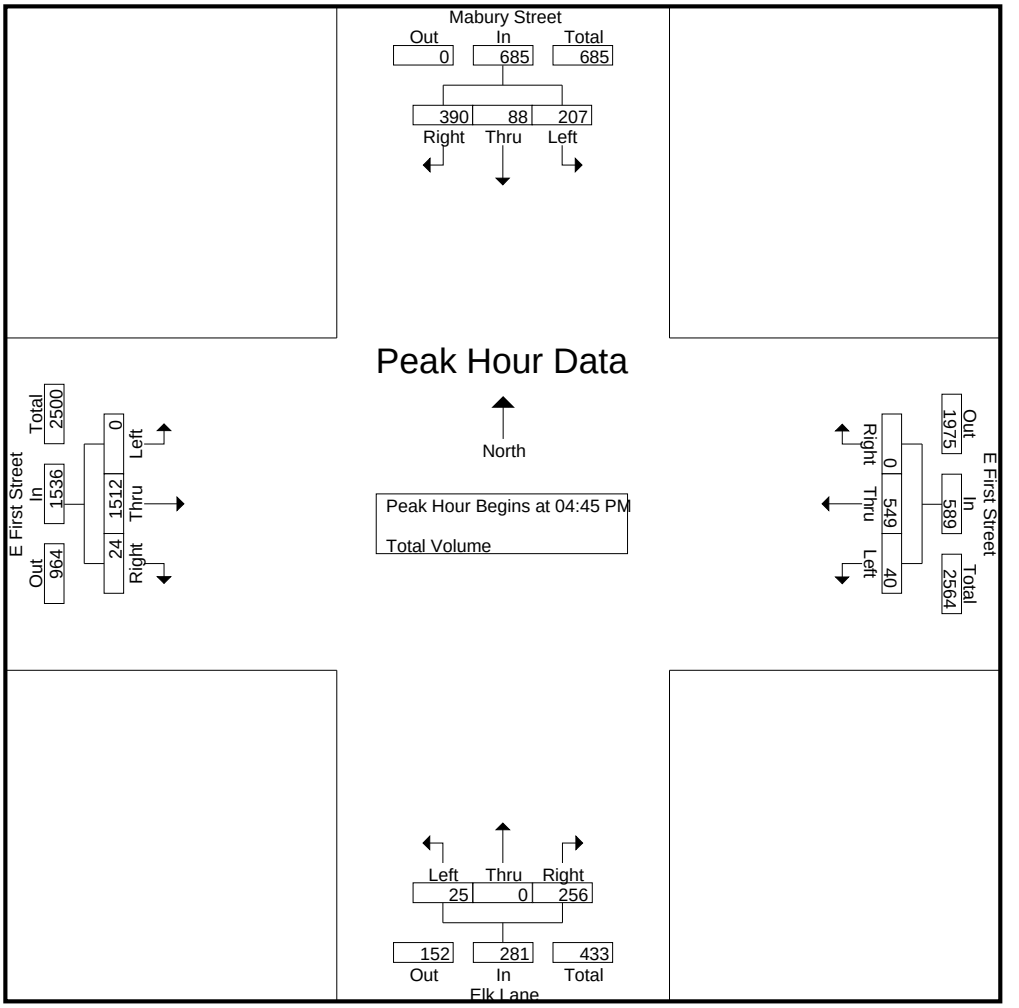

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	04:30 PM				04:30 PM				04:00 PM				04:45 PM			
+0 mins.	58	**31**	98	187	5	141	0	146	**10**	0	75	85	0	379	4	383
+15 mins.	37	23	100	160	12	126	0	138	4	0	55	59	0	374	6	380
+30 mins.	59	21	**109**	**189**	8	151	0	159	6	0	**89**	**95**	0	351	**8**	359
+45 mins.	**64**	25	96	185	**13**	**166**	0	**179**	5	0	70	75	0	**408**	6	**414**
Total Volume	218	100	403	721	38	584	0	622	25	0	289	314	0	1512	24	1536
% App. Total	30.2	13.9	55.9		6.1	93.9	0		8	0	92		0	98.4	1.6	
PHF	.852	.806	.924	.954	.731	.880	.000	.869	.625	.000	.812	.826	.000	.926	.750	.928

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Orange
N/S: Tustin Street
E/W: Rock Creek Drive/La Veta Avenue
Weather: Clear

File Name : 88_ORN_Tustin_La Veta AM
Site Code : 20220171
Start Date : 1/8/2020
Page No : 1

Groups Printed- Total Volume

	Tustin Street Southbound				La Veta Avenue Westbound				Tustin Street Northbound				Rock Creek Drive Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	6	346	1	353	84	2	10	96	5	72	22	99	1	1	7	9	557
07:15 AM	19	385	0	404	114	2	11	127	2	79	28	109	1	3	9	13	653
07:30 AM	21	367	0	388	144	0	14	158	0	70	17	87	3	1	9	13	646
07:45 AM	20	378	2	400	95	0	24	119	5	94	21	120	2	6	9	17	656
Total	66	1476	3	1545	437	4	59	500	12	315	88	415	7	11	34	52	2512
08:00 AM	14	322	2	338	94	0	20	114	1	90	30	121	3	1	8	12	585
08:15 AM	14	314	0	328	92	1	24	117	7	89	31	127	0	3	10	13	585
08:30 AM	16	323	0	339	69	0	19	88	4	108	26	138	5	1	9	15	580
08:45 AM	25	295	0	320	60	6	21	87	3	122	25	150	5	0	3	8	565
Total	69	1254	2	1325	315	7	84	406	15	409	112	536	13	5	30	48	2315
Grand Total	135	2730	5	2870	752	11	143	906	27	724	200	951	20	16	64	100	4827
Apprch %	4.7	95.1	0.2		83	1.2	15.8		2.8	76.1	21		20	16	64		
Total %	2.8	56.6	0.1	59.5	15.6	0.2	3	18.8	0.6	15	4.1	19.7	0.4	0.3	1.3	2.1	


	Tustin Street Southbound				La Veta Avenue Westbound				Tustin Street Northbound				Rock Creek Drive Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:15 AM																	
07:15 AM	19	**385**	0	**404**	114	**2**	11	127	2	79	28	109	1	3	**9**	13	653
07:30 AM	**21**	367	0	388	**144**	0	14	**158**	0	70	17	87	**3**	1	9	13	646
07:45 AM	20	378	**2**	400	95	0	**24**	119	**5**	**94**	21	120	2	**6**	9	**17**	**656**
08:00 AM	14	322	2	338	94	0	20	114	1	90	**30**	**121**	3	1	8	12	585
Total Volume	74	1452	4	1530	447	2	69	518	8	333	96	437	9	11	35	55	2540
% App. Total	4.8	94.9	0.3		86.3	0.4	13.3		1.8	76.2	22		16.4	20	63.6		
PHF	.881	.943	.500	.947	.776	.250	.719	.820	.400	.886	.800	.903	.750	.458	.972	.809	.968

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Orange
N/S: Tustin Street
E/W: Rock Creek Drive/La Veta Avenue
Weather: Clear

File Name : 88_ORN_Tustin_La Veta AM
Site Code : 20220171
Start Date : 1/8/2020

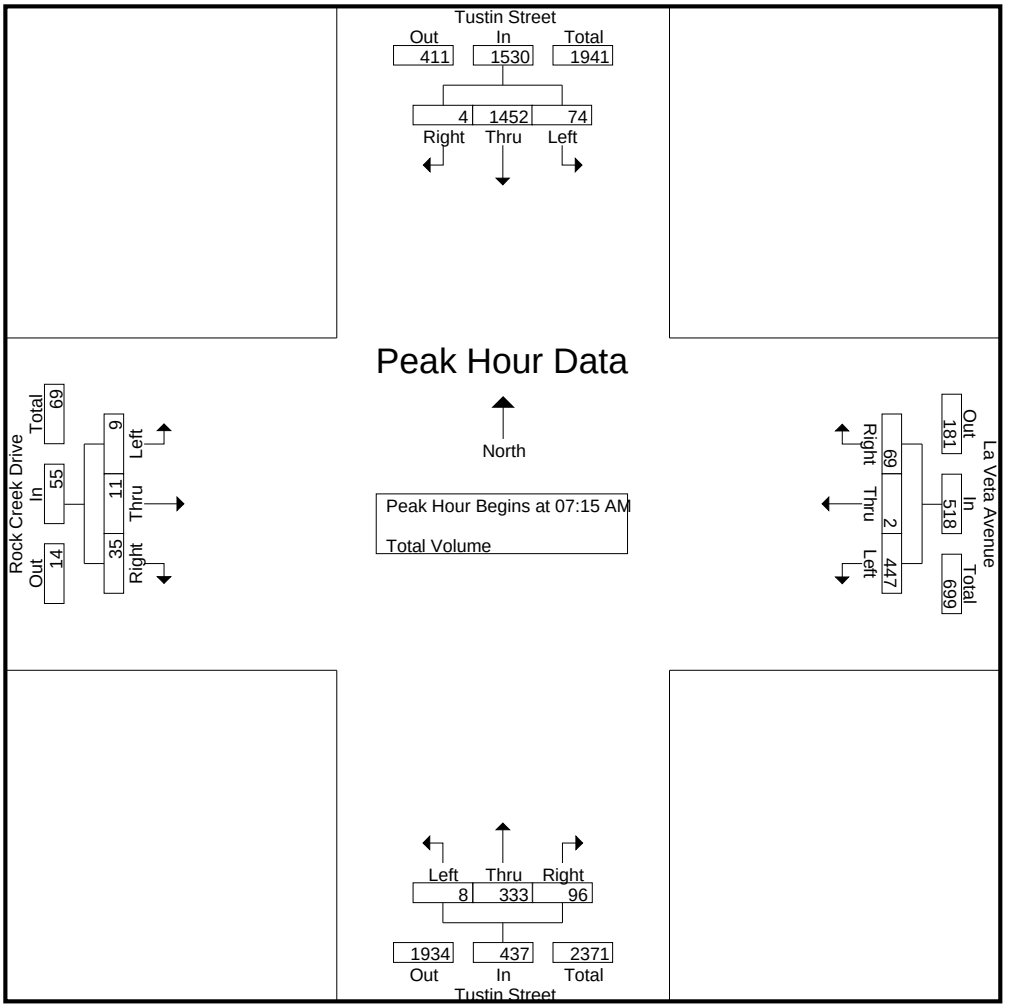

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	07:00 AM				07:15 AM				08:00 AM				07:45 AM			
+0 mins.	6	346	1	353	114	**2**	11	127	1	90	30	121	2	**6**	9	**17**
+15 mins.	19	**385**	0	**404**	**144**	0	14	**158**	**7**	89	**31**	127	3	1	8	12
+30 mins.	**21**	367	0	388	95	0	**24**	119	4	108	26	138	0	3	**10**	13
+45 mins.	20	378	**2**	400	94	0	20	114	3	**122**	25	**150**	**5**	1	9	15
Total Volume	66	1476	3	1545	447	2	69	518	15	409	112	536	10	11	36	57
% App. Total	4.3	95.5	0.2		86.3	0.4	13.3		2.8	76.3	20.9		17.5	19.3	63.2	
PHF	.786	.958	.375	.956	.776	.250	.719	.820	.536	.838	.903	.893	.500	.458	.900	.838

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

File Name : 88_ORN_Tustin_La Veta PM
Site Code : 20220171
Start Date : 1/8/2020
Page No : 1

City of Orange
N/S: Tustin Street
E/W: Rock Creek Drive/La Veta Avenue
Weather: Clear

Groups Printed- Total Volume

	Tustin Street Southbound				La Veta Avenue Westbound				Tustin Street Northbound				Rock Creek Drive Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	26	208	1	235	59	3	32	94	5	285	56	346	4	1	2	7	682
04:15 PM	16	163	1	180	32	0	33	65	12	253	51	316	3	2	4	9	570
04:30 PM	18	191	5	214	55	0	24	79	9	272	52	333	2	1	5	8	634
04:45 PM	19	195	2	216	50	4	24	78	12	232	76	320	2	1	1	4	618
Total	79	757	9	845	196	7	113	316	38	1042	235	1315	11	5	12	28	2504
05:00 PM	28	224	6	258	33	1	35	69	15	278	63	356	6	1	10	17	700
05:15 PM	25	191	2	218	45	0	29	74	10	251	54	315	3	2	4	9	616
05:30 PM	34	168	4	206	51	3	23	77	19	231	49	299	5	4	2	11	593
05:45 PM	16	195	1	212	37	4	32	73	10	255	67	332	4	9	3	16	633
Total	103	778	13	894	166	8	119	293	54	1015	233	1302	18	16	19	53	2542
Grand Total	182	1535	22	1739	362	15	232	609	92	2057	468	2617	29	21	31	81	5046
Apprch %	10.5	88.3	1.3		59.4	2.5	38.1		3.5	78.6	17.9		35.8	25.9	38.3		
Total %	3.6	30.4	0.4	34.5	7.2	0.3	4.6	12.1	1.8	40.8	9.3	51.9	0.6	0.4	0.6	1.6	


	Tustin Street Southbound				La Veta Avenue Westbound				Tustin Street Northbound				Rock Creek Drive Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:30 PM																	
04:30 PM	18	191	5	214	**55**	0	24	**79**	9	272	52	333	2	1	5	8	634
04:45 PM	19	195	2	216	50	**4**	24	78	12	232	**76**	320	2	1	1	4	618
05:00 PM	**28**	**224**	**6**	**258**	33	1	**35**	69	**15**	**278**	63	**356**	**6**	1	**10**	**17**	**700**
05:15 PM	25	191	2	218	45	0	29	74	10	251	54	315	3	**2**	4	9	616
Total Volume	90	801	15	906	183	5	112	300	46	1033	245	1324	13	5	20	38	2568
% App. Total	9.9	88.4	1.7		61	1.7	37.3		3.5	78	18.5		34.2	13.2	52.6		
PHF	.804	.894	.625	.878	.832	.313	.800	.949	.767	.929	.806	.930	.542	.625	.500	.559	.917

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Orange
N/S: Tustin Street
E/W: Rock Creek Drive/La Veta Avenue
Weather: Clear

File Name : 88_ORN_Tustin_La Veta PM
Site Code : 20220171
Start Date : 1/8/2020

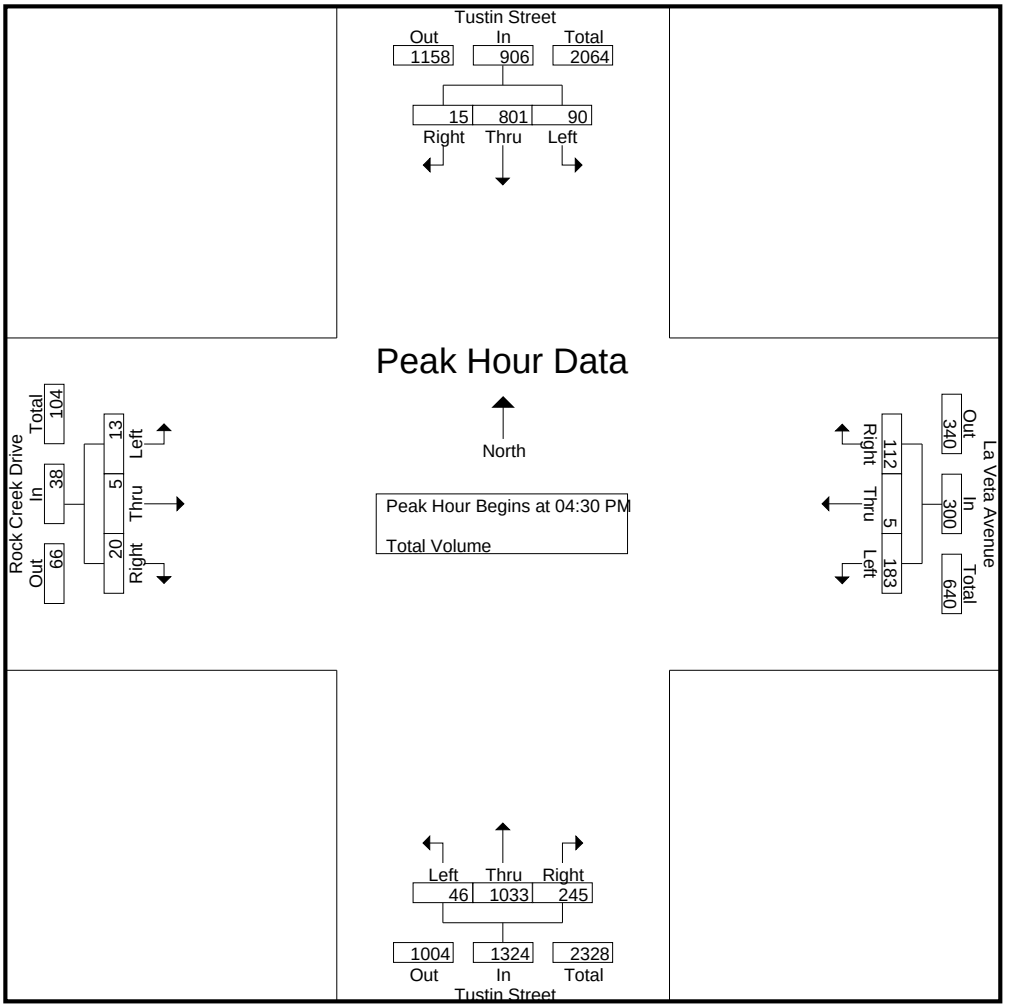

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	04:30 PM				04:00 PM				04:15 PM				05:00 PM			
+0 mins.	18	191	5	214	**59**	3	32	**94**	12	253	51	316	**6**	1	**10**	**17**
+15 mins.	19	195	2	216	32	0	**33**	65	9	272	52	333	3	2	4	9
+30 mins.	**28**	**224**	**6**	**258**	55	0	24	79	12	232	**76**	320	5	4	2	11
+45 mins.	25	191	2	218	50	**4**	24	78	**15**	**278**	63	**356**	4	**9**	3	16
Total Volume	90	801	15	906	196	7	113	316	48	1035	242	1325	18	16	19	53
% App. Total	9.9	88.4	1.7		62	2.2	35.8		3.6	78.1	18.3		34	30.2	35.8	
PHF	.804	.894	.625	.878	.831	.438	.856	.840	.800	.931	.796	.930	.750	.444	.475	.779

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Orange
N/S: Tustin Street
E/W: SR-22 Westbound On Ramp
Weather: Clear

File Name : 89_ORN_Tustin_22W AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Tustin Street Southbound				Orange Tustin Inn Driveway Westbound				Tustin Street Northbound				SR-22 Westbound On Ramp Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	0	301	193	494	0	0	0	0	102	115	0	217	0	0	0	0	711
07:15 AM	0	389	195	584	0	0	0	0	127	115	0	242	0	0	0	0	826
07:30 AM	0	355	210	565	0	0	0	0	170	154	0	324	0	0	0	0	889
07:45 AM	0	329	233	562	0	0	0	0	216	161	0	377	0	0	0	0	939
Total	0	1374	831	2205	0	0	0	0	615	545	0	1160	0	0	0	0	3365
08:00 AM	0	322	195	517	0	0	0	0	143	180	0	323	0	0	0	0	840
08:15 AM	0	300	186	486	0	0	0	0	151	168	0	319	0	0	0	0	805
08:30 AM	0	269	151	420	0	0	0	0	121	156	0	277	0	0	0	0	697
08:45 AM	0	231	148	379	0	0	0	0	94	170	0	264	0	0	0	0	643
Total	0	1122	680	1802	0	0	0	0	509	674	0	1183	0	0	0	0	2985
Grand Total	0	2496	1511	4007	0	0	0	0	1124	1219	0	2343	0	0	0	0	6350
Apprch %	0	62.3	37.7		0	0	0		48	52	0		0	0	0		
Total %	0	39.3	23.8	63.1	0	0	0	0	17.7	19.2	0	36.9	0	0	0	0	


	Tustin Street Southbound				Orange Tustin Inn Driveway Westbound				Tustin Street Northbound				SR-22 Westbound On Ramp Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:15 AM																	
07:15 AM	0	**389**	195	**584**	0	0	0	0	127	115	0	242	0	0	0	0	826
07:30 AM	0	355	210	565	0	0	0	0	170	154	0	324	0	0	0	0	889
07:45 AM	0	329	**233**	562	0	0	0	0	**216**	161	0	**377**	0	0	0	0	**939**
08:00 AM	0	322	195	517	0	0	0	0	143	**180**	0	323	0	0	0	0	840
Total Volume	0	1395	833	2228	0	0	0	0	656	610	0	1266	0	0	0	0	3494
% App. Total	0	62.6	37.4		0	0	0		51.8	48.2	0		0	0	0		
PHF	.000	.897	.894	.954	.000	.000	.000	.000	.759	.847	.000	.840	.000	.000	.000	.000	.930

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Orange
N/S: Tustin Street
E/W: SR-22 Westbound On Ramp
Weather: Clear

File Name : 89_ORN_Tustin_22W AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

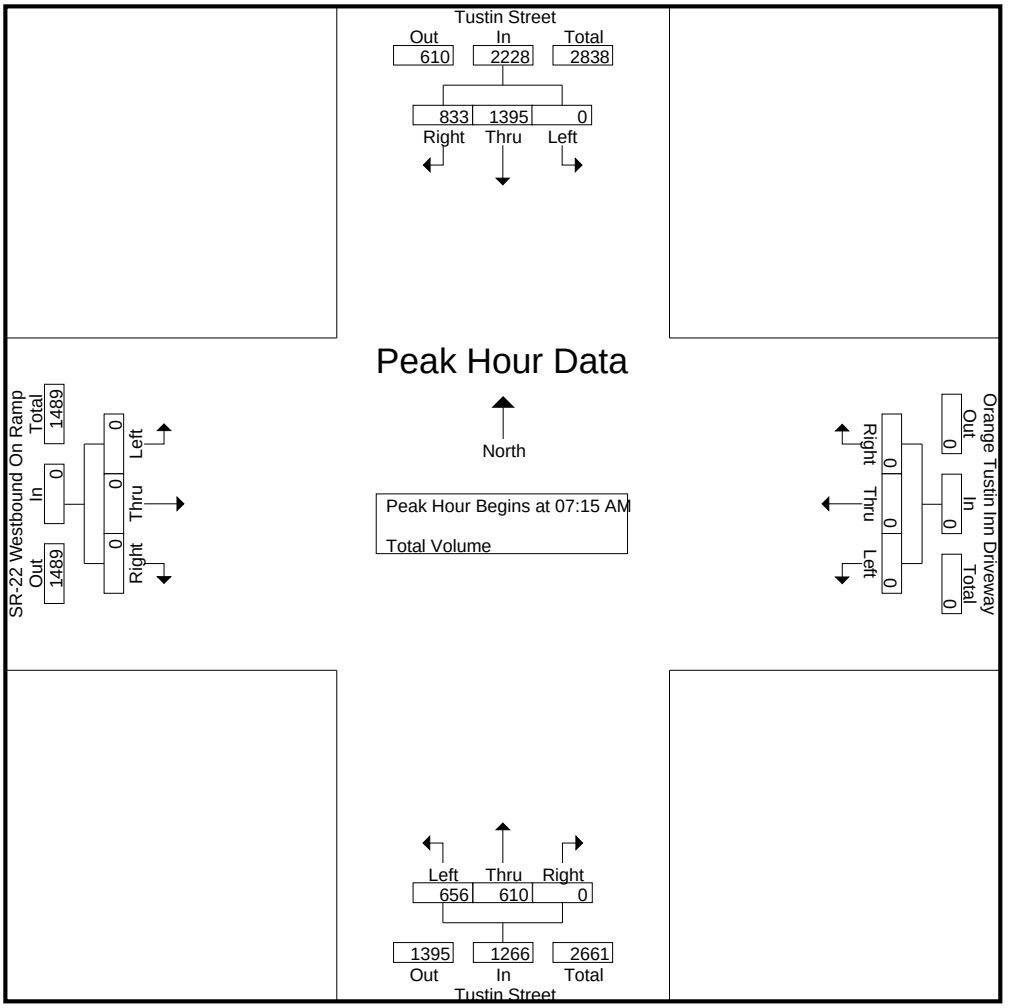

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	07:15 AM				07:00 AM				07:30 AM				07:00 AM			
+0 mins.	0	**389**	195	**584**	0	0	0	0	170	154	0	324	0	0	0	0
+15 mins.	0	355	210	565	0	0	0	0	**216**	161	0	**377**	0	0	0	0
+30 mins.	0	329	**233**	562	0	0	0	0	143	**180**	0	323	0	0	0	0
+45 mins.	0	322	195	517	0	0	0	0	151	168	0	319	0	0	0	0
Total Volume	0	1395	833	2228	0	0	0	0	680	663	0	1343	0	0	0	0
% App. Total	0	62.6	37.4		0	0	0		50.6	49.4	0		0	0	0	
PHF	.000	.897	.894	.954	.000	.000	.000	.000	.787	.921	.000	.891	.000	.000	.000	.000

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Orange
N/S: Tustin Street
E/W: SR-22 Westbound On Ramp
Weather: Clear

File Name : 89_ORN_Tustin_22W PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Tustin Street Southbound				Orange Tustin Inn Driveway Westbound				Tustin Street Northbound				SR-22 Westbound On Ramp Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	0	161	113	274	0	0	0	0	148	374	0	522	0	0	0	0	796
04:15 PM	0	146	88	234	0	0	0	0	142	377	0	519	0	0	0	0	753
04:30 PM	0	148	102	250	0	0	0	0	142	376	0	518	0	0	0	0	768
04:45 PM	0	166	100	266	0	0	0	0	111	373	0	484	0	0	0	0	750
Total	0	621	403	1024	0	0	0	0	543	1500	0	2043	0	0	0	0	3067
05:00 PM	0	173	99	272	0	0	0	0	149	379	0	528	0	0	0	0	800
05:15 PM	0	182	98	280	0	0	0	0	130	391	0	521	0	0	0	0	801
05:30 PM	0	190	68	258	0	0	0	0	142	386	0	528	0	0	0	0	786
05:45 PM	0	169	81	250	0	0	0	0	105	391	0	496	0	0	0	0	746
Total	0	714	346	1060	0	0	0	0	526	1547	0	2073	0	0	0	0	3133
Grand Total	0	1335	749	2084	0	0	0	0	1069	3047	0	4116	0	0	0	0	6200
Apprch %	0	64.1	35.9		0	0	0		26	74	0		0	0	0		
Total %	0	21.5	12.1	33.6	0	0	0	0	17.2	49.1	0	66.4	0	0	0	0	


	Tustin Street Southbound				Orange Tustin Inn Driveway Westbound				Tustin Street Northbound				SR-22 Westbound On Ramp Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:45 PM																	
04:45 PM	0	166	**100**	266	0	0	0	0	111	373	0	484	0	0	0	0	750
05:00 PM	0	173	99	272	0	0	0	0	**149**	379	0	**528**	0	0	0	0	800
05:15 PM	0	182	98	**280**	0	0	0	0	130	**391**	0	521	0	0	0	0	**801**
05:30 PM	0	**190**	68	258	0	0	0	0	142	386	0	528	0	0	0	0	786
Total Volume	0	711	365	1076	0	0	0	0	532	1529	0	2061	0	0	0	0	3137
% App. Total	0	66.1	33.9		0	0	0		25.8	74.2	0		0	0	0		
PHF	.000	.936	.913	.961	.000	.000	.000	.000	.893	.978	.000	.976	.000	.000	.000	.000	.979

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Orange
N/S: Tustin Street
E/W: SR-22 Westbound On Ramp
Weather: Clear

File Name : 89_ORN_Tustin_22W PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

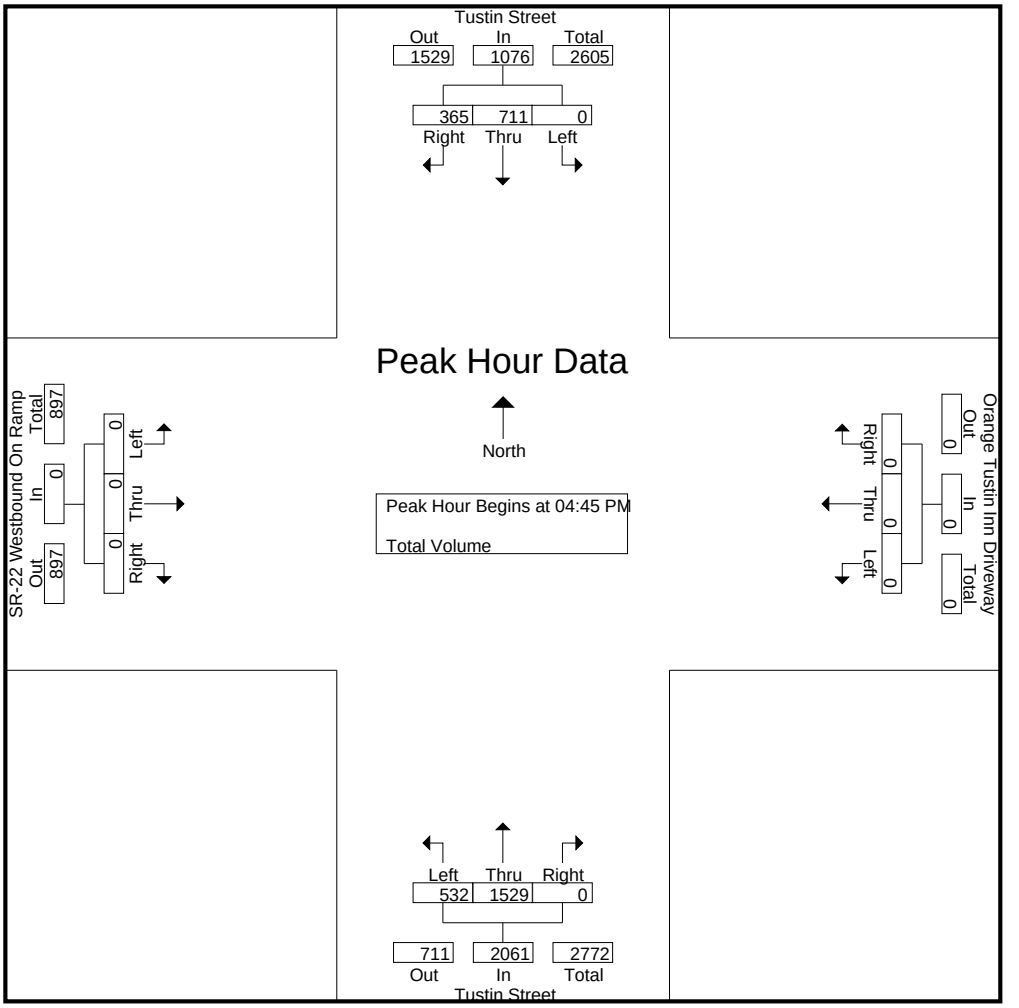

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	04:45 PM				04:00 PM				05:00 PM				04:00 PM			
+0 mins.	0	166	**100**	266	0	0	0	0	**149**	379	0	**528**	0	0	0	0
+15 mins.	0	173	99	272	0	0	0	0	130	**391**	0	521	0	0	0	0
+30 mins.	0	182	98	**280**	0	0	0	0	142	386	0	528	0	0	0	0
+45 mins.	0	**190**	68	258	0	0	0	0	105	391	0	496	0	0	0	0
Total Volume	0	711	365	1076	0	0	0	0	526	1547	0	2073	0	0	0	0
% App. Total	0	66.1	33.9		0	0	0		25.4	74.6	0		0	0	0	
PHF	.000	.936	.913	.961	.000	.000	.000	.000	.883	.989	.000	.982	.000	.000	.000	.000

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Orange
N/S: Tustin Street
E/W: SR-22 EB Off Ramp/Seba Avenue
Weather: Clear

File Name : 90_ORN_Tustin_22E AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Tustin Street Southbound				Seba Avenue Westbound				Tustin Street Northbound				SR-22 Eastbound Off Ramp Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	2	299	0	301	3	0	4	7	0	170	0	170	49	2	208	259	737
07:15 AM	2	370	0	372	1	0	6	7	0	200	0	200	59	4	288	351	930
07:30 AM	2	316	0	318	0	0	10	10	0	263	1	264	62	9	269	340	932
07:45 AM	5	321	0	326	3	0	15	18	0	291	1	292	51	2	250	303	939
Total	11	1306	0	1317	7	0	35	42	0	924	2	926	221	17	1015	1253	3538
08:00 AM	13	342	0	355	2	0	12	14	0	242	3	245	72	9	244	325	939
08:15 AM	13	294	0	307	4	0	13	17	0	231	0	231	76	8	251	335	890
08:30 AM	6	261	0	267	6	0	9	15	0	217	2	219	63	8	184	255	756
08:45 AM	7	221	0	228	1	0	7	8	0	192	2	194	79	3	227	309	739
Total	39	1118	0	1157	13	0	41	54	0	882	7	889	290	28	906	1224	3324
Grand Total	50	2424	0	2474	20	0	76	96	0	1806	9	1815	511	45	1921	2477	6862
Apprch %	2	98	0		20.8	0	79.2		0	99.5	0.5		20.6	1.8	77.6		
Total %	0.7	35.3	0	36.1	0.3	0	1.1	1.4	0	26.3	0.1	26.5	7.4	0.7	28	36.1	


	Tustin Street Southbound				Seba Avenue Westbound				Tustin Street Northbound				SR-22 Eastbound Off Ramp Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:15 AM																	
07:15 AM	2	**370**	0	**372**	1	0	6	7	0	200	0	200	59	4	**288**	**351**	930
07:30 AM	2	316	0	318	0	0	10	10	0	263	1	264	62	**9**	269	340	932
07:45 AM	5	321	0	326	**3**	0	**15**	**18**	0	**291**	1	**292**	51	2	250	303	**939**
08:00 AM	**13**	342	0	355	2	0	12	14	0	242	**3**	245	**72**	9	244	325	939
Total Volume	22	1349	0	1371	6	0	43	49	0	996	5	1001	244	24	1051	1319	3740
% App. Total	1.6	98.4	0		12.2	0	87.8		0	99.5	0.5		18.5	1.8	79.7		
PHF	.423	.911	.000	.921	.500	.000	.717	.681	.000	.856	.417	.857	.847	.667	.912	.939	.996

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Orange
N/S: Tustin Street
E/W: SR-22 EB Off Ramp/Seba Avenue
Weather: Clear

File Name : 90_ORN_Tustin_22E AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

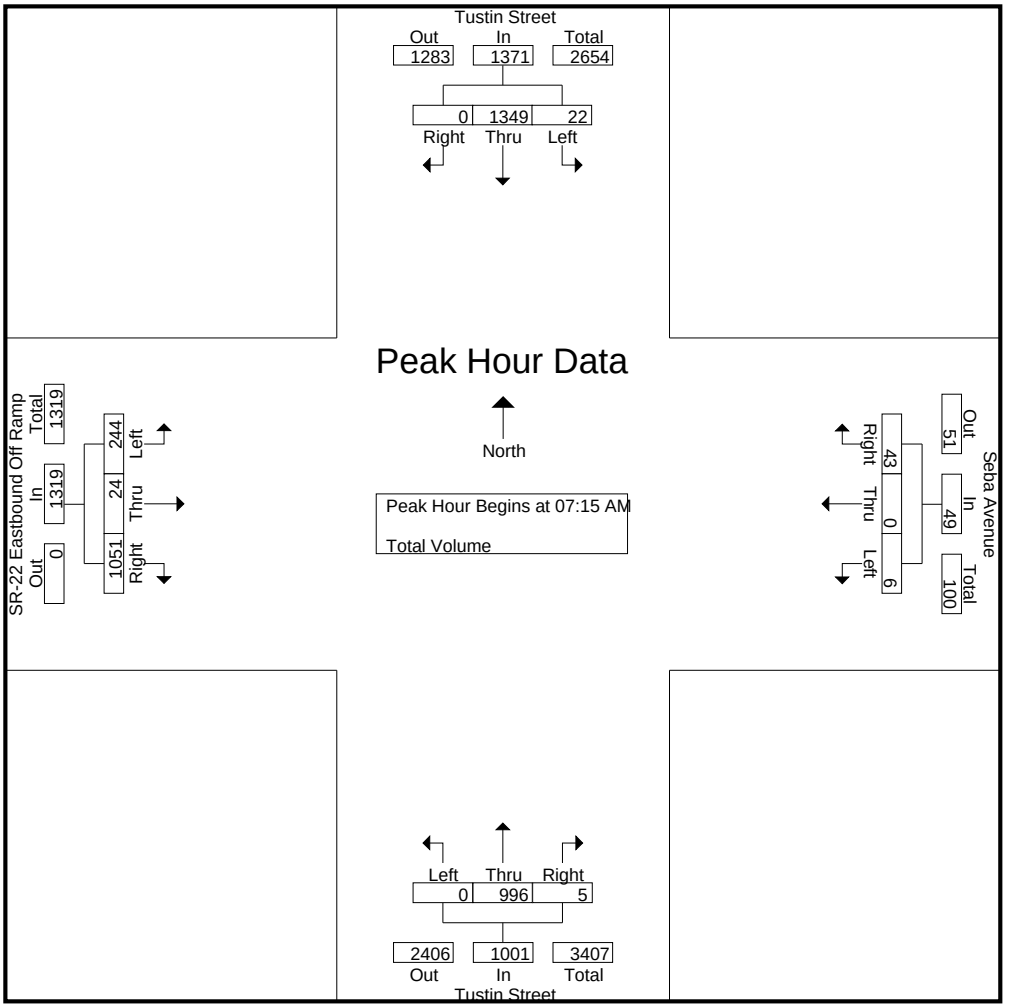

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	07:15 AM				07:45 AM				07:30 AM				07:15 AM			
+0 mins.	2	**370**	0	**372**	3	0	**15**	**18**	0	263	1	264	59	4	**288**	**351**
+15 mins.	2	316	0	318	2	0	12	14	0	**291**	1	**292**	62	**9**	269	340
+30 mins.	5	321	0	326	4	0	13	17	0	242	**3**	245	51	2	250	303
+45 mins.	**13**	342	0	355	**6**	0	9	15	0	231	0	231	**72**	9	244	325
Total Volume	22	1349	0	1371	15	0	49	64	0	1027	5	1032	244	24	1051	1319
% App. Total	1.6	98.4	0		23.4	0	76.6		0	99.5	0.5		18.5	1.8	79.7	
PHF	.423	.911	.000	.921	.625	.000	.817	.889	.000	.882	.417	.884	.847	.667	.912	.939

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Orange
N/S: Tustin Street
E/W: SR-22 EB Off Ramp/Seba Avenue
Weather: Clear

File Name : 90_ORN_Tustin_22E PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Tustin Street Southbound				Seba Avenue Westbound				Tustin Street Northbound				SR-22 Eastbound Off Ramp Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	7	144	0	151	8	0	10	18	0	359	1	360	164	11	142	317	846
04:15 PM	10	155	0	165	7	0	16	23	0	350	2	352	153	16	146	315	855
04:30 PM	17	142	0	159	6	0	18	24	0	359	2	361	144	7	142	293	837
04:45 PM	14	167	0	181	5	0	11	16	0	380	0	380	114	7	123	244	821
Total	48	608	0	656	26	0	55	81	0	1448	5	1453	575	41	553	1169	3359
05:00 PM	12	177	0	189	8	0	21	29	0	382	1	383	108	10	138	256	857
05:15 PM	10	155	0	165	9	0	18	27	0	372	3	375	120	11	162	293	860
05:30 PM	16	208	0	224	6	0	17	23	0	413	0	413	116	13	158	287	947
05:45 PM	14	144	0	158	5	0	24	29	0	344	2	346	123	7	142	272	805
Total	52	684	0	736	28	0	80	108	0	1511	6	1517	467	41	600	1108	3469
Grand Total	100	1292	0	1392	54	0	135	189	0	2959	11	2970	1042	82	1153	2277	6828
Apprch %	7.2	92.8	0		28.6	0	71.4		0	99.6	0.4		45.8	3.6	50.6		
Total %	1.5	18.9	0	20.4	0.8	0	2	2.8	0	43.3	0.2	43.5	15.3	1.2	16.9	33.3	


	Tustin Street Southbound				Seba Avenue Westbound				Tustin Street Northbound				SR-22 Eastbound Off Ramp Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:45 PM																	
04:45 PM	14	167	0	181	5	0	11	16	0	380	0	380	114	7	123	244	821
05:00 PM	12	177	0	189	8	0	**21**	**29**	0	382	1	383	108	10	138	256	857
05:15 PM	10	155	0	165	**9**	0	18	27	0	372	**3**	375	**120**	11	**162**	**293**	860
05:30 PM	**16**	**208**	0	**224**	6	0	17	23	0	**413**	0	**413**	116	**13**	158	287	**947**
Total Volume	52	707	0	759	28	0	67	95	0	1547	4	1551	458	41	581	1080	3485
% App. Total	6.9	93.1	0		29.5	0	70.5		0	99.7	0.3		42.4	3.8	53.8		
PHF	.813	.850	.000	.847	.778	.000	.798	.819	.000	.936	.333	.939	.954	.788	.897	.922	.920

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Orange
N/S: Tustin Street
E/W: SR-22 EB Off Ramp/Seba Avenue
Weather: Clear

File Name : 90_ORN_Tustin_22E PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

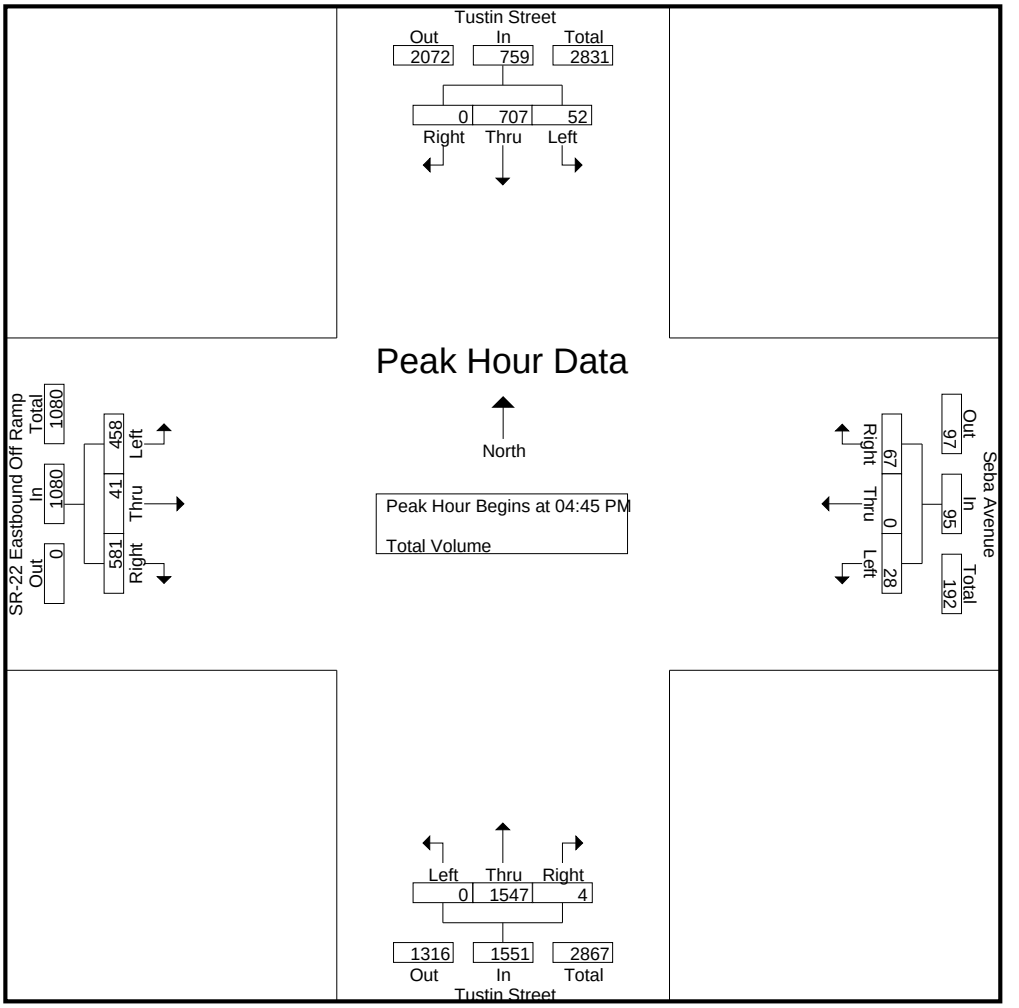

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	04:45 PM				05:00 PM				04:45 PM				04:00 PM			
+0 mins.	14	167	0	181	8	0	21	**29**	0	380	0	380	**164**	11	142	**317**
+15 mins.	12	177	0	189	**9**	0	18	27	0	382	1	383	153	**16**	**146**	315
+30 mins.	10	155	0	165	6	0	17	23	0	372	**3**	375	144	7	142	293
+45 mins.	**16**	**208**	0	**224**	5	0	**24**	29	0	**413**	0	**413**	114	7	123	244
Total Volume	52	707	0	759	28	0	80	108	0	1547	4	1551	575	41	553	1169
% App. Total	6.9	93.1	0		25.9	0	74.1		0	99.7	0.3		49.2	3.5	47.3	
PHF	.813	.850	.000	.847	.778	.000	.833	.931	.000	.936	.333	.939	.877	.641	.947	.922

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Tustin Street/Tustin Avenue
E/W: Fairhaven Avenue
Weather: Clear

File Name : 91_SNA_Tustin_Fairhaven AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume


	Tustin Street Southbound				Fairhaven Avenue Westbound				Tustin Avenue Northbound				Fairhaven Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	39	455	3	497	44	20	70	134	8	93	12	113	11	27	66	104	848
07:15 AM	59	554	8	621	51	45	85	181	14	108	19	141	14	45	85	144	1087
07:30 AM	61	526	4	591	77	71	112	260	21	123	30	174	17	72	119	208	1233
07:45 AM	67	501	13	581	80	92	139	311	28	138	17	183	16	73	101	190	1265
Total	226	2036	28	2290	252	228	406	886	71	462	78	611	58	217	371	646	4433
08:00 AM	53	520	11	584	81	106	102	289	24	125	23	172	19	57	126	202	1247
08:15 AM	54	479	12	545	68	69	89	226	16	128	20	164	16	56	98	170	1105
08:30 AM	53	399	6	458	54	39	82	175	16	136	19	171	21	50	71	142	946
08:45 AM	49	387	5	441	48	32	61	141	13	109	15	137	17	25	68	110	829
Total	209	1785	34	2028	251	246	334	831	69	498	77	644	73	188	363	624	4127
Grand Total	435	3821	62	4318	503	474	740	1717	140	960	155	1255	131	405	734	1270	8560
Apprch %	10.1	88.5	1.4		29.3	27.6	43.1		11.2	76.5	12.4		10.3	31.9	57.8		
Total %	5.1	44.6	0.7	50.4	5.9	5.5	8.6	20.1	1.6	11.2	1.8	14.7	1.5	4.7	8.6	14.8	

	Tustin Street Southbound				Fairhaven Avenue Westbound				Tustin Avenue Northbound				Fairhaven Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:30 AM																	
07:30 AM	61	**526**	4	**591**	77	71	112	260	21	123	**30**	174	17	72	119	**208**	1233
07:45 AM	**67**	501	**13**	581	80	92	**139**	**311**	**28**	**138**	17	**183**	16	**73**	101	190	**1265**
08:00 AM	53	520	11	584	**81**	**106**	102	289	24	125	23	172	**19**	57	**126**	202	1247
08:15 AM	54	479	12	545	68	69	89	226	16	128	20	164	16	56	98	170	1105
Total Volume	235	2026	40	2301	306	338	442	1086	89	514	90	693	68	258	444	770	4850
% App. Total	10.2	88	1.7		28.2	31.1	40.7		12.8	74.2	13		8.8	33.5	57.7		
PHF	.877	.963	.769	.973	.944	.797	.795	.873	.795	.931	.750	.947	.895	.884	.881	.925	.958

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Tustin Street/Tustin Avenue
E/W: Fairhaven Avenue
Weather: Clear

File Name : 91_SNA_Tustin_Fairhaven AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

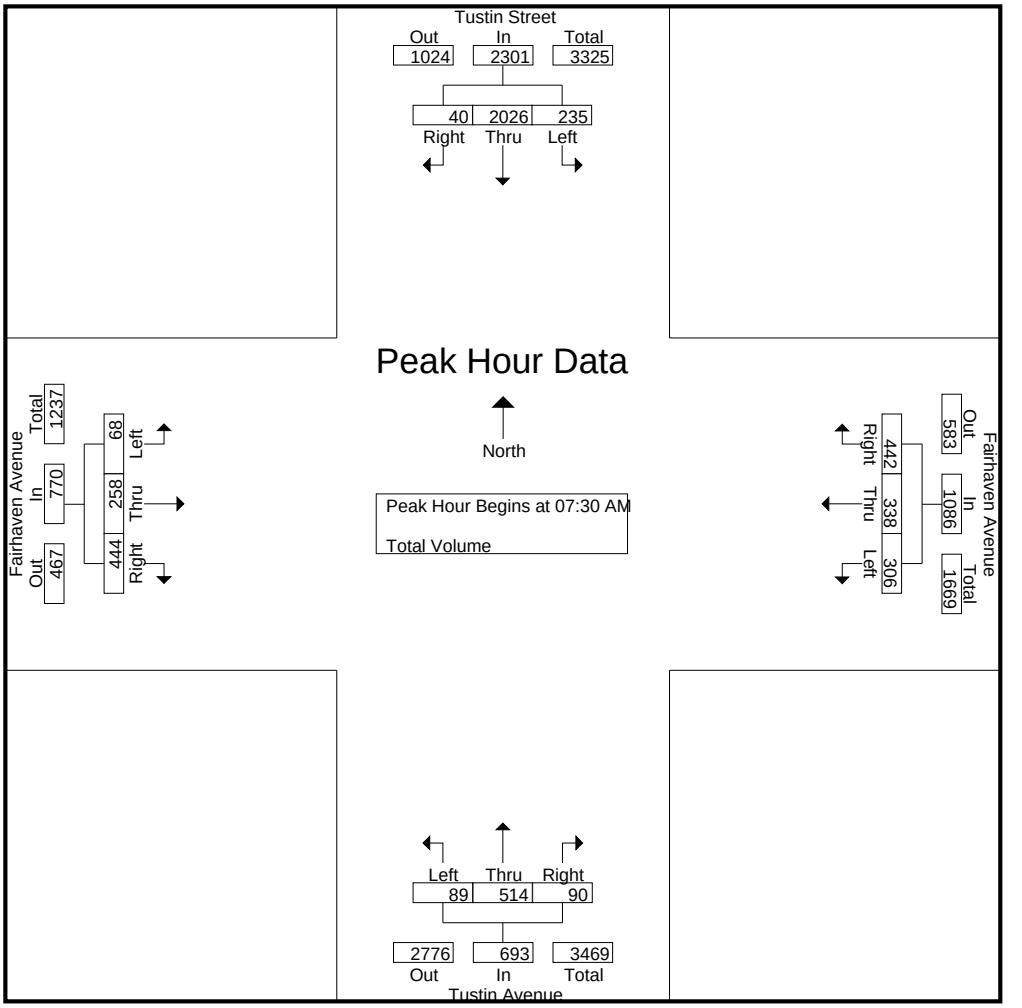

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	07:15 AM				07:30 AM				07:30 AM				07:30 AM			
+0 mins.	59	**554**	8	**621**	77	71	112	260	21	123	**30**	174	17	72	119	**208**
+15 mins.	61	526	4	591	80	92	**139**	**311**	**28**	**138**	17	**183**	16	**73**	101	190
+30 mins.	**67**	501	**13**	581	**81**	**106**	102	289	24	125	23	172	**19**	57	**126**	202
+45 mins.	53	520	11	584	68	69	89	226	16	128	20	164	16	56	98	170
Total Volume	240	2101	36	2377	306	338	442	1086	89	514	90	693	68	258	444	770
% App. Total	10.1	88.4	1.5		28.2	31.1	40.7		12.8	74.2	13		8.8	33.5	57.7	
PHF	.896	.948	.692	.957	.944	.797	.795	.873	.795	.931	.750	.947	.895	.884	.881	.925

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Tustin Street/Tustin Avenue
E/W: Fairhaven Avenue
Weather: Clear

File Name : 91_SNA_Tustin_Fairhaven PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Tustin Street Southbound				Fairhaven Avenue Westbound				Tustin Avenue Northbound				Fairhaven Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	80	189	19	288	46	39	63	148	48	270	27	345	21	44	32	97	878
04:15 PM	84	210	14	308	25	47	50	122	50	277	35	362	18	40	35	93	885
04:30 PM	68	182	21	271	22	55	51	128	48	289	42	379	19	43	37	99	877
04:45 PM	71	205	18	294	20	47	42	109	66	311	33	410	20	32	38	90	903
Total	303	786	72	1161	113	188	206	507	212	1147	137	1496	78	159	142	379	3543
05:00 PM	72	205	32	309	19	56	51	126	61	324	32	417	23	56	37	116	968
05:15 PM	92	198	28	318	30	46	45	121	57	329	21	407	20	52	39	111	957
05:30 PM	92	254	21	367	25	59	58	142	55	311	27	393	17	40	33	90	992
05:45 PM	70	195	14	279	29	54	47	130	58	273	27	358	17	35	46	98	865
Total	326	852	95	1273	103	215	201	519	231	1237	107	1575	77	183	155	415	3782
Grand Total	629	1638	167	2434	216	403	407	1026	443	2384	244	3071	155	342	297	794	7325
Apprch %	25.8	67.3	6.9		21.1	39.3	39.7		14.4	77.6	7.9		19.5	43.1	37.4		
Total %	8.6	22.4	2.3	33.2	2.9	5.5	5.6	14	6	32.5	3.3	41.9	2.1	4.7	4.1	10.8	


	Tustin Street Southbound				Fairhaven Avenue Westbound				Tustin Avenue Northbound				Fairhaven Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:45 PM																	
04:45 PM	71	205	18	294	20	47	42	109	**66**	311	**33**	410	20	32	38	90	903
05:00 PM	72	205	**32**	309	19	56	51	126	61	324	32	**417**	**23**	**56**	37	**116**	968
05:15 PM	**92**	198	28	318	**30**	46	45	121	57	**329**	21	407	20	52	**39**	111	957
05:30 PM	92	**254**	21	**367**	25	**59**	**58**	**142**	55	311	27	393	17	40	33	90	**992**
Total Volume	327	862	99	1288	94	208	196	498	239	1275	113	1627	80	180	147	407	3820
% App. Total	25.4	66.9	7.7		18.9	41.8	39.4		14.7	78.4	6.9		19.7	44.2	36.1		
PHF	.889	.848	.773	.877	.783	.881	.845	.877	.905	.969	.856	.975	.870	.804	.942	.877	.963

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Tustin Street/Tustin Avenue
E/W: Fairhaven Avenue
Weather: Clear

File Name : 91_SNA_Tustin_Fairhaven PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

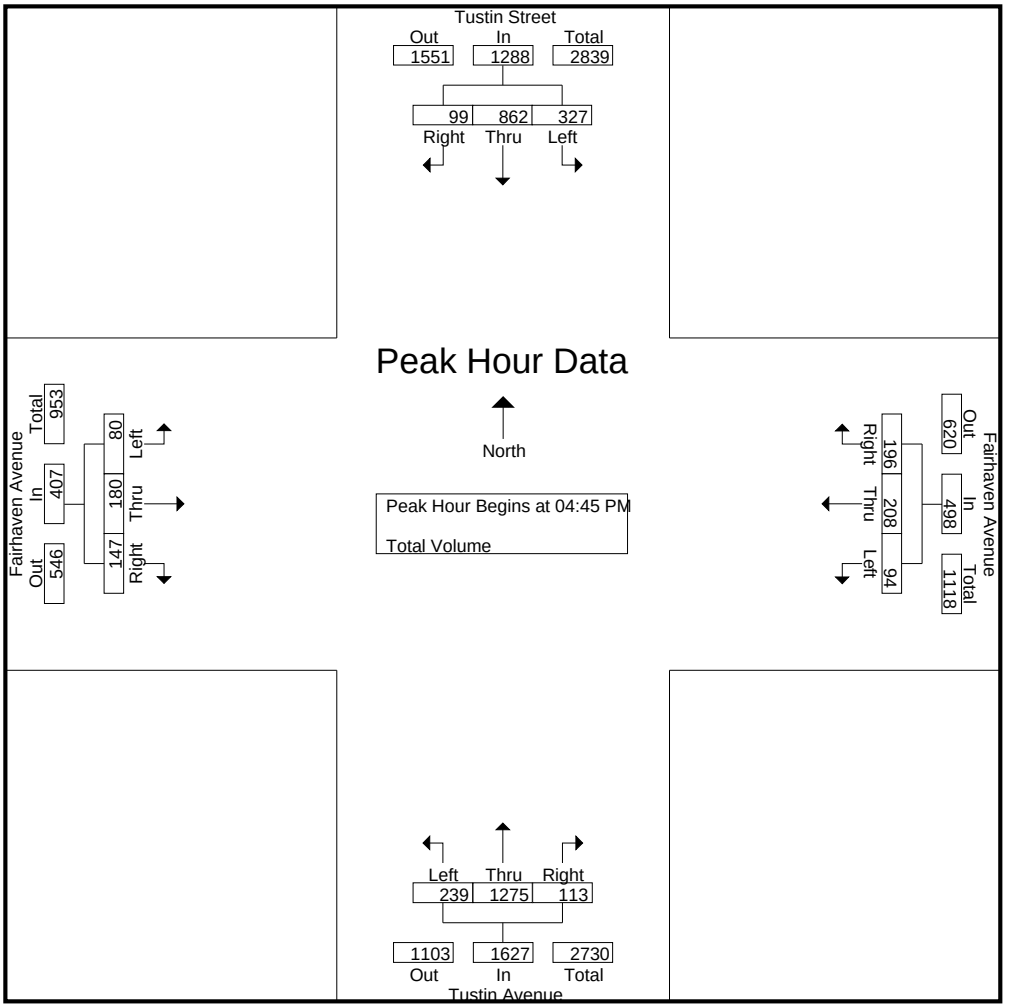

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	04:45 PM				05:00 PM				04:45 PM				04:30 PM			
+0 mins.	71	205	18	294	19	56	51	126	**66**	311	**33**	410	19	43	37	99
+15 mins.	72	205	**32**	309	**30**	46	45	121	61	324	32	**417**	20	32	38	90
+30 mins.	**92**	198	28	318	25	**59**	**58**	**142**	57	**329**	21	407	**23**	**56**	37	**116**
+45 mins.	92	**254**	21	**367**	29	54	47	130	55	311	27	393	20	52	**39**	111
Total Volume	327	862	99	1288	103	215	201	519	239	1275	113	1627	82	183	151	416
% App. Total	25.4	66.9	7.7		19.8	41.4	38.7		14.7	78.4	6.9		19.7	44	36.3	
PHF	.889	.848	.773	.877	.858	.911	.866	.914	.905	.969	.856	.975	.891	.817	.968	.897

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Tustin Avenue
E/W: Santa Clara Avenue
Weather: Clear

File Name : 92_SNA_Tustin_Santa Clara AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Tustin Avenue Southbound				Santa Clara Avenue Westbound				Tustin Avenue Northbound				Santa Clara Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	19	509	22	550	18	20	21	59	15	65	13	93	23	34	35	92	794
07:15 AM	31	655	24	710	20	29	32	81	9	78	24	111	16	86	40	142	1044
07:30 AM	24	633	22	679	31	67	32	130	17	92	20	129	33	82	54	169	1107
07:45 AM	26	654	15	695	23	59	29	111	22	101	16	139	19	73	32	124	1069
Total	100	2451	83	2634	92	175	114	381	63	336	73	472	91	275	161	527	4014
08:00 AM	33	661	28	722	30	63	37	130	17	101	20	138	32	61	56	149	1139
08:15 AM	44	652	17	713	34	55	24	113	17	103	18	138	17	39	44	100	1064
08:30 AM	23	473	17	513	19	33	23	75	20	94	13	127	25	31	37	93	808
08:45 AM	25	465	18	508	28	28	19	75	14	91	8	113	29	34	54	117	813
Total	125	2251	80	2456	111	179	103	393	68	389	59	516	103	165	191	459	3824
Grand Total	225	4702	163	5090	203	354	217	774	131	725	132	988	194	440	352	986	7838
Apprch %	4.4	92.4	3.2		26.2	45.7	28		13.3	73.4	13.4		19.7	44.6	35.7		
Total %	2.9	60	2.1	64.9	2.6	4.5	2.8	9.9	1.7	9.2	1.7	12.6	2.5	5.6	4.5	12.6	


	Tustin Avenue Southbound				Santa Clara Avenue Westbound				Tustin Avenue Northbound				Santa Clara Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:30 AM																	
07:30 AM	24	633	22	679	31	**67**	32	**130**	17	92	**20**	129	**33**	**82**	54	**169**	1107
07:45 AM	26	654	15	695	23	59	29	111	**22**	101	16	**139**	19	73	32	124	1069
08:00 AM	33	**661**	**28**	**722**	30	63	**37**	130	17	101	20	138	32	61	**56**	149	**1139**
08:15 AM	**44**	652	17	713	**34**	55	24	113	17	**103**	18	138	17	39	44	100	1064
Total Volume	127	2600	82	2809	118	244	122	484	73	397	74	544	101	255	186	542	4379
% App. Total	4.5	92.6	2.9		24.4	50.4	25.2		13.4	73	13.6		18.6	47	34.3		
PHF	.722	.983	.732	.973	.868	.910	.824	.931	.830	.964	.925	.978	.765	.777	.830	.802	.961

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Tustin Avenue
E/W: Santa Clara Avenue
Weather: Clear

File Name : 92_SNA_Tustin_Santa Clara AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

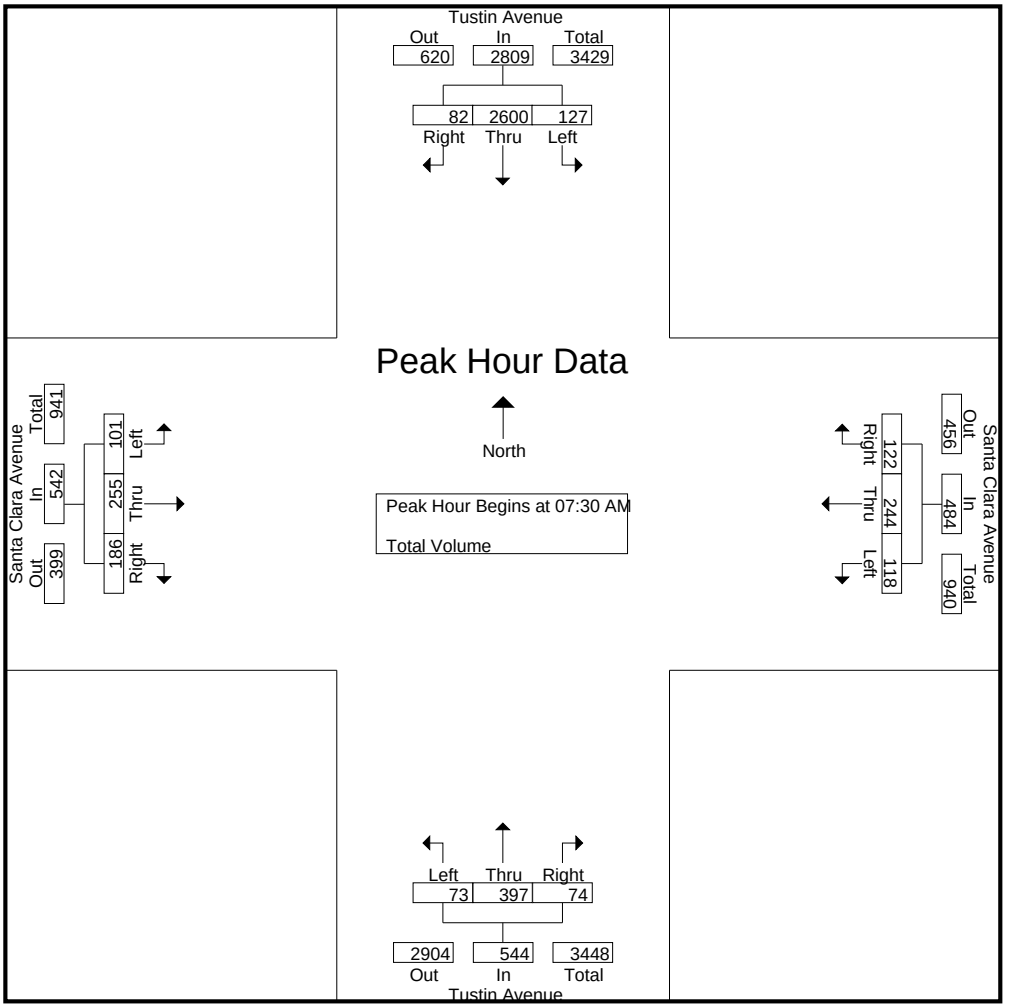

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	07:30 AM				07:30 AM				07:30 AM				07:15 AM			
+0 mins.	24	633	22	679	31	**67**	32	**130**	17	92	**20**	129	16	**86**	40	142
+15 mins.	26	654	15	695	23	59	29	111	**22**	101	16	**139**	**33**	82	54	**169**
+30 mins.	33	**661**	**28**	**722**	30	63	**37**	130	17	101	20	138	19	73	32	124
+45 mins.	**44**	652	17	713	**34**	55	24	113	17	**103**	18	138	32	61	**56**	149
Total Volume	127	2600	82	2809	118	244	122	484	73	397	74	544	100	302	182	584
% App. Total	4.5	92.6	2.9		24.4	50.4	25.2		13.4	73	13.6		17.1	51.7	31.2	
PHF	.722	.983	.732	.973	.868	.910	.824	.931	.830	.964	.925	.978	.758	.878	.813	.864

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Tustin Avenue
E/W: Santa Clara Avenue
Weather: Clear

File Name : 92_SNA_Tustin_Santa Clara PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Tustin Avenue Southbound				Santa Clara Avenue Westbound				Tustin Avenue Northbound				Santa Clara Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	34	318	34	386	35	26	22	83	40	197	26	263	19	41	28	88	820
04:15 PM	53	301	29	383	29	31	28	88	32	182	30	244	14	45	30	89	804
04:30 PM	47	358	26	431	31	44	44	119	38	174	32	244	16	52	22	90	884
04:45 PM	44	349	18	411	23	40	32	95	32	197	31	260	15	47	24	86	852
Total	178	1326	107	1611	118	141	126	385	142	750	119	1011	64	185	104	353	3360
05:00 PM	37	372	30	439	28	40	30	98	37	199	29	265	17	45	40	102	904
05:15 PM	55	365	26	446	43	33	42	118	56	219	29	304	13	48	27	88	956
05:30 PM	41	344	17	402	34	50	32	116	36	203	24	263	16	52	33	101	882
05:45 PM	40	304	26	370	34	39	24	97	47	213	23	283	15	33	25	73	823
Total	173	1385	99	1657	139	162	128	429	176	834	105	1115	61	178	125	364	3565
Grand Total	351	2711	206	3268	257	303	254	814	318	1584	224	2126	125	363	229	717	6925
Apprch %	10.7	83	6.3		31.6	37.2	31.2		15	74.5	10.5		17.4	50.6	31.9		
Total %	5.1	39.1	3	47.2	3.7	4.4	3.7	11.8	4.6	22.9	3.2	30.7	1.8	5.2	3.3	10.4	


	Tustin Avenue Southbound				Santa Clara Avenue Westbound				Tustin Avenue Northbound				Santa Clara Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:30 PM																	
04:30 PM	47	358	26	431	31	**44**	**44**	**119**	38	174	**32**	244	16	**52**	22	90	884
04:45 PM	44	349	18	411	23	40	32	95	32	197	31	260	15	47	24	86	852
05:00 PM	37	**372**	**30**	439	28	40	30	98	37	199	29	265	**17**	45	**40**	**102**	904
05:15 PM	**55**	365	26	**446**	**43**	33	42	118	**56**	**219**	29	**304**	13	48	27	88	**956**
Total Volume	183	1444	100	1727	125	157	148	430	163	789	121	1073	61	192	113	366	3596
% App. Total	10.6	83.6	5.8		29.1	36.5	34.4		15.2	73.5	11.3		16.7	52.5	30.9		
PHF	.832	.970	.833	.968	.727	.892	.841	.903	.728	.901	.945	.882	.897	.923	.706	.897	.940

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Tustin Avenue
E/W: Santa Clara Avenue
Weather: Clear

File Name : 92_SNA_Tustin_Santa Clara PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

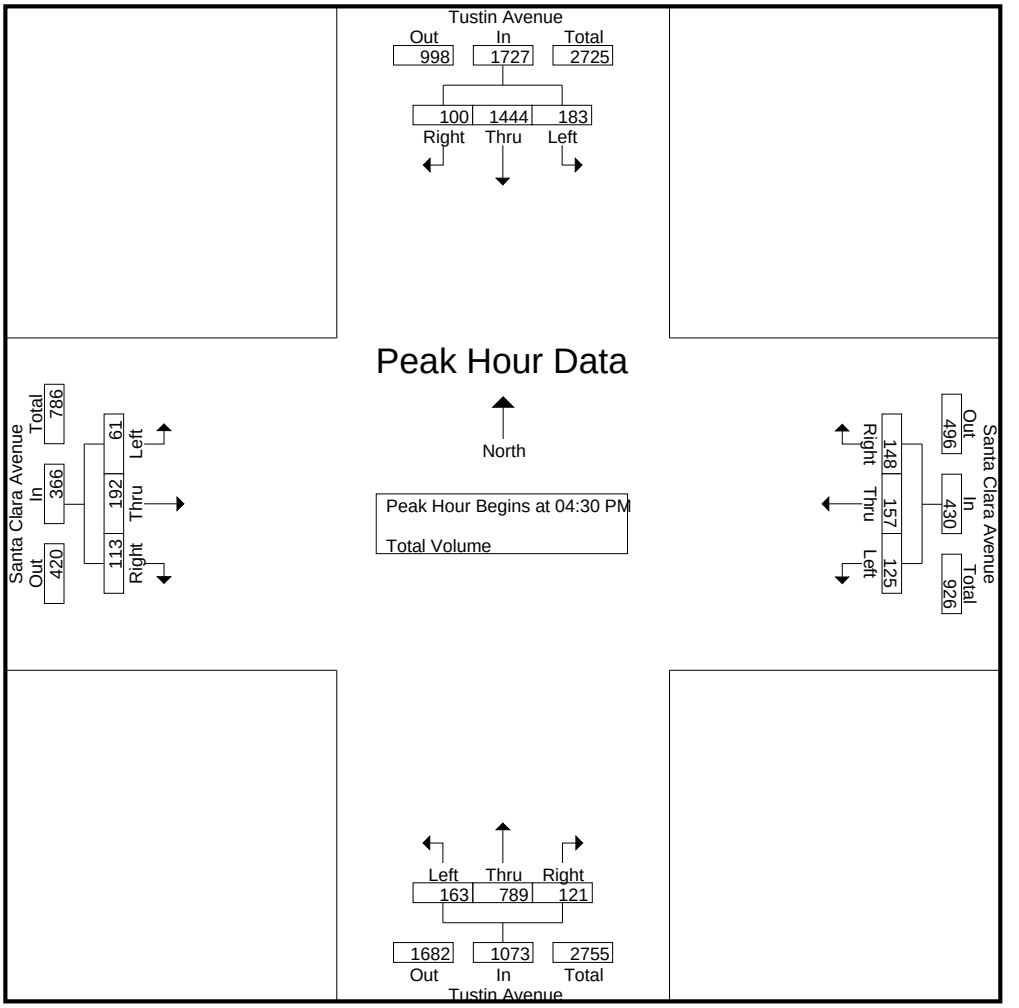

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	04:30 PM				04:30 PM				05:00 PM				04:45 PM			
+0 mins.	47	358	26	431	31	**44**	**44**	**119**	37	199	**29**	265	15	47	24	86
+15 mins.	44	349	18	411	23	40	32	95	**56**	**219**	29	**304**	**17**	45	**40**	**102**
+30 mins.	37	**372**	**30**	439	28	40	30	98	36	203	24	263	13	48	27	88
+45 mins.	**55**	365	26	**446**	**43**	33	42	118	47	213	23	283	16	**52**	33	101
Total Volume	183	1444	100	1727	125	157	148	430	176	834	105	1115	61	192	124	377
% App. Total	10.6	83.6	5.8		29.1	36.5	34.4		15.8	74.8	9.4		16.2	50.9	32.9	
PHF	.832	.970	.833	.968	.727	.892	.841	.903	.786	.952	.905	.917	.897	.923	.775	.924

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Tustin Avenue
E/W: 17th Street
Weather: Clear

File Name : 93_SNA_Tustin_17th St AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume


	Tustin Avenue Southbound				17th Street Westbound				Tustin Avenue Northbound				17th Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	147	328	3	478	79	95	23	197	21	35	45	101	23	118	17	158	934
07:15 AM	133	414	1	548	77	131	33	241	20	41	55	116	32	228	22	282	1187
07:30 AM	174	475	6	655	79	147	28	254	26	41	61	128	27	216	22	265	1302
07:45 AM	123	408	1	532	139	227	51	417	25	54	58	137	46	188	26	260	1346
Total	577	1625	11	2213	374	600	135	1109	92	171	219	482	128	750	87	965	4769
08:00 AM	154	454	5	613	131	201	51	383	27	56	47	130	53	199	33	285	1411
08:15 AM	151	400	7	558	139	195	58	392	33	47	70	150	61	135	45	241	1341
08:30 AM	128	288	10	426	122	145	40	307	28	65	40	133	45	124	35	204	1070
08:45 AM	117	314	9	440	142	176	47	365	37	44	45	126	46	132	35	213	1144
Total	550	1456	31	2037	534	717	196	1447	125	212	202	539	205	590	148	943	4966
Grand Total	1127	3081	42	4250	908	1317	331	2556	217	383	421	1021	333	1340	235	1908	9735
Apprch %	26.5	72.5	1		35.5	51.5	12.9		21.3	37.5	41.2		17.5	70.2	12.3		
Total %	11.6	31.6	0.4	43.7	9.3	13.5	3.4	26.3	2.2	3.9	4.3	10.5	3.4	13.8	2.4	19.6	

	Tustin Avenue Southbound				17th Street Westbound				Tustin Avenue Northbound				17th Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:30 AM																	
07:30 AM	**174**	**475**	6	**655**	79	147	28	254	26	41	61	128	27	**216**	22	265	1302
07:45 AM	123	408	1	532	**139**	**227**	51	**417**	25	54	58	137	46	188	26	260	1346
08:00 AM	154	454	5	613	131	201	51	383	27	**56**	47	130	53	199	33	**285**	**1411**
08:15 AM	151	400	**7**	558	139	195	**58**	392	**33**	47	**70**	**150**	**61**	135	**45**	241	1341
Total Volume	602	1737	19	2358	488	770	188	1446	111	198	236	545	187	738	126	1051	5400
% App. Total	25.5	73.7	0.8		33.7	53.3	13		20.4	36.3	43.3		17.8	70.2	12		
PHF	.865	.914	.679	.900	.878	.848	.810	.867	.841	.884	.843	.908	.766	.854	.700	.922	.957

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Tustin Avenue
E/W: 17th Street
Weather: Clear

File Name : 93_SNA_Tustin_17th St AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

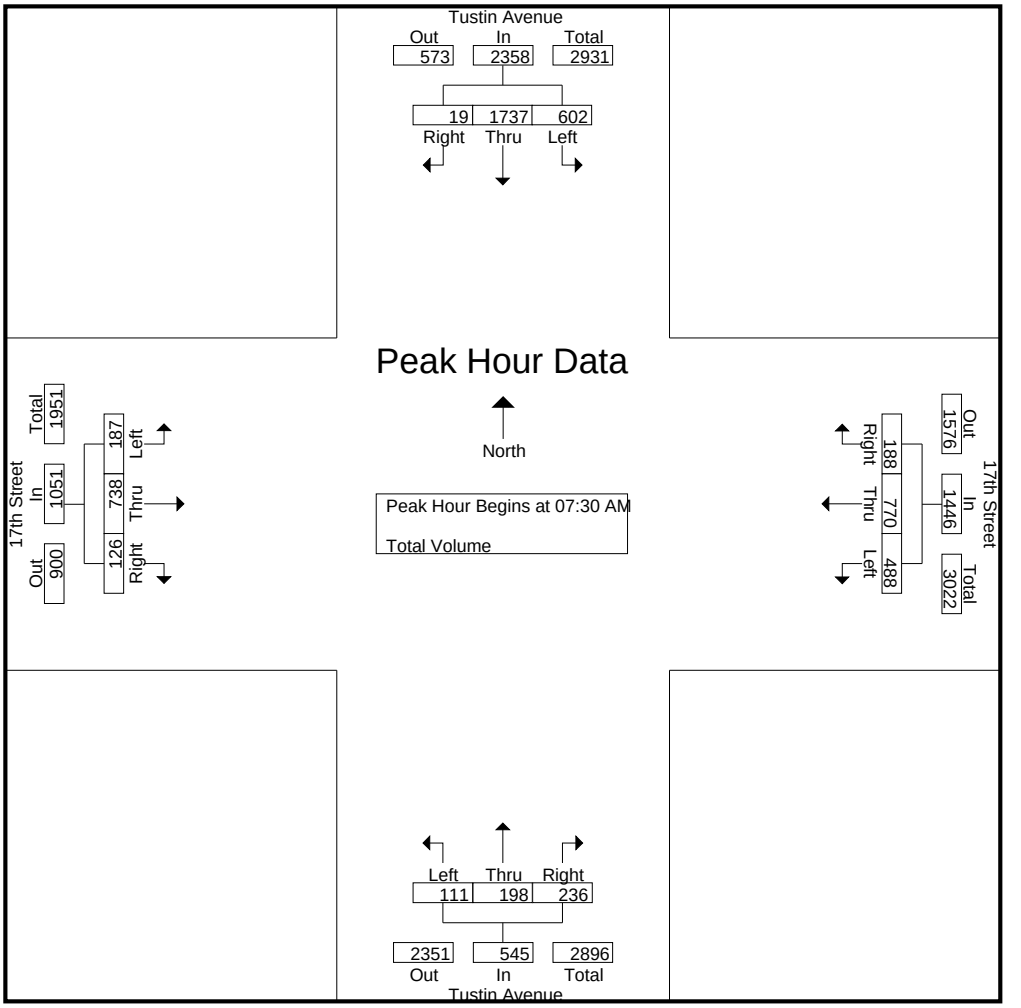

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	07:30 AM				07:45 AM				07:45 AM				07:15 AM			
+0 mins.	**174**	**475**	6	**655**	**139**	**227**	51	**417**	25	54	58	137	32	**228**	22	282
+15 mins.	123	408	1	532	131	201	51	383	27	56	47	130	27	216	22	265
+30 mins.	154	454	5	613	139	195	**58**	392	**33**	47	**70**	**150**	46	188	26	260
+45 mins.	151	400	**7**	558	122	145	40	307	28	**65**	40	133	**53**	199	**33**	**285**
Total Volume	602	1737	19	2358	531	768	200	1499	113	222	215	550	158	831	103	1092
% App. Total	25.5	73.7	0.8		35.4	51.2	13.3		20.5	40.4	39.1		14.5	76.1	9.4	
PHF	.865	.914	.679	.900	.955	.846	.862	.899	.856	.854	.768	.917	.745	.911	.780	.958

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Tustin Avenue
E/W: 17th Street
Weather: Clear

File Name : 93_SNA_Tustin_17th St PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume


	Tustin Avenue Southbound				17th Street Westbound				Tustin Avenue Northbound				17th Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	73	93	7	173	47	193	90	330	58	224	106	388	103	163	29	295	1186
04:15 PM	69	73	12	154	51	229	101	381	50	177	72	299	98	166	30	294	1128
04:30 PM	89	92	10	191	58	176	109	343	68	233	110	411	125	197	32	354	1299
04:45 PM	80	76	6	162	64	237	111	412	52	189	84	325	103	211	19	333	1232
Total	311	334	35	680	220	835	411	1466	228	823	372	1423	429	737	110	1276	4845
05:00 PM	90	92	9	191	46	160	108	314	57	238	169	464	115	244	29	388	1357
05:15 PM	87	111	12	210	61	180	91	332	39	266	113	418	101	220	38	359	1319
05:30 PM	89	88	12	189	48	205	88	341	47	176	102	325	129	219	37	385	1240
05:45 PM	89	101	18	208	49	186	88	323	44	207	88	339	94	180	24	298	1168
Total	355	392	51	798	204	731	375	1310	187	887	472	1546	439	863	128	1430	5084
Grand Total	666	726	86	1478	424	1566	786	2776	415	1710	844	2969	868	1600	238	2706	9929
Apprch %	45.1	49.1	5.8		15.3	56.4	28.3		14	57.6	28.4		32.1	59.1	8.8		
Total %	6.7	7.3	0.9	14.9	4.3	15.8	7.9	28	4.2	17.2	8.5	29.9	8.7	16.1	2.4	27.3	

	Tustin Avenue Southbound				17th Street Westbound				Tustin Avenue Northbound				17th Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:30 PM																	
04:30 PM	89	92	10	191	58	176	109	343	**68**	233	110	411	**125**	197	32	354	1299
04:45 PM	80	76	6	162	**64**	**237**	**111**	**412**	52	189	84	325	103	211	19	333	1232
05:00 PM	**90**	92	9	191	46	160	108	314	57	238	**169**	**464**	115	**244**	29	**388**	**1357**
05:15 PM	87	**111**	**12**	**210**	61	180	91	332	39	**266**	113	418	101	220	**38**	359	1319
Total Volume	346	371	37	754	229	753	419	1401	216	926	476	1618	444	872	118	1434	5207
% App. Total	45.9	49.2	4.9		16.3	53.7	29.9		13.3	57.2	29.4		31	60.8	8.2		
PHF	.961	.836	.771	.898	.895	.794	.944	.850	.794	.870	.704	.872	.888	.893	.776	.924	.959

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Tustin Avenue
E/W: 17th Street
Weather: Clear

File Name : 93_SNA_Tustin_17th St PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

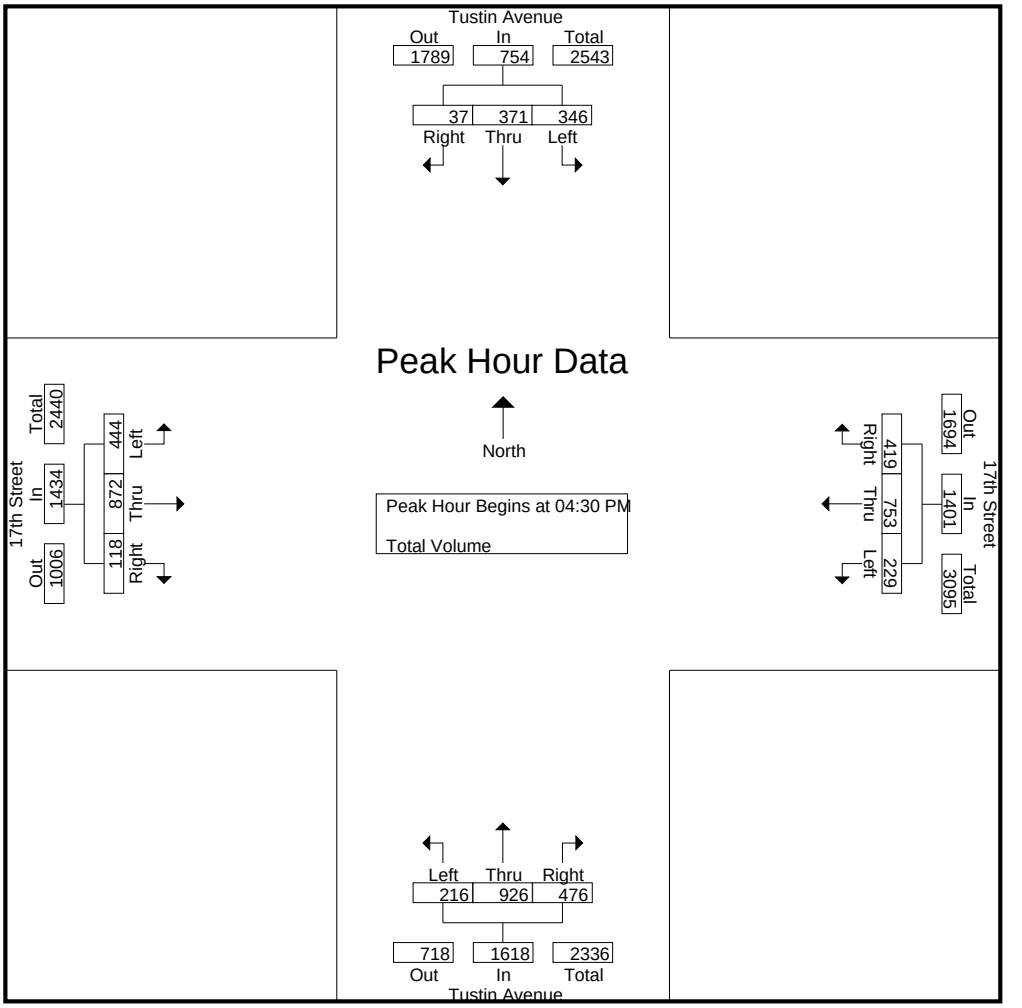

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	05:00 PM				04:00 PM				04:30 PM				04:45 PM			
+0 mins.	**90**	92	9	191	47	193	90	330	**68**	233	110	411	103	211	19	333
+15 mins.	87	**111**	12	**210**	51	229	101	381	52	189	84	325	115	**244**	29	**388**
+30 mins.	89	88	12	189	58	176	109	343	57	238	**169**	**464**	101	220	**38**	359
+45 mins.	89	101	**18**	208	**64**	**237**	**111**	**412**	39	**266**	113	418	**129**	219	37	385
Total Volume	355	392	51	798	220	835	411	1466	216	926	476	1618	448	894	123	1465
% App. Total	44.5	49.1	6.4		15	57	28		13.3	57.2	29.4		30.6	61	8.4	
PHF	.986	.883	.708	.950	.859	.881	.926	.890	.794	.870	.704	.872	.868	.916	.809	.944

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Tustin Avenue
E/W: 4th Street
Weather: Clear

File Name : 94_SNA_Tustin_4th St AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume


	Tustin Avenue Southbound				4th Street Westbound				Tustin Avenue Northbound				4th Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	177	130	38	345	10	64	56	130	5	40	33	78	13	87	5	105	658
07:15 AM	185	164	39	388	23	92	63	178	9	43	32	84	31	130	12	173	823
07:30 AM	178	258	72	508	25	152	64	241	13	53	48	114	21	198	3	222	1085
07:45 AM	155	203	74	432	27	150	104	281	13	67	68	148	22	208	5	235	1096
Total	695	755	223	1673	85	458	287	830	40	203	181	424	87	623	25	735	3662
08:00 AM	156	191	63	410	20	131	96	247	10	67	57	134	38	161	12	211	1002
08:15 AM	175	193	53	421	31	146	112	289	12	58	46	116	33	109	8	150	976
08:30 AM	168	151	55	374	26	132	87	245	15	71	49	135	32	104	13	149	903
08:45 AM	131	135	64	330	17	146	85	248	10	54	25	89	38	108	13	159	826
Total	630	670	235	1535	94	555	380	1029	47	250	177	474	141	482	46	669	3707
Grand Total	1325	1425	458	3208	179	1013	667	1859	87	453	358	898	228	1105	71	1404	7369
Apprch %	41.3	44.4	14.3		9.6	54.5	35.9		9.7	50.4	39.9		16.2	78.7	5.1		
Total %	18	19.3	6.2	43.5	2.4	13.7	9.1	25.2	1.2	6.1	4.9	12.2	3.1	15	1	19.1	

	Tustin Avenue Southbound				4th Street Westbound				Tustin Avenue Northbound				4th Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:30 AM																	
07:30 AM	**178**	**258**	72	**508**	25	**152**	64	241	**13**	53	48	114	21	198	3	222	1085
07:45 AM	155	203	**74**	432	27	150	104	281	13	**67**	**68**	**148**	22	**208**	5	**235**	**1096**
08:00 AM	156	191	63	410	20	131	96	247	10	67	57	134	**38**	161	**12**	211	1002
08:15 AM	175	193	53	421	**31**	146	**112**	**289**	12	58	46	116	33	109	8	150	976
Total Volume	664	845	262	1771	103	579	376	1058	48	245	219	512	114	676	28	818	4159
% App. Total	37.5	47.7	14.8		9.7	54.7	35.5		9.4	47.9	42.8		13.9	82.6	3.4		
PHF	.933	.819	.885	.872	.831	.952	.839	.915	.923	.914	.805	.865	.750	.813	.583	.870	.949

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Tustin Avenue
E/W: 4th Street
Weather: Clear

File Name : 94_SNA_Tustin_4th St AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

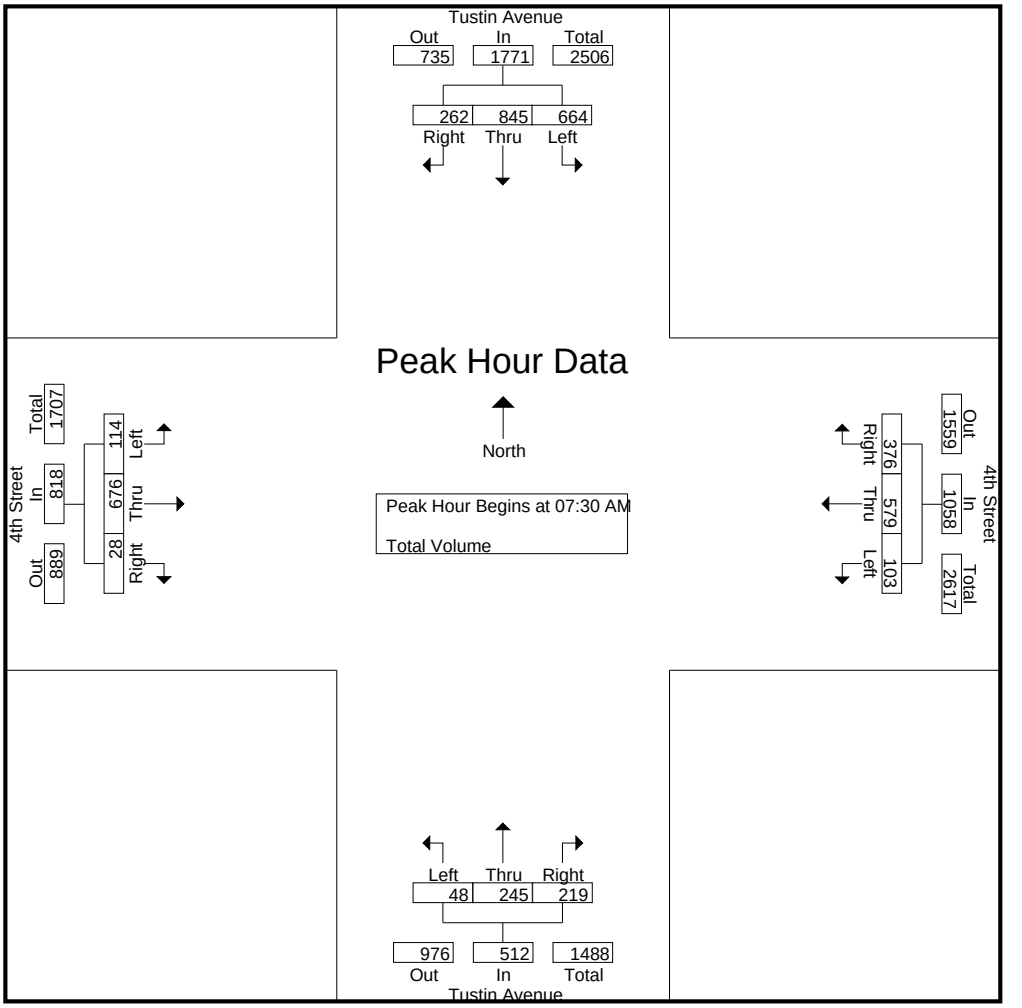

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	07:30 AM				07:45 AM				07:45 AM				07:15 AM			
+0 mins.	**178**	**258**	72	**508**	27	**150**	104	281	13	67	**68**	**148**	31	130	**12**	173
+15 mins.	155	203	**74**	432	20	131	96	247	10	67	57	134	21	198	3	222
+30 mins.	156	191	63	410	**31**	146	**112**	**289**	12	58	46	116	22	**208**	5	**235**
+45 mins.	175	193	53	421	26	132	87	245	**15**	**71**	49	135	**38**	161	12	211
Total Volume	664	845	262	1771	104	559	399	1062	50	263	220	533	112	697	32	841
% App. Total	37.5	47.7	14.8		9.8	52.6	37.6		9.4	49.3	41.3		13.3	82.9	3.8	
PHF	.933	.819	.885	.872	.839	.932	.891	.919	.833	.926	.809	.900	.737	.838	.667	.895

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Tustin Avenue
E/W: 4th Street
Weather: Clear

File Name : 94_SNA_Tustin_4th St PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Tustin Street Southbound				Tustin Avenue Westbound				Tustin Street Northbound				Tustin Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	100	89	30	219	29	160	59	248	21	145	26	192	41	152	7	200	859
04:15 PM	98	96	23	217	23	222	101	346	19	156	40	215	71	155	21	247	1025
04:30 PM	87	74	34	195	14	69	115	198	14	140	30	184	43	118	10	171	748
04:45 PM	118	79	37	234	22	180	103	305	14	137	41	192	51	164	13	228	959
Total	403	338	124	865	88	631	378	1097	68	578	137	783	206	589	51	846	3591
05:00 PM	109	86	34	229	18	124	77	219	15	166	56	237	40	163	5	208	893
05:15 PM	105	89	35	229	23	139	93	255	12	137	46	195	42	149	6	197	876
05:30 PM	127	85	18	230	25	153	94	272	14	158	51	223	47	166	9	222	947
05:45 PM	92	70	27	189	26	154	83	263	7	145	58	210	42	115	6	163	825
Total	433	330	114	877	92	570	347	1009	48	606	211	865	171	593	26	790	3541
Grand Total	836	668	238	1742	180	1201	725	2106	116	1184	348	1648	377	1182	77	1636	7132
Apprch %	48	38.3	13.7		8.5	57	34.4		7	71.8	21.1		23	72.2	4.7		
Total %	11.7	9.4	3.3	24.4	2.5	16.8	10.2	29.5	1.6	16.6	4.9	23.1	5.3	16.6	1.1	22.9	


	Tustin Street Southbound				Tustin Avenue Westbound				Tustin Street Northbound				Tustin Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:45 PM																	
04:45 PM	118	79	**37**	**234**	22	**180**	**103**	**305**	14	137	41	192	**51**	164	**13**	**228**	**959**
05:00 PM	109	86	34	229	18	124	77	219	**15**	**166**	**56**	**237**	40	163	5	208	893
05:15 PM	105	**89**	35	229	23	139	93	255	12	137	46	195	42	149	6	197	876
05:30 PM	**127**	85	18	230	**25**	153	94	272	14	158	51	223	47	**166**	9	222	947
Total Volume	459	339	124	922	88	596	367	1051	55	598	194	847	180	642	33	855	3675
% App. Total	49.8	36.8	13.4		8.4	56.7	34.9		6.5	70.6	22.9		21.1	75.1	3.9		
PHF	.904	.952	.838	.985	.880	.828	.891	.861	.917	.901	.866	.893	.882	.967	.635	.938	.958

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Tustin Avenue
E/W: 4th Street
Weather: Clear

File Name : 94_SNA_Tustin_4th St PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

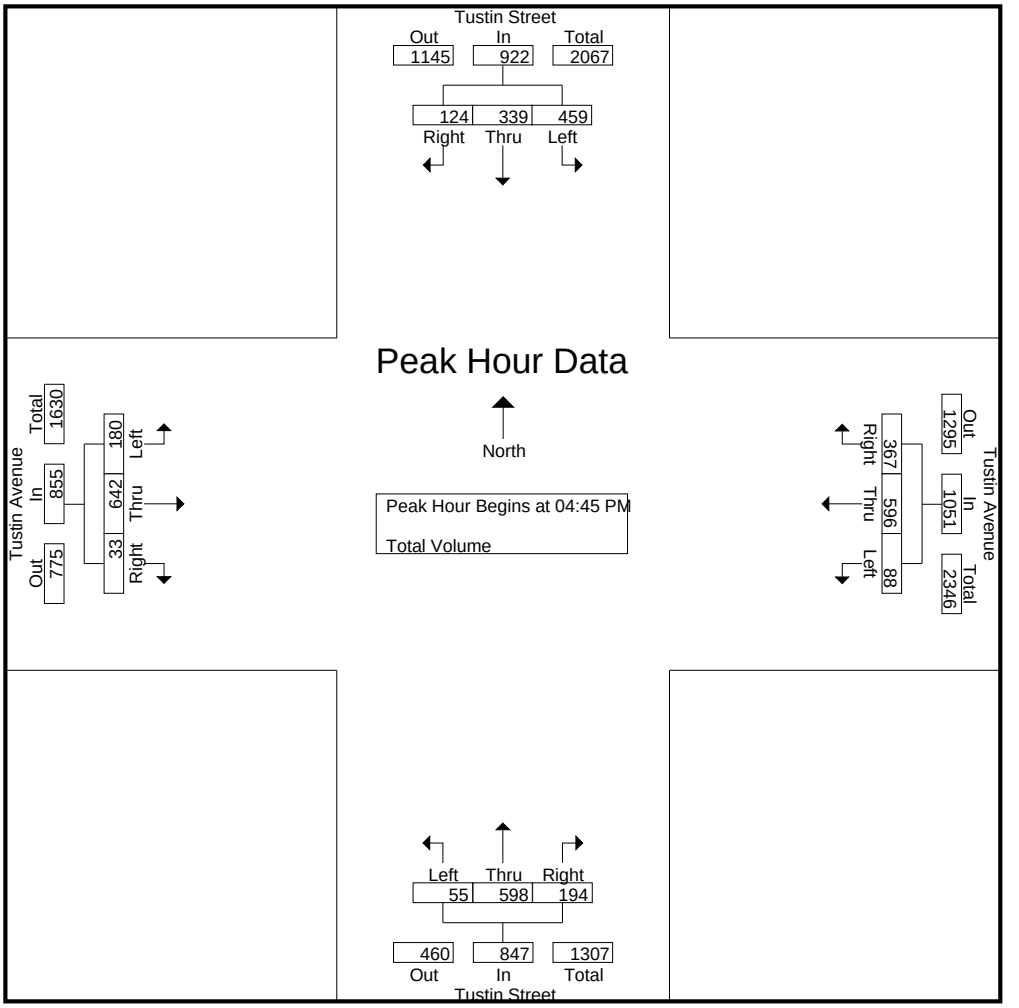

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	04:45 PM				04:00 PM				05:00 PM				04:45 PM			
+0 mins.	118	79	**37**	**234**	**29**	160	59	248	**15**	**166**	56	**237**	**51**	164	**13**	**228**
+15 mins.	109	86	34	229	23	**222**	101	**346**	12	137	46	195	40	163	5	208
+30 mins.	105	**89**	35	229	14	69	**115**	198	14	158	51	223	42	149	6	197
+45 mins.	**127**	85	18	230	22	180	103	305	7	145	**58**	210	47	**166**	9	222
Total Volume	459	339	124	922	88	631	378	1097	48	606	211	865	180	642	33	855
% App. Total	49.8	36.8	13.4		8	57.5	34.5		5.5	70.1	24.4		21.1	75.1	3.9	
PHF	.904	.952	.838	.985	.759	.711	.822	.793	.800	.913	.909	.912	.882	.967	.635	.938

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Auto Mall Dr/SR-55 Southbound Ramps
E/W: Edinger Avenue
Weather: Clear

File Name : 95_SNA_55S_Edinger AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Auto Mall Drive Southbound				Edinger Avenue Westbound				SR-55 Southbound Ramps Northbound				Edinger Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	7	0	4	11	56	126	14	196	109	24	117	250	7	261	81	349	806
07:15 AM	11	8	1	20	70	182	29	281	121	15	137	273	6	260	194	460	1034
07:30 AM	16	10	3	29	91	230	25	346	109	18	135	262	3	294	106	403	1040
07:45 AM	8	5	2	15	129	269	34	432	91	12	130	233	3	302	58	363	1043
Total	42	23	10	75	346	807	102	1255	430	69	519	1018	19	1117	439	1575	3923
08:00 AM	15	7	2	24	109	259	35	403	100	18	96	214	16	248	50	314	955
08:15 AM	23	6	2	31	93	269	32	394	86	15	90	191	4	244	62	310	926
08:30 AM	10	5	3	18	88	220	25	333	76	10	88	174	8	256	93	357	882
08:45 AM	19	12	7	38	95	226	29	350	78	23	100	201	6	225	73	304	893
Total	67	30	14	111	385	974	121	1480	340	66	374	780	34	973	278	1285	3656
Grand Total	109	53	24	186	731	1781	223	2735	770	135	893	1798	53	2090	717	2860	7579
Apprch %	58.6	28.5	12.9		26.7	65.1	8.2		42.8	7.5	49.7		1.9	73.1	25.1		
Total %	1.4	0.7	0.3	2.5	9.6	23.5	2.9	36.1	10.2	1.8	11.8	23.7	0.7	27.6	9.5	37.7	


	Auto Mall Drive Southbound				Edinger Avenue Westbound				SR-55 Southbound Ramps Northbound				Edinger Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:15 AM																	
07:15 AM	11	8	1	20	70	182	29	281	**121**	15	**137**	**273**	6	260	**194**	**460**	1034
07:30 AM	**16**	**10**	**3**	**29**	91	230	25	346	109	**18**	135	262	3	294	106	403	1040
07:45 AM	8	5	2	15	**129**	**269**	34	**432**	91	12	130	233	3	**302**	58	363	**1043**
08:00 AM	15	7	2	24	109	259	**35**	403	100	18	96	214	**16**	248	50	314	955
Total Volume	50	30	8	88	399	940	123	1462	421	63	498	982	28	1104	408	1540	4072
% App. Total	56.8	34.1	9.1		27.3	64.3	8.4		42.9	6.4	50.7		1.8	71.7	26.5		
PHF	.781	.750	.667	.759	.773	.874	.879	.846	.870	.875	.909	.899	.438	.914	.526	.837	.976

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Auto Mall Dr/SR-55 Southbound Ramps
E/W: Edinger Avenue
Weather: Clear

File Name : 95_SNA_55S_Edinger AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

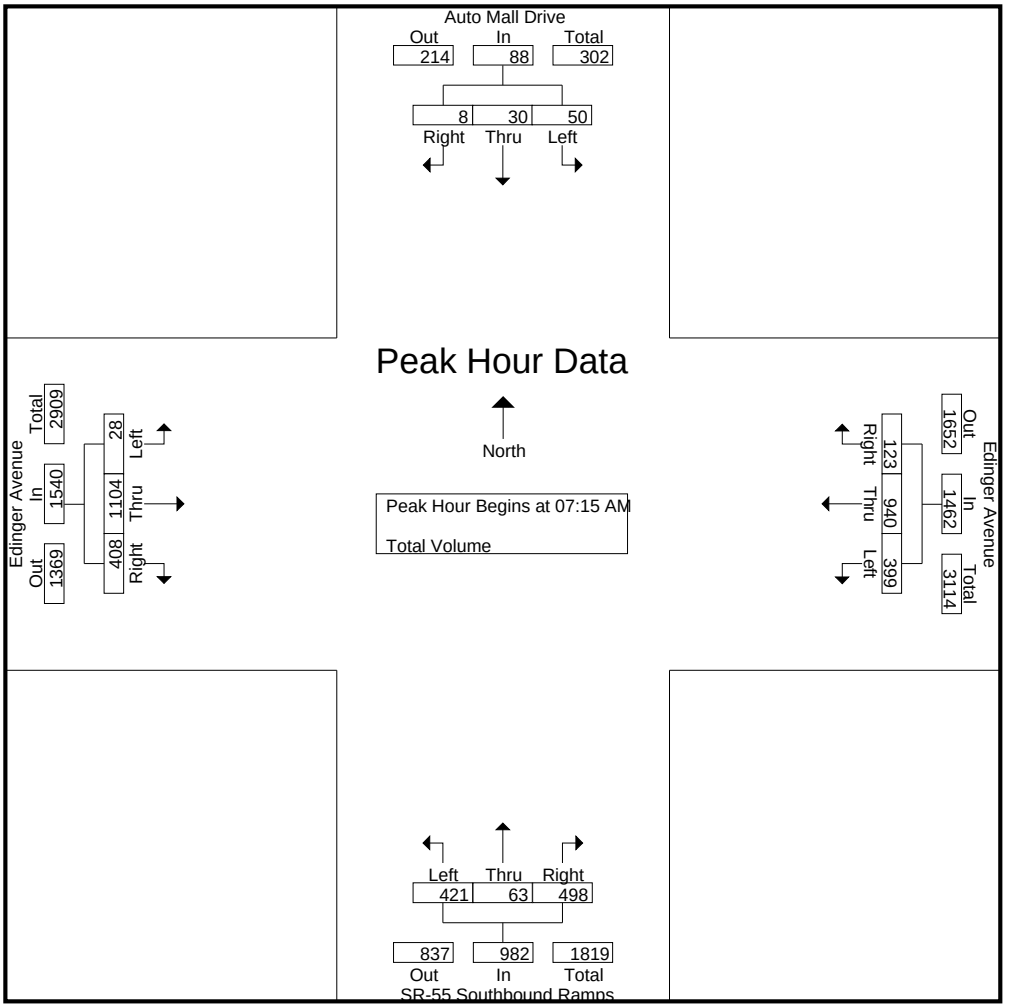

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	08:00 AM				07:30 AM				07:00 AM				07:00 AM			
+0 mins.	15	7	2	24	91	230	25	346	109	**24**	117	250	**7**	261	81	349
+15 mins.	**23**	6	2	31	**129**	**269**	34	**432**	**121**	15	**137**	**273**	6	260	**194**	**460**
+30 mins.	10	5	3	18	109	259	**35**	403	109	18	135	262	3	294	106	403
+45 mins.	19	**12**	**7**	**38**	93	269	32	394	91	12	130	233	3	**302**	58	363
Total Volume	67	30	14	111	422	1027	126	1575	430	69	519	1018	19	1117	439	1575
% App. Total	60.4	27	12.6		26.8	65.2	8		42.2	6.8	51		1.2	70.9	27.9	
PHF	.728	.625	.500	.730	.818	.954	.900	.911	.888	.719	.947	.932	.679	.925	.566	.856

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Auto Mall Dr/SR-55 Southbound Ramps
E/W: Edinger Avenue
Weather: Clear

File Name : 95_SNA_55S_Edinger PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Auto Mall Drive Southbound				Edinger Avenue Westbound				SR-55 Southbound Ramps Northbound				Edinger Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	24	15	8	47	82	265	29	376	76	7	64	147	7	290	78	375	945
04:15 PM	25	7	7	39	61	248	23	332	79	8	59	146	12	226	62	300	817
04:30 PM	14	11	6	31	85	233	22	340	97	11	72	180	7	251	80	338	889
04:45 PM	26	12	8	46	97	210	27	334	86	5	82	173	6	239	73	318	871
Total	89	45	29	163	325	956	101	1382	338	31	277	646	32	1006	293	1331	3522
05:00 PM	39	19	8	66	96	218	27	341	89	5	85	179	13	322	103	438	1024
05:15 PM	21	9	11	41	78	252	25	355	95	12	97	204	12	296	73	381	981
05:30 PM	24	10	10	44	114	323	41	478	107	8	134	249	4	401	105	510	1281
05:45 PM	14	8	5	27	34	110	12	156	49	5	67	121	4	121	43	168	472
Total	98	46	34	178	322	903	105	1330	340	30	383	753	33	1140	324	1497	3758
Grand Total	187	91	63	341	647	1859	206	2712	678	61	660	1399	65	2146	617	2828	7280
Apprch %	54.8	26.7	18.5		23.9	68.5	7.6		48.5	4.4	47.2		2.3	75.9	21.8		
Total %	2.6	1.2	0.9	4.7	8.9	25.5	2.8	37.3	9.3	0.8	9.1	19.2	0.9	29.5	8.5	38.8	


	Auto Mall Drive Southbound				Edinger Avenue Westbound				SR-55 Southbound Ramps Northbound				Edinger Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:45 PM																	
04:45 PM	26	12	8	46	97	210	27	334	86	5	82	173	6	239	73	318	871
05:00 PM	**39**	**19**	8	**66**	96	218	27	341	89	5	85	179	**13**	322	103	438	1024
05:15 PM	21	9	**11**	41	78	252	25	355	95	**12**	97	204	12	296	73	381	981
05:30 PM	24	10	10	44	**114**	**323**	**41**	**478**	**107**	8	**134**	**249**	4	**401**	**105**	**510**	**1281**
Total Volume	110	50	37	197	385	1003	120	1508	377	30	398	805	35	1258	354	1647	4157
% App. Total	55.8	25.4	18.8		25.5	66.5	8		46.8	3.7	49.4		2.1	76.4	21.5		
PHF	.705	.658	.841	.746	.844	.776	.732	.789	.881	.625	.743	.808	.673	.784	.843	.807	.811

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Auto Mall Dr/SR-55 Southbound Ramps
E/W: Edinger Avenue
Weather: Clear

File Name : 95_SNA_55S_Edinger PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

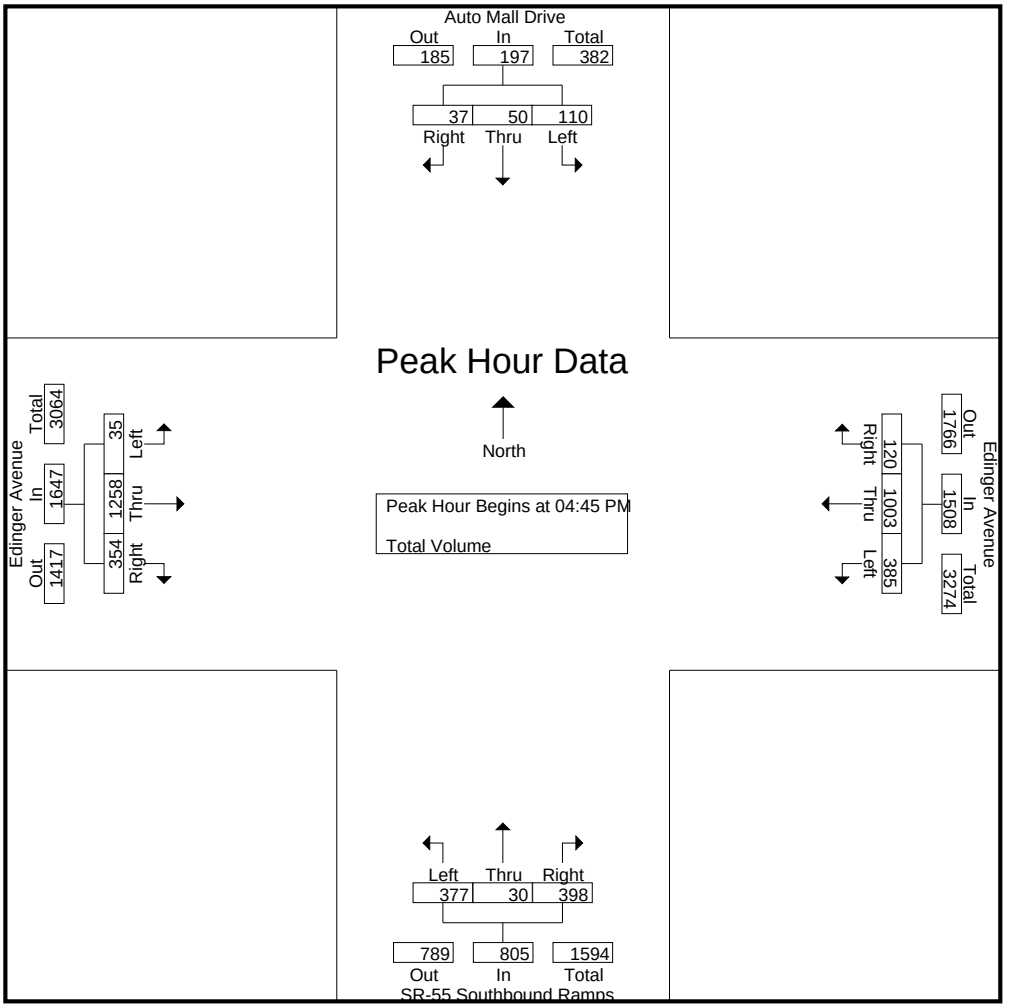

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	04:45 PM				04:45 PM				04:45 PM				04:45 PM			
+0 mins.	26	12	8	46	97	210	27	334	86	5	82	173	6	239	73	318
+15 mins.	**39**	**19**	8	**66**	96	218	27	341	89	5	85	179	**13**	322	103	438
+30 mins.	21	9	**11**	41	78	252	25	355	95	**12**	97	204	12	296	73	381
+45 mins.	24	10	10	44	**114**	**323**	**41**	**478**	**107**	8	**134**	**249**	4	**401**	**105**	**510**
Total Volume	110	50	37	197	385	1003	120	1508	377	30	398	805	35	1258	354	1647
% App. Total	55.8	25.4	18.8		25.5	66.5	8		46.8	3.7	49.4		2.1	76.4	21.5	
PHF	.705	.658	.841	.746	.844	.776	.732	.789	.881	.625	.743	.808	.673	.784	.843	.807

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Tustin
N/S: Newport Avenue
E/W: SR-55 NB Ramps/Del Amo Avenue
Weather: Clear

File Name : 96_TUS_Newport_55N AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Newport Avenue Southbound				Del Amo Avenue Westbound				Newport Avenue Northbound				SR-55 Northbound Ramps Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	5	63	114	182	4	35	1	40	49	19	3	71	20	8	10	38	331
07:15 AM	3	87	136	226	4	43	1	48	54	11	6	71	53	22	20	95	440
07:30 AM	3	100	143	246	2	48	3	53	56	14	2	72	52	35	30	117	488
07:45 AM	2	104	116	222	4	68	1	73	63	14	2	79	66	46	48	160	534
Total	13	354	509	876	14	194	6	214	222	58	13	293	191	111	108	410	1793
08:00 AM	2	73	114	189	0	46	0	46	50	16	6	72	77	29	35	141	448
08:15 AM	7	67	131	205	2	61	0	63	58	16	28	102	58	43	33	134	504
08:30 AM	8	49	103	160	3	34	1	38	57	20	13	90	48	47	33	128	416
08:45 AM	6	44	120	170	5	42	2	49	38	15	15	68	69	55	34	158	445
Total	23	233	468	724	10	183	3	196	203	67	62	332	252	174	135	561	1813
Grand Total	36	587	977	1600	24	377	9	410	425	125	75	625	443	285	243	971	3606
Apprch %	2.2	36.7	61.1		5.9	92	2.2		68	20	12		45.6	29.4	25		
Total %	1	16.3	27.1	44.4	0.7	10.5	0.2	11.4	11.8	3.5	2.1	17.3	12.3	7.9	6.7	26.9	


	Newport Avenue Southbound				Del Amo Avenue Westbound				Newport Avenue Northbound				SR-55 Northbound Ramps Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:30 AM																	
07:30 AM	3	100	**143**	**246**	2	48	**3**	53	56	14	2	72	52	35	30	117	488
07:45 AM	2	**104**	116	222	**4**	**68**	1	**73**	**63**	14	2	79	66	**46**	**48**	**160**	**534**
08:00 AM	2	73	114	189	0	46	0	46	50	**16**	6	72	**77**	29	35	141	448
08:15 AM	**7**	67	131	205	2	61	0	63	58	16	**28**	**102**	58	43	33	134	504
Total Volume	14	344	504	862	8	223	4	235	227	60	38	325	253	153	146	552	1974
% App. Total	1.6	39.9	58.5		3.4	94.9	1.7		69.8	18.5	11.7		45.8	27.7	26.4		
PHF	.500	.827	.881	.876	.500	.820	.333	.805	.901	.938	.339	.797	.821	.832	.760	.863	.924

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Tustin
N/S: Newport Avenue
E/W: SR-55 NB Ramps/Del Amo Avenue
Weather: Clear

File Name : 96_TUS_Newport_55N AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

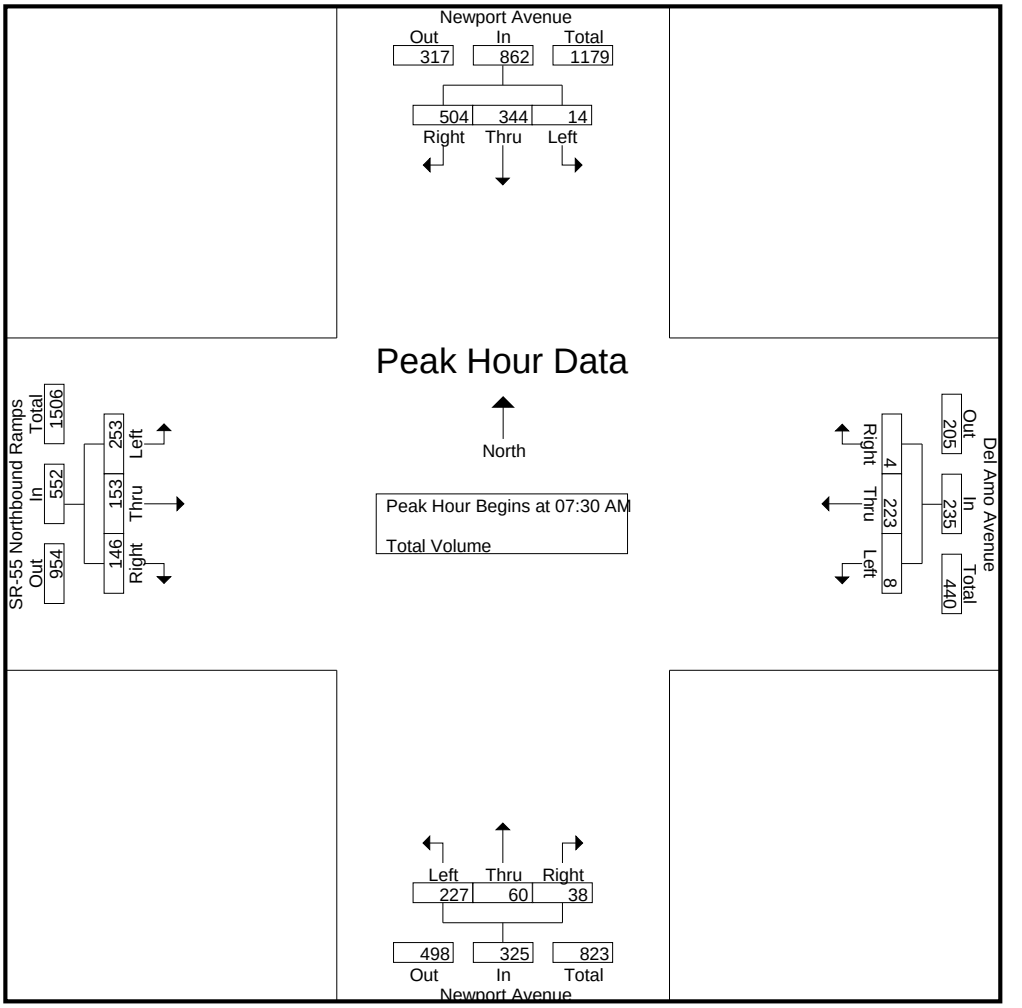

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	07:15 AM				07:30 AM				07:45 AM				07:45 AM			
+0 mins.	**3**	87	136	226	2	48	**3**	53	**63**	14	2	79	66	46	**48**	**160**
+15 mins.	3	100	**143**	**246**	**4**	**68**	1	**73**	50	16	6	72	**77**	29	35	141
+30 mins.	2	**104**	116	222	0	46	0	46	58	16	**28**	**102**	58	43	33	134
+45 mins.	2	73	114	189	2	61	0	63	57	**20**	13	90	48	**47**	33	128
Total Volume	10	364	509	883	8	223	4	235	228	66	49	343	249	165	149	563
% App. Total	1.1	41.2	57.6		3.4	94.9	1.7		66.5	19.2	14.3		44.2	29.3	26.5	
PHF	.833	.875	.890	.897	.500	.820	.333	.805	.905	.825	.438	.841	.808	.878	.776	.880

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Tustin
N/S: Newport Avenue
E/W: SR-55 NB Ramps/Del Amo Avenue
Weather: Clear

File Name : 96_TUS_Newport_55N PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Newport Avenue Southbound				Del Amo Avenue Westbound				Newport Avenue Northbound				SR-55 Northbound Ramps Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	1	25	86	112	10	121	2	133	130	58	12	200	28	8	7	43	488
04:15 PM	4	26	94	124	6	88	2	96	164	48	11	223	19	10	6	35	478
04:30 PM	0	27	92	119	4	88	3	95	151	51	6	208	26	3	7	36	458
04:45 PM	1	23	93	117	3	74	5	82	117	30	6	153	26	10	3	39	391
Total	6	101	365	472	23	371	12	406	562	187	35	784	99	31	23	153	1815
05:00 PM	3	21	94	118	10	98	6	114	151	45	11	207	33	13	5	51	490
05:15 PM	3	18	82	103	4	87	4	95	149	46	11	206	24	15	3	42	446
05:30 PM	0	14	71	85	4	90	2	96	147	45	8	200	15	17	2	34	415
05:45 PM	3	23	74	100	2	59	3	64	129	32	2	163	26	7	6	39	366
Total	9	76	321	406	20	334	15	369	576	168	32	776	98	52	16	166	1717
Grand Total	15	177	686	878	43	705	27	775	1138	355	67	1560	197	83	39	319	3532
Apprch %	1.7	20.2	78.1		5.5	91	3.5		72.9	22.8	4.3		61.8	26	12.2		
Total %	0.4	5	19.4	24.9	1.2	20	0.8	21.9	32.2	10.1	1.9	44.2	5.6	2.3	1.1	9	


	Newport Avenue Southbound				Del Amo Avenue Westbound				Newport Avenue Northbound				SR-55 Northbound Ramps Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:15 PM																	
04:15 PM	**4**	26	**94**	**124**	6	88	2	96	**164**	48	**11**	**223**	19	10	6	35	478
04:30 PM	0	**27**	92	119	4	88	3	95	151	**51**	6	208	26	3	**7**	36	458
04:45 PM	1	23	93	117	3	74	5	82	117	30	6	153	26	10	3	39	391
05:00 PM	3	21	94	118	**10**	**98**	**6**	**114**	151	45	11	207	**33**	**13**	5	**51**	**490**
Total Volume	8	97	373	478	23	348	16	387	583	174	34	791	104	36	21	161	1817
% App. Total	1.7	20.3	78		5.9	89.9	4.1		73.7	22	4.3		64.6	22.4	13		
PHF	.500	.898	.992	.964	.575	.888	.667	.849	.889	.853	.773	.887	.788	.692	.750	.789	.927

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Tustin
N/S: Newport Avenue
E/W: SR-55 NB Ramps/Del Amo Avenue
Weather: Clear

File Name : 96_TUS_Newport_55N PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

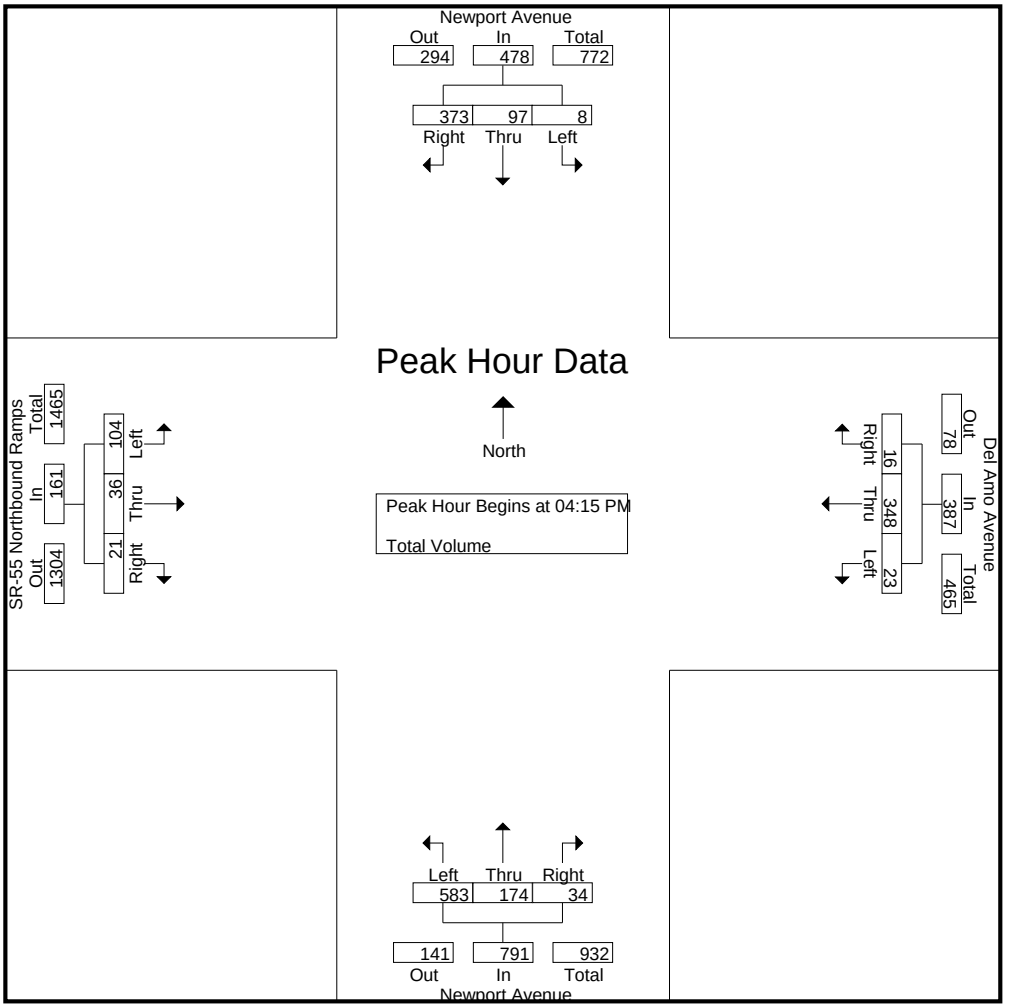

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	04:15 PM				04:00 PM				04:15 PM				04:30 PM			
+0 mins.	**4**	26	**94**	**124**	**10**	**121**	2	**133**	**164**	48	**11**	**223**	26	3	**7**	36
+15 mins.	0	**27**	92	119	6	88	2	96	151	**51**	6	208	26	10	3	39
+30 mins.	1	23	93	117	4	88	3	95	117	30	6	153	**33**	13	5	**51**
+45 mins.	3	21	94	118	3	74	**5**	82	151	45	11	207	24	**15**	3	42
Total Volume	8	97	373	478	23	371	12	406	583	174	34	791	109	41	18	168
% App. Total	1.7	20.3	78		5.7	91.4	3		73.7	22	4.3		64.9	24.4	10.7	
PHF	.500	.898	.992	.964	.575	.767	.600	.763	.889	.853	.773	.887	.826	.683	.643	.824

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Tustin
N/S: Red Hill Avenue
E/W: Edinger Avenue
Weather: Clear

File Name : 97_TUS_Red Hill_Edinger AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Red Hill Avenue Southbound				Edinger Avenue Westbound				Red Hill Avenue Northbound				Edinger Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	40	183	74	297	15	123	19	157	32	53	15	100	44	129	38	211	765
07:15 AM	53	201	87	341	37	182	28	247	40	87	18	145	52	149	28	229	962
07:30 AM	57	243	109	409	47	233	42	322	14	80	9	103	64	174	33	271	1105
07:45 AM	68	225	116	409	60	287	35	382	20	89	37	146	49	183	30	262	1199
Total	218	852	386	1456	159	825	124	1108	106	309	79	494	209	635	129	973	4031
08:00 AM	54	264	126	444	56	292	34	382	22	69	22	113	35	117	31	183	1122
08:15 AM	47	228	99	374	61	273	41	375	25	61	17	103	42	137	36	215	1067
08:30 AM	52	200	97	349	68	258	42	368	18	68	7	93	47	133	29	209	1019
08:45 AM	61	220	107	388	45	218	34	297	20	48	15	83	32	146	34	212	980
Total	214	912	429	1555	230	1041	151	1422	85	246	61	392	156	533	130	819	4188
Grand Total	432	1764	815	3011	389	1866	275	2530	191	555	140	886	365	1168	259	1792	8219
Apprch %	14.3	58.6	27.1		15.4	73.8	10.9		21.6	62.6	15.8		20.4	65.2	14.5		
Total %	5.3	21.5	9.9	36.6	4.7	22.7	3.3	30.8	2.3	6.8	1.7	10.8	4.4	14.2	3.2	21.8	


	Red Hill Avenue Southbound				Edinger Avenue Westbound				Red Hill Avenue Northbound				Edinger Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:30 AM																	
07:30 AM	57	243	109	409	47	233	**42**	322	14	80	9	103	**64**	174	33	**271**	1105
07:45 AM	**68**	225	116	409	60	287	35	**382**	20	**89**	**37**	**146**	49	**183**	30	262	**1199**
08:00 AM	54	**264**	**126**	**444**	56	**292**	34	382	22	69	22	113	35	117	31	183	1122
08:15 AM	47	228	99	374	**61**	273	41	375	**25**	61	17	103	42	137	**36**	215	1067
Total Volume	226	960	450	1636	224	1085	152	1461	81	299	85	465	190	611	130	931	4493
% App. Total	13.8	58.7	27.5		15.3	74.3	10.4		17.4	64.3	18.3		20.4	65.6	14		
PHF	.831	.909	.893	.921	.918	.929	.905	.956	.810	.840	.574	.796	.742	.835	.903	.859	.937

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Tustin
N/S: Red Hill Avenue
E/W: Edinger Avenue
Weather: Clear

File Name : 97_TUS_Red Hill_Edinger AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

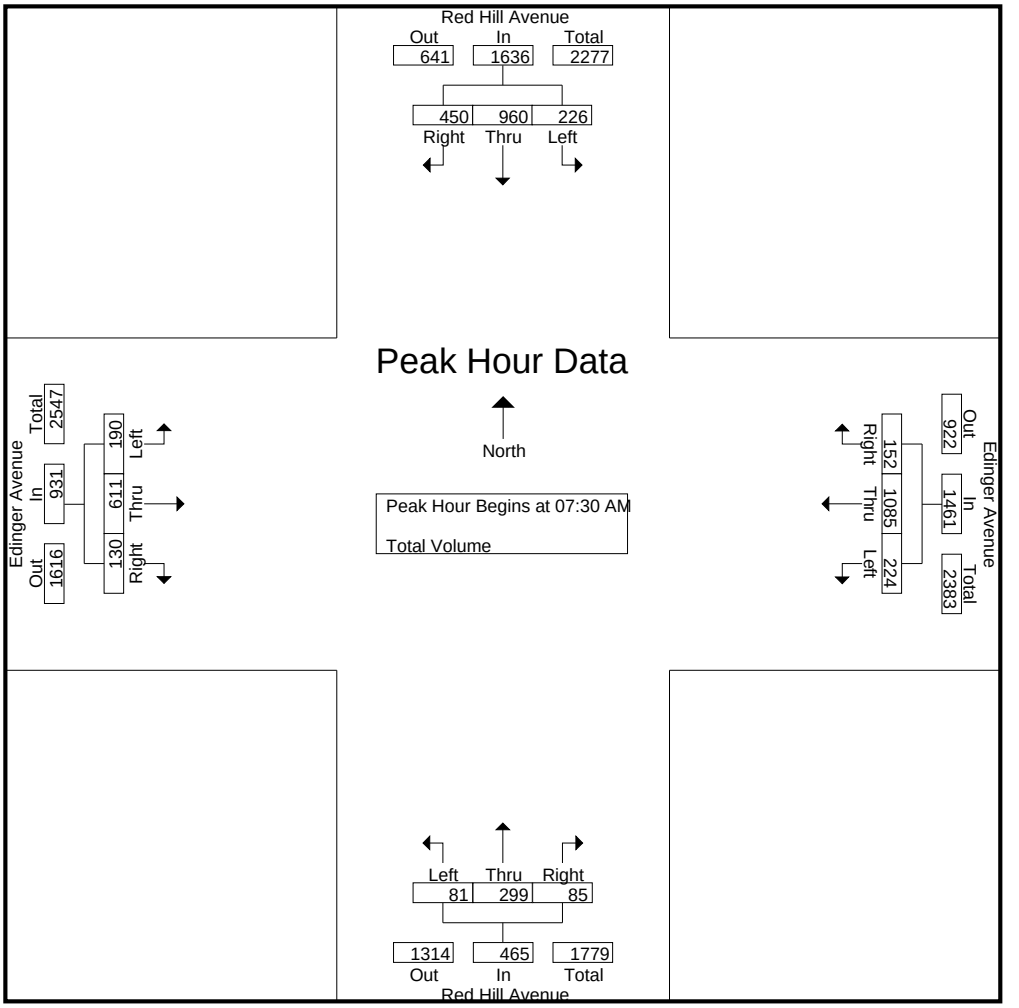

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	07:30 AM				07:45 AM				07:15 AM				07:00 AM			
+0 mins.	57	243	109	409	60	287	35	**382**	**40**	87	18	145	44	129	**38**	211
+15 mins.	**68**	225	116	409	56	**292**	34	382	14	80	9	103	52	149	28	229
+30 mins.	54	**264**	**126**	**444**	61	273	41	375	20	**89**	**37**	**146**	**64**	174	33	**271**
+45 mins.	47	228	99	374	**68**	258	**42**	368	22	69	22	113	49	**183**	30	262
Total Volume	226	960	450	1636	245	1110	152	1507	96	325	86	507	209	635	129	973
% App. Total	13.8	58.7	27.5		16.3	73.7	10.1		18.9	64.1	17		21.5	65.3	13.3	
PHF	.831	.909	.893	.921	.901	.950	.905	.986	.600	.913	.581	.868	.816	.867	.849	.898

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Tustin
N/S: Red Hill Avenue
E/W: Edinger Avenue
Weather: Clear

File Name : 97_TUS_Red Hill_Edinger PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Red Hill Avenue Southbound				Edinger Avenue Westbound				Red Hill Avenue Northbound				Edinger Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	36	69	60	165	13	210	108	331	31	237	42	310	67	153	30	250	1056
04:15 PM	28	73	55	156	17	231	105	353	34	260	41	335	66	145	26	237	1081
04:30 PM	36	72	50	158	14	219	95	328	37	282	34	353	70	145	25	240	1079
04:45 PM	39	76	58	173	15	172	85	272	48	251	46	345	80	147	26	253	1043
Total	139	290	223	652	59	832	393	1284	150	1030	163	1343	283	590	107	980	4259
05:00 PM	30	72	58	160	15	225	93	333	34	281	47	362	80	210	27	317	1172
05:15 PM	40	74	59	173	15	195	119	329	29	276	49	354	95	218	22	335	1191
05:30 PM	36	67	59	162	17	211	95	323	48	338	40	426	72	263	27	362	1273
05:45 PM	40	74	42	156	17	161	93	271	33	249	40	322	58	153	27	238	987
Total	146	287	218	651	64	792	400	1256	144	1144	176	1464	305	844	103	1252	4623
Grand Total	285	577	441	1303	123	1624	793	2540	294	2174	339	2807	588	1434	210	2232	8882
Apprch %	21.9	44.3	33.8		4.8	63.9	31.2		10.5	77.4	12.1		26.3	64.2	9.4		
Total %	3.2	6.5	5	14.7	1.4	18.3	8.9	28.6	3.3	24.5	3.8	31.6	6.6	16.1	2.4	25.1	


	Red Hill Avenue Southbound				Edinger Avenue Westbound				Red Hill Avenue Northbound				Edinger Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:45 PM																	
04:45 PM	39	**76**	58	**173**	15	172	85	272	**48**	251	46	345	80	147	26	253	1043
05:00 PM	30	72	58	160	15	**225**	93	**333**	34	281	47	362	80	210	**27**	317	1172
05:15 PM	**40**	74	**59**	173	15	195	**119**	329	29	276	**49**	354	**95**	218	22	335	1191
05:30 PM	36	67	59	162	**17**	211	95	323	48	**338**	40	**426**	72	**263**	27	**362**	**1273**
Total Volume	145	289	234	668	62	803	392	1257	159	1146	182	1487	327	838	102	1267	4679
% App. Total	21.7	43.3	35		4.9	63.9	31.2		10.7	77.1	12.2		25.8	66.1	8.1		
PHF	.906	.951	.992	.965	.912	.892	.824	.944	.828	.848	.929	.873	.861	.797	.944	.875	.919

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Tustin
N/S: Red Hill Avenue
E/W: Edinger Avenue
Weather: Clear

File Name : 97_TUS_Red Hill_Edinger PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

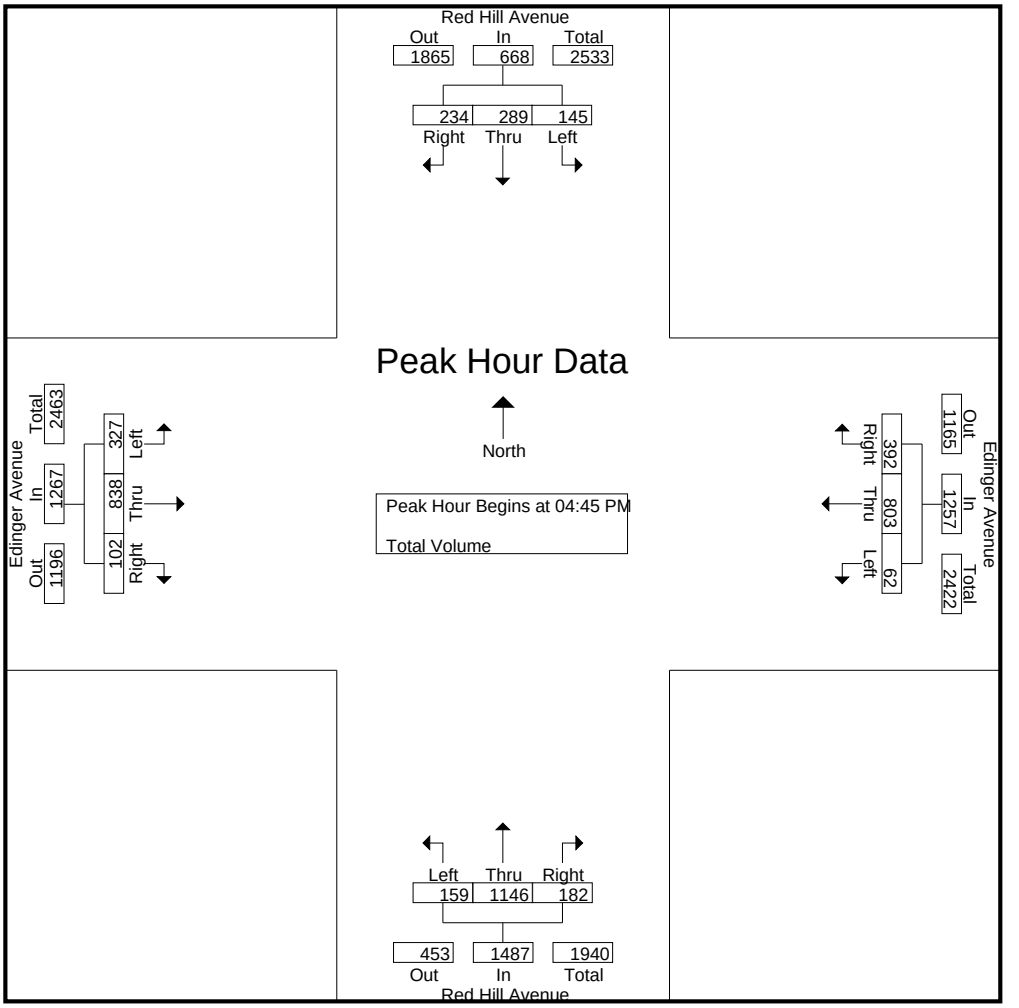

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	04:45 PM				04:15 PM				04:45 PM				04:45 PM			
+0 mins.	39	**76**	58	**173**	**17**	**231**	**105**	**353**	**48**	251	46	345	80	147	26	253
+15 mins.	30	72	58	160	14	219	95	328	34	281	47	362	80	210	**27**	317
+30 mins.	**40**	74	**59**	173	15	172	85	272	29	276	**49**	354	**95**	218	22	335
+45 mins.	36	67	59	162	15	225	93	333	48	**338**	40	**426**	72	**263**	27	**362**
Total Volume	145	289	234	668	61	847	378	1286	159	1146	182	1487	327	838	102	1267
% App. Total	21.7	43.3	35		4.7	65.9	29.4		10.7	77.1	12.2		25.8	66.1	8.1	
PHF	.906	.951	.992	.965	.897	.917	.900	.911	.828	.848	.929	.873	.861	.797	.944	.875

Attachment 8

Counts Unlimited, Inc.
PO Box 1178
Corona, CA 92878
(951)268-6268
counts@countsunlimited.com

City of Santa Ana
N/S: Red Hill Avenue
E/W: Warner Avenue
Weather: Clear

File Name : 98_TUS_Red Hill_Warner_AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Red Hill Avenue Southbound				Warner Avenue Westbound				Red Hill Avenue Northbound				Warner Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	3	183	31	217	11	41	6	58	24	181	8	213	41	44	38	123	611
07:15 AM	1	163	50	214	17	59	14	90	19	154	11	184	41	60	62	163	651
07:30 AM	3	231	41	275	22	75	12	109	16	94	10	120	49	70	69	188	692
07:45 AM	5	214	42	261	17	75	14	106	15	92	8	115	55	99	76	230	712
Total	12	791	164	967	67	250	46	363	74	521	37	632	186	273	245	704	2666
08:00 AM	4	255	43	302	25	92	19	136	17	89	10	116	47	72	61	180	734
08:15 AM	3	228	45	276	23	90	16	129	9	74	11	94	56	86	54	196	695
08:30 AM	7	194	49	250	33	92	13	138	15	84	17	116	44	86	62	192	696
08:45 AM	13	191	54	258	22	82	16	120	9	96	16	121	32	71	53	156	655
Total	27	868	191	1086	103	356	64	523	50	343	54	447	179	315	230	724	2780
Grand Total	39	1659	355	2053	170	606	110	886	124	864	91	1079	365	588	475	1428	5446
Apprch %	1.9	80.8	17.3		19.2	68.4	12.4		11.5	80.1	8.4		25.6	41.2	33.3		
Total %	0.7	30.5	6.5	37.7	3.1	11.1	2	16.3	2.3	15.9	1.7	19.8	6.7	10.8	8.7	26.2	


	Red Hill Avenue Southbound				Warner Avenue Westbound				Red Hill Avenue Northbound				Warner Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:45 AM																	
07:45 AM	5	214	42	261	17	75	14	106	15	**92**	8	115	55	**99**	**76**	**230**	712
08:00 AM	4	**255**	43	**302**	25	**92**	**19**	136	**17**	89	10	**116**	47	72	61	180	**734**
08:15 AM	3	228	45	276	23	90	16	129	9	74	11	94	**56**	86	54	196	695
08:30 AM	**7**	194	**49**	250	**33**	92	13	**138**	15	84	**17**	116	44	86	62	192	696
Total Volume	19	891	179	1089	98	349	62	509	56	339	46	441	202	343	253	798	2837
% App. Total	1.7	81.8	16.4		19.3	68.6	12.2		12.7	76.9	10.4		25.3	43	31.7		
PHF	.679	.874	.913	.901	.742	.948	.816	.922	.824	.921	.676	.950	.902	.866	.832	.867	.966

Attachment 8

Counts Unlimited, Inc.
PO Box 1178
Corona, CA 92878
(951)268-6268
counts@countsunlimited.com

City of Santa Ana
N/S: Red Hill Avenue
E/W: Warner Avenue
Weather: Clear

File Name : 98_TUS_Red Hill_Warner_AM
Site Code : 20220171
Start Date : 3/12/2020

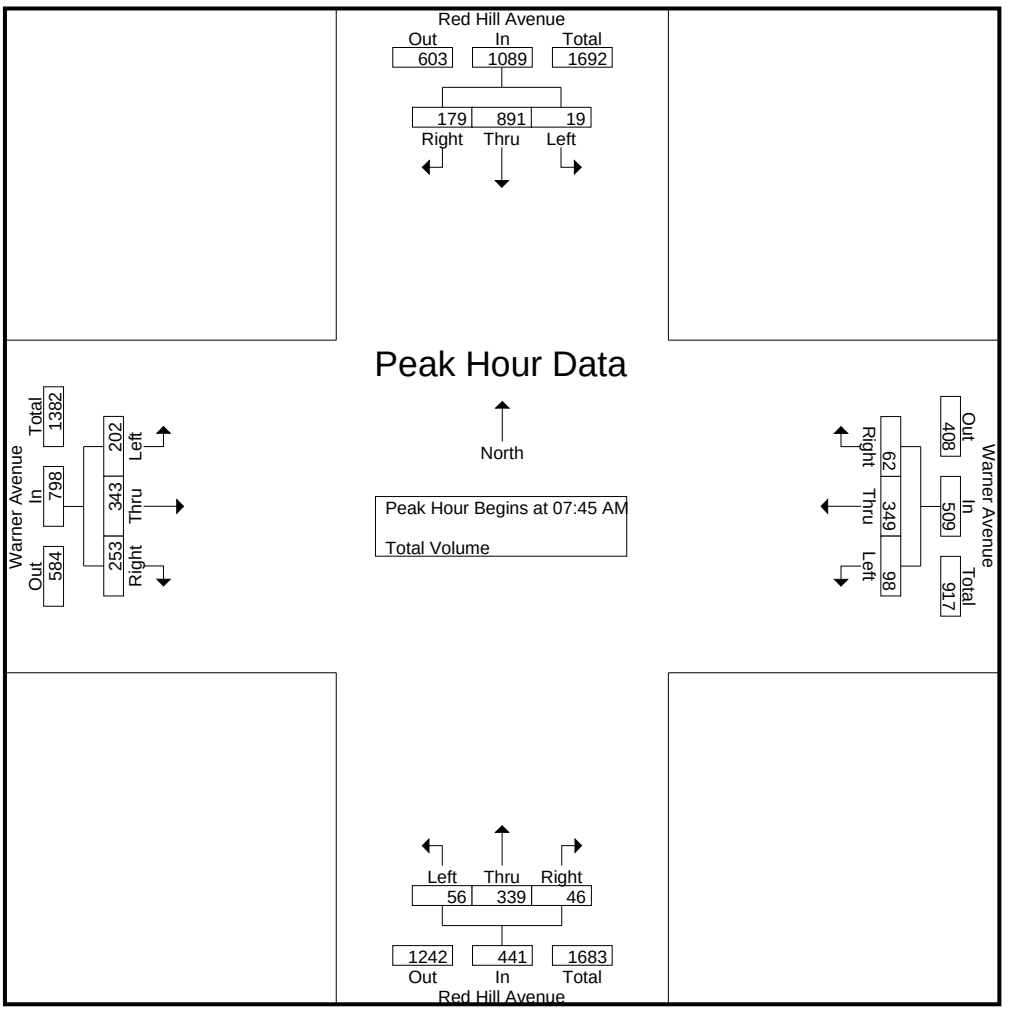

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	07:30 AM				08:00 AM				07:00 AM				07:45 AM			
+0 mins.	3	231	41	275	25	**92**	**19**	136	**24**	**181**	8	**213**	55	**99**	**76**	**230**
+15 mins.	**5**	214	42	261	23	90	16	129	19	154	**11**	184	47	72	61	180
+30 mins.	4	**255**	43	**302**	**33**	92	13	**138**	16	94	10	120	**56**	86	54	196
+45 mins.	3	228	**45**	276	22	82	16	120	15	92	8	115	44	86	62	192
Total Volume	15	928	171	1114	103	356	64	523	74	521	37	632	202	343	253	798
% App. Total	1.3	83.3	15.4		19.7	68.1	12.2		11.7	82.4	5.9		25.3	43	31.7	
PHF	.750	.910	.950	.922	.780	.967	.842	.947	.771	.720	.841	.742	.902	.866	.832	.867

Attachment 8

Counts Unlimited, Inc.
PO Box 1178
Corona, CA 92878
(951)268-6268
counts@countsunlimited.com

City of Santa Ana
N/S: Red Hill Avenue
E/W: Warner Avenue
Weather: Clear

File Name : 98_TUS_Red Hill_Warner_PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Red Hill Avenue Southbound				Warner Avenue Westbound				Red Hill Avenue Northbound				Warner Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	12	48	60	120	4	77	11	92	69	254	32	355	41	108	36	185	752
04:15 PM	14	48	80	142	8	123	13	144	76	273	31	380	52	94	35	181	847
04:30 PM	11	35	66	112	14	124	14	152	82	264	42	388	49	125	28	202	854
04:45 PM	15	39	74	128	10	133	13	156	93	325	24	442	56	128	18	202	928
Total	52	170	280	502	36	457	51	544	320	1116	129	1565	198	455	117	770	3381
05:00 PM	14	51	73	138	3	120	20	143	85	373	39	497	61	156	24	241	1019
05:15 PM	11	71	60	142	8	169	20	197	108	254	41	403	59	155	25	239	981
05:30 PM	18	62	76	156	4	103	16	123	96	356	46	498	46	164	27	237	1014
05:45 PM	11	55	73	139	6	121	20	147	87	257	53	397	55	151	21	227	910
Total	54	239	282	575	21	513	76	610	376	1240	179	1795	221	626	97	944	3924
Grand Total	106	409	562	1077	57	970	127	1154	696	2356	308	3360	419	1081	214	1714	7305
Apprch %	9.8	38	52.2		4.9	84.1	11		20.7	70.1	9.2		24.4	63.1	12.5		
Total %	1.5	5.6	7.7	14.7	0.8	13.3	1.7	15.8	9.5	32.3	4.2	46	5.7	14.8	2.9	23.5	


	Red Hill Avenue Southbound				Warner Avenue Westbound				Red Hill Avenue Northbound				Warner Avenue Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:45 PM																	
04:45 PM	15	39	74	128	**10**	133	13	156	93	325	24	442	56	128	18	202	928
05:00 PM	14	51	73	138	3	120	**20**	143	85	**373**	39	497	**61**	156	24	**241**	**1019**
05:15 PM	11	**71**	60	142	8	**169**	20	**197**	**108**	254	41	403	59	155	25	239	981
05:30 PM	**18**	62	**76**	**156**	4	103	16	123	96	356	**46**	**498**	46	**164**	**27**	237	1014
Total Volume	58	223	283	564	25	525	69	619	382	1308	150	1840	222	603	94	919	3942
% App. Total	10.3	39.5	50.2		4	84.8	11.1		20.8	71.1	8.2		24.2	65.6	10.2		
PHF	.806	.785	.931	.904	.625	.777	.863	.786	.884	.877	.815	.924	.910	.919	.870	.953	.967

Attachment 8

Counts Unlimited, Inc.
PO Box 1178
Corona, CA 92878
(951)268-6268
counts@countsunlimited.com

City of Santa Ana
N/S: Red Hill Avenue
E/W: Warner Avenue
Weather: Clear

File Name : 98_TUS_Red Hill_Warner_PM
Site Code : 20220171
Start Date : 3/12/2020

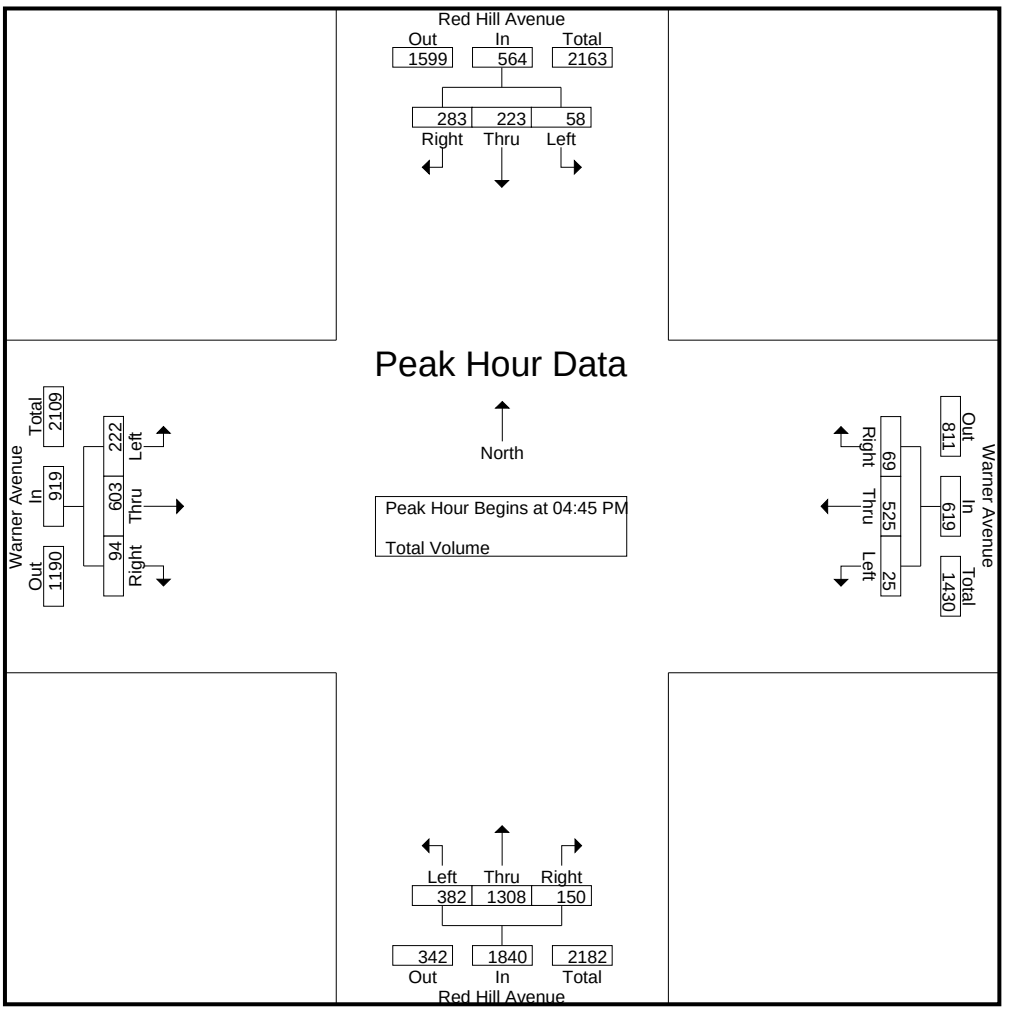

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	05:00 PM				04:30 PM				04:45 PM				05:00 PM			
+0 mins.	14	51	73	138	**14**	124	14	152	93	325	24	442	**61**	156	24	**241**
+15 mins.	11	**71**	60	142	10	133	13	156	85	**373**	39	497	59	155	25	239
+30 mins.	**18**	62	**76**	**156**	3	120	**20**	143	**108**	254	41	403	46	**164**	**27**	237
+45 mins.	11	55	73	139	8	**169**	20	**197**	96	356	**46**	**498**	55	151	21	227
Total Volume	54	239	282	575	35	546	67	648	382	1308	150	1840	221	626	97	944
% App. Total	9.4	41.6	49		5.4	84.3	10.3		20.8	71.1	8.2		23.4	66.3	10.3	
PHF	.750	.842	.928	.921	.625	.808	.838	.822	.884	.877	.815	.924	.906	.954	.898	.979

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Red Hill Avenue
E/W: Dyer Road/Barranca Parkway
Weather: Clear

File Name : 99_SNA_Red Hill_Barranca AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Red Hill Avenue Southbound				Barranca Parkway Westbound				Red Hill Avenue Northbound				Dyer Road Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	41	134	25	200	51	114	27	192	119	178	24	321	41	103	45	189	902
07:15 AM	50	127	22	199	90	136	21	247	100	153	24	277	37	154	90	281	1004
07:30 AM	37	206	30	273	105	141	25	271	48	85	27	160	23	182	52	257	961
07:45 AM	64	175	30	269	187	174	38	399	24	74	27	125	32	190	109	331	1124
Total	192	642	107	941	433	565	111	1109	291	490	102	883	133	629	296	1058	3991
08:00 AM	45	266	24	335	167	163	32	362	26	76	26	128	31	141	66	238	1063
08:15 AM	53	229	31	313	119	167	31	317	29	81	24	134	32	197	54	283	1047
08:30 AM	43	200	18	261	149	149	42	340	22	63	16	101	26	172	49	247	949
08:45 AM	46	187	27	260	148	146	37	331	25	77	16	118	25	149	90	264	973
Total	187	882	100	1169	583	625	142	1350	102	297	82	481	114	659	259	1032	4032
Grand Total	379	1524	207	2110	1016	1190	253	2459	393	787	184	1364	247	1288	555	2090	8023
Apprch %	18	72.2	9.8		41.3	48.4	10.3		28.8	57.7	13.5		11.8	61.6	26.6		
Total %	4.7	19	2.6	26.3	12.7	14.8	3.2	30.6	4.9	9.8	2.3	17	3.1	16.1	6.9	26.1	


	Red Hill Avenue Southbound				Barranca Parkway Westbound				Red Hill Avenue Northbound				Dyer Road Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:30 AM																	
07:30 AM	37	206	30	273	105	141	25	271	**48**	**85**	**27**	**160**	23	182	52	257	961
07:45 AM	**64**	175	30	269	**187**	**174**	**38**	**399**	24	74	27	125	**32**	190	**109**	**331**	**1124**
08:00 AM	45	**266**	24	**335**	167	163	32	362	26	76	26	128	31	141	66	238	1063
08:15 AM	53	229	**31**	313	119	167	31	317	29	81	24	134	32	**197**	54	283	1047
Total Volume	199	876	115	1190	578	645	126	1349	127	316	104	547	118	710	281	1109	4195
% App. Total	16.7	73.6	9.7		42.8	47.8	9.3		23.2	57.8	19		10.6	64	25.3		
PHF	.777	.823	.927	.888	.773	.927	.829	.845	.661	.929	.963	.855	.922	.901	.644	.838	.933

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Red Hill Avenue
E/W: Dyer Road/Barranca Parkway
Weather: Clear

File Name : 99_SNA_Red Hill_Barranca AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

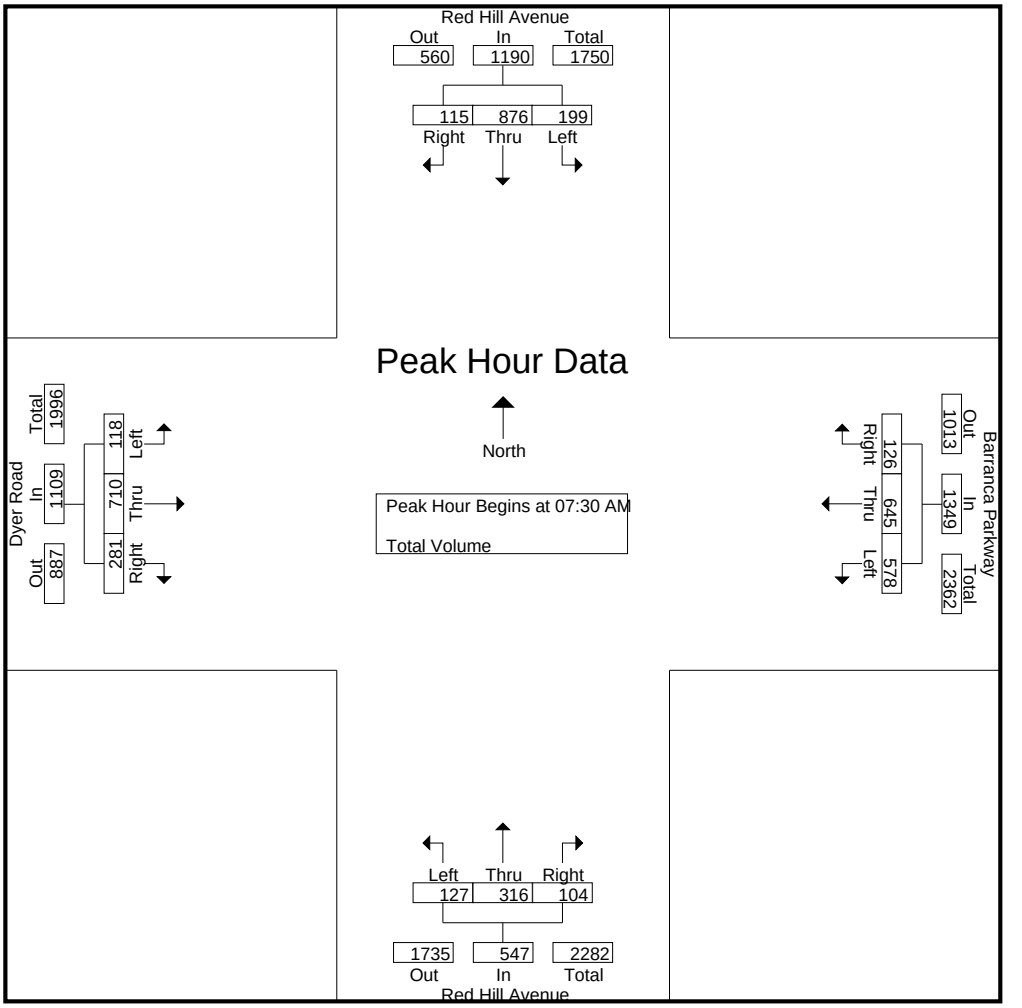

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	07:30 AM				07:45 AM				07:00 AM				07:30 AM			
+0 mins.	37	206	30	273	**187**	**174**	38	**399**	**119**	**178**	24	**321**	23	182	52	257
+15 mins.	**64**	175	30	269	167	163	32	362	100	153	24	277	**32**	190	**109**	**331**
+30 mins.	45	**266**	24	**335**	119	167	31	317	48	85	**27**	160	31	141	66	238
+45 mins.	53	229	**31**	313	149	149	**42**	340	24	74	27	125	32	**197**	54	283
Total Volume	199	876	115	1190	622	653	143	1418	291	490	102	883	118	710	281	1109
% App. Total	16.7	73.6	9.7		43.9	46.1	10.1		33	55.5	11.6		10.6	64	25.3	
PHF	.777	.823	.927	.888	.832	.938	.851	.888	.611	.688	.944	.688	.922	.901	.644	.838

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Red Hill Avenue
E/W: Dyer Road/Barranca Parkway
Weather: Clear

File Name : 99_SNA_Red Hill_Barranca PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume


	Red Hill Avenue Southbound				Barranca Parkway Westbound				Red Hill Avenue Northbound				Dyer Road Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	33	69	32	134	36	206	71	313	59	258	84	401	35	124	27	186	1034
04:15 PM	34	76	32	142	33	169	70	272	69	292	64	425	37	128	23	188	1027
04:30 PM	27	64	26	117	26	266	80	372	55	266	82	403	51	158	27	236	1128
04:45 PM	49	86	27	162	39	164	64	267	65	350	79	494	38	148	32	218	1141
Total	143	295	117	555	134	805	285	1224	248	1166	309	1723	161	558	109	828	4330
05:00 PM	42	93	45	180	19	273	87	379	102	393	81	576	38	182	20	240	1375
05:15 PM	53	68	38	159	35	212	65	312	91	323	99	513	49	191	18	258	1242
05:30 PM	39	83	32	154	39	216	68	323	78	354	91	523	62	187	32	281	1281
05:45 PM	51	69	32	152	34	265	62	361	85	269	74	428	54	193	29	276	1217
Total	185	313	147	645	127	966	282	1375	356	1339	345	2040	203	753	99	1055	5115
Grand Total	328	608	264	1200	261	1771	567	2599	604	2505	654	3763	364	1311	208	1883	9445
Apprch %	27.3	50.7	22		10	68.1	21.8		16.1	66.6	17.4		19.3	69.6	11		
Total %	3.5	6.4	2.8	12.7	2.8	18.8	6	27.5	6.4	26.5	6.9	39.8	3.9	13.9	2.2	19.9	

	Red Hill Avenue Southbound				Barranca Parkway Westbound				Red Hill Avenue Northbound				Dyer Road Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 05:00 PM																	
05:00 PM	42	**93**	**45**	**180**	19	**273**	**87**	**379**	**102**	**393**	81	**576**	38	182	20	240	**1375**
05:15 PM	**53**	68	38	159	35	212	65	312	91	323	**99**	513	49	191	18	258	1242
05:30 PM	39	83	32	154	**39**	216	68	323	78	354	91	523	**62**	187	**32**	**281**	1281
05:45 PM	51	69	32	152	34	265	62	361	85	269	74	428	54	**193**	29	276	1217
Total Volume	185	313	147	645	127	966	282	1375	356	1339	345	2040	203	753	99	1055	5115
% App. Total	28.7	48.5	22.8		9.2	70.3	20.5		17.5	65.6	16.9		19.2	71.4	9.4		
PHF	.873	.841	.817	.896	.814	.885	.810	.907	.873	.852	.871	.885	.819	.975	.773	.939	.930

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Santa Ana
N/S: Red Hill Avenue
E/W: Dyer Road/Barranca Parkway
Weather: Clear

File Name : 99_SNA_Red Hill_Barranca PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

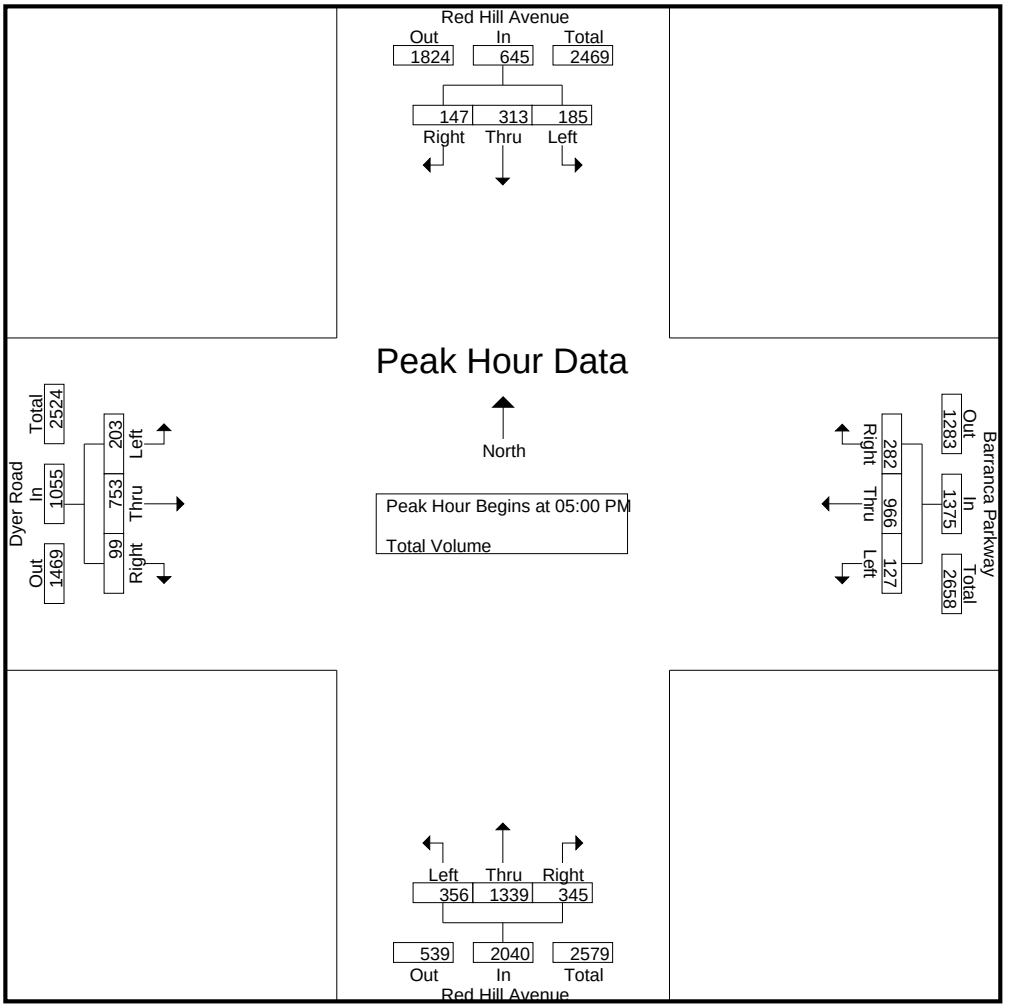

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	04:45 PM				05:00 PM				04:45 PM				05:00 PM			
+0 mins.	49	86	27	162	19	**273**	**87**	**379**	65	350	79	494	38	182	20	240
+15 mins.	42	**93**	**45**	**180**	35	212	65	312	**102**	**393**	81	**576**	49	191	18	258
+30 mins.	**53**	68	38	159	**39**	216	68	323	91	323	**99**	513	**62**	187	**32**	**281**
+45 mins.	39	83	32	154	34	265	62	361	78	354	91	523	54	**193**	29	276
Total Volume	183	330	142	655	127	966	282	1375	336	1420	350	2106	203	753	99	1055
% App. Total	27.9	50.4	21.7		9.2	70.3	20.5		16	67.4	16.6		19.2	71.4	9.4	
PHF	.863	.887	.789	.910	.814	.885	.810	.907	.824	.903	.884	.914	.819	.975	.773	.939

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Irvine
N/S: Red Hill Avenue
E/W: Alton Parkway
Weather: Clear

File Name : 100_IRV_Red Hill_Alton AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Red Hill Avenue Southbound				Alton Parkway Westbound				Red Hill Avenue Northbound				Alton Parkway Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	47	153	15	215	24	15	15	54	31	312	62	405	2	4	4	10	684
07:15 AM	39	189	19	247	31	25	15	71	39	288	76	403	2	8	2	12	733
07:30 AM	60	241	29	330	43	27	27	97	39	153	63	255	3	8	7	18	700
07:45 AM	58	314	41	413	48	46	24	118	46	149	93	288	2	5	8	15	834
Total	204	897	104	1205	146	113	81	340	155	902	294	1351	9	25	21	55	2951
08:00 AM	83	302	55	440	53	50	27	130	53	133	76	262	3	4	9	16	848
08:15 AM	52	242	44	338	61	46	33	140	34	115	78	227	2	7	5	14	719
08:30 AM	58	283	43	384	61	47	22	130	41	115	74	230	2	12	6	20	764
08:45 AM	43	281	48	372	71	47	20	138	26	109	80	215	3	11	5	19	744
Total	236	1108	190	1534	246	190	102	538	154	472	308	934	10	34	25	69	3075
Grand Total	440	2005	294	2739	392	303	183	878	309	1374	602	2285	19	59	46	124	6026
Apprch %	16.1	73.2	10.7		44.6	34.5	20.8		13.5	60.1	26.3		15.3	47.6	37.1		
Total %	7.3	33.3	4.9	45.5	6.5	5	3	14.6	5.1	22.8	10	37.9	0.3	1	0.8	2.1	


	Red Hill Avenue Southbound				Alton Parkway Westbound				Red Hill Avenue Northbound				Alton Parkway Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:45 AM																	
07:45 AM	58	**314**	41	413	48	46	24	118	46	**149**	**93**	**288**	2	5	8	15	834
08:00 AM	**83**	302	**55**	**440**	53	**50**	27	130	**53**	133	76	262	**3**	4	**9**	16	**848**
08:15 AM	52	242	44	338	**61**	46	**33**	**140**	34	115	78	227	2	7	5	14	719
08:30 AM	58	283	43	384	61	47	22	130	41	115	74	230	2	**12**	6	**20**	764
Total Volume	251	1141	183	1575	223	189	106	518	174	512	321	1007	9	28	28	65	3165
% App. Total	15.9	72.4	11.6		43.1	36.5	20.5		17.3	50.8	31.9		13.8	43.1	43.1		
PHF	.756	.908	.832	.895	.914	.945	.803	.925	.821	.859	.863	.874	.750	.583	.778	.813	.933

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Irvine
N/S: Red Hill Avenue
E/W: Alton Parkway
Weather: Clear

File Name : 100_IRV_Red Hill_Alton AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

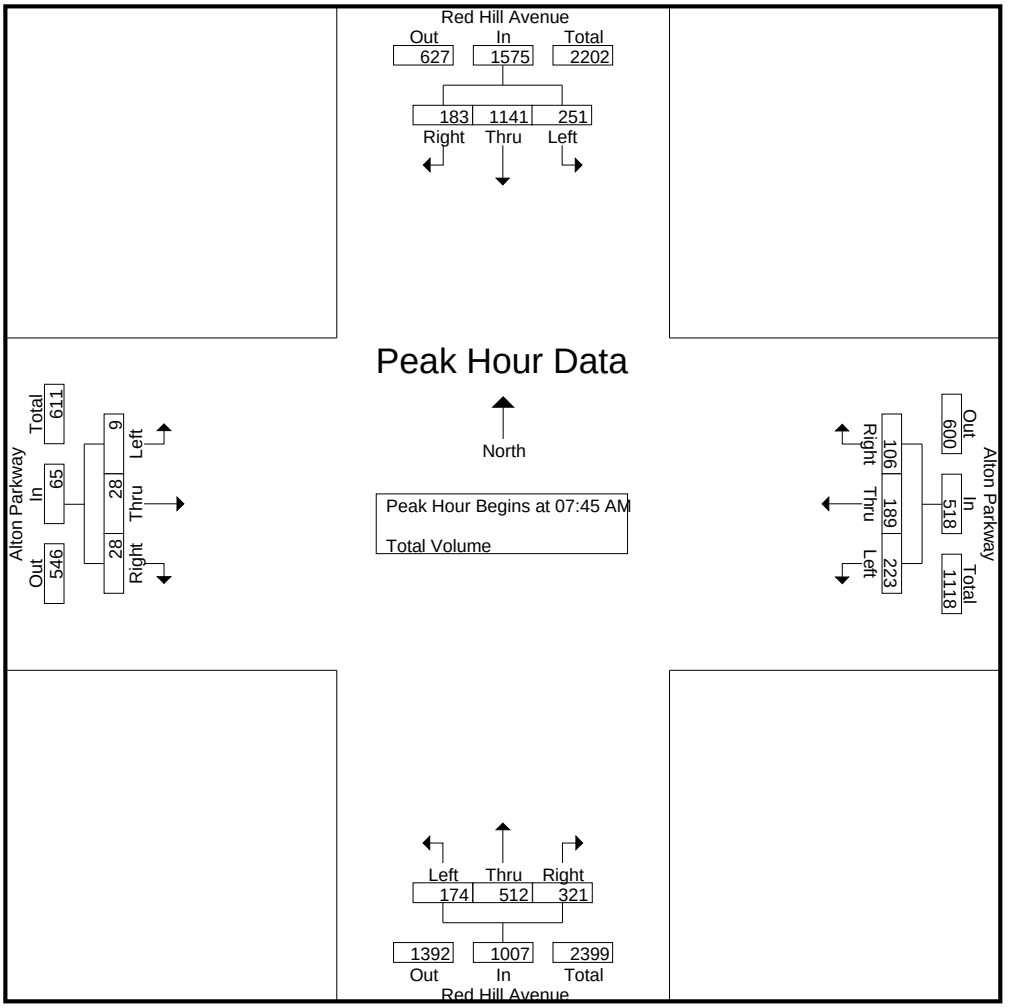

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	07:45 AM				08:00 AM				07:00 AM				08:00 AM			
+0 mins.	58	**314**	41	413	53	**50**	27	130	31	**312**	62	**405**	**3**	4	**9**	16
+15 mins.	**83**	302	**55**	**440**	61	46	**33**	**140**	39	288	76	403	2	7	5	14
+30 mins.	52	242	44	338	61	47	22	130	39	153	63	255	2	**12**	6	**20**
+45 mins.	58	283	43	384	**71**	47	20	138	**46**	149	**93**	288	3	11	5	19
Total Volume	251	1141	183	1575	246	190	102	538	155	902	294	1351	10	34	25	69
% App. Total	15.9	72.4	11.6		45.7	35.3	19		11.5	66.8	21.8		14.5	49.3	36.2	
PHF	.756	.908	.832	.895	.866	.950	.773	.961	.842	.723	.790	.834	.833	.708	.694	.863

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Irvine
N/S: Red Hill Avenue
E/W: Alton Parkway
Weather: Clear

File Name : 100_IRV_Red Hill_Alton PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Red Hill Avenue Southbound				Alton Parkway Westbound				Red Hill Avenue Northbound				Alton Parkway Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	23	132	1	156	99	18	64	181	6	282	42	330	21	41	36	98	765
04:15 PM	34	117	5	156	72	18	40	130	7	331	44	382	19	42	41	102	770
04:30 PM	31	128	1	160	128	21	60	209	5	367	61	433	25	68	34	127	929
04:45 PM	30	138	0	168	81	22	58	161	6	358	40	404	28	73	36	137	870
Total	118	515	7	640	380	79	222	681	24	1338	187	1549	93	224	147	464	3334
05:00 PM	36	131	0	167	139	19	97	255	4	345	63	412	46	105	50	201	1035
05:15 PM	27	131	3	161	85	12	52	149	12	429	53	494	33	78	46	157	961
05:30 PM	29	123	0	152	110	20	66	196	4	406	47	457	19	60	33	112	917
05:45 PM	36	114	2	152	88	24	55	167	4	316	73	393	25	55	28	108	820
Total	128	499	5	632	422	75	270	767	24	1496	236	1756	123	298	157	578	3733
Grand Total	246	1014	12	1272	802	154	492	1448	48	2834	423	3305	216	522	304	1042	7067
Apprch %	19.3	79.7	0.9		55.4	10.6	34		1.5	85.7	12.8		20.7	50.1	29.2		
Total %	3.5	14.3	0.2	18	11.3	2.2	7	20.5	0.7	40.1	6	46.8	3.1	7.4	4.3	14.7	


	Red Hill Avenue Southbound				Alton Parkway Westbound				Red Hill Avenue Northbound				Alton Parkway Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:30 PM																	
04:30 PM	31	128	1	160	128	21	60	209	5	367	61	433	25	68	34	127	929
04:45 PM	30	**138**	0	**168**	81	**22**	58	161	6	358	40	404	28	73	36	137	870
05:00 PM	**36**	131	0	167	**139**	19	**97**	**255**	4	345	**63**	412	**46**	**105**	**50**	**201**	**1035**
05:15 PM	27	131	**3**	161	85	12	52	149	**12**	**429**	53	**494**	33	78	46	157	961
Total Volume	124	528	4	656	433	74	267	774	27	1499	217	1743	132	324	166	622	3795
% App. Total	18.9	80.5	0.6		55.9	9.6	34.5		1.5	86	12.4		21.2	52.1	26.7		
PHF	.861	.957	.333	.976	.779	.841	.688	.759	.563	.874	.861	.882	.717	.771	.830	.774	.917

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Irvine
N/S: Red Hill Avenue
E/W: Alton Parkway
Weather: Clear

File Name : 100_IRV_Red Hill_Alton PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

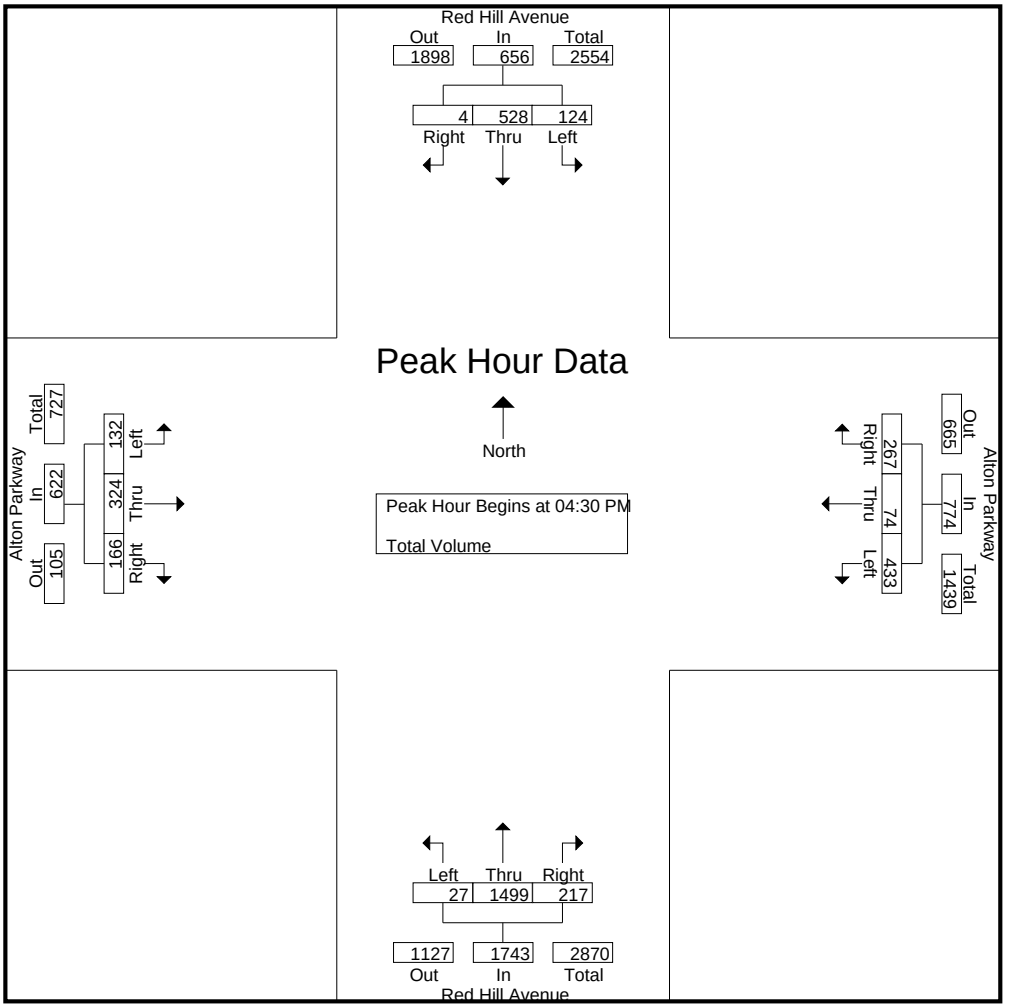

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	04:30 PM				04:30 PM				04:45 PM				04:30 PM			
+0 mins.	31	128	1	160	128	21	60	209	6	358	40	404	25	68	34	127
+15 mins.	30	**138**	0	**168**	81	**22**	58	161	4	345	**63**	412	28	73	36	137
+30 mins.	**36**	131	0	167	**139**	19	**97**	**255**	**12**	**429**	53	**494**	**46**	**105**	**50**	**201**
+45 mins.	27	131	**3**	161	85	12	52	149	4	406	47	457	33	78	46	157
Total Volume	124	528	4	656	433	74	267	774	26	1538	203	1767	132	324	166	622
% App. Total	18.9	80.5	0.6		55.9	9.6	34.5		1.5	87	11.5		21.2	52.1	26.7	
PHF	.861	.957	.333	.976	.779	.841	.688	.759	.542	.896	.806	.894	.717	.771	.830	.774

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Irvine
N/S: Red Hill Avenue
E/W: MacArthur Boulevard
Weather: Clear

File Name : 101_IRV_Red Hill_MacArthur AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume


	Red Hill Avenue Southbound				MacArthur Boulevard Westbound				Red Hill Avenue Northbound				MacArthur Boulevard Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	21	60	62	143	14	69	251	334	10	89	3	102	350	142	15	507	1086
07:15 AM	40	90	68	198	7	77	228	312	28	137	1	166	271	147	19	437	1113
07:30 AM	58	117	84	259	11	77	172	260	21	122	1	144	295	151	13	459	1122
07:45 AM	37	129	117	283	6	57	187	250	17	156	3	176	331	150	32	513	1222
Total	156	396	331	883	38	280	838	1156	76	504	8	588	1247	590	79	1916	4543
08:00 AM	67	158	119	344	4	52	140	196	14	174	2	190	299	159	22	480	1210
08:15 AM	51	118	127	296	7	59	109	175	16	145	2	163	300	173	22	495	1129
08:30 AM	53	132	129	314	6	55	135	196	17	94	3	114	318	163	30	511	1135
08:45 AM	67	132	133	332	3	88	102	193	16	101	3	120	282	150	24	456	1101
Total	238	540	508	1286	20	254	486	760	63	514	10	587	1199	645	98	1942	4575
Grand Total	394	936	839	2169	58	534	1324	1916	139	1018	18	1175	2446	1235	177	3858	9118
Apprch %	18.2	43.2	38.7		3	27.9	69.1		11.8	86.6	1.5		63.4	32	4.6		
Total %	4.3	10.3	9.2	23.8	0.6	5.9	14.5	21	1.5	11.2	0.2	12.9	26.8	13.5	1.9	42.3	

	Red Hill Avenue Southbound				MacArthur Boulevard Westbound				Red Hill Avenue Northbound				MacArthur Boulevard Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:45 AM																	
07:45 AM	37	129	117	283	6	57	**187**	**250**	**17**	156	**3**	176	**331**	150	**32**	**513**	**1222**
08:00 AM	**67**	**158**	119	**344**	4	52	140	196	14	**174**	2	**190**	299	159	22	480	1210
08:15 AM	51	118	127	296	**7**	**59**	109	175	16	145	2	163	300	**173**	22	495	1129
08:30 AM	53	132	**129**	314	6	55	135	196	17	94	3	114	318	163	30	511	1135
Total Volume	208	537	492	1237	23	223	571	817	64	569	10	643	1248	645	106	1999	4696
% App. Total	16.8	43.4	39.8		2.8	27.3	69.9		10	88.5	1.6		62.4	32.3	5.3		
PHF	.776	.850	.953	.899	.821	.945	.763	.817	.941	.818	.833	.846	.943	.932	.828	.974	.961

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Irvine
N/S: Red Hill Avenue
E/W: MacArthur Boulevard
Weather: Clear

File Name : 101_IRV_Red Hill_MacArthur AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

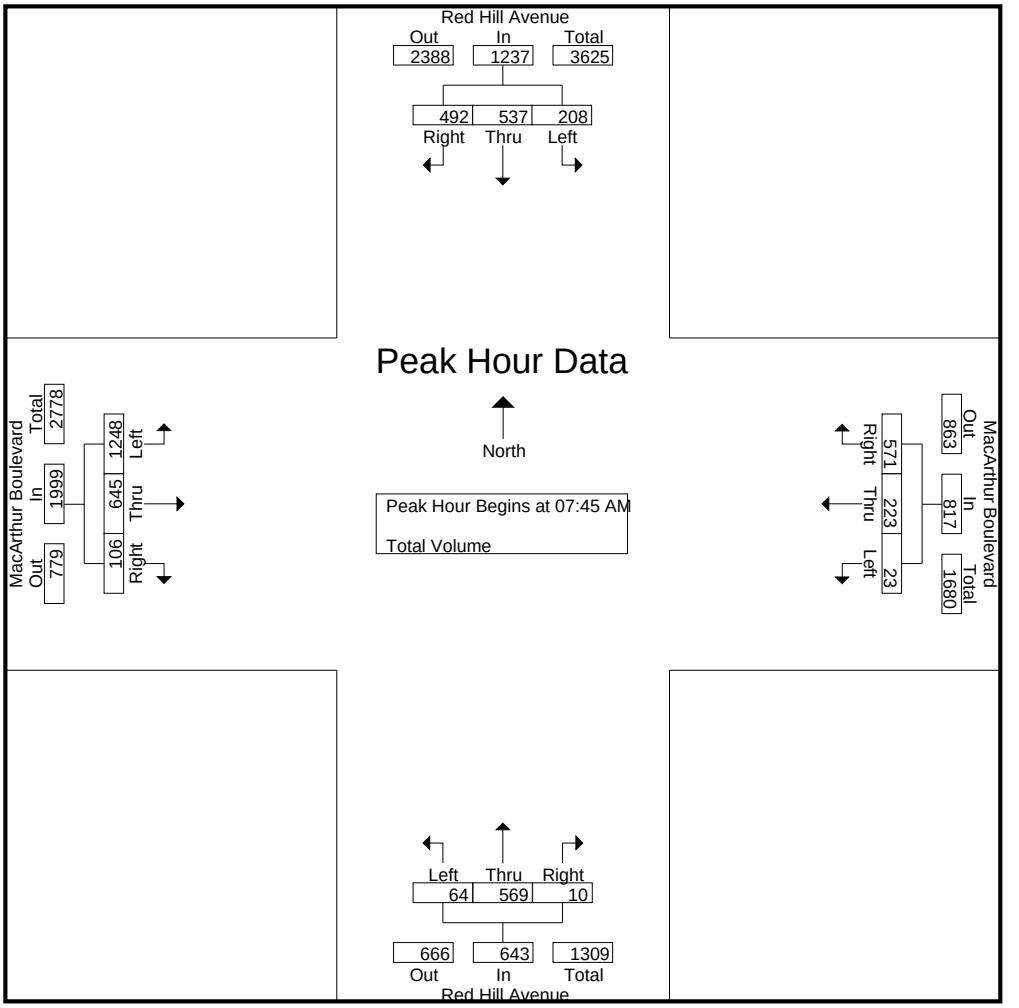

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	08:00 AM				07:00 AM				07:15 AM				07:45 AM			
+0 mins.	**67**	**158**	119	**344**	**14**	69	**251**	**334**	**28**	137	1	166	**331**	150	**32**	**513**
+15 mins.	51	118	127	296	7	**77**	228	312	21	122	1	144	299	159	22	480
+30 mins.	53	132	129	314	11	77	172	260	17	156	**3**	176	300	**173**	22	495
+45 mins.	67	132	**133**	332	6	57	187	250	14	**174**	2	**190**	318	163	30	511
Total Volume	238	540	508	1286	38	280	838	1156	80	589	7	676	1248	645	106	1999
% App. Total	18.5	42	39.5		3.3	24.2	72.5		11.8	87.1	1		62.4	32.3	5.3	
PHF	.888	.854	.955	.935	.679	.909	.835	.865	.714	.846	.583	.889	.943	.932	.828	.974

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Irvine
N/S: Red Hill Avenue
E/W: MacArthur Boulevard
Weather: Clear

File Name : 101_IRV_Red Hill_MacArthur PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Red Hill Avenue Southbound				MacArthur Boulevard Westbound				Red Hill Avenue Northbound				MacArthur Boulevard Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	49	122	331	502	9	173	97	279	40	184	1	225	129	60	7	196	1202
04:15 PM	68	104	232	404	10	163	90	263	21	168	2	191	124	50	11	185	1043
04:30 PM	57	138	345	540	7	186	101	294	24	172	1	197	153	74	11	238	1269
04:45 PM	72	145	241	458	8	166	116	290	30	190	4	224	139	67	7	213	1185
Total	246	509	1149	1904	34	688	404	1126	115	714	8	837	545	251	36	832	4699
05:00 PM	69	166	308	543	14	231	153	398	34	208	1	243	135	76	13	224	1408
05:15 PM	78	146	254	478	11	248	163	422	27	221	2	250	117	65	12	194	1344
05:30 PM	67	137	239	443	6	173	142	321	34	190	3	227	206	67	10	283	1274
05:45 PM	39	106	193	338	4	216	118	338	22	160	4	186	181	74	10	265	1127
Total	253	555	994	1802	35	868	576	1479	117	779	10	906	639	282	45	966	5153
Grand Total	499	1064	2143	3706	69	1556	980	2605	232	1493	18	1743	1184	533	81	1798	9852
Apprch %	13.5	28.7	57.8		2.6	59.7	37.6		13.3	85.7	1		65.9	29.6	4.5		
Total %	5.1	10.8	21.8	37.6	0.7	15.8	9.9	26.4	2.4	15.2	0.2	17.7	12	5.4	0.8	18.3	


	Red Hill Avenue Southbound				MacArthur Boulevard Westbound				Red Hill Avenue Northbound				MacArthur Boulevard Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:45 PM																	
04:45 PM	72	145	241	458	8	166	116	290	30	190	**4**	224	139	67	7	213	1185
05:00 PM	69	**166**	**308**	**543**	**14**	231	153	398	**34**	208	1	243	135	**76**	**13**	224	**1408**
05:15 PM	**78**	146	254	478	11	**248**	**163**	**422**	27	**221**	2	**250**	117	65	12	194	1344
05:30 PM	67	137	239	443	6	173	142	321	34	190	3	227	**206**	67	10	**283**	1274
Total Volume	286	594	1042	1922	39	818	574	1431	125	809	10	944	597	275	42	914	5211
% App. Total	14.9	30.9	54.2		2.7	57.2	40.1		13.2	85.7	1.1		65.3	30.1	4.6		
PHF	.917	.895	.846	.885	.696	.825	.880	.848	.919	.915	.625	.944	.725	.905	.808	.807	.925

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Irvine
N/S: Red Hill Avenue
E/W: MacArthur Boulevard
Weather: Clear

File Name : 101_IRV_Red Hill_MacArthur PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

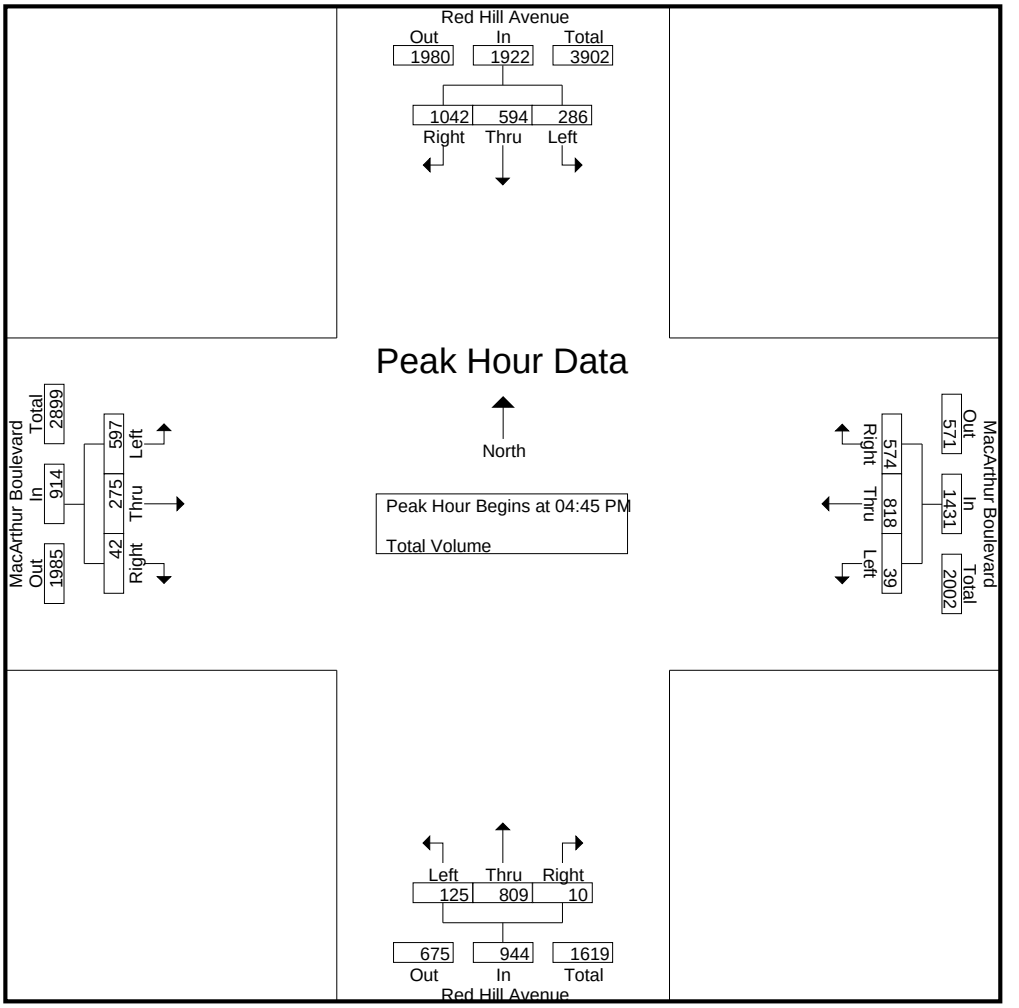

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	04:30 PM				05:00 PM				04:45 PM				05:00 PM			
+0 mins.	57	138	**345**	540	**14**	231	153	398	30	190	**4**	224	135	**76**	**13**	224
+15 mins.	72	145	241	458	11	**248**	**163**	**422**	**34**	208	1	243	117	65	12	194
+30 mins.	69	**166**	308	**543**	6	173	142	321	27	**221**	2	**250**	**206**	67	10	**283**
+45 mins.	**78**	146	254	478	4	216	118	338	34	190	3	227	181	74	10	265
Total Volume	276	595	1148	2019	35	868	576	1479	125	809	10	944	639	282	45	966
% App. Total	13.7	29.5	56.9		2.4	58.7	38.9		13.2	85.7	1.1		66.1	29.2	4.7	
PHF	.885	.896	.832	.930	.625	.875	.883	.876	.919	.915	.625	.944	.775	.928	.865	.853

Attachment 8

Counts Unlimited, Inc.
PO Box 1178
Corona, CA 92878
(951)268-6268
counts@countsunlimited.com

City of Irvine
N/S: Red Hill Avenue
E/W: Main Street
Weather: Clear

File Name : 102_IRV_Red Hill_Main_AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Red Hill Avenue Southbound				Main Street Westbound				Red Hill Avenue Northbound				Main Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	15	44	4	63	18	51	12	81	12	73	46	131	13	157	38	208	483
07:15 AM	11	40	12	63	26	54	19	99	25	113	55	193	25	234	51	310	665
07:30 AM	10	53	20	83	30	60	15	105	30	140	80	250	20	325	53	398	836
07:45 AM	19	76	26	121	41	67	20	128	35	151	82	268	30	374	76	480	997
Total	55	213	62	330	115	232	66	413	102	477	263	842	88	1090	218	1396	2981
08:00 AM	16	86	25	127	37	79	24	140	37	166	97	300	49	358	56	463	1030
08:15 AM	13	71	32	116	48	74	16	138	49	120	92	261	27	306	67	400	915
08:30 AM	19	80	25	124	28	89	13	130	41	119	90	250	33	271	55	359	863
08:45 AM	14	75	37	126	29	77	14	120	38	134	82	254	27	255	61	343	843
Total	62	312	119	493	142	319	67	528	165	539	361	1065	136	1190	239	1565	3651
Grand Total	117	525	181	823	257	551	133	941	267	1016	624	1907	224	2280	457	2961	6632
Apprch %	14.2	63.8	22		27.3	58.6	14.1		14	53.3	32.7		7.6	77	15.4		
Total %	1.8	7.9	2.7	12.4	3.9	8.3	2	14.2	4	15.3	9.4	28.8	3.4	34.4	6.9	44.6	


	Red Hill Avenue Southbound				Main Street Westbound				Red Hill Avenue Northbound				Main Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:45 AM																	
07:45 AM	**19**	76	26	121	41	67	20	128	35	151	82	268	30	**374**	**76**	**480**	997
08:00 AM	16	**86**	25	**127**	37	79	**24**	**140**	37	**166**	**97**	**300**	**49**	358	56	463	**1030**
08:15 AM	13	71	**32**	116	**48**	74	16	138	**49**	120	92	261	27	306	67	400	915
08:30 AM	19	80	25	124	28	**89**	13	130	41	119	90	250	33	271	55	359	863
Total Volume	67	313	108	488	154	309	73	536	162	556	361	1079	139	1309	254	1702	3805
% App. Total	13.7	64.1	22.1		28.7	57.6	13.6		15	51.5	33.5		8.2	76.9	14.9		
PHF	.882	.910	.844	.961	.802	.868	.760	.957	.827	.837	.930	.899	.709	.875	.836	.886	.924

Attachment 8

Counts Unlimited, Inc.
PO Box 1178
Corona, CA 92878
(951)268-6268
counts@countsunlimited.com

City of Irvine
N/S: Red Hill Avenue
E/W: Main Street
Weather: Clear

File Name : 102_IRV_Red Hill_Main_AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

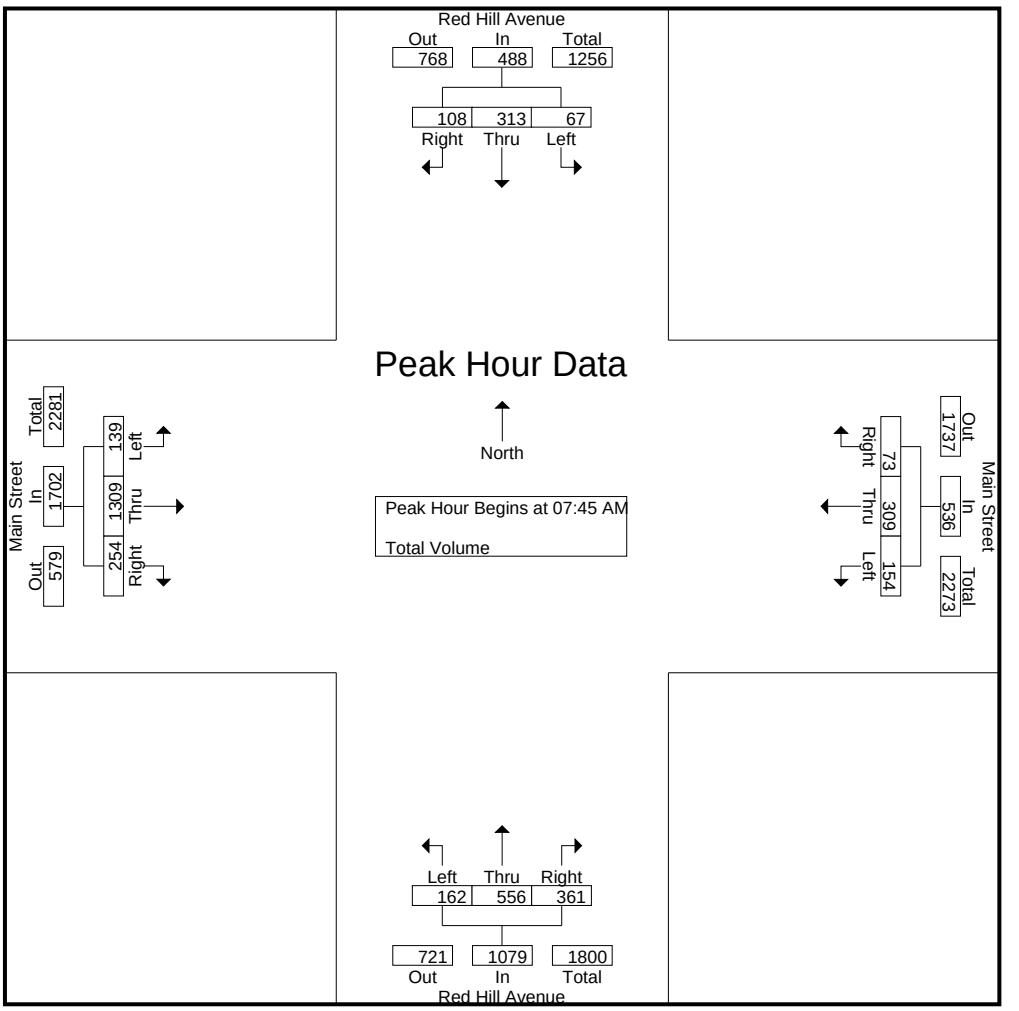

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	08:00 AM				07:45 AM				07:30 AM				07:30 AM			
+0 mins.	16	**86**	25	**127**	41	67	20	128	30	140	80	250	20	325	53	398
+15 mins.	13	71	32	116	37	79	**24**	**140**	35	151	82	268	30	**374**	**76**	**480**
+30 mins.	**19**	80	25	124	**48**	74	16	138	37	**166**	**97**	**300**	**49**	358	56	463
+45 mins.	14	75	**37**	126	28	**89**	13	130	**49**	120	92	261	27	306	67	400
Total Volume	62	312	119	493	154	309	73	536	151	577	351	1079	126	1363	252	1741
% App. Total	12.6	63.3	24.1		28.7	57.6	13.6		14	53.5	32.5		7.2	78.3	14.5	
PHF	.816	.907	.804	.970	.802	.868	.760	.957	.770	.869	.905	.899	.643	.911	.829	.907

Attachment 8

Counts Unlimited, Inc.
PO Box 1178
Corona, CA 92878
(951)268-6268
counts@countsunlimited.com

City of Irvine
N/S: Red Hill Avenue
E/W: Main Street
Weather: Clear

File Name : 102_IRV_Red Hill_Main_PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Red Hill Avenue Southbound				Main Street Westbound				Red Hill Avenue Northbound				Main Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	12	88	33	133	58	294	20	372	56	164	57	277	26	141	27	194	976
04:15 PM	23	90	47	160	53	364	17	434	81	220	45	346	39	126	26	191	1131
04:30 PM	26	124	53	203	60	267	16	343	91	236	60	387	44	138	46	228	1161
04:45 PM	26	133	61	220	63	362	27	452	85	232	62	379	45	136	37	218	1269
Total	87	435	194	716	234	1287	80	1601	313	852	224	1389	154	541	136	831	4537
05:00 PM	22	135	75	232	81	382	18	481	93	238	75	406	49	145	42	236	1355
05:15 PM	24	133	86	243	74	468	22	564	109	243	63	415	55	183	53	291	1513
05:30 PM	13	142	71	226	58	377	24	459	118	223	51	392	44	206	45	295	1372
05:45 PM	15	128	60	203	66	362	25	453	96	193	53	342	50	171	51	272	1270
Total	74	538	292	904	279	1589	89	1957	416	897	242	1555	198	705	191	1094	5510
Grand Total	161	973	486	1620	513	2876	169	3558	729	1749	466	2944	352	1246	327	1925	10047
Apprch %	9.9	60.1	30		14.4	80.8	4.7		24.8	59.4	15.8		18.3	64.7	17		
Total %	1.6	9.7	4.8	16.1	5.1	28.6	1.7	35.4	7.3	17.4	4.6	29.3	3.5	12.4	3.3	19.2	


	Red Hill Avenue Southbound				Main Street Westbound				Red Hill Avenue Northbound				Main Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 05:00 PM																	
05:00 PM	22	135	75	232	**81**	382	18	481	93	238	**75**	406	49	145	42	236	1355
05:15 PM	**24**	133	**86**	**243**	74	**468**	22	**564**	109	**243**	63	**415**	**55**	183	**53**	291	**1513**
05:30 PM	13	**142**	71	226	58	377	24	459	**118**	223	51	392	44	**206**	45	**295**	1372
05:45 PM	15	128	60	203	66	362	**25**	453	96	193	53	342	50	171	51	272	1270
Total Volume	74	538	292	904	279	1589	89	1957	416	897	242	1555	198	705	191	1094	5510
% App. Total	8.2	59.5	32.3		14.3	81.2	4.5		26.8	57.7	15.6		18.1	64.4	17.5		
PHF	.771	.947	.849	.930	.861	.849	.890	.867	.881	.923	.807	.937	.900	.856	.901	.927	.910

Attachment 8

Counts Unlimited, Inc.
PO Box 1178
Corona, CA 92878
(951)268-6268
counts@countsunlimited.com

City of Irvine
N/S: Red Hill Avenue
E/W: Main Street
Weather: Clear

File Name : 102_IRV_Red Hill_Main_PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

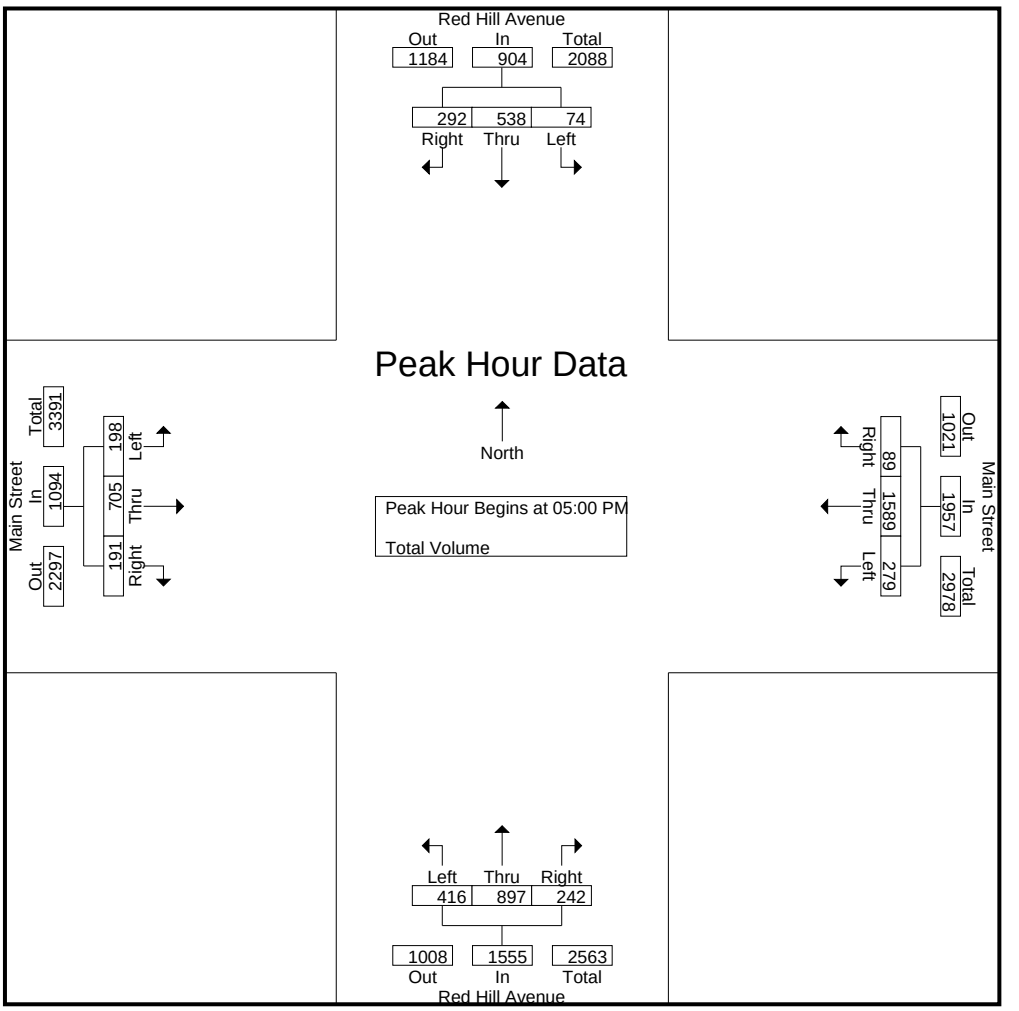

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	04:45 PM				05:00 PM				04:45 PM				05:00 PM			
+0 mins.	**26**	133	61	220	**81**	382	18	481	85	232	62	379	49	145	42	236
+15 mins.	22	135	75	232	74	**468**	22	**564**	93	238	**75**	406	**55**	183	**53**	291
+30 mins.	24	133	**86**	**243**	58	377	24	459	109	**243**	63	**415**	44	**206**	45	**295**
+45 mins.	13	**142**	71	226	66	362	**25**	453	**118**	223	51	392	50	171	51	272
Total Volume	85	543	293	921	279	1589	89	1957	405	936	251	1592	198	705	191	1094
% App. Total	9.2	59	31.8		14.3	81.2	4.5		25.4	58.8	15.8		18.1	64.4	17.5	
PHF	.817	.956	.852	.948	.861	.849	.890	.867	.858	.963	.837	.959	.900	.856	.901	.927

INTERSECTION TURNING MOVEMENT COUNTS

T816

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Thu, Feb 16, 17

LOCATION: Santa Ana
NORTH & SOUTH: I-5 SB Ramps
EAST & WEST: Santa Ana


PROJECT #: SC1220
LOCATION #: 1
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N ◄ W E ► S ▼

Add U-Turns to Left Turns

		NORTHBOUND I-5 SB Ramps			SOUTHBOUND I-5 SB Ramps			EASTBOUND Santa Ana			WESTBOUND Santa Ana				U-TURNS				
	LANES:	NL X	NT X	NR X	SL 2	ST X	SR 1	EL 2	ET 3	ER X	WL X	WT 3	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	0	0	0	76	0	7	50	100	0	0	190	81	504	0	0	0	0	0
	7:15 AM	0	0	0	87	0	8	65	145	0	0	226	79	610	0	0	0	0	0
	7:30 AM	0	0	0	79	0	10	85	138	0	0	327	60	699	0	0	1	0	1
	7:45 AM	0	0	0	101	0	7	84	123	0	0	329	88	732	0	0	0	0	0
	8:00 AM	0	0	0	89	0	9	79	131	0	0	214	93	615	0	0	0	0	0
	8:15 AM	0	0	0	67	0	12	39	114	0	0	188	79	499	0	0	0	0	0
	8:30 AM	0	0	0	66	0	14	43	75	0	0	174	54	426	0	0	0	0	0
	8:45 AM	0	0	0	105	0	10	27	81	0	0	203	46	472	0	0	0	0	0
	VOLUMES	0	0	0	670	0	77	472	907	0	0	1,851	580	4,557	0	0	1	0	1
	APPROACH %	0%	0%	0%	90%	0%	10%	34%	66%	0%	0%	76%	24%						
	APP/DEPART	0	/	1,051	747	/	0	1,379	/	1,577	2,431	/	1,929	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	0	0	0	356	0	34	313	537	0	0	1,096	320	2,656					
	APPROACH %	0%	0%	0%	91%	0%	9%	37%	63%	0%	0%	77%	23%						
	PEAK HR FACTOR		0.000			0.903			0.953			0.849		0.907					
	APP/DEPART	0	/	632	390	/	0	850	/	893	1,416	/	1,131	0					
PM	4:00 PM	0	0	0	54	0	27	123	138	0	0	128	33	503	0	0	0	0	0
	4:15 PM	0	0	0	67	0	24	78	100	0	0	159	28	456	0	0	0	0	0
	4:30 PM	0	0	0	76	0	14	140	152	0	0	167	39	588	0	0	0	0	0
	4:45 PM	0	0	0	72	0	15	121	147	0	0	156	49	560	0	0	0	0	0
	5:00 PM	0	0	0	66	0	8	146	190	0	0	150	54	614	0	0	0	0	0
	5:15 PM	0	0	0	55	0	22	137	126	0	0	175	35	550	0	0	1	0	1
	5:30 PM	0	0	0	64	0	16	122	131	0	0	141	41	515	0	0	0	0	0
	5:45 PM	0	0	0	63	0	20	102	112	0	0	135	33	465	0	0	0	0	0
	VOLUMES	0	0	0	517	0	146	969	1,096	0	0	1,211	312	4,251	0	0	1	0	1
	APPROACH %	0%	0%	0%	78%	0%	22%	47%	53%	0%	0%	80%	20%						
	APP/DEPART	0	/	1,280	663	/	0	2,065	/	1,613	1,523	/	1,358	0					
	BEGIN PEAK HR		4:30 PM																
	VOLUMES	0	0	0	269	0	59	544	615	0	0	648	177	2,312					
	APPROACH %	0%	0%	0%	82%	0%	18%	47%	53%	0%	0%	79%	21%						
	PEAK HR FACTOR		0.000			0.911			0.862			0.982		0.941					
	APP/DEPART	0	/	720	328	/	0	1,159	/	884	825	/	708	0					

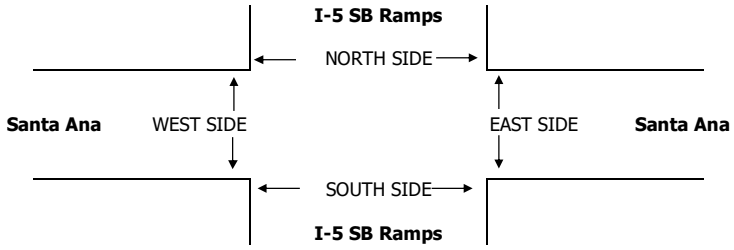

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Tustin
N/S: Tustin Ranch Road
E/W: Warner Avenue
Weather: Clear

File Name : 104_TUS_Tustin Ranch_Warner AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume


	Tustin Ranch Road Southbound			Tustin Ranch Road Northbound			Warner Avenue Eastbound			
Start Time	Thru	Right	App. Total	Left	Thru	App. Total	Left	Right	App. Total	Int. Total
07:00 AM	140	44	184	2	46	48	57	6	63	295
07:15 AM	285	70	355	1	43	44	59	6	65	464
07:30 AM	308	80	388	4	56	60	80	5	85	533
07:45 AM	443	116	559	2	49	51	67	12	79	689
Total	1176	310	1486	9	194	203	263	29	292	1981
08:00 AM	396	82	478	2	58	60	83	14	97	635
08:15 AM	453	106	559	9	66	75	57	1	58	692
08:30 AM	425	91	516	5	65	70	58	6	64	650
08:45 AM	389	99	488	1	74	75	52	4	56	619
Total	1663	378	2041	17	263	280	250	25	275	2596
Grand Total	2839	688	3527	26	457	483	513	54	567	4577
Apprch %	80.5	19.5		5.4	94.6		90.5	9.5		
Total %	62	15	77.1	0.6	10	10.6	11.2	1.2	12.4	

	Tustin Ranch Road Southbound			Tustin Ranch Road Northbound			Warner Avenue Eastbound			
Start Time	Thru	Right	App. Total	Left	Thru	App. Total	Left	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1										
Peak Hour for Entire Intersection Begins at 07:45 AM										
07:45 AM	443	**116**	**559**	2	49	51	67	12	79	689
08:00 AM	396	82	478	2	58	60	**83**	**14**	**97**	635
08:15 AM	**453**	106	559	**9**	**66**	**75**	57	1	58	**692**
08:30 AM	425	91	516	5	65	70	58	6	64	650
Total Volume	1717	395	2112	18	238	256	265	33	298	2666
% App. Total	81.3	18.7		7	93		88.9	11.1		
PHF	.948	.851	.945	.500	.902	.853	.798	.589	.768	.963

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Tustin
N/S: Tustin Ranch Road
E/W: Warner Avenue
Weather: Clear

File Name : 104_TUS_Tustin Ranch_Warner AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

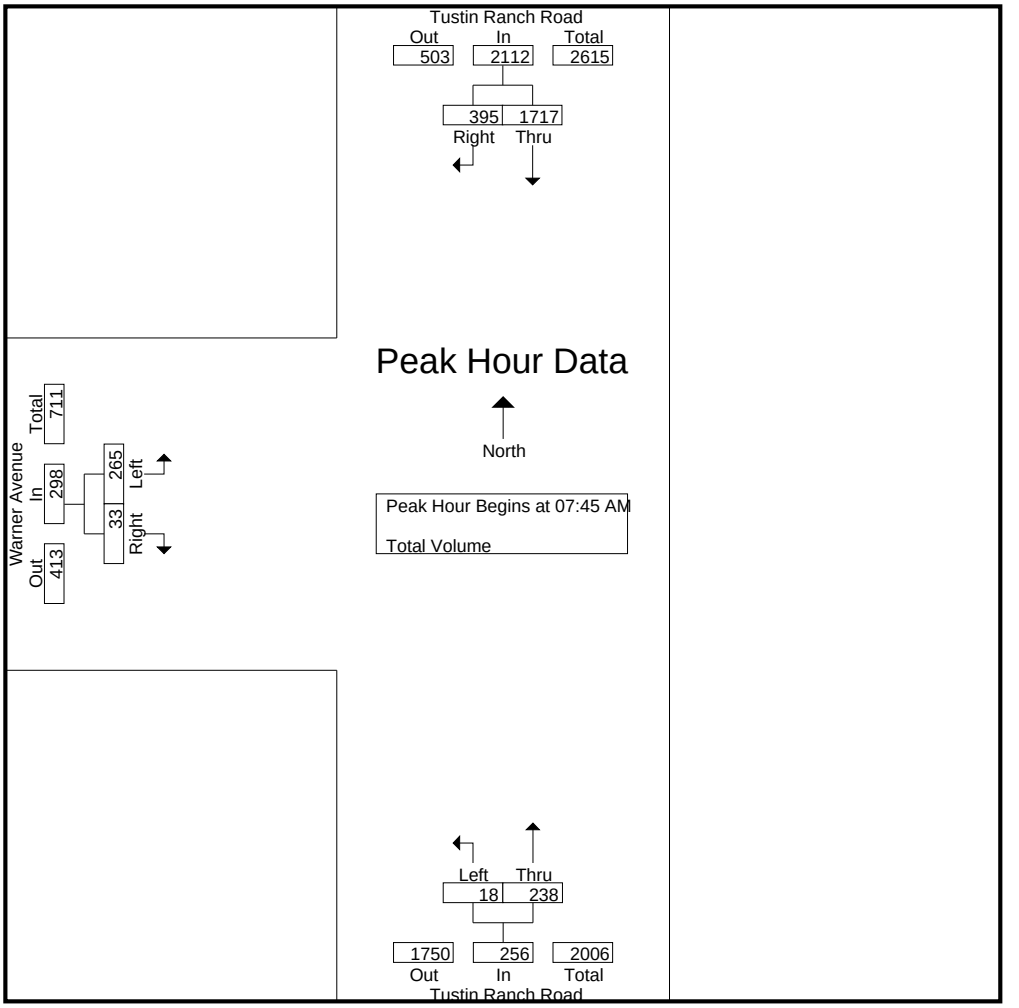

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	07:45 AM			08:00 AM			07:15 AM		
+0 mins.	443	**116**	**559**	2	58	60	59	6	65
+15 mins.	396	82	478	**9**	66	**75**	80	5	85
+30 mins.	**453**	106	559	5	65	70	67	12	79
+45 mins.	425	91	516	1	**74**	75	**83**	**14**	**97**
Total Volume	1717	395	2112	17	263	280	289	37	326
% App. Total	81.3	18.7		6.1	93.9		88.7	11.3	
PHF	.948	.851	.945	.472	.889	.933	.870	.661	.840

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Tustin
N/S: Tustin Ranch Road
E/W: Warner Avenue
Weather: Clear

File Name : 104_TUS_Tustin Ranch_Warner PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume


	Tustin Ranch Road Southbound			Tustin Ranch Road Northbound			Warner Avenue Eastbound			
Start Time	Thru	Right	App. Total	Left	Thru	App. Total	Left	Right	App. Total	Int. Total
04:00 PM	99	49	148	11	351	362	100	7	107	617
04:15 PM	104	52	156	10	369	379	107	10	117	652
04:30 PM	117	55	172	18	376	394	106	9	115	681
04:45 PM	121	50	171	8	401	409	135	10	145	725
Total	441	206	647	47	1497	1544	448	36	484	2675
05:00 PM	141	63	204	19	466	485	166	12	178	867
05:15 PM	145	67	212	15	450	465	178	16	194	871
05:30 PM	141	56	197	12	478	490	174	7	181	868
05:45 PM	113	49	162	11	384	395	141	11	152	709
Total	540	235	775	57	1778	1835	659	46	705	3315
Grand Total	981	441	1422	104	3275	3379	1107	82	1189	5990
Apprch %	69	31		3.1	96.9		93.1	6.9		
Total %	16.4	7.4	23.7	1.7	54.7	56.4	18.5	1.4	19.8	

	Tustin Ranch Road Southbound			Tustin Ranch Road Northbound			Warner Avenue Eastbound			
Start Time	Thru	Right	App. Total	Left	Thru	App. Total	Left	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1										
Peak Hour for Entire Intersection Begins at 04:45 PM										
04:45 PM	121	50	171	8	401	409	135	10	145	725
05:00 PM	141	63	204	**19**	466	485	166	12	178	867
05:15 PM	**145**	**67**	**212**	15	450	465	**178**	**16**	**194**	**871**
05:30 PM	141	56	197	12	**478**	**490**	174	7	181	868
Total Volume	548	236	784	54	1795	1849	653	45	698	3331
% App. Total	69.9	30.1		2.9	97.1		93.6	6.4		
PHF	.945	.881	.925	.711	.939	.943	.917	.703	.899	.956

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Tustin
N/S: Tustin Ranch Road
E/W: Warner Avenue
Weather: Clear

File Name : 104_TUS_Tustin Ranch_Warner PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

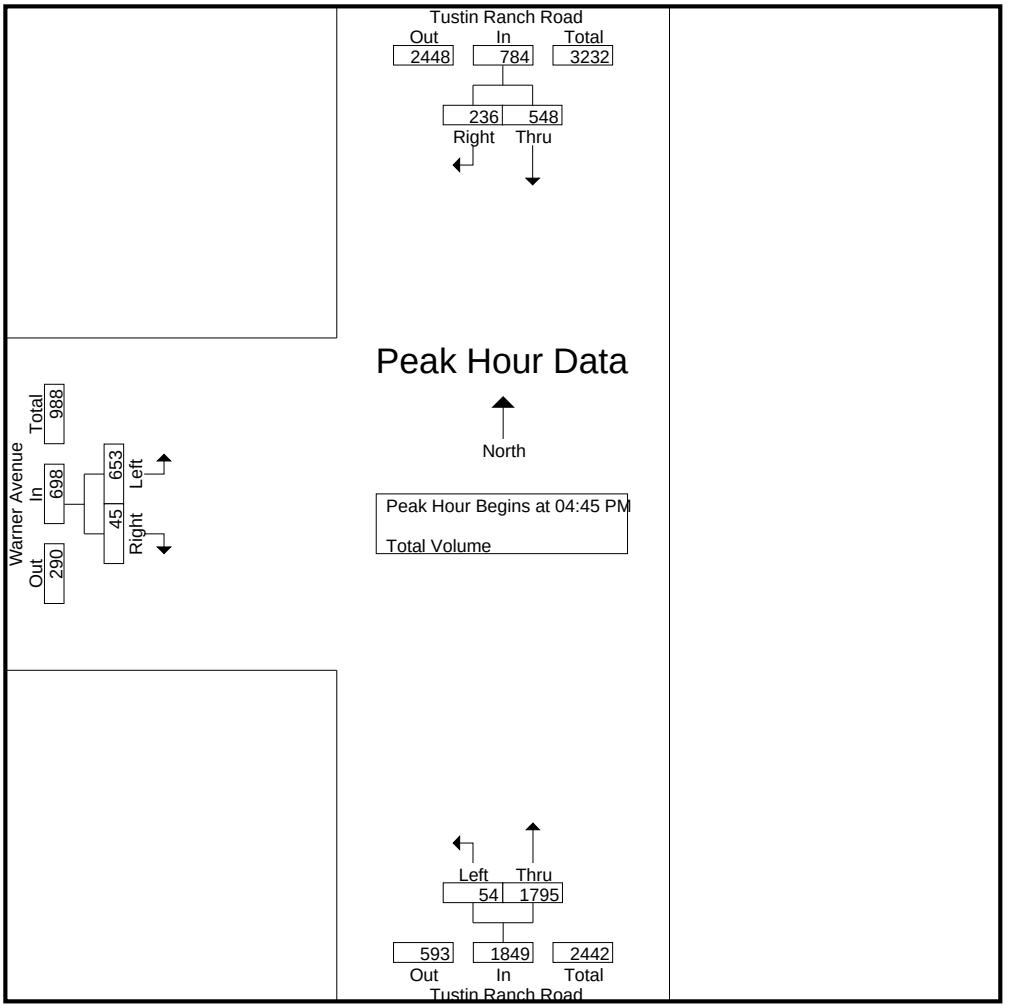

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	04:45 PM			04:45 PM			05:00 PM		
+0 mins.	121	50	171	8	401	409	166	12	178
+15 mins.	141	63	204	**19**	466	485	**178**	**16**	**194**
+30 mins.	**145**	**67**	**212**	15	450	465	174	7	181
+45 mins.	141	56	197	12	**478**	**490**	141	11	152
Total Volume	548	236	784	54	1795	1849	659	46	705
% App. Total	69.9	30.1		2.9	97.1		93.5	6.5	
PHF	.945	.881	.925	.711	.939	.943	.926	.719	.909

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Irvine
N/S: Tustin Ranch Rd/Von Karman Ave
E/W: Barranca Parkway
Weather: Clear

File Name : 105_IRV_Von Karman_Barranca AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Tustin Ranch Road Southbound				Barranca Parkway Westbound				Von Karman Avenue Northbound				Barranca Parkway Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	5	117	38	160	81	170	11	262	17	26	17	60	17	103	35	155	637
07:15 AM	13	212	80	305	134	202	11	347	22	19	9	50	19	119	37	175	877
07:30 AM	38	258	99	395	140	264	13	417	26	29	18	73	25	101	45	171	1056
07:45 AM	30	280	118	428	186	361	8	555	21	29	16	66	30	120	51	201	1250
Total	86	867	335	1288	541	997	43	1581	86	103	60	249	91	443	168	702	3820
08:00 AM	23	301	119	443	175	290	12	477	24	36	28	88	38	115	31	184	1192
08:15 AM	44	294	141	479	192	312	10	514	34	36	22	92	32	127	35	194	1279
08:30 AM	22	289	131	442	216	300	9	525	28	41	19	88	30	126	46	202	1257
08:45 AM	30	269	134	433	156	291	17	464	28	44	23	95	49	90	44	183	1175
Total	119	1153	525	1797	739	1193	48	1980	114	157	92	363	149	458	156	763	4903
Grand Total	205	2020	860	3085	1280	2190	91	3561	200	260	152	612	240	901	324	1465	8723
Apprch %	6.6	65.5	27.9		35.9	61.5	2.6		32.7	42.5	24.8		16.4	61.5	22.1		
Total %	2.4	23.2	9.9	35.4	14.7	25.1	1	40.8	2.3	3	1.7	7	2.8	10.3	3.7	16.8	


	Tustin Ranch Road Southbound				Barranca Parkway Westbound				Von Karman Avenue Northbound				Barranca Parkway Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:45 AM																	
07:45 AM	30	280	118	428	186	**361**	8	**555**	21	29	16	66	30	120	**51**	201	1250
08:00 AM	23	**301**	119	443	175	290	**12**	477	24	36	**28**	88	**38**	115	31	184	1192
08:15 AM	**44**	294	**141**	**479**	192	312	10	514	**34**	36	22	**92**	32	**127**	35	194	**1279**
08:30 AM	22	289	131	442	**216**	300	9	525	28	**41**	19	88	30	126	46	**202**	1257
Total Volume	119	1164	509	1792	769	1263	39	2071	107	142	85	334	130	488	163	781	4978
% App. Total	6.6	65	28.4		37.1	61	1.9		32	42.5	25.4		16.6	62.5	20.9		
PHF	.676	.967	.902	.935	.890	.875	.813	.933	.787	.866	.759	.908	.855	.961	.799	.967	.973

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Irvine
N/S: Tustin Ranch Rd/Von Karman Ave
E/W: Barranca Parkway
Weather: Clear

File Name : 105_IRV_Von Karman_Barranca AM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

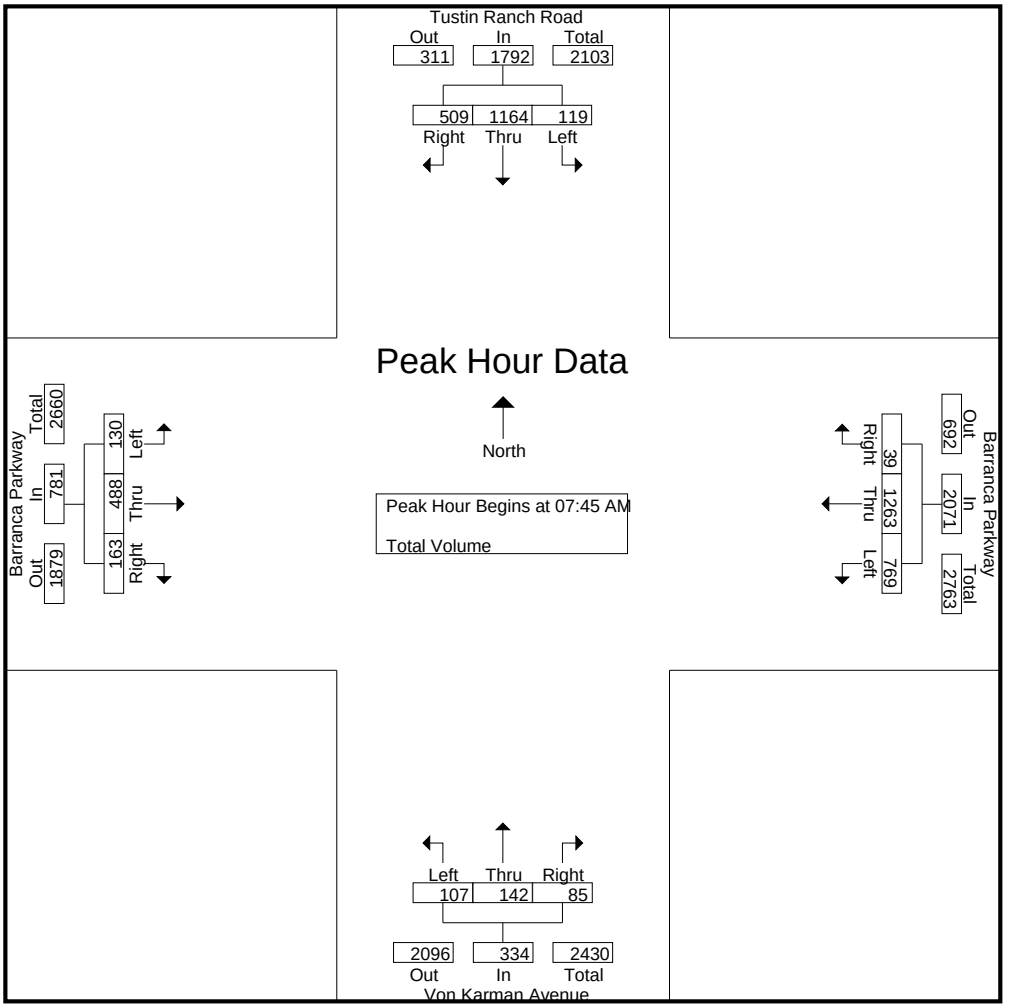

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	08:00 AM				07:45 AM				08:00 AM				07:45 AM			
+0 mins.	23	**301**	119	443	186	**361**	8	**555**	24	36	**28**	88	30	120	**51**	201
+15 mins.	**44**	294	**141**	**479**	175	290	**12**	477	**34**	36	22	92	**38**	115	31	184
+30 mins.	22	289	131	442	192	312	10	514	28	41	19	88	32	**127**	35	194
+45 mins.	30	269	134	433	**216**	300	9	525	28	**44**	23	**95**	30	126	46	**202**
Total Volume	119	1153	525	1797	769	1263	39	2071	114	157	92	363	130	488	163	781
% App. Total	6.6	64.2	29.2		37.1	61	1.9		31.4	43.3	25.3		16.6	62.5	20.9	
PHF	.676	.958	.931	.938	.890	.875	.813	.933	.838	.892	.821	.955	.855	.961	.799	.967

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Irvine
N/S: Tustin Ranch Rd/Von Karman Ave
E/W: Barranca Parkway
Weather: Clear

File Name : 105_IRV_Von Karman_Barranca PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 1

Groups Printed- Total Volume

	Tustin Ranch Road Southbound				Barranca Parkway Westbound				Von Karman Avenue Northbound				Barranca Parkway Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	13	71	53	137	67	171	56	294	71	229	53	353	85	197	19	301	1085
04:15 PM	9	77	62	148	36	125	41	202	38	277	63	378	137	214	27	378	1106
04:30 PM	14	59	48	121	53	157	59	269	83	257	68	408	99	207	23	329	1127
04:45 PM	14	88	59	161	37	149	47	233	48	328	78	454	119	221	30	370	1218
Total	50	295	222	567	193	602	203	998	240	1091	262	1593	440	839	99	1378	4536
05:00 PM	17	74	51	142	53	168	58	279	71	311	81	463	123	284	29	436	1320
05:15 PM	16	103	64	183	54	136	53	243	43	332	64	439	168	285	50	503	1368
05:30 PM	20	78	62	160	60	193	62	315	62	319	58	439	150	233	34	417	1331
05:45 PM	15	96	55	166	56	147	41	244	47	294	50	391	115	243	33	391	1192
Total	68	351	232	651	223	644	214	1081	223	1256	253	1732	556	1045	146	1747	5211
Grand Total	118	646	454	1218	416	1246	417	2079	463	2347	515	3325	996	1884	245	3125	9747
Apprch %	9.7	53	37.3		20	59.9	20.1		13.9	70.6	15.5		31.9	60.3	7.8		
Total %	1.2	6.6	4.7	12.5	4.3	12.8	4.3	21.3	4.8	24.1	5.3	34.1	10.2	19.3	2.5	32.1	


	Tustin Ranch Road Southbound				Barranca Parkway Westbound				Von Karman Avenue Northbound				Barranca Parkway Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:45 PM																	
04:45 PM	14	88	59	161	37	149	47	233	48	328	78	454	119	221	30	370	1218
05:00 PM	17	74	51	142	53	168	58	279	**71**	311	**81**	**463**	123	284	29	436	1320
05:15 PM	16	**103**	**64**	**183**	54	136	53	243	43	**332**	64	439	**168**	**285**	**50**	**503**	**1368**
05:30 PM	**20**	78	62	160	**60**	**193**	**62**	**315**	62	319	58	439	150	233	34	417	1331
Total Volume	67	343	236	646	204	646	220	1070	224	1290	281	1795	560	1023	143	1726	5237
% App. Total	10.4	53.1	36.5		19.1	60.4	20.6		12.5	71.9	15.7		32.4	59.3	8.3		
PHF	.838	.833	.922	.883	.850	.837	.887	.849	.789	.971	.867	.969	.833	.897	.715	.858	.957

Attachment 8

Counts Unlimited
PO Box 1178
Corona, CA 92878
(951) 268-6268

City of Irvine
N/S: Tustin Ranch Rd/Von Karman Ave
E/W: Barranca Parkway
Weather: Clear

File Name : 105_IRV_Von Karman_Barranca PM
Site Code : 20220171
Start Date : 3/12/2020
Page No : 2

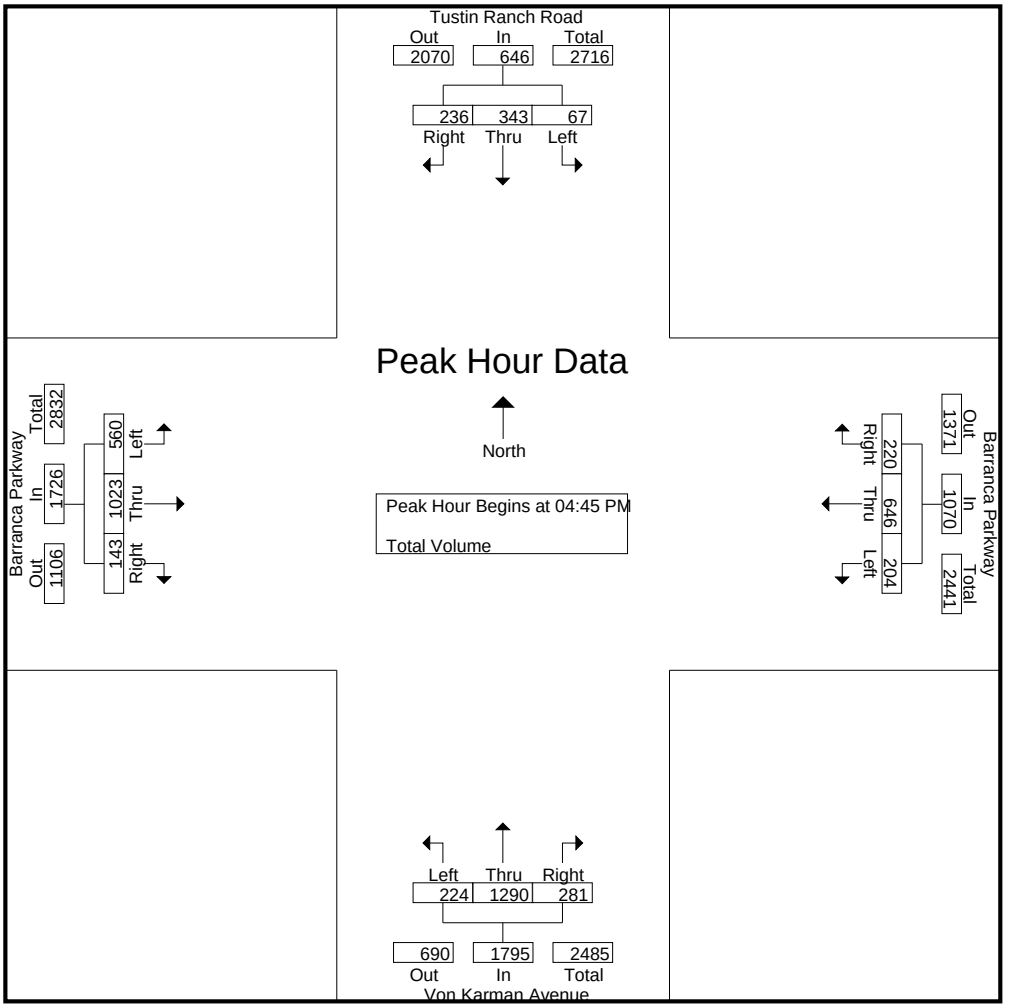

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1
Peak Hour for Each Approach Begins at:

	05:00 PM				05:00 PM				04:45 PM				05:00 PM			
+0 mins.	17	74	51	142	53	168	58	279	48	328	78	454	123	284	29	436
+15 mins.	16	**103**	**64**	**183**	54	136	53	243	**71**	311	**81**	**463**	**168**	**285**	**50**	**503**
+30 mins.	**20**	78	62	160	**60**	**193**	**62**	**315**	43	**332**	64	439	150	233	34	417
+45 mins.	15	96	55	166	56	147	41	244	62	319	58	439	115	243	33	391
Total Volume	68	351	232	651	223	644	214	1081	224	1290	281	1795	556	1045	146	1747
% App. Total	10.4	53.9	35.6		20.6	59.6	19.8		12.5	71.9	15.7		31.8	59.8	8.4	
PHF	.850	.852	.906	.889	.929	.834	.863	.858	.789	.971	.867	.969	.827	.917	.730	.868

Attachment 8

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 21, 19

LOCATION: Tustin
NORTH & SOUTH: Red Hill
EAST & WEST: El Camino Real


PROJECT #: SC2143
LOCATION #: 7
CONTROL: SIGNAL

NOTES: Queue AM SB, PM NB/SB

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☒ Add U-Turns to Left Turns

		NORTHBOUND Red Hill			SOUTHBOUND Red Hill			EASTBOUND El Camino Real			WESTBOUND El Camino Real				U-TURNS				
	LANES:	NL 2	NT 3	NR 1	SL 1	ST 3	SR 0	EL 1	ET 1	ER 1	WL 1	WT 1	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	55	107	23	4	208	10	16	20	43	54	18	1	559	0	1	0	0	1
	7:15 AM	85	195	51	1	287	20	15	30	44	67	32	2	829	0	0	0	0	0
	7:30 AM	108	203	98	8	294	30	29	50	40	70	83	2	1,015	0	1	0	0	1
	7:45 AM	70	197	69	5	388	11	17	46	45	69	70	5	992	2	0	0	0	2
	8:00 AM	39	182	32	3	321	18	7	28	33	62	34	6	765	0	0	0	0	0
	8:15 AM	47	135	29	5	313	15	7	26	43	56	31	2	709	0	0	0	0	0
	8:30 AM	43	126	11	4	269	8	5	17	41	47	19	2	592	0	0	0	0	0
	8:45 AM	52	123	20	4	220	15	5	15	38	37	24	2	555	0	0	0	0	0
	VOLUMES	499	1,268	333	34	2,300	127	101	232	327	462	311	22	6,016	2	2	0	0	4
	APPROACH %	24%	60%	16%	1%	93%	5%	15%	35%	50%	58%	39%	3%						
	APP/DEPART	2,100	/	1,393	2,461	/	3,091	660	/	597	795	/	935	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	302	777	250	17	1,290	79	68	154	162	268	219	15	3,601					
	APPROACH %	23%	58%	19%	1%	93%	6%	18%	40%	42%	53%	44%	3%						
	PEAK HR FACTOR		0.812			0.858			0.807			0.810		0.887					
	APP/DEPART	1,329	/	861	1,386	/	1,722	384	/	420	502	/	598	0					
PM	4:00 PM	77	251	66	2	149	29	17	37	51	71	72	10	832	0	1	0	0	1
	4:15 PM	66	277	53	7	174	22	14	26	45	57	92	2	835	0	1	0	0	1
	4:30 PM	98	281	52	5	173	34	17	31	39	40	91	10	871	1	0	0	0	1
	4:45 PM	79	292	54	4	155	28	19	23	42	50	100	7	853	0	0	0	0	0
	5:00 PM	93	299	59	8	169	14	13	37	50	46	91	12	891	1	0	0	0	1
	5:15 PM	99	327	52	5	207	29	25	34	50	56	69	7	960	1	0	0	0	1
	5:30 PM	107	337	65	2	178	17	14	45	52	45	82	10	954	0	1	0	0	1
	5:45 PM	111	338	63	4	166	35	17	35	47	50	83	8	957	1	0	0	0	1
	VOLUMES	730	2,402	464	37	1,371	208	136	268	376	415	680	66	7,153	4	3	0	0	7
	APPROACH %	20%	67%	13%	2%	85%	13%	17%	34%	48%	36%	59%	6%						
	APP/DEPART	3,596	/	2,607	1,616	/	2,166	780	/	766	1,161	/	1,614	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	410	1,301	239	19	720	95	69	151	199	197	325	37	3,762					
	APPROACH %	21%	67%	12%	2%	86%	11%	16%	36%	47%	35%	58%	7%						
	PEAK HR FACTOR		0.952			0.865			0.944			0.938		0.980					
	APP/DEPART	1,950	/	1,408	834	/	1,119	419	/	408	559	/	827	0					

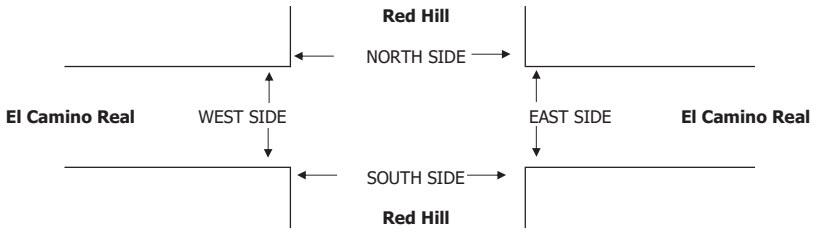

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	3	0	7	6	16	3	0	7	4	14	0	0	0	2	2
	7:15 AM	29	0	35	13	77	29	0	34	13	76	0	0	1	0	1
	7:30 AM	67	0	30	25	122	64	0	30	24	118	3	0	0	1	4
	7:45 AM	16	0	7	6	29	16	0	7	6	29	0	0	0	0	0
	8:00 AM	6	0	2	3	11	5	0	2	2	9	1	0	0	1	2
	8:15 AM	1	0	2	2	5	1	0	1	1	3	0	0	1	1	2
	8:30 AM	7	0	2	3	12	7	0	2	3	12	0	0	0	0	0
	8:45 AM	3	0	2	3	8	2	0	1	2	5	1	0	1	1	3
	TOTAL	132	0	87	61	280	127	0	84	55	266	5	0	3	6	14
	AM BEGIN PEAK HR			7:15 AM			114	0	73	45	232					
PM	4:00 PM	21	0	16	4	41	18	0	16	4	38	3	0	0	0	3
	4:15 PM	14	0	14	12	40	14	0	13	12	39	0	0	1	0	1
	4:30 PM	12	0	10	9	31	10	0	10	8	28	2	0	0	1	3
	4:45 PM	6	0	4	9	19	4	0	4	8	16	2	0	0	1	3
	5:00 PM	6	0	4	7	17	4	0	4	5	13	2	0	0	2	4
	5:15 PM	12	0	8	1	21	10	0	8	1	19	2	0	0	0	2
	5:30 PM	13	0	6	7	26	13	0	6	7	26	0	0	0	0	0
	5:45 PM	4	0	8	5	17	1	0	5	3	9	3	0	3	2	8
	TOTAL	88	0	70	54	212	74	0	66	48	188	14	0	4	6	24
	PM BEGIN PEAK HR			5:00 PM			28	0	23	16	67					

T218

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 21, 19

LOCATION: Tustin
NORTH & SOUTH: Red Hill
EAST & WEST: I-5 NB Ramps


PROJECT #: SC2143
LOCATION #: 6
CONTROL: SIGNAL

NOTES: Queue AM NB, PM NB/SB

AM / PM / MD / OTHER / OTHER — N / W / E / S

☐ Add U-Turns to Left Turns

		NORTHBOUND (Red Hill)			SOUTHBOUND (Red Hill)			EASTBOUND (I-5 NB Ramps)			WESTBOUND (I-5 NB Ramps)				U-TURNS				
	LANES:	NL 1	NT 3	NR X	SL X	ST 3	SR 1	EL X	ET X	ER X	WL 1.5	WT 0.5	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	47	118	0	0	193	112	0	0	0	49	0	59	578	0	0	0	0	0
	7:15 AM	71	267	0	0	266	124	0	0	0	59	0	74	861	0	0	0	0	0
	7:30 AM	73	351	0	0	315	94	0	0	0	57	0	58	948	0	0	0	0	0
	7:45 AM	91	273	0	0	359	144	0	0	0	66	0	64	997	0	0	0	0	0
	8:00 AM	88	182	0	0	310	108	0	0	0	43	0	62	793	0	0	0	0	0
	8:15 AM	63	127	0	0	290	117	0	0	0	50	0	79	726	0	0	0	0	0
	8:30 AM	65	117	0	0	260	94	0	0	0	77	1	76	690	0	0	0	0	0
	8:45 AM	49	104	0	0	221	86	0	0	0	83	1	94	638	0	0	0	0	0
	VOLUMES	547	1,539	0	0	2,214	879	0	0	0	484	2	566	6,231	0	0	0	0	0
	APPROACH %	26%	74%	0%	0%	72%	28%	0%	0%	0%	46%	0%	54%						
	APP/DEPART	2,086	/	2,105	3,093	/	2,698	0	/	0	1,052	/	1,428	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	323	1,073	0	0	1,250	470	0	0	0	225	0	258	3,599					
	APPROACH %	23%	77%	0%	0%	73%	27%	0%	0%	0%	47%	0%	53%						
	PEAK HR FACTOR		0.823			0.855			0.000			0.908		0.902					
	APP/DEPART	1,396	/	1,331	1,720	/	1,475	0	/	0	483	/	793	0					
PM	4:00 PM	75	321	0	0	209	67	0	0	0	59	11	53	795	0	0	0	0	0
	4:15 PM	101	329	0	0	214	64	0	0	0	42	11	58	819	0	0	0	0	0
	4:30 PM	68	342	0	0	192	58	0	0	0	58	19	107	844	0	0	0	0	0
	4:45 PM	85	354	0	0	198	50	0	0	0	35	25	85	832	0	0	0	0	0
	5:00 PM	69	368	0	0	219	48	0	0	0	57	21	85	867	0	0	0	0	0
	5:15 PM	73	378	0	0	253	48	0	0	0	65	30	98	945	0	0	0	0	0
	5:30 PM	60	409	0	0	244	46	0	0	0	65	25	113	962	0	0	0	0	0
	5:45 PM	67	386	0	0	213	46	0	0	0	66	19	114	911	0	0	0	0	0
	VOLUMES	598	2,887	0	0	1,742	427	0	0	0	447	161	713	6,975	0	0	0	0	0
	APPROACH %	17%	83%	0%	0%	80%	20%	0%	0%	0%	34%	12%	54%						
	APP/DEPART	3,485	/	3,600	2,169	/	2,189	0	/	0	1,321	/	1,186	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	269	1,541	0	0	929	188	0	0	0	253	95	410	3,685					
	APPROACH %	15%	85%	0%	0%	83%	17%	0%	0%	0%	33%	13%	54%						
	PEAK HR FACTOR		0.965			0.928			0.000			0.933		0.958					
	APP/DEPART	1,810	/	1,951	1,117	/	1,182	0	/	0	758	/	552	0					

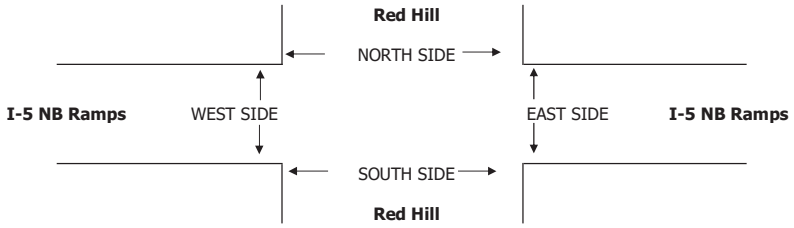

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	10	4	14	0	0	10	3	13	0	0	0	1	1
	7:15 AM	0	0	33	3	36	0	0	29	3	32	0	0	4	0	4
	7:30 AM	0	0	29	24	53	0	0	26	23	49	0	0	3	1	4
	7:45 AM	0	0	7	6	13	0	0	7	6	13	0	0	0	0	0
	8:00 AM	0	0	3	5	8	0	0	3	3	6	0	0	0	2	2
	8:15 AM	0	0	4	1	5	0	0	2	0	2	0	0	2	1	3
	8:30 AM	0	0	5	0	5	0	0	4	0	4	0	0	1	0	1
	8:45 AM	0	0	2	3	5	0	0	1	2	3	0	0	1	1	2
	TOTAL	0	0	93	46	139	0	0	82	40	122	0	0	11	6	17
	AM BEGIN PEAK HR			7:15 AM			0	0	65	35	100					
PM	4:00 PM	0	0	16	3	19	0	0	15	3	18	0	0	1	0	1
	4:15 PM	0	0	10	14	24	0	0	9	14	23	0	0	1	0	1
	4:30 PM	0	0	6	1	7	0	0	6	0	6	0	0	0	1	1
	4:45 PM	0	0	7	5	12	0	0	7	3	10	0	0	0	2	2
	5:00 PM	0	0	5	12	17	0	0	5	9	14	0	0	0	3	3
	5:15 PM	0	0	4	3	7	0	0	4	3	7	0	0	0	0	0
	5:30 PM	0	0	3	4	7	0	0	3	4	7	0	0	0	0	0
	5:45 PM	0	0	10	3	13	0	0	6	1	7	0	0	4	2	6
	TOTAL	0	0	61	45	106	0	0	55	37	92	0	0	6	8	14
	PM BEGIN PEAK HR			5:00 PM			0	0	18	17	35					

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 21, 19

LOCATION: Tustin
NORTH & SOUTH: Red Hill
EAST & WEST: I-5 SB Ramps


PROJECT #: SC2143
LOCATION #: 5
CONTROL: SIGNAL

NOTES:
Queue AM WB/EB, PM EB.

AM / PM / MD / OTHER / OTHER — N ▲ / ◄ W / E ► / S ▼

Add U-Turns to Left Turns

		NORTHBOUND Red Hill			SOUTHBOUND Red Hill			EASTBOUND I-5 SB Ramps			WESTBOUND I-5 SB Ramps				U-TURNS				
	LANES:	NL X	NT 4	NR 1	SL 1	ST 3	SR X	EL 0.5	ET 0.5	ER 1	WL X	WT X	WR X	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	0	136	124	81	161	0	29	0	53	0	0	0	584	0	0	0	0	0
	7:15 AM	0	305	137	89	236	0	33	0	59	0	0	0	859	0	0	0	0	0
	7:30 AM	0	378	133	101	271	0	46	0	81	0	0	0	1,010	0	0	0	0	0
	7:45 AM	0	314	154	99	326	0	50	1	90	0	0	0	1,034	0	0	0	0	0
	8:00 AM	0	233	120	92	261	0	37	2	75	0	0	0	820	0	0	0	0	0
	8:15 AM	0	160	105	91	249	0	31	1	57	0	0	0	694	0	0	0	0	0
	8:30 AM	0	155	92	103	234	0	27	0	62	0	0	0	673	0	0	0	0	0
	8:45 AM	0	127	105	87	217	0	26	0	72	0	0	0	634	0	0	0	0	0
	VOLUMES	0	1,808	970	743	1,955	0	279	4	549	0	0	0	6,308	0	0	0	0	0
	APPROACH %	0%	65%	35%	28%	72%	0%	34%	0%	66%	0%	0%	0%						
	APP/DEPART	2,778	/	2,087	2,698	/	2,504	832	/	1,717	0	/	0	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	0	1,230	544	381	1,094	0	166	3	305	0	0	0	3,723					
	APPROACH %	0%	69%	31%	26%	74%	0%	35%	1%	64%	0%	0%	0%						
	PEAK HR FACTOR		0.868			0.868			0.840			0.000		0.900					
	APP/DEPART	1,774	/	1,396	1,475	/	1,399	474	/	928	0	/	0	0					
PM	4:00 PM	0	324	127	75	193	0	69	1	63	0	0	0	852	0	0	0	0	0
	4:15 PM	0	357	105	89	167	0	73	0	66	0	0	0	857	0	0	0	0	0
	4:30 PM	0	335	94	77	173	0	75	0	76	0	0	0	830	0	0	0	0	0
	4:45 PM	0	372	119	72	161	0	67	0	69	0	0	0	860	0	0	0	0	0
	5:00 PM	0	367	125	82	194	0	70	1	62	0	0	0	901	0	0	0	0	0
	5:15 PM	0	370	113	103	218	0	81	0	69	0	0	0	954	0	0	0	0	0
	5:30 PM	0	387	119	89	220	0	82	1	78	0	0	0	976	0	0	0	0	0
	5:45 PM	0	381	121	74	205	0	72	0	65	0	0	0	918	0	0	0	0	0
	VOLUMES	0	2,893	923	661	1,531	0	589	3	548	0	0	0	7,148	0	0	0	0	0
	APPROACH %	0%	76%	24%	30%	70%	0%	52%	0%	48%	0%	0%	0%						
	APP/DEPART	3,816	/	3,482	2,192	/	2,079	1,140	/	1,587	0	/	0	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	0	1,505	478	348	837	0	305	2	274	0	0	0	3,749					
	APPROACH %	0%	76%	24%	29%	71%	0%	52%	0%	47%	0%	0%	0%						
	PEAK HR FACTOR		0.980			0.923			0.902			0.000		0.960					
	APP/DEPART	1,983	/	1,810	1,185	/	1,111	581	/	828	0	/	0	0					

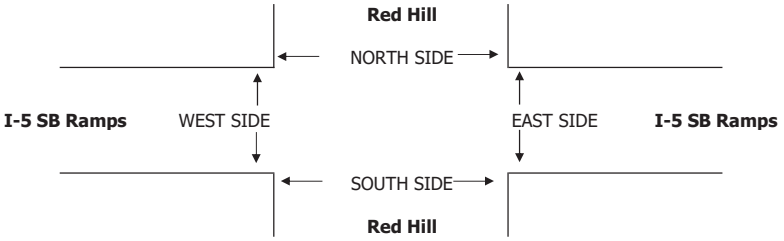

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	0	17	4	21	0	0	17	3	20	0	0	0	1	1
	7:15 AM	0	0	33	3	36	0	0	30	3	33	0	0	3	0	3
	7:30 AM	0	0	26	25	51	0	0	25	24	49	0	0	1	1	2
	7:45 AM	0	0	7	4	11	0	0	7	4	11	0	0	0	0	0
	8:00 AM	0	0	1	4	5	0	0	1	3	4	0	0	0	1	1
	8:15 AM	0	0	5	2	7	0	0	3	0	3	0	0	2	2	4
	8:30 AM	0	0	5	0	5	0	0	3	0	3	0	0	2	0	2
	8:45 AM	0	0	2	3	5	0	0	0	2	2	0	0	2	1	3
	TOTAL	0	0	96	45	141	0	0	86	39	125	0	0	10	6	16
	AM BEGIN PEAK HR			7:15 AM			0	0	63	34	97					
PM	4:00 PM	0	0	14	3	17	0	0	12	3	15	0	0	2	0	2
	4:15 PM	0	0	6	9	15	0	0	5	9	14	0	0	1	0	1
	4:30 PM	0	0	7	2	9	0	0	7	1	8	0	0	0	1	1
	4:45 PM	0	0	8	6	14	0	0	8	4	12	0	0	0	2	2
	5:00 PM	0	0	5	7	12	0	0	3	5	8	0	0	2	2	4
	5:15 PM	0	0	6	6	12	0	0	5	6	11	0	0	1	0	1
	5:30 PM	0	0	3	4	7	0	0	3	4	7	0	0	0	0	0
	5:45 PM	0	0	11	3	14	0	0	7	0	7	0	0	4	3	7
	TOTAL	0	0	60	40	100	0	0	50	32	82	0	0	10	8	18
	PM BEGIN PEAK HR			5:00 PM			0	0	18	15	33					

INTERSECTION TURNING MOVEMENT COUNTS

T218

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 21, 19

LOCATION: Tustin
NORTH & SOUTH: Red Hill
EAST & WEST: Nisson


PROJECT #: SC2143
LOCATION #: 4
CONTROL: SIGNAL

NOTES: Queue AM/PM NB/SB

AM PM MD OTHER OTHER — ▲ N, ◄ W, E ►, S ▼

☐ Add U-Turns to Left Turns

		NORTHBOUND Red Hill			SOUTHBOUND Red Hill			EASTBOUND Nisson			WESTBOUND Nisson				U-TURNS				
	LANES:	NL 1	NT 3.5	NR 0.5	SL 1	ST 3	SR 0	EL 1	ET 1	ER 0	WL 1	WT 1	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	1	191	3	13	182	10	41	5	5	9	5	35	500	0	0	0	0	0
	7:15 AM	2	329	4	29	250	19	61	14	11	11	6	51	787	0	0	0	0	0
	7:30 AM	5	387	5	35	292	22	63	11	8	16	9	55	908	0	0	0	0	0
	7:45 AM	5	334	7	55	306	53	61	23	14	9	6	54	927	1	0	0	0	1
	8:00 AM	4	235	7	31	284	24	54	10	14	12	4	52	731	0	0	0	0	0
	8:15 AM	0	175	1	17	272	13	48	8	4	6	8	35	587	0	0	0	0	0
	8:30 AM	6	190	4	21	266	16	37	5	1	9	5	25	585	0	0	0	0	0
	8:45 AM	0	157	5	17	253	16	48	6	9	7	2	23	543	0	1	0	0	1
	VOLUMES	23	1,998	36	218	2,105	173	413	82	66	79	45	330	5,568	1	1	0	0	2
	APPROACH %	1%	97%	2%	9%	84%	7%	74%	15%	12%	17%	10%	73%						
	APP/DEPART	2,057	/	2,742	2,496	/	2,251	561	/	335	454	/	240	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	16	1,285	23	150	1,132	118	239	58	47	48	25	212	3,353					
	APPROACH %	1%	97%	2%	11%	81%	8%	69%	17%	14%	17%	9%	74%						
	PEAK HR FACTOR		0.834			0.845			0.878			0.891		0.904					
	APP/DEPART	1,324	/	1,736	1,400	/	1,228	344	/	231	285	/	158	0					
PM	4:00 PM	7	376	8	48	200	20	44	19	4	9	16	26	777	0	0	0	0	0
	4:15 PM	5	377	6	40	162	22	51	17	4	15	23	31	753	1	2	0	0	3
	4:30 PM	5	342	5	41	203	15	46	19	4	7	15	36	738	0	0	0	0	0
	4:45 PM	2	396	7	32	168	16	59	20	6	19	23	28	776	0	2	0	0	2
	5:00 PM	10	386	4	39	213	17	60	23	8	12	19	38	829	0	0	0	0	0
	5:15 PM	7	390	11	42	223	21	55	22	4	8	19	39	841	0	0	0	0	0
	5:30 PM	8	391	8	42	229	27	65	26	14	7	15	33	865	0	0	0	0	0
	5:45 PM	4	400	8	43	191	21	64	18	13	20	29	29	840	0	0	0	0	0
	VOLUMES	48	3,058	57	327	1,589	159	444	164	57	97	159	260	6,419	1	4	0	0	5
	APPROACH %	2%	97%	2%	16%	77%	8%	67%	25%	9%	19%	31%	50%						
	APP/DEPART	3,163	/	3,766	2,075	/	1,744	665	/	544	516	/	365	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	29	1,567	31	166	856	86	244	89	39	47	82	139	3,375					
	APPROACH %	2%	96%	2%	15%	77%	8%	66%	24%	10%	18%	31%	52%						
	PEAK HR FACTOR		0.987			0.930			0.886			0.859		0.975					
	APP/DEPART	1,627	/	1,950	1,108	/	942	372	/	286	268	/	197	0					

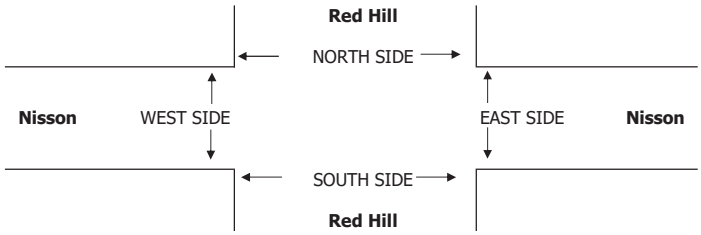

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	0	1	6	3	10	0	1	6	2	9	0	0	0	1	1
	7:15 AM	0	5	16	1	22	0	5	13	1	19	0	0	3	0	3
	7:30 AM	0	3	18	1	22	0	3	17	1	21	0	0	1	0	1
	7:45 AM	0	7	4	5	16	0	6	2	5	13	0	1	2	0	3
	8:00 AM	0	0	0	3	3	0	0	0	2	2	0	0	0	1	1
	8:15 AM	0	2	1	2	5	0	1	1	0	2	0	1	0	2	3
	8:30 AM	1	5	3	1	10	0	4	2	1	7	1	1	1	0	3
	8:45 AM	0	2	4	2	8	0	2	4	1	7	0	0	0	1	1
	TOTAL	1	25	52	18	96	0	22	45	13	80	1	3	7	5	16
	AM BEGIN PEAK HR			7:15 AM			0	14	32	9	55					
PM	4:00 PM	0	11	10	2	23	0	11	9	2	22	0	0	1	0	1
	4:15 PM	0	7	6	9	22	0	7	5	9	21	0	0	1	0	1
	4:30 PM	0	2	4	1	7	0	2	4	0	6	0	0	0	1	1
	4:45 PM	0	13	9	4	26	0	12	9	2	23	0	1	0	2	3
	5:00 PM	0	3	5	8	16	0	3	5	5	13	0	0	0	3	3
	5:15 PM	0	6	5	6	17	0	4	5	6	15	0	2	0	0	2
	5:30 PM	0	12	2	3	17	0	12	2	3	17	0	0	0	0	0
	5:45 PM	0	22	10	2	34	0	22	6	0	28	0	0	4	2	6
	TOTAL	0	76	51	35	162	0	73	45	27	145	0	3	6	8	17
	PM BEGIN PEAK HR			5:00 PM			0	41	18	14	73					

T218

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, May 21, 19

LOCATION: Tustin
NORTH & SOUTH: Red Hill
EAST & WEST: Walnut


PROJECT #: SC2143
LOCATION #: 2
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

☒ Add U-Turns to Left Turns

		NORTHBOUND Red Hill			SOUTHBOUND Red Hill			EASTBOUND Walnut			WESTBOUND Walnut				U-TURNS				
	LANES:	NL 1	NT 3	NR 0	SL 1	ST 3	SR 0	EL 1	ET 2	ER 0	WL 2	WT 2	WR 0	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	8	89	27	18	159	13	23	75	50	31	38	15	546	4	0	0	0	4
	7:15 AM	17	112	14	24	211	22	42	92	92	38	66	30	760	2	0	0	0	2
	7:30 AM	27	139	35	23	303	24	44	99	113	57	59	36	959	2	0	0	0	2
	7:45 AM	52	156	26	30	261	38	44	127	101	48	69	33	985	4	0	0	0	4
	8:00 AM	37	112	23	25	260	31	28	76	82	47	57	20	798	6	0	0	0	6
	8:15 AM	12	69	26	25	239	26	24	89	74	43	55	24	706	2	0	0	0	2
	8:30 AM	17	110	25	30	236	17	21	83	59	40	46	24	708	4	0	0	0	4
	8:45 AM	24	89	15	19	243	13	14	76	56	34	43	24	650	2	1	0	0	3
	VOLUMES	194	876	191	194	1,912	184	240	717	627	338	433	206	6,112	26	1	0	0	27
	APPROACH %	15%	69%	15%	8%	83%	8%	15%	45%	40%	35%	44%	21%						
	APP/DEPART	1,261	/	1,323	2,290	/	2,903	1,584	/	1,101	977	/	785	0					
	BEGIN PEAK HR		7:15 AM																
	VOLUMES	133	519	98	102	1,035	115	158	394	388	190	251	119	3,502					
	APPROACH %	18%	69%	13%	8%	83%	9%	17%	42%	41%	34%	45%	21%						
	PEAK HR FACTOR		0.801			0.894			0.864			0.921		0.889					
	APP/DEPART	750	/	796	1,252	/	1,627	940	/	594	560	/	485	0					
PM	4:00 PM	71	342	26	30	133	24	38	50	30	53	210	33	1,040	3	1	0	0	4
	4:15 PM	59	305	27	25	104	27	19	76	21	54	176	38	931	2	1	0	0	3
	4:30 PM	82	326	19	30	94	34	32	68	20	42	152	43	942	5	0	0	0	5
	4:45 PM	69	338	14	31	89	29	27	74	24	51	162	47	955	5	0	0	0	5
	5:00 PM	55	375	20	22	97	41	24	70	30	53	164	39	990	3	0	0	0	3
	5:15 PM	67	311	15	39	125	37	26	68	25	53	186	59	1,011	4	0	0	0	4
	5:30 PM	87	361	30	37	96	50	28	62	28	55	164	44	1,042	0	0	0	0	0
	5:45 PM	75	334	34	36	99	46	32	66	26	41	161	34	984	3	0	0	0	3
	VOLUMES	565	2,692	185	250	837	288	226	534	204	402	1,375	337	7,895	25	2	0	0	27
	APPROACH %	16%	78%	5%	18%	61%	21%	23%	55%	21%	19%	65%	16%						
	APP/DEPART	3,442	/	3,257	1,375	/	1,468	964	/	967	2,114	/	2,203	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	284	1,381	99	134	417	174	110	266	109	202	675	176	4,027					
	APPROACH %	16%	78%	6%	18%	58%	24%	23%	55%	22%	19%	64%	17%						
	PEAK HR FACTOR		0.923			0.902			0.978			0.883		0.966					
	APP/DEPART	1,764	/	1,667	725	/	738	485	/	499	1,053	/	1,123	0					

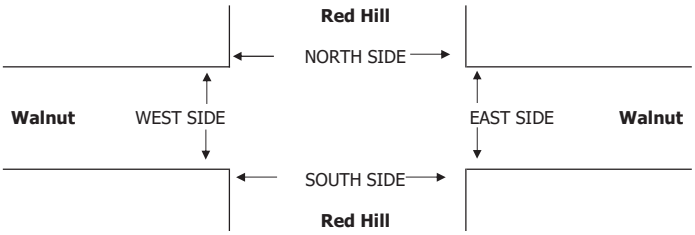

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	2	3	0	10	15	0	3	0	6	9	2	0	0	4	6
	7:15 AM	1	1	1	12	15	1	1	1	11	14	0	0	0	1	1
	7:30 AM	2	4	4	8	18	2	4	4	8	18	0	0	0	0	0
	7:45 AM	1	1	1	6	9	1	1	1	6	9	0	0	0	0	0
	8:00 AM	1	3	2	2	8	1	3	0	2	6	0	0	2	0	2
	8:15 AM	0	3	4	5	12	0	1	2	4	7	0	2	2	1	5
	8:30 AM	0	3	1	1	5	0	2	0	1	3	0	1	1	0	2
	8:45 AM	2	2	0	5	9	2	2	0	3	7	0	0	0	2	2
	TOTAL	9	20	13	49	91	7	17	8	41	73	2	3	5	8	18
	AM BEGIN PEAK HR			7:15 AM			5	9	6	27	47					
PM	4:00 PM	0	3	1	0	4	0	3	0	0	3	0	0	1	0	1
	4:15 PM	0	4	6	3	13	0	3	4	2	9	0	1	2	1	4
	4:30 PM	1	9	1	1	12	0	8	1	1	10	1	1	0	0	2
	4:45 PM	1	4	4	8	17	1	3	4	7	15	0	1	0	1	2
	5:00 PM	0	4	2	2	8	0	3	1	2	6	0	1	1	0	2
	5:15 PM	0	2	1	10	13	0	2	0	7	9	0	0	1	3	4
	5:30 PM	0	4	5	9	18	0	3	4	5	12	0	1	1	4	6
	5:45 PM	1	5	2	9	17	1	4	2	7	14	0	1	0	2	3
	TOTAL	3	35	22	42	102	2	29	16	31	78	1	6	6	11	24
	PM BEGIN PEAK HR			5:00 PM			1	12	7	21	41					

T218

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Tue, Apr 16, 19

LOCATION: Tustin
NORTH & SOUTH: Red Hill
EAST & WEST: Valencia


PROJECT #: SC2143
LOCATION #: 6
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

Add U-Turns to Left Turns

	NORTHBOUND Red Hill			SOUTHBOUND Red Hill			EASTBOUND Valencia			WESTBOUND Valencia				U-TURNS				
LANES:	NL 1	NT 4	NR 0	SL 1	ST 3	SR 0	EL 1	ET 1	ER 1	WL 2	WT 1	WR 1	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM 7:00 AM	7	50	14	12	169	16	8	14	15	38	72	10	425	0	0	0	0	0
7:15 AM	14	68	10	18	224	12	1	18	13	28	53	14	473	1	0	0	0	1
7:30 AM	17	76	28	29	222	16	4	28	18	48	78	21	585	0	0	0	0	0
7:45 AM	20	86	30	46	262	14	2	46	17	71	95	49	738	0	1	0	1	2
8:00 AM	17	78	22	20	286	14	6	34	14	64	90	32	677	1	0	0	0	1
8:15 AM	22	70	26	36	239	19	5	28	11	63	76	18	613	0	1	0	1	2
8:30 AM	17	87	25	16	234	21	6	29	11	51	81	21	599	1	0	0	0	1
8:45 AM	26	56	24	17	259	24	4	23	14	56	59	19	581	0	0	0	0	0
VOLUMES	140	571	179	194	1,895	136	36	220	113	419	604	184	4,691	3	2	0	2	7
APPROACH %	16%	64%	20%	9%	85%	6%	10%	60%	31%	35%	50%	15%						
APP/DEPART	890	/	793	2,225	/	2,428	369	/	593	1,207	/	877	0					
BEGIN PEAK HR		7:45 AM																
VOLUMES	76	321	103	118	1,021	68	19	137	53	249	342	120	2,627					
APPROACH %	15%	64%	21%	10%	85%	6%	9%	66%	25%	35%	48%	17%						
PEAK HR FACTOR		0.919			0.937			0.804			0.827		0.890					
APP/DEPART	500	/	462	1,207	/	1,323	209	/	358	711	/	484	0					
PM 4:00 PM	47	341	54	17	106	16	11	44	13	33	40	25	747	1	0	0	0	1
4:15 PM	83	378	36	18	106	18	12	31	10	20	50	32	794	0	0	0	0	0
4:30 PM	51	384	44	39	99	18	23	42	28	35	49	32	844	0	1	0	0	1
4:45 PM	35	365	66	29	122	17	16	39	19	20	42	35	805	0	1	0	0	1
5:00 PM	52	425	69	24	105	7	19	78	18	28	36	28	889	0	0	0	0	0
5:15 PM	79	446	88	15	107	6	11	28	17	33	42	16	888	1	0	0	0	1
5:30 PM	56	370	83	17	117	19	13	31	19	32	41	17	815	0	0	0	0	0
5:45 PM	73	407	68	30	108	8	9	27	9	18	53	19	829	1	0	0	0	1
VOLUMES	476	3,116	508	189	870	109	114	320	133	219	353	204	6,611	3	2	0	0	5
APPROACH %	12%	76%	12%	16%	74%	9%	20%	56%	23%	28%	45%	26%						
APP/DEPART	4,100	/	3,436	1,168	/	1,225	567	/	1,015	776	/	935	0					
BEGIN PEAK HR		4:30 PM																
VOLUMES	217	1,620	267	107	433	48	69	187	82	116	169	111	3,426					
APPROACH %	10%	77%	13%	18%	74%	8%	20%	55%	24%	29%	43%	28%						
PEAK HR FACTOR		0.858			0.875			0.735			0.853		0.963					
APP/DEPART	2,104	/	1,802	588	/	632	338	/	559	396	/	433	0					

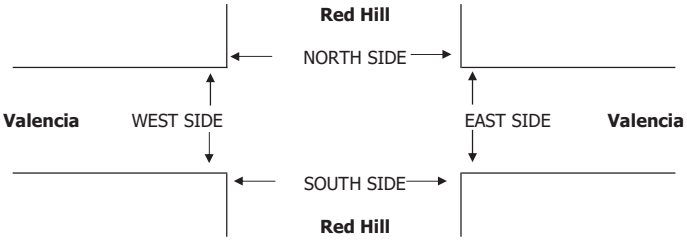

	PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM 7:00 AM	1	0	1	0	2	1	0	0	0	1	0	0	1	0	1
7:15 AM	0	0	0	1	1	0	0	0	1	1	0	0	0	0	0
7:30 AM	0	1	0	1	2	0	1	0	0	1	0	0	0	1	1
7:45 AM	0	1	0	1	2	0	0	0	1	1	0	1	0	0	1
8:00 AM	0	0	1	0	1	0	0	1	0	1	0	0	0	0	0
8:15 AM	1	0	0	2	3	0	0	0	2	2	1	0	0	0	1
8:30 AM	0	0	1	0	1	0	0	1	0	1	0	0	0	0	0
8:45 AM	0	2	0	2	4	0	1	0	2	3	0	1	0	0	1
TOTAL	2	4	3	7	16	1	2	2	6	11	1	2	1	1	5
AM BEGIN PEAK HR			7:45 AM			0	0	2	3	5					
PM 4:00 PM	2	0	3	0	5	1	0	0	0	1	1	0	3	0	4
4:15 PM	0	0	0	2	2	0	0	0	2	2	0	0	0	0	0
4:30 PM	1	0	2	1	4	0	0	0	0	0	1	0	2	1	4
4:45 PM	0	1	0	0	1	0	0	0	0	0	0	1	0	0	1
5:00 PM	1	1	0	1	3	0	1	0	0	1	1	0	0	1	2
5:15 PM	0	0	1	1	2	0	0	1	0	1	0	0	0	1	1
5:30 PM	0	0	2	1	3	0	0	2	1	3	0	0	0	0	0
5:45 PM	0	2	0	2	4	0	0	0	1	1	0	2	0	1	3
TOTAL	4	4	8	8	24	1	1	3	4	9	3	3	5	4	15
PM BEGIN PEAK HR			4:30 PM			0	1	1	0	2					

T218

INTERSECTION TURNING MOVEMENT COUNTS

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: Thu, May 23, 19

LOCATION: Tustin
NORTH & SOUTH: Tustin Ranch
EAST & WEST: Warner North


PROJECT #: SC2143
LOCATION #: 10
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N, ◄ W, E ►, S ▼

□ Add U-Turns to Left Turns

		NORTHBOUND Tustin Ranch			SOUTHBOUND Tustin Ranch			EASTBOUND Warner North			WESTBOUND Warner North				U-TURNS				
	LANES:	NL X	NT 3	NR 1	SL 2	ST 3	SR X	EL X	ET X	ER X	WL 3	WT X	WR 2	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL
AM	7:00 AM	0	51	40	75	177	0	0	0	0	53	0	59	455	0	0	0	0	0
	7:15 AM	0	52	46	65	226	0	0	0	0	73	0	40	502	0	0	0	0	0
	7:30 AM	0	70	59	58	284	0	0	0	0	97	0	30	598	0	0	0	0	0
	7:45 AM	0	71	66	134	342	0	0	0	0	163	0	44	820	0	0	0	0	0
	8:00 AM	0	67	62	118	322	0	0	0	0	138	0	30	737	0	0	0	0	0
	8:15 AM	0	82	65	100	327	0	0	0	0	148	0	51	773	0	0	0	0	0
	8:30 AM	0	49	67	99	285	0	0	0	0	136	0	47	683	0	0	0	0	0
	8:45 AM	0	62	55	90	271	0	0	0	0	143	0	46	667	0	0	0	0	0
	VOLUMES	0	504	460	739	2,234	0	0	0	0	951	0	347	5,235	0	0	0	0	0
	APPROACH %	0%	52%	48%	25%	75%	0%	0%	0%	0%	73%	0%	27%						
	APP/DEPART	964	/	851	2,973	/	3,185	0	/	1,199	1,298	/	0	0					
	BEGIN PEAK HR		7:45 AM																
	VOLUMES	0	269	260	451	1,276	0	0	0	0	585	0	172	3,013					
	APPROACH %	0%	51%	49%	26%	74%	0%	0%	0%	0%	77%	0%	23%						
	PEAK HR FACTOR		0.900			0.907			0.000			0.914		0.919					
	APP/DEPART	529	/	441	1,727	/	1,861	0	/	711	757	/	0	0					
PM	4:00 PM	0	342	151	73	104	0	0	0	0	86	0	99	855	0	0	0	0	0
	4:15 PM	0	337	174	74	107	0	0	0	0	98	0	95	885	1	0	0	0	1
	4:30 PM	0	369	169	83	102	0	0	0	0	98	0	105	926	2	0	0	0	2
	4:45 PM	0	355	170	73	115	0	0	0	0	98	0	113	924	0	0	0	0	0
	5:00 PM	0	429	228	82	126	0	0	0	0	112	0	120	1,097	0	0	0	0	0
	5:15 PM	0	346	222	97	136	0	0	0	0	108	0	111	1,020	0	0	0	0	0
	5:30 PM	0	407	248	87	121	0	0	0	0	142	0	96	1,101	0	0	0	0	0
	5:45 PM	0	424	248	81	127	0	0	0	0	112	0	101	1,093	0	0	0	0	0
	VOLUMES	0	3,009	1,610	650	938	0	0	0	0	854	0	840	7,904	3	0	0	0	3
	APPROACH %	0%	65%	35%	41%	59%	0%	0%	0%	0%	50%	0%	50%						
	APP/DEPART	4,622	/	3,849	1,588	/	1,795	0	/	2,260	1,694	/	0	0					
	BEGIN PEAK HR		5:00 PM																
	VOLUMES	0	1,606	946	347	510	0	0	0	0	474	0	428	4,311					
	APPROACH %	0%	63%	37%	40%	60%	0%	0%	0%	0%	53%	0%	47%						
	PEAK HR FACTOR		0.949			0.920			0.000			0.947		0.979					
	APP/DEPART	2,552	/	2,034	857	/	984	0	/	1,293	902	/	0	0					

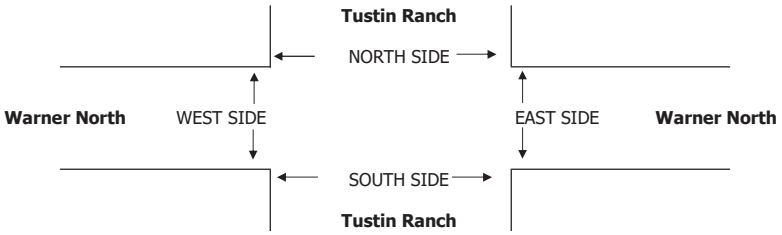

		PEDESTRIAN + BIKE CROSSINGS					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	7:00 AM	1	2	2	2	7	0	0	1	0	1	1	2	1	2	6
	7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:45 AM	1	0	0	1	2	0	0	0	0	0	1	0	0	1	2
	8:00 AM	0	0	0	1	1	0	0	0	0	0	0	0	0	1	1
	8:15 AM	0	1	2	0	3	0	0	2	0	2	0	1	0	0	1
	8:30 AM	0	1	1	1	3	0	0	1	0	1	0	1	0	1	2
	8:45 AM	0	0	1	0	1	0	0	1	0	1	0	0	0	0	0
	TOTAL	2	4	6	5	17	0	0	5	0	5	2	4	1	5	12
	AM BEGIN PEAK HR			7:45 AM			0	0	3	0	3					
PM	4:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:15 PM	1	1	0	0	2	0	1	0	0	1	1	0	0	0	1
	4:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	1	0	1	0	0	1	0	1	0	0	0	0	0
	5:15 PM	0	1	1	0	2	0	0	0	0	0	0	1	1	0	2
	5:30 PM	0	0	1	0	1	0	0	0	0	0	0	0	1	0	1
	5:45 PM	1	1	1	2	5	0	0	0	0	0	1	1	1	2	5
	TOTAL	2	3	4	2	11	0	1	1	0	2	2	2	3	2	9
	PM BEGIN PEAK HR			5:00 PM			0	0	1	0	1					

National Data & Surveying Services

Intersection Turning Movement Count

Location: Walnut Ave & Tustin Ranch Rd
City: Tustin
Control: Signalized

Project ID: 19-01171-001
Date: 8/27/2019

Total

NS/EW Streets:	Walnut Ave				Walnut Ave				Tustin Ranch Rd				Tustin Ranch Rd				
AM	NORTHBOUND				SOUTHBOUND				EASTBOUND				WESTBOUND				
	2	2	1	0	2	2	0	0	2	3	1	0	2	3	1	0	
	NL	NT	NR	NU	SL	ST	SR	SU	EL	ET	ER	EU	WL	WT	WR	WU	TOTAL
7:00 AM	14	26	41	0	78	87	55	0	19	91	39	0	151	239	35	0	875
7:15 AM	16	30	35	0	133	123	46	0	8	93	27	0	116	266	40	0	933
7:30 AM	31	52	15	0	125	122	94	0	17	94	43	0	133	383	63	0	1172
7:45 AM	31	33	36	0	115	133	100	0	15	125	72	0	103	383	93	0	1239
8:00 AM	35	40	35	0	71	110	67	0	15	99	56	0	117	392	44	0	1081
8:15 AM	47	53	47	0	58	97	68	0	15	78	43	0	130	447	43	1	1127
8:30 AM	24	41	34	0	57	115	59	0	15	83	42	0	131	437	43	0	1081
8:45 AM	30	62	42	0	58	120	59	0	17	85	51	0	152	345	24	0	1045
	NL	NT	NR	NU	SL	ST	SR	SU	EL	ET	ER	EU	WL	WT	WR	WU	TOTAL
TOTAL VOLUMES :	228	337	285	0	695	907	548	0	121	748	373	0	1033	2892	385	1	8553
APPROACH %'s :	26.82%	39.65%	33.53%	0.00%	32.33%	42.19%	25.49%	0.00%	9.74%	60.23%	30.03%	0.00%	23.96%	67.08%	8.93%	0.02%	
PEAK HR :	07:30 AM - 08:30 AM																TOTAL
PEAK HR VOL :	144	178	133	0	369	462	329	0	62	396	214	0	483	1605	243	1	4619
PEAK HR FACTOR :	0.766	0.840	0.707	0.000	0.738	0.868	0.823	0.000	0.912	0.792	0.743	0.000	0.908	0.898	0.653	0.250	0.932
	0.774				0.833				0.792				0.939				

PM	NORTHBOUND				SOUTHBOUND				EASTBOUND				WESTBOUND				
	2	2	1	0	2	2	0	0	2	3	1	0	2	3	1	0	
	NL	NT	NR	NU	SL	ST	SR	SU	EL	ET	ER	EU	WL	WT	WR	WU	TOTAL
4:00 PM	33	234	203	0	33	51	27	0	70	326	42	0	47	138	78	0	1282
4:15 PM	37	154	128	0	45	45	28	0	107	381	46	2	63	159	98	1	1294
4:30 PM	31	185	178	0	48	59	26	1	79	429	41	1	49	147	88	2	1364
4:45 PM	27	192	144	0	46	56	26	0	86	442	28	0	46	150	90	0	1333
5:00 PM	42	204	174	1	50	55	35	0	105	439	44	1	61	157	111	0	1479
5:15 PM	44	224	169	0	47	69	34	0	104	424	41	2	51	143	101	1	1454
5:30 PM	37	222	166	0	39	48	35	0	104	448	44	1	60	151	113	0	1468
5:45 PM	32	214	129	0	52	59	41	0	92	397	59	0	68	149	95	0	1387
	NL	NT	NR	NU	SL	ST	SR	SU	EL	ET	ER	EU	WL	WT	WR	WU	TOTAL
TOTAL VOLUMES :	283	1629	1291	1	360	442	252	1	747	3286	345	7	445	1194	774	4	11061
APPROACH %'s :	8.83%	50.84%	40.29%	0.03%	34.12%	41.90%	23.89%	0.09%	17.04%	74.94%	7.87%	0.16%	18.41%	49.40%	32.02%	0.17%	
PEAK HR :	05:00 PM - 06:00 PM																TOTAL
PEAK HR VOL :	155	864	638	1	188	231	145	0	405	1708	188	4	240	600	420	1	5788
PEAK HR FACTOR :	0.881	0.964	0.917	0.250	0.904	0.837	0.884	0.000	0.964	0.953	0.797	0.500	0.882	0.955	0.929	0.250	0.978
	0.949				0.928				0.965				0.958				

INTERSECTION TURNING MOVEMENT COUNTS AVERAGE SHEET

T319

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: AVERAGE FOR THREE DAYS

LOCATION: Santa Ana
NORTH & SOUTH: SB SR-55 Ramps
EAST & WEST: Irvine


PROJECT #: CMP2019
LOCATION #: 194
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER — ▲ N / ◄ W / E ► / S ▼

Add U-Turns to Left Turns

		NORTHBOUND (SB SR-55 Ramps)			SOUTHBOUND (SB SR-55 Ramps)			EASTBOUND (Irvine)			WESTBOUND (Irvine)				U-TURNS					Right-turn Overlap			
	LANES:	NL X	NT X	NR X	SL 1.5	ST X	SR 1.5	EL X	ET 3	ER 0	WL 1	WT 3	WR X	TOTAL	NB 0	SB 0	EB 0	WB 0	TTL	NRR X	SRR X	ERR X	WRR X
AM	6:00 AM	0	0	0	38	0	37	0	70	45	38	41	0	269	0	0	0	0	0	0	0	0	0
	6:15 AM	0	0	0	43	0	37	0	76	70	56	64	0	346	0	0	0	0	0	0	0	0	0
	6:30 AM	0	0	0	29	0	28	0	86	123	83	85	0	434	0	0	0	0	0	0	0	0	0
	6:45 AM	0	0	0	17	0	20	0	96	171	94	119	0	517	0	0	0	0	0	0	0	0	0
	7:00 AM	0	0	0	12	0	21	0	97	215	116	131	0	592	0	0	0	0	0	0	0	0	0
	7:15 AM	0	0	0	14	0	10	0	115	247	125	156	0	667	0	0	0	0	0	0	0	0	0
	7:30 AM	0	0	0	10	0	15	0	136	259	117	207	0	744	0	0	0	0	0	0	0	0	0
	7:45 AM	0	0	0	11	0	13	0	153	273	110	261	0	821	0	0	0	0	0	0	0	0	0
	8:00 AM	0	0	0	12	0	13	0	148	256	101	254	0	784	0	0	0	0	0	0	0	0	0
	8:15 AM	0	0	0	18	0	17	0	138	259	105	277	0	814	0	0	0	0	0	0	0	0	0
	8:30 AM	0	0	0	20	0	24	0	130	233	104	260	0	771	0	0	0	0	0	0	0	0	0
	8:45 AM	0	0	0	27	0	41	0	116	199	98	262	0	743	0	0	0	0	0	0	0	0	0
	VOLUMES	0	0	0	251	0	276	0	1,361	2,350	1,147	2,117	0	7,502	0	0	0	0	0	0	0	0	0
	APPROACH %	0%	0%	0%	48%	0%	52%	0%	37%	63%	35%	65%	0%										
	APP/DEPART	0	/	0	527	/	3,497	3,711	/	1,612	3,264	/	2,393										
	BEGIN PEAK HR		7:45 AM																				
	VOLUMES	0	0	0	61	0	67	0	569	1,021	420	1,052	0	3,190						0	0	0	0
	APPROACH %	0%	0%	0%	48%	0%	52%	0%	36%	64%	29%	71%	0%										
	PEAK HR FACTOR		0.000			0.727			0.933			0.963		0.971									
	APP/DEPART	0	/	0	128	/	1,441	1,590	/	630	1,472	/	1,119										
PM	03:00 PM	0	0	0	88	0	84	0	185	101	77	229	0	764	0	0	0	0	0	0	0	0	0
	3:15 PM	0	0	0	80	0	81	0	183	105	82	233	0	764	0	0	0	0	0	0	0	0	0
	3:30 PM	0	0	0	93	0	80	0	176	111	72	266	0	798	0	0	0	0	0	0	0	0	0
	3:45 PM	0	0	0	94	0	84	0	183	108	71	269	0	809	0	0	0	0	0	0	0	0	0
	4:00 PM	0	0	0	89	0	76	0	185	120	81	249	0	800	0	0	0	0	0	0	0	0	0
	4:15 PM	0	0	0	98	0	84	0	187	107	89	284	0	849	0	0	0	0	0	0	0	0	0
	4:30 PM	0	0	0	97	0	90	0	192	125	88	271	0	863	0	0	0	0	0	0	0	0	0
	4:45 PM	0	0	0	99	0	76	0	214	142	81	259	0	871	0	0	0	0	0	0	0	0	0
	5:00 PM	0	0	0	116	0	58	0	219	168	103	255	0	919	0	0	0	0	0	0	0	0	0
	5:15 PM	0	0	0	106	0	63	0	221	130	89	261	0	870	0	0	0	0	0	0	0	0	0
	5:30 PM	0	0	0	108	0	59	0	199	135	95	283	0	879	0	0	0	0	0	0	0	0	0
	5:45 PM	0	0	0	130	0	64	0	175	116	83	281	0	849	0	0	0	0	0	0	0	0	0
	6:00 PM	0	0	0	110	1	62	0	172	115	89	272	0	821	0	0	0	0	0	0	0	0	0
	6:15 PM	0	0	0	107	0	63	0	141	93	79	250	0	733	0	0	0	0	0	0	0	0	0
	6:30 PM	0	0	0	99	1	59	0	136	87	74	220	0	676	0	0	0	0	0	0	0	0	0
	6:45 PM	0	0	0	74	1	58	0	138	73	74	222	0	640	0	0	0	0	0	0	0	0	0
	VOLUMES	0	0	0	1,588	3	1,141	0	2,906	1,836	1,327	4,104	0	12,905	0	0	0	0	0	0	0	0	0
	APPROACH %	0%	0%	0%	58%	0%	42%	0%	61%	39%	24%	76%	0%										
	APP/DEPART	0	/	0	2,732	/	3,166	4,742	/	4,494	5,431	/	5,245										
	BEGIN PEAK HR		4:45 PM																				
	VOLUMES	0	0	0	429	0	256	0	853	575	368	1,058	0	3,539						0	0	0	0
	APPROACH %	0%	0%	0%	63%	0%	37%	0%	60%	40%	26%	74%	0%										
	PEAK HR FACTOR		0.000			0.979			0.922			0.943		0.963									
	APP/DEPART	0	/	0	685	/	943	1,428	/	1,282	1,426	/	1,314										

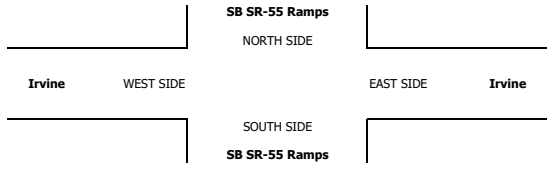

		ALL PED AND BIKE					PEDESTRIAN CROSSINGS					BICYCLE CROSSINGS				
		N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL	NS	SS	ES	WS	TOTAL
AM	6:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	6:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	6:30 AM	1	0	0	0	1	1	0	0	0	1	0	0	0	0	0
	6:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	7:00 AM	1	0	0	0	1	1	0	0	0	1	0	0	0	0	0
	7:15 AM	0	1	0	0	1	0	1	0	0	1	0	0	0	0	0
	7:30 AM	3	0	0	0	3	2	0	0	0	2	1	0	0	0	1
	7:45 AM	1	0	0	0	1	1	0	0	0	1	0	0	0	0	0
	8:00 AM	2	1	0	0	3	2	0	0	0	2	0	1	0	0	1
	8:15 AM	1	0	0	0	1	1	0	0	0	1	0	0	0	0	0
	8:30 AM	1	1	0	0	2	1	1	0	0	2	0	0	0	0	0
	8:45 AM	1	0	0	0	1	1	0	0	0	1	0	0	0	0	0
	TOTAL	11	3	0	0	14	10	2	0	0	12	1	1	0	0	2
	AM BEGIN PEAK HR			7:45 AM			5	1	0	0	6	0	1	0	0	1
PM	3:00 PM	1	1	0	0	2	1	1	0	0	2	0	0	0	0	0
	3:15 PM	2	0	0	0	2	0	0	0	0	0	2	0	0	0	2
	3:30 PM	0	2	0	0	2	0	1	0	0	1	0	1	0	0	1
	3:45 PM	1	2	0	0	3	1	2	0	0	3	0	0	0	0	0
	4:00 PM	1	0	0	0	1	1	0	0	0	1	0	0	0	0	0
	4:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	4:30 PM	2	0	0	0	2	1	0	0	0	1	1	0	0	0	1
	4:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:00 PM	1	1	0	0	2	1	1	0	0	2	0	0	0	0	0
	5:15 PM	1	0	0	0	1	1	0	0	0	1	0	0	0	0	0
	5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	5:45 PM	1	0	0	0	1	1	0	0	0	1	0	0	0	0	0
	6:00 PM	0	1	0	0	1	0	1	0	0	1	0	0	0	0	0
	6:15 PM	0	1	0	0	1	0	0	0	0	0	0	1	0	0	1
	6:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	6:45 PM	1	0	0	0	1	1	0	0	0	1	0	0	0	0	0
	TOTAL	11	8	0	0	19	8	6	0	0	14	3	2	0	0	5
	PM BEGIN PEAK HR			4:45 PM			2	1	0	0	3	0	0	0	0	0

INTERSECTION TURNING MOVEMENT COUNTS AVERAGE SHEET

T319

PREPARED BY: AimTD LLC. tel: 714 253 7888 cs@aimtd.com

DATE: AVERAGE FOR THREE DAYS

LOCATION: Tustin
NORTH & SOUTH: NB SR-55 Ramps
EAST & WEST: Irvine

PROJECT #: CMP2019
LOCATION #: 232
CONTROL: SIGNAL

NOTES:

AM / PM / MD / OTHER / OTHER

N / W / E / S

Add U-Turns to Left Turns

	NORTHBOUND (NB SR-55 Ramps)			SOUTHBOUND (NB SR-55 Ramps)			EASTBOUND (Irvine)			WESTBOUND (Irvine)			
LANES:	NL 1.5	NT X	NR 1.5	SL X	ST X	SR X	EL 1	ET 3	ER X	WL X	WT 3	WR 0	TOTAL
AM 6:00 AM	23	0	25	0	0	0	32	75	0	0	55	44	254
6:15 AM	39	0	18	0	0	0	34	82	0	0	80	54	307
6:30 AM	45	0	30	0	0	0	38	76	0	0	123	64	376
6:45 AM	65	0	59	0	0	0	37	75	0	0	149	92	477
7:00 AM	56	0	48	0	0	0	38	70	0	0	191	113	516
7:15 AM	59	0	72	0	0	0	48	80	0	0	223	126	608
7:30 AM	65	0	73	0	0	0	38	108	0	0	259	177	720
7:45 AM	93	0	110	0	0	0	51	113	0	0	278	175	820
8:00 AM	89	0	87	0	0	0	48	110	0	0	267	195	796
8:15 AM	105	0	93	0	0	0	48	106	0	0	277	185	814
8:30 AM	118	0	100	0	0	0	38	110	0	0	246	187	799
8:45 AM	122	0	110	0	0	0	41	100	0	0	238	145	756
VOLUMES	879	0	825	0	0	0	491	1,105	0	0	2,386	1,557	7,247
APPROACH %	52%	0%	48%	0%	0%	0%	31%	69%	0%	0%	61%	39%	
APP/DEPART	1,704	/	2,048	0	/	0	1,600	/	1,930	3,943	/	3,269	
BEGIN PEAK HR		7:45 AM											
VOLUMES	405	0	390	0	0	0	185	439	0	0	1,068	742	3,232
APPROACH %	51%	0%	49%	0%	0%	0%	30%	70%	0%	0%	59%	41%	
PEAK HR FACTOR		0.912			0.000			0.956			0.979		0.985
APP/DEPART	795	/	927	0	/	0	627	/	829	1,810	/	1,476	
PM 03:00 PM	65	2	80	0	0	0	84	186	0	0	238	176	831
3:15 PM	66	1	61	0	0	0	65	194	0	0	245	193	825
3:30 PM	67	1	56	0	0	0	74	192	0	0	268	224	882
3:45 PM	58	1	63	0	0	0	76	198	0	0	282	191	869
4:00 PM	65	2	61	0	0	0	78	191	0	0	261	188	846
4:15 PM	77	1	49	0	0	0	73	209	0	0	294	198	901
4:30 PM	60	2	55	0	0	0	71	215	0	0	297	179	879
4:45 PM	63	3	66	0	0	0	70	240	0	0	274	173	889
5:00 PM	60	5	69	0	0	0	67	263	0	0	293	189	946
5:15 PM	77	2	66	0	0	0	60	266	0	0	273	176	920
5:30 PM	102	4	82	0	0	0	50	255	0	0	275	181	949
5:45 PM	85	4	78	0	0	0	49	253	0	0	279	162	910
6:00 PM	83	3	72	0	0	0	57	223	0	0	277	169	884
6:15 PM	72	4	59	0	0	0	53	194	0	0	256	171	809
6:30 PM	72	1	65	0	0	0	58	175	0	0	221	172	764
6:45 PM	77	1	74	0	0	0	59	151	0	0	218	168	748
VOLUMES	1,149	37	1,056	0	0	0	1,044	3,405	0	0	4,251	2,910	13,892
APPROACH %	51%	2%	47%	0%	0%	0%	23%	76%	0%	0%	59%	41%	
APP/DEPART	2,242	/	3,991	0	/	0	4,489	/	4,461	7,161	/	5,440	
BEGIN PEAK HR		5:00 PM											
VOLUMES	324	15	295	0	0	0	226	1,037	0	0	1,120	708	3,734
APPROACH %	51%	2%	47%	0%	0%	0%	18%	82%	0%	0%	61%	39%	
PEAK HR FACTOR		0.843			0.000			0.952			0.948		0.982
APP/DEPART	634	/	949	0	/	0	1,272	/	1,332	1,828	/	1,453	

U-TURNS

	NB 0	SB 0	EB 0	WB 0	TTL
AM	0	0	4	0	4
PM	0	0	40	0	40

Right-turn Overlap

	NRR X	SRR X	ERR X	WRR X
AM	0	0	0	0
	0	0	0	0
PM	0	0	0	0
	0	0	0	0

NB SR-55 Ramps
NORTH SIDE

Irvine — WEST SIDE — EAST SIDE — Irvine

SOUTH SIDE
NB SR-55 Ramps

ALL PED AND BIKE

	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL
AM 6:00 AM	0	0	0	0	0
6:15 AM	0	0	0	0	0
6:30 AM	1	0	0	0	1
6:45 AM	0	0	0	0	0
7:00 AM	1	0	0	0	1
7:15 AM	0	1	0	0	1
7:30 AM	3	0	0	0	3
7:45 AM	2	1	0	0	3
8:00 AM	1	1	0	0	2
8:15 AM	1	0	0	0	1
8:30 AM	1	1	0	0	2
8:45 AM	1	0	0	0	1
TOTAL	11	4	0	0	15
AM BEGIN PEAK HR	7:45 AM				
PM 3:00 PM	2	1	0	0	3
3:15 PM	2	0	0	0	2
3:30 PM	1	2	0	0	3
3:45 PM	1	2	0	0	3
4:00 PM	1	0	0	0	1
4:15 PM	1	0	0	0	1
4:30 PM	1	0	0	0	1
4:45 PM	0	0	0	0	0
5:00 PM	0	2	0	0	2
5:15 PM	1	0	0	0	1
5:30 PM	0	0	0	0	0
5:45 PM	1	0	0	0	1
6:00 PM	0	0	0	0	0
6:15 PM	0	1	0	0	1
6:30 PM	0	0	0	0	0
6:45 PM	0	0	0	0	0
TOTAL	11	8	0	0	19
PM BEGIN PEAK HR	5:00 PM				

PEDESTRIAN CROSSINGS

	N SIDE	S SIDE	E SIDE	W SIDE	TOTAL
AM 6:00 AM	0	0	0	0	0
6:15 AM	0	0	0	0	0
6:30 AM	1	0	0	0	1
6:45 AM	0	0	0	0	0
7:00 AM	1	0	0	0	1
7:15 AM	0	1	0	0	1
7:30 AM	2	0	0	0	2
7:45 AM	1	1	0	0	2
8:00 AM	1	0	0	0	1
8:15 AM	1	0	0	0	1
8:30 AM	1	1	0	0	2
8:45 AM	1	0	0	0	1
TOTAL	9	3	0	0	12
AM BEGIN PEAK HR	4	2	0	0	6
PM 3:00 PM	2	1	0	0	3
3:15 PM	1	0	0	0	1
3:30 PM	0	1	0	0	1
3:45 PM	1	2	0	0	3
4:00 PM	1	0	0	0	1
4:15 PM	1	0	0	0	1
4:30 PM	1	0	0	0	1
4:45 PM	0	0	0	0	0
5:00 PM	0	1	0	0	1
5:15 PM	1	0	0	0	1
5:30 PM	0	0	0	0	0
5:45 PM	1	0	0	0	1
6:00 PM	0	0	0	0	0
6:15 PM	0	0	0	0	0
6:30 PM	0	0	0	0	0
6:45 PM	0	0	0	0	0
TOTAL	9	5	0	0	14
PM BEGIN PEAK HR	2	1	0	0	3

BICYCLE CROSSINGS

	NS	SS	ES	WS	TOTAL
AM 6:00 AM	0	0	0	0	0
6:15 AM	0	0	0	0	0
6:30 AM	0	0	0	0	0
6:45 AM	0	0	0	0	0
7:00 AM	0	0	0	0	0
7:15 AM	0	0	0	0	0
7:30 AM	1	0	0	0	1
7:45 AM	1	0	0	0	1
8:00 AM	0	1	0	0	1
8:15 AM	0	0	0	0	0
8:30 AM	0	0	0	0	0
8:45 AM	0	0	0	0	0
TOTAL	2	1	0	0	3
AM BEGIN PEAK HR	1	1	0	0	2
PM 3:00 PM	0	0	0	0	0
3:15 PM	1	0	0	0	1
3:30 PM	1	1	0	0	2
3:45 PM	0	0	0	0	0
4:00 PM	0	0	0	0	0
4:15 PM	0	0	0	0	0
4:30 PM	0	0	0	0	0
4:45 PM	0	0	0	0	0
5:00 PM	0	1	0	0	1
5:15 PM	0	0	0	0	0
5:30 PM	0	0	0	0	0
5:45 PM	0	0	0	0	0
6:00 PM	0	0	0	0	0
6:15 PM	0	1	0	0	1
6:30 PM	0	0	0	0	0
6:45 PM	0	0	0	0	0
TOTAL	2	3	0	0	5
PM BEGIN PEAK HR	0	1	0	0	1

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : FIRST STREET

Segment : WEST CITY LIMIT TO EUCLID ST

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/11/19

Day: Wednesday

Interval	WB				EB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	36	94	196	738	30	110	167	710	66	204	363	1,448
12:15	18		198		22		170		40		368	
12:30	20		178		28		187		48		365	
12:45	20		166		30		186		50		352	
01:00	18	62	170	710	12	41	163	702	30	103	333	1,412
01:15	17		172		10		172		27		344	
01:30	17		180		10		172		27		352	
01:45	10		188		9		195		19		383	
02:00	17	48	148	771	8	20	194	781	25	68	342	1,552
02:15	8		197		4		188		12		385	
02:30	10		212		3		176		13		388	
02:45	13		214		5		223		18		437	
03:00	8	38	224	860	8	53	210	848	16	91	434	1,708
03:15	8		208		12		220		20		428	
03:30	10		226		17		218		27		444	
03:45	12		202		16		200		28		402	
04:00	14	101	208	1,014	9	85	190	798	23	186	398	1,812
04:15	20		243		17		196		37		439	
04:30	36		280		25		196		61		476	
04:45	31		283		34		216		65		499	
05:00	26	184	276	1,178	47	194	260	950	73	378	536	2,128
05:15	37		303		31		252		68		555	
05:30	71		320		51		226		122		546	
05:45	50		279		65		212		115		491	
06:00	55	331	278	978	68	397	252	844	123	728	530	1,822
06:15	84		252		89		211		173		463	
06:30	78		246		98		197		176		443	
06:45	114		202		142		184		256		386	
07:00	118	685	214	743	182	865	170	576	300	1,550	384	1,319
07:15	136		151		204		138		340		289	
07:30	197		192		237		134		434		326	
07:45	234		186		242		134		476		320	
08:00	256	806	142	514	255	985	134	437	511	1,791	276	951
08:15	170		174		269		109		439		283	
08:30	182		102		233		92		415		194	
08:45	198		96		228		102		426		198	
09:00	175	737	110	414	152	641	101	351	327	1,378	211	765
09:15	188		108		188		100		376		208	
09:30	203		88		158		84		361		172	
09:45	171		108		143		66		314		174	
10:00	176	730	77	272	160	559	74	260	336	1,289	151	532
10:15	176		76		123		71		299		147	
10:30	201		53		138		56		339		109	
10:45	177		66		138		59		315		125	
11:00	176	709	51	203	178	696	58	160	354	1,405	109	363
11:15	146		50		168		33		314		83	
11:30	172		64		182		44		354		108	
11:45	215		38		168		25		383		63	
Totals	4,525		8,395		4,646		7,417		9,171		15,812	
Split%	49.3		53.1		50.7		46.9					
Day Totals		12,920				12,063				24,983		
Day Splits		51.7				48.3						
Peak Hour	07:30		04:45		07:30		04:45		07:30		04:45	
Volume	857		1,182		1,003		954		1,860		2,136	
Factor	0.84		0.92		0.93		0.92		0.91		0.96	

* Data File : D1909085

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

Location : EUCLID STREET
Segment : NCFADDEN AVE TO FIRST ST
Client : CITY SANTA ANA

Site: SANTA ANA
Date: 10/09/19
Day: Wednesday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	58	202	246	964	44	131	224	983	102	333	470	1,947
12:15	52		242		34		258		86		500	
12:30	49		230		36		264		85		494	
12:45	43		246		17		237		60		483	
01:00	56	121	210	968	14	76	226	1,049	70	197	436	2,017
01:15	28		222		18		259		46		481	
01:30	18		266		26		280		44		546	
01:45	19		270		18		284		37		554	
02:00	20	72	316	1,292	12	68	266	1,194	32	140	582	2,486
02:15	15		288		23		284		38		572	
02:30	19		340		17		322		36		662	
02:45	18		348		16		322		34		670	
03:00	12	72	369	1,577	15	129	284	1,135	27	201	653	2,712
03:15	22		377		27		277		49		654	
03:30	20		424		40		322		60		746	
03:45	18		407		47		252		65		659	
04:00	26	126	396	1,693	46	347	302	1,177	72	473	698	2,870
04:15	30		418		60		278		90		696	
04:30	26		451		113		296		139		747	
04:45	44		428		128		301		172		729	
05:00	49	305	434	1,783	114	724	328	1,282	163	1,029	762	3,065
05:15	74		457		154		318		228		775	
05:30	82		446		198		312		280		758	
05:45	100		446		258		324		358		770	
06:00	88	576	411	1,520	197	1,327	337	1,167	285	1,903	748	2,687
06:15	123		393		288		294		411		687	
06:30	179		360		363		274		542		634	
06:45	186		356		479		262		665		618	
07:00	228	1,179	346	1,268	462	2,083	215	762	690	3,262	561	2,030
07:15	275		323		552		186		827		509	
07:30	299		326		593		201		892		527	
07:45	377		273		476		160		853		433	
08:00	314	1,212	206	759	474	1,930	171	613	788	3,142	377	1,372
08:15	352		211		521		164		873		375	
08:30	292		182		494		142		786		324	
08:45	254		160		441		136		695		296	
09:00	258	935	188	664	359	1,319	142	510	617	2,254	330	1,174
09:15	220		144		362		134		582		278	
09:30	240		148		310		127		550		275	
09:45	217		184		288		107		505		291	
10:00	213	829	172	547	234	965	100	356	447	1,794	272	903
10:15	208		158		252		100		460		258	
10:30	224		112		224		86		448		198	
10:45	184		105		255		70		439		175	
11:00	214	908	94	324	200	862	66	243	414	1,770	160	567
11:15	248		77		200		66		448		143	
11:30	226		92		232		60		458		152	
11:45	220		61		230		51		450		112	
Totals	6,537		13,359		9,961		10,471		16,498		23,830	
Split%	39.6		56.1		60.4		43.9					
Day Totals		19,896				20,432				40,328		
Day Splits		49.3				50.7						
Peak Hour	07:30		05:00		07:15		05:15		07:30		05:00	
Volume	1,342		1,783		2,095		1,291		3,406		3,065	
Factor	0.89		0.98		0.88		0.96		0.95		0.99	

* Data File : D1909059

Thursday, October 03, 2019 Location: Santa Ana PROJECT:

ADT227 SEVENTEENTH ST from HARBOR BL to CLINTON ST. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:30			23		18			12:00			189		248		
0:15			24		19			12:15			191		232		
0:30			21		20			12:30			192		214		
0:45			16	84	14	71	155	12:45			182	754	223	917	1671
1:00			15		15			13:00			213		204		
1:15			27		11			13:15			194		230		
1:30			19		14			13:30			184		265		
1:45			15	76	9	49	125	13:45			220	811	245	944	1755
2:00			12		9			14:00			255		241		
2:15			11		7			14:15			258		234		
2:30			8		10			14:30			292		253		
2:45			9	40	11	37	77	14:45			277	1082	271	999	2081
3:00			10		9			15:00			229		256		
3:15			11		13			15:15			242		270		
3:30			9		8			15:30			275		263		
3:45			8	38	15	45	83	15:45			232	978	291	1080	2058
4:00			12		17			16:00			256		304		
4:15			20		23			16:15			262		289		
4:30			16		26			16:30			294		293		
4:45			24	72	32	98	170	16:45			307	1119	303	1189	2308
5:00			32		49			17:00			302		313		
5:15			59		57			17:15			321		235		
5:30			68		65			17:30			276		241		
5:45			83	242	76	247	489	17:45			312	1211	285	1074	2285
6:00			103		85			18:00			300		274		
6:15			100		95			18:15			311		245		
6:30			167		112			18:30			268		231		
6:45			209	579	146	438	1017	18:45			238	1117	234	984	2101
7:00			285		159			19:00			215		203		
7:15			307		193			19:15			182		214		
7:30			366		256			19:30			152		201		
7:45			407	1365	283	891	2256	19:45			143	692	184	802	1494
8:00			393		274			20:00			117		174		
8:15			332		242			20:15			132		170		
8:30			319		249			20:30			114		182		
8:45			267	1311	232	997	2308	20:45			125	488	167	693	1181
9:00			196		195			21:00			103		142		
9:15			217		185			21:15			95		132		
9:30			204		174			21:30			115		95		
9:45			234	851	177	731	1582	21:45			94	407	112	481	888
10:00			222		184			22:00			88		76		
10:15			187		204			22:15			58		81		
10:30			199		213			22:30			53		53		
10:45			212	820	206	807	1627	22:45			60	259	58	268	527
11:00			189		201			23:00			46		43		
11:15			203		204			23:15			40		26		
11:30			199		216			23:30			32		31		
11:45			217	808	224	845	1653	23:45			28	146	20	120	266
Total Vol.				6286		5256	**11542**					9064		9551	**18615**

Daily Totals

NB	SB	EB	WB	Combined
		15350	14807	**30157**

			AM				PM		
Split %			54.5%	45.5%	**38.3%**		48.7%	51.3%	**61.7%**
Peak Hour	0:30	0:30	7:30	7:30	**7:30**		16:30	16:15	**16:30**
Volume			1498	1055	**2553**		1224	1198	**2368**
P.H.F.			0.92	0.93	**0.93**		0.95	0.96	**0.96**

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : HARBOR BOULEVARD — Site: SANTA ANA

Segment : HAZARD AVE TO WESTMINSTER AVE — Date: 10/03/19

Client : CITY SANTA ANA — Day: Thursday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	92	310	350	1,400	85	314	390	1,421	177	624	740	2,821
12:15	72		382		72		334		144		716	
12:30	84		316		84		361		168		677	
12:45	62		352		73		336		135		688	
01:00	68	206	422	1,653	65	198	354	1,420	133	404	776	3,073
01:15	48		418		40		366		88		784	
01:30	50		372		43		354		93		726	
01:45	40		441		50		346		90		787	
02:00	50	219	446	2,014	40	153	386	1,525	90	372	832	3,539
02:15	69		482		40		354		109		836	
02:30	54		552		39		379		93		931	
02:45	46		534		34		406		80		940	
03:00	50	223	428	1,995	38	251	380	1,504	88	474	808	3,499
03:15	52		526		48		380		100		906	
03:30	65		551		69		380		134		931	
03:45	56		490		96		364		152		854	
04:00	70	404	526	1,970	68	452	368	1,556	138	856	894	3,526
04:15	90		528		76		362		166		890	
04:30	124		457		139		396		263		853	
04:45	120		459		169		430		289		889	
05:00	133	700	461	1,833	144	816	440	1,675	277	1,516	901	3,508
05:15	178		460		184		426		362		886	
05:30	218		432		232		418		450		850	
05:45	171		480		256		391		427		871	
06:00	200	1,022	454	1,777	245	1,441	350	1,327	445	2,463	804	3,104
06:15	252		452		299		323		551		775	
06:30	262		432		416		346		678		778	
06:45	308		439		481		308		789		747	
07:00	295	1,392	394	1,388	538	2,071	322	1,324	833	3,463	716	2,712
07:15	356		362		531		375		887		737	
07:30	391		330		522		333		913		663	
07:45	350		302		480		294		830		596	
08:00	404	1,409	298	1,060	478	1,943	278	1,045	882	3,352	576	2,105
08:15	344		280		498		280		842		560	
08:30	324		228		493		258		817		486	
08:45	337		254		474		229		811		483	
09:00	302	1,082	263	851	396	1,736	239	934	698	2,818	502	1,785
09:15	260		248		462		254		722		502	
09:30	264		194		436		247		700		441	
09:45	256		146		442		194		698		340	
10:00	301	1,200	189	658	354	1,412	231	709	655	2,612	420	1,367
10:15	327		162		380		190		707		352	
10:30	308		146		368		150		676		296	
10:45	264		161		310		138		574		299	
11:00	294	1,268	146	473	328	1,337	154	530	622	2,605	300	1,003
11:15	293		108		337		126		630		234	
11:30	372		116		314		118		686		234	
11:45	309		103		358		132		667		235	
Totals	9,435		17,072		12,124		14,970		21,559		32,042	
Split%	43.8		53.3		56.2		46.7					
Day Totals		26,507				27,094				53,601		
Day Splits		49.5				50.5						
Peak Hour	07:15		03:30		06:45		04:45		07:15		02:30	
Volume	1,501		2,095		2,072		1,714		3,512		3,585	
Factor	0.93		0.95		0.96		0.97		0.96		0.95	

* Data File : D1909140

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : FIRST STREET

Segment : HARBOR BLVD TO FAIRVIEW ST

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/11/19

Day: Wednesday

Interval	EB				WB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	42	129	196	749	38	124	238	843	80	253	434	1,592
12:15	30		185		34		222		64		407	
12:30	24		188		26		169		50		357	
12:45	33		180		26		214		59		394	
01:00	24	79	214	890	29	90	220	924	53	169	434	1,814
01:15	22		228		17		240		39		468	
01:30	15		216		32		222		47		438	
01:45	18		232		12		242		30		474	
02:00	17	74	248	982	14	70	213	962	31	144	461	1,944
02:15	21		228		19		258		40		486	
02:30	18		238		17		225		35		463	
02:45	18		268		20		266		38		534	
03:00	16	84	268	1,096	18	80	267	1,186	34	164	535	2,282
03:15	16		266		17		318		33		584	
03:30	20		280		20		280		40		560	
03:45	32		282		25		321		57		603	
04:00	32	178	274	1,115	26	168	326	1,453	58	346	600	2,568
04:15	36		279		24		374		60		653	
04:30	56		282		54		372		110		654	
04:45	54		280		64		381		118		661	
05:00	56	382	278	1,164	55	304	382	1,520	111	686	660	2,684
05:15	68		302		79		398		147		700	
05:30	114		298		84		354		198		652	
05:45	144		286		86		386		230		672	
06:00	124	780	249	983	102	517	360	1,278	226	1,297	609	2,261
06:15	160		256		115		342		275		598	
06:30	234		254		141		322		375		576	
06:45	262		224		159		254		421		478	
07:00	336	1,556	236	824	156	835	253	889	492	2,391	489	1,713
07:15	384		198		204		208		588		406	
07:30	368		202		227		224		595		426	
07:45	468		188		248		204		716		392	
08:00	362	1,334	164	585	274	862	158	603	636	2,196	322	1,188
08:15	334		160		180		160		514		320	
08:30	326		126		204		147		530		273	
08:45	312		135		204		138		516		273	
09:00	252	914	137	484	175	730	118	477	427	1,644	255	961
09:15	232		134		188		127		420		261	
09:30	228		109		202		120		430		229	
09:45	202		104		165		112		367		216	
10:00	166	710	94	348	164	734	96	316	330	1,444	190	664
10:15	168		111		196		82		364		193	
10:30	216		67		186		70		402		137	
10:45	160		76		188		68		348		144	
11:00	200	785	66	202	176	815	54	205	376	1,600	120	407
11:15	176		58		206		65		382		123	
11:30	204		36		229		46		433		82	
11:45	205		42		204		40		409		82	
Totals	7,005		9,422		5,329		10,656		12,334		20,078	
Split%	56.8		46.9		43.2		53.1					
Day Totals		16,427				15,985				32,412		
Day Splits		50.7				49.3						
Peak Hour	07:15		05:00		07:15		04:30		07:15		05:00	
Volume	1,582		1,164		953		1,533		2,535		2,684	
Factor	0.85		0.96		0.87		0.96		0.89		0.96	

Data File : D1909088

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : EDINGER AVENUE

Segment : SANTA ANA RIVER TO FAIRVIEW ST

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/17/19

Day: Tuesday

Interval	EB				WB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	21	88	144	628	28	83	176	659	49	171	320	1,287
12:15	35		165		17		162		52		327	
12:30	18		167		14		162		32		329	
12:45	14		152		24		159		38		311	
01:00	11	49	176	794	10	53	144	685	21	102	320	1,479
01:15	17		169		18		157		35		326	
01:30	11		231		11		186		22		417	
01:45	10		218		14		198		24		416	
02:00	8	32	185	881	5	40	200	870	13	72	385	1,751
02:15	4		202		8		205		12		407	
02:30	16		196		9		206		25		402	
02:45	4		298		18		259		22		557	
03:00	5	51	291	1,015	16	61	253	1,096	21	112	544	2,111
03:15	12		270		10		291		22		561	
03:30	19		216		14		268		33		484	
03:45	15		238		21		284		36		522	
04:00	21	151	266	1,009	11	137	304	1,244	32	288	570	2,253
04:15	31		232		20		326		51		558	
04:30	48		264		46		294		94		558	
04:45	51		247		60		320		111		567	
05:00	40	298	250	994	42	255	336	1,367	82	553	586	2,361
05:15	74		290		64		343		138		633	
05:30	78		224		70		332		148		556	
05:45	106		230		79		356		185		586	
06:00	104	578	212	799	63	489	310	1,167	167	1,067	522	1,966
06:15	130		214		111		319		241		533	
06:30	158		175		144		264		302		439	
06:45	186		198		171		274		357		472	
07:00	212	1,072	169	692	168	956	210	737	380	2,028	379	1,429
07:15	306		185		230		190		536		375	
07:30	298		185		268		191		566		376	
07:45	256		153		290		146		546		299	
08:00	274	1,018	184	673	249	821	162	564	523	1,839	346	1,237
08:15	262		168		224		156		486		324	
08:30	262		188		188		124		450		312	
08:45	220		133		160		122		380		255	
09:00	200	699	125	443	147	526	108	408	347	1,225	233	851
09:15	189		128		130		112		319		240	
09:30	172		95		111		110		283		205	
09:45	138		95		138		78		276		173	
10:00	147	668	82	240	162	638	89	256	309	1,306	171	496
10:15	137		70		156		70		293		140	
10:30	206		50		159		52		365		102	
10:45	178		38		161		45		339		83	
11:00	139	615	42	161	178	635	52	167	317	1,250	94	328
11:15	170		38		162		43		332		81	
11:30	142		48		151		39		293		87	
11:45	164		33		144		33		308		66	
Totals	5,319		8,329		4,694		9,220		10,013		17,549	
Split%	53.1		47.5		46.9		52.5					
Day Totals		13,648				13,914				27,562		
Day Splits		49.5				50.5						
Peak Hour	07:15		02:45		07:15		05:00		07:15		05:00	
Volume	1,134		1,075		1,037		1,367		2,171		2,361	
Factor	0.93		0.90		0.89		0.96		0.96		0.93	

* Data File : D1909049

Attachment 8

Thursday, October 10, 2019 Location: Santa Ana PROJECT:

ADT259 WARNER AVE from SANTA ANA RIVER to FAIRVIEW ST. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:30			37		21			12:00			194		204		
0:15			26		23			12:15			180		201		
0:30			24		20			12:30			211		176		
0:45			32	119	17	81	200	12:45			201	786	152	733	1519
1:00			22		8			13:00			212		204		
1:15			8		9			13:15			200		185		
1:30			14		11			13:30			231		211		
1:45			20	64	13	41	105	13:45			214	857	270	870	1727
2:00			15		9			14:00			259		308		
2:15			13		11			14:15			265		324		
2:30			14		8			14:30			290		386		
2:45			14	56	14	42	98	14:45			257	1071	337	1355	2426
3:00			17		13			15:00			231		377		
3:15			20		20			15:15			233		357		
3:30			21		12			15:30			238		398		
3:45			31	89	15	60	149	15:45			234	936	387	1519	2455
4:00			34		23			16:00			271		348		
4:15			43		14			16:15			253		346		
4:30			65		45			16:30			246		397		
4:45			63	205	101	183	388	16:45			303	1073	365	1456	2529
5:00			99		69			17:00			237		391		
5:15			123		91			17:15			216		418		
5:30			148		114			17:30			242		447		
5:45			240	610	126	400	1010	17:45			224	919	426	1682	2601
6:00			144		137			18:00			251		379		
6:15			145		123			18:15			214		336		
6:30			170		164			18:30			198		311		
6:45			250	709	189	613	1322	18:45			201	864	220	1246	2110
7:00			304		176			19:00			181		212		
7:15			400		223			19:15			157		156		
7:30			387		242			19:30			153		161		
7:45			375	1466	254	895	2361	19:45			144	635	154	683	1318
8:00			398		220			20:00			121		117		
8:15			408		245			20:15			149		137		
8:30			346		213			20:30			127		124		
8:45			334	1486	225	903	2389	20:45			103	500	114	492	992
9:00			284		198			21:00			125		87		
9:15			203		156			21:15			92		76		
9:30			214		158			21:30			109		82		
9:45			225	926	196	708	1634	21:45			116	442	54	299	741
10:00			200		185			22:00			76		56		
10:15			189		168			22:15			64		46		
10:30			192		157			22:30			53		38		
10:45			168	749	156	666	1415	22:45			47	240	41	181	421
11:00			176		147			23:00			67		57		
11:15			159		157			23:15			46		38		
11:30			188		166			23:30			41		52		
11:45			180	703	174	644	1347	23:45			34	188	37	184	372
Total Vol.				7182		5236	**12418**					8511		10700	**19211**

Daily Totals

NB	SB	EB	WB	Combined
		15693	15936	**31629**

			AM			PM		
Split %			57.8%	42.2%	**39.3%**	44.3%	55.7%	**60.7%**
Peak Hour	0:30	0:30	7:30	7:30	**7:30**	16:00	17:00	**16:45**
Volume			1568	961	**2529**	1073	1682	**2619**
P.H.F.			0.96	0.95	**0.97**	0.89	0.94	**0.95**

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : HARBOR BOULEVARD

Segment : MACARTHUR TO SEGERSTROM

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 10/03/19

Day: Thursday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	67	199	312	1,356	41	122	402	1,498	108	321	714	2,854
12:15	54		340		24		373		78		713	
12:30	34		350		34		373		68		723	
12:45	44		354		23		350		67		704	
01:00	34	116	314	1,472	20	82	361	1,358	54	198	675	2,830
01:15	28		361		19		331		47		692	
01:30	26		382		28		356		54		738	
01:45	28		415		15		310		43		725	
02:00	25	100	385	1,670	16	78	314	1,316	41	178	699	2,986
02:15	26		440		13		330		39		770	
02:30	27		463		26		350		53		813	
02:45	22		382		23		322		45		704	
03:00	17	92	475	1,874	24	137	302	1,218	41	229	777	3,092
03:15	20		445		26		338		46		783	
03:30	26		498		41		289		67		787	
03:45	29		456		46		289		75		745	
04:00	20	134	515	1,899	56	408	308	1,239	76	542	823	3,138
04:15	22		473		70		282		92		755	
04:30	28		472		116		339		144		811	
04:45	64		439		166		310		230		749	
05:00	63	336	430	1,763	115	782	298	1,203	178	1,118	728	2,966
05:15	75		447		152		298		227		745	
05:30	90		432		221		316		311		748	
05:45	108		454		294		291		402		745	
06:00	116	561	488	1,876	236	1,432	280	1,016	352	1,993	768	2,892
06:15	121		458		310		260		431		718	
06:30	150		454		400		242		550		696	
06:45	174		476		486		234		660		710	
07:00	174	870	444	1,525	536	2,323	216	816	710	3,193	660	2,341
07:15	216		383		606		204		822		587	
07:30	204		388		599		210		803		598	
07:45	276		310		582		186		858		496	
08:00	282	1,104	239	905	575	2,323	192	666	857	3,427	431	1,571
08:15	291		218		574		177		865		395	
08:30	275		210		568		167		843		377	
08:45	256		238		606		130		862		368	
09:00	232	892	193	815	487	1,885	140	510	719	2,777	333	1,325
09:15	226		227		516		142		742		369	
09:30	228		203		455		122		683		325	
09:45	206		192		427		106		633		298	
10:00	250	930	226	667	362	1,490	103	339	612	2,420	329	1,006
10:15	226		193		376		104		602		297	
10:30	222		124		338		70		560		194	
10:45	232		124		414		62		646		186	
11:00	264	1,142	100	463	376	1,415	56	241	640	2,557	156	704
11:15	304		103		320		69		624		172	
11:30	278		114		353		56		631		170	
11:45	296		146		366		60		662		206	
Totals	6,476		16,285		12,477		11,420		18,953		27,705	
Split%	34.2		58.8		65.8		41.2					
Day Totals		22,761				23,897				46,658		
Day Splits		48.8				51.2						
Peak Hour	11:00		03:30		07:15		12:00		08:00		03:15	
Volume	1,142		1,942		2,362		1,498		3,427		3,138	
Factor	0.94		0.94		0.97		0.93		0.99		0.95	

Data File : D1909133

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

Location : FAIRVIEW STREET
Segment : MCFADDEN AVE TO FIRST ST
Client : CITY SANTA ANA

Site: SANTA ANA
Date: 10/01/19
Day: Tuesday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	65	195	223	970	48	148	202	829	113	343	425	1,799
12:15	63		244		41		240		104		484	
12:30	37		235		29		202		66		437	
12:45	30		268		30		185		60		453	
01:00	26	105	264	1,148	23	100	192	853	49	205	456	2,001
01:15	28		287		31		205		59		492	
01:30	25		280		19		226		44		506	
01:45	26		317		27		230		53		547	
02:00	25	102	366	1,576	21	84	238	987	46	186	604	2,563
02:15	29		376		25		196		54		572	
02:30	18		405		16		272		34		677	
02:45	30		429		22		281		52		710	
03:00	27	121	394	1,672	25	159	277	1,011	52	280	671	2,683
03:15	26		425		30		256		56		681	
03:30	42		414		50		256		92		670	
03:45	26		439		54		222		80		661	
04:00	54	306	434	1,769	50	396	260	1,180	104	702	694	2,949
04:15	56		446		68		316		124		762	
04:30	94		431		110		308		204		739	
04:45	102		458		168		296		270		754	
05:00	98	568	439	1,784	152	865	360	1,463	250	1,433	799	3,247
05:15	150		475		189		350		339		825	
05:30	156		448		232		370		388		818	
05:45	164		422		292		383		456		805	
06:00	150	856	470	1,737	245	1,230	368	1,298	395	2,086	838	3,035
06:15	184		451		228		330		412		781	
06:30	246		434		349		335		595		769	
06:45	276		382		408		265		684		647	
07:00	314	1,491	372	1,346	444	1,797	286	982	758	3,288	658	2,328
07:15	391		352		458		260		849		612	
07:30	424		318		476		202		900		520	
07:45	362		304		419		234		781		538	
08:00	346	1,155	266	976	423	1,562	207	710	769	2,717	473	1,686
08:15	299		258		454		180		753		438	
08:30	272		242		360		163		632		405	
08:45	238		210		325		160		563		370	
09:00	210	902	194	753	298	1,168	154	579	508	2,070	348	1,332
09:15	238		194		271		158		509		352	
09:30	210		195		334		118		544		313	
09:45	244		170		265		149		509		319	
10:00	238	922	157	536	288	1,021	122	414	526	1,943	279	950
10:15	202		162		260		117		462		279	
10:30	235		116		244		82		479		198	
10:45	247		101		229		93		476		194	
11:00	222	930	104	346	246	815	82	266	468	1,745	186	612
11:15	232		84		206		78		438		162	
11:30	244		92		177		59		421		151	
11:45	232		66		186		47		418		113	
Totals	7,653		14,613		9,345		10,572		16,998		25,185	
Split%	45.0		58.0		55.0		42.0					
Day Totals		22,266				19,917				42,183		
Day Splits		52.8				47.2						
Peak Hour	07:15		04:45		07:00		05:15		07:15		05:15	
Volume	1,523		1,820		1,797		1,471		3,299		3,286	
Factor	0.90		0.96		0.94		0.96		0.92		0.98	

Data File : D1909072

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : FIRST STREET

Segment : FAIRVIEW ST TO RAITT ST

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/11/19

Day: Wednesday

Interval	WB				EB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	50	149	268	1,002	50	161	230	914	100	310	498	1,916
12:15	41		266		50		217		91		483	
12:30	27		222		29		233		56		455	
12:45	31		246		32		234		63		480	
01:00	26	96	266	1,099	31	90	250	1,006	57	186	516	2,105
01:15	28		270		20		266		48		536	
01:30	30		289		21		232		51		521	
01:45	12		274		18		258		30		532	
02:00	25	85	292	1,206	15	74	276	1,054	40	159	568	2,260
02:15	20		316		17		248		37		564	
02:30	23		292		24		258		47		550	
02:45	17		306		18		272		35		578	
03:00	18	96	326	1,396	15	88	300	1,173	33	184	626	2,569
03:15	15		364		9		307		24		671	
03:30	30		350		26		294		56		644	
03:45	33		356		38		272		71		628	
04:00	26	176	372	1,563	30	205	296	1,192	56	381	668	2,755
04:15	43		376		40		300		83		676	
04:30	52		404		67		304		119		708	
04:45	55		411		68		292		123		703	
05:00	68	348	385	1,506	82	433	288	1,274	150	781	673	2,780
05:15	88		371		86		340		174		711	
05:30	92		360		115		318		207		678	
05:45	100		390		150		328		250		718	
06:00	106	582	334	1,328	155	842	284	1,101	261	1,424	618	2,429
06:15	128		364		185		276		313		640	
06:30	160		326		232		263		392		589	
06:45	188		304		270		278		458		582	
07:00	211	1,049	256	933	340	1,568	254	885	551	2,617	510	1,818
07:15	266		234		430		228		696		462	
07:30	274		237		398		215		672		452	
07:45	298		206		400		188		698		394	
08:00	250	899	195	695	410	1,426	172	652	660	2,325	367	1,347
08:15	210		182		357		178		567		360	
08:30	227		160		335		155		562		315	
08:45	212		158		324		147		536		305	
09:00	218	873	168	599	285	1,040	128	482	503	1,913	296	1,081
09:15	215		160		262		132		477		292	
09:30	232		153		249		124		481		277	
09:45	208		118		244		98		452		216	
10:00	211	872	118	357	206	822	104	334	417	1,694	222	691
10:15	231		96		188		82		419		178	
10:30	232		65		244		80		476		145	
10:45	198		78		184		68		382		146	
11:00	214	968	72	217	214	877	70	230	428	1,845	142	447
11:15	256		55		205		66		461		121	
11:30	262		42		216		54		478		96	
11:45	236		48		242		40		478		88	
Totals	6,193		11,901		7,626		10,297		13,819		22,198	
Split%	44.8		53.6		55.2		46.4					
Day Totals		18,094				17,923				36,017		
Day Splits		50.2				49.8						
Peak Hour	07:15		04:15		07:15		05:00		07:15		04:30	
Volume	1,088		1,576		1,638		1,274		2,726		2,795	
Factor	0.91		0.96		0.95		0.94		0.98		0.98	

* Data File : D1909089

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : BRISTOL STREET

Segment : SEVENTEENTH ST TO SANTA CLARA

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/17/19

Day: Tuesday

Interval	SB				NB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	64	227	298	1,112	56	165	289	1,182	120	392	587	2,294
12:15	70		248		52		274		122		522	
12:30	39		288		23		321		62		609	
12:45	54		278		34		298		88		576	
01:00	58	179	274	1,147	22	111	312	1,288	80	290	586	2,435
01:15	48		288		27		316		75		604	
01:30	34		285		34		318		68		603	
01:45	39		300		28		342		67		642	
02:00	34	126	258	1,153	31	104	316	1,023	65	230	574	2,176
02:15	22		301		26		237		48		538	
02:30	36		292		24		214		60		506	
02:45	34		302		23		256		57		558	
03:00	28	102	340	1.457	28	173	257	1.238	56	275	597	2.695
03:15	22		363		34		231		56		594	
03:30	26		368		51		366		77		734	
03:45	26		386		60		384		86		770	
04:00	34	264	433	1,692	74	513	394	1,532	108	777	827	3,224
04:15	58		398		113		372		171		770	
04:30	74		422		158		400		232		822	
04:45	98		439		168		366		266		805	
05:00	82	514	412	1,684	179	919	440	1,645	261	1,433	852	3,329
05:15	113		454		226		406		339		860	
05:30	153		416		280		411		433		827	
05:45	166		402		234		388		400		790	
06:00	218	1,213	361	1,392	226	1,104	346	1,477	444	2,317	707	2,869
06:15	237		352		246		385		483		737	
06:30	356		358		332		386		688		744	
06:45	402		321		300		360		702		681	
07:00	388	1,469	296	1,065	288	1,307	354	1,254	676	2,776	650	2,319
07:15	344		284		290		322		634		606	
07:30	366		258		358		276		724		534	
07:45	371		227		371		302		742		529	
08:00	482	1,851	218	875	354	1,301	258	1,026	836	3,152	476	1,901
08:15	471		232		332		260		803		492	
08:30	455		238		302		238		757		476	
08:45	443		187		313		270		756		457	
09:00	324	1,360	225	866	278	1,036	264	949	602	2,396	489	1,815
09:15	328		224		260		252		588		476	
09:30	354		217		248		215		602		432	
09:45	354		200		250		218		604		418	
10:00	318	1,082	174	605	239	982	212	561	557	2,064	386	1,166
10:15	274		174		248		157		522		331	
10:30	244		133		250		102		494		235	
10:45	246		124		245		90		491		214	
11:00	268	1,061	142	472	242	1,122	84	244	510	2,183	226	716
11:15	261		128		262		66		523		194	
11:30	258		96		306		58		564		154	
11:45	274		106		312		36		586		142	
Totals	9,448		13,520		8,837		13,419		18,285		26,939	
Split%	51.7		50.2		48.3		49.8					
Day Totals		22,968				22,256				45,224		
Day Splits		50.8				49.2						
Peak Hour	08:00		04:30		07:30		05:00		08:00		04:45	
Volume	1,851		1,727		1,415		1,645		3,152		3,344	
Factor	0.96		0.95		0.95		0.93		0.94		0.97	

Data File : D1909020

Attachment 8

Thursday, October 10, 2019 Location: Santa Ana PROJECT:

ADT230 SEVENTEENTH ST from COLLEGE AVE to BRISTOL ST. **Prepared by AimTD tel. 714 753 7888**

AM Period	NB	SB	EB	WB		PM Period	NB	SB	EB	WB	
0:30			10	34		12:00			278	256	
0:15			12	27		12:15			290	245	
0:30			9	20		12:30			286	251	
0:45			11 42	17 98	140	12:45			301 1155	242 994	2149
1:00			13	23		13:00			303	267	
1:15			10	15		13:15			298	242	
1:30			8	16		13:30			285	246	
1:45			7 38	13 67	105	13:45			274 1160	294 1049	2209
2:00			6	10		14:00			296	286	
2:15			8	9		14:15			314	275	
2:30			11	12		14:30			348	258	
2:45			7 32	8 39	71	14:45			332 1290	301 1120	2410
3:00			10	12		15:00			320	304	
3:15			12	14		15:15			325	321	
3:30			13	9		15:30			336	313	
3:45			17 52	11 46	98	15:45			342 1323	326 1264	2587
4:00			22	15		16:00			326	343	
4:15			32	13		16:15			358	356	
4:30			33	18		16:30			339	324	
4:45			29 116	26 72	188	16:45			346 1369	375 1398	2767
5:00			56	17		17:00			314	359	
5:15			102	24		17:15			380	356	
5:30			98	51		17:30			419	364	
5:45			105 361	54 146	507	17:45			439 1552	312 1391	2943
6:00			127	75		18:00			377	321	
6:15			170	93		18:15			384	303	
6:30			229	84		18:30			352	297	
6:45			330 856	114 366	1222	18:45			313 1426	316 1237	2663
7:00			392	152		19:00			294	284	
7:15			460	195		19:15			252	252	
7:30			428	266		19:30			213	234	
7:45			361 1641	278 891	2532	19:45			229 988	250 1020	2008
8:00			393	234		20:00			186	210	
8:15			368	201		20:15			173	185	
8:30			374	173		20:30			191	178	
8:45			353 1488	194 802	2290	20:45			179 729	187 760	1489
9:00			344	203		21:00			190	201	
9:15			360	183		21:15			203	194	
9:30			332	198		21:30			173	165	
9:45			318 1354	203 787	2141	21:45			145 711	134 694	1405
10:00			286	216		22:00			113	114	
10:15			273	205		22:15			94	95	
10:30			263	200		22:30			65	75	
10:45			279 1101	231 852	1953	22:45			43 315	82 366	681
11:00			309	217		23:00			24	68	
11:15			314	246		23:15			18	45	
11:30			301	237		23:30			23	47	
11:45			293 1217	228 928	2145	23:45			15 80	32 192	272
Total Vol.			8298	5094	**13392**				12098	11485	**23583**

			Daily Totals		
	NB	SB	EB	WB	**Combined**
			20396	16579	**36975**
	AM		**PM**		
Split %			51.3%	48.7%	**63.8%**
Peak Hour	0:30	0:30	17:30	16:45	**17:15**
Volume			1619	1454	**2968**
P.H.F.			0.92	0.97	**0.95**

pacific@aimtd.com Tell. 714 753 7888

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

Location : BRISTOL STREET
Segment : CIVIC CENTER DR TO SEVENTEENTH
Client : CITY SANTA ANA

Site: SANTA ANA
Date: 09/17/19
Day: Tuesday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	71	177	288	1,161	56	212	288	1,028	127	389	576	2,189
12:15	48		274		64		254		112		528	
12:30	26		297		42		242		68		539	
12:45	32		302		50		244		82		546	
01:00	38	118	270	1,194	44	146	256	1,124	82	264	526	2,318
01:15	26		308		42		280		68		588	
01:30	27		300		26		308		53		608	
01:45	27		316		34		280		61		596	
02:00	36	113	318	1,221	30	115	262	1,084	66	228	580	2,305
02:15	34		315		24		230		58		545	
02:30	18		322		30		256		48		578	
02:45	25		266		31		336		56		602	
03:00	30	179	314	1,333	28	103	286	1,138	58	282	600	2,471
03:15	40		308		23		278		63		586	
03:30	45		353		28		274		73		627	
03:45	64		358		24		300		88		658	
04:00	64	432	356	1,479	32	233	340	1,221	96	665	696	2,700
04:15	88		373		52		277		140		650	
04:30	126		374		71		266		197		640	
04:45	154		376		78		338		232		714	
05:00	168	772	359	1,535	75	451	294	1,211	243	1,223	653	2,746
05:15	190		418		88		332		278		750	
05:30	214		366		150		290		364		656	
05:45	200		392		138		295		338		687	
06:00	190	1,082	364	1,510	177	946	298	1,021	367	2,028	662	2,531
06:15	270		408		191		204		461		612	
06:30	292		372		266		264		558		636	
06:45	330		366		312		255		642		621	
07:00	302	1,451	346	1,228	342	1,366	226	926	644	2,817	572	2,154
07:15	376		302		356		252		732		554	
07:30	398		282		342		228		740		510	
07:45	375		298		326		220		701		518	
08:00	356	1,262	225	904	336	1,343	200	863	692	2,605	425	1,767
08:15	334		233		314		219		648		452	
08:30	310		220		356		210		666		430	
08:45	262		226		337		234		599		460	
09:00	264	1,064	204	762	287	1,164	240	933	551	2,228	444	1,695
09:15	272		194		288		222		560		416	
09:30	276		178		292		258		568		436	
09:45	252		186		297		213		549		399	
10:00	283	1,016	136	445	309	1,056	206	629	592	2,072	342	1,074
10:15	245		118		275		179		520		297	
10:30	236		99		234		128		470		227	
10:45	252		92		238		116		490		208	
11:00	210	1,121	84	275	252	1,033	133	409	462	2,154	217	684
11:15	278		87		260		112		538		199	
11:30	341		48		233		80		574		128	
11:45	292		56		288		84		580		140	
Totals	8,787		13,047		8,168		11,587		16,955		24,634	
Split%	51.8		53.0		48.2		47.0					
Day Totals		21,834				19,755				41,589		
Day Splits		52.5				47.5						
Peak Hour	07:15		05:15		07:00		04:45		07:15		04:45	
Volume	1,505		1,540		1,366		1,254		2,865		2,773	
Factor	0.95		0.92		0.96		0.93		0.97		0.92	

Data File : D1909019

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

Location : FAIRVIEW STREET
Segment : SEVENTEENTH ST TO TRASK AVE
Client : CITY SANTA ANA

Site: SANTA ANA
Date: 10/01/19
Day: Tuesday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	46	143	238	970	59	202	228	919	105	345	466	1,889
12:15	46		246		55		232		101		478	
12:30	23		238		48		204		71		442	
12:45	28		248		40		255		68		503	
01:00	24	109	225	1,056	38	131	214	968	62	240	439	2,024
01:15	29		258		36		234		65		492	
01:30	26		276		22		226		48		502	
01:45	30		297		35		294		65		591	
02:00	18	81	324	1,416	30	88	268	1,189	48	169	592	2,605
02:15	19		322		26		311		45		633	
02:30	21		380		13		276		34		656	
02:45	23		390		19		334		42		724	
03:00	30	178	379	1,461	20	107	342	1,267	50	285	721	2,728
03:15	38		334		19		298		57		632	
03:30	68		374		42		310		110		684	
03:45	42		374		26		317		68		691	
04:00	78	443	390	1,560	39	261	315	1,248	117	704	705	2,808
04:15	74		380		46		297		120		677	
04:30	144		394		78		304		222		698	
04:45	147		396		98		332		245		728	
05:00	167	819	420	1,635	102	634	338	1,280	269	1,453	758	2,915
05:15	202		404		132		336		334		740	
05:30	246		419		186		318		432		737	
05:45	204		392		214		288		418		680	
06:00	234	1,037	385	1,489	215	1,070	302	1,144	449	2,107	687	2,633
06:15	223		390		220		290		443		680	
06:30	286		388		287		288		573		676	
06:45	294		326		348		264		642		590	
07:00	296	1,230	362	1,197	359	1,401	225	908	655	2,631	587	2,105
07:15	302		304		322		264		624		568	
07:30	322		279		358		202		680		481	
07:45	310		252		362		217		672		469	
08:00	357	1,108	238	805	390	1,327	208	728	747	2,435	446	1,533
08:15	285		189		363		201		648		390	
08:30	256		186		306		146		562		332	
08:45	210		192		268		173		478		365	
09:00	184	851	188	728	274	1,156	188	636	458	2,007	376	1,364
09:15	245		200		280		145		525		345	
09:30	197		189		288		150		485		339	
09:45	225		151		314		153		539		304	
10:00	236	917	128	413	252	907	147	489	488	1,824	275	902
10:15	218		104		249		140		467		244	
10:30	226		95		204		94		430		189	
10:45	237		86		202		108		439		194	
11:00	197	908	84	261	213	863	94	294	410	1,771	178	555
11:15	213		60		189		65		402		125	
11:30	228		69		216		72		444		141	
11:45	270		48		245		63		515		111	
Totals	7,824		12,991		8,147		11,070		15,971		24,061	
Split%	49.0		54.0		51.0		46.0					
Day Totals		20,815				19,217				40,032		
Day Splits		52.0				48.0						
Peak Hour	07:15		04:45		07:30		04:45		07:30		04:45	
Volume	1,291		1,639		1,473		1,324		2,747		2,963	
Factor	0.90		0.98		0.94		0.98		0.92		0.98	

* Data File : D1909076

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : BRISTOL STREET

Segment : MCFADDEN AVE TO FIRST ST

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/17/19

Day: Tuesday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	62	173	240	1,016	59	185	264	962	121	358	504	1,978
12:15	47		238		55		224		102		462	
12:30	30		253		37		230		67		483	
12:45	34		285		34		244		68		529	
01:00	32	114	234	1,114	44	135	202	943	76	249	436	2,057
01:15	24		302		38		218		62		520	
01:30	22		290		26		246		48		536	
01:45	36		288		27		277		63		565	
02:00	32	120	294	1,312	21	111	275	1,107	53	231	569	2,419
02:15	32		318		23		242		55		560	
02:30	29		324		27		306		56		630	
02:45	27		376		40		284		67		660	
03:00	27	136	412	1,701	26	107	316	1,282	53	243	728	2,983
03:15	33		468		17		342		50		810	
03:30	28		425		30		305		58		730	
03:45	48		396		34		319		82		715	
04:00	52	264	424	1,730	39	279	318	1,381	91	543	742	3,111
04:15	52		444		62		350		114		794	
04:30	84		435		100		338		184		773	
04:45	76		427		78		375		154		802	
05:00	117	493	432	1,778	94	499	360	1,504	211	992	792	3,282
05:15	112		448		82		394		194		842	
05:30	130		441		156		366		286		807	
05:45	134		457		167		384		301		841	
06:00	130	756	441	1,644	176	1,016	338	1,262	306	1,772	779	2,906
06:15	172		439		188		326		360		765	
06:30	216		393		264		296		480		689	
06:45	238		371		388		302		626		673	
07:00	239	1,371	346	1,289	412	1,829	262	1,004	651	3,200	608	2,293
07:15	352		344		484		296		836		640	
07:30	420		310		465		226		885		536	
07:45	360		289		468		220		828		509	
08:00	343	1,240	263	953	430	1,719	208	819	773	2,959	471	1,772
08:15	300		263		435		195		735		458	
08:30	292		189		446		227		738		416	
08:45	305		238		408		189		713		427	
09:00	208	872	168	677	265	1,107	223	820	473	1,979	391	1,497
09:15	220		190		260		191		480		381	
09:30	240		171		301		220		541		391	
09:45	204		148		281		186		485		334	
10:00	230	862	161	519	277	998	158	537	507	1,860	319	1,056
10:15	210		130		238		149		448		279	
10:30	216		110		240		122		456		232	
10:45	206		118		243		108		449		226	
11:00	205	967	78	286	218	942	82	306	423	1,909	160	592
11:15	254		76		227		96		481		172	
11:30	256		66		222		64		478		130	
11:45	252		66		275		64		527		130	
Totals	7,368		14,019		8,927		11,927		16,295		25,946	
Split%	45.2		54.0		54.8		46.0					
Day Totals		21,387				20,854				42,241		
Day Splits		50.6				49.4						
Peak Hour	07:15		05:15		07:15		05:00		07:15		05:00	
Volume	1,475		1,787		1,847		1,504		3,322		3,282	
Factor	0.88		0.98		0.95		0.95		0.94		0.97	

Data File : D1909017

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : CIVIC CENTER DRIVE

Segment : BRISTOL ST TO FLOWER ST

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/18/19

Day: Wednesday

Interval	EB				WB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	13	36	98	441	8	42	139	489	21	78	237	930
12:15	8		97		13		122		21		219	
12:30	9		118		8		138		17		256	
12:45	6		128		13		90		19		218	
01:00	7	23	132	549	4	33	96	593	11	56	228	1,142
01:15	10		152		12		156		22		308	
01:30	3		145		15		186		18		331	
01:45	3		120		2		155		5		275	
02:00	6	21	122	507	5	19	129	572	11	40	251	1,079
02:15	4		130		6		129		10		259	
02:30	5		119		4		132		9		251	
02:45	6		136		4		182		10		318	
03:00	6	27	190	635	6	24	146	645	12	51	336	1,280
03:15	3		151		3		163		6		314	
03:30	9		160		12		170		21		330	
03:45	9		134		3		166		12		300	
04:00	7	65	154	588	7	60	206	859	14	125	360	1,447
04:15	11		138		7		181		18		319	
04:30	19		140		26		234		45		374	
04:45	28		156		20		238		48		394	
05:00	30	171	166	659	24	129	273	969	54	300	439	1,628
05:15	45		157		22		246		67		403	
05:30	41		168		28		250		69		418	
05:45	55		168		55		200		110		368	
06:00	67	425	156	501	58	310	198	573	125	735	354	1,074
06:15	83		130		58		140		141		270	
06:30	119		134		84		121		203		255	
06:45	156		81		110		114		266		195	
07:00	175	1,064	94	316	120	867	88	353	295	1,931	182	669
07:15	282		80		213		86		495		166	
07:30	293		82		258		92		551		174	
07:45	314		60		276		87		590		147	
08:00	240	836	62	240	196	571	78	260	436	1,407	140	500
08:15	243		61		177		74		420		135	
08:30	189		57		110		50		299		107	
08:45	164		60		88		58		252		118	
09:00	104	396	61	196	76	299	66	200	180	695	127	396
09:15	96		64		64		40		160		104	
09:30	92		40		76		46		168		86	
09:45	104		31		83		48		187		79	
10:00	70	322	40	122	90	324	45	127	160	646	85	249
10:15	82		33		68		34		150		67	
10:30	102		27		76		28		178		55	
10:45	68		22		90		20		158		42	
11:00	74	354	16	53	99	470	23	80	173	824	39	133
11:15	72		9		111		22		183		31	
11:30	88		12		128		20		216		32	
11:45	120		16		132		15		252		31	
Totals	3,740		4,807		3,148		5,720		6,888		10,527	
Split%	54.3		45.7		45.7		54.3					
Day Totals		8,547				8,868				17,415		
Day Splits		49.1				50.9						
Peak Hour	07:15		05:00		07:15		04:45		07:15		04:45	
Volume	1,129		659		943		1,007		2,072		1,654	
Factor	0.90		0.98		0.85		0.92		0.88		0.94	

Data File : D1909038

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : FLOWER STREET

Segment : MCFADDEN AVE TO FIRST ST

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/10/19

Day: Tuesday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	22	58	65	330	24	82	69	305	46	140	134	635
12:15	13		88		15		76		28		164	
12:30	12		92		18		82		30		174	
12:45	11		85		25		78		36		163	
01:00	6	29	76	370	12	44	78	332	18	73	154	702
01:15	16		83		8		70		24		153	
01:30	5		101		10		93		15		194	
01:45	2		110		14		91		16		201	
02:00	5	17	100	575	11	37	100	438	16	54	200	1,013
02:15	5		150		9		110		14		260	
02:30	1		169		9		98		10		267	
02:45	6		156		8		130		14		286	
03:00	8	34	174	682	6	38	158	531	14	72	332	1,213
03:15	5		178		7		120		12		298	
03:30	8		164		14		121		22		285	
03:45	13		166		11		132		24		298	
04:00	15	86	172	729	9	76	136	536	24	162	308	1,265
04:15	20		187		11		124		31		311	
04:30	29		190		24		140		53		330	
04:45	22		180		32		136		54		316	
05:00	44	230	175	788	28	205	142	543	72	435	317	1,331
05:15	54		220		46		132		100		352	
05:30	62		186		70		130		132		316	
05:45	70		207		61		139		131		346	
06:00	70	365	209	754	54	332	134	490	124	697	343	1,244
06:15	81		197		92		106		173		303	
06:30	96		190		96		132		192		322	
06:45	118		158		90		118		208		276	
07:00	122	627	122	404	112	498	96	383	234	1,125	218	787
07:15	196		105		128		96		324		201	
07:30	182		96		126		96		308		192	
07:45	127		81		132		95		259		176	
08:00	156	519	90	309	137	548	80	297	293	1,067	170	606
08:15	124		83		133		82		257		165	
08:30	133		64		142		74		275		138	
08:45	106		72		136		61		242		133	
09:00	76	293	60	217	82	306	82	276	158	599	142	493
09:15	75		61		64		62		139		123	
09:30	68		49		74		68		142		117	
09:45	74		47		86		64		160		111	
10:00	68	283	35	144	62	293	60	195	130	576	95	339
10:15	62		42		78		49		140		91	
10:30	77		39		72		51		149		90	
10:45	76		28		81		35		157		63	
11:00	53	283	25	84	76	322	52	150	129	605	77	234
11:15	73		27		89		43		162		70	
11:30	77		19		77		25		154		44	
11:45	80		13		80		30		160		43	
Totals	2,824		5,386		2,781		4,476		5,605		9,862	
Split%	50.4		54.6		49.6		45.4					
Day Totals		8,210				7,257				15,467		
Day Splits		53.1				46.9						
Peak Hour	07:15		05:15		08:00		04:30		07:15		05:15	
Volume	661		822		548		550		1,184		1,357	
Factor	0.84		0.93		0.96		0.97		0.91		0.96	

Data File : D1909104

Attachment 8

Thursday, October 03, 2019 Location: Santa Ana PROJECT:

ADT167 MAIN ST from SEVENTEENTH ST to SANTA CLARA AVE. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB		SB		EB	WB		PM Period	NB		SB		EB	WB	
0:00	58		42					12:00	227		212				
0:15	53		30					12:15	236		221				
0:30	54		41					12:30	224		230				
0:45	36	201	35	148			349	12:45	239	926	219	882			1808
1:00	46		29					13:00	268		218				
1:15	35		28					13:15	266		224				
1:30	27		26					13:30	241		205				
1:45	21	129	22	105			234	13:45	267	1042	197	844			1886
2:00	34		20					14:00	274		198				
2:15	41		34					14:15	257		201				
2:30	30		25					14:30	286		213				
2:45	26	131	21	100			231	14:45	272	1089	219	831			1920
3:00	21		16					15:00	269		216				
3:15	25		12					15:15	327		234				
3:30	30		8					15:30	312		265				
3:45	32	108	11	47			155	15:45	313	1221	255	970			2191
4:00	35		12					16:00	306		233				
4:15	56		21					16:15	341		238				
4:30	76		32					16:30	335		295				
4:45	87	254	38	103			357	16:45	291	1273	248	1014			2287
5:00	101		40					17:00	286		254				
5:15	99		62					17:15	295		266				
5:30	137		64					17:30	321		267				
5:45	144	481	98	264			745	17:45	309	1211	270	1057			2268
6:00	137		114					18:00	326		253				
6:15	142		157					18:15	335		246				
6:30	161		234					18:30	320		216				
6:45	159	599	291	796			1395	18:45	284	1265	204	919			2184
7:00	187		318					19:00	260		180				
7:15	214		278					19:15	256		160				
7:30	204		258					19:30	240		139				
7:45	267	872	269	1123			1995	19:45	222	978	109	588			1566
8:00	234		298					20:00	197		125				
8:15	213		276					20:15	195		118				
8:30	204		293					20:30	178		113				
8:45	202	853	258	1125			1978	20:45	186	756	96	452			1208
9:00	215		242					21:00	195		99				
9:15	186		223					21:15	175		90				
9:30	170		210					21:30	155		124				
9:45	182	753	201	876			1629	21:45	138	663	106	419			1082
10:00	195		197					22:00	116		87				
10:15	177		185					22:15	124		76				
10:30	171		175					22:30	99		64				
10:45	185	728	204	761			1489	22:45	54	393	45	272			665
11:00	198		189					23:00	58		55				
11:15	213		195					23:15	62		47				
11:30	217		201					23:30	56		42				
11:45	235	863	214	799			1662	23:45	70	246	53	197			443
Total Vol.		5972		6247			**12219**			11063		8445			**19508**

Daily Totals

NB	SB	EB	WB	**Combined**
17035	14692			**31727**

	AM			**PM**		
Split %	48.9%	51.1%	**38.5%**	56.7%	43.3%	**61.5%**
Peak Hour	11:45	6:45	**7:45**	15:45	16:30	**17:30**
Volume	922	1145	**2054**	1295	1063	**2327**
P.H.F.	0.98	0.90	**0.96**	0.95	0.90	**0.99**

cs@aimtd.com Tell. 714 253 7888

Attachment 8

Wednesday, October 02, 2019 Location: Santa Ana PROJECT:

ADT165 MAIN ST from CIVIC CENTER DR to WASHINGTON AVE. **Prepared by AimTD tel. 714 753 7888**

AM Period	NB		SB		EB	WB		PM Period	NB		SB		EB	WB	
0:00	57		48					12:00	229		189				
0:15	51		43					12:15	242		182				
0:30	50		47					12:30	257		213				
0:45	30	188	38	176			364	12:45	279	1007	209	793			1800
1:00	17		34					13:00	311		199				
1:15	14		28					13:15	256		213				
1:30	21		23					13:30	276		199				
1:45	35	87	19	104			191	13:45	277	1120	208	819			1939
2:00	33		22					14:00	310		231				
2:15	26		17					14:15	289		186				
2:30	30		19					14:30	297		194				
2:45	18	107	18	76			183	14:45	284	1180	213	824			2004
3:00	17		16					15:00	291		232				
3:15	12		20					15:15	275		214				
3:30	24		30					15:30	304		257				
3:45	37	90	32	98			188	15:45	329	1199	217	920			2119
4:00	49		27					16:00	335		230				
4:15	45		35					16:15	344		206				
4:30	71		43					16:30	365		241				
4:45	98	263	38	143			406	16:45	356	1400	274	951			2351
5:00	91		50					17:00	334		246				
5:15	112		70					17:15	302		232				
5:30	150		108					17:30	316		245				
5:45	145	498	133	361			859	17:45	324	1276	234	957			2233
6:00	153		152					18:00	315		215				
6:15	146		194					18:15	349		157				
6:30	208		202					18:30	331		139				
6:45	223	730	238	786			1516	18:45	297	1292	147	658			1950
7:00	242		250					19:00	279		162				
7:15	257		303					19:15	259		158				
7:30	268		300					19:30	219		148				
7:45	276	1043	337	1190			2233	19:45	218	975	165	633			1608
8:00	271		314					20:00	233		145				
8:15	238		286					20:15	197		150				
8:30	203		320					20:30	216		153				
8:45	194	906	297	1217			2123	20:45	198	844	134	582			1426
9:00	186		257					21:00	189		140				
9:15	203		231					21:15	176		157				
9:30	199		228					21:30	170		135				
9:45	186	774	230	946			1720	21:45	154	689	125	557			1246
10:00	214		198					22:00	180		90				
10:15	220		210					22:15	145		79				
10:30	212		178					22:30	118		78				
10:45	204	850	206	792			1642	22:45	106	549	85	332			881
11:00	201		193					23:00	85		92				
11:15	226		177					23:15	75		86				
11:30	217		189					23:30	56		44				
11:45	215	859	210	769			1628	23:45	52	268	57	279			547
Total Vol.	6395		6658				**13053**		11799		8305				**20104**

Daily Totals

NB	SB	EB	WB	Combined
18194	14963			**33157**

	AM			PM		
Split %	49.0%	51.0%	**39.4%**	58.7%	41.3%	**60.6%**
Peak Hour	7:15	7:45	**7:15**	16:00	16:45	**16:15**
Volume	1072	1257	**2326**	1400	997	**2366**
P.H.F.	0.97	0.93	**0.95**	0.97	0.91	**0.94**

pacific@aimtd.com Tell. 714 753 7888

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

Location : CIVIC CENTER DRIVE
Segment : FLOWER ST TO ROSS ST
Client : CITY SANTA ANA

Site: SANTA ANA
Date: 09/18/19
Day: Wednesday

Interval	WB				EB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	10	48	122	473	17	53	148	517	27	101	270	990
12:15	17		114		10		131		27		245	
12:30	15		122		12		116		27		238	
12:45	6		115		14		122		20		237	
01:00	9	27	128	640	12	37	137	580	21	64	265	1,220
01:15	5		166		7		146		12		312	
01:30	10		170		12		178		22		348	
01:45	3		176		6		119		9		295	
02:00	4	10	142	510	1	22	149	622	5	32	291	1,132
02:15	4		116		3		138		7		254	
02:30	0		122		15		144		15		266	
02:45	2		130		3		191		5		321	
03:00	5	18	120	524	7	19	215	712	12	37	335	1,236
03:15	3		132		0		169		3		301	
03:30	4		140		4		174		8		314	
03:45	6		132		8		154		14		286	
04:00	6	48	172	710	6	46	172	827	12	94	344	1,537
04:15	4		144		11		182		15		326	
04:30	13		202		12		231		25		433	
04:45	25		192		17		242		42		434	
05:00	24	113	276	929	21	131	248	760	45	244	524	1,689
05:15	16		241		28		172		44		413	
05:30	23		240		40		162		63		402	
05:45	50		172		42		178		92		350	
06:00	52	255	174	490	53	366	163	568	105	621	337	1,058
06:15	54		124		68		154		122		278	
06:30	56		98		114		138		170		236	
06:45	93		94		131		113		224		207	
07:00	112	755	69	285	140	807	92	302	252	1,562	161	587
07:15	172		73		196		78		368		151	
07:30	224		78		214		80		438		158	
07:45	247		65		257		52		504		117	
08:00	238	750	66	220	218	682	66	233	456	1,432	132	453
08:15	218		64		176		50		394		114	
08:30	153		42		140		50		293		92	
08:45	141		48		148		67		289		115	
09:00	100	376	39	178	102	440	47	158	202	816	86	336
09:15	94		46		121		52		215		98	
09:30	100		47		116		35		216		82	
09:45	82		46		101		24		183		70	
10:00	87	335	32	101	94	402	26	101	181	737	58	202
10:15	84		23		104		36		188		59	
10:30	74		28		103		21		177		49	
10:45	90		18		101		18		191		36	
11:00	102	397	17	64	106	555	14	58	208	952	31	122
11:15	91		17		143		18		234		35	
11:30	88		15		150		14		238		29	
11:45	116		15		156		12		272		27	
Totals	3,132		5,124		3,560		5,438		6,692		10,562	
Split%	46.8		48.5		53.2		51.5					
Day Totals		8,256				8,998				17,254		
Day Splits		47.8				52.2						
Peak Hour	07:30		04:45		07:15		04:15		07:30		04:30	
Volume	927		949		885		903		1,792		1,804	
Factor	0.94		0.86		0.86		0.91		0.89		0.86	

Data File : D1909039

Wednesday, October 02, 2019 Location: Santa Ana PROJECT:

ADT208 SANTA ANA BLVD from FLOWER ST to ROSS ST. **Prepared by AimTD tel. 714 753 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:30			7		9			12:00			98		97		
0:15			8		11			12:15			86		89		
0:30			7		9			12:30			94		104		
0:45			2	24	13	42	66	12:45			106	384	108	398	782
1:00			1		10			13:00			89		123		
1:15			1		7			13:15			86		132		
1:30			0		6			13:30			95		105		
1:45			3	5	8	31	36	13:45			79	349	101	461	810
2:00			2		11			14:00			108		96		
2:15			0		7			14:15			89		95		
2:30			2		4			14:30			87		103		
2:45			3	7	2	24	31	14:45			97	381	123	417	798
3:00			6		5			15:00			102		127		
3:15			4		1			15:15			113		145		
3:30			2		0			15:30			103		153		
3:45			3	15	2	8	23	15:45			107	425	167	592	1017
4:00			6		4			16:00			123		159		
4:15			10		5			16:15			156		153		
4:30			13		3			16:30			178		163		
4:45			11	40	8	20	60	16:45			168	625	175	650	1275
5:00			16		12			17:00			156		213		
5:15			24		24			17:15			134		234		
5:30			29		36			17:30			121		204		
5:45			39	108	65	137	245	17:45			102	513	195	846	1359
6:00			54		64			18:00			97		172		
6:15			75		75			18:15			87		142		
6:30			86		78			18:30			103		104		
6:45			103	318	95	312	630	18:45			76	363	123	541	904
7:00			123		121			19:00			86		96		
7:15			189		158			19:15			78		86		
7:30			254		175			19:30			64		74		
7:45			304	870	145	599	1469	19:45			61	289	76	332	621
8:00			234		157			20:00			58		78		
8:15			153		134			20:15			53		61		
8:30			145		109			20:30			43		56		
8:45			126	658	89	489	1147	20:45			37	191	64	259	450
9:00			103		76			21:00			45		64		
9:15			100		89			21:15			35		43		
9:30			87		75			21:30			32		63		
9:45			95	385	78	318	703	21:45			40	152	53	223	375
10:00			76		100			22:00			28		47		
10:15			68		89			22:15			17		41		
10:30			79		96			22:30			23		36		
10:45			81	304	78	363	667	22:45			24	92	27	151	243
11:00			74		86			23:00			14		32		
11:15			89		75			23:15			8		18		
11:30			94		95			23:30			12		20		
11:45			90	347	99	355	702	23:45			11	45	16	86	131
Total Vol.			3081		2698		**5779**				3809		4956		**8765**

Daily Totals

NB	SB	EB	WB	Combined
		6890	7654	**14544**

			AM					PM		
Split %			53.3%	46.7%	**39.7%**			43.5%	56.5%	**60.3%**
Peak Hour	0:30	0:30	7:15	7:15	**7:15**			16:15	17:00	**16:30**
Volume			981	635	**1616**			658	846	**1421**
P.H.F.			0.81	0.91	**0.90**			0.92	0.90	**0.96**

pacific@aimtd.com Tell. 714 753 7888

Attachment 8

Attachment 8

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

Location : FIRST STREET
Segment : MAIN ST TO STANDARD AVE
Client : CITY SANTA ANA

Site: SANTA ANA
Date: 09/11/19
Day: Wednesday

Interval	EB				WB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	54	193	299	1,249	58	185	274	1,115	112	378	573	2,364
12:15	49		306		52		282		101		588	
12:30	42		320		46		269		88		589	
12:45	48		324		29		290		77		614	
01:00	38	144	325	1,375	28	112	316	1,211	66	256	641	2,586
01:15	32		362		34		248		66		610	
01:30	28		356		23		334		51		690	
01:45	46		332		27		313		73		645	
02:00	31	116	330	1,314	36	136	333	1,369	67	252	663	2,683
02:15	31		324		34		326		65		650	
02:30	25		323		36		350		61		673	
02:45	29		337		30		360		59		697	
03:00	22	163	352	1,395	21	117	378	1,446	43	280	730	2,841
03:15	37		356		24		360		61		716	
03:30	42		315		32		362		74		677	
03:45	62		372		40		346		102		718	
04:00	56	376	324	1,440	33	135	356	1,451	89	511	680	2,891
04:15	86		362		26		368		112		730	
04:30	101		392		38		352		139		744	
04:45	133		362		38		375		171		737	
05:00	135	791	381	1,560	60	304	374	1,454	195	1,095	755	3,014
05:15	162		380		61		358		223		738	
05:30	236		406		72		354		308		760	
05:45	258		393		111		368		369		761	
06:00	258	1,243	330	1,294	118	566	352	1,279	376	1,809	682	2,573
06:15	286		338		134		313		420		651	
06:30	365		324		133		306		498		630	
06:45	334		302		181		308		515		610	
07:00	378	1,557	310	1,171	230	1,266	298	1,109	608	2,823	608	2,280
07:15	394		339		311		273		705		612	
07:30	384		264		355		278		739		542	
07:45	401		258		370		260		771		518	
08:00	375	1,422	221	866	291	1,086	192	772	666	2,508	413	1,638
08:15	384		213		276		208		660		421	
08:30	331		210		269		184		600		394	
08:45	332		222		250		188		582		410	
09:00	344	1,238	166	639	259	1,014	171	659	603	2,252	337	1,298
09:15	322		183		213		162		535		345	
09:30	278		154		276		162		554		316	
09:45	294		136		266		164		560		300	
10:00	270	1,088	125	446	248	998	158	566	518	2,086	283	1,012
10:15	270		118		242		140		512		258	
10:30	256		119		242		136		498		255	
10:45	292		84		266		132		558		216	
11:00	276	1,157	90	285	246	1,068	102	336	522	2,225	192	621
11:15	270		69		268		80		538		149	
11:30	290		68		276		66		566		134	
11:45	321		58		278		88		599		146	
Totals	9,488		13,034		6,987		12,767		16,475		25,801	
Split%	57.6		50.5		42.4		49.5					
Day Totals		22,522				19,754				42,276		
Day Splits		53.3				46.7						
Peak Hour	07:00		05:00		07:15		04:15		07:15		05:00	
Volume	1,557		1,560		1,327		1,469		2,881		3,014	
Factor	0.97		0.96		0.90		0.98		0.93		0.99	

Data File : D1909094

Thursday, October 10, 2019 Location: Santa Ana PROJECT:

ADT161 MAIN ST from McFADDEN AVE to CHESTNUT AVE. **Prepared by AimTD tel. 714 753 7888**

AM Period	NB		SB		EB	WB		PM Period	NB		SB		EB	WB	
0:00	32		29					12:00	221		230				
0:15	21		24					12:15	195		205				
0:30	24		14					12:30	162		265				
0:45	18	95	17	84			179	12:45	182	760	257	957			1717
1:00	23		23					13:00	156		244				
1:15	14		16					13:15	186		214				
1:30	18		18					13:30	207		225				
1:45	16	71	21	78			149	13:45	174	723	251	934			1657
2:00	18		24					14:00	207		263				
2:15	22		25					14:15	173		236				
2:30	19		21					14:30	187		244				
2:45	23	82	24	94			176	14:45	201	768	303	1046			1814
3:00	21		17					15:00	197		285				
3:15	29		19					15:15	199		295				
3:30	20		25					15:30	178		300				
3:45	28	98	24	85			183	15:45	175	749	336	1216			1965
4:00	24		27					16:00	196		354				
4:15	34		48					16:15	204		313				
4:30	42		54					16:30	193		334				
4:45	39	139	66	195			334	16:45	213	806	326	1327			2133
5:00	52		94					17:00	264		295				
5:15	76		107					17:15	268		303				
5:30	92		100					17:30	248		265				
5:45	106	326	112	413			739	17:45	256	1036	314	1177			2213
6:00	148		122					18:00	224		317				
6:15	203		120					18:15	220		336				
6:30	261		126					18:30	189		309				
6:45	250	862	142	510			1372	18:45	176	809	299	1261			2070
7:00	268		210					19:00	187		275				
7:15	271		189					19:15	183		231				
7:30	294		264					19:30	164		207				
7:45	289	1122	252	915			2037	19:45	149	683	175	888			1571
8:00	285		231					20:00	139		154				
8:15	270		207					20:15	123		167				
8:30	316		197					20:30	110		125				
8:45	234	1105	179	814			1919	20:45	114	486	103	549			1035
9:00	205		155					21:00	99		132				
9:15	203		200					21:15	112		109				
9:30	187		185					21:30	118		113				
9:45	181	776	192	732			1508	21:45	96	425	94	448			873
10:00	175		200					22:00	75		104				
10:15	164		209					22:15	88		92				
10:30	160		184					22:30	78		108				
10:45	170	669	213	806			1475	22:45	63	304	85	389			693
11:00	158		197					23:00	52		81				
11:15	196		215					23:15	50		79				
11:30	209		194					23:30	46		56				
11:45	195	758	215	821			1579	23:45	34	182	38	254			436
Total Vol.		6103		5547			**11650**			7731		10446			**18177**

Daily Totals

NB	SB	EB	WB	**Combined**
13834	15993			**29827**

	AM			**PM**		
Split %	52.4%	47.6%	**39.1%**	42.5%	57.5%	**60.9%**
Peak Hour	7:45	7:30	**7:30**	17:00	15:45	**17:00**
Volume	1160	954	**2092**	1036	1337	**2213**
P.H.F.	0.92	0.90	**0.94**	0.96	0.94	**0.97**

pacific@aimtd.com Tell. 714 753 7888

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : GRAND AVENUE

Segment : SANTA CLARA AVE TO FAIRHAVEN

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/12/19

Day: Thursday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	21	72	192	780	21	81	199	746	42	153	391	1,526
12:15	15		200		27		177		42		377	
12:30	20		212		17		170		37		382	
12:45	16		176		16		200		32		376	
01:00	12	43	190	804	10	41	214	722	22	84	404	1,526
01:15	11		213		12		156		23		369	
01:30	11		198		12		164		23		362	
01:45	9		203		7		188		16		391	
02:00	14	57	209	968	7	36	184	814	21	93	393	1,782
02:15	16		234		12		202		28		436	
02:30	15		251		6		222		21		473	
02:45	12		274		11		206		23		480	
03:00	10	59	248	1,055	8	51	208	900	18	110	456	1,955
03:15	12		244		14		254		26		498	
03:30	21		285		6		210		27		495	
03:45	16		278		23		228		39		506	
04:00	24	143	304	1,253	16	116	213	917	40	259	517	2,170
04:15	32		307		26		226		58		533	
04:30	41		316		38		250		79		566	
04:45	46		326		36		228		82		554	
05:00	62	302	353	1,463	26	260	287	1,099	88	562	640	2,562
05:15	62		332		56		294		118		626	
05:30	87		406		74		270		161		676	
05:45	91		372		104		248		195		620	
06:00	78	432	354	1,319	132	1,016	224	769	210	1,448	578	2,088
06:15	96		360		199		172		295		532	
06:30	132		320		306		180		438		500	
06:45	126		285		379		193		505		478	
07:00	140	777	228	799	383	1,728	176	659	523	2,505	404	1,458
07:15	192		214		414		178		606		392	
07:30	227		189		481		153		708		342	
07:45	218		168		450		152		668		320	
08:00	189	675	134	524	477	1,806	144	509	666	2,481	278	1,033
08:15	170		128		469		134		639		262	
08:30	168		142		415		117		583		259	
08:45	148		120		445		114		593		234	
09:00	148	575	126	404	422	1,174	124	427	570	1,749	250	831
09:15	125		102		274		111		399		213	
09:30	136		90		230		94		366		184	
09:45	166		86		248		98		414		184	
10:00	175	627	96	292	184	686	88	241	359	1,313	184	533
10:15	156		84		184		54		340		138	
10:30	150		64		164		49		314		113	
10:45	146		48		154		50		300		98	
11:00	164	693	43	149	166	674	48	170	330	1,367	91	319
11:15	160		46		152		42		312		88	
11:30	176		36		178		34		354		70	
11:45	193		24		178		46		371		70	
Totals	4,455		9,810		7,669		7,973		12,124		17,783	
Split%	36.7		55.2		63.3		44.8					
Day Totals		14,265				15,642				29,907		
Day Splits		47.7				52.3						
Peak Hour	07:15		05:30		07:30		05:00		07:30		05:00	
Volume	826		1,492		1,877		1,099		2,681		2,562	
Factor	0.91		0.92		0.98		0.93		0.95		0.95	

Data File : D1909127

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : GRAND AVENUE

Segment : FOURTH ST TO SANTA ANA BLVD

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/12/19

Day: Thursday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	44	105	252	1,022	25	101	257	918	69	206	509	1,940
12:15	26		266		33		227		59		493	
12:30	15		250		24		237		39		487	
12:45	20		254		19		197		39		451	
01:00	27	103	292	1,179	23	84	242	842	50	187	534	2,021
01:15	20		270		21		187		41		457	
01:30	31		293		27		192		58		485	
01:45	25		324		13		221		38		545	
02:00	19	80	360	1,415	18	61	183	866	37	141	543	2,281
02:15	26		331		13		229		39		560	
02:30	22		336		10		204		32		540	
02:45	13		388		20		250		33		638	
03:00	14	103	386	1.579	13	85	224	872	27	188	610	2.451
03:15	27		379		14		218		41		597	
03:30	30		423		26		206		56		629	
03:45	32		391		32		224		64		615	
04:00	48	245	370	1,627	33	279	242	886	81	524	612	2,513
04:15	55		409		58		218		113		627	
04:30	62		398		80		212		142		610	
04:45	80		450		108		214		188		664	
05:00	95	492	442	1,780	85	614	224	947	180	1,106	666	2,727
05:15	110		462		134		271		244		733	
05:30	164		444		175		229		339		673	
05:45	123		432		220		223		343		655	
06:00	138	692	480	1.766	184	1,045	221	763	322	1,737	701	2,529
06:15	158		460		205		181		363		641	
06:30	206		410		260		175		466		585	
06:45	190		416		396		186		586		602	
07:00	225	1,055	350	1,080	384	1,448	176	605	609	2,503	526	1,685
07:15	260		270		382		148		642		418	
07:30	288		270		348		143		636		413	
07:45	282		190		334		138		616		328	
08:00	230	886	206	722	460	1,892	134	507	690	2,778	340	1,229
08:15	228		178		487		111		715		289	
08:30	224		180		499		142		723		322	
08:45	204		158		446		120		650		278	
09:00	210	912	141	564	257	1,028	123	448	467	1,940	264	1,012
09:15	226		144		316		115		542		259	
09:30	234		149		227		118		461		267	
09:45	242		130		228		92		470		222	
10:00	242	896	118	395	212	788	104	271	454	1,684	222	666
10:15	190		112		186		65		376		177	
10:30	225		85		194		46		419		131	
10:45	239		80		196		56		435		136	
11:00	264	1,003	63	219	182	877	44	168	446	1,880	107	387
11:15	245		62		237		48		482		110	
11:30	256		60		198		35		454		95	
11:45	238		34		260		41		498		75	
Totals	6,572		13,348		8,302		8,093		14,874		21,441	
Split%	44.2		62.3		55.8		37.7					
Day Totals		19,920				16,395				36,315		
Day Splits		54.9				45.1						
Peak Hour	07:15		05:15		08:00		05:00		08:00		05:15	
Volume	1,060		1,818		1,892		947		2,778		2,762	
Factor	0.92		0.95		0.95		0.87		0.96		0.94	

* Data File : D1909124

Tuesday, September 24, 2019 CITY: Santa Ana PROJECT: SC

ADT218 SANTA CLARA AVE from GR to AVE to TUSTIN AVE. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:00			4		4			12:00			72		69		
0:15			8		3			12:15			77		73		
0:30			5		5			12:30			82		67		
0:45			3	20	3	15	35	12:45			69	300	87	296	596
1:00			6		5			13:00			82		66		
1:15			4		2			13:15			64		97		
1:30			2		3			13:30			88		85		
1:45			3	15	3	13	28	13:45			71	305	95	343	648
2:00			3		8			14:00			83		76		
2:15			0		0			14:15			95		81		
2:30			0		6			14:30			127		84		
2:45			2	5	0	14	19	14:45			108	413	88	329	742
3:00			4		2			15:00			93		99		
3:15			6		4			15:15			103		94		
3:30			3		6			15:30			110		97		
3:45			4	17	4	16	33	15:45			106	412	107	397	809
4:00			8		4			16:00			118		98		
4:15			6		4			16:15			110		115		
4:30			10		4			16:30			83		117		
4:45			16	40	11	23	63	16:45			115	426	113	443	869
5:00			11		16			17:00			117		136		
5:15			14		12			17:15			110		124		
5:30			28		26			17:30			144		136		
5:45			24	77	17	71	148	17:45			98	469	128	524	993
6:00			22		20			18:00			116		148		
6:15			42		34			18:15			92		98		
6:30			61		52			18:30			82		116		
6:45			49	174	58	164	338	18:45			77	367	87	449	816
7:00			70		61			19:00			52		79		
7:15			121		78			19:15			72		83		
7:30			119		108			19:30			68		53		
7:45			120	430	112	359	789	19:45			42	234	49	264	498
8:00			107		85			20:00			40		47		
8:15			92		67			20:15			55		25		
8:30			67		70			20:30			47		45		
8:45			77	343	68	290	633	20:45			35	177	39	156	333
9:00			81		57			21:00			48		34		
9:15			69		76			21:15			38		41		
9:30			72		54			21:30			28		27		
9:45			70	292	61	248	540	21:45			41	155	23	125	280
10:00			58		51			22:00			25		19		
10:15			80		61			22:15			25		19		
10:30			72		64			22:30			15		19		
10:45			65	275	62	238	513	22:45			19	84	19	76	160
11:00			61		51			23:00			15		18		
11:15			56		60			23:15			13		6		
11:30			82		68			23:30			8		6		
11:45			72	271	69	248	519	23:45			7	43	5	35	78
Total Vol.			1959		1699		**3658**				3385		3437		**6822**

Daily Totals

NB	SB	EB	WB	Combined
		5344	5136	**10480**

	AM			PM		
Split %	53.6%	46.4%	**34.9%**	49.6%	50.4%	**65.1%**
Peak Hour	7:15	7:15	**7:15**	16:45	17:15	**17:15**
Volume	467	383	**850**	486	536	**1004**
P.H.F.	0.96	0.85	**0.92**	0.84	0.91	**0.90**

Wednesday, September 25, 2019 CITY: Santa Ana PROJECT: SC

ADT258 TUSTIN AVE from SANTA CLARA AVE to FAIRHAVEN AVE. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB		SB		EB	WB		PM Period	NB		SB		EB	WB	
0:00	19		25					12:00	196		232				
0:15	17		18					12:15	257		239				
0:30	21		24					12:30	219		251				
0:45	21	78	16	83			161	12:45	262	934	279	1001			1935
1:00	21		24					13:00	231		256				
1:15	9		14					13:15	246		221				
1:30	9		11					13:30	259		248				
1:45	9	48	4	53			101	13:45	272	1008	245	970			1978
2:00	11		12					14:00	263		229				
2:15	11		11					14:15	280		248				
2:30	8		12					14:30	270		220				
2:45	8	38	10	45			83	14:45	286	1099	253	950			2049
3:00	8		8					15:00	277		267				
3:15	2		8					15:15	279		300				
3:30	6		16					15:30	294		259				
3:45	20	36	16	48			84	15:45	318	1168	257	1083			2251
4:00	9		14					16:00	366		275				
4:15	24		26					16:15	348		267				
4:30	25		36					16:30	388		272				
4:45	24	82	41	117			199	16:45	432	1534	271	1085			2619
5:00	36		49					17:00	516		335				
5:15	50		58					17:15	437		307				
5:30	57		60					17:30	445		325				
5:45	69	212	110	277			489	17:45	429	1827	269	1236			3063
6:00	68		157					18:00	477		283				
6:15	74		218					18:15	347		224				
6:30	97		410					18:30	300		211				
6:45	92	331	481	1266			1597	18:45	310	1434	206	924			2358
7:00	119		548					19:00	260		208				
7:15	125		663					19:15	243		185				
7:30	148		672					19:30	203		156				
7:45	175	567	682	2565			3132	19:45	148	854	162	711			1565
8:00	166		671					20:00	205		162				
8:15	161		665					20:15	145		142				
8:30	156		647					20:30	117		125				
8:45	164	647	572	2555			3202	20:45	134	601	130	559			1160
9:00	172		479					21:00	108		125				
9:15	152		349					21:15	130		94				
9:30	168		270					21:30	94		94				
9:45	169	661	278	1376			2037	21:45	77	409	100	413			822
10:00	177		241					22:00	89		83				
10:15	181		238					22:15	61		62				
10:30	165		231					22:30	66		41				
10:45	187	710	221	931			1641	22:45	50	266	65	251			517
11:00	211		203					23:00	69		49				
11:15	188		240					23:15	40		32				
11:30	189		201					23:30	34		33				
11:45	233	821	234	878			1699	23:45	31	174	29	143			317
Total Vol.		4231		10194			**14425**			11308		9326			**20634**

Daily Totals

NB	SB	EB	WB	Combined
15539	19520			**35059**

	AM			PM		
Split %	29.3%	70.7%	**41.1%**	54.8%	45.2%	**58.9%**
Peak Hour	11:45	7:30	**7:30**	16:45	16:45	**16:45**
Volume	905	2690	**3340**	1830	1238	**3068**
P.H.F.	0.88	0.99	**0.97**	0.88	0.92	**0.90**

cs@aimtd.com Tell. 714 253 7888

Thursday, October 10, 2019 Location: Santa Ana PROJECT:

ADT239 SEVENTEENTH ST from CABRILLO PARK DR to TUSTIN AVE. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:30			12		34			12:00			256		258		
0:15			15		23			12:15			262		290		
0:30			9		17			12:30			304		306		
0:45			8	44	19	93	137	12:45			256	1078	317	1171	2249
1:00			7		12			13:00			245		291		
1:15			10		14			13:15			215		295		
1:30			7		11			13:30			277		326		
1:45			9	33	8	45	78	13:45			244	981	283	1195	2176
2:00			7		10			14:00			283		278		
2:15			5		14			14:15			261		229		
2:30			10		16			14:30			258		263		
2:45			5	27	9	49	76	14:45			235	1037	293	1063	2100
3:00			7		8			15:00			252		276		
3:15			5		13			15:15			245		287		
3:30			9		15			15:30			250		263		
3:45			9	30	8	44	74	15:45			248	995	319	1145	2140
4:00			12		7			16:00			273		316		
4:15			15		13			16:15			319		276		
4:30			25		21			16:30			302		311		
4:45			41	93	27	68	161	16:45			313	1207	290	1193	2400
5:00			52		28			17:00			323		314		
5:15			67		41			17:15			356		313		
5:30			62		57			17:30			374		349		
5:45			68	249	54	180	429	17:45			309	1362	353	1329	2691
6:00			86		58			18:00			303		316		
6:15			104		70			18:15			256		332		
6:30			176		97			18:30			289		283		
6:45			197	563	134	359	922	18:45			259	1107	282	1213	2320
7:00			191		186			19:00			277		283		
7:15			189		201			19:15			226		265		
7:30			207		268			19:30			180		190		
7:45			224	811	218	873	1684	19:45			175	858	214	952	1810
8:00			251		234			20:00			165		155		
8:15			272		271			20:15			150		171		
8:30			261		262			20:30			116		156		
8:45			248	1032	256	1023	2055	20:45			118	549	127	609	1158
9:00			217		233			21:00			123		154		
9:15			208		198			21:15			104		127		
9:30			200		209			21:30			97		106		
9:45			195	820	194	834	1654	21:45			105	429	72	459	888
10:00			188		226			22:00			71		80		
10:15			213		228			22:15			79		86		
10:30			232		244			22:30			78		54		
10:45			217	850	194	892	1742	22:45			70	298	47	267	565
11:00			218		252			23:00			67		42		
11:15			238		235			23:15			45		53		
11:30			257		232			23:30			32		41		
11:45			242	955	238	957	1912	23:45			26	170	35	171	341
Total Vol.				5507		5417	**10924**					10071		10767	**20838**

Daily Totals

NB	SB	EB	WB	Combined
		15578	16184	**31762**

			AM				PM		
Split %			50.4%	49.6%	**34.4%**		48.3%	51.7%	**65.6%**
Peak Hour	0:30	0:30	11:45	11:45	**11:45**		16:45	17:30	**17:00**
Volume			1064	1092	**2156**		1366	1350	**2691**
P.H.F.			0.88	0.89	**0.88**		0.91	0.96	**0.93**

Tuesday, September 24, 2019 CITY: Santa Ana PROJECT: SC

ADT255 TUSTIN AVE from FOURTH ST to FRUIT ST. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB		SB		EB	WB		PM Period	NB		SB		EB	WB	
0:00	12		11					12:00	197		198				
0:15	12		15					12:15	182		177				
0:30	12		12					12:30	192		195				
0:45	8	44	9	47			91	12:45	153	724	197	767			1491
1:00	6		4					13:00	178		196				
1:15	9		11					13:15	189		202				
1:30	7		8					13:30	199		181				
1:45	7	29	4	27			56	13:45	204	770	154	733			1503
2:00	5		7					14:00	185		162				
2:15	7		5					14:15	183		167				
2:30	3		7					14:30	192		153				
2:45	6	21	4	23			44	14:45	259	819	145	627			1446
3:00	3		6					15:00	259		176				
3:15	8		13					15:15	264		196				
3:30	8		6					15:30	286		191				
3:45	9	28	5	30			58	15:45	269	1078	187	750			1828
4:00	18		13					16:00	263		181				
4:15	24		10					16:15	316		152				
4:30	13		24					16:30	319		202				
4:45	24	79	25	72			151	16:45	311	1209	206	741			1950
5:00	27		27					17:00	327		247				
5:15	41		26					17:15	317		205				
5:30	30		57					17:30	340		201				
5:45	41	139	49	159			298	17:45	371	1355	166	819			2174
6:00	51		91					18:00	361		133				
6:15	65		130					18:15	332		110				
6:30	100		205					18:30	309		147				
6:45	102	318	216	642			960	18:45	296	1298	113	503			1801
7:00	115		310					19:00	189		105				
7:15	119		309					19:15	166		115				
7:30	138		320					19:30	143		106				
7:45	164	536	329	1268			1804	19:45	95	593	85	411			1004
8:00	245		354					20:00	96		74				
8:15	235		333					20:15	97		73				
8:30	199		337					20:30	91		84				
8:45	239	918	334	1358			2276	20:45	73	357	62	293			650
9:00	183		266					21:00	60		74				
9:15	187		240					21:15	77		51				
9:30	153		197					21:30	82		61				
9:45	197	720	195	898			1618	21:45	51	270	59	245			515
10:00	160		179					22:00	43		56				
10:15	178		159					22:15	44		40				
10:30	173		149					22:30	31		34				
10:45	154	665	129	616			1281	22:45	32	150	27	157			307
11:00	161		170					23:00	30		27				
11:15	177		158					23:15	20		35				
11:30	173		198					23:30	24		29				
11:45	172	683	210	736			1419	23:45	15	89	20	111			200
Total Vol.	4180		5876				**10056**		8712		6157				**14869**

Daily Totals

NB	SB	EB	WB	**Combined**
12892	12033			**24925**

	AM			**PM**		
Split %	41.6%	58.4%	**40.3%**	58.6%	41.4%	**59.7%**
Peak Hour	8:00	8:00	**8:00**	17:30	16:30	**17:00**
Volume	918	1358	**2276**	1404	860	**2174**
P.H.F.	0.94	0.96	**0.95**	0.97	0.87	**0.95**

cs@aimtd.com Tell. 714 253 7888

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

Location : FIRST STREET
Segment : GRAND AVE TO LYON ST
Client : CITY SANTA ANA

Site: SANTA ANA
Date: 09/10/19
Day: Tuesday

Interval	EB				WB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	24	74	158	612	58	186	220	963	82	260	378	1,575
12:15	15		153		49		260		64		413	
12:30	14		158		43		225		57		383	
12:45	21		143		36		258		57		401	
01:00	15	48	162	668	30	139	243	976	45	187	405	1,644
01:15	12		172		34		236		46		408	
01:30	5		174		42		241		47		415	
01:45	16		160		33		256		49		416	
02:00	8	43	180	870	24	101	246	1,084	32	144	426	1,954
02:15	10		192		24		248		34		440	
02:30	14		260		25		300		39		560	
02:45	11		238		28		290		39		528	
03:00	6	65	202	800	15	101	289	1,137	21	166	491	1,937
03:15	14		209		28		271		42		480	
03:30	16		177		18		321		34		498	
03:45	29		212		40		256		69		468	
04:00	25	180	206	859	31	157	307	1,301	56	337	513	2,160
04:15	37		218		38		300		75		518	
04:30	50		229		39		326		89		555	
04:45	68		206		49		368		117		574	
05:00	70	375	186	505	70	335	344	1,360	140	710	530	1,865
05:15	78		62		70		342		148		404	
05:30	91		91		83		354		174		445	
05:45	136		166		112		320		248		486	
06:00	126	581	196	749	130	637	288	1,026	256	1,218	484	1,775
06:15	144		188		129		268		273		456	
06:30	148		187		164		240		312		427	
06:45	163		178		214		230		377		408	
07:00	170	608	147	497	240	1,222	222	852	410	1,830	369	1,349
07:15	172		140		305		210		477		350	
07:30	132		106		324		222		456		328	
07:45	134		104		353		198		487		302	
08:00	140	602	98	379	294	1,041	180	635	434	1,643	278	1,014
08:15	146		110		272		163		418		273	
08:30	150		101		234		150		384		251	
08:45	166		70		241		142		407		212	
09:00	162	620	78	283	236	938	130	581	398	1,558	208	864
09:15	150		86		266		162		416		248	
09:30	160		53		208		140		368		193	
09:45	148		66		228		149		376		215	
10:00	164	613	68	202	211	880	124	450	375	1,493	192	652
10:15	158		48		216		132		374		180	
10:30	138		42		220		104		358		146	
10:45	153		44		233		90		386		134	
11:00	144	630	40	138	240	948	94	303	384	1,578	134	441
11:15	148		36		234		64		382		100	
11:30	170		32		232		69		402		101	
11:45	168		30		242		76		410		106	
Totals	4,439		6,562		6,685		10,668		11,124		17,230	
Split%	39.9		38.1		60.1		61.9					
Day Totals		11,001				17,353				28,354		
Day Splits		38.8				61.2						
Peak Hour	06:30		02:30		07:15		04:45		07:15		04:15	
Volume	653		909		1,276		1,408		1,854		2,177	
Factor	0.95		0.87		0.90		0.96		0.95		0.95	

Data File : D1909096

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : FIRST STREET

Segment : SANTA ANA FWY TO GOLDEN CIRCLE

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/11/19

Day: Wednesday

Interval	WB				EB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	22	85	132	605	21	78	212	691	43	163	344	1,296
12:15	31		148		24		162		55		310	
12:30	17		168		17		165		34		333	
12:45	15		157		16		152		31		309	
01:00	24	72	180	669	16	66	161	705	40	138	341	1,374
01:15	14		168		14		168		28		336	
01:30	17		158		19		186		36		344	
01:45	17		163		17		190		34		353	
02:00	18	54	172	664	20	56	164	732	38	110	336	1,396
02:15	17		164		12		166		29		330	
02:30	14		184		11		203		25		387	
02:45	5		144		13		199		18		343	
03:00	12	57	192	725	12	76	196	826	24	133	388	1,551
03:15	15		170		21		199		36		369	
03:30	14		169		19		203		33		372	
03:45	16		194		24		228		40		422	
04:00	14	80	222	795	21	135	188	871	35	215	410	1,666
04:15	14		177		29		232		43		409	
04:30	32		188		45		229		77		417	
04:45	20		208		40		222		60		430	
05:00	41	199	222	817	58	247	250	978	99	446	472	1,795
05:15	46		222		58		240		104		462	
05:30	54		186		44		228		98		414	
05:45	58		187		87		260		145		447	
06:00	62	354	194	654	90	448	251	860	152	802	445	1,514
06:15	69		170		90		224		159		394	
06:30	91		160		116		210		207		370	
06:45	132		130		152		175		284		305	
07:00	155	811	144	503	120	484	138	482	275	1,295	282	985
07:15	176		138		115		130		291		268	
07:30	240		119		136		122		376		241	
07:45	240		102		113		92		353		194	
08:00	192	787	94	342	172	742	102	400	364	1,529	196	742
08:15	216		94		186		92		402		186	
08:30	191		82		166		119		357		201	
08:45	188		72		218		87		406		159	
09:00	164	612	82	277	192	659	77	281	356	1,271	159	558
09:15	150		67		146		60		296		127	
09:30	160		62		157		78		317		140	
09:45	138		66		164		66		302		132	
10:00	140	497	66	218	130	533	56	205	270	1,030	122	423
10:15	127		57		143		61		270		118	
10:30	126		61		134		46		260		107	
10:45	104		34		126		42		230		76	
11:00	160	563	38	138	162	602	37	129	322	1,165	75	267
11:15	134		35		130		36		264		71	
11:30	123		27		162		26		285		53	
11:45	146		38		148		30		294		68	
Totals	4,171		6,407		4,126		7,160		8,297		13,567	
Split%	50.3		47.2		49.7		52.8					
Day Totals		10,578				11,286				21,864		
Day Splits		48.4				51.6						
Peak Hour	07:30		04:30		08:15		05:15		08:00		05:00	
Volume	888		840		762		979		1,529		1,795	
Factor	0.93		0.95		0.87		0.94		0.94		0.95	

* Data File : D1909141

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : FAIRVIEW STREET

Segment : HARVARD AVE TO EDINGER AVE

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/25/19

Day: Wednesday

Interval	SB				NB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	18	72	204	942	56	175	268	969	74	247	472	1,911
12:15	21		254		44		211		65		465	
12:30	16		236		41		246		57		482	
12:45	17		248		34		244		51		492	
01:00	10	52	247	991	29	106	282	1,237	39	158	529	2,228
01:15	10		227		35		280		45		507	
01:30	16		245		21		328		37		573	
01:45	16		272		21		347		37		619	
02:00	14	66	283	1,116	39	110	440	1,615	53	176	723	2,731
02:15	16		265		23		352		39		617	
02:30	18		290		12		426		30		716	
02:45	18		278		36		397		54		675	
03:00	12	135	246	886	25	99	406	1,781	37	234	652	2,667
03:15	23		232		21		402		44		634	
03:30	42		206		21		475		63		681	
03:45	58		202		32		498		90		700	
04:00	64	471	216	841	43	183	462	1,914	107	654	678	2,755
04:15	68		226		38		486		106		712	
04:30	139		195		44		467		183		662	
04:45	200		204		58		499		258		703	
05:00	127	816	210	867	60	329	502	1,913	187	1,145	712	2,780
05:15	167		224		76		470		243		694	
05:30	228		204		96		467		324		671	
05:45	294		229		97		474		391		703	
06:00	218	1,231	195	685	124	600	454	1,687	342	1,831	649	2,372
06:15	278		170		140		399		418		569	
06:30	332		178		160		460		492		638	
06:45	403		142		176		374		579		516	
07:00	400	1,487	130	509	275	1,278	324	1,115	675	2,765	454	1,624
07:15	428		154		276		283		704		437	
07:30	350		113		375		256		725		369	
07:45	309		112		352		252		661		364	
08:00	370	1,480	107	403	250	886	238	829	620	2,366	345	1,232
08:15	374		118		220		207		594		325	
08:30	390		82		208		190		598		272	
08:45	346		96		208		194		554		290	
09:00	253	988	94	324	210	824	217	765	463	1,812	311	1,089
09:15	271		88		190		206		461		294	
09:30	239		68		234		165		473		233	
09:45	225		74		190		177		415		251	
10:00	182	812	52	190	181	731	136	531	363	1,543	188	721
10:15	205		45		181		159		386		204	
10:30	215		49		195		140		410		189	
10:45	210		44		174		96		384		140	
11:00	195	787	54	146	196	841	86	337	391	1,628	140	483
11:15	197		32		196		97		393		129	
11:30	191		33		226		88		417		121	
11:45	204		27		223		66		427		93	
Totals	8,397		7,900		6,162		14,693		14,559		22,593	
Split%	57.7		35.0		42.3		65.0					
Day Totals		16,297				20,855				37,152		
Day Splits		43.9				56.1						
Peak Hour	06:45		02:00		07:00		04:15		07:00		04:15	
Volume	1,581		1,116		1,278		1,954		2,765		2,789	
Factor	0.92		0.96		0.85		0.97		0.95		0.98	

* Data File : D1909070

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : FAIRVIEW STREET

Segment : SEGERSTROM AVE TO WARNER AVE

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 10/09/19

Day: Wednesday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	51	162	218	888	22	96	239	996	73	258	457	1,884
12:15	40		222		30		222		70		444	
12:30	38		222		25		265		63		487	
12:45	33		226		19		270		52		496	
01:00	25	90	292	1,227	11	47	262	1,092	36	137	554	2,319
01:15	28		280		11		246		39		526	
01:30	19		310		14		284		33		594	
01:45	18		345		11		300		29		645	
02:00	17	87	394	1,627	22	81	292	1,070	39	168	686	2,697
02:15	15		380		14		251		29		631	
02:30	19		394		16		279		35		673	
02:45	36		459		29		248		65		707	
03:00	21	77	418	1.738	24	176	277	1.111	45	253	695	2.849
03:15	17		424		22		289		39		713	
03:30	17		428		56		277		73		705	
03:45	22		468		74		268		96		736	
04:00	26	152	518	1,919	58	435	267	1,071	84	587	785	2,990
04:15	25		483		98		234		123		717	
04:30	46		474		128		276		174		750	
04:45	55		444		151		294		206		738	
05:00	60	292	470	1,933	116	856	270	1,071	176	1,148	740	3,004
05:15	48		501		188		274		236		775	
05:30	96		486		269		267		365		753	
05:45	88		476		283		260		371		736	
06:00	86	482	434	1.618	264	1.511	243	879	350	1.993	677	2.497
06:15	132		406		312		208		444		614	
06:30	132		434		420		228		552		662	
06:45	132		344		515		200		647		544	
07:00	192	983	302	1,032	490	2,095	232	743	682	3,078	534	1,775
07:15	213		290		556		182		769		472	
07:30	293		228		555		179		848		407	
07:45	285		212		494		150		779		362	
08:00	219	829	190	726	549	2.197	138	558	768	3.026	328	1.284
08:15	218		196		558		142		776		338	
08:30	196		160		557		152		753		312	
08:45	196		180		533		126		729		306	
09:00	214	782	156	616	374	1,270	94	405	588	2,052	250	1,021
09:15	184		162		334		128		518		290	
09:30	198		154		284		109		482		263	
09:45	186		144		278		74		464		218	
10:00	192	720	156	522	192	900	74	243	384	1,620	230	765
10:15	174		144		234		52		408		196	
10:30	176		128		234		50		410		178	
10:45	178		94		240		67		418		161	
11:00	167	778	76	276	213	875	38	149	380	1,653	114	425
11:15	205		72		198		33		403		105	
11:30	209		66		220		41		429		107	
11:45	197		62		244		37		441		99	
Totals	5,434		14,122		10,539		9,388		15,973		23,510	
Split%	34.0		60.1		66.0		39.9					
Day Totals		19,556				19,927				39,483		
Day Splits		49.5				50.5						
Peak Hour	07:30		03:45		08:00		01:30		07:30		04:45	
Volume	1,015		1,943		2,197		1,127		3,171		3,006	
Factor	0.87		0.94		0.98		0.94		0.93		0.97	

Data File : D1909068

Attachment 8

Wednesday, September 11, 2019 Location: Santa Ana PROJECT:

ADT147 MacARTHUR BL from SUSAN ST to FAIRVIEW ST. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:30			16		15			12:00			217		153		
0:15			6		15			12:15			221		175		
0:30			9		14			12:30			213		145		
0:45			6	37	4	48	85	12:45			192	843	200	673	1516
1:00			7		6			13:00			191		187		
1:15			6		8			13:15			186		198		
1:30			13		5			13:30			217		199		
1:45			9	35	7	26	61	13:45			178	772	218	802	1574
2:00			6		4			14:00			210		215		
2:15			6		4			14:15			163		218		
2:30			11		0			14:30			259		210		
2:45			9	32	0	8	40	14:45			232	864	232	875	1739
3:00			18		6			15:00			220		315		
3:15			9		5			15:15			202		278		
3:30			21		6			15:30			232		290		
3:45			31	79	8	25	104	15:45			177	831	374	1257	2088
4:00			35		21			16:00			236		362		
4:15			25		10			16:15			235		385		
4:30			23		41			16:30			258		383		
4:45			42	125	64	136	261	16:45			234	963	386	1516	2479
5:00			35		32			17:00			313		414		
5:15			32		36			17:15			249		358		
5:30			62		62			17:30			262		341		
5:45			60	189	83	213	402	17:45			205	1029	407	1520	2549
6:00			62		55			18:00			219		379		
6:15			71		68			18:15			205		318		
6:30			129		73			18:30			180		240		
6:45			154	416	96	292	708	18:45			174	778	265	1202	1980
7:00			210		101			19:00			165		212		
7:15			246		127			19:15			131		162		
7:30			337		141			19:30			164		154		
7:45			390	1183	191	560	1743	19:45			104	564	135	663	1227
8:00			257		174			20:00			105		123		
8:15			336		132			20:15			127		81		
8:30			298		148			20:30			98		56		
8:45			291	1182	159	613	1795	20:45			96	426	86	346	772
9:00			219		144			21:00			106		85		
9:15			186		141			21:15			80		52		
9:30			169		142			21:30			74		51		
9:45			145	719	144	571	1290	21:45			57	317	34	222	539
10:00			143		142			22:00			64		55		
10:15			144		118			22:15			40		49		
10:30			158		139			22:30			41		34		
10:45			163	608	164	563	1171	22:45			33	178	29	167	345
11:00			180		117			23:00			40		25		
11:15			171		136			23:15			25		34		
11:30			165		152			23:30			19		26		
11:45			209	725	171	576	1301	23:45			11	95	26	111	206
Total Vol.				5330		3631	**8961**					7660		9354	**17014**

Daily Totals

NB	SB	EB	WB	**Combined**
		12990	12985	**25975**

			AM				**PM**		
Split %			59.5%	40.5%	**34.5%**		45.0%	55.0%	**65.5%**
Peak Hour	0:30	0:30	7:30	11:30	**7:30**		16:45	16:15	**16:15**
Volume			1320	651	**1958**		1058	1568	**2608**
P.H.F.			0.85	0.93	**0.84**		0.85	0.95	**0.90**

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

Location : EDINGER AVENUE
Segment : FAIRVIEW ST TO RAITT ST
Client : CITY SANTA ANA

Site: SANTA ANA
Date: 09/17/19
Day: Tuesday

Interval	EB				WB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	35	112	166	666	34	104	172	665	69	216	338	1,331
12:15	32		158		22		160		54		318	
12:30	30		186		21		175		51		361	
12:45	15		156		27		158		42		314	
01:00	17	79	193	791	14	57	162	750	31	136	355	1,541
01:15	18		182		18		168		36		350	
01:30	30		202		12		194		42		396	
01:45	14		214		13		226		27		440	
02:00	8	45	194	961	8	55	202	865	16	100	396	1,826
02:15	8		229		14		204		22		433	
02:30	15		276		15		207		30		483	
02:45	14		262		18		252		32		514	
03:00	5	48	300	1,073	14	78	264	1,093	19	126	564	2,166
03:15	8		272		12		280		20		552	
03:30	16		231		20		273		36		504	
03:45	19		270		32		276		51		546	
04:00	24	163	298	1,053	22	199	284	1,197	46	362	582	2,250
04:15	31		234		33		308		64		542	
04:30	56		269		66		294		122		563	
04:45	52		252		78		311		130		563	
05:00	49	337	280	1,103	62	379	317	1,213	111	716	597	2,316
05:15	64		282		84		288		148		570	
05:30	104		276		116		287		220		563	
05:45	120		265		117		321		237		586	
06:00	105	624	251	951	100	558	296	1,112	205	1,182	547	2,063
06:15	146		224		134		292		280		516	
06:30	176		252		152		242		328		494	
06:45	197		224		172		282		369		506	
07:00	244	1,080	204	856	198	905	240	797	442	1,985	444	1,653
07:15	308		218		216		202		524		420	
07:30	273		238		239		196		512		434	
07:45	255		196		252		159		507		355	
08:00	222	900	236	796	218	727	166	645	440	1,627	402	1,441
08:15	238		197		169		188		407		385	
08:30	220		195		176		149		396		344	
08:45	220		168		164		142		384		310	
09:00	164	669	155	561	150	580	126	464	314	1,249	281	1,025
09:15	188		144		156		147		344		291	
09:30	172		120		138		109		310		229	
09:45	145		142		136		82		281		224	
10:00	150	620	105	328	153	644	99	311	303	1,264	204	639
10:15	146		94		174		81		320		175	
10:30	167		70		145		71		312		141	
10:45	157		59		172		60		329		119	
11:00	148	635	58	200	170	614	50	164	318	1,249	108	364
11:15	158		59		162		44		320		103	
11:30	151		42		148		39		299		81	
11:45	178		41		134		31		312		72	
Totals	5,312		9,339		4,900		9,276		10,212		18,615	
Split%	52.0		50.2		48.0		49.8					
Day Totals		14,651				14,176				28,827		
Day Splits		50.8				49.2						
Peak Hour	07:00		02:30		07:15		04:15		07:00		05:00	
Volume	1,080		1,110		925		1,230		1,985		2,316	
Factor	0.88		0.93		0.92		0.97		0.95		0.97	

Data File : D1909050

Attachment 8

Thursday, October 10, 2019 Location: Santa Ana PROJECT:

ADT174 McFADDEN AVE from FAIRVIEW ST to RAITT ST. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:30			21		35			12:00			103		104		
0:15			29		24			12:15			113		123		
0:30			23		20			12:30			98		113		
0:45			19	92	13	92	184	12:45			110	424	130	470	894
1:00			16		9			13:00			140		109		
1:15			10		11			13:15			158		121		
1:30			11		13			13:30			148		132		
1:45			14	51	12	45	96	13:45			156	602	126	488	1090
2:00			13		8			14:00			136		129		
2:15			8		5			14:15			169		132		
2:30			7		10			14:30			174		157		
2:45			12	40	16	39	79	14:45			184	663	184	602	1265
3:00			13		11			15:00			221		183		
3:15			19		13			15:15			193		203		
3:30			12		14			15:30			176		191		
3:45			15	59	17	55	114	15:45			187	777	205	782	1559
4:00			10		23			16:00			208		195		
4:15			19		25			16:15			194		175		
4:30			29		23			16:30			187		179		
4:45			35	93	41	112	205	16:45			181	770	190	739	1509
5:00			39		53			17:00			195		204		
5:15			58		62			17:15			204		195		
5:30			73		78			17:30			213		222		
5:45			87	257	86	279	536	17:45			217	829	216	837	1666
6:00			85		84			18:00			223		230		
6:15			91		78			18:15			197		200		
6:30			106		82			18:30			186		207		
6:45			127	409	101	345	754	18:45			181	787	189	826	1613
7:00			140		123			19:00			198		186		
7:15			178		164			19:15			179		175		
7:30			219		189			19:30			187		156		
7:45			229	766	196	672	1438	19:45			161	725	140	657	1382
8:00			218		187			20:00			124		117		
8:15			186		159			20:15			115		103		
8:30			174		122			20:30			134		111		
8:45			157	735	103	571	1306	20:45			110	483	100	431	914
9:00			125		98			21:00			102		98		
9:15			130		104			21:15			98		104		
9:30			108		91			21:30			94		68		
9:45			114	477	100	393	870	21:45			85	379	95	365	744
10:00			100		93			22:00			77		61		
10:15			109		98			22:15			79		71		
10:30			115		101			22:30			67		52		
10:45			116	440	109	401	841	22:45			68	291	38	222	513
11:00			123		117			23:00			56		27		
11:15			131		108			23:15			52		35		
11:30			119		107			23:30			47		24		
11:45			99	472	115	447	919	23:45			32	187	25	111	298
Total Vol.			3891		3451		**7342**				6917		6530		**13447**

Daily Totals

NB	SB	EB	WB	Combined
		10808	9981	**20789**

			AM			PM		
Split %			53.0%	47.0%	**35.3%**	51.4%	48.6%	**64.7%**
Peak Hour	0:30	0:30	7:30	7:15	**7:30**	17:15	17:30	**17:15**
Volume			852	736	**1583**	857	868	**1720**
P.H.F.			0.93	0.94	**0.93**	0.96	0.94	**0.95**

Attachment 8

Thursday, October 03, 2019 Location: Santa Ana PROJECT:

ADT148 MacARTHUR BL from FAIRVIEW ST to RAITT ST. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:30			13		17			12:00			199		185		
0:15			15		15			12:15			186		197		
0:30			12		13			12:30			170		183		
0:45			11	51	16	61	112	12:45			173	728	194	759	1487
1:00			7		12			13:00			168		199		
1:15			6		8			13:15			201		214		
1:30			8		11			13:30			234		221		
1:45			4	25	7	38	63	13:45			208	811	237	871	1682
2:00			4		5			14:00			206		264		
2:15			2		10			14:15			229		242		
2:30			8		11			14:30			312		278		
2:45			14	28	9	35	63	14:45			304	1051	341	1125	2176
3:00			13		6			15:00			281		359		
3:15			11		8			15:15			242		342		
3:30			15		12			15:30			235		336		
3:45			21	60	18	44	104	15:45			214	972	407	1444	2416
4:00			31		15			16:00			206		400		
4:15			34		23			16:15			211		395		
4:30			39		27			16:30			214		414		
4:45			46	150	37	102	252	16:45			231	862	463	1672	2534
5:00			42		43			17:00			240		486		
5:15			57		45			17:15			238		452		
5:30			76		41			17:30			242		463		
5:45			68	243	48	177	420	17:45			214	934	461	1862	2796
6:00			84		52			18:00			218		451		
6:15			96		50			18:15			196		355		
6:30			124		78			18:30			167		374		
6:45			206	510	107	287	797	18:45			139	720	311	1491	2211
7:00			241		112			19:00			156		273		
7:15			353		199			19:15			124		223		
7:30			429		266			19:30			127		184		
7:45			435	1458	343	920	2378	19:45			104	511	136	816	1327
8:00			407		257			20:00			118		104		
8:15			320		168			20:15			105		112		
8:30			356		152			20:30			94		85		
8:45			322	1405	131	708	2113	20:45			103	420	96	397	817
9:00			252		127			21:00			95		86		
9:15			153		132			21:15			100		75		
9:30			142		121			21:30			96		72		
9:45			145	692	136	516	1208	21:45			68	359	67	300	659
10:00			136		108			22:00			54		62		
10:15			127		114			22:15			46		54		
10:30			134		119			22:30			41		46		
10:45			125	522	127	468	990	22:45			34	175	41	203	378
11:00			135		157			23:00			31		36		
11:15			153		154			23:15			23		45		
11:30			188		152			23:30			17		34		
11:45			213	689	163	626	1315	23:45			12	83	28	143	226
Total Vol.				5833		3982	**9815**					7626		11083	**18709**

Daily Totals

NB	SB	EB	WB	**Combined**
		13459	15065	**28524**

			AM				**PM**		
Split %			59.4%	40.6%	**34.4%**		40.8%	59.2%	**65.6%**
Peak Hour	0:30	0:30	7:15	7:15	**7:15**		14:30	16:45	**16:45**
Volume			1624	1065	**2689**		1139	1864	**2815**
P.H.F.			0.93	0.78	**0.86**		0.91	0.96	**0.97**

cs@aimtd.com Tell. 714 253 7888

Wednesday, October 02, 2019 Location: Santa Ana PROJECT:

ADT222 SEGERSTROM AVE from FAIRVIEW ST to RAITT ST. **Prepared by AimTD tel. 714 753 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:30			34		35			12:00			94		89		
0:15			37		32			12:15			86		101		
0:30			26		29			12:30			68		85		
0:45			31	128	31	127	255	12:45			71	319	88	363	682
1:00			34		25			13:00			75		108		
1:15			26		21			13:15			78		93		
1:30			18		22			13:30			85		95		
1:45			20	98	19	87	185	13:45			104	342	113	409	751
2:00			19		17			14:00			87		105		
2:15			10		10			14:15			78		104		
2:30			11		12			14:30			90		101		
2:45			5	45	6	45	90	14:45			86	341	105	415	756
3:00			3		8			15:00			96		112		
3:15			5		7			15:15			105		103		
3:30			4		6			15:30			108		123		
3:45			6	18	11	32	50	15:45			110	419	147	485	904
4:00			7		12			16:00			106		139		
4:15			6		10			16:15			114		167		
4:30			4		9			16:30			195		184		
4:45			8	25	8	39	64	16:45			175	590	271	761	1351
5:00			6		6			17:00			189		242		
5:15			11		7			17:15			173		196		
5:30			16		8			17:30			191		207		
5:45			15	48	12	33	81	17:45			178	731	242	887	1618
6:00			21		8			18:00			172		257		
6:15			26		17			18:15			176		280		
6:30			27		23			18:30			163		268		
6:45			31	105	29	77	182	18:45			157	668	282	1087	1755
7:00			34		31			19:00			186		302		
7:15			42		51			19:15			188		330		
7:30			59		72			19:30			207		294		
7:45			84	219	68	222	441	19:45			193	774	280	1206	1980
8:00			81		63			20:00			198		271		
8:15			95		70			20:15			174		245		
8:30			134		80			20:30			137		179		
8:45			153	463	112	325	788	20:45			106	615	180	875	1490
9:00			156		135			21:00			96		156		
9:15			231		185			21:15			78		132		
9:30			276		249			21:30			86		83		
9:45			257	920	297	866	1786	21:45			89	349	73	444	793
10:00			252		251			22:00			101		80		
10:15			204		142			22:15			72		72		
10:30			178		123			22:30			61		70		
10:45			132	766	134	650	1416	22:45			52	286	64	286	572
11:00			104		108			23:00			56		54		
11:15			112		100			23:15			45		43		
11:30			101		96			23:30			37		42		
11:45			91	408	84	388	796	23:45			35	173	37	176	349
Total Vol.			3243		2891	**6134**					5607		7394		**13001**

Daily Totals

NB	SB	EB	WB	Combined
		8850	10285	**19135**

			AM					**PM**		
Split %			52.9%	47.1%	**32.1%**			43.1%	56.9%	**67.9%**
Peak Hour	0:30	0:30	9:15	9:15	**9:15**			19:15	18:45	**19:00**
Volume			1016	982	**1998**			786	1208	**1980**
P.H.F.			0.92	0.83	**0.90**			0.95	0.92	**0.96**

pacific@aimtd.com Tell. 714 753 7888

Attachment 8

Attachment 8

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : BRISTOL STREET

Segment : WARNER AVE TO EDINGER AVE

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/17/19

Day: Tuesday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	72	181	226	944	34	130	234	885	106	311	460	1,829
12:15	42		228		40		222		82		450	
12:30	29		225		34		222		63		447	
12:45	38		265		22		207		60		472	
01:00	34	123	251	1,071	28	86	212	892	62	209	463	1,963
01:15	23		272		18		188		41		460	
01:30	38		282		24		246		62		528	
01:45	28		266		16		246		44		512	
02:00	29	120	279	1,293	18	83	233	1,003	47	203	512	2,296
02:15	30		288		23		236		53		524	
02:30	24		344		16		266		40		610	
02:45	37		382		26		268		63		650	
03:00	29	92	402	1.547	22	124	332	1.088	51	216	734	2.635
03:15	18		384		20		236		38		620	
03:30	21		384		32		278		53		662	
03:45	24		377		50		242		74		619	
04:00	22	121	394	1,549	51	395	228	924	73	516	622	2,473
04:15	30		378		84		226		114		604	
04:30	33		376		146		216		179		592	
04:45	36		401		114		254		150		655	
05:00	44	220	426	1,569	99	606	266	1,057	143	826	692	2,626
05:15	48		394		115		241		163		635	
05:30	64		377		186		272		250		649	
05:45	64		372		206		278		270		650	
06:00	94	425	362	1,401	211	1,195	234	933	305	1,620	596	2,334
06:15	90		379		234		228		324		607	
06:30	108		336		328		239		436		575	
06:45	133		324		422		232		555		556	
07:00	190	1,030	254	1,057	421	1,708	226	858	611	2,738	480	1,915
07:15	236		283		432		252		668		535	
07:30	302		264		425		206		727		470	
07:45	302		256		430		174		732		430	
08:00	309	1.125	230	793	384	1.640	198	712	693	2.765	428	1.505
08:15	346		192		375		199		721		391	
08:30	300		187		445		177		745		364	
08:45	170		184		436		138		606		322	
09:00	165	704	166	649	310	1,110	146	578	475	1,814	312	1,227
09:15	169		171		256		143		425		314	
09:30	194		164		276		145		470		309	
09:45	176		148		268		144		444		292	
10:00	170	718	151	531	220	866	88	367	390	1,584	239	898
10:15	188		126		212		103		400		229	
10:30	182		110		206		90		388		200	
10:45	178		144		228		86		406		230	
11:00	198	870	91	347	229	924	68	225	427	1,794	159	572
11:15	241		100		219		57		460		157	
11:30	221		82		234		50		455		132	
11:45	210		74		242		50		452		124	
Totals	5,729		12,751		8,867		9,522		14,596		22,273	
Split%	39.3		57.2		60.7		42.8					
Day Totals		18,480				18,389				36,869		
Day Splits		50.1				49.9						
Peak Hour	07:30		04:45		07:00		02:45		07:45		02:45	
Volume	1,259		1,598		1,708		1,114		2,891		2,666	
Factor	0.91		0.94		0.99		0.84		0.97		0.91	

Data File : D1909015

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : BRISTOL STREET

Segment : SEGERSTROM AVE TO WARNER AVE

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/17/19

Day: Tuesday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	58	170	250	1,064	40	130	261	1,063	98	300	511	2,127
12:15	48		256		36		264		84		520	
12:30	25		278		31		288		56		566	
12:45	39		280		23		250		62		530	
01:00	34	113	256	1,083	20	83	256	1,022	54	196	512	2,105
01:15	30		254		22		214		52		468	
01:30	30		304		28		280		58		584	
01:45	19		269		13		272		32		541	
02:00	25	90	304	1,360	20	81	228	1,087	45	171	532	2,447
02:15	22		298		20		267		42		565	
02:30	20		342		23		282		43		624	
02:45	23		416		18		310		41		726	
03:00	18	58	409	1,493	18	113	342	1,115	36	171	751	2,608
03:15	12		340		19		257		31		597	
03:30	13		320		32		258		45		578	
03:45	15		424		44		258		59		682	
04:00	15	75	390	1,460	53	396	212	922	68	471	602	2,382
04:15	24		365		96		248		120		613	
04:30	14		373		120		234		134		607	
04:45	22		332		127		228		149		560	
05:00	26	150	400	1,480	106	604	271	1,092	132	754	671	2,572
05:15	32		370		121		277		153		647	
05:30	40		364		196		272		236		636	
05:45	52		346		181		272		233		618	
06:00	64	340	372	1,324	204	1,218	247	987	268	1,558	619	2,311
06:15	70		332		224		252		294		584	
06:30	98		308		348		234		446		542	
06:45	108		312		442		254		550		566	
07:00	158	913	277	1,092	408	1,907	235	922	566	2,820	512	2,014
07:15	212		290		491		252		703		542	
07:30	243		269		525		216		768		485	
07:45	300		256		483		219		783		475	
08:00	292	999	220	804	444	1,814	220	730	736	2,813	440	1,534
08:15	326		205		441		192		767		397	
08:30	223		201		464		166		687		367	
08:45	158		178		465		152		623		330	
09:00	154	685	192	648	394	1,306	124	511	548	1,991	316	1,159
09:15	184		162		306		131		490		293	
09:30	171		137		292		130		463		267	
09:45	176		157		314		126		490		283	
10:00	177	741	141	493	254	942	86	379	431	1,683	227	872
10:15	170		132		229		98		399		230	
10:30	200		106		215		107		415		213	
10:45	194		114		244		88		438		202	
11:00	239	989	104	352	244	1,034	58	197	483	2,023	162	549
11:15	276		100		232		43		508		143	
11:30	226		84		280		54		506		138	
11:45	248		64		278		42		526		106	
Totals	5,323		12,653		9,628		10,027		14,951		22,680	
Split%	35.6		55.8		64.4		44.2					
Day Totals		17,976				19,655				37,631		
Day Splits		47.8				52.2						
Peak Hour	07:30		03:45		07:15		02:15		07:30		02:30	
Volume	1,161		1,552		1,943		1,201		3,054		2,698	
Factor	0.89		0.92		0.93		0.88		0.98		0.90	

* Data File : D1909014

Attachment 8

Wednesday, October 02, 2019 Location: Santa Ana PROJECT:

ADT261 WARNER AVE from RAITT ST to BRISTOL ST **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:30			32		32			12:00			182		187		
0:15			33		25			12:15			187		186		
0:30			25		29			12:30			177		222		
0:45			31	121	16	102	223	12:45			205	751	204	799	1550
1:00			14		24			13:00			189		232		
1:15			11		19			13:15			223		281		
1:30			13		14			13:30			240		270		
1:45			8	46	12	69	115	13:45			323	975	323	1106	2081
2:00			15		15			14:00			343		311		
2:15			7		14			14:15			386		303		
2:30			15		18			14:30			326		314		
2:45			16	53	13	60	113	14:45			312	1367	341	1269	2636
3:00			22		11			15:00			353		351		
3:15			23		13			15:15			321		376		
3:30			21		15			15:30			329		364		
3:45			34	100	18	57	157	15:45			319	1322	362	1453	2775
4:00			50		21			16:00			277		371		
4:15			55		31			16:15			298		395		
4:30			75		74			16:30			291		378		
4:45			111	291	85	211	502	16:45			321	1187	395	1539	2726
5:00			104		78			17:00			318		420		
5:15			130		96			17:15			348		421		
5:30			185		114			17:30			308		384		
5:45			204	623	127	415	1038	17:45			289	1263	397	1622	2885
6:00			195		121			18:00			296		393		
6:15			184		128			18:15			260		356		
6:30			231		139			18:30			275		324		
6:45			302	912	195	583	1495	18:45			231	1062	285	1358	2420
7:00			313		228			19:00			186		256		
7:15			363		324			19:15			165		241		
7:30			395		423			19:30			143		224		
7:45			408	1479	437	1412	2891	19:45			141	635	179	900	1535
8:00			274		313			20:00			134		165		
8:15			276		245			20:15			125		158		
8:30			241		213			20:30			114		132		
8:45			213	1004	194	965	1969	20:45			124	497	128	583	1080
9:00			202		185			21:00			118		124		
9:15			151		174			21:15			107		110		
9:30			179		170			21:30			114		116		
9:45			152	684	164	693	1377	21:45			96	435	98	448	883
10:00			153		169			22:00			86		94		
10:15			193		187			22:15			66		84		
10:30			175		168			22:30			71		100		
10:45			162	683	167	691	1374	22:45			40	263	78	356	619
11:00			177		189			23:00			45		64		
11:15			157		196			23:15			48		49		
11:30			171		185			23:30			34		51		
11:45			163	668	174	744	1412	23:45			29	156	37	201	357
Total Vol.				6664		6002	**12666**					9913		11634	**21547**

Daily Totals

NB	SB	EB	WB	**Combined**
		16577	17636	**34213**

			AM				**PM**		
Split %			52.6%	47.4%	**37.0%**		46.0%	54.0%	**63.0%**
Peak Hour	0:30	0:30	7:00	7:15	**7:15**		13:45	17:00	**16:45**
Volume			1479	1497	**2937**		1378	1622	**2915**
P.H.F.			0.91	0.86	**0.87**		0.89	0.96	**0.95**

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : BRISTOL STREET

Segment : SUNFLOWER AVE TO MACARTHUR BL

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/17/19

Day: Tuesday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	56	191	290	1,165	31	116	300	1,251	87	307	590	2,416
12:15	46		288		27		284		73		572	
12:30	51		296		34		324		85		620	
12:45	38		291		24		343		62		634	
01:00	31	96	290	1,166	24	76	300	1,126	55	172	590	2,292
01:15	26		274		13		260		39		534	
01:30	22		302		22		260		44		562	
01:45	17		300		17		306		34		606	
02:00	31	105	286	1,183	18	67	268	1,003	49	172	554	2,186
02:15	22		293		15		264		37		557	
02:30	20		298		14		232		34		530	
02:45	32		306		20		239		52		545	
03:00	10	43	313	1,196	15	99	268	955	25	142	581	2,151
03:15	14		266		22		230		36		496	
03:30	12		300		27		229		39		529	
03:45	7		317		35		228		42		545	
04:00	18	76	322	1,261	40	333	218	846	58	409	540	2,107
04:15	16		336		75		205		91		541	
04:30	20		303		108		227		128		530	
04:45	22		300		110		196		132		496	
05:00	36	171	338	1,277	96	555	200	872	132	726	538	2,149
05:15	34		323		129		214		163		537	
05:30	43		318		162		220		205		538	
05:45	58		298		168		238		226		536	
06:00	59	313	291	1,193	186	1,017	226	857	245	1,330	517	2,050
06:15	66		322		176		228		242		550	
06:30	84		286		311		183		395		469	
06:45	104		294		344		220		448		514	
07:00	110	549	261	1,019	328	1,535	222	854	438	2,084	483	1,873
07:15	147		234		368		218		515		452	
07:30	124		262		413		197		537		459	
07:45	168		262		426		217		594		479	
08:00	160	629	212	795	424	1,606	204	738	584	2,235	416	1,533
08:15	195		206		371		208		566		414	
08:30	161		208		409		180		570		388	
08:45	113		169		402		146		515		315	
09:00	140	637	180	639	350	1,093	142	500	490	1,730	322	1,139
09:15	155		164		260		126		415		290	
09:30	168		139		233		122		401		261	
09:45	174		156		250		110		424		266	
10:00	179	751	138	491	228	884	112	362	407	1,635	250	853
10:15	169		128		222		82		391		210	
10:30	193		106		252		84		445		190	
10:45	210		119		182		84		392		203	
11:00	240	1,081	93	332	254	1,052	82	231	494	2,133	175	563
11:15	276		104		258		56		534		160	
11:30	279		75		270		45		549		120	
11:45	286		60		270		48		556		108	
Totals	4,642		11,717		8,433		9,595		13,075		21,312	
Split%	35.5		55.0		64.5		45.0					
Day Totals		16,359				18,028				34,387		
Day Splits		47.6				52.4						
Peak Hour	11:00		04:45		07:30		12:00		07:45		12:00	
Volume	1,081		1,279		1,634		1,251		2,314		2,416	
Factor	0.94		0.95		0.96		0.91		0.97		0.95	

Data File : D1909011

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

Location : FLOWER STREET
Segment : SEGERSTROM AVE TO WARNER AVE
Client : CITY SANTA ANA

Site: SANTA ANA
Date: 09/10/19
Day: Tuesday

Interval	SB				NB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	15	46	70	306	14	59	76	282	29	105	146	588
12:15	10		80		13		65		23		145	
12:30	10		78		19		65		29		143	
12:45	11		78		13		76		24		154	
01:00	3	15	80	295	11	29	96	361	14	44	176	656
01:15	2		60		9		78		11		138	
01:30	3		79		6		94		9		173	
01:45	7		76		3		93		10		169	
02:00	6	23	95	524	3	23	124	627	9	46	219	1,151
02:15	2		99		3		116		5		215	
02:30	5		140		8		172		13		312	
02:45	10		190		9		215		19		405	
03:00	3	34	109	425	8	23	275	935	11	57	384	1,360
03:15	7		113		0		217		7		330	
03:30	7		89		6		208		13		297	
03:45	17		114		9		235		26		349	
04:00	9	118	126	448	5	31	224	1,009	14	149	350	1,457
04:15	10		112		3		290		13		402	
04:30	44		105		9		236		53		341	
04:45	55		105		14		259		69		364	
05:00	30	260	120	506	10	90	320	1,217	40	350	440	1,723
05:15	61		124		20		321		81		445	
05:30	89		132		36		288		125		420	
05:45	80		130		24		288		104		418	
06:00	72	424	106	372	38	185	242	718	110	609	348	1,090
06:15	80		92		29		200		109		292	
06:30	122		92		48		156		170		248	
06:45	150		82		70		120		220		202	
07:00	171	727	92	331	84	538	118	418	255	1,265	210	749
07:15	186		79		127		102		313		181	
07:30	194		84		161		106		355		190	
07:45	176		76		166		92		342		168	
08:00	145	638	80	245	118	308	81	316	263	946	161	561
08:15	160		58		76		92		236		150	
08:30	164		61		62		79		226		140	
08:45	169		46		52		64		221		110	
09:00	115	346	41	146	57	186	47	204	172	532	88	350
09:15	78		38		40		53		118		91	
09:30	80		33		48		52		128		85	
09:45	73		34		41		52		114		86	
10:00	70	245	37	134	55	207	52	174	125	452	89	308
10:15	59		39		58		42		117		81	
10:30	56		30		42		42		98		72	
10:45	60		28		52		38		112		66	
11:00	59	262	11	54	48	253	45	109	107	515	56	163
11:15	62		15		78		28		140		43	
11:30	77		15		57		21		134		36	
11:45	64		13		70		15		134		28	
Totals	3,138		3,786		1,932		6,370		5,070		10,156	
Split%	61.9		37.3		38.1		62.7					
Day Totals		6,924				8,302				15,226		
Day Splits		45.5				54.5						
Peak Hour	07:00		02:30		07:15		05:00		07:15		05:00	
Volume	727		552		572		1,217		1,273		1,723	
Factor	0.94		0.73		0.86		0.95		0.90		0.97	

Data File : D1909101

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

Location : EDINGER AVENUE
Segment : FLOWER ST TO BROADWAY
Client : CITY SANTA ANA

Site: SANTA ANA
Date: 09/24/19
Day: Tuesday

Interval	EB				WB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	36	91	176	638	50	123	237	1,094	86	214	413	1,732
12:15	23		136		19		323		42		459	
12:30	17		148		30		262		47		410	
12:45	15		178		24		272		39		450	
01:00	13	60	157	642	30	99	280	1,289	43	159	437	1,931
01:15	18		150		25		304		43		454	
01:30	11		161		23		339		34		500	
01:45	18		174		21		366		39		540	
02:00	20	59	176	892	15	74	403	1,786	35	133	579	2,678
02:15	17		210		12		413		29		623	
02:30	10		232		20		406		30		638	
02:45	12		274		27		564		39		838	
03:00	20	113	250	948	10	56	480	2,087	30	169	730	3,035
03:15	23		206		6		496		29		702	
03:30	32		226		16		564		48		790	
03:45	38		266		24		547		62		813	
04:00	48	381	244	905	15	116	556	2,316	63	497	800	3,221
04:15	72		210		14		568		86		778	
04:30	124		225		38		574		162		799	
04:45	137		226		49		618		186		844	
05:00	93	664	242	1,036	40	254	594	2,327	133	918	836	3,363
05:15	128		246		48		627		176		873	
05:30	190		280		80		598		270		878	
05:45	253		268		86		508		339		776	
06:00	211	1,018	225	839	86	482	566	1,836	297	1,500	791	2,675
06:15	247		232		98		434		345		666	
06:30	254		194		134		438		388		632	
06:45	306		188		164		398		470		586	
07:00	272	1,034	173	671	200	819	394	1,472	472	1,853	567	2,143
07:15	276		174		239		418		515		592	
07:30	234		164		206		341		440		505	
07:45	252		160		174		319		426		479	
08:00	230	997	168	606	180	759	302	1,013	410	1,756	470	1,619
08:15	252		164		226		283		478		447	
08:30	245		146		209		240		454		386	
08:45	270		128		144		188		414		316	
09:00	194	703	110	405	148	708	203	758	342	1,411	313	1,163
09:15	178		104		192		202		370		306	
09:30	155		100		176		215		331		315	
09:45	176		91		192		138		368		229	
10:00	144	576	82	257	184	725	163	558	328	1,301	245	815
10:15	123		65		165		160		288		225	
10:30	168		55		170		125		338		180	
10:45	141		55		206		110		347		165	
11:00	144	598	48	156	216	793	105	339	360	1,391	153	495
11:15	140		44		172		92		312		136	
11:30	164		40		213		74		377		114	
11:45	150		24		192		68		342		92	
Totals	6,294		7,995		5,008		16,875		11,302		24,870	
Split%	55.7		32.1		44.3		67.9					
Day Totals		14,289				21,883				36,172		
Day Splits		39.5				60.5						
Peak Hour	06:30		05:00		07:00		04:45		06:45		04:45	
Volume	1,108		1,036		819		2,437		1,897		3,431	
Factor	0.91		0.93		0.86		0.97		0.92		0.98	

Data File : D1909052

Attachment 8

Thursday, October 03, 2019 Location: Santa Ana PROJECT:

ADT160 MAIN ST from EDINGER AVE to McFADDEN AVE. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB		SB		EB	WB		PM Period	NB		SB		EB	WB	
0:00	34		46					12:00	176		167				
0:15	38		36					12:15	204		187				
0:30	30		27					12:30	197		209				
0:45	36	138	40	149			287	12:45	216	793	175	738			1531
1:00	26		26					13:00	197		181				
1:15	25		13					13:15	205		167				
1:30	23		15					13:30	247		159				
1:45	27	101	17	71			172	13:45	206	855	202	709			1564
2:00	21		25					14:00	228		173				
2:15	23		21					14:15	295		153				
2:30	29		17					14:30	278		151				
2:45	22	95	22	85			180	14:45	267	1068	197	674			1742
3:00	15		19					15:00	305		177				
3:15	8		29					15:15	322		205				
3:30	17		23					15:30	290		188				
3:45	25	65	26	97			162	15:45	307	1224	197	767			1991
4:00	29		41					16:00	286		215				
4:15	24		31					16:15	332		181				
4:30	41		42					16:30	341		187				
4:45	40	134	54	168			302	16:45	320	1279	218	801			2080
5:00	48		49					17:00	323		200				
5:15	55		68					17:15	336		217				
5:30	78		78					17:30	307		223				
5:45	89	270	131	326			596	17:45	289	1255	238	878			2133
6:00	75		173					18:00	275		206				
6:15	111		155					18:15	311		190				
6:30	121		173					18:30	271		187				
6:45	137	444	212	713			1157	18:45	229	1086	165	748			1834
7:00	159		317					19:00	184		161				
7:15	194		331					19:15	177		156				
7:30	243		324					19:30	180		152				
7:45	234	830	348	1320			2150	19:45	150	691	162	631			1322
8:00	204		349					20:00	140		127				
8:15	185		326					20:15	169		134				
8:30	172		357					20:30	109		115				
8:45	164	725	325	1357			2082	20:45	131	549	123	499			1048
9:00	131		298					21:00	113		133				
9:15	127		261					21:15	120		105				
9:30	135		208					21:30	104		101				
9:45	152	545	195	962			1507	21:45	110	447	90	429			876
10:00	165		169					22:00	97		86				
10:15	156		164					22:15	76		68				
10:30	146		171					22:30	86		76				
10:45	157	624	178	682			1306	22:45	65	324	58	288			612
11:00	185		180					23:00	73		47				
11:15	169		153					23:15	68		42				
11:30	152		166					23:30	42		41				
11:45	158	664	164	663			1327	23:45	31	214	34	164			378
Total Vol.		4635		6593			**11228**			9785		7326			**17111**

Daily Totals

NB	SB	EB	WB	**Combined**
14420	13919			**28339**

	AM			**PM**		
Split %	41.3%	58.7%	**39.6%**	57.2%	42.8%	**60.4%**
Peak Hour	7:15	7:45	**7:15**	16:30	17:15	**16:45**
Volume	875	1380	**2227**	1320	884	**2144**
P.H.F.	0.90	0.97	**0.96**	0.96	0.93	**0.97**

cs@aimtd.com Tell. 714 253 7888

Thursday, October 10, 2019 CITY: Santa Ana PROJECT: SC

ADT159 MAIN ST from WARNER AVE to EDINGER AVE. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB		SB		EB	WB		PM Period	NB		SB		EB	WB	
0:00	49		24					12:00	160		169				
0:15	45		37					12:15	170		159				
0:30	36		25					12:30	146		139				
0:45	31	161	35	121			282	12:45	184	660	146	613			1273
1:00	26		26					13:00	188		170				
1:15	23		18					13:15	195		157				
1:30	26		19					13:30	235		177				
1:45	21	96	12	75			171	13:45	218	836	139	643			1479
2:00	24		8					14:00	207		167				
2:15	20		16					14:15	271		182				
2:30	37		18					14:30	260		194				
2:45	26	107	19	61			168	14:45	314	1052	204	747			1799
3:00	28		18					15:00	273		182				
3:15	13		15					15:15	274		186				
3:30	21		31					15:30	330		175				
3:45	11	73	41	105			178	15:45	346	1223	187	730			1953
4:00	17		37					16:00	323		171				
4:15	24		65					16:15	353		165				
4:30	27		104					16:30	343		176				
4:45	37	105	116	322			427	16:45	318	1337	173	685			2022
5:00	49		91					17:00	332		187				
5:15	52		119					17:15	342		229				
5:30	63		162					17:30	300		224				
5:45	57	221	197	569			790	17:45	301	1275	211	851			2126
6:00	59		169					18:00	294		170				
6:15	66		195					18:15	337		165				
6:30	90		281					18:30	287		128				
6:45	106	321	317	962			1283	18:45	283	1201	145	608			1809
7:00	106		305					19:00	222		133				
7:15	145		372					19:15	209		144				
7:30	171		292					19:30	170		118				
7:45	193	615	299	1268			1883	19:45	154	755	120	515			1270
8:00	157		327					20:00	141		107				
8:15	137		334					20:15	176		119				
8:30	134		336					20:30	193		105				
8:45	133	561	356	1353			1914	20:45	162	672	102	433			1105
9:00	126		272					21:00	198		90				
9:15	122		204					21:15	174		93				
9:30	139		176					21:30	111		100				
9:45	155	542	165	817			1359	21:45	118	601	80	363			964
10:00	148		162					22:00	105		65				
10:15	151		157					22:15	108		70				
10:30	128		157					22:30	85		68				
10:45	139	566	152	628			1194	22:45	63	361	56	259			620
11:00	143		151					23:00	64		44				
11:15	163		141					23:15	78		47				
11:30	151		146					23:30	48		46				
11:45	164	621	155	593			1214	23:45	50	240	35	172			412
Total Vol.		3989		6874			**10863**			10213		6619			**16832**

Daily Totals

NB	SB	EB	WB	**Combined**
14202	13493			**27695**

	AM			**PM**		
Split %	36.7%	63.3%	**39.2%**	60.7%	39.3%	**60.8%**
Peak Hour	7:15	8:00	**7:15**	15:45	17:00	**17:00**
Volume	666	1353	**1956**	1365	851	**2126**
P.H.F.	0.86	0.95	**0.95**	0.97	0.93	**0.93**

cs@aimtd.com Tell. 714 253 7888

Wednesday, September 11, 2019 Location: Santa Ana PROJECT:

ADT157 MAIN ST from ALTON AVE to DYER RD. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB		SB		EB	WB		PM Period	NB		SB		EB	WB	
0:00	37		30					12:00	230		160				
0:15	25		33					12:15	206		177				
0:30	38		38					12:30	202		191				
0:45	34	134	57	158			292	12:45	226	864	172	700			1564
1:00	30		18					13:00	211		160				
1:15	26		19					13:15	277		171				
1:30	19		27					13:30	316		213				
1:45	16	91	20	84			175	13:45	291	1095	184	728			1823
2:00	33		23					14:00	247		189				
2:15	16		21					14:15	309		191				
2:30	68		21					14:30	364		180				
2:45	34	151	15	80			231	14:45	404	1324	186	746			2070
3:00	15		16					15:00	373		178				
3:15	17		16					15:15	340		174				
3:30	20		32					15:30	435		177				
3:45	20	72	34	98			170	15:45	359	1507	180	709			2216
4:00	16		47					16:00	384		162				
4:15	13		80					16:15	405		191				
4:30	25		123					16:30	379		202				
4:45	49	103	132	382			485	16:45	361	1529	193	748			2277
5:00	39		104					17:00	393		197				
5:15	32		125					17:15	435		191				
5:30	55		173					17:30	410		214				
5:45	79	205	209	611			816	17:45	444	1682	223	825			2507
6:00	75		209					18:00	435		165				
6:15	54		238					18:15	389		132				
6:30	84		319					18:30	400		152				
6:45	119	332	366	1132			1464	18:45	284	1508	118	567			2075
7:00	137		353					19:00	241		108				
7:15	146		348					19:15	210		126				
7:30	190		394					19:30	166		120				
7:45	163	636	395	1490			2126	19:45	158	775	119	473			1248
8:00	167		356					20:00	137		94				
8:15	133		434					20:15	119		101				
8:30	139		402					20:30	120		98				
8:45	132	571	355	1547			2118	20:45	104	480	84	377			857
9:00	140		236					21:00	101		78				
9:15	115		225					21:15	104		78				
9:30	141		208					21:30	111		70				
9:45	133	529	222	891			1420	21:45	74	390	64	290			680
10:00	128		152					22:00	112		75				
10:15	127		137					22:15	78		73				
10:30	144		156					22:30	90		56				
10:45	134	533	143	588			1121	22:45	75	355	62	266			621
11:00	181		165					23:00	83		43				
11:15	170		172					23:15	60		38				
11:30	169		180					23:30	58		35				
11:45	200	720	191	708			1428	23:45	39	240	42	158			398
Total Vol.		4077		7769			**11846**			11749		6587			**18336**

Daily Totals

NB	SB	EB	WB	**Combined**
15826	14356			**30182**

	AM			**PM**		
Split %	34.4%	65.6%	**39.2%**	64.1%	35.9%	**60.8%**
Peak Hour	11:45	7:45	**7:30**	17:15	17:00	**17:15**
Volume	838	1587	**2232**	1724	825	**2517**
P.H.F.	0.91	0.91	**0.96**	0.98	0.92	**0.94**

cs@aimtd.com Tell. 714 253 7888

Attachment 8

Wednesday, September 11, 2019 Location: Santa Ana PROJECT:

ADT224 SEGERSTROM AVE from BRISTOL ST to FLOWER ST. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:30			25		25			12:00			127		142		
0:15			20		15			12:15			125		116		
0:30			23		29			12:30			136		117		
0:45			29	97	23	92	189	12:45			144	532	111	486	1018
1:00			17		13			13:00			145		140		
1:15			12		8			13:15			161		166		
1:30			9		16			13:30			196		213		
1:45			6	44	7	44	88	13:45			213	715	206	725	1440
2:00			14		15			14:00			194		192		
2:15			11		6			14:15			165		187		
2:30			9		10			14:30			166		222		
2:45			13	47	12	43	90	14:45			182	707	250	851	1558
3:00			10		12			15:00			219		231		
3:15			11		14			15:15			177		204		
3:30			25		6			15:30			231		268		
3:45			29	75	17	49	124	15:45			194	821	303	1006	1827
4:00			29		17			16:00			209		315		
4:15			45		19			16:15			197		313		
4:30			59		36			16:30			244		332		
4:45			91	224	52	124	348	16:45			218	868	290	1250	2118
5:00			58		26			17:00			229		279		
5:15			97		36			17:15			251		265		
5:30			103		40			17:30			260		280		
5:45			135	393	49	151	544	17:45			225	965	285	1109	2074
6:00			90		57			18:00			212		318		
6:15			130		67			18:15			186		242		
6:30			159		83			18:30			144		214		
6:45			202	581	107	314	895	18:45			153	695	186	960	1655
7:00			261		125			19:00			116		145		
7:15			297		144			19:15			115		148		
7:30			312		191			19:30			124		132		
7:45			296	1166	160	620	1786	19:45			115	470	111	536	1006
8:00			212		123			20:00			111		100		
8:15			203		96			20:15			92		103		
8:30			212		148			20:30			96		90		
8:45			193	820	136	503	1323	20:45			81	380	80	373	753
9:00			153		95			21:00			84		90		
9:15			145		103			21:15			77		81		
9:30			132		100			21:30			60		77		
9:45			104	534	108	406	940	21:45			64	285	77	325	610
10:00			109		101			22:00			64		70		
10:15			97		93			22:15			48		64		
10:30			94		92			22:30			48		47		
10:45			104	404	88	374	778	22:45			38	198	40	221	419
11:00			100		111			23:00			38		43		
11:15			103		108			23:15			35		35		
11:30			103		114			23:30			26		32		
11:45			123	429	128	461	890	23:45			22	121	28	138	259
Total Vol.				4814		3181	**7995**					6757		7980	**14737**

Daily Totals

NB	SB	EB	WB	Combined
		11571	11161	**22732**

			AM					PM		
Split %			60.2%	39.8%	**35.2%**			45.9%	54.1%	**64.8%**
Peak Hour	0:30	0:30	7:00	7:00	**7:00**			17:00	15:45	**16:00**
Volume			1166	620	**1786**			965	1263	**2118**
P.H.F.			0.93	0.81	**0.89**			0.93	0.95	**0.92**

Attachment 8

Thursday, October 10, 2019 | CITY: Santa Ana | PROJECT:

ADT152 MacArthur between Flower and Main | Prepared by: Field Data Services of Arizor | **Prepared by AimTD LLC tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:00			24		41			12:00			213		294		
0:15			21		35			12:15			245		288		
0:30			15		37			12:30			257		269		
0:45			14	74	25	138	212	12:45			285	1000	314	1165	2165
1:00			16		23			13:00			308		287		
1:15			11		25			13:15			303		275		
1:30			12		20			13:30			294		303		
1:45			14	53	16	84	137	13:45			312	1217	286	1151	2368
2:00			10		19			14:00			281		321		
2:15			9		15			14:15			313		312		
2:30			13		23			14:30			310		345		
2:45			16	48	25	82	130	14:45			287	1191	331	1309	2500
3:00			21		14			15:00			312		350		
3:15			23		18			15:15			279		398		
3:30			31		22			15:30			253		421		
3:45			36	111	21	75	186	15:45			237	1081	475	1644	2725
4:00			47		17			16:00			231		563		
4:15			62		28			16:15			252		514		
4:30			98		42			16:30			248		557		
4:45			101	308	38	125	433	16:45			240	971	586	2220	3191
5:00			121		52			17:00			227		617		
5:15			129		50			17:15			234		595		
5:30			175		64			17:30			242		582		
5:45			196	621	79	245	866	17:45			231	934	556	2350	3284
6:00			200		76			18:00			214		525		
6:15			234		86			18:15			236		512		
6:30			306		107			18:30			223		456		
6:45			372	1112	96	365	1477	18:45			220	893	423	1916	2809
7:00			421		131			19:00			198		302		
7:15			463		185			19:15			203		253		
7:30			521		197			19:30			187		194		
7:45			535	1940	176	689	2629	19:45			179	767	195	944	1711
8:00			501		175			20:00			176		168		
8:15			461		187			20:15			153		150		
8:30			452		157			20:30			134		178		
8:45			423	1837	162	681	2518	20:45			140	603	145	641	1244
9:00			345		142			21:00			142		133		
9:15			269		147			21:15			144		142		
9:30			204		164			21:30			121		145		
9:45			214	1032	153	606	1638	21:45			93	500	123	543	1043
10:00			196		158			22:00			101		131		
10:15			185		165			22:15			98		120		
10:30			157		172			22:30			76		96		
10:45			175	713	169	664	1377	22:45			53	328	65	412	740
11:00			168		197			23:00			56		79		
11:15			203		235			23:15			43		75		
11:30			184		268			23:30			31		89		
11:45			195	750	286	986	1736	23:45			25	155	53	296	451
Total Vol.			8599		4740		**13339**				9640		14591		**24231**

Daily Totals

NB	SB	EB	WB	Combined
		18239	19331	**37570**

	AM			PM		
Split %	64.5%	35.5%	**35.5%**	39.8%	60.2%	**64.5%**
Peak Hour	7:15	11:45	**7:15**	14:15	16:45	**16:45**
Volume	2020	1137	**2753**	1222	2380	**3323**
P.H.F.	0.94	0.97	**0.96**	0.98	0.96	**0.98**

cs@aimtd.com Tell. 714 253 7888

Attachment 8

Wednesday, October 02, 2019 | CITY: Santa Ana | PROJECT:

ADT155 Main between Sunflower and MacArthur. | Prepared by: Field Data Services of Arizor | **Prepared by AimTD LLC tel. 714 253 7888**

AM Period	NB		SB		EB	WB		PM Period	NB		SB		EB	WB	
0:00	23		16					12:00	167		141				
0:15	26		14					12:15	176		151				
0:30	21		12					12:30	206		158				
0:45	18	88	8	50			138	12:45	189	738	142	592			1330
1:00	13		9					13:00	198		152				
1:15	14		7					13:15	223		145				
1:30	15		6					13:30	208		136				
1:45	11	53	4	26			79	13:45	198	827	142	575			1402
2:00	9		6					14:00	206		121				
2:15	13		7					14:15	234		124				
2:30	15		4					14:30	254		117				
2:45	8	45	8	25			70	14:45	259	953	112	474			1427
3:00	11		5					15:00	276		98				
3:15	8		5					15:15	298		110				
3:30	7		11					15:30	342		123				
3:45	11	37	14	35			72	15:45	331	1247	142	473			1720
4:00	5		16					16:00	367		147				
4:15	12		24					16:15	389		136				
4:30	15		47					16:30	434		142				
4:45	16	48	75	162			210	16:45	456	1646	134	559			2205
5:00	21		71					17:00	521		152				
5:15	28		67					17:15	489		157				
5:30	37		86					17:30	456		175				
5:45	35	121	97	321			442	17:45	467	1933	154	638			2571
6:00	48		123					18:00	407		142				
6:15	54		156					18:15	342		113				
6:30	76		178					18:30	314		97				
6:45	70	248	207	664			912	18:45	286	1349	86	438			1787
7:00	87		245					19:00	234		65				
7:15	123		289					19:15	201		76				
7:30	145		305					19:30	142		65				
7:45	179	534	311	1150			1684	19:45	113	690	75	281			971
8:00	168		352					20:00	101		54				
8:15	143		316					20:15	87		46				
8:30	125		308					20:30	97		63				
8:45	112	548	298	1274			1822	20:45	67	352	45	208			560
9:00	104		251					21:00	86		53				
9:15	107		214					21:15	97		51				
9:30	98		156					21:30	76		47				
9:45	97	406	132	753			1159	21:45	86	345	32	183			528
10:00	87		121					22:00	76		25				
10:15	76		123					22:15	65		34				
10:30	73		108					22:30	70		31				
10:45	89	325	127	479			804	22:45	53	264	25	115			379
11:00	111		113					23:00	41		21				
11:15	104		134					23:15	42		16				
11:30	122		123					23:30	28		17				
11:45	136	473	125	495			968	23:45	32	143	20	74			217
Total Vol.	2926		5434				**8360**		10487		4610				**15097**

Daily Totals

NB	SB	EB	WB	Combined
13413	10044			**23457**

	AM			PM		
Split %	35.0%	65.0%	**35.6%**	69.5%	30.5%	**64.4%**
Peak Hour	11:45	7:45	**7:30**	17:00	17:00	**17:00**
Volume	685	1287	**1919**	1933	638	**2571**
P.H.F.	0.83	0.91	**0.92**	0.92	0.91	**0.96**

cs@aimtd.com Tell. 714 253 7888

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : GRAND AVENUE

Segment : WARNER AVE TO EDINGER AVE

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/12/19

Day: Thursday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	6	20	120	487	4	22	149	543	10	42	269	1,030
12:15	5		115		6		132		11		247	
12:30	5		130		10		136		15		266	
12:45	4		122		2		126		6		248	
01:00	3	14	144	580	1	8	133	451	4	22	277	1,031
01:15	4		134		2		98		6		232	
01:30	3		169		4		132		7		301	
01:45	4		133		1		88		5		221	
02:00	2	14	164	745	2	11	96	469	4	25	260	1,214
02:15	6		182		2		109		8		291	
02:30	2		213		3		138		5		351	
02:45	4		186		4		126		8		312	
03:00	4	16	224	1,101	4	28	153	582	8	44	377	1,683
03:15	4		256		6		148		10		404	
03:30	6		308		6		137		12		445	
03:45	2		313		12		144		14		457	
04:00	3	44	304	1,263	10	90	160	664	13	134	464	1,927
04:15	3		294		16		170		19		464	
04:30	11		341		16		184		27		525	
04:45	27		324		48		150		75		474	
05:00	18	124	328	1,305	30	177	226	701	48	301	554	2,006
05:15	26		322		34		182		60		504	
05:30	28		346		52		156		80		502	
05:45	52		309		61		137		113		446	
06:00	42	229	258	901	46	320	129	451	88	549	387	1,352
06:15	56		259		70		112		126		371	
06:30	57		220		90		105		147		325	
06:45	74		164		114		105		188		269	
07:00	90	428	131	374	120	554	96	354	210	982	227	728
07:15	96		99		124		80		220		179	
07:30	110		84		158		96		268		180	
07:45	132		60		152		82		284		142	
08:00	114	410	60	175	162	675	52	197	276	1,085	112	372
08:15	114		38		152		48		266		86	
08:30	94		42		175		47		269		89	
08:45	88		35		186		50		274		85	
09:00	101	338	29	124	138	464	46	153	239	802	75	277
09:15	78		36		132		35		210		71	
09:30	78		31		103		44		181		75	
09:45	81		28		91		28		172		56	
10:00	65	304	32	92	92	377	50	136	157	681	82	228
10:15	58		20		100		30		158		50	
10:30	84		22		91		24		175		46	
10:45	97		18		94		32		191		50	
11:00	88	430	18	53	114	482	31	79	202	912	49	132
11:15	104		14		94		18		198		32	
11:30	118		9		126		18		244		27	
11:45	120		12		148		12		268		24	
Totals	2,371		7,200		3,208		4,780		5,579		11,980	
Split%	42.5		60.1		57.5		39.9					
Day Totals		9,571				7,988				17,559		
Day Splits		54.5				45.5						
Peak Hour	07:30		04:45		08:00		04:30		07:45		04:30	
Volume	470		1,320		675		742		1,095		2,057	
Factor	0.89		0.95		0.91		0.82		0.96		0.93	

* Data File : D1909119

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : EDINGER AVENUE

Segment : LYON ST TO NEWPORT FREEWAY

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/24/19

Day: Tuesday

Interval	EB				WB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	29	101	286	1,162	47	137	310	1,168	76	238	596	2,330
12:15	30		278		25		284		55		562	
12:30	28		312		38		282		66		594	
12:45	14		286		27		292		41		578	
01:00	18	61	297	1,164	23	70	288	1,159	41	131	585	2,323
01:15	17		293		18		316		35		609	
01:30	16		300		16		286		32		586	
01:45	10		274		13		269		23		543	
02:00	15	67	251	1,217	16	74	315	1,382	31	141	566	2,599
02:15	17		303		27		355		44		658	
02:30	20		338		16		336		36		674	
02:45	15		325		15		376		30		701	
03:00	22	121	324	1,308	11	87	376	1,535	33	208	700	2,843
03:15	26		310		16		375		42		685	
03:30	37		367		26		390		63		757	
03:45	36		307		34		394		70		701	
04:00	47	374	352	1,393	38	329	376	1,582	85	703	728	2,975
04:15	66		324		49		420		115		744	
04:30	113		348		86		402		199		750	
04:45	148		369		156		384		304		753	
05:00	120	744	461	1,655	136	642	368	1,396	256	1,386	829	3,051
05:15	153		435		113		346		266		781	
05:30	235		415		180		320		415		735	
05:45	236		344		213		362		449		706	
06:00	224	1,226	292	1,048	252	1,030	375	1,326	476	2,256	667	2,374
06:15	284		254		220		384		504		638	
06:30	346		266		258		331		604		597	
06:45	372		236		300		236		672		472	
07:00	382	1,650	248	777	354	1,266	208	728	736	2,916	456	1,505
07:15	460		205		291		200		751		405	
07:30	424		162		285		180		709		342	
07:45	384		162		336		140		720		302	
08:00	385	1,439	134	541	338	1,299	174	553	723	2,738	308	1,094
08:15	372		148		378		127		750		275	
08:30	352		135		303		131		655		266	
08:45	330		124		280		121		610		245	
09:00	282	1,022	122	412	277	1,075	114	437	559	2,097	236	849
09:15	254		94		284		128		538		222	
09:30	240		106		264		102		504		208	
09:45	246		90		250		93		496		183	
10:00	260	1,012	108	294	292	1,059	120	342	552	2,071	228	636
10:15	250		68		250		90		500		158	
10:30	256		57		245		62		501		119	
10:45	246		61		272		70		518		131	
11:00	256	1,114	50	169	268	1,083	61	205	524	2,197	111	374
11:15	262		43		264		40		526		83	
11:30	306		42		264		52		570		94	
11:45	290		34		287		52		577		86	
Totals	8,931		11,140		8,151		11,813		17,082		22,953	
Split%	52.3		48.5		47.7		51.5					
Day Totals		20,071				19,964				40,035		
Day Splits		50.1				49.9						
Peak Hour	07:15		04:45		07:45		03:45		07:00		04:30	
Volume	1,653		1,680		1,355		1,592		2,916		3,113	
Factor	0.90		0.91		0.90		0.95		0.97		0.94	

Data File : D1909057

Attachment 8

Wednesday, October 02, 2019 Location: Santa Ana PROJECT:

ADT267 WARNER AVE from GR to AVE to PULLMAN ST. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:30			9		12			12:00			177		174		
0:15			8		9			12:15			159		165		
0:30			9		8			12:30			163		152		
0:45			11	37	7	36	73	12:45			150	649	144	635	1284
1:00			7		11			13:00			169		150		
1:15			8		7			13:15			156		167		
1:30			7		9			13:30			154		209		
1:45			6	28	6	33	61	13:45			178	657	187	713	1370
2:00			5		7			14:00			174		180		
2:15			8		9			14:15			170		254		
2:30			9		9			14:30			164		348		
2:45			7	29	5	30	59	14:45			163	671	312	1094	1765
3:00			7		6			15:00			156		301		
3:15			13		7			15:15			153		296		
3:30			27		10			15:30			154		303		
3:45			47	94	4	27	121	15:45			148	611	311	1211	1822
4:00			41		3			16:00			171		274		
4:15			51		5			16:15			155		315		
4:30			95		11			16:30			168		356		
4:45			113	300	14	33	333	16:45			197	691	302	1247	1938
5:00			97		18			17:00			224		324		
5:15			123		21			17:15			229		307		
5:30			175		20			17:30			205		310		
5:45			290	685	43	102	787	17:45			168	826	301	1242	2068
6:00			165		54			18:00			136		294		
6:15			209		59			18:15			146		237		
6:30			223		53			18:30			117		171		
6:45			242	839	79	245	1084	18:45			103	502	103	805	1307
7:00			231		112			19:00			85		78		
7:15			283		153			19:15			78		73		
7:30			272		158			19:30			73		82		
7:45			315	1101	164	587	1688	19:45			64	300	70	303	603
8:00			286		161			20:00			56		64		
8:15			274		158			20:15			46		60		
8:30			255		141			20:30			37		50		
8:45			258	1073	139	599	1672	20:45			55	194	64	238	432
9:00			166		111			21:00			43		44		
9:15			173		123			21:15			37		44		
9:30			142		127			21:30			35		49		
9:45			98	579	110	471	1050	21:45			49	164	46	183	347
10:00			125		116			22:00			32		42		
10:15			100		112			22:15			29		36		
10:30			107		106			22:30			24		37		
10:45			106	438	101	435	873	22:45			24	109	42	157	266
11:00			126		113			23:00			16		35		
11:15			143		92			23:15			14		24		
11:30			176		105			23:30			12		31		
11:45			175	620	125	435	1055	23:45			8	50	15	105	155
Total Vol.				5823		3033	**8856**					5424		7933	**13357**

Daily Totals

NB	SB	EB	WB	Combined
		11247	10966	**22213**

			AM				PM		
Split %			65.8%	34.2%	**39.9%**		40.6%	59.4%	**60.1%**
Peak Hour	0:30	0:30	7:15	7:30	**7:15**		16:45	16:15	**16:30**
Volume			1156	641	**1792**		855	1297	**2107**
P.H.F.			0.92	0.98	**0.94**		0.93	0.91	**0.96**

Attachment 8

Thursday, October 03, 2019 Location: Santa Ana PROJECT:

ADT264 WARNER AVE from MAIN ST to HALLADAY ST. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:30			16		27			12:00			167		152		
0:15			20		23			12:15			168		156		
0:30			13		25			12:30			193		164		
0:45			11	60	16	91	151	12:45			204	732	158	630	1362
1:00			5		14			13:00			231		175		
1:15			6		20			13:15			215		198		
1:30			5		18			13:30			244		204		
1:45			11	27	14	66	93	13:45			280	970	197	774	1744
2:00			16		20			14:00			252		188		
2:15			9		17			14:15			234		196		
2:30			18		9			14:30			241		218		
2:45			27	70	13	59	129	14:45			221	948	210	812	1760
3:00			20		19			15:00			236		229		
3:15			18		14			15:15			220		285		
3:30			21		8			15:30			227		270		
3:45			43	102	11	52	154	15:45			260	943	223	1007	1950
4:00			33		22			16:00			245		255		
4:15			54		13			16:15			235		277		
4:30			75		31			16:30			237		312		
4:45			71	233	28	94	327	16:45			213	930	263	1107	2037
5:00			94		34			17:00			241		275		
5:15			101		37			17:15			276		283		
5:30			230		63			17:30			319		267		
5:45			280	705	112	246	951	17:45			311	1147	253	1078	2225
6:00			224		103			18:00			265		248		
6:15			202		113			18:15			231		236		
6:30			209		109			18:30			208		245		
6:45			261	896	123	448	1344	18:45			178	882	213	942	1824
7:00			282		183			19:00			187		189		
7:15			322		231			19:15			153		156		
7:30			284		259			19:30			137		135		
7:45			324	1212	221	894	2106	19:45			123	600	115	595	1195
8:00			328		173			20:00			103		131		
8:15			286		150			20:15			106		96		
8:30			293		155			20:30			100		106		
8:45			267	1174	145	623	1797	20:45			92	401	115	448	849
9:00			196		147			21:00			94		108		
9:15			193		137			21:15			70		102		
9:30			141		153			21:30			87		88		
9:45			167	697	157	594	1291	21:45			52	303	68	366	669
10:00			146		149			22:00			61		92		
10:15			158		127			22:15			54		86		
10:30			151		135			22:30			47		58		
10:45			183	638	119	530	1168	22:45			42	204	47	283	487
11:00			158		158			23:00			26		42		
11:15			169		159			23:15			34		37		
11:30			145		146			23:30			26		36		
11:45			159	631	149	612	1243	23:45			30	116	33	148	264
Total Vol.				6445		4309	**10754**					8176		8190	**16366**

Daily Totals

NB	SB	EB	WB	Combined
		14621	12499	**27120**

			AM				PM		
Split %			59.9%	40.1%	**39.7%**		50.0%	50.0%	**60.3%**
Peak Hour	0:30	0:30	7:15	7:00	**7:15**		17:15	16:30	**17:00**
Volume			1258	894	**2142**		1171	1133	**2225**
P.H.F.			0.96	0.86	**0.97**		0.92	0.91	**0.95**

Wednesday, October 02, 2019 CITY: Santa Ana PROJECT: SC

ADT172 McFADDEN AVE from NEWHOPE ST to HARBOR BL. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:00			18		33			12:00			123		127		
0:15			23		19			12:15			125		119		
0:30			13		12			12:30			96		140		
0:45			10	64	13	77	141	12:45			120	464	106	492	956
1:00			7		16			13:00			115		127		
1:15			5		14			13:15			132		129		
1:30			7		7			13:30			124		106		
1:45			9	28	6	43	71	13:45			148	519	156	518	1037
2:00			11		18			14:00			155		162		
2:15			3		8			14:15			159		159		
2:30			5		9			14:30			145		165		
2:45			6	25	7	42	67	14:45			137	596	155	641	1237
3:00			10		3			15:00			166		180		
3:15			5		8			15:15			158		167		
3:30			11		5			15:30			139		183		
3:45			9	35	12	28	63	15:45			153	616	158	688	1304
4:00			12		12			16:00			151		163		
4:15			7		11			16:15			148		175		
4:30			20		20			16:30			148		194		
4:45			16	55	26	69	124	16:45			142	589	188	720	1309
5:00			25		22			17:00			166		233		
5:15			35		26			17:15			160		200		
5:30			32		40			17:30			171		211		
5:45			41	133	32	120	253	17:45			190	687	210	854	1541
6:00			52		44			18:00			184		178		
6:15			49		45			18:15			150		224		
6:30			69		64			18:30			152		181		
6:45			92	262	77	230	492	18:45			137	623	161	744	1367
7:00			108		95			19:00			136		159		
7:15			147		131			19:15			136		135		
7:30			159		170			19:30			128		129		
7:45			180	594	178	574	1168	19:45			96	496	129	552	1048
8:00			182		176			20:00			93		144		
8:15			207		145			20:15			92		96		
8:30			191		107			20:30			87		97		
8:45			160	740	117	545	1285	20:45			96	368	106	443	811
9:00			174		128			21:00			78		98		
9:15			140		111			21:15			87		108		
9:30			90		105			21:30			68		81		
9:45			106	510	106	450	960	21:45			67	300	70	357	657
10:00			113		115			22:00			60		76		
10:15			107		130			22:15			54		62		
10:30			108		108			22:30			41		75		
10:45			110	438	105	458	896	22:45			40	195	38	251	446
11:00			86		123			23:00			28		37		
11:15			96		107			23:15			34		32		
11:30			106		99			23:30			21		28		
11:45			120	408	114	443	851	23:45			21	104	27	124	228
Total Vol.			3292		3079		**6371**				5557		6384		**11941**

Daily Totals

NB	SB	EB	WB	Combined
		8849	9463	**18312**

	AM			PM		
Split %	51.7%	48.3%	**34.8%**	46.5%	53.5%	**65.2%**
Peak Hour	7:45	7:30	**7:30**	17:15	17:00	**17:00**
Volume	760	669	**1397**	705	854	**1541**
P.H.F.	0.92	0.94	**0.98**	0.93	0.92	**0.96**

cs@aimtd.com Tell. 714 253 7888

Attachment 8

Tuesday, September 24, 2019 CITY: Santa Ana PROJECT: SC

ADT181 McFADDEN AVE from GR to AVE to LYON ST. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:00			12		13			12:00			150		119		
0:15			16		21			12:15			118		118		
0:30			16		12			12:30			132		118		
0:45			10	54	13	59	113	12:45			119	519	130	485	1004
1:00			9		18			13:00			131		121		
1:15			5		13			13:15			126		135		
1:30			10		14			13:30			137		145		
1:45			15	39	13	58	97	13:45			124	518	159	560	1078
2:00			8		19			14:00			120		158		
2:15			9		9			14:15			157		148		
2:30			12		11			14:30			185		189		
2:45			11	40	16	55	95	14:45			186	648	166	661	1309
3:00			6		6			15:00			177		180		
3:15			7		8			15:15			203		196		
3:30			20		10			15:30			204		168		
3:45			33	66	24	48	114	15:45			176	760	221	765	1525
4:00			19		19			16:00			193		211		
4:15			37		20			16:15			172		191		
4:30			54		44			16:30			178		206		
4:45			58	168	51	134	302	16:45			173	716	191	799	1515
5:00			61		43			17:00			216		213		
5:15			88		50			17:15			196		191		
5:30			117		69			17:30			204		187		
5:45			137	403	80	242	645	17:45			182	798	181	772	1570
6:00			136		82			18:00			190		163		
6:15			159		82			18:15			155		193		
6:30			171		96			18:30			165		137		
6:45			195	661	115	375	1036	18:45			160	670	146	639	1309
7:00			180		121			19:00			133		143		
7:15			204		148			19:15			130		122		
7:30			179		150			19:30			117		122		
7:45			180	743	183	602	1345	19:45			127	507	104	491	998
8:00			237		154			20:00			118		98		
8:15			201		127			20:15			99		89		
8:30			145		122			20:30			99		79		
8:45			171	754	141	544	1298	20:45			69	385	93	359	744
9:00			158		97			21:00			79		66		
9:15			116		101			21:15			60		83		
9:30			114		119			21:30			72		57		
9:45			121	509	89	406	915	21:45			52	263	54	260	523
10:00			119		110			22:00			66		66		
10:15			96		95			22:15			45		62		
10:30			118		108			22:30			35		37		
10:45			94	427	96	409	836	22:45			39	185	52	217	402
11:00			125		126			23:00			40		39		
11:15			114		115			23:15			22		41		
11:30			131		126			23:30			19		35		
11:45			125	495	115	482	977	23:45			17	98	25	140	238
Total Vol.			4359		3414		**7773**				6067		6148		**12215**

	Daily Totals				
	NB	SB	EB	WB	**Combined**
			10426	9562	**19988**
	AM			**PM**	
Split %	56.1%	43.9%	**38.9%**	49.7%	50.3%	**61.1%**
Peak Hour	7:15	7:15	**7:15**	17:00	15:45	**15:15**
Volume	800	635	**1435**	798	829	**1572**
P.H.F.	0.84	0.87	**0.92**	0.92	0.94	**0.97**

cs@aimtd.com Tell. 714 253 7888

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : DYER ROAD

Segment : PULLMAN ST TO RED HILL AVE

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/24/19

Day: Tuesday

Interval	EB				WB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	20	52	214	769	38	198	228	930	58	250	442	1,699
12:15	10		190		38		234		48		424	
12:30	14		183		84		230		98		413	
12:45	8		182		38		238		46		420	
01:00	13	32	204	728	24	73	246	1,032	37	105	450	1,760
01:15	11		162		28		250		39		412	
01:30	2		186		13		285		15		471	
01:45	6		176		8		251		14		427	
02:00	12	66	186	687	16	63	297	1,179	28	129	483	1,866
02:15	7		155		17		278		24		433	
02:30	17		170		18		335		35		505	
02:45	30		176		12		269		42		445	
03:00	18	187	158	741	16	60	286	1,286	34	247	444	2,027
03:15	31		191		20		332		51		523	
03:30	56		192		11		323		67		515	
03:45	82		200		13		345		95		545	
04:00	56	480	183	852	26	115	370	1,350	82	595	553	2,202
04:15	85		206		24		316		109		522	
04:30	137		227		40		342		177		569	
04:45	202		236		25		322		227		558	
05:00	175	904	243	1,101	32	209	389	1,412	207	1,113	632	2,513
05:15	205		276		36		358		241		634	
05:30	228		294		58		308		286		602	
05:45	296		288		83		357		379		645	
06:00	214	900	230	844	88	460	322	1,197	302	1,360	552	2,041
06:15	241		215		134		329		375		544	
06:30	231		234		102		313		333		547	
06:45	214		165		136		233		350		398	
07:00	220	991	146	486	172	777	300	986	392	1,768	446	1,472
07:15	251		106		176		266		427		372	
07:30	264		120		186		232		450		352	
07:45	256		114		243		188		499		302	
08:00	228	950	124	380	245	1,001	214	748	473	1,951	338	1,128
08:15	222		90		253		168		475		258	
08:30	238		74		267		170		505		244	
08:45	262		92		236		196		498		288	
09:00	218	868	82	293	224	785	194	654	442	1,653	276	947
09:15	233		84		187		158		420		242	
09:30	211		60		195		172		406		232	
09:45	206		67		179		130		385		197	
10:00	170	677	42	195	193	739	150	488	363	1,416	192	683
10:15	168		54		191		122		359		176	
10:30	181		57		175		122		356		179	
10:45	158		42		180		94		338		136	
11:00	208	870	22	83	188	776	98	285	396	1,646	120	368
11:15	219		19		201		66		420		85	
11:30	199		25		184		65		383		90	
11:45	244		17		203		56		447		73	
Totals	6,977		7,159		5,256		11,547		12,233		18,706	
Split%	57.0		38.3		43.0		61.7					
Day Totals		14,136				16,803				30,939		
Day Splits		45.7				54.3						
Peak Hour	07:15		05:00		07:45		05:00		07:45		05:00	
Volume	999		1,101		1,008		1,412		1,952		2,513	
Factor	0.95		0.94		0.94		0.91		0.97		0.97	

Data File : D1909047

Attachment 8

Tuesday, September 24, 2019 CITY: Santa Ana PROJECT: SC

ADT176 McFADDEN AVE from BRISTOL ST to FLOWER ST. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:00			15		23			12:00			80		79		
0:15			23		15			12:15			103		90		
0:30			16		17			12:30			75		82		
0:45			15	69	14	69	138	12:45			74	332	73	324	656
1:00			12		15			13:00			100		78		
1:15			8		11			13:15			89		63		
1:30			5		11			13:30			79		103		
1:45			11	36	8	45	81	13:45			98	366	106	350	716
2:00			9		12			14:00			126		95		
2:15			7		9			14:15			122		116		
2:30			9		9			14:30			136		129		
2:45			4	29	8	38	67	14:45			113	497	146	486	983
3:00			7		7			15:00			147		160		
3:15			7		10			15:15			120		142		
3:30			17		10			15:30			125		137		
3:45			16	47	10	37	84	15:45			126	518	133	572	1090
4:00			18		10			16:00			115		139		
4:15			35		16			16:15			107		160		
4:30			36		26			16:30			117		154		
4:45			49	138	24	76	214	16:45			122	461	150	603	1064
5:00			50		26			17:00			109		140		
5:15			47		32			17:15			133		147		
5:30			83		45			17:30			143		143		
5:45			105	285	33	136	421	17:45			151	536	143	573	1109
6:00			87		60			18:00			125		131		
6:15			101		61			18:15			129		131		
6:30			103		73			18:30			132		138		
6:45			110	401	75	269	670	18:45			104	490	127	527	1017
7:00			119		96			19:00			116		123		
7:15			175		123			19:15			104		116		
7:30			194		118			19:30			102		100		
7:45			179	667	124	461	1128	19:45			98	420	104	443	863
8:00			161		119			20:00			90		102		
8:15			148		105			20:15			84		94		
8:30			124		66			20:30			85		56		
8:45			94	527	70	360	887	20:45			64	323	73	325	648
9:00			75		58			21:00			80		63		
9:15			85		74			21:15			75		47		
9:30			82		64			21:30			73		48		
9:45			70	312	63	259	571	21:45			63	291	62	220	511
10:00			70		84			22:00			40		61		
10:15			82		74			22:15			57		50		
10:30			87		68			22:30			35		38		
10:45			71	310	85	311	621	22:45			28	160	43	192	352
11:00			89		73			23:00			33		44		
11:15			68		75			23:15			30		33		
11:30			99		86			23:30			32		30		
11:45			84	340	93	327	667	23:45			28	123	15	122	245
Total Vol.			3161		2388		**5549**				4517		4737		**9254**

Daily Totals

NB	SB	EB	WB	Combined
		7678	7125	**14803**

	AM			PM		
Split %	57.0%	43.0%	**37.5%**	48.8%	51.2%	**62.5%**
Peak Hour	7:15	7:15	**7:15**	17:15	16:15	**17:15**
Volume	709	484	**1193**	552	604	**1116**
P.H.F.	0.91	0.98	**0.96**	0.91	0.94	**0.95**

Wednesday, September 25, 2019 CITY: Santa Ana PROJECT: SC

ADT169 MAIN ST from MAINPLACE DR to GARDEN GROVE FWY. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB		SB		EB	WB		PM Period	NB		SB		EB	WB	
0:00	27		46					12:00	233		223				
0:15	20		34					12:15	261		227				
0:30	21		42					12:30	230		211				
0:45	34	102	23	145			247	12:45	231	955	269	930			1885
1:00	31		32					13:00	197		240				
1:15	33		23					13:15	229		266				
1:30	34		19					13:30	199		247				
1:45	26	124	26	100			224	13:45	237	862	236	989			1851
2:00	31		11					14:00	214		230				
2:15	31		28					14:15	270		234				
2:30	34		25					14:30	248		222				
2:45	34	130	10	74			204	14:45	209	941	246	932			1873
3:00	23		30					15:00	174		251				
3:15	32		27					15:15	224		245				
3:30	34		24					15:30	245		254				
3:45	46	135	28	109			244	15:45	233	876	273	1023			1899
4:00	41		25					16:00	217		238				
4:15	67		26					16:15	260		318				
4:30	113		26					16:30	240		295				
4:45	115	336	38	115			451	16:45	309	1026	319	1170			2196
5:00	95		54					17:00	291		327				
5:15	52		58					17:15	341		302				
5:30	89		88					17:30	317		281				
5:45	87	323	88	288			611	17:45	296	1245	256	1166			2411
6:00	101		109					18:00	254		216				
6:15	117		109					18:15	270		211				
6:30	161		196					18:30	225		192				
6:45	211	590	207	621			1211	18:45	230	979	201	820			1799
7:00	144		308					19:00	186		189				
7:15	166		340					19:15	175		210				
7:30	194		373					19:30	160		189				
7:45	233	737	307	1328			2065	19:45	144	665	200	788			1453
8:00	264		353					20:00	129		186				
8:15	206		320					20:15	111		132				
8:30	211		320					20:30	113		137				
8:45	218	899	232	1225			2124	20:45	74	427	130	585			1012
9:00	175		251					21:00	70		143				
9:15	149		206					21:15	88		144				
9:30	163		175					21:30	54		103				
9:45	208	695	186	818			1513	21:45	63	275	87	477			752
10:00	190		169					22:00	155		86				
10:15	186		186					22:15	141		85				
10:30	206		190					22:30	135		76				
10:45	177	759	216	761			1520	22:45	106	537	89	336			873
11:00	194		190					23:00	88		92				
11:15	245		206					23:15	64		65				
11:30	235		203					23:30	69		69				
11:45	209	883	226	825			1708	23:45	56	277	68	294			571
Total Vol.		5713		6409			**12122**			9065		9510			**18575**

Daily Totals

NB	SB	EB	WB	**Combined**
14778	15919			**30697**

	AM			**PM**		
Split %	47.1%	52.9%	**39.5%**	48.8%	51.2%	**60.5%**
Peak Hour	11:30	7:15	**7:30**	16:45	16:15	**16:45**
Volume	938	1373	**2250**	1258	1259	**2487**
P.H.F.	0.90	0.92	**0.91**	0.94	0.96	**0.97**

cs@aimtd.com Tell. 714 253 7888

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : FIRST STREET

Segment : BRISTOL ST TO FLOWER ST

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/11/19

Day: Wednesday

Interval	EB				WB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	54	172	264	1,057	56	179	214	903	110	351	478	1,960
12:15	44		275		39		220		83		495	
12:30	40		268		45		221		85		489	
12:45	34		250		39		248		73		498	
01:00	30	108	294	1,201	30	105	260	1,055	60	213	554	2,256
01:15	27		312		30		279		57		591	
01:30	25		321		26		238		51		559	
01:45	26		274		19		278		45		552	
02:00	30	117	308	1,210	32	129	306	1,227	62	246	614	2,437
02:15	24		288		24		298		48		586	
02:30	31		308		36		277		67		585	
02:45	32		306		37		346		69		652	
03:00	20	115	340	1,336	24	104	340	1,445	44	219	680	2,781
03:15	25		318		18		388		43		706	
03:30	30		320		28		338		58		658	
03:45	40		358		34		379		74		737	
04:00	52	286	333	1,393	33	155	374	1,478	85	441	707	2,871
04:15	74		363		24		374		98		737	
04:30	80		342		52		366		132		708	
04:45	80		355		46		364		126		719	
05:00	103	596	350	1,468	51	267	376	1,486	154	863	726	2,954
05:15	127		398		54		339		181		737	
05:30	174		343		76		381		250		724	
05:45	192		377		86		390		278		767	
06:00	213	1,098	326	1,240	92	494	384	1,369	305	1,592	710	2,609
06:15	255		324		130		342		385		666	
06:30	295		270		110		336		405		606	
06:45	335		320		162		307		497		627	
07:00	372	1,684	294	1,009	185	944	258	966	557	2,628	552	1,975
07:15	450		285		212		234		662		519	
07:30	455		218		253		252		708		470	
07:45	407		212		294		222		701		434	
08:00	356	1,452	201	754	253	865	228	719	609	2,317	429	1,473
08:15	362		207		207		184		569		391	
08:30	354		178		208		170		562		348	
08:45	380		168		197		137		577		305	
09:00	349	1,177	181	639	188	832	152	629	537	2,009	333	1,268
09:15	294		154		200		179		494		333	
09:30	269		152		220		142		489		294	
09:45	265		152		224		156		489		308	
10:00	244	992	129	381	224	846	130	464	468	1,838	259	845
10:15	230		98		214		122		444		220	
10:30	280		78		200		106		480		184	
10:45	238		76		208		106		446		182	
11:00	220	1,014	71	241	194	938	104	281	414	1,952	175	522
11:15	263		76		240		74		503		150	
11:30	243		45		236		52		479		97	
11:45	288		49		268		51		556		100	
Totals	8,811		11,929		5,858		12,022		14,669		23,951	
Split%	60.1		49.8		39.9		50.2					
Day Totals		20,740				17,880				38,620		
Day Splits		53.7				46.3						
Peak Hour	07:00		05:00		07:15		05:30		07:15		05:00	
Volume	1,684		1,468		1,012		1,497		2,680		2,954	
Factor	0.93		0.92		0.86		0.96		0.95		0.96	

Data File : D1909091

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

Location : FAIRHAVEN AVENUE
Segment : CAMBRIDGE ST TO TUSTIN AVE
Client : CITY SANTA ANA

Site: SANTA ANA
Date: 10/03/19
Day: Thursday

Interval	WB				EB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	10	25	59	223	6	27	68	280	16	52	127	503
12:15	4		56		7		68		11		124	
12:30	7		46		4		70		11		116	
12:45	4		62		10		74		14		136	
01:00	4	11	66	269	2	13	68	261	6	24	134	530
01:15	4		76		5		54		9		130	
01:30	1		64		4		69		5		133	
01:45	2		63		2		70		4		133	
02:00	1	7	78	376	3	8	73	315	4	15	151	691
02:15	3		88		2		101		5		189	
02:30	0		94		1		78		1		172	
02:45	3		116		2		63		5		179	
03:00	0	6	118	452	3	8	114	360	3	14	232	812
03:15	2		134		4		88		6		222	
03:30	4		104		1		68		5		172	
03:45	0		96		0		90		0		186	
04:00	0	11	96	532	5	17	85	359	5	28	181	891
04:15	2		158		5		92		7		250	
04:30	3		116		5		102		8		218	
04:45	6		162		2		80		8		242	
05:00	5	35	155	657	7	43	108	418	12	78	263	1,075
05:15	9		169		8		106		17		275	
05:30	10		175		11		100		21		275	
05:45	11		158		17		104		28		262	
06:00	12	93	135	457	24	207	70	276	36	300	205	733
06:15	23		124		34		72		57		196	
06:30	26		110		73		74		99		184	
06:45	32		88		76		60		108		148	
07:00	41	354	66	209	118	705	46	187	159	1,059	112	396
07:15	65		58		177		53		242		111	
07:30	100		48		198		46		298		94	
07:45	148		37		212		42		360		79	
08:00	139	362	30	108	172	567	30	117	311	929	60	225
08:15	92		22		164		28		256		50	
08:30	72		34		111		28		183		62	
08:45	59		22		120		31		179		53	
09:00	50	194	18	78	74	304	22	93	124	498	40	171
09:15	44		30		80		28		124		58	
09:30	54		17		70		27		124		44	
09:45	46		13		80		16		126		29	
10:00	66	220	23	57	51	225	14	70	117	445	37	127
10:15	36		14		66		27		102		41	
10:30	56		14		44		20		100		34	
10:45	62		6		64		9		126		15	
11:00	56	221	8	20	68	248	10	32	124	469	18	52
11:15	56		7		54		7		110		14	
11:30	49		3		56		9		105		12	
11:45	60		2		70		6		130		8	
Totals	1,539		3,438		2,372		2,768		3,911		6,206	
Split%	39.4		55.4		60.6		44.6					
Day Totals		4,977				5,140				10,117		
Day Splits		49.2				50.8						
Peak Hour	07:30		04:45		07:15		05:00		07:30		05:00	
Volume	479		661		759		418		1,225		1,075	
Factor	0.81		0.94		0.90		0.97		0.85		0.98	

Data File : D1909063

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : FOURTH STREET

Segment : FRENCH ST TO GRAND AVE

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 10/09/19

Day: Wednesday

Interval	EB				WB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	10	34	78	296	21	71	122	509	31	105	200	805
12:15	9		66		13		125		22		191	
12:30	10		74		21		134		31		208	
12:45	5		78		16		128		21		206	
01:00	6	38	76	396	16	41	137	598	22	79	213	994
01:15	14		111		7		141		21		252	
01:30	12		115		8		180		20		295	
01:45	6		94		10		140		16		234	
02:00	5	24	106	388	10	40	155	575	15	64	261	963
02:15	6		84		12		148		18		232	
02:30	8		103		6		118		14		221	
02:45	5		95		12		154		17		249	
03:00	3	15	102	428	4	22	168	691	7	37	270	1.119
03:15	2		97		8		177		10		274	
03:30	6		120		4		164		10		284	
03:45	4		109		6		182		10		291	
04:00	7	78	116	480	11	47	190	728	18	125	306	1,208
04:15	16		112		12		172		28		284	
04:30	26		116		10		182		36		298	
04:45	29		136		14		184		43		320	
05:00	26	190	152	588	18	98	188	782	44	288	340	1,370
05:15	38		155		24		177		62		332	
05:30	56		135		26		231		82		366	
05:45	70		146		30		186		100		332	
06:00	54	345	116	342	32	162	202	610	86	507	318	952
06:15	67		82		40		135		107		217	
06:30	110		70		32		133		142		203	
06:45	114		74		58		140		172		214	
07:00	142	817	54	222	81	560	121	402	223	1,377	175	624
07:15	185		63		118		97		303		160	
07:30	266		56		167		98		433		154	
07:45	224		49		194		86		418		135	
08:00	202	494	28	156	144	418	68	254	346	912	96	410
08:15	118		32		92		69		210		101	
08:30	98		46		100		60		198		106	
08:45	76		50		82		57		158		107	
09:00	66	284	44	153	106	387	47	203	172	671	91	356
09:15	76		44		92		54		168		98	
09:30	63		33		88		53		151		86	
09:45	79		32		101		49		180		81	
10:00	61	247	50	123	87	396	47	170	148	643	97	293
10:15	61		33		97		36		158		69	
10:30	65		21		104		46		169		67	
10:45	60		19		108		41		168		60	
11:00	46	248	16	57	92	406	20	95	138	654	36	152
11:15	57		15		89		22		146		37	
11:30	76		16		116		30		192		46	
11:45	69		10		109		23		178		33	
Totals	2,814		3,629		2,648		5,617		5,462		9,246	
Split%	51.5		39.2		48.5		60.8					
Day Totals		6,443				8,265				14,708		
Day Splits		43.8				56.2						
Peak Hour	07:15		05:00		07:15		05:15		07:15		05:00	
Volume	877		588		623		796		1,500		1,370	
Factor	0.82		0.95		0.80		0.86		0.87		0.94	

Data File : D1909113

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : BROADWAY

Segment : CIVIC CENTER TO SEVENTEENTH

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/19/19

File: D1909027

Day: Thursday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	3	18	130	481	18	85	142	584	21	103	272	1,065
12:15	2		118		29		136		31		254	
12:30	8		129		18		138		26		267	
12:45	5		104		20		168		25		272	
01:00	8	15	94	440	7	46	162	686	15	61	256	1,126
01:15	5		108		16		164		21		272	
01:30	2		136		11		188		13		324	
01:45	0		102		12		172		12		274	
02:00	1	14	140	615	18	48	161	679	19	62	301	1,294
02:15	4		145		8		169		12		314	
02:30	4		168		9		163		13		331	
02:45	5		162		13		186		18		348	
03:00	0	11	208	908	9	33	186	678	9	44	394	1,586
03:15	1		223		6		170		7		393	
03:30	9		253		11		162		20		415	
03:45	1		224		7		160		8		384	
04:00	1	24	259	1,105	13	98	157	690	14	122	416	1,795
04:15	5		238		15		159		20		397	
04:30	8		316		22		170		30		486	
04:45	10		292		48		204		58		496	
05:00	16	70	312	1,050	48	271	188	723	64	341	500	1,773
05:15	15		228		44		201		59		429	
05:30	23		256		78		171		101		427	
05:45	16		254		101		163		117		417	
06:00	23	144	281	862	120	619	173	583	143	763	454	1,445
06:15	32		226		123		149		155		375	
06:30	54		195		146		139		200		334	
06:45	35		160		230		122		265		282	
07:00	52	368	143	443	276	1,279	114	456	328	1,647	257	899
07:15	58		114		322		126		380		240	
07:30	122		100		367		116		489		216	
07:45	136		86		314		100		450		186	
08:00	193	508	121	402	282	982	90	385	475	1,490	211	787
08:15	136		114		237		126		373		240	
08:30	91		92		213		86		304		178	
08:45	88		75		250		83		338		158	
09:00	67	312	85	300	212	668	100	329	279	980	185	629
09:15	74		82		153		80		227		162	
09:30	95		79		159		82		254		161	
09:45	76		54		144		67		220		121	
10:00	69	300	74	194	138	558	54	239	207	858	128	433
10:15	74		50		146		78		220		128	
10:30	73		44		142		54		215		98	
10:45	84		26		132		53		216		79	
11:00	72	402	15	62	100	493	51	166	172	895	66	228
11:15	102		26		133		47		235		73	
11:30	116		10		130		31		246		41	
11:45	112		11		130		37		242		48	
Totals	2,186		6,862		5,180		6,198		7,366		13,060	
Split%	29.7		52.5		70.3		47.5					
Day Totals		9,048				11,378				20,426		
Day Splits		44.3				55.7						
Peak Hour	07:30		04:15		07:15		04:45		07:15		04:30	
Volume	587		1,158		1,285		764		1,794		1,911	
Factor	0.76		0.92		0.88		0.94		0.92		0.96	

Data File : D1909027

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : BROADWAY

Segment : SANTA ANA BL TO CIVIC CENTER D

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/19/19

Day: Thursday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	4	6	78	352	17	62	106	460	21	68	184	812
12:15	0		78		20		124		20		202	
12:30	1		106		13		106		14		212	
12:45	1		90		12		124		13		214	
01:00	3	9	99	389	6	31	126	498	9	40	225	887
01:15	4		86		10		119		14		205	
01:30	1		114		8		135		9		249	
01:45	1		90		7		118		8		208	
02:00	0	5	106	520	12	32	130	531	12	37	236	1,051
02:15	0		110		5		126		5		236	
02:30	1		156		5		136		6		292	
02:45	4		148		10		139		14		287	
03:00	0	8	189	753	4	19	154	566	4	27	343	1,319
03:15	0		196		2		148		2		344	
03:30	4		174		9		126		13		300	
03:45	4		194		4		138		8		332	
04:00	1	18	210	858	10	62	132	595	11	80	342	1,453
04:15	2		198		11		143		13		341	
04:30	5		238		13		148		18		386	
04:45	10		212		28		172		38		384	
05:00	5	33	203	836	24	154	168	641	29	187	371	1,477
05:15	7		209		24		192		31		401	
05:30	13		216		45		137		58		353	
05:45	8		208		61		144		69		352	
06:00	10	56	258	742	74	355	156	523	84	411	414	1,265
06:15	11		188		73		133		84		321	
06:30	17		164		82		124		99		288	
06:45	18		132		126		110		144		242	
07:00	36	200	129	353	154	690	100	405	190	890	229	758
07:15	42		92		186		103		228		195	
07:30	58		84		196		98		254		182	
07:45	64		48		154		104		218		152	
08:00	118	396	96	398	167	675	76	347	285	1,071	172	745
08:15	111		122		186		118		297		240	
08:30	82		100		148		86		230		186	
08:45	85		80		174		67		259		147	
09:00	67	270	82	305	141	482	84	299	208	752	166	604
09:15	70		84		108		86		178		170	
09:30	68		74		113		75		181		149	
09:45	65		65		120		54		185		119	
10:00	66	251	78	184	104	406	58	221	170	657	136	405
10:15	53		59		104		68		157		127	
10:30	80		39		106		50		186		89	
10:45	52		8		92		45		144		53	
11:00	50	284	8	21	88	390	45	156	138	674	53	177
11:15	78		6		113		44		191		50	
11:30	84		6		89		26		173		32	
11:45	72		1		100		41		172		42	
Totals	1,536		5,711		3,358		5,242		4,894		10,953	
Split%	31.4		52.1		68.6		47.9					
Day Totals		7,247				8,600				15,847		
Day Splits		45.7				54.3						
Peak Hour	08:00		05:15		07:15		04:30		08:00		04:30	
Volume	396		891		703		680		1,071		1,542	
Factor	0.84		0.86		0.90		0.89		0.90		0.96	

Data File : D1909026

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : CHESTNUT AVENUE

Segment : STANDARD AVE TO GRAND AVE

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/25/19

Day: Wednesday

Interval	EB				WB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	0	1	20	55	0	4	16	70	0	5	36	125
12:15	0		9		1		16		1		25	
12:30	0		14		1		16		1		30	
12:45	1		12		2		22		3		34	
01:00	1	1	22	126	2	4	15	137	3	5	37	263
01:15	0		32		2		14		2		46	
01:30	0		50		0		70		0		120	
01:45	0		22		0		38		0		60	
02:00	0	1	18	69	0	2	30	96	0	3	48	165
02:15	0		16		0		16		0		32	
02:30	0		18		0		34		0		52	
02:45	1		17		2		16		3		33	
03:00	0	2	14	67	0	2	14	78	0	4	28	145
03:15	1		20		1		24		2		44	
03:30	1		13		0		20		1		33	
03:45	0		20		1		20		1		40	
04:00	0	4	20	64	0	9	32	112	0	13	52	176
04:15	2		16		1		24		3		40	
04:30	0		16		5		26		5		42	
04:45	2		12		3		30		5		42	
05:00	10	39	36	105	6	39	42	130	16	78	78	235
05:15	8		20		14		32		22		52	
05:30	11		23		9		26		20		49	
05:45	10		26		10		30		20		56	
06:00	10	75	25	63	15	69	24	78	25	144	49	141
06:15	19		12		14		14		33		26	
06:30	24		16		16		20		40		36	
06:45	22		10		24		20		46		30	
07:00	32	224	6	26	18	192	12	35	50	416	18	61
07:15	54		8		42		2		96		10	
07:30	80		7		78		11		158		18	
07:45	58		5		54		10		112		15	
08:00	13	52	10	23	18	56	13	26	31	108	23	49
08:15	13		3		14		6		27		9	
08:30	14		6		7		4		21		10	
08:45	12		4		17		3		29		7	
09:00	16	54	4	18	10	47	3	22	26	101	7	40
09:15	14		2		19		5		33		7	
09:30	10		6		14		9		24		15	
09:45	14		6		4		5		18		11	
10:00	21	54	2	13	17	63	4	16	38	117	6	29
10:15	18		4		20		3		38		7	
10:30	8		3		19		6		27		9	
10:45	7		4		7		3		14		7	
11:00	11	51	1	8	13	66	3	13	24	117	4	21
11:15	16		3		23		3		39		6	
11:30	14		3		14		5		28		8	
11:45	10		1		16		2		26		3	
Totals	558		637		553		813		1,111		1,450	
Split%	50.2		43.9		49.8		56.1					
Day Totals		1,195				1,366				2,561		
Day Splits		46.7				53.3						
Peak Hour	07:00		01:00		07:00		01:30		07:00		01:15	
Volume	224		126		192		154		416		274	
Factor	0.70		0.63		0.62		0.55		0.66		0.57	

Data File : D1909034

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : CIVIC CENTER DRIVE

Segment : MAIN ST TO SANTIAGO

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/18/19

Day: Wednesday

Interval	WB				EB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	4	13	50	217	9	41	84	337	13	54	134	554
12:15	3		53		12		90		15		143	
12:30	2		54		10		94		12		148	
12:45	4		60		10		69		14		129	
01:00	3	9	71	268	4	19	70	357	7	28	141	625
01:15	2		71		6		70		8		141	
01:30	2		66		6		130		8		196	
01:45	2		60		3		87		5		147	
02:00	1	4	53	208	1	14	86	388	2	18	139	596
02:15	1		46		3		100		4		146	
02:30	1		63		8		92		9		155	
02:45	1		46		2		110		3		156	
03:00	2	7	79	315	5	15	116	503	7	22	195	818
03:15	0		98		2		121		2		219	
03:30	4		72		5		148		9		220	
03:45	1		66		3		118		4		184	
04:00	4	18	80	288	7	44	153	744	11	62	233	1,032
04:15	2		80		10		150		12		230	
04:30	4		66		11		191		15		257	
04:45	8		62		16		250		24		312	
05:00	10	63	64	270	18	101	234	654	28	164	298	924
05:15	9		57		17		188		26		245	
05:30	16		75		32		130		48		205	
05:45	28		74		34		102		62		176	
06:00	24	165	62	183	29	207	110	380	53	372	172	563
06:15	29		43		42		105		71		148	
06:30	26		35		66		93		92		128	
06:45	86		43		70		72		156		115	
07:00	76	529	39	144	68	472	74	223	144	1,001	113	367
07:15	116		42		100		56		216		98	
07:30	182		32		144		45		326		77	
07:45	155		31		160		48		315		79	
08:00	140	417	37	99	153	376	56	227	293	793	93	326
08:15	98		28		96		60		194		88	
08:30	109		22		60		57		169		79	
08:45	70		12		67		54		137		66	
09:00	62	226	24	84	54	222	26	124	116	448	50	208
09:15	68		20		60		40		128		60	
09:30	48		26		56		36		104		62	
09:45	48		14		52		22		100		36	
10:00	55	170	10	32	56	228	28	93	111	398	38	125
10:15	32		8		56		32		88		40	
10:30	48		10		56		22		104		32	
10:45	35		4		60		11		95		15	
11:00	50	203	4	15	90	384	11	64	140	587	15	79
11:15	46		4		89		20		135		24	
11:30	55		4		101		18		156		22	
11:45	52		3		104		15		156		18	
Totals	1,824		2,123		2,123		4,094		3,947		6,217	
Split%	46.2		34.1		53.8		65.9					
Day Totals		3,947				6,217				10,164		
Day Splits		38.8				61.2						
Peak Hour	07:15		03:15		07:15		04:30		07:15		04:30	
Volume	593		316		557		863		1,150		1,112	
Factor	0.81		0.81		0.87		0.86		0.88		0.89	

Data File : D1909042

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : CIVIC CENTER DRIVE

Segment : FAIRVIEW ST TO RAITT ST

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/18/19

Day: Wednesday

Interval	EB				WB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	9	46	59	291	10	39	90	317	19	85	149	608
12:15	17		64		9		77		26		141	
12:30	14		82		14		76		28		158	
12:45	6		86		6		74		12		160	
01:00	13	30	96	347	13	39	80	403	26	69	176	750
01:15	10		96		14		88		24		184	
01:30	3		82		5		112		8		194	
01:45	4		73		7		123		11		196	
02:00	8	24	96	360	11	25	99	491	19	49	195	851
02:15	7		94		3		134		10		228	
02:30	3		82		6		142		9		224	
02:45	6		88		5		116		11		204	
03:00	2	17	136	482	3	30	142	524	5	47	278	1,006
03:15	3		112		11		154		14		266	
03:30	7		122		8		114		15		236	
03:45	5		112		8		114		13		226	
04:00	6	48	121	508	12	87	120	576	18	135	241	1,084
04:15	10		128		22		144		32		272	
04:30	16		128		24		160		40		288	
04:45	16		131		29		152		45		283	
05:00	32	127	144	661	34	167	162	660	66	294	306	1,321
05:15	26		174		26		196		52		370	
05:30	31		192		59		158		90		350	
05:45	38		151		48		144		86		295	
06:00	44	299	128	477	54	305	137	408	98	604	265	885
06:15	54		128		72		108		126		236	
06:30	82		126		74		91		156		217	
06:45	119		95		105		72		224		167	
07:00	147	831	96	326	107	437	76	310	254	1,268	172	636
07:15	186		70		102		72		288		142	
07:30	262		84		114		82		376		166	
07:45	236		76		114		80		350		156	
08:00	156	560	79	232	132	435	78	271	288	995	157	503
08:15	164		52		100		66		264		118	
08:30	118		53		103		62		221		115	
08:45	122		48		100		65		222		113	
09:00	74	290	54	190	64	272	67	240	138	562	121	430
09:15	61		60		60		68		121		128	
09:30	77		46		82		60		159		106	
09:45	78		30		66		45		144		75	
10:00	78	271	25	124	64	279	41	118	142	550	66	242
10:15	66		40		96		28		162		68	
10:30	70		27		65		32		135		59	
10:45	57		32		54		17		111		49	
11:00	62	252	20	61	64	285	24	64	126	537	44	125
11:15	53		11		65		19		118		30	
11:30	66		15		66		14		132		29	
11:45	71		15		90		7		161		22	
Totals	2,795		4,059		2,400		4,382		5,195		8,441	
Split%	53.8		48.1		46.2		51.9					
Day Totals		6,854				6,782				13,636		
Day Splits		50.3				49.7						
Peak Hour	07:15		05:00		07:15		04:30		07:15		05:00	
Volume	840		661		462		670		1,302		1,321	
Factor	0.80		0.86		0.88		0.85		0.87		0.89	

Data File : D1909036

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : FLOWER STREET

Segment : WARNER AVE TO EDINGER AVE

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/10/19

Day: Tuesday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	15	46	52	209	7	36	66	262	22	82	118	471
12:15	12		48		6		78		18		126	
12:30	9		47		13		60		22		107	
12:45	10		62		10		58		20		120	
01:00	11	25	52	248	6	25	60	241	17	50	112	489
01:15	8		46		5		50		13		96	
01:30	3		71		4		62		7		133	
01:45	3		79		10		69		13		148	
02:00	0	11	73	391	8	23	77	381	8	34	150	772
02:15	2		86		2		83		4		169	
02:30	4		92		4		116		8		208	
02:45	5		140		9		105		14		245	
03:00	2	18	135	524	3	34	66	298	5	52	201	822
03:15	2		134		9		66		11		200	
03:30	6		131		10		86		16		217	
03:45	8		124		12		80		20		204	
04:00	2	27	122	481	10	101	74	336	12	128	196	817
04:15	5		121		13		84		18		205	
04:30	7		118		41		84		48		202	
04:45	13		120		37		94		50		214	
05:00	10	91	134	525	33	255	100	408	43	346	234	933
05:15	26		140		46		100		72		240	
05:30	23		127		86		90		109		217	
05:45	32		124		90		118		122		242	
06:00	35	161	130	465	61	342	94	339	96	503	224	804
06:15	29		120		77		96		106		216	
06:30	44		120		106		72		150		192	
06:45	53		95		98		77		151		172	
07:00	43	270	78	308	118	474	70	282	161	744	148	590
07:15	77		73		122		73		199		146	
07:30	79		84		130		72		209		156	
07:45	71		73		104		67		175		140	
08:00	89	302	83	258	132	466	65	207	221	768	148	465
08:15	80		69		104		54		184		123	
08:30	68		60		127		42		195		102	
08:45	65		46		103		46		168		92	
09:00	33	155	45	186	86	263	38	141	119	418	83	327
09:15	36		50		53		29		89		79	
09:30	47		46		62		40		109		86	
09:45	39		45		62		34		101		79	
10:00	48	175	36	138	50	219	30	115	98	394	66	253
10:15	40		31		66		28		106		59	
10:30	42		40		44		36		86		76	
10:45	45		31		59		21		104		52	
11:00	40	214	33	80	68	238	20	61	108	452	53	141
11:15	52		16		56		16		108		32	
11:30	66		18		62		11		128		29	
11:45	56		13		52		14		108		27	
Totals	1,495		3,813		2,476		3,071		3,971		6,884	
Split%	37.6		55.4		62.4		44.6					
Day Totals		5,308				5,547				10,855		
Day Splits		48.9				51.1						
Peak Hour	07:30		02:45		07:15		05:00		07:15		05:00	
Volume	319		540		488		408		804		933	
Factor	0.90		0.96		0.92		0.86		0.91		0.96	

Data File : D1909102

Thursday, September 26, 2019 CITY: Santa Ana PROJECT: SC

ADT138 HAZARD AVE from EUCLID ST to NEWHOPE ST. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:00			10		18			12:00			46		69		
0:15			8		6			12:15			51		47		
0:30			4		5			12:30			55		63		
0:45			4	26	10	39	65	12:45			52	204	45	224	428
1:00			4		5			13:00			59		43		
1:15			6		4			13:15			53		60		
1:30			12		4			13:30			63		55		
1:45			6	28	6	19	47	13:45			77	252	73	231	483
2:00			4		0			14:00			61		74		
2:15			4		3			14:15			85		77		
2:30			0		0			14:30			78		64		
2:45			3	11	3	6	17	14:45			90	314	64	279	593
3:00			4		7			15:00			91		94		
3:15			7		2			15:15			90		81		
3:30			5		6			15:30			90		79		
3:45			0	16	3	18	34	15:45			117	388	76	330	718
4:00			4		4			16:00			86		84		
4:15			10		6			16:15			75		78		
4:30			10		14			16:30			78		96		
4:45			12	36	10	34	70	16:45			97	336	100	358	694
5:00			11		13			17:00			90		96		
5:15			12		12			17:15			89		146		
5:30			19		14			17:30			95		125		
5:45			28	70	15	54	124	17:45			105	379	132	499	878
6:00			27		18			18:00			84		133		
6:15			32		21			18:15			90		106		
6:30			40		31			18:30			88		90		
6:45			54	153	37	107	260	18:45			91	353	83	412	765
7:00			55		40			19:00			65		71		
7:15			94		81			19:15			65		67		
7:30			114		136			19:30			60		49		
7:45			156	419	172	429	848	19:45			46	236	46	233	469
8:00			110		126			20:00			56		33		
8:15			120		81			20:15			54		46		
8:30			121		64			20:30			39		36		
8:45			82	433	60	331	764	20:45			42	191	33	148	339
9:00			68		60			21:00			33		29		
9:15			58		79			21:15			41		27		
9:30			47		67			21:30			28		21		
9:45			50	223	71	277	500	21:45			26	128	40	117	245
10:00			70		42			22:00			23		25		
10:15			47		51			22:15			23		24		
10:30			49		52			22:30			16		17		
10:45			48	214	47	192	406	22:45			12	74	11	77	151
11:00			79		48			23:00			17		14		
11:15			54		66			23:15			8		16		
11:30			51		55			23:30			12		9		
11:45			68	252	34	203	455	23:45			9	46	13	52	98
Total Vol.			1881		1709		**3590**				2901		2960		**5861**

Daily Totals

NB	SB	EB	WB	Combined
		4782	4669	**9451**

	AM			PM		
Split %	52.4%	47.6%	**38.0%**	49.5%	50.5%	**62.0%**
Peak Hour	7:45	7:15	**7:30**	15:00	17:15	**17:15**
Volume	507	515	**1015**	388	536	**909**
P.H.F.	0.81	0.75	**0.77**	0.83	0.92	**0.96**

cs@aimtd.com Tell. 714 253 7888

Attachment 8

Tuesday, September 24, 2019 CITY: Santa Ana PROJECT: SC

ADT179 McFADDEN AVE from MAIN ST to STANDARD AVE. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:00			15		24			12:00			76		89		
0:15			12		17			12:15			87		95		
0:30			13		14			12:30			92		79		
0:45			12	52	13	68	120	12:45			92	347	78	341	688
1:00			7		13			13:00			63		81		
1:15			7		14			13:15			87		86		
1:30			6		6			13:30			86		115		
1:45			10	30	11	44	74	13:45			95	331	106	388	719
2:00			15		11			14:00			95		125		
2:15			5		11			14:15			116		152		
2:30			5		6			14:30			130		187		
2:45			7	32	6	34	66	14:45			127	468	167	631	1099
3:00			6		5			15:00			130		181		
3:15			11		7			15:15			151		180		
3:30			23		5			15:30			107		196		
3:45			37	77	14	31	108	15:45			127	515	187	744	1259
4:00			18		7			16:00			108		182		
4:15			44		12			16:15			100		221		
4:30			55		27			16:30			100		196		
4:45			57	174	17	63	237	16:45			113	421	220	819	1240
5:00			60		20			17:00			114		208		
5:15			82		27			17:15			109		211		
5:30			109		41			17:30			120		203		
5:45			168	419	36	124	543	17:45			122	465	154	776	1241
6:00			136		43			18:00			134		175		
6:15			145		51			18:15			116		172		
6:30			157		37			18:30			110		157		
6:45			185	623	49	180	803	18:45			128	488	125	629	1117
7:00			214		67			19:00			114		110		
7:15			187		80			19:15			114		124		
7:30			220		84			19:30			99		103		
7:45			199	820	98	329	1149	19:45			88	415	101	438	853
8:00			164		107			20:00			101		88		
8:15			161		87			20:15			84		84		
8:30			125		77			20:30			71		44		
8:45			149	599	66	337	936	20:45			66	322	67	283	605
9:00			88		72			21:00			66		58		
9:15			97		68			21:15			71		63		
9:30			84		86			21:30			68		53		
9:45			83	352	73	299	651	21:45			55	260	62	236	496
10:00			76		92			22:00			60		69		
10:15			80		72			22:15			36		53		
10:30			87		64			22:30			25		46		
10:45			67	310	80	308	618	22:45			24	145	42	210	355
11:00			95		74			23:00			36		40		
11:15			90		101			23:15			31		28		
11:30			84		98			23:30			12		35		
11:45			85	354	78	351	705	23:45			21	100	20	123	223
Total Vol.			3842		2168		**6010**				4277		5618		**9895**

Daily Totals

NB	SB	EB	WB	Combined
		8119	7786	**15905**

	AM			PM		
Split %	63.9%	36.1%	**37.8%**	43.2%	56.8%	**62.2%**
Peak Hour	7:00	7:30	**7:00**	14:30	16:15	**16:45**
Volume	820	376	**1149**	538	845	**1298**
P.H.F.	0.93	0.88	**0.94**	0.89	0.96	**0.97**

cs@aimtd.com Tell. 714 253 7888

Thursday, October 03, 2019 Location: Santa Ana PROJECT:

ADT197 RAITT ST from FIRST ST to SANTA ANA BL. **Prepared by AimTD tel. 714 753 7888**

AM Period	NB		SB		EB	WB		PM Period	NB		SB		EB	WB	
0:00	9		5					12:00	56		71				
0:15	6		6					12:15	58		67				
0:30	5		3					12:30	61		56				
0:45	2	22	5	19			41	12:45	65	240	64	258			498
1:00	0		4					13:00	54		70				
1:15	0		0					13:15	53		65				
1:30	1		2					13:30	61		58				
1:45	1	2	4	10			12	13:45	74	242	62	255			497
2:00	0		2					14:00	101		58				
2:15	2		0					14:15	89		67				
2:30	3		1					14:30	86		89				
2:45	1	6	0	3			9	14:45	103	379	79	293			672
3:00	3		1					15:00	109		96				
3:15	1		4					15:15	129		74				
3:30	2		2					15:30	132		67				
3:45	2	8	0	7			15	15:45	152	522	78	315			837
4:00	0		2					16:00	132		91				
4:15	3		4					16:15	164		76				
4:30	1		1					16:30	152		51				
4:45	6	10	5	12			22	16:45	175	623	57	275			898
5:00	9		8					17:00	142		89				
5:15	16		16					17:15	151		93				
5:30	18		13					17:30	158		72				
5:45	23	66	14	51			117	17:45	173	624	59	313			937
6:00	44		24					18:00	168		56				
6:15	36		25					18:15	152		64				
6:30	41		30					18:30	111		76				
6:45	52	173	48	127			300	18:45	85	516	78	274			790
7:00	98		104					19:00	71		51				
7:15	141		132					19:15	58		57				
7:30	195		150					19:30	64		46				
7:45	153	587	114	500			1087	19:45	47	240	56	210			450
8:00	121		65					20:00	53		45				
8:15	98		53					20:15	56		39				
8:30	64		55					20:30	51		37				
8:45	51	334	49	222			556	20:45	42	202	46	167			369
9:00	75		42					21:00	50		35				
9:15	53		45					21:15	34		37				
9:30	48		43					21:30	42		32				
9:45	70	246	35	165			411	21:45	25	151	28	132			283
10:00	57		46					22:00	21		25				
10:15	67		40					22:15	16		21				
10:30	53		36					22:30	14		18				
10:45	69	246	35	157			403	22:45	18	69	16	80			149
11:00	58		43					23:00	9		10				
11:15	59		65					23:15	7		7				
11:30	70		56					23:30	5		5				
11:45	66	253	54	218			471	23:45	7	28	5	27			55
Total Vol.		1953		1491			**3444**			3836		2599			**6435**

Daily Totals

NB	SB	EB	WB	Combined
5789	4090			**9879**

	AM			PM		
Split %	56.7%	43.3%	**34.9%**	59.6%	40.4%	**65.1%**
Peak Hour	7:15	7:00	**7:00**	17:30	14:30	**16:45**
Volume	610	500	**1087**	651	338	**937**
P.H.F.	0.78	0.83	**0.79**	0.96	0.88	**0.96**

pacific@aimtd.com Tell. 714 753 7888

Attachment 8

Wednesday, September 11, 2019 Location: Santa Ana PROJECT:

ADT193 RAITT ST from SEGERSTROM AVE to WARNER AVE. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB		SB		EB	WB		PM Period	NB		SB		EB	WB	
0:00	21		10					12:00	77		66				
0:15	12		7					12:15	54		60				
0:30	14		6					12:30	69		59				
0:45	11	58	7	30			88	12:45	71	271	69	254			525
1:00	10		4					13:00	86		98				
1:15	7		5					13:15	100		87				
1:30	6		2					13:30	176		90				
1:45	4	27	5	16			43	13:45	206	568	89	364			932
2:00	4		2					14:00	127		78				
2:15	7		4					14:15	113		57				
2:30	7		7					14:30	139		102				
2:45	5	23	4	17			40	14:45	185	564	112	349			913
3:00	2		9					15:00	250		106				
3:15	5		4					15:15	175		86				
3:30	2		8					15:30	209		69				
3:45	0	9	16	37			46	15:45	239	873	89	350			1223
4:00	5		16					16:00	251		82				
4:15	8		14					16:15	257		70				
4:30	4		34					16:30	299		79				
4:45	4	21	33	97			118	16:45	268	1075	88	319			1394
5:00	6		38					17:00	261		85				
5:15	11		62					17:15	234		90				
5:30	13		82					17:30	301		105				
5:45	12	42	95	277			319	17:45	237	1033	109	389			1422
6:00	20		57					18:00	246		101				
6:15	21		106					18:15	210		89				
6:30	42		95					18:30	151		75				
6:45	103	186	156	414			600	18:45	143	750	89	354			1104
7:00	117		172					19:00	128		91				
7:15	114		197					19:15	117		74				
7:30	176		187					19:30	104		57				
7:45	165	572	184	740			1312	19:45	103	452	61	283			735
8:00	170		163					20:00	90		62				
8:15	74		143					20:15	73		56				
8:30	84		179					20:30	71		59				
8:45	146	474	207	692			1166	20:45	81	315	37	214			529
9:00	104		87					21:00	67		58				
9:15	40		59					21:15	70		38				
9:30	34		65					21:30	57		28				
9:45	48	226	65	276			502	21:45	75	269	24	148			417
10:00	38		51					22:00	51		24				
10:15	31		36					22:15	56		14				
10:30	43		61					22:30	44		19				
10:45	46	158	53	201			359	22:45	36	187	16	73			260
11:00	46		49					23:00	27		9				
11:15	47		55					23:15	31		15				
11:30	52		44					23:30	24		6				
11:45	60	205	57	205			410	23:45	22	104	9	39			143
Total Vol.		2001		3002			**5003**			6461		3136			**9597**

Daily Totals

NB	SB	EB	WB	**Combined**
8462	6138			**14600**

	AM			**PM**		
Split %	40.0%	60.0%	**34.3%**	67.3%	32.7%	**65.7%**
Peak Hour	7:15	7:00	**7:15**	16:15	14:30	**16:45**
Volume	625	740	**1356**	1085	406	**1432**
P.H.F.	0.89	0.94	**0.93**	0.91	0.91	**0.88**

cs@aimtd.com Tell. 714 253 7888

Attachment 8

Thursday, October 03, 2019 CITY: Santa Ana PROJECT: SC

ADT211 SANTA ANA BLVD from MAIN ST to FRENCH ST **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:00			0		23			12:00			0		44		
0:15			0		14			12:15			0		69		
0:30			0		16			12:30			0		48		
0:45			0	0	13	66	66	12:45			0	0	62	223	223
1:00			0		18			13:00			0		71		
1:15			0		6			13:15			0		60		
1:30			0		13			13:30			0		79		
1:45			0	0	9	46	46	13:45			0	0	75	285	285
2:00			0		6			14:00			0		71		
2:15			0		17			14:15			0		85		
2:30			0		17			14:30			0		86		
2:45			0	0	11	51	51	14:45			0	0	90	332	332
3:00			0		4			15:00			0		88		
3:15			0		7			15:15			0		108		
3:30			0		17			15:30			0		94		
3:45			0	0	19	47	47	15:45			0	0	93	383	383
4:00			0		12			16:00			0		135		
4:15			0		19			16:15			0		151		
4:30			0		18			16:30			0		166		
4:45			0	0	24	73	73	16:45			0	0	171	623	623
5:00			0		27			17:00			0		178		
5:15			0		34			17:15			0		182		
5:30			0		53			17:30			0		178		
5:45			0	0	75	189	189	17:45			0	0	192	730	730
6:00			0		71			18:00			0		146		
6:15			0		55			18:15			0		124		
6:30			0		78			18:30			0		127		
6:45			0	0	117	321	321	18:45			0	0	121	518	518
7:00			0		132			19:00			0		102		
7:15			0		106			19:15			0		94		
7:30			0		118			19:30			0		96		
7:45			0	0	137	493	493	19:45			0	0	83	375	375
8:00			0		107			20:00			0		80		
8:15			0		72			20:15			0		77		
8:30			0		67			20:30			0		80		
8:45			0	0	52	298	298	20:45			0	0	73	310	310
9:00			0		68			21:00			0		38		
9:15			0		56			21:15			0		58		
9:30			0		61			21:30			0		70		
9:45			0	0	56	241	241	21:45			0	0	40	206	206
10:00			0		64			22:00			0		43		
10:15			0		58			22:15			0		46		
10:30			0		48			22:30			0		36		
10:45			0	0	53	223	223	22:45			0	0	42	167	167
11:00			0		68			23:00			0		30		
11:15			0		54			23:15			0		28		
11:30			0		58			23:30			0		26		
11:45			0	0	65	245	245	23:45			0	0	21	105	105
Total Vol.						2293	**2293**							4257	**4257**

Daily Totals				
NB	SB	EB	WB	**Combined**
			6550	**6550**

	AM		PM	
Split %	100.0%	**35.0%**	100.0%	**65.0%**
Peak Hour	7:00	**7:00**	17:00	**17:00**
Volume	493	**493**	730	**730**
P.H.F.	0.90	**0.90**	0.95	**0.95**

cs@aimtd.com Tell. 714 253 7888

Attachment 8

Wednesday, October 02, 2019 CITY: Santa Ana PROJECT: SC

ADT206 SANTA ANA BLVD from RAITT ST to BRISTOL ST. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:00			3		4			12:00			20		31		
0:15			0		7			12:15			18		40		
0:30			3		5			12:30			25		37		
0:45			2	8	4	20	28	12:45			23	86	27	135	221
1:00			2		0			13:00			35		26		
1:15			0		3			13:15			23		37		
1:30			0		0			13:30			21		28		
1:45			3	5	0	3	8	13:45			26	105	32	123	228
2:00			0		0			14:00			29		22		
2:15			2		0			14:15			15		28		
2:30			0		0			14:30			26		22		
2:45			0	2	0	0	2	14:45			25	95	40	112	207
3:00			0		0			15:00			28		47		
3:15			2		0			15:15			41		43		
3:30			3		2			15:30			35		45		
3:45			2	7	3	5	12	15:45			30	134	39	174	308
4:00			4		2			16:00			18		45		
4:15			3		2			16:15			27		55		
4:30			8		4			16:30			36		49		
4:45			11	26	9	17	43	16:45			34	115	67	216	331
5:00			8		2			17:00			33		76		
5:15			16		5			17:15			25		82		
5:30			10		19			17:30			33		71		
5:45			14	48	20	46	94	17:45			28	119	64	293	412
6:00			17		22			18:00			27		47		
6:15			21		15			18:15			30		31		
6:30			20		22			18:30			16		37		
6:45			31	89	23	82	171	18:45			27	100	34	149	249
7:00			42		23			19:00			19		30		
7:15			96		29			19:15			17		26		
7:30			108		39			19:30			19		29		
7:45			108	354	51	142	496	19:45			9	64	23	108	172
8:00			66		35			20:00			9		30		
8:15			60		43			20:15			9		16		
8:30			25		20			20:30			10		24		
8:45			37	188	26	124	312	20:45			11	39	14	84	123
9:00			27		18			21:00			12		13		
9:15			26		25			21:15			13		12		
9:30			23		20			21:30			14		21		
9:45			13	89	27	90	179	21:45			7	46	19	65	111
10:00			27		21			22:00			9		16		
10:15			14		28			22:15			6		14		
10:30			18		19			22:30			3		7		
10:45			28	87	21	89	176	22:45			9	27	12	49	76
11:00			18		26			23:00			3		9		
11:15			21		31			23:15			4		8		
11:30			26		33			23:30			2		2		
11:45			15	80	31	121	201	23:45			2	11	4	23	34
Total Vol.			983		739		**1722**				941		1531		**2472**

Daily Totals

NB	SB	EB	WB	Combined
		1924	2270	**4194**

	AM			PM		
Split %	57.1%	42.9%	**41.1%**	38.1%	61.9%	**58.9%**
Peak Hour	7:15	7:30	**7:15**	15:00	16:45	**16:45**
Volume	378	168	**532**	134	296	**421**
P.H.F.	0.88	0.82	**0.84**	0.82	0.90	**0.97**

cs@aimtd.com Tell. 714 253 7888

Attachment 8

Wednesday, October 02, 2019 Location: Santa Ana PROJECT:

ADT243 STANDARD AVE from McFADDEN AVE to CHESTNUT AVE. **Prepared by AimTD tel. 714 753 7888**

AM Period	NB		SB		EB	WB		PM Period	NB		SB		EB	WB	
0:00	15		11					12:00	77		61				
0:15	11		9	9				12:15	73		56				
0:30	11		6					12:30	82		66				
0:45	12	49	13	39			88	12:45	80	312	85	268			580
1:00	8		5					13:00	75		113				
1:15	9		6					13:15	86		105				
1:30	11		7					13:30	79		109				
1:45	13	41	4	22			63	13:45	91	331	92	419			750
2:00	6		5					14:00	114		83				
2:15	6		4					14:15	115		92				
2:30	2		4					14:30	132		79				
2:45	4	18	8	21			39	14:45	129	490	85	339			829
3:00	3		3					15:00	134		98				
3:15	5		5					15:15	166		96				
3:30	4		6					15:30	172		84				
3:45	7	19	4	18			37	15:45	166	638	92	370			1008
4:00	3		10					16:00	184		106				
4:15	6		5					16:15	188		93				
4:30	10		8					16:30	196		107				
4:45	15	34	14	37			71	16:45	218	786	113	419			1205
5:00	18		18					17:00	209		123				
5:15	15		19					17:15	222		114				
5:30	28		47					17:30	207		100				
5:45	31	92	48	132			224	17:45	197	835	99	436			1271
6:00	24		40					18:00	172		97				
6:15	26		46					18:15	141		122				
6:30	52		60					18:30	153		95				
6:45	85	187	63	209			396	18:45	131	597	89	403			1000
7:00	95		97					19:00	105		72				
7:15	105		112					19:15	96		74				
7:30	113		114					19:30	87		85				
7:45	156	469	146	469			938	19:45	91	379	72	303			682
8:00	134		120					20:00	96		77				
8:15	104		99					20:15	68		64				
8:30	85		84					20:30	57		49				
8:45	103	426	74	377			803	20:45	48	269	51	241			510
9:00	78		55					21:00	55		51				
9:15	70		74					21:15	45		53				
9:30	64		80					21:30	49		40				
9:45	73	285	76	285			570	21:45	32	181	43	187			368
10:00	56		57					22:00	43		34				
10:15	53		46					22:15	35		19				
10:30	49		57					22:30	29		27				
10:45	45	203	63	223			426	22:45	23	130	25	105			235
11:00	50		67					23:00	25		15				
11:15	56		78					23:15	15		23				
11:30	64		64					23:30	17		15				
11:45	74	244	59	268			512	23:45	13	70	16	69			139
Total Vol.		2067		2100			**4167**			5018		3559			**8577**

Daily Totals

NB	SB	EB	WB	Combined
7085	5659			**12744**

	AM			PM		
Split %	49.6%	50.4%	**32.7%**	58.5%	41.5%	**67.3%**
Peak Hour	7:15	7:15	**7:15**	16:45	16:30	**16:45**
Volume	508	492	**1000**	856	457	**1306**
P.H.F.	0.81	0.84	**0.83**	0.98	0.93	**0.97**

pacific@aimtd.com Tell. 714 753 7888

Attachment 8

Wednesday, September 11, 2019 Location: Santa Ana PROJECT:

ADT241 STANDARD AVE from WARNER AVE to EDINGER AVE. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB		SB		EB	WB		PM Period	NB		SB		EB	WB	
0:00	23		12					12:00	92		75				
0:15	12		12					12:15	82		72				
0:30	14		12					12:30	78		65				
0:45	11	60	12	48			108	12:45	70	322	69	281			603
1:00	32		10					13:00	79		66				
1:15	13		9					13:15	91		73				
1:30	15		5					13:30	126		55				
1:45	7	67	10	34			101	13:45	109	405	65	259			664
2:00	8		6					14:00	120		75				
2:15	4		6					14:15	112		76				
2:30	15		5					14:30	147		95				
2:45	6	33	11	28			61	14:45	165	544	96	342			886
3:00	5		3					15:00	198		94				
3:15	4		7					15:15	151		75				
3:30	9		7					15:30	202		77				
3:45	12	30	16	33			63	15:45	188	739	70	316			1055
4:00	10		11					16:00	191		88				
4:15	9		29					16:15	188		88				
4:30	10		50					16:30	208		89				
4:45	23	52	74	164			216	16:45	257	844	86	351			1195
5:00	27		58					17:00	274		79				
5:15	38		67					17:15	241		107				
5:30	39		72					17:30	197		90				
5:45	38	142	123	320			462	17:45	146	858	103	379			1237
6:00	45		83					18:00	136		67				
6:15	51		79					18:15	149		65				
6:30	69		113					18:30	127		67				
6:45	67	232	120	395			627	18:45	102	514	71	270			784
7:00	94		112					19:00	74		60				
7:15	73		149					19:15	84		58				
7:30	89		160					19:30	79		65				
7:45	99	355	152	573			928	19:45	68	305	65	248			553
8:00	79		127					20:00	71		57				
8:15	78		112					20:15	56		47				
8:30	82		65					20:30	64		45				
8:45	72	311	80	384			695	20:45	47	238	44	193			431
9:00	54		68					21:00	42		39				
9:15	68		49					21:15	53		37				
9:30	62		67					21:30	37		35				
9:45	52	236	52	236			472	21:45	36	168	35	146			314
10:00	61		47					22:00	46		43				
10:15	53		50					22:15	35		30				
10:30	55		37					22:30	20		22				
10:45	47	216	48	182			398	22:45	33	134	20	115			249
11:00	67		33					23:00	24		20				
11:15	72		60					23:15	25		9				
11:30	74		59					23:30	18		11				
11:45	87	300	45	197			497	23:45	11	78	8	48			126
Total Vol.		2034		2594			**4628**			5149		2948			**8097**

Daily Totals

NB	SB	EB	WB	**Combined**
7183	5542			**12725**

	AM			**PM**		
Split %	43.9%	56.1%	**36.4%**	63.6%	36.4%	**63.6%**
Peak Hour	7:00	7:15	**7:00**	16:30	17:00	**16:30**
Volume	355	588	**928**	980	379	**1341**
P.H.F.	0.90	0.92	**0.92**	0.92	0.89	**0.95**

cs@aimtd.com Tell. 714 253 7888

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : GREENVILLE STREET

Segment : WARNER AVE TO EDINGER AVE

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 10/01/19

Day: Tuesday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	7	19	21	128	4	9	36	135	11	28	57	263
12:15	8		29		2		31		10		60	
12:30	2		38		2		33		4		71	
12:45	2		40		1		35		3		75	
01:00	7	20	43	172	4	12	23	155	11	32	66	327
01:15	4		43		1		42		5		85	
01:30	4		38		5		46		9		84	
01:45	5		48		2		44		7		92	
02:00	2	10	54	268	0	6	52	238	2	16	106	506
02:15	1		45		2		58		3		103	
02:30	1		77		2		48		3		125	
02:45	6		92		2		80		8		172	
03:00	2	11	110	433	0	14	68	212	2	25	178	645
03:15	2		114		4		46		6		160	
03:30	3		102		7		46		10		148	
03:45	4		107		3		52		7		159	
04:00	4	16	110	466	3	41	48	197	7	57	158	663
04:15	2		121		10		43		12		164	
04:30	6		113		16		56		22		169	
04:45	4		122		12		50		16		172	
05:00	7	45	113	499	15	107	60	226	22	152	173	725
05:15	11		135		16		54		27		189	
05:30	14		128		35		46		49		174	
05:45	13		123		41		66		54		189	
06:00	22	104	99	314	30	173	59	216	52	277	158	530
06:15	18		93		46		50		64		143	
06:30	28		69		43		58		71		127	
06:45	36		53		54		49		90		102	
07:00	50	272	44	149	70	340	50	195	120	612	94	344
07:15	70		35		102		52		172		87	
07:30	84		39		88		50		172		89	
07:45	68		31		80		43		148		74	
08:00	60	163	43	147	69	202	57	156	129	365	100	303
08:15	44		34		52		42		96		76	
08:30	36		35		42		34		78		69	
08:45	23		35		39		23		62		58	
09:00	20	107	34	114	31	127	30	101	51	234	64	215
09:15	32		34		30		28		62		62	
09:30	29		24		38		28		67		52	
09:45	26		22		28		15		54		37	
10:00	34	109	19	58	28	129	18	56	62	238	37	114
10:15	23		20		26		11		49		31	
10:30	20		12		43		17		63		29	
10:45	32		7		32		10		64		17	
11:00	32	138	17	38	24	146	7	27	56	284	24	65
11:15	40		15		33		8		73		23	
11:30	36		2		42		6		78		8	
11:45	30		4		47		6		77		10	
Totals	1,014		2,786		1,306		1,914		2,320		4,700	
Split%	43.7		59.3		56.3		40.7					
Day Totals		3,800				3,220				7,020		
Day Splits		54.1				45.9						
Peak Hour	07:15		05:00		07:00		02:15		07:15		05:00	
Volume	282		499		340		254		621		725	
Factor	0.84		0.92		0.83		0.79		0.90		0.96	

Data File : D1909132

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : GREENVILLE STREET

Segment : SEGERSTROM AVE TO WARNER AVE

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 10/01/19

Day: Tuesday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	6	29	41	158	5	21	32	145	11	50	73	303
12:15	9		39		7		35		16		74	
12:30	4		36		9		36		13		72	
12:45	10		42		0		42		10		84	
01:00	3	15	46	187	3	12	32	193	6	27	78	380
01:15	6		43		2		48		8		91	
01:30	4		43		2		51		6		94	
01:45	2		55		5		62		7		117	
02:00	6	14	67	404	1	7	56	280	7	21	123	684
02:15	1		60		3		76		4		136	
02:30	2		84		1		72		3		156	
02:45	5		193		2		76		7		269	
03:00	1	5	192	642	4	14	66	219	5	19	258	861
03:15	2		138		0		52		2		190	
03:30	2		142		1		43		3		185	
03:45	0		170		9		58		9		228	
04:00	1	8	181	663	6	51	35	199	7	59	216	862
04:15	3		148		6		53		9		201	
04:30	1		178		17		47		18		225	
04:45	3		156		22		64		25		220	
05:00	4	24	174	666	16	122	57	229	20	146	231	895
05:15	8		190		29		54		37		244	
05:30	8		162		27		62		35		224	
05:45	4		140		50		56		54		196	
06:00	14	76	122	408	28	198	70	212	42	274	192	620
06:15	14		114		50		42		64		156	
06:30	21		93		44		50		65		143	
06:45	27		79		76		50		103		129	
07:00	26	231	52	205	94	571	39	184	120	802	91	389
07:15	57		54		147		57		204		111	
07:30	62		43		188		44		250		87	
07:45	86		56		142		44		228		100	
08:00	72	160	52	214	102	310	51	137	174	470	103	351
08:15	40		63		78		32		118		95	
08:30	30		53		54		31		84		84	
08:45	18		46		76		23		94		69	
09:00	31	117	47	136	36	153	22	90	67	270	69	226
09:15	22		41		36		27		58		68	
09:30	30		21		49		22		79		43	
09:45	34		27		32		19		66		46	
10:00	39	107	25	81	41	159	17	54	80	266	42	135
10:15	22		28		38		13		60		41	
10:30	18		10		34		11		52		21	
10:45	28		18		46		13		74		31	
11:00	32	141	15	61	40	153	5	28	72	294	20	89
11:15	30		15		28		4		58		19	
11:30	43		13		40		10		83		23	
11:45	36		18		45		9		81		27	
Totals	927		3,825		1,771		1,970		2,698		5,795	
Split%	34.4		66.0		65.6		34.0					
Day Totals		4,752				3,741				8,493		
Day Splits		56.0				44.0						
Peak Hour	07:15		04:30		07:15		02:15		07:15		04:30	
Volume	277		698		579		290		856		920	
Factor	0.81		0.92		0.77		0.95		0.86		0.94	

Data File : D1909131

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : FLOWER STREET

Segment : SANTA CLARA TO MEMORY LN

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/12/19

File: D1909110

Day: Thursday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	3	9	58	187	14	30	82	302	17	39	140	489
12:15	4		50		3		74		7		124	
12:30	2		41		4		76		6		117	
12:45	0		38		9		70		9		108	
01:00	4	7	54	180	0	8	102	373	4	15	156	553
01:15	1		34		2		74		3		108	
01:30	2		49		0		87		2		136	
01:45	0		43		6		110		6		153	
02:00	0	4	68	314	4	16	127	484	4	20	195	798
02:15	2		96		6		148		8		244	
02:30	1		92		4		93		5		185	
02:45	1		58		2		116		3		174	
03:00	0	7	80	332	6	20	118	401	6	27	198	733
03:15	1		78		6		100		7		178	
03:30	1		94		4		73		5		167	
03:45	5		80		4		110		9		190	
04:00	3	9	81	392	2	44	92	466	5	53	173	858
04:15	3		74		10		132		13		206	
04:30	2		112		20		122		22		234	
04:45	1		125		12		120		13		245	
05:00	10	28	132	600	16	121	130	569	26	149	262	1,169
05:15	2		164		23		149		25		313	
05:30	6		162		48		162		54		324	
05:45	10		142		34		128		44		270	
06:00	10	90	128	404	40	299	136	457	50	389	264	861
06:15	18		104		47		113		65		217	
06:30	26		92		80		96		106		188	
06:45	36		80		132		112		168		192	
07:00	33	267	86	232	165	971	108	340	198	1,238	194	572
07:15	68		58		230		94		298		152	
07:30	82		40		284		80		366		120	
07:45	84		48		292		58		376		106	
08:00	132	285	34	129	178	531	81	251	310	816	115	380
08:15	74		32		138		68		212		100	
08:30	46		33		136		54		182		87	
08:45	33		30		79		48		112		78	
09:00	35	123	20	72	87	347	48	213	122	470	68	285
09:15	30		25		92		61		122		86	
09:30	32		13		78		58		110		71	
09:45	26		14		90		46		116		60	
10:00	28	142	8	29	58	262	47	140	86	404	55	169
10:15	52		10		66		50		118		60	
10:30	31		3		68		25		99		28	
10:45	31		8		70		18		101		26	
11:00	38	151	10	33	82	303	19	71	120	454	29	104
11:15	30		10		58		16		88		26	
11:30	46		7		88		30		134		37	
11:45	37		6		75		6		112		12	
Totals	1,122		2,904		2,952		4,067		4,074		6,971	
Split%	27.5		41.7		72.5		58.3					
Day Totals		4,026				7,019				11,045		
Day Splits		36.5				63.5						
Peak Hour	07:30		05:00		07:15		05:15		07:15		05:15	
Volume	372		600		984		575		1,350		1,171	
Factor	0.70		0.91		0.84		0.89		0.90		0.90	

Data File : D1909110

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : DYER ROAD

Segment : PULLMAN ST TO RED HILL AVE

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 09/24/19

Day: Tuesday

Interval	EB				WB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	20	52	214	769	38	198	228	930	58	250	442	1,699
12:15	10		190		38		234		48		424	
12:30	14		183		84		230		98		413	
12:45	8		182		38		238		46		420	
01:00	13	32	204	728	24	73	246	1,032	37	105	450	1,760
01:15	11		162		28		250		39		412	
01:30	2		186		13		285		15		471	
01:45	6		176		8		251		14		427	
02:00	12	66	186	687	16	63	297	1,179	28	129	483	1,866
02:15	7		155		17		278		24		433	
02:30	17		170		18		335		35		505	
02:45	30		176		12		269		42		445	
03:00	18	187	158	741	16	60	286	1,286	34	247	444	2,027
03:15	31		191		20		332		51		523	
03:30	56		192		11		323		67		515	
03:45	82		200		13		345		95		545	
04:00	56	480	183	852	26	115	370	1,350	82	595	553	2,202
04:15	85		206		24		316		109		522	
04:30	137		227		40		342		177		569	
04:45	202		236		25		322		227		558	
05:00	175	904	243	1,101	32	209	389	1,412	207	1,113	632	2,513
05:15	205		276		36		358		241		634	
05:30	228		294		58		308		286		602	
05:45	296		288		83		357		379		645	
06:00	214	900	230	844	88	460	322	1,197	302	1,360	552	2,041
06:15	241		215		134		329		375		544	
06:30	231		234		102		313		333		547	
06:45	214		165		136		233		350		398	
07:00	220	991	146	486	172	777	300	986	392	1,768	446	1,472
07:15	251		106		176		266		427		372	
07:30	264		120		186		232		450		352	
07:45	256		114		243		188		499		302	
08:00	228	950	124	380	245	1,001	214	748	473	1,951	338	1,128
08:15	222		90		253		168		475		258	
08:30	238		74		267		170		505		244	
08:45	262		92		236		196		498		288	
09:00	218	868	82	293	224	785	194	654	442	1,653	276	947
09:15	233		84		187		158		420		242	
09:30	211		60		195		172		406		232	
09:45	206		67		179		130		385		197	
10:00	170	677	42	195	193	739	150	488	363	1,416	192	683
10:15	168		54		191		122		359		176	
10:30	181		57		175		122		356		179	
10:45	158		42		180		94		338		136	
11:00	208	870	22	83	188	776	98	285	396	1,646	120	368
11:15	219		19		201		66		420		85	
11:30	199		25		184		65		383		90	
11:45	244		17		203		56		447		73	
Totals	6,977		7,159		5,256		11,547		12,233		18,706	
Split%	57.0		38.3		43.0		61.7					
Day Totals		14,136				16,803				30,939		
Day Splits		45.7				54.3						
Peak Hour	07:15		05:00		07:45		05:00		07:45		05:00	
Volume	999		1,101		1,008		1,412		1,952		2,513	
Factor	0.95		0.94		0.94		0.91		0.97		0.97	

Data File : D1909047

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

Location : FAIRHAVEN AVENUE
Segment : TUSTIN AVE TO NEWPORT FWY
Client : CITY SANTA ANA

Site: SANTA ANA
Date: 10/03/19
Day: Thursday

Interval	WB				EB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	18	24	89	408	18	50	79	376	36	74	168	784
12:15	2		128		14		94		16		222	
12:30	3		96		7		101		10		197	
12:45	1		95		11		102		12		197	
01:00	8	14	114	452	10	21	109	426	18	35	223	878
01:15	2		114		5		92		7		206	
01:30	0		106		4		101		4		207	
01:45	4		118		2		124		6		242	
02:00	3	9	142	604	6	19	107	516	9	28	249	1,120
02:15	2		134		10		144		12		278	
02:30	0		134		1		144		1		278	
02:45	4		194		2		121		6		315	
03:00	5	22	186	615	10	21	154	583	15	43	340	1,198
03:15	7		146		3		158		10		304	
03:30	3		133		4		147		7		280	
03:45	7		150		4		124		11		274	
04:00	9	62	159	690	5	20	131	607	14	82	290	1,297
04:15	16		203		3		160		19		363	
04:30	20		162		7		166		27		328	
04:45	17		166		5		150		22		316	
05:00	44	178	180	833	11	60	147	664	55	238	327	1,497
05:15	38		238		14		188		52		426	
05:30	48		231		12		139		60		370	
05:45	48		184		23		190		71		374	
06:00	58	437	183	651	24	217	138	463	82	654	321	1,114
06:15	107		170		49		118		156		288	
06:30	126		158		68		90		194		248	
06:45	146		140		76		117		222		257	
07:00	178	994	94	338	98	537	101	400	276	1,531	195	738
07:15	202		78		123		112		325		190	
07:30	284		84		162		89		446		173	
07:45	330		82		154		98		484		180	
08:00	300	900	54	211	112	387	73	272	412	1,287	127	483
08:15	230		51		102		68		332		119	
08:30	194		56		93		66		287		122	
08:45	176		50		80		65		256		115	
09:00	139	506	42	142	76	292	80	250	215	798	122	392
09:15	109		34		64		58		173		92	
09:30	132		35		64		56		196		91	
09:45	126		31		88		56		214		87	
10:00	110	433	42	110	80	298	74	207	190	731	116	317
10:15	104		24		74		47		178		71	
10:30	97		22		70		44		167		66	
10:45	122		22		74		42		196		64	
11:00	114	411	12	49	74	324	35	116	188	735	47	165
11:15	93		16		76		26		169		42	
11:30	102		11		76		32		178		43	
11:45	102		10		98		23		200		33	
Totals	3,990		5,103		2,246		4,880		6,236		9,983	
Split%	64.0		51.1		36.0		48.9					
Day Totals		9,093				7,126				16,219		
Day Splits		56.1				43.9						
Peak Hour	07:30		05:15		07:15		05:00		07:30		05:00	
Volume	1,144		836		551		664		1,674		1,497	
Factor	0.87		0.88		0.85		0.87		0.86		0.88	

Data File : D1909064

Tuesday, September 24, 2019 CITY: Santa Ana PROJECT: SC

ADT219 SANTA CLARA AVE from TUSTIN AVE to NEWPORT FWY. **Prepared by AimTD tel. 714 253 7888**

AM Period	NB	SB	EB		WB			PM Period	NB	SB	EB		WB		
0:00			10		7			12:00			68		47		
0:15			7		6			12:15			50		33		
0:30			3		0			12:30			72		51		
0:45			0	20	0	13	33	12:45			80	270	67	198	468
1:00			2		2			13:00			80		45		
1:15			4		0			13:15			69		66		
1:30			2		2			13:30			59		53		
1:45			2	10	4	8	18	13:45			52	260	87	251	511
2:00			3		3			14:00			58		64		
2:15			3		2			14:15			61		55		
2:30			0		2			14:30			110		72		
2:45			2	8	0	7	15	14:45			85	314	99	290	604
3:00			0		0			15:00			88		94		
3:15			0		2			15:15			85		76		
3:30			0		4			15:30			84		87		
3:45			0	0	4	10	10	15:45			58	315	77	334	649
4:00			0		2			16:00			82		64		
4:15			6		2			16:15			85		79		
4:30			0		5			16:30			88		96		
4:45			0	6	2	11	17	16:45			94	349	85	324	673
5:00			8		7			17:00			90		106		
5:15			9		13			17:15			111		118		
5:30			8		14			17:30			106		106		
5:45			9	34	15	49	83	17:45			87	394	108	438	832
6:00			11		13			18:00			94		81		
6:15			46		30			18:15			86		88		
6:30			55		43			18:30			72		80		
6:45			47	159	55	141	300	18:45			58	310	56	305	615
7:00			63		50			19:00			55		53		
7:15			151		76			19:15			48		46		
7:30			137		106			19:30			53		34		
7:45			130	481	116	348	829	19:45			46	202	41	174	376
8:00			106		122			20:00			51		41		
8:15			57		100			20:15			45		35		
8:30			52		72			20:30			45		31		
8:45			72	287	54	348	635	20:45			25	166	21	128	294
9:00			63		56			21:00			30		20		
9:15			67		53			21:15			27		25		
9:30			45		45			21:30			21		11		
9:45			45	220	47	201	421	21:45			27	105	18	74	179
10:00			35		44			22:00			26		22		
10:15			54		37			22:15			26		12		
10:30			46		35			22:30			18		11		
10:45			50	185	44	160	345	22:45			16	86	9	54	140
11:00			51		39			23:00			14		12		
11:15			49		41			23:15			10		5		
11:30			49		38			23:30			10		7		
11:45			58	207	38	156	363	23:45			10	44	5	29	73
Total Vol.				1617		1452	**3069**					2815		2599	**5414**

Daily Totals

NB	SB	EB	WB	**Combined**
		4432	4051	**8483**

	AM			**PM**		
Split %	52.7%	47.3%	**36.2%**	52.0%	48.0%	**63.8%**
Peak Hour	7:15	7:30	**7:15**	16:45	17:00	**17:00**
Volume	524	444	**944**	401	438	**832**
P.H.F.	0.87	0.91	**0.96**	0.90	0.93	**0.91**

cs@aimtd.com Tell. 714 253 7888

Transportation Studies, Inc.
2640 Walnut Avenue, Suite L
Tustin, CA. 92780

Attachment 8

Location : HARBOR BOULEVARD
Segment : EDINGER AVE TO MCFADDEN AVE
Client : CITY SANTA ANA

Site: SANTA ANA
Date: 10/03/19
Day: Thursday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	78	242	302	1,224	47	169	327	1,319	125	411	629	2,543
12:15	70		304		42		322		112		626	
12:30	46		316		45		312		91		628	
12:45	48		302		35		358		83		660	
01:00	72	160	328	1,382	27	98	286	1,272	99	258	614	2,654
01:15	36		326		25		308		61		634	
01:30	34		344		18		337		52		681	
01:45	18		384		28		341		46		725	
02:00	51	134	384	1,766	19	93	334	1,445	70	227	718	3,211
02:15	26		439		18		363		44		802	
02:30	29		426		34		350		63		776	
02:45	28		517		22		398		50		915	
03:00	35	113	508	2,114	28	234	295	1,197	63	347	803	3,311
03:15	27		548		42		311		69		859	
03:30	26		516		56		298		82		814	
03:45	25		542		108		293		133		835	
04:00	50	162	532	2,086	47	467	282	1,184	97	629	814	3,270
04:15	26		526		86		300		112		826	
04:30	42		520		138		296		180		816	
04:45	44		508		196		306		240		814	
05:00	60	312	541	2,221	168	973	332	1,307	228	1,285	873	3,528
05:15	73		561		198		324		271		885	
05:30	80		555		269		355		349		910	
05:45	99		564		338		296		437		860	
06:00	122	567	518	1,962	273	1,658	298	1,133	395	2,225	816	3,095
06:15	118		556		319		283		437		839	
06:30	154		478		480		268		634		746	
06:45	173		410		586		284		759		694	
07:00	200	1,001	402	1,431	572	2,472	268	1,013	772	3,473	670	2,444
07:15	224		394		612		262		836		656	
07:30	272		330		640		259		912		589	
07:45	305		305		648		224		953		529	
08:00	348	1,146	264	1,026	586	2,128	220	817	934	3,274	484	1,843
08:15	282		268		522		209		804		477	
08:30	248		272		520		222		768		494	
08:45	268		222		500		166		768		388	
09:00	228	945	197	777	444	1,714	184	626	672	2,659	381	1,403
09:15	216		204		427		156		643		360	
09:30	265		200		406		150		671		350	
09:45	236		176		437		136		673		312	
10:00	262	1,075	194	654	332	1,362	153	435	594	2,437	347	1,089
10:15	269		170		320		105		589		275	
10:30	276		166		352		101		628		267	
10:45	268		124		358		76		626		200	
11:00	290	1,193	107	455	306	1,189	98	340	596	2,382	205	795
11:15	303		94		253		80		556		174	
11:30	306		139		340		78		646		217	
11:45	294		115		290		84		584		199	
Totals	7,050		17,098		12,557		12,088		19,607		29,186	
Split%	36.0		58.6		64.0		41.4					
Day Totals		24,148				24,645				48,793		
Day Splits		49.5				50.5						
Peak Hour	07:30		05:00		07:15		02:00		07:15		05:00	
Volume	1,207		2,221		2,486		1,445		3,635		3,528	
Factor	0.87		0.98		0.96		0.91		0.95		0.97	

Data File : D1909136

Transportation Studies, Inc.

2640 Walnut Avenue, Suite L

Tustin, CA. 92780

Attachment 8

Location : HARBOR BOULEVARD

Segment : WARNER TO SANTA ANA RIVER

Client : CITY SANTA ANA

Site: SANTA ANA

Date: 10/09/19

Day: Wednesday

Interval	NB				SB				Combined			
Begin	AM		PM		AM		PM		AM		PM	
12:00	74	265	359	1,359	42	128	330	1,343	116	393	689	2,702
12:15	58		330		30		332		88		662	
12:30	63		318		32		357		95		675	
12:45	70		352		24		324		94		676	
01:00	68	204	328	1,473	14	71	333	1,305	82	275	661	2,778
01:15	49		350		12		328		61		678	
01:30	50		390		24		336		74		726	
01:45	37		405		21		308		58		713	
02:00	52	156	494	1,931	30	115	400	1,374	82	271	894	3,305
02:15	34		428		24		324		58		752	
02:30	49		496		30		341		79		837	
02:45	21		513		31		309		52		822	
03:00	37	110	604	2,356	24	229	291	1,175	61	339	895	3,531
03:15	16		533		47		288		63		821	
03:30	29		631		50		300		79		931	
03:45	28		588		108		296		136		884	
04:00	43	149	626	2,489	66	569	237	995	109	718	863	3,484
04:15	24		604		91		237		115		841	
04:30	36		619		164		258		200		877	
04:45	46		640		248		263		294		903	
05:00	48	270	672	2,625	184	1,200	290	1,012	232	1,470	962	3,637
05:15	78		655		241		250		319		905	
05:30	66		624		339		234		405		858	
05:45	78		674		436		238		514		912	
06:00	90	456	584	2,265	338	1,964	236	960	428	2,420	820	3,225
06:15	90		628		420		258		510		886	
06:30	140		549		456		232		596		781	
06:45	136		504		750		234		886		738	
07:00	202	1,014	406	1,437	628	3,573	190	712	830	4,587	596	2,149
07:15	204		384		1,000		191		1,204		575	
07:30	272		340		974		176		1,246		516	
07:45	336		307		971		155		1,307		462	
08:00	274	970	246	925	1,004	3,226	144	598	1,278	4,196	390	1,523
08:15	220		231		703		158		923		389	
08:30	237		218		714		170		951		388	
08:45	239		230		805		126		1,044		356	
09:00	228	928	201	797	759	2,203	112	515	987	3,131	313	1,312
09:15	231		207		562		170		793		377	
09:30	243		187		430		132		673		319	
09:45	226		202		452		101		678		303	
10:00	255	998	238	729	370	1,366	96	300	625	2,364	334	1,029
10:15	228		174		332		66		560		240	
10:30	262		159		314		80		576		239	
10:45	253		158		350		58		603		216	
11:00	261	1,131	148	497	332	1,171	54	207	593	2,302	202	704
11:15	308		142		284		60		592		202	
11:30	260		128		277		46		537		174	
11:45	302		79		278		47		580		126	
Totals	6,651		18,883		15,815		10,496		22,466		29,379	
Split%	29.6		64.3		70.4		35.7					
Day Totals		25,534				26,311				51,845		
Day Splits		49.3				50.7						
Peak Hour	11:00		05:00		07:15		02:00		07:15		04:30	
Volume	1,131		2,625		3,949		1,374		5,035		3,647	
Factor	0.92		0.97		0.98		0.86		0.96		0.95	

Data File : D1909135

IBI GROUP
18401 Von Karman Avenue – Suite 300
Irvine CA 92612 USA
tel 949 833 5588 fax 949 833 5511
ibigroup.com

Technical Memorandum

To/Attention	City of Santa Ana	**Date**	October 22, 2020
From	IBI Group	**Project No**	119772
cc			
Subject	Addendum to Santa Ana General Plan Traffic Impact Study		

Overview

This memo serves as an addendum to the Traffic Impact Study (October 2020) prepared in support of the Santa Ana General Plan Update Environmental Impact Report (EIR). Presented in this memo is the analysis for ten (10) additional study intersections identified by the City of Tustin and Orange County Transportation Authority (OCTA) as locations where impacts may occur due to the project. The study intersections are listed below are shown in Exhibit A attached to this memo.

106. Red Hill Avenue and El Camino Real (City of Tustin)
107. Red Hill Avenue and I-5 NB Ramps (City of Tustin)
108. Red Hill Avenue and I-5 SB Ramps (City of Tustin)
109. Red Hill Avenue and Nisson Road (City of Tustin)
110. Red Hill Avenue and Walnut Avenue (City of Tustin)
111. Red Hill Avenue and Valencia Avenue (City of Tustin)
112. Tustin Ranch Road and Warner Avenue North (City of Tustin)
113. Tustin Ranch Road and Walnut Avenue (City of Tustin)
114. SR-55 SB Ramps and Irvine Boulevard (Orange County CMP)
115. SR-55 NB Ramps and Irvine Boulevard (Orange County CMP)

This analysis follows the methodology outlined in the Traffic Impact Study (October 2020). Intersection level of service (LOS) analyses were conducted for the Existing Year (2020) No Project, Future Year (2045) No Project, and Future Year (2045) With Project scenarios. Significant impacts were assessed for the year 2045 scenarios using the impact criteria of the presiding agency.

Existing Year (2020) No Project

A summary of the AM and PM peak hour level of service analysis results for the Existing Year (2020) No Project condition is provided in Table 1. Intersections are considered unacceptable if the level of service (LOS) is “E” or “F”. It should be noted that Caltrans and OC CMP intersections have a minimum LOS of C and E, respectively. The following intersections are forecast to operate at an unacceptable level of service in the Existing Year (2020) No Project condition:

- INT 113 – Tustin Ranch Road and Walnut Avenue (City of Tustin)

Table 1: Existing Year (2020) No Project Intersection LOS Summary

ID	INTERSECTION	AM		PM	
		V/C or Delay	LOS	V/C or Delay	LOS
106	Red Hill Avenue and El Camino Real	0.71	C	0.62	B
107	Red Hill Avenue and I-5 NB Ramps	20.3	C	23.3	C
108	Red Hill Avenue and I-5 SB Ramps	22.0	C	22.8	C
109	Red Hill Avenue and Nisson Road	0.65	B	0.70	B
110	Red Hill Avenue and Walnut Avenue	0.68	B	0.79	C
111	Red Hill Avenue and Valencia Avenue	0.54	A	0.55	A
112	Tustin Ranch Road and Warner Avenue North	0.43	A	0.76	C
113	Tustin Ranch Road and Walnut Avenue	1.19	F	1.63	F
114	SR-55 SB Ramps and Irvine Boulevard	0.97	E	0.79	C
115	SR-55 NB Ramps and Irvine Boulevard	0.80	C	0.81	D

Notes: (1) LOS – Level of Service; (2) V/C – Volume to Capacity

Future Year (2045) No Project

A summary of the AM and PM peak hour level of service analysis results for the Future Year (2045) No Project condition is provided in Table 2. Intersections are considered unacceptable if the level of service (LOS) is “E” or “F”. It should be noted that Caltrans and OC CMP intersections have a minimum LOS of C and E, respectively. The following intersections are forecast to operate at an unacceptable level of service in the Future Year (2045) No Project condition:

- INT 113 – Tustin Ranch Road and Walnut Avenue (City of Tustin)
- INT 114 – SR-55 SB Ramps and Irvine Boulevard (Caltrans - CMP)

Table 2: Future Year (2045) No Project Intersection LOS Summary

ID	INTERSECTION	AM		PM	
		V/C or Delay	LOS	V/C or Delay	LOS
106	Red Hill Avenue and El Camino Real	0.65	B	0.78	C
107	Red Hill Avenue and I-5 NB Ramps	20.8	C	23.7	C
108	Red Hill Avenue and I-5 SB Ramps	23.7	C	22.2	C
109	Red Hill Avenue and Nisson Road	0.65	B	0.69	B
110	Red Hill Avenue and Walnut Avenue	0.64	B	0.74	C
111	Red Hill Avenue and Valencia Avenue	0.65	B	0.74	C
112	Tustin Ranch Road and Warner Avenue North	0.45	A	0.89	D
113	Tustin Ranch Road and Walnut Avenue	1.27	F	1.72	F
114	SR-55 SB Ramps and Irvine Boulevard	1.10	F	0.92	E

ID	INTERSECTION	AM		PM	
		V/C or Delay	LOS	V/C or Delay	LOS
115	SR-55 NB Ramps and Irvine Boulevard	0.91	E	0.93	E

Notes: (1) LOS – Level of Service; (2) V/C – Volume to Capacity

Future Year (2045) With Project

A summary of the AM and PM peak hour level of service analysis results for the Future Year (2045) With Project condition is provided in Table 3. Intersections are considered unacceptable if the level of service (LOS) is "E" or "F". It should be noted that Caltrans and OC CMP intersections have a minimum LOS of C and E, respectively. The following intersections are forecast to operate at an unacceptable level of service in the Future Year (2045) With Project condition:

- INT 112 – Tustin Ranch Road and Warner Avenue North
- INT 113 – Tustin Ranch Road and Walnut Avenue
- INT 114 – SR-55 SB Ramps and Irvine Boulevard (Caltrans - CMP)

Table 3: Future Year (2045) With Project Intersection LOS Summary

ID	INTERSECTION	AM		PM	
		V/C or Delay	LOS	V/C or Delay	LOS
106	Red Hill Avenue and El Camino Real	0.64	B	0.70	B
107	Red Hill Avenue and I-5 NB Ramps	20.1	C	23.6	C
108	Red Hill Avenue and I-5 SB Ramps	24.7	C	21.8	C
109	Red Hill Avenue and Nisson Road	0.66	B	0.72	C
110	Red Hill Avenue and Walnut Avenue	0.64	B	0.75	C
111	Red Hill Avenue and Valencia Avenue	0.68	B	0.75	C
112	Tustin Ranch Road and Warner Avenue North	0.46	A	0.92	E
113	Tustin Ranch Road and Walnut Avenue	1.31	F	1.77	F
114	SR-55 SB Ramps and Irvine Boulevard	1.18	F	0.93	E
115	SR-55 NB Ramps and Irvine Boulevard	0.82	D	0.84	D

Intersection Impact Assessment

Intersection impacts were determined using the criteria established by the presiding agency and further evaluated in order to determine the cause for the impact. Impacts are expected to occur due to the proposed land use changes, reclassifications, or a combination of both. The impacted intersections and the cause of impact is identified below:

- **INT 112 – Tustin Ranch Road and Warner Avenue North (PM peak hour / Tustin)**
    - The impact at this intersection is expected to occur as a result of the proposed land use changes. Specific improvements to this intersection to address this identified impact are presented in Table 5. Additionally, the City of Santa Ana will contribute to improvements based on the calculated fair-share percentage presented in Table 5.
- **113 – Tustin Ranch Road and Walnut Avenue (Tustin)**
    - The worsening of LOS at this intersection is expected to occur as a result of the proposed land use changes. Specific improvements to this intersection to address this identified impact are presented in Table 5. Additionally, the City of Santa Ana will contribute to improvements based on the calculated fair-share percentage presented in Table 5.

Table 6 summarizes intersection LOS for the future year scenario, with and without the project, as well as with the improvement measures implemented. All impacts are expected to be mitigated.

IBI GROUP
18401 Von Karman Avenue – Suite 300
Irvine CA 92612 USA
tel 949 833 5588 fax 949 833 5511
ibigroup.com

Table 4: Future Year (2045) LOS Impact Summary

ID	INTERSECTION	PEAK HOUR	2045 No Project		2045 With Project		DELTA	LOS IMPACT?
			V/C or Delay	LOS	V/C or Delay	LOS		
106	Red Hill Avenue and El Camino Real	AM	0.65	B	0.64	B	-0.01	NO
		PM	0.78	C	0.70	B	-0.08	NO
107	Red Hill Avenue and I-5 NB Ramps	AM	20.8	C	20.1	C	-0.7	NO
		PM	23.7	C	23.6	C	-0.1	NO
108	Red Hill Avenue and I-5 SB Ramps	AM	23.7	C	24.7	C	1.0	NO
		PM	22.2	C	21.8	C	-0.4	NO
109	Red Hill Avenue and Nisson Road	AM	0.65	B	0.66	B	0.01	NO
		PM	0.69	B	0.72	C	0.03	NO
110	Red Hill Avenue and Walnut Avenue	AM	0.64	B	0.64	B	0.00	NO
		PM	0.74	C	0.75	C	0.01	NO
111	Red Hill Avenue and Valencia Avenue	AM	0.65	B	0.68	B	0.03	NO
		PM	0.74	C	0.75	C	0.01	NO
112	Tustin Ranch Road and Warner Avenue North	AM	0.45	A	0.46	A	0.01	NO
		PM	0.89	D	0.92	E	0.03	YES
113	Tustin Ranch Road and Walnut Avenue	AM	1.27	F	1.31	F	0.04	NO
		PM	1.72	F	1.77	F	0.05	NO
114	SR-55 SB Ramps and Irvine Boulevard	AM	1.10	F	1.18	F	0.08	NO
		PM	0.92	E	0.93	E	0.01	NO
115	SR-55 NB Ramps and Irvine Boulevard	AM	0.91	E	0.82	D	-0.09	NO
		PM	0.93	E	0.84	D	-0.09	NO

Table 5: Intersection LOS Improvement Measures

ID	INTERSECTION	IMPROVEMENT
112	Tustin Ranch Road and Warner Avenue North	• Convert single NB-RT to dual right-turn with overlap control. • Fair-Share: 29.1% (PM)
113	Tustin Ranch Road and Walnut Avenue	• Modify WB-RT to be a channelized RT. • Modify EB approach to be: 2LT, 2T, and 1RT. • Fair-Share: 84.5% (AM) / 24.0% (PM)

Table 6: Future Year (2045) With Project – Mitigated Impact Summary

ID	INTERSECTION	PEAK HOUR	2045 No Project		2045 With Project		DELTA	IMPACT?	2045 With Project – Mit.		DELTA	IMPACT?
			V/C or Delay	LOS	V/C or Delay	LOS			V/C or Delay	LOS		
112	Tustin Ranch Road and Warner Avenue North	AM	0.45	A	0.46	A	0.01	NO	0.46	A	0.01	NO
		PM	0.89	D	0.92	E	0.03	YES	0.75	C	-0.14	NO
113	Tustin Ranch Road and Walnut Avenue	AM	1.27	F	1.31	F	0.04	YES	1.18	F	-0.09	NO
		PM	1.72	F	1.77	F	0.05	YES	1.59	F	-0.13	NO

IBI GROUP
18401 Von Karman Avenue – Suite 300
Irvine CA 92612 USA
tel 949 833 5588 fax 949 833 5511
ibigroup.com

Conclusion

Ten (10) additional intersections were assessed in order to determine project-related impacts. In assessing the intersection LOS it was determined that an impact is expected to occur at one location. The impacted intersection is listed below:

- **INT 112 – Tustin Ranch Road and Warner Avenue North (PM / City of Tustin)**
    - An improvement measure was developed and proposed as part of this study; implementation of the measure is expected to improve intersection LOS and fully mitigate the impact. The fair-share contribution, based on the project's contribution to increased traffic volumes, was calculated to be 29.1% for the PM peak hour.
- **INT 113 – Tustin Ranch Road and Walnut Avenue (AM & PM / City of Tustin)**
    - An improvement measure was developed and proposed as part of this study; implementation of the measure is expected to improve intersection LOS and fully mitigate the impact. The fair-share contribution, based on the project's contribution to increased traffic volumes, was calculated to be 84.5% and 24.0% for the Am and PM peak hours, respectively.

Exhibit A - Study Intersection Locations

