


Center Front Door Was A Window

Rationale/Evidence:

- The lower window sash, along the bottom of the window assembly, was cut in the center to make room for the installation of a door frame.
- The lath and plaster was removed under the sash to make room for the door frame.
- The cuts on the lath are rough and jagged indicating they were cut subsequent to original construction.
- The footer plate was cut to accommodate the installation of the door frame and threshold.

NOTE: The door moldings were temporarily removed to expose the evidence of the modification from window to door. All moldings were reinstalled.

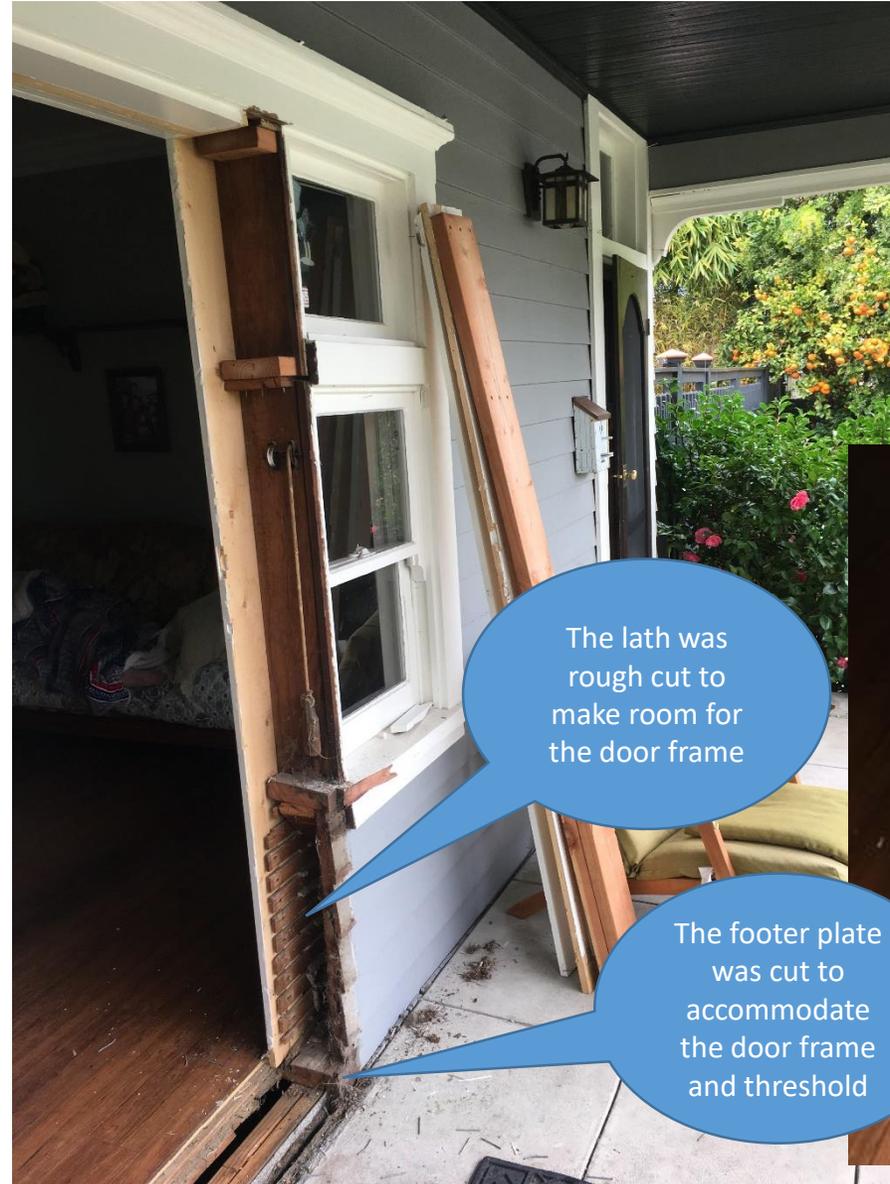

This window sash was cut to install the door frame

The lath was rough cut to make room for the door frame

The footer plate was cut to accommodate the door frame and threshold