FINAL REPORT

UPDATE OF
PAVEMENT MANAGEMENT PROGRAM
(Citywide)

2026-2033

Submitted to:

City of Orange, CA

June 3, 2026

BUCKNAM
INFRASTRUCTURE GROUP, INC

June 3, 2026

Mr. Dien Vu, P.E.
Senior Civil Engineer
City of Orange
300 E. Chapman Avenue
Orange, CA 92866

Subject: City of Orange – OCTA Pavement Management Compliance Report 2026

Dear Dien:

As part of the 2026 Update of the Pavement Management Plan (PMP) for the City of Orange, *Bucknam Infrastructure Group, Inc.* is pleased to submit the PMP reporting required by the Orange County Transportation Authority (OCTA). This data/report will be submitted to OCTA as part of the City's required biennial PMP prior to June 30, 2026.

The information contained in this report was used to develop the recommended improvement program for the pavement network. The report covers the following categories:

- **Pavement Management Plan Certification**

- **Pavement Management Plan that includes the following:**

    - **Average Pavement Conditions For Each Segment in the Network (PCI Report)**
      The Pavement Condition Index report shows the present condition of each street in the pavement network (MPAH and Locals). In addition, the report shows the basic geometry of each street segment.

    - **Seven-year Projected PCI Under Existing Funding Levels**
      This report identifies the projected PCI's based on the local agencies current funding programs. This report details the PCI projects for the entire network, MPAH roadways and Local streets.

    - **Seven-year Plan for Road Maintenance and Rehabilitation - Forecast Maintenance & Rehabilitation (FMR) Report**
      The FMR Report projects the street maintenance activities required for the next seven years, broken down to show maintenance levels for recommended streets. This includes all scheduled projects provided by the City for fiscal years 2026 through 2032.

    - **Alternative Funding Levels**
      OCTA has requested two reports indicating the necessary funding to maintain the City's current weighted average PCI as well as the necessary funding to improve the weighted average PCI by one PCI point over the next seven years.

    - **Backlog by Fiscal Year (re: unfunded restoration, rehabilitation and reconstruction)**

- **Percentage of total network in each of the five condition categories based on centerline mileage**

- **Local Match Reduction Reporting**

  In order to be eligible for Local Match Reduction of 10%, the following must be submitted:

  - Measurable improvement of paved road conditions during the previous reporting period defined as an overall weighted (by area) average system improvement of one PCI point.
  - No reduction in the overall weighted (by area) average PCI in the MPAH or local street categories

  or

  - Have road pavement conditions, for the overall network, during the previous reporting period within the highest twenty (20%) of the scale for road pavement conditions in conformance with OCTA Ordinance No. 3, defined as a PCI of 75 or higher, otherwise defined as in "good condition".

- **GIS Digital Data**

- **Quality Assurance / Quality Control (QA/QC) Plan**

- **Pavement Management Data Files (electronic Orange.e70 file format)**

- **GIS Maps / Current Conditions**

These reports will be submitted to the City of Orange as part of the biennial Pavement Management Plan that is due prior to June 30, 2026. These reports will be packaged in a way that it will be easy for staff to review.

All comments received from the City have been incorporated in the reports that follow. It has been a pleasure working with you and the City on updating your Pavement Management Plan. We look forward to the continued success of this project and future teamwork with City staff.

Sincerely,

Bucknam Infrastructure Group, Inc.

Peter J. Bucknam
Project Manager
Infrastructure Management – GIS Services

BUCKNAM
INFRASTRUCTURE GROUP, INC
3548 Seagate Way, Suite 230
Oceanside, CA 92056
T: (760) 216-6529
www.bucknam-inc.com

AGENCY SUBMITTAL TABLE OF CONTENTS

I. Pavement Management Plan Certification 2

II. Executive Summary 3

III. Background (City of Orange) 4

IV. Current Pavement Conditions (PCI) 7

V. Projected Pavement Conditions (PCI) 8

VI. Alternative Funding Levels 9
- a. Maintain Existing Average Network PCI 9
- b. Improve Average Network PCI 9

VII. Current and Projected Backlog by Year of Pavement Maintenance Needs 10

VIII. Centerline Mileage 10

IX. Percentage of Network in Each of Five Condition Categories Based on Centerline mileage 10

X. Reduction in M2 Local Match 11

XI. Appendix A – Seven-Year Road Maintenance and Rehabilitation Plan Based on Current or Expected Funding Level 12

XII. Appendix B – Complete Street Listing Current Conditions 13

XIII. Appendix C – GIS Digital Data 14

XIV. Appendix D – Quality Assurance / Quality Control Plan 16
- Introduction 16
- Objectives 16
- Structure of QA/QC Plan 16
- Condition Survey Procedures 17
- Accuracy Required for Data Collection 18
- Random and Systematic Re-Inspections 18
- PCI Comparison with Past Surveys 19
- Inspector Qualifications and Experience 19
- Safety Procedures 20

XV. Appendix E – Pavement Management Data Files 21

XVI. Appendix F – GIS Maps – Current Conditions 22

CITY OF ORANGE PAVEMENT MANAGEMENT PLAN

- part of -

COUNTYWIDE PAVEMENT MANAGEMENT PLAN GUIDELINES

(OCTA Guideline – April, 2026)

Prepared by: Bucknam Infrastructure Group, Inc.
Submitted to OCTA: June 30, 2026

I. Pavement Management Plan Certification

The City of Orange, CA certifies that it has a Pavement Management Plan in conformance with the criteria stated in the Orange County Transportation Authority Ordinance No. 3. This ordinance requires that a Pavement Management Plan be in place and maintained to qualify for allocation of revenues generated from renewed Measure M (M2).

The plan was developed by Bucknam Infrastructure Group, Inc. using MicroPAVER, a pavement management system conforming to American Society for Testing and Materials (ASTM) Standard D6433, and contains, at a minimum, the following elements:

- Inventory of MPAH and Local routes reviewed and updated biennially. The last update of the inventory was completed on April, 2026 for the Arterial (MPAH) and March, 2024 for the Local streets;
- Assessment of the pavement condition for all routes in the system, updated biennially. The last field review of the pavement condition was completed in May, 2026;
- Percentage of all section of pavement needing:
  - Preventive Maintenance = 31.1%;
  - Rehabilitation = 25.8%;
  - Reconstruction = 1.0%
- Budget needs for preventive maintenance, rehabilitation and/or reconstruction of deficient sections of pavement for:
  - Current biennial period $19,710,400;
  - following biennial period $20,805,300
- Funds budgeted or available for Preventive Maintenance, Rehabilitation and/or Reconstruction.
  - Current biennial period $18,000,000;
  - following biennial period $18,000,000
- Backlog by year of unfunded rehabilitation, restoration and reconstruction needs (See page 10);
- The Pavement Management Plan is consistent with countywide pavement condition assessment standards as described in the OCTA Countywide Pavement Management Plan Guidelines adopted by the OCTA Board of Directors.

*An electronic copy of the Pavement Management Plan (with MicroPAVER or StreetSaver compatible files) has been or will be submitted with the certification statement. A copy of this certification is being provided to the Orange County Transportation Authority.

Submitted by:

Alan Truong
Name (Print)

Signed

City Engineer
Title

City of Orange
Jurisdiction

06/15/2026
Date

II. EXECUTIVE SUMMARY

2026 UPDATE OF PAVEMENT MANAGEMENT PLAN (PMP)

As the City of Orange's infrastructure continues to mature, Public Works priorities such as Local street maintenance, Arterial rehabilitation are key projects to City staff. With the City mostly built-out, wear and tear on the infrastructure will occur at an ever increasing rate. Pavement aging through annual weathering, dynamic and static vehicle loading, and increased usage, compounded with the increased cost of performing maintenance and rehabilitation, add to the yearly operational budget of the pavement network. System sustainability can only be achieved through proactive scheduling and the implementation of cost-efficient pavement applications.

Over the past eighteen (18) years the City has been proactive in sustaining the overall condition status as well as reduce its deferred maintenance burdens. The City's overall weighted PCI is 80.7 which is just above the Orange County PCI average of 79. The optimal goal for the City is to reach the industry standard PCI range that is between 82 to 84. Funding the Orange PMP over the next seven years will be manageable and achievable based on city management proactivity, frequent inspections, and biennial budgetary review.

In the upcoming years as the City continues to build upon this study through future inspections and maintenance work history, annual pavement data will continue to provide reliable data. This will enhance the PMP through detailed Orange County Transportation Authority (OCTA) OC Go funding analysis, City specific budgetary reporting and level of service reporting.

The Orange PMP has been developed to assist City personnel by providing current data on the City's street network and to develop cost-effective maintenance strategies to maintain a desirable level of pavement performance on a network scale, while optimizing the expenditure of limited fiscal resources. The project consisted of analyzing the City's 2024 dataset for quality and usability. In doing this, we were tasked to generate an updated Capital Improvement Program report that identified recommendations and deficiencies in the current operating and maintenance efforts put forth by the City.

We surveyed all designated arterial, collector (MPAH) routes this past spring to assist the City in being compliant with OCTA – Measure M2 April, 2026 guidelines; Local and Alley section deterioration and improvement were also assessed through this year's project. Additionally, we updated the City's unique Pavement Management – GIS layer that will continue to assist the City in analyzing pavement conditions and other attribute information through the use of MyRoads® and ESRI ArcGIS.

Bucknam Infrastructure Group reviewed the City's previous maintenance efforts and the proposed 2026-27 street improvements for pertinent pavement information in order to generate a CIP report that identified recommendations and opportunities for improvement in the current operating and maintenance efforts put forth by the City. The impact of increasing AC/PCC construction projects was assessed through this effort and shown within our unit costs for slurry, overlay and reconstruction recommendations (Appendix A). Higher application costs impact the amount and volume of projects that can be constructed annually. These impacts / results our demonstrated within this report.

III. BACKGROUND – (CITY OF ORANGE)

In late 1990, voters throughout Orange County approved Measure M, a ½-cent sales tax for transportation improvements known as OC Go, formerly known as Measure M2. Funding for streets and roads are included within the sales tax and are distributed to locals agencies through both formula and a competitive method. In late 2006, the renewal of M2, (now known as OC Go) was approved by voters that would continue the ½-cent sales tax for thirty additional years, starting in 2011.

The primary goal of this report is to comply with established guidelines from OCTA to ensure that field data collection and reporting efforts performed by outside consultants or local agency staff are consistent. This is required in order that funding allocations can be reviewed and based on agency comparable pavement conditions. Specifically, our findings and recommendations provide Public Works administrators, managers and field personnel with:

- PMP reports consistent with OCTA OC Go guidelines
- the present condition status of the pavement network (arterial, collector, residential and industrial streets), as a whole and of any grouping or individual component within the City;
- a ranked list of all streets, or segments of streets, by condition within the network;
- rehabilitation/maintenance needs of each street segment by year;
- an optimized priority maintenance and rehabilitation program based on cost/benefit analysis and various levels of funding;
- optimum annual pavement expenditure levels for pavement maintenance for the next seven (7) years;
- prediction of the life-cycle performance of the City's pavement network and each individual street section; and
- pavement condition data and analysis presented in GIS through MyRoads® and ESRI ArcGIS

Pavement is a dynamic structure where deterioration is constantly occurring; thus the pavement management system needs to be updated on a regular basis to reflect these changes in pavement conditions, pavement maintenance histories, and maintenance strategies based upon budgetary constraints. In our approach to develop the City's forecast maintenance recommendations we worked with Orange staff in identifying unit costs for all maintenance practices used on an annual basis (these not only included the material costs but contingency costs for design and ADA improvements).

Currently, based upon the City's maintenance practices and their associated unit costs, the total replacement value of the Orange pavement network is $1,440,962,200. This value clearly indicates that the City's pavement network is the most valuable and essential asset to Orange. The City's use of slurry seal, AC Overlay and R&R practices are typically applied depending on the street conditions and available funding. The City may see increases in deterioration rates due to environmental, load and high average daily traffic (ADT) volumes. For example, high ADT volumes along one of Orange's arterial streets will increase deterioration rates for a previously applied AC Overlay compared to a small local street. These deterioration rates are monitored through frequent inspections and functional class deterioration analysis within the City's PMP database.

FINDINGS AND RECOMMENDATIONS

Through our assessment of historical maintenance performed within the City and through our discussions with City staff the conditional data found across the network shows that the City has applied flexible preventative maintenance strategies over the past decade. Pavement management involves frequent preventative maintenance; as pavement deteriorates through heavy traffic impacts, weathering and time, preventative maintenances (such as slurry seal, stop gap, etc.) have limited benefits. Our study has shown that key MPAH and local overlay projects will be needed over the next seven years to maintain the network's high level of condition.

Currently, the City's two major streets networks (Local & Arterial) hold high weighted PCI values; it is our recommendation that a proactive, common sense overlay program be assessed and scheduled over the next several fiscal years. This will ensure that the citywide weighted PCI will sustain itself and allow for routine slurry seal maintenance to continue. Through our analysis of the Orange PMP we have found and recommend the following items which should be considered for a proactive approach to the PMP and future management of the program:

ARTERIAL / COLLECTOR (MPAH) FINDINGS AND RECOMMENDATIONS

The recent 2026 MPAH inspections and PCI results have indicated that the Orange MPAH network is currently in "Good" condition (weighted avg. PCI of 78.4. The City has been able to maintain the PCI in good condition and continues to apply routine maintenance. To maintain this condition, it is critical that preventive maintenance and overlay activities are funded at the levels identified on page 9 due to escalation of construction costs and its corresponding spreadsheet reports to maintain a "Good" network weighted average PCI value.

Our MPAH findings for conditional data and recommendations for revenue expenditures are shown below:

- The MPAH network has a weighted PCI of 78.4;
- The MPAH network consists of 95.9 miles and 29,615,468 SF of pavement;
- Currently, 45% of the Arterial network (42.8 miles) qualify for slurry seal maintenance while 24% (22.9 miles) qualifies for rehabilitation/reconstruction;
- To maintain the City's Arterial PCI of 78.4, the citywide seven (7) year maintenance/rehabilitation budget allocations, shown on Page 9 - $69.4 million (VI. Maintain PCI table), require an overall $2.7 million increase or an average $385,700 annual investment;
    - Fund the MPAH revenues at a $4,266,400/yr level for the seven year term of the CIP to generate the results shown on the Maintain PCI table (page 9);
- To increase the Arterial PCI from 78.4 to 79.6 the seven (7) year maintenance/rehabilitation budget allocations, shown on Page 9 - $72.8 million (VI. Increase PCI table), require an overall $6.0 million increase or an average $857k annual investment;

  - Under this budget model, the citywide deferred backlog decreases from a level of $43.7 million to $29.4 million after seven years;

- Perform pavement inspections on the MPAH network every two years to continue the City's solid planning model within MicroPAVER to track PCI deterioration; also follows new OCTA guidelines for Measure M2.

LOCAL FINDINGS AND RECOMMENDATIONS

Our PCI calculations have indicated that the Orange Local network is currently in "Good" condition (weighted avg. PCI of 82.4, based on last inspection dates and work history events). The City has been able to maintain the PCI in good condition category and continues to apply routine maintenance which has stabilized conditions at mid-80's PCI level. At a minimum, to maintain this condition, it is critical that preventive maintenance and overlay activities are funded at the levels identified on page 9 and its corresponding spreadsheet reports to maintain a "Good" network weighted average PCI value.

Our Local network findings for conditional data and recommendations for revenue expenditures are shown below:

- The Local network has a weighted PCI of 82.4;

- The Local network consists of 222.8 miles and 39,467,321 SF of pavement;

- Currently, 33% of the Local network (74.2 miles) qualify for slurry seal maintenance while 28% (62.5 miles) qualifies for rehabilitation/reconstruction;

- To maintain the City's Local PCI of 82.4, the citywide seven (7) year maintenance/rehabilitation budget allocations, shown on Page 9 - $69.5 million (VI. Maintain PCI table), require an overall $2.7 million increase or an average $385,700 annual investment;

  - Fund the Locals revenues at a $5,655,500/yr level for the seven year term of the CIP to generate the results shown on the Maintain PCI table (page 9);

- To increase the Local PCI from 82.4 to 83.2 the seven (7) year maintenance/rehabilitation budget allocations, shown on Page 9 - $72.8 million (VI. Increase PCI table), require an overall $6.0 million increase or an average $857k annual investment;

  - Under this budget model, the citywide deferred backlog decreases from a level of $43.7 million to $29.4 million after seven years;

- Perform pavement inspections on the Local network every two years to continue the City's solid planning model within MicroPAVER to track PCI deterioration; also follows new OCTA guidelines for Measure M2.

IV. CURRENT PAVEMENT CONDITIONS (PCI)

Rank	Mileage	SF	2026 PCI	2024 PCI	2022 PCI	2020 PCI	2018 PCI	2016 PCI	2014 PCI	2012 PCI	2010 PCI	2008 PCI
Arterial/Collector	95.9	29,615,468	78.4	81.6	82.0	81.9	81.0	76.4	73.8	72.0	69.0	62.5
Locals	222.8	39,467,321	82.4	80.3	84.3	79.7	80.0	79.9	77.1	75.6	75.1	67.1
Citywide	318.7	69,082,789	80.7	80.9	83.3	80.6	80.0	78.0	75.0	74.1	72.6	64.0

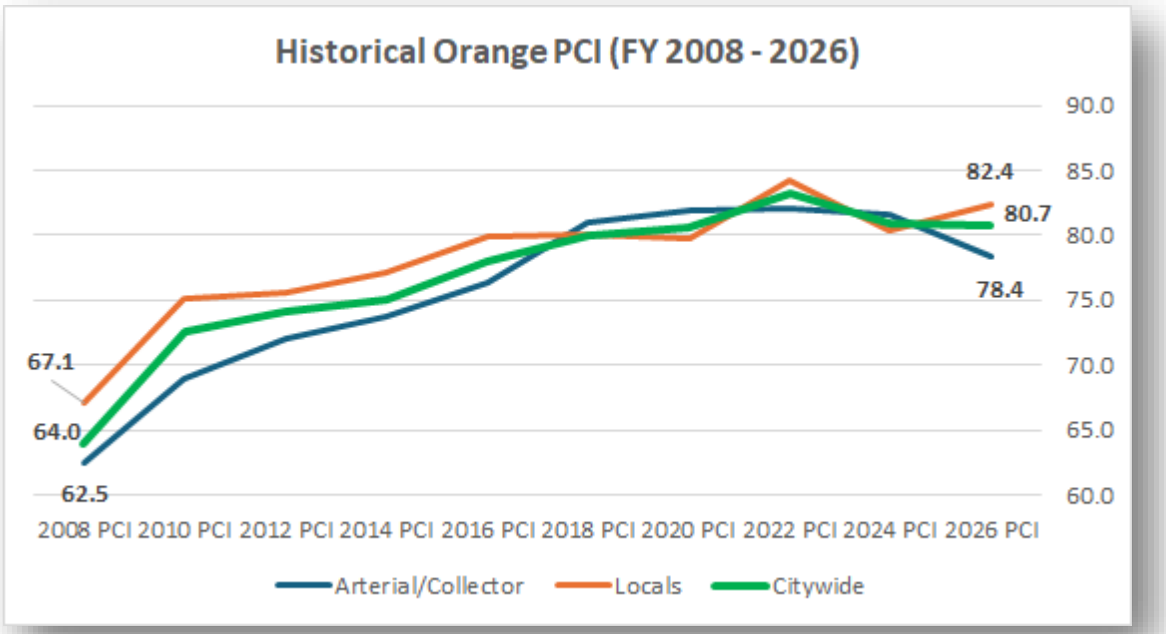

Condition	PCI Range	Art / Coll	Local	Total	% of Network
Very Good	86-100	27.5	106.5	134.0	42.0%
Good	75-85	30.7	68.5	99.2	31.1%
Fair	60-74	30.8	32.0	62.8	19.7%
Poor	41-59	6.5	12.9	19.4	6.1%
Very Poor	0-40	0.4	2.9	3.3	1.0%
		95.9	222.8	318.7	

V. PROJECTED PAVEMENT CONDITIONS (PCI)

Fiscal Year	Current Funding	Network PCI	MPAH PCI	Local PCI
Today		**80.7**	**78.4**	**82.4**
2026-27	$9,000,000	81.9	79.4	83.1
2027-28	$9,000,000	80.6	78.8	82.1
2028-29	$9,000,000	78.9	78.2	80.7
2029-30	$9,000,000	77.9	77.0	78.8
2030-31	$9,000,000	76.7	76.0	78.1
2031-32	$9,000,000	76.2	74.6	77.0
2032-33	$9,000,000	74.9	74.0	75.8
Total	$63,000,000			

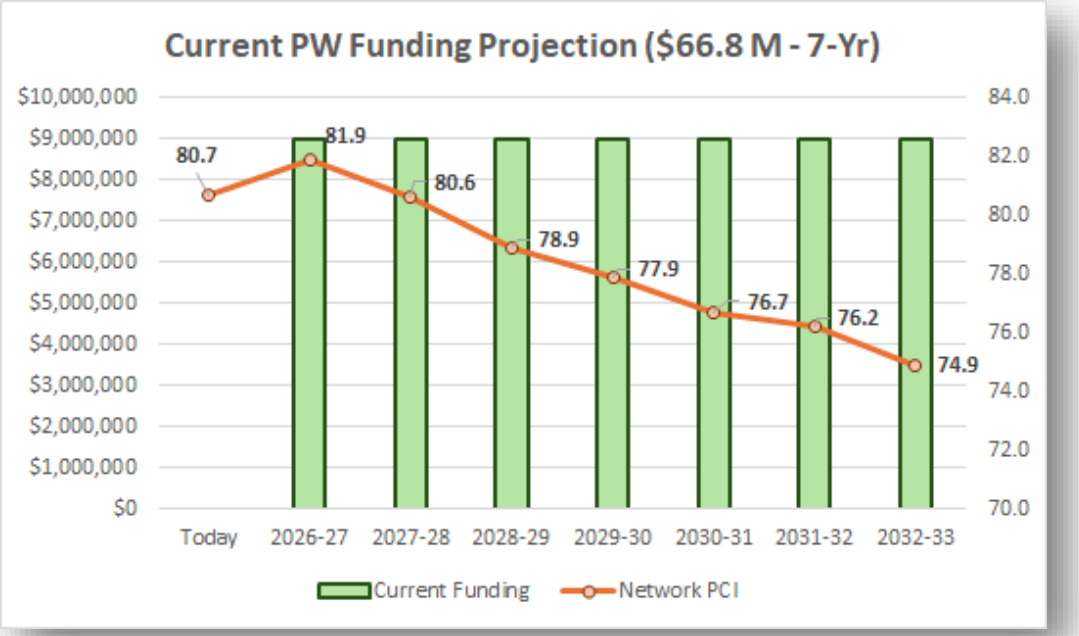

VI. ALTERNATIVE FUNDING LEVELS

Maintain Existing Average Network PCI

Fiscal Year	Maintain PCI Funding	Network PCI	MPAH PCI	Local PCI
Today		**80.7**	**78.4**	**82.4**
2026-27	$9,545,000	82.0	79.6	83.5
2027-28	$9,545,000	81.0	79.0	82.4
2028-29	$9,545,000	80.6	78.7	82.1
2029-30	$10,080,900	80.9	79.2	82.6
2030-31	$10,156,400	80.9	79.1	82.8
2031-32	$10,266,300	80.7	78.8	82.7
2032-33	$10,315,000	80.6	78.5	82.4
Total	**$69,453,600**			

Improve Average Network PCI

Fiscal Year	Increase PCI Funding	Network PCI	MPAH PCI	Local PCI
Today		**80.7**	**78.4**	**82.4**
2026-27	$9,545,000	82.0	79.6	83.5
2027-28	$10,165,400	82.1	79.8	83.6
2028-29	$10,305,400	82.0	79.6	84.0
2029-30	$10,499,900	82.1	79.8	84.0
2030-31	$10,660,100	82.6	80.3	84.2
2031-32	$10,717,200	82.0	79.8	83.5
2032-33	$10,936,600	81.9	79.6	83.2
Total	**$72,829,600**			

VII. CURRENT AND PROJECTED BACKLOG BY YEAR OF PAVEMENT MAINTENANCE NEEDS

DEFERRED MAINTENANCE

Delaying repairs on streets where pavement conditions indicate a need generates deferred maintenance or "backlog". Deferred maintenance is work that is postponed to a future budget cycle, or until funds are available. As maintenance is deferred, the opportunity to apply preventive, life extending pavement treatments is forfeited and the ultimate cost of rehabilitation multiplies (i.e. slurry seal costs to overlay costs). By using the City's pavement maintenance applications and their associated unit costs, when a budgetary model is exercised within the PMP software the amount of deferred maintenance is calculated. Based upon the available budget applied to the model, deferred maintenance will increase or decrease.

As maintenance is deferred, the opportunity to apply life extending preventive pavement applications is lost and the ultimate cost of rehabilitation multiplies.

In the case of Orange, the City's current funding budgets through FY 2032-33 will continue to increase the amount of deferred maintenance on the network to $48.6 million levels by FY 2032.

Plan Year	Current Funding Backlog	Maintain PCI Backlog	Increase PCI Backlog
Current	$43,677,400	$43,677,400	$43,677,400
2026-27	$44,289,700	$44,734,800	$44,734,800
2027-28	$46,416,600	$45,940,100	$44,020,500
2028-29	$46,511,200	$45,937,400	$43,641,100
2029-30	$46,812,200	$40,495,500	$38,535,600
2030-31	$46,987,300	$37,293,300	$32,988,400
2031-32	$47,814,500	$36,355,100	$30,655,200
2032-33	$48,626,700	$36,578,200	$29,422,100

However, the projected increase in deferred maintenance assumes the construction costs do not continue to escalate as the City has experienced in the past several years.

VIII. CENTERLINE MILEAGE

Rank	Mileage	SF	2026 PCI
Arterial/Collector	95.9	29,615,468	78.4
Locals	222.8	39,467,321	82.4
Citywide	318.7	69,082,789	80.7

IX. PERCENTAGE OF NETWORK IN EACH OF FIVE CONDITION CATEGORIES BASED ON CENTERLINE MILES

Condition	PCI Range	Network	Percent Area of Total Pavement	Area of Pavement (SF)	Percent Centerline Mi. of Network	Centerline Mileage of Network
Very Good	(86-100)	MPAH	11.9%	8,234,478	8.6%	27.5
		Local	23.3%	18,639,797	28.9%	106.5
Good	(75-85)	MPAH	14.0%	9,652,859	9.6%	30.7
		Local	17.5%	12,090,240	21.5%	68.5
Fair	(60-74)	MPAH	14.1%	9,726,139	9.7%	30.8
		Local	8.2%	5,693,891	10.0%	32.0
Poor	(41-59)	MPAH	2.7%	1,884,743	2.0%	6.5
		Local	3.6%	2,474,680	4.0%	12.9
Very Poor	(0-40)	MPAH	0.2%	117,249	0.1%	0.4
		Local	0.8%	568,713	0.9%	2.9
				69,082,789		318.7

X. REDUCTION IN M2 LOCAL MATCH

A local agency match reduction of 10% of the eligible cost for projects submitted for consideration of funding through the M2 Comprehensive Transportation Funding Programs (CTFP) call for projects is available if the local agency either:

a. Shows measurable improvement of paved road conditions during the previous reporting period defined as an overall weighted (by area) average system improvement of one Pavement Condition Index (PCI) point with no reduction in the overall weighted (by area) average PCI in the Master Plan of Arterial Highways (MPAH) or local categories:

or

b. Have road pavement conditions during the previous reporting period, within the highest 20% of the scale for road pavement conditions in conformance with OCTA Ordinance No. 3, defined as a PCI of 75 or higher, otherwise defined as in "good condition".

Road conditions found through our 2026 PMP management study shows that the City <u>is eligible</u> for Local Match Reduction based on the current network weighted PCI of 80.7. Additionally, the City of Orange has demonstrated with the enclosed budget projection (Section V, page 8) that the City's weighted average PCI (by area) remains above a PCI of 75 after the seven year program.

XI. APPENDIX A – SEVEN YEAR ROAD MAINTENANCE AND REHABILITATION PLAN BASED ON CURRENT OR EXPECTED FUNDING LEVEL

FY	BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
			Arterial / Collector (MPAH)														
2026-27	64	2192	Almond Avenue	Batavia Street	Cypress Street	AC	C	2	1,660	39	60,471	65	37	50	13	AC Grind - Overlay	$392,457
2026-27	705	300	Main Street	Taft Avenue	1170' n/o Katella Avenue	AAC	B	4	1,170	80	89,778	59	45	45	10	AC Grind - Overlay	$582,659
2026-27	791	444	Nohl Ranch Road	Maple Tree Street	Fernhill Lane	AC	B	2	1,270	48	55,061	75	27	49	24	Type II Slurry Seal	$41,846
2026-27	944	675	Riverdale Avenue	Glassell Street	Hearthside Street	AAC	B	4	1,070	60	65,006	55	35	56	9	AC Grind - Overlay	$421,889
2026-27	944	676	Riverdale Avenue	Hearthside Street	Beechwood Street	AAC	B	4	900	60	50,953	49	38	54	8	AC Grind - Overlay	$330,685
2026-27	944	677	Riverdale Avenue	Beechwood Street	Orange-Olive Road	AAC	B	4	1,100	60	60,543	47	36	64	0	AC Grind - Overlay	$392,924
2026-27	944	678	Riverdale Avenue	Orange-Olive Road	455' e/o Orange-Olive Road	AAC	B	4	455	60	26,855	78	35	65	0	Type II Slurry Seal	$20,410
2026-27	944	679	Riverdale Avenue	445' e/o Orange-Olive Road	City Limit	AAC	B	4	1,735	48	90,978	74	27	62	11	Type II Slurry Seal	$69,143
2026-27	1186	1258	Walnut Avenue	Prospect Street	West End	AC	C	2	445	32	17,149	63	0	100	0	AC Grind - Overlay	$111,297
																	$2,363,310
2027-28	147	183	Bond Avenue	Prospect Street	Gravier Street	AC	B	4	185	48	8,220	85	0	100	0	Type II Slurry Seal	$6,494
2027-28	147	185	Bond Avenue	Gravier Street	Little Lane	AC	B	2	1,680	42	66,954	81	7	85	8	Type II Slurry Seal	$52,894
2027-28	147	186	Bond Avenue	Little Lane	440' E Little Lane	AC	B	4	440	42	16,969	79	0	84	16	Type II Slurry Seal	$13,406
2027-28	203	221	Cambridge Street	La Veta Avenue	City Limit	AAC	C	2	1,120	60	75,217	80	0	97	3	Type II Slurry Seal	$59,421
2027-28	203	223	Cambridge Street	Palmyra Avenue	La Veta Avenue	AAC	C	2	1,345	60	71,372	69	19	81	0	Type II Slurry Seal	$56,384
2027-28	203	224	Cambridge Street	Chapman Avenue	Palmyra Avenue	AC	C	2	1,305	30	44,784	72	0	100	0	Type II Slurry Seal	$35,379
2027-28	203	226	Cambridge Street	Walnut Avenue	Sycamore Avenue	AC	C	2	635	40	25,280	55	63	12	25	Grind - ARHM Overlay	$170,640
2027-28	203	231	Cambridge Street	Trenton Avenue	Katella Avenue	AAC	B	4	980	60	64,385	56	21	78	1	AC Grind - Overlay	$434,599
2027-28	203	232	Cambridge Street	Taft Avenue	Trenton Avenue	AAC	B	4	1,385	60	79,804	53	17	76	7	AC Grind - Overlay	$538,677
2027-28	203	233	Cambridge Street	Briardale Avenue	Taft Avenue	AAC	B	4	320	60	28,759	76	35	51	14	Type II Slurry Seal	$22,720
2027-28	203	238	Cambridge Street	Buckeyewood Avenue	Briardale Avenue	AAC	B	4	1,225	60	68,435	84	0	98	2	Type II Slurry Seal	$54,064
2027-28	203	240	Cambridge Street	Meats Avenue	Buckeyewood Avenue	AAC	B	4	1,105	60	64,603	80	0	80	20	Type II Slurry Seal	$51,036
2027-28	203	3526	Cambridge Street	Sycamore Avenue	Palm Avenue	AC	C	2	630	34	18,445	68	13	16	71	Type II Slurry Seal	$14,572
2027-28	252	37	Chapman Avenue	Broadmoor Trail	Newport Boulevard	AAC	B	5	865	80	72,419	66	26	56	18	AC Grind - Overlay	$488,828
2027-28	500	2393	Grand Street	Maple Avenue	Chapman Avenue	PCC	C	2	605	40	23,536	66	51	21	28	PCC Repair	$10,591
2027-28	500	2400	Grand Street	Chapman Avenue	Almond Avenue	PCC	C	2	610	40	23,322	78	53	35	12	PCC Repair	$8,163
2027-28	705	302	Main Street	1170' n/o Katella Avenue	Katella Avenue	AAC	B	4	1,175	80	100,874	62	47	41	12	AC Grind - Overlay	$680,900
2027-28	705	304	Main Street	Katella Avenue	Struck Avenue	AAC	B	4	1,120	80	88,737	75	60	36	4	Type II Slurry Seal	$70,102
2027-28	705	306	Main Street	Struck Avenue	Collins Avenue	AAC	B	4	1,280	80	102,586	83	54	46	0	Type II Slurry Seal	$81,043
2027-28	705	308	Main Street	Collins Avenue	Alvarez Avenue	AAC	B	4	1,505	60	89,546	80	22	78	0	Type II Slurry Seal	$70,741
2027-28	705	310	Main Street	Alvarez Avenue	Orangewood Avenue	AAC	B	4	1,120	60	65,844	82	0	100	0	Type II Slurry Seal	$52,017
2027-28	705	313	Main Street	Orangewood Avenue	Palm Avenue	AAC	B	4	1,270	60	87,111	87	0	100	0	Type II Slurry Seal	$68,818
2027-28	705	314	Main Street	Palm Avenue	Chapman Avenue	AAC	B	4	1,375	60	95,480	82	25	45	30	Type II Slurry Seal	$75,429
2027-28	705	316	Main Street	Chapman Avenue	Palmyra Avenue	AC	B	4	1,350	60	86,958	68	8	92	0	Type II Slurry Seal	$68,697
2027-28	705	318	Main Street	Palmyra Avenue	Stewart Drive	AAC	B	5	590	60	34,286	73	21	62	17	Type II Slurry Seal	$27,086
2027-28	705	3513	Main Street	Stewart Drive	La Veta Avenue	AAC	B	5	745	60	61,963	77	0	100	0	Type II Slurry Seal	$48,951
2027-28	913	2016	Rancho Santiago Blvd	Orange Grove Avenue	35' s/o Sycamore Avenue	AC	C	2	1,525	36	54,715	55	42	50	8	AC Grind - Overlay	$369,326
2027-28	913	2017	Rancho Santiago Blvd	Condor Crest Avenue	Bond Avenue	AC	C	2	1,050	36	33,178	76	6	94	0	Type II Slurry Seal	$26,211
2027-28	913	2018	Rancho Santiago Blvd	Hewes Street	Condor Crest Avenue	AC	C	2	1,884	30	58,149	61	36	64	0	AC Grind - Overlay	$392,506
2027-28	913	3065	Rancho Santiago Blvd	Bond Avenue	Orange Grove Avenue	AAC	C	2	782	38	34,596	87	15	51	34	Type II Slurry Seal	$27,331
																	$4,077,023
2028-29	213	3512	Cannon Street	Stillwater Avenue	Chapman Avenue	AC	B	4	1,735	60	109,568	77	59	41	0	Type II Slurry Seal	$89,846
2028-29	213	3514	Cannon Street	Cerritos Drive	Patricia Ct	AAC	B	4	1,103	24	37,723	76	61	20	19	Type II Slurry Seal	$30,933
2028-29	213	3515	Cannon Street	Patricia Ct	Cerritos Drive	AAC	B	4	1,103	35	27,512	79	42	58	0	Type II Slurry Seal	$22,560
2028-29	213	3516	Cannon Street	Cerritos Drive	250' s/o San Juan Drive	AAC	B	4	495	60	14,024	73	45	55	0	Type II Slurry Seal	$11,500
2028-29	213	410	Cannon Street	Bridge	Santiago Canyon Road	AAC	B	4	1,210	75	106,893	81	21	73	6	Type II Slurry Seal	$87,652
2028-29	213	412	Cannon Street	Santiago Canyon Road	San Juan Drive	AAC	B	4	655	68	45,738	81	0	80	20	Type II Slurry Seal	$37,505
2028-29	213	413	Cannon Street	San Juan Drive	250' s/o San Juan Drive	AAC	B	4	250	60	15,260	66	0	68	32	AC Grind - Overlay	$107,125
2028-29	213	415	Cannon Street	250' s/o San Juan Drive	Cerritos Drive	AAC	B	4	495	24	15,130	73	0	42	58	Type II Slurry Seal	$12,407
2028-29	213	416	Cannon Street	Patricia Ct	Hillgrove Ct	AAC	B	4	550	60	31,884	78	0	92	8	Type II Slurry Seal	$26,145
2028-29	213	419	Cannon Street	Hillgrove Ct	Cliffway Drive	AC	B	4	2,205	60	119,792	76	0	100	0	Type II Slurry Seal	$98,229
2028-29	213	420	Cannon Street	Cliffway Drive	Creekside Avenue	AC	B	4	1,930	60	113,053	77	0	81	19	Type II Slurry Seal	$92,703
2028-29	1091	2218	Struck Avenue	Batavia Street	East End	AAC	C	2	1,170	44	53,220	65	50	45	5	AC Grind - Overlay	$373,604
2028-29	1112	2472	Taft Avenue	Sycamore Street	Yurok Street	AC	C	2	1,035	58	55,866	80	39	43	18	Type II Slurry Seal	$45,810
2028-29	1112	323	Taft Avenue	Neville Street	Glassell Street	AAC	B	4	1,280	80	101,712	58	42	44	14	AC Grind - Overlay	$714,018
2028-29	1112	325	Taft Avenue	Batavia Street	Neville Street	AAC	B	4	1,485	80	109,148	65	28	47	25	AC Grind - Overlay	$766,219
2028-29	1112	327	Taft Avenue	Main Street	Batavia Street	AC	B	4	1,540	80	125,081	65	57	41	2	AC Grind - Overlay	$878,069
2028-29	1112	328	Taft Avenue	600' w/o Main Street	Main Street	AAC	B	4	600	80	43,736	41	82	18	0	Grind - ARHM Overlay	$307,027
2028-29	1112	338	Taft Avenue	Tustin Avenue	Scramento Street	AAC	B	4	1,390	60	86,176	79	9	45	46	Type II Slurry Seal	$70,664
2028-29	1112	340	Taft Avenue	Sacramento Street	Fern Street	AAC	B	4	1,310	60	77,851	83	45	45	10	Type II Slurry Seal	$63,838
2028-29	1112	344	Taft Avenue	Santiago Boulevard	960' e/o Santiago Boulevard	AC	C	2	960	30	59,386	85	0	100	0	Type II Slurry Seal	$48,697
2028-29	1112	3506	Taft Avenue	Cannon Street	Yukon Street	AC	C	2	485	16	10,471	72	62	38	0	Type II Slurry Seal	$8,586

FY	BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
2028-29	1112	3507	Taft Avenue	Yukon Street	Cannon Street	AC	C	2	485	24	12,306	74	25	73	2	Type II Slurry Seal	$10,091
																	$3,903,228
2029-30	287	150	Collins Avenue	Eckhoff Street	Commerce Street	AAC	B	4	752	60	47,282	63	40	53	7	AC Grind - Overlay	$345,159
2029-30	287	151	Collins Avenue	Commerce Street	Main Street	AAC	B	4	1,480	60	89,921	72	25	58	17	Type II Slurry Seal	$76,433
2029-30	287	152	Collins Avenue	Main Street	Batavia Street	AAC	B	4	1,450	60	86,271	76	8	71	21	Type II Slurry Seal	$73,330
2029-30	287	155	Collins Avenue	Glassell Street	Shaffer Street	AAC	B	4	1,350	52	66,644	74	24	63	13	Type II Slurry Seal	$56,647
2029-30	287	156	Collins Avenue	Shaffer Street	Cambridge Street	AAC	B	4	1,332	52	68,750	65	41	38	21	AC Grind - Overlay	$501,875
2029-30	287	157	Collins Avenue	Cambridge Street	California Street	AAC	B	4	1,335	52	54,096	77	7	93	0	Type II Slurry Seal	$45,982
2029-30	287	158	Collins Avenue	California Street	Tustin Street	AAC	B	4	1,290	52	85,213	69	0	72	28	Type II Slurry Seal	$72,431
2029-30	287	163	Collins Avenue	Railroad Tracks	Glassell Street	AC	B	4	1,240	52	70,652	66	43	44	13	AC Grind - Overlay	$515,760
2029-30	287	165	Collins Avenue	Batavia Street	Railroad Tracks	AAC	B	4	1,350	52	69,371	66	43	57	0	AC Grind - Overlay	$506,408
2029-30	287	167	Collins Avenue	Tustin Street	Highland Street	AAC	B	4	700	52	37,657	60	28	48	24	AC Grind - Overlay	$274,896
2029-30	287	169	Collins Avenue	Highland Street	Milford Street	AAC	B	4	1,240	52	72,955	57	45	55	0	AC Grind - Overlay	$532,572
2029-30	287	171	Collins Avenue	Milford Street	Handy Street	AAC	B	4	610	52	27,431	55	50	49	1	AC Grind - Overlay	$200,246
2029-30	287	173	Collins Avenue	Hart Street	Wanda Road	AAC	B	4	730	52	32,821	67	0	100	0	AC Grind - Overlay	$239,593
2029-30	287	175	Collins Avenue	Wanda Road	Mallard Street	AAC	B	4	966	60	62,171	60	27	73	0	AC Grind - Overlay	$453,848
2029-30	287	177	Collins Avenue	Mallard Street	105' e/o Roberto Street	AAC	B	4	600	60	40,591	64	7	80	13	AC Grind - Overlay	$296,314
2029-30	287	3529	Collins Avenue	Handy Street	Hart Street	AAC	B	4	925	52	45,845	67	10	86	4	AC Grind - Overlay	$334,669
2029-30	475	101	Glassell Street	420' N Riverdale Avenue	Richland Avenue	AAC	B	4	1,125	64	73,134	61	31	59	10	AC Grind - Overlay	$533,878
2029-30	475	102	Glassell Street	Taft Avenue	Trenton Avenue	AAC	B	5	1,365	80	107,676	68	28	66	6	Type II Slurry Seal	$91,525
2029-30	475	103	Glassell Street	Trenton Avenue	Katella Avenue	AAC	B	4	1,055	80	80,353	77	0	98	2	Type II Slurry Seal	$68,300
2029-30	475	104	Glassell Street	Katella Avenue	Quincy Avenue	AC	B	4	1,225	60	80,442	66	15	85	0	AC Grind - Overlay	$587,227
2029-30	475	105	Glassell Street	Quincy Avenue	Collins Avenue	AC	B	4	1,190	60	67,540	72	29	71	0	Type II Slurry Seal	$57,409
2029-30	475	108	Glassell Street	Collins Avenue	Mayfair Avenue	AC	B	2	1,160	42	46,049	81	0	54	46	Type II Slurry Seal	$39,142
2029-30	475	109	Glassell Street	Mayfair Avenue	Walnut Avenue	AC	B	2	1,515	44	59,811	82	0	39	61	Type II Slurry Seal	$50,839
2029-30	475	111	Glassell Street	22 West On/Off Ramp	City Limits (22 East On/Off Ramp)	AAC	B	4	446	105	45,880	40	70	30	0	AC Grind - Overlay	$334,924
2029-30	475	113	Glassell Street	La Veta Avenue	22 West On/Off Ramp	AAC	B	4	1,565	80	102,596	82	63	37	0	Type II Slurry Seal	$87,207
2029-30	475	3523	Glassell Street	Dunton Avenue	Woodvale Avenue	AAC	B	4	1,465	64	99,087	76	40	57	3	Type II Slurry Seal	$84,224
2029-30	475	84	Glassell Street	Chapman Avenue	Almond Avenue	AC	C	2	540	48	25,396	72	56	21	23	Type II Slurry Seal	$21,587
2029-30	475	85	Glassell Street	Maple Avenue	Chapman Avenue	AC	C	2	475	50	25,392	67	55	45	0	AC Grind - Overlay	$185,362
2029-30	475	90	Glassell Street	Lincoln Avenue	Dunton Avenue	AAC	B	4	240	64	23,450	71	67	32	1	Type II Slurry Seal	$19,933
2029-30	475	91	Glassell Street	Woodvale Avenue	Fletcher Avenue	AAC	B	4	660	64	45,834	74	46	54	0	Type II Slurry Seal	$38,959
2029-30	475	94	Glassell Street	Meats Avenue	Blueridge Avenue	AAC	B	4	1,565	80	122,241	82	0	90	10	Type II Slurry Seal	$103,905
2029-30	475	95	Glassell Street	Blueridge Avenue	Taft Avenue	AAC	B	5	1,075	80	64,677	82	36	45	19	Type II Slurry Seal	$54,975
																	$6,885,557
2030-31	374	179	Eckhoff Street	Orangewood Avenue	Sycamore Avenue	AC	C	2	1,150	60	63,735	74	23	65	12	Type II Slurry Seal	$56,724
2030-31	374	180	Eckhoff Street	Sequoia Avenue	Orangewood Avenue	AAC	B	2	900	60	57,574	73	7	74	19	Type II Slurry Seal	$51,241
2030-31	374	181	Eckhoff Street	RR Tracks (370' S Collins Avenue)	Sequoia Avenue	AAC	B	2	1,070	60	62,391	77	24	61	15	Type II Slurry Seal	$55,528
2030-31	374	182	Eckhoff Street	Collins Avenue	370' S Collins Avenue	AAC	B	2	370	60	19,601	85	34	66	0	Type II Slurry Seal	$17,445
2030-31	374	2003	Eckhoff Street	Sycamore Avenue	Maple Avenue	AC	C	2	1,160	37	44,092	77	41	23	36	Type II Slurry Seal	$39,242
2030-31	374	2004	Eckhoff Street	Maple Avenue	Chapman Avenue	AC	C	2	650	39	23,177	72	43	38	19	Type II Slurry Seal	$20,628
2030-31	611	3502	Katella Avenue	Route 55 SB On Ramp	Tustin St	AAC	B	6	786	40	40,694	58	16	79	5	AC Grind - Overlay	$308,867
2030-31	611	3503	Katella Avenue	Sacramento St	Route 55 SB On Ramp	AAC	B	6	845	33	35,209	62	39	58	3	AC Grind - Overlay	$267,236
2030-31	611	377	Katella Avenue	Struck Avenue	Main Street	AC	B	6	1,600	80	133,339	69	37	49	14	Type II Slurry Seal	$118,672
2030-31	611	378	Katella Avenue	Main Street	Batavia Street	AC	B	6	1,390	90	130,599	70	45	47	8	Type II Slurry Seal	$116,233
2030-31	611	390	Katella Avenue	Tustin Avenue	Route 55 SB On Ramp	AAC	B	6	930	40	40,009	53	32	64	4	AC Grind - Overlay	$303,668
2030-31	832	449	Orangewood Avenue	Eckhoff Street	Main Street	AAC	B	5	2,199	60	134,464	56	55	33	12	AC Grind - Overlay	$1,020,582
2030-31	832	453	Orangewood Avenue	1475' w/o Eckhoff Street	Eckhoff Street	AAC	B	4	1,475	80	108,619	48	54	39	7	AC Grind - Overlay	$824,418
2030-31	845	2422	Palm Avenue	Cypress St	Glassell Street	PCC	C	2	992	40	38,298	52	76	18	6	PCC Repair	$17,234
2030-31	1023	3282	Serrano Avenue	Kendra Rd	Nohl Ranch Road	AC	B	4	453	60	27,785	78	0	70	30	Type II Slurry Seal	$24,729
2030-31	1109	2013	Sycamore Avenue	Ash Street	Main Street	AC	C	2	1,205	39	42,075	74	29	66	5	Type II Slurry Seal	$37,447
2030-31	1109	2014	Sycamore Avenue	Eckhoff Street	Ash Street	AC	C	2	1,300	39	50,448	70	15	53	32	Type II Slurry Seal	$44,899
2030-31	1186	525	Walnut Avenue	Main Street	Batavia Street	AAC	C	2	1,370	30	44,543	80	31	48	21	Type II Slurry Seal	$39,643
2030-31	1186	527	Walnut Avenue	Cypress Street	Glassell Street	AAC	C	2	980	36	35,925	61	30	46	24	AC Grind - Overlay	$272,671
2030-31	1186	531	Walnut Avenue	Cambridge Street	California Street	AAC	C	2	1,305	38	49,032	44	42	51	7	AC Grind - Overlay	$372,153
2030-31	1186	532	Walnut Avenue	California Street	Tustin Street	AAC	C	3	1,260	48	63,012	57	42	48	10	AC Grind - Overlay	$478,261
2030-31	1186	533	Walnut Avenue	Tustin Street	Wayfield Street	AC	C	2	480	48	25,052	73	7	93	0	Type II Slurry Seal	$22,296
2030-31	1186	534	Walnut Avenue	Wayfield Street	Park Lane	AC	C	2	300	38	13,598	73	0	87	13	Type II Slurry Seal	$12,102
2030-31	1186	539	Walnut Avenue	Hart Street	Cul-de-sac	AC	C	2	457	48	31,309	77	0	100	0	Type II Slurry Seal	$27,865
2030-31	1186	543	Walnut Avenue	Hewes Street	Rancho Santiago Boulevard	AAC	C	2	1,270	36	46,513	54	42	57	1	AC Grind - Overlay	$353,034
2030-31	1186	544	Walnut Avenue	Rancho Santiago Blvd	East End	AAC	C	2	650	36	24,252	77	25	75	0	Type II Slurry Seal	$21,584
2030-31	1189	547	Wanda Road	Katella Avenue	Quincy Avenue	AC	B	2	1,430	54	88,786	63	61	30	9	Grind - ARHM Overlay	$673,886
																	$5,598,288

FY	BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
2031-32	64	2397	Almond Avenue	Glassell Street	Shaffer Street	PCC	C	2	1,270	40	50,990	46	61	17	22	PCC Repair	$22,946
2031-32	64	2659	Almond Avenue	Cypress Street	Lemon Street	PCC	C	2	290	39	10,023	42	76	12	12	PCC Repair	$4,510
2031-32	64	2660	Almond Avenue	Lemon Street	Glassell Street	PCC	C	2	605	39	22,569	49	64	13	23	PCC Repair	$10,156
2031-32	113	147	Batavia Street	RR Crossing	Grove Avenue (S)	AC	B	5	825	60	39,733	74	41	58	1	Type II Slurry Seal	$36,554
2031-32	113	148	Batavia Street	Grove Avenue (S)	Taft Avenue	AAC	B	5	1,260	60	70,093	62	46	43	11	AC Grind - Overlay	$553,735
2031-32	415	2456	Fairhaven Avenue	City Limit	Tustin Avenue	AC	B	2	960	32	30,720	72	26	63	11	Type II Slurry Seal	$28,262
2031-32	415	868	Fairhaven Avenue	Lowry Street	Yorba Street	AC	B	4	400	60	22,570	53	31	69	0	AC Grind - Overlay	$178,303
2031-32	415	869	Fairhaven Avenue	Ponderosa Street	Lowry Street	AC	B	4	1,690	60	77,863	72	34	62	4	Type II Slurry Seal	$71,634
2031-32	464	1162	Garden Grove Boulevard	Lewis Street	Park Vine Street	AC	B	4	1,075	80	79,710	79	9	89	2	Type II Slurry Seal	$73,333
2031-32	464	1164	Garden Grove Boulevard	The City Drive	Bridge (230' E The City Drive)	AC	B	6	255	80	23,835	71	45	42	13	Type II Slurry Seal	$21,928
2031-32	464	1165	Garden Grove Boulevard	Park Vine Street	The City Drive	AC	B	4	1,235	80	80,441	75	13	85	2	Type II Slurry Seal	$74,006
2031-32	475	89	Glassell Street	Lincoln Avenue	Richland Avenue	AAC	B	4	1,760	80	130,160	57	45	35	20	AC Grind - Overlay	$1,028,264
2031-32	475	92	Glassell Street	Fletcher Avenue	Baywood Avenue	AC	B	4	1,280	80	103,989	67	37	61	2	AC Grind - Overlay	$821,513
2031-32	475	93	Glassell Street	Baywood Avenue	Meats Avenue	AC	B	4	975	80	77,984	65	23	77	0	AC Grind - Overlay	$616,074
2031-32	636	15396	La Veta Avenue	Yorba Street	106' E Loretta Drive	AC	B	4	702	64	39,952	74	35	65	0	Type II Slurry Seal	$36,756
2031-32	636	3524	La Veta Avenue	Route 55 Bridge	Fairmont Way	AC	B	4	620	60	45,224	78	20	80	0	Type II Slurry Seal	$41,606
2031-32	636	491	La Veta Avenue	540' w/o Flower Circle	Flower Circle	AAC	B	4	540	86	35,567	85	0	100	0	Type II Slurry Seal	$32,722
2031-32	636	492	La Veta Avenue	Flower Circle	Crest Road	AAC	B	4	1,030	65	66,363	86	0	100	0	Type II Slurry Seal	$61,054
2031-32	636	494	La Veta Avenue	Crest Road	Main Street	AAC	B	4	980	70	68,950	86	0	100	0	Type II Slurry Seal	$63,434
2031-32	636	496	La Veta Avenue	Main Street	Pepper Street	AAC	B	6	700	75	56,911	82	21	53	26	Type II Slurry Seal	$52,358
2031-32	636	500	La Veta Avenue	Parker Street	Montgomery Street	AAC	B	4	600	50	30,310	80	28	62	10	Type II Slurry Seal	$27,885
2031-32	636	502	La Veta Avenue	Montgomery Street	Lemon Street	AAC	B	4	633	60	39,841	77	15	85	0	Type II Slurry Seal	$36,654
2031-32	636	504	La Veta Avenue	Lemon Street	Glassell Street	AAC	B	4	601	60	38,717	73	35	65	0	Type II Slurry Seal	$35,620
2031-32	636	505	La Veta Avenue	Glassell Street	Orange Street	AC	B	2	285	50	17,054	64	29	71	0	AC Grind - Overlay	$134,727
2031-32	636	506	La Veta Avenue	Orange Streeet	Grand Street	AC	B	2	345	29	10,182	57	23	69	8	AC Grind - Overlay	$80,438
2031-32	636	508	La Veta Avenue	Grand Street	Shaffer Street	AC	B	2	450	30	19,861	65	9	86	5	AC Grind - Overlay	$156,902
2031-32	636	509	La Veta Avenue	Shaffer Street	Cambridge Street	AC	B	2	1,260	60	77,515	63	18	61	21	AC Grind - Overlay	$612,369
2031-32	636	511	La Veta Avenue	Tustin Avenue	Frontage Road	AC	B	4	570	60	40,205	69	0	74	26	Type II Slurry Seal	$36,989
2031-32	636	513	La Veta Avenue	La Veta Ave Frontage Road	Bridge	AC	B	4	606	62	37,983	65	30	70	0	AC Grind - Overlay	$300,066
2031-32	636	514	La Veta Avenue	Fairmont Way	Yorba Street	AC	B	4	304	60	17,297	70	46	54	0	Type II Slurry Seal	$15,913
2031-32	636	517	La Veta Avenue	220' W Wheeler Street	Laurinda Lane	AC	B	4	890	60	45,545	76	8	85	7	Type II Slurry Seal	$41,901
2031-32	636	518	La Veta Avenue	Laurinda Lane	Prospect Street	AC	B	4	1,190	60	70,287	78	0	98	2	Type II Slurry Seal	$64,664
2031-32	636	520	La Veta Avenue	Prospect Street	Swidler Place	AC	B	4	1,170	60	72,410	77	11	89	0	Type II Slurry Seal	$66,617
2031-32	636	522	La Veta Avenue	Swidler Place	James Street	AC	B	4	655	60	39,750	71	0	78	22	Type II Slurry Seal	$36,570
2031-32	636	524	La Veta Avenue	James Street	Esplanade Street	AC	B	2	744	60	42,173	57	0	100	0	AC Grind - Overlay	$333,167
																	$5,809,628
2032-33	743	893	Meats Avenue	Pine Street	Cambridge Street	AAC	B	4	695	60	40,406	79	0	87	13	Type II Slurry Seal	$38,790
2032-33	743	895	Meats Avenue	Cambridge Street	Canal Street	AAC	B	4	1,400	60	84,989	78	0	97	3	Type II Slurry Seal	$81,589
2032-33	743	897	Meats Avenue	Canal Street	Tustin Avenue	AAC	B	4	1,035	60	65,693	75	25	69	6	Type II Slurry Seal	$63,065
2032-33	743	899	Meats Avenue	Tustin Street	Park Lane	AC	B	4	375	77	31,362	56	69	31	0	Grind - ARHM Overlay	$257,482
2032-33	743	903	Meats Avenue	Breckenridge Street	Santiago Boulevard	AC	B	4	1,280	60	73,713	50	28	71	1	AC Grind - Overlay	$605,184
2032-33	1011	466	Santiago Boulevard	1335' N Lincoln Avenue	Lincoln Avenue	AAC	B	4	1,335	50	71,513	58	52	43	5	AC Grind - Overlay	$587,122
2032-33	1012	3550	Santiago Canyon Road	HWY 261 BRIDGE	EAST CITY LIMIT	AC	B	4	122	62	28,329	42	27	53	20	AC Grind - Overlay	$232,581
2032-33	1012	3553	Santiago Canyon Road	Jamboree Road	2050' E/O JAMBOREE ROAD (Buildin	AC	B	4	2,048	64	166,145	84	0	99	1	Type II Slurry Seal	$126,270
2032-33	1012	3554	Santiago Canyon Road	2050' E/O JAMBOREE ROAD (COP)	Route 261 Bridge	AC	B	4	3,034	64	232,944	64	53	47	0	AC Grind - Overlay	$1,912,470
2032-33	1012	477	Santiago Canyon Road	Windes Road	450' w/o Kennymeade Street	AC	B	4	790	80	63,288	70	7	92	1	Type II Slurry Seal	$60,756
2032-33	1012	478	Santiago Canyon Road	450' w/o Kennymeade Street	Lolita Street	AC	B	4	1,595	60	94,705	70	0	100	0	Type II Slurry Seal	$90,917
2032-33	1012	481	Santiago Canyon Road	Lolita Street	Holy Sepulcher (Cemetary Enterance	AC	B	4	1,175	80	89,350	65	12	88	0	AC Grind - Overlay	$733,564
2032-33	1012	482	Santiago Canyon Road	Holy Sepulcher (Cemetary Enterance	Amapola Avenue	AC	B	4	2,278	80	181,972	66	19	81	0	AC Grind - Overlay	$1,493,990
																	$6,283,780
			Locals														
2026-27	64	819	Almond Avenue	Main Street	Batavia Street	AC	E	2	1,615	38	61,370	75	22	61	17	AC Grind - Overlay	$332,012
2026-27	67	851	Altura Avenue	West End	Santiago Boulevard	AC	E	2	820	32	28,040	79	55	45	0	Type II Slurry Seal	$15,142
2026-27	144	2255A	Blueridge Avenue	Case Street	Neville Street	AAC	I	2	414	44	18,216	32	81	11	8	Grind - ARHM Overlay	$98,549
2026-27	144	2255B	Blueridge Avenue	Neville Street	Glassell Street	AAC	I	2	1,371	44	60,324	63	57	38	5	Grind - ARHM Overlay	$326,353
2026-27	144	573	Blueridge Avenue	Orange-Olive Road	East End	AAC	E	2	635	36	22,860	82	0	96	4	Type II Slurry Seal	$12,344
2026-27	167	2229	Brian Street	North End	Yale Street	AC	I	2	305	44	14,820	69	26	68	6	Type II Slurry Seal	$8,003
2026-27	170	562	Briardale Avenue	Woodside Street	Cambridge Street	AAC	E	2	855	32	27,360	81	65	21	14	Type II Slurry Seal	$14,774
2026-27	170	563	Briardale Avenue	West End	Lime Street	AAC	I	2	220	44	9,680	70	0	100	0	Type II Slurry Seal	$5,227
2026-27	170	564	Briardale Avenue	Case Street	Neville Street	AC	I	2	475	44	20,900	17	90	10	0	AC Recon	$338,998
2026-27	177	2425	Bronson Avenue	Devon Road	Bedford Road	AC	E	1	536	16	7,600	60	62	35	3	Grind - ARHM Overlay	$41,116
2026-27	183	567	Buckeyewood Avenue	Shaffer Street	Cambridge Street	AAC	E	2	1,380	32	44,160	81	85	15	0	Type II Slurry Seal	$23,846
2026-27	198	2508	California Street	Maple Avenue	Lael Drive	AC	E	2	290	32	9,280	68	33	55	12	Type II Slurry Seal	$5,011

FY	BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
2026-27	204	2597	Camden Street	Via Escola	Ashford Avenue	AC	E	2	170	36	5,608	87	0	100	0	Type II Slurry Seal	$3,028
2026-27	206	2426	Camille Circle	Almond Avenue	South End	AAC	E	2	200	30	7,050	58	64	36	0	Grind - ARHM Overlay	$38,141
2026-27	210	2535	Candlewood Avenue	Nordic Drive	East End	AAC	E	2	355	32	11,360	86	0	88	12	Type II Slurry Seal	$6,134
2026-27	210	2628	Candlewood Avenue	West End	Silverwood Street	AAC	E	2	520	32	17,690	90	0	96	4	Type II Slurry Seal	$9,553
2026-27	220	3455	Carleton Avenue	Cambridge Street	East End	AAC	E	2	1,320	32	43,390	83	0	100	0	Type II Slurry Seal	$23,431
2026-27	230	2560	Carver Lane	Cannon Street	East End	AC	I	2	185	60	10,740	45	0	53	47	Grind - ARHM Overlay	$58,103
2026-27	262	2533	Chestnut Avenue	Shaffer Street	Cambridge Street	AC	E	2	1,060	32	33,920	75	0	100	0	Type II Slurry Seal	$18,317
2026-27	1351	3500	City Blvd E	Metropolitan Dr	505' n/o Metropolitan Dr	AC	E	2	505	30	15,150	85	0	85	15	Type II Slurry Seal	$8,181
2026-27	273	2666	City Blvd W	Manchester Avenue	The City Way @ The Block	AAC	E	2	970	51	22,310	84	11	83	6	Type II Slurry Seal	$12,047
2026-27	276	2444	Clark Street	Almond Avenue	Palmyra Avenue	AC	E	2	620	32	19,840	70	47	53	0	Type II Slurry Seal	$10,714
2026-27	276	2445	Clark Street	Palmyra Avenue	Culver Avenue	AC	E	2	620	33	20,460	60	28	72	0	Grind - ARHM Overlay	$110,689
2026-27	294	1077	Concord Avenue	Cambridge Street	Marquart Street	AAC	E	2	310	36	11,160	84	65	30	5	Type II Slurry Seal	$6,026
2026-27	333	1280	Dana Place	Park Lane	Highland Street	AC	E	2	90	32	2,880	40	84	16	0	Grind - ARHM Overlay	$15,581
2026-27	344	1924	Del Mar Avenue	Lincoln Street	Nordic Street	AAC	E	2	330	36	11,880	74	92	8	0	Type II Slurry Seal	$6,415
2026-27	349	1860	Denise Avenue	West End	Santiago Boulevard	AC	E	2	725	30	23,550	84	0	100	0	Type II Slurry Seal	$12,717
2026-27	349	1870	Denise Avenue	North End	Santiago Boulevard	AC	E	2	1,850	31	59,150	47	53	25	22	Grind - ARHM Overlay	$320,002
2026-27	352	1830	Diamond Street	Grove Avenue	Sacramento Street	AC	E	2	1,350	31	41,602	81	45	55	0	Type II Slurry Seal	$22,465
2026-27	352	3229	Diamond Street	Meats Avenue	Cloverdale	AC	E	2	534	33	18,372	77	36	50	14	Type II Slurry Seal	$9,921
2026-27	379	2317	El Prado Avenue	West End	Fondren Street	AC	E	2	220	32	8,540	58	55	40	5	Grind - ARHM Overlay	$46,201
2026-27	379	2319	El Prado Avenue	Lewis Street	Lewis Street	AC	E	2	100	36	3,600	22	51	31	18	AC Recon	$58,392
2026-27	448	806	Foley Place	Almond Avenue	South End	AC	E	2	510	32	17,370	46	34	66	0	Grind - ARHM Overlay	$93,972
2026-27	484	2119	Glendale Avenue	Nordic Place	Shattuck Place	AAC	E	2	275	32	8,800	85	0	49	51	Type II Slurry Seal	$4,752
2026-27	484	2125	Glendale Avenue	Shaffer Street	Cambridge Street	AAC	E	2	1,415	31	43,865	73	0	77	23	Type II Slurry Seal	$23,687
2026-27	509	2138A	Greengrove Street	North End	Vista Del Playa (North)	AC	E	2	216	32	6,912	80	0	100	0	Type II Slurry Seal	$3,732
2026-27	509	2138B	Greengrove Street	Vista Del Playa (North)	Vista Del Playa (South)	AC	E	2	224	32	7,168	79	17	83	0	Type II Slurry Seal	$3,871
2026-27	555	1506	Highland Street	Adams Avenue	Collins Avenue	AC	E	2	1,510	30	45,600	26	81	15	4	AC Recon	$739,632
2026-27	660	2232	Leslie Way	Taft Avenue	Levers Place	AC	I	2	685	36	24,660	56	61	39	0	Grind - ARHM Overlay	$133,411
2026-27	662	2233	Levers Place	Leslie Way	O'Donnell Way	AC	I	2	555	44	24,420	54	40	53	7	Grind - ARHM Overlay	$132,112
2026-27	667	2226	Lime Street	Briardale Avenue	Taft Avenue	AAC	E	2	375	44	16,500	69	11	81	8	Type II Slurry Seal	$8,910
2026-27	667	2259	Lime Street	North End	Grove Avenue	AAC	I	2	170	44	8,630	78	38	62	0	Type II Slurry Seal	$4,660
2026-27	667	2270	Lime Street	Palm Avenue	Maple Avenue	AAC	E	2	615	33	20,295	65	0	74	26	Grind - ARHM Overlay	$109,796
2026-27	667	2271	Lime Street	Palm Avenue	Sycamore Avenue	AC	E	2	500	32	16,000	83	0	100	0	Type II Slurry Seal	$8,640
2026-27	667	2920	Lime Street	Sycarmore Avenue	North End	AC	E	2	143	24	4,182	17	56	37	7	AC Recon	$67,832
2026-27	674	2262	Little Main Street	Main Street	Chapman Avenue	AC	E	2	450	32	14,400	80	12	80	8	Type II Slurry Seal	$7,776
2026-27	720	1037	Maplewood Street	Palm Avenue	Maple Avenue	AAC	E	2	610	34	20,740	75	57	12	31	Type II Slurry Seal	$11,200
2026-27	720	1125	Maplewood Street	Rose Avenue	Walnut Avenue	AC	E	2	805	31	24,955	56	45	55	0	Grind - ARHM Overlay	$135,007
2026-27	720	1126	Maplewood Street	Everett Place	Rose Avenue	AC	E	2	290	32	9,280	77	0	100	0	Type II Slurry Seal	$5,011
2026-27	720	1127	Maplewood Street	Mayfair Avenue	Everett Place	AC	E	2	270	32	8,640	60	57	43	0	Grind - ARHM Overlay	$46,742
2026-27	720	1128	Maplewood Street	Collins Avenue	Mayfair Avenue	AC	E	2	1,120	32	35,840	67	60	40	0	Grind - ARHM Overlay	$193,894
2026-27	730	1076	Marquart Street	Candlewood Avenue	Concord Avenue	AAC	E	2	225	32	7,200	91	0	58	42	Type II Slurry Seal	$3,888
2026-27	732	1261	Martha Lane	Park Lane	East End	AAC	E	2	225	31	6,975	86	0	96	4	Type II Slurry Seal	$3,767
2026-27	772	1262	Mount Vernon Avenue	Wayfield Street	525' e/o Wayfield Street	AAC	E	2	525	31	16,275	91	30	62	8	Type II Slurry Seal	$8,789
2026-27	784	2258	Neville Street	Blue Ridge Avenue	Taft Avenue	ST	I	2	1,115	44	49,060	13	93	7	0	AC Recon	$795,753
2026-27	792	1074	Nordic Drive	Taft Avenue	Concord Avenue	AAC	E	2	400	32	12,800	93	0	86	14	Type II Slurry Seal	$6,912
2026-27	803	1265	Oak Street	Palm Avenue	South End	AC	E	2	485	36	17,460	80	31	69	0	Type II Slurry Seal	$9,428
2026-27	803	1266	Oak Street	Walnut Avenue	Palm Avenue	AC	E	2	1,260	31	39,060	86	0	93	7	Type II Slurry Seal	$21,092
2026-27	809	1255	Oceanview Street	San Alto Avenue	Santa Ana Canyon	AAC	E	2	765	32	24,480	76	0	10	90	Type II Slurry Seal	$13,219
2026-27	811	2212	O'Donnell Way	Taft Avenue	Levers Place	AC	E	2	655	44	28,820	55	51	39	10	Grind - ARHM Overlay	$155,916
2026-27	845	1277	Palm Avenue	Tustin Street	Wayfield Circle	AC	E	2	695	37	25,715	76	0	96	4	Type II Slurry Seal	$13,886
2026-27	845	1278	Palm Avenue	Wayfield Circle	Park Lane	AC	E	2	345	32	11,040	90	0	90	10	Type II Slurry Seal	$5,962
2026-27	855	2311	Park Balboa Avenue	Park Hyde	Park Central	AC	E	2	1,450	36	54,700	18	87	11	2	AC Recon	$887,234
2026-27	859	1283	Park Lane	Mount Vernon Avenue	Sycamore Avenue	AC	E	2	595	31	18,445	86	0	34	66	Type II Slurry Seal	$9,960
2026-27	861	2298	Park Vine Street	Garden Grove Boulevard	Park Central Avenue	AC	E	2	1,015	32	34,480	10	94	6	0	AC Recon	$559,266
2026-27	862	962	Parker Street	Almond AVenue	Palmyra Avenue	AC	E	2	620	36	22,320	62	41	23	36	Grind - ARHM Overlay	$120,751
2026-27	862	963	Parker Street	Palmrya Avenue	Culver Avenue	AC	E	2	615	32	19,680	67	48	45	7	Type II Slurry Seal	$10,627
2026-27	874	948	Pepper Street	Chapman Avenue	Almond Avenue	AC	E	2	600	30	18,000	62	56	36	8	Grind - ARHM Overlay	$97,380
2026-27	885	807	Pixley Street	North End	Palmyra Avenue	AC	E	2	415	32	14,330	54	28	68	4	Grind - ARHM Overlay	$77,525
2026-27	885	954	Pixley Street	Palmyra Avenue	Culver Avenue	AC	E	2	615	30	18,450	45	48	37	15	Grind - ARHM Overlay	$99,815
2026-27	936	2123	Ridgewood Street	Glendale Avenue	Briardale Avenue	AAC	E	2	540	32	17,280	81	26	19	55	Type II Slurry Seal	$9,331
2026-27	949	1878	Robinhood Place	Santiago Boulevard (South Side)	North End	AC	E	2	1,280	31	44,180	84	0	100	0	Type II Slurry Seal	$23,857
2026-27	1049	1075	Silverwood Street	Candlewood Avenue	Chestnut Avenue	AAC	E	2	555	31	17,205	93	0	62	38	Type II Slurry Seal	$9,291
2026-27	1075	2577	St. Thomas Circle	North End	Taft Avenue	AC	E	2	325	44	15,450	54	50	15	35	Grind - ARHM Overlay	$83,585
2026-27	1085	1885	Stillwater Avenue	Cannon Street	Singingwood Street	AC	E	2	1,240	36	46,890	69	32	31	37	Type II Slurry Seal	$25,321

FY	BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
2026-27	1109	2887	Sycamore Avenue	Wayfield Street	Highland Street	AC	E	2	560	35	19,600	80	12	77	11	Type II Slurry Seal	$10,584
2026-27	1138	2230	Trenton Avenue	Main Street	East End	AC	I	2	805	44	36,920	86	0	77	23	Type II Slurry Seal	$19,937
2026-27	1138	943	Trenton Avenue	Shaffer Street	Cambridge Street	AAC	E	2	935	32	29,920	70	0	85	15	Type II Slurry Seal	$16,157
2026-27	1187	1264	Wayfield Circle	Palm Avenue	South End	AC	E	2	110	32	3,520	84	0	100	0	Type II Slurry Seal	$1,901
2026-27	1187	1267	Wayfield Circle	Walnut Avenue	Palm Avenue	AAC	E	2	1,265	42	53,130	74	16	67	17	Type II Slurry Seal	$28,690
2026-27	1252	1404	Wrightwood Street	North End (near Ruth Place)	South End	AAC	E	2	920	32	32,740	84	0	41	59	Type II Slurry Seal	$17,680
2026-27	1252	1408	Wrightwood Street	North End	Schug Street	AAC	E	2	955	32	33,110	81	0	97	3	Type II Slurry Seal	$17,879
2026-27	1252	1614	Wrightwood Street	Charter Oak Drive	Del Valle Avenue	AAC	E	2	935	33	31,605	86	0	100	0	Type II Slurry Seal	$17,067
2026-27	1256	2228	Yale Avenue	Brian Street	Main Street	AC	I	2	535	44	23,540	66	28	72	0	Grind - ARHM Overlay	$127,351
2026-27	1258	2673	Yorba Street	Chapman Ave	North End	AC	E	4	500	60	30,000	48	60	39	1	Grind - ARHM Overlay	$162,300
																	$7,224,170
2027-28	4	834	Adams Avenue	Glassell Street	Grand Street	AAC	E	2	615	32	19,680	65	26	56	18	Grind - ARHM Overlay	$110,798
2027-28	4	835	Adams Avenue	Shaffer Street	Cambridge Street	AAC	E	2	1,275	32	40,800	83	0	96	4	Type II Slurry Seal	$22,848
2027-28	7	856	Agate Street	Meats Avenue	Grove Avenue	AC	E	2	745	32	24,590	66	71	29	0	Grind - ARHM Overlay	$138,442
2027-28	69	829	Amapola Avenue	150' w/o Ridgeline Road	Santiago Canyon Road	AC	E	2	1,185	22	26,070	61	42	46	12	Grind - ARHM Overlay	$146,774
2027-28	69	830	Amapola Avenue	185' e/o Orange Park Blvd	Ranchwood Trail	AC	E	2	1,600	16	25,600	85	0	100	0	Type II Slurry Seal	$14,336
2027-28	72	2450	American Way	Fletcher Street	Freedom Avenue	AC	E	2	770	44	33,880	38	62	30	8	Grind - ARHM Overlay	$190,744
2027-28	86	569	Arbor Way	Eckhoff Street	East End	AC	E	2	250	32	8,000	71	46	54	0	Type II Slurry Seal	$4,480
2027-28	93	2202	Atchison Street	Maple Avenue	Chapman Ave	AC	I	1	615	14	11,110	29	74	7	19	Grind - ARHM Overlay	$62,549
2027-28	97	2559	Auburn Street	Via Escola	South End	AC	E	2	215	36	9,240	53	71	29	0	Grind - ARHM Overlay	$52,021
2027-28	134	623	Bitterbush Street	North End	Chapman Avenue	AC	E	2	1,100	32	35,200	46	70	26	4	Grind - ARHM Overlay	$198,176
2027-28	134	624	Bitterbush Street	North End	Palm Avenue	AC	E	2	335	32	10,720	73	34	65	1	Type II Slurry Seal	$6,003
2027-28	231	2231	Case Street	Taft Avenue	South End	ST	I	2	670	44	30,630	27	73	17	10	AC Recon	$516,728
2027-28	231	2256	Case Street	Blueridge Avenue	Taft Avenue	AC	I	2	1,075	44	47,300	49	50	28	22	Grind - ARHM Overlay	$266,299
2027-28	262	2172	Chestnut Avenue	West End	Highland Street	AAC	E	2	260	36	9,360	87	0	32	68	Type II Slurry Seal	$5,242
2027-28	268	2474	Christine Street	Walnut Avenue	South End	AAC	E	2	210	32	8,220	64	66	31	3	Grind - ARHM Overlay	$46,279
2027-28	272	2222	Citrus Street	280' N Struck Avenue	Struck Avenue	AAC	E	2	280	32	8,960	76	0	27	73	Type II Slurry Seal	$5,018
2027-28	272	2437	Citrus Street	Palm Avenue	Sycamore Avenue	AAC	E	2	505	32	16,160	75	39	61	0	Type II Slurry Seal	$9,050
2027-28	272	2438	Citrus Street	Palm Avenue	South End	AC	E	2	180	31	6,630	67	0	100	0	Grind - ARHM Overlay	$37,327
2027-28	272	2439	Citrus Street	Maple Avenue	Chapman Avenue	AAC	E	2	600	32	19,200	81	0	62	38	Type II Slurry Seal	$10,752
2027-28	272	2447	Citrus Street	North End	Palmyra Avenue	AC	E	2	335	34	11,390	87	0	59	41	Type II Slurry Seal	$6,378
2027-28	277	2451	Cleveland Street	North End	Harwood Street	AAC	E	2	840	31	26,040	72	60	40	0	Type II Slurry Seal	$14,582
2027-28	277	2458	Cleveland Street	Maple Avenue	Chapman Avenue	PCC	E	2	605	34	20,570	41	65	14	21	PCC Repair	$12,342
2027-28	277	2459	Cleveland Street	Palm Avenue	Maple Avenue	PCC	E	2	620	34	21,080	48	69	18	13	PCC Repair	$12,648
2027-28	277	2462	Cleveland Street	Trenton Avenue	South End	AC	E	2	455	32	14,560	79	0	100	0	Type II Slurry Seal	$8,154
2027-28	277	2907	Cleveland Street	Sycamore Avenue	Palm Avenue	AAC	E	2	615	32	19,680	79	0	100	0	Type II Slurry Seal	$11,021
2027-28	389	2224	Elm Street	North End	Collins Avenue	AC	I	2	555	44	24,420	53	69	29	2	Grind - ARHM Overlay	$137,485
2027-28	389	2265	Elm Street	Sycamore Avenue	South End	AC	E	2	490	30	14,700	53	56	44	0	Grind - ARHM Overlay	$82,761
2027-28	396	2223	Enterprise Street	North End	Collins Avenue	AAC	I	2	615	44	27,060	84	0	100	0	Type II Slurry Seal	$15,154
2027-28	396	2260	Enterprise Street	North End	Grove Avenue	AAC	I	2	330	44	15,670	86	0	99	1	Type II Slurry Seal	$8,775
2027-28	398	3116	Equestrian Terrace	Rancho Santiago Boulevard	East End	AC	E	2	710	22	17,418	46	40	60	0	Grind - ARHM Overlay	$98,063
2027-28	500	1067	Grand Street	Quincy Avenue	Collins Avenue	AC	E	2	1,170	37	43,290	54	36	59	5	Grind - ARHM Overlay	$243,723
2027-28	500	1068	Grand Street	Wilson Avenue	Quincy Avenue	AC	E	2	525	37	19,425	54	59	40	1	Grind - ARHM Overlay	$109,363
2027-28	500	2410	Grand Street	Palm Avenue	Maple Avenue	PCC	E	2	620	40	24,800	44	69	18	13	Grind - ARHM Overlay	$139,624
2027-28	531	1688	Hartman Street	Brookshire Avenue	Brentwood Avenue	AC	E	2	235	32	7,520	63	72	28	0	Grind - ARHM Overlay	$42,338
2027-28	573	1351	Hoover Avenue	Sacramento Street	Handy Street	AAC	E	2	1,135	30	34,050	86	36	64	0	Type II Slurry Seal	$19,068
2027-28	573	2221	Hoover Avenue	West End	Batavia Street	AAC	I	2	510	31	15,810	82	0	100	0	Type II Slurry Seal	$8,854
2027-28	623	1276	Killingsworth Avenue	Wheeler Street	Malena Street	AC	E	2	330	31	10,730	47	27	69	4	Grind - ARHM Overlay	$60,410
2027-28	742	3195	Meads Avenue	Randall Street	Santiago Canyon	AC	E	1	1,474	15	22,110	67	35	56	9	Grind - ARHM Overlay	$124,479
2027-28	1353	3555	Meats Ave Frontage	Meats Avenue	End	AC	E	2	368	32	14,720	27	56	32	12	AC Recon	$238,758
2027-28	769	1590	Morning Glory Way	White Oak Ridge	Willow Springs Road	AC	E	2	985	32	32,270	67	55	32	13	Grind - ARHM Overlay	$181,680
2027-28	815	2167	Olive Avenue	200' n/o Lincoln Avenue	Lincoln Avenue	AAC	I	2	200	30	5,700	67	10	26	64	Grind - ARHM Overlay	$32,091
2027-28	816	2395	Olive Street	Chapman Avenue	Almond Avenue	PCC	E	2	615	40	24,600	57	52	16	32	Grind - ARHM Overlay	$138,498
2027-28	816	777	Olive Street	Maple Avenue	Chapman Avenue	PCC	E	2	615	40	24,600	61	40	14	46	Grind - ARHM Overlay	$138,498
2027-28	816	778	Olive Street	Palm AVenue	Maple Avenue	PCC	E	2	620	40	24,800	58	32	14	54	Grind - ARHM Overlay	$139,624
2027-28	816	779	Olive Street	North End	Palm Avenue	AC	E	2	305	36	10,724	43	46	45	9	Grind - ARHM Overlay	$60,376
2027-28	816	780	Olive Street	Walnut Avenue	Sycamore Avenue	AC	E	2	620	36	21,808	75	27	55	18	Type II Slurry Seal	$12,212
2027-28	816	956	Olive Street	Almond Avenue	Palmyra Avenue	AC	E	2	600	36	21,600	38	27	41	32	Grind - ARHM Overlay	$121,608
2027-28	828	1063	Orange Street	Quincy Avenue	South End	AC	E	2	170	31	6,320	64	65	31	4	Grind - ARHM Overlay	$35,582
2027-28	828	1097	Orange Street	Rose Avenue	Walnut AVenue	AC	E	2	615	36	22,140	63	14	47	39	Grind - ARHM Overlay	$124,648
2027-28	828	1098	Orange Street	North End	Rose Avenue	AC	E	2	305	38	11,590	69	11	59	30	Type II Slurry Seal	$6,490
2027-28	828	1149	Orange Street	Collins Avenue	Lomita Avenue	AC	E	2	615	40	24,600	72	0	100	0	Type II Slurry Seal	$13,776
2027-28	828	2392	Orange Street	Maple Avenue	Chapman Avenue	PCC	E	2	605	40	24,200	52	64	17	19	PCC Repair	$14,520

FY	BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
2027-28	828	2399	Orange Street	Chapman Avenue	Almond Avenue	PCC	I	2	615	40	24,600	73	34	17	49	PCC Repair	$9,840
2027-28	828	2407	Orange Street	Almond Avenue	Washington Avenue	PCC	E	2	295	40	11,800	70	51	17	32	PCC Repair	$4,720
2027-28	828	2408	Orange Street	Washington Avenue	Palmyra Avenue	PCC	E	2	300	40	12,000	70	53	13	34	PCC Repair	$4,800
2027-28	828	2411	Orange Street	Palm Avenue	Maple Avenue	PCC	E	2	620	40	24,800	45	75	13	12	PCC Repair	$14,880
2027-28	859	1296	Park Lane	Orange Grove Avenue	Walnut Avenue	AC	E	2	450	32	14,400	77	34	29	37	Type II Slurry Seal	$8,064
2027-28	859	1839	Park Lane	Meats Avenue	Del Mar Avenue	AC	E	2	735	32	23,520	87	0	100	0	Type II Slurry Seal	$13,171
2027-28	862	2215	Parker Street	Katella Avenue	South End	AC	E	2	565	38	21,470	64	36	29	35	Grind - ARHM Overlay	$120,876
2027-28	862	2217	Parker Street	Struck Avenue	Collins Avenue	AAC	I	2	1,265	37	46,805	65	63	33	4	Grind - ARHM Overlay	$263,512
2027-28	862	769	Parker Street	North End	Maple Avenue	AC	E	1	305	18	5,490	79	0	69	31	Type II Slurry Seal	$3,074
2027-28	862	770	Parker Street	North End	Palm Avenue	AC	E	2	705	37	27,135	59	35	50	15	Grind - ARHM Overlay	$152,770
2027-28	862	961	Parker Street	Chapman Avenue	Almond Avenue	AC	E	2	620	36	22,320	76	11	89	0	Type II Slurry Seal	$12,499
2027-28	906	1062	Quincy Avenue	Glassell Street	Grand Street	AC	E	2	605	31	18,755	57	69	28	3	Grind - ARHM Overlay	$105,591
2027-28	906	1346	Quincy Avenue	West End	Wanda Road	AAC	E	2	180	32	6,860	73	0	100	0	Type II Slurry Seal	$3,842
2027-28	906	1507	Quincy Avenue	Highland Street	East End	AC	E	2	350	30	10,500	68	27	73	0	Type II Slurry Seal	$5,880
2027-28	906	3156	Quincy Avenue	Highland Street	156' w/o Highland Street	AC	E	2	156	30	4,680	58	43	57	0	Grind - ARHM Overlay	$26,348
2027-28	1083	740	Stevens Street	Maple Avenue	Chapman Avenue	AC	E	2	600	32	19,200	48	74	24	2	Grind - ARHM Overlay	$108,096
2027-28	1083	741	Stevens Street	North End	Maple Avenue	AC	E	2	450	32	14,400	63	52	23	25	Grind - ARHM Overlay	$81,072
2027-28	1083	742	Stevens Street	North End	Palm Avenue	AC	E	2	335	32	10,720	77	40	51	9	Type II Slurry Seal	$6,003
2027-28	1109	783	Sycamore Avenue	Cypress Street	Lemon Street	AC	E	2	295	31	9,145	28	62	25	13	Grind - ARHM Overlay	$51,486
2027-28	1153	1381	Van Owen Avenue	Harding Street	East End	AAC	E	2	340	32	10,880	82	0	100	0	Type II Slurry Seal	$6,093
2027-28	1153	2170	Van Owen Avenue	Tustin Street	East End	AC	E	2	850	37	31,450	46	45	40	15	Grind - ARHM Overlay	$177,064
2027-28	1230	1095	Wilson Avenue	Shaffer Street	Cambridge Street	AC	E	2	1,275	31	39,525	72	60	27	13	Type II Slurry Seal	$22,134
2027-28	1230	1196	Wilson Avenue	Lemon Street	Glassell Street	AAC	E	2	595	31	18,445	80	21	79	0	Type II Slurry Seal	$10,329
																	$5,469,594
2028-29	65	2203	Alpine Road	Orangegrove Avenue	Orangewood Avenue	AAC	I	2	375	44	16,500	80	59	39	2	Type II Slurry Seal	$9,570
2028-29	65	820	Alpine Road	Culver Avenue	La Veta Avenue	AC	E	2	625	32	20,000	68	28	27	45	Type II Slurry Seal	$11,600
2028-29	78	2207	Angus Avenue	Batavia Street	Hariton Street	AC	I	2	1,075	44	47,300	71	27	57	16	Type II Slurry Seal	$27,434
2028-29	156	2225	Braden Court	West End	Main Street	AC	I	2	635	44	27,940	27	53	47	0	AC Recon	$490,068
2028-29	191	2242	Business Center Drive	Collins Avenue	Commerce Street	AC	I	2	805	44	35,420	47	52	48	0	Grind - ARHM Overlay	$207,207
2028-29	198	2505	California Street	Mayfair Avenue	Walnut Avenue	AC	E	2	1,250	32	40,000	83	33	49	18	Type II Slurry Seal	$23,200
2028-29	229	2490	Carrie Avenue	Sacramento Street	Markwood Street	AC	E	2	310	32	9,920	82	0	96	4	Type II Slurry Seal	$5,754
2028-29	281	1314	Clinton Street	Rose Avenue	South End	AC	E	2	230	31	8,230	67	18	75	7	Grind - ARHM Overlay	$48,146
2028-29	281	1323	Clinton Street	North End	Madison Avenue	AC	E	2	310	31	10,660	77	0	73	27	Type II Slurry Seal	$6,183
2028-29	291	2243	Commerce Street	Collins Avenue	Business Center Drive	AC	I	2	370	44	16,280	55	20	74	6	Grind - ARHM Overlay	$95,238
2028-29	331	2190	Cypress Street	Almond Avenue	Palmyra Avenue	AAC	E	2	615	36	22,140	78	0	15	85	Type II Slurry Seal	$12,841
2028-29	331	2196	Cypress Street	Collins Avenue	1340' s/o Collins Avenue	AC	I	2	1,340	36	48,240	54	44	56	0	Grind - ARHM Overlay	$282,204
2028-29	331	2197	Cypress Street	1340' s/o Collins Avenue	Walnut Avenue	AC	I	2	1,235	38	46,930	58	35	65	0	Grind - ARHM Overlay	$274,541
2028-29	331	2198	Cypress Street	Sycamore Avenue	Palm Avenue	AC	I	2	630	36	22,680	83	0	100	0	Type II Slurry Seal	$13,154
2028-29	331	2404	Cypress Street	Chapman Avenue	Almond Avenue	PCC	E	2	620	40	24,800	50	54	16	30	PCC Repair	$9,920
2028-29	331	2405	Cypress Street	Maple Avenue	Chapman Avenue	PCC	E	2	610	40	24,400	53	68	17	15	PCC Repair	$9,760
2028-29	331	2406	Cypress Street	Palm Avenue	Maple Avenue	PCC	E	2	620	40	24,800	49	64	11	25	PCC Repair	$9,920
2028-29	389	2205	Elm Street	Collins Avenue	South End	AAC	I	2	395	44	17,380	85	0	33	67	Type II Slurry Seal	$10,080
2028-29	392	2268	Emerald Drive	Walnut Avenue	Cherry Drive	AC	E	2	440	30	13,200	84	0	83	17	Type II Slurry Seal	$7,656
2028-29	407	1319	Everett Avenue	Markwood Street	East End	AAC	E	2	85	40	3,400	81	0	98	2	Type II Slurry Seal	$1,972
2028-29	408	1100	Everett Place	Cambridge Street	California Street	AAC	E	2	1,280	31	39,680	72	5	95	0	Type II Slurry Seal	$23,014
2028-29	408	1101	Everett Place	California Street	Lincoln Avenue	AAC	E	2	620	31	19,220	68	0	24	76	Type II Slurry Seal	$11,148
2028-29	408	1102	Everett Place	Lincoln Avenue	East End	AC	E	2	295	31	9,145	79	0	100	0	Type II Slurry Seal	$5,304
2028-29	428	1298	Fern Street	Walnut Avenue	Handy Street	AC	E	2	1,180	31	36,580	81	0	98	2	Type II Slurry Seal	$21,216
2028-29	428	1362	Fern Street	North End	Athens Avenue	AAC	E	2	190	32	6,080	81	55	38	7	Type II Slurry Seal	$3,526
2028-29	428	1397	Fern Street	Collins Avenue	Mayfair Avenue	AC	E	2	930	32	29,760	76	0	98	2	Type II Slurry Seal	$17,261
2028-29	428	1398	Fern Street	Mayfair Avenue	Rose Avenue	AC	E	2	765	32	24,480	73	0	99	1	Type II Slurry Seal	$14,198
2028-29	516	1850	Grove Avenue	Sacramento Street	Agate Street	AC	E	2	930	32	30,260	79	59	41	0	Type II Slurry Seal	$17,551
2028-29	516	2182	Grove Avenue	Glassell Street	East End	AC	I	2	225	44	11,050	72	60	40	0	Type II Slurry Seal	$6,409
2028-29	516	2253	Grove Avenue	Batavia Street	1710' E Batavia Street	AAC	I	2	1,710	44	75,240	84	36	44	20	Type II Slurry Seal	$43,639
2028-29	516	2254	Grove Avenue	1710' E Batavia Street	Glassell Street	AAC	I	2	910	44	31,850	63	72	15	13	Grind - ARHM Overlay	$186,323
2028-29	533	2129	Harwood Street	North End	Meats Avenue Frontage Road	AAC	E	2	595	31	18,445	85	0	73	27	Type II Slurry Seal	$10,698
2028-29	533	2420	Harwood Street	Maple Avenue	Chapman Avenue	PCC	E	2	605	34	20,570	58	68	17	15	PCC Repair	$8,228
2028-29	533	2421	Harwood Street	Palm Avenue	Maple Avenue	PCC	E	2	615	34	20,910	47	62	9	29	PCC Repair	$8,364
2028-29	533	918	Harwood Street	Chapman Avenue	Almond Avenue	AAC	E	2	615	33	20,295	46	48	42	10	Grind - ARHM Overlay	$118,726
2028-29	555	3467	Highland Street	Mayfair Avenue	Rose Avenue	AC	E	2	595	31	18,445	78	25	58	17	Type II Slurry Seal	$10,698
2028-29	612	1403	Kathleen Street	Collins Avenue	Mayfair Avenue	AC	E	2	1,170	36	42,120	67	44	43	13	Grind - ARHM Overlay	$246,402
2028-29	612	1500	Kathleen Street	Chapman Avenue	Palmyra Avenue	AAC	E	2	1,275	32	40,800	83	12	70	18	Type II Slurry Seal	$23,664
2028-29	681	1157	Lomita Avenue	Glassell Street	Grand Street	AC	E	2	615	33	20,295	55	55	33	12	Grind - ARHM Overlay	$118,726

FY	BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
2028-29	681	1158	Lomita Avenue	Grand Street	Shaffer Street	AC	E	2	625	32	20,000	77	0	33	67	Type II Slurry Seal	$11,600
2028-29	681	1316	Lomita Avenue	Adelle Street	Kathleen Street	AC	E	2	220	32	7,040	73	42	58	0	Type II Slurry Seal	$4,083
2028-29	697	1124	Lynn Drive	Collins Avenue	South End	AC	E	2	300	31	10,900	80	10	90	0	Type II Slurry Seal	$6,322
2028-29	700	1114	Madison Avenue	California Street	Lincoln Avenue	AC	E	2	610	31	18,910	85	0	100	0	Type II Slurry Seal	$10,968
2028-29	707	1337	Malena Street	Orange Grove Avenue	Walnut Avenue	AC	E	2	540	32	17,280	66	0	60	40	Grind - ARHM Overlay	$101,088
2028-29	728	1318	Markwood Street	Oakmont Avenue	Carie Avenue	AC	E	2	615	32	19,680	77	7	82	11	Type II Slurry Seal	$11,414
2028-29	728	1325	Markwood Street	Carrie Avenue	Hamilton Avenue	AC	E	2	385	32	12,320	72	0	92	8	Type II Slurry Seal	$7,146
2028-29	734	1106	Mayfair Avenue	Cambridge Street	California Street	AC	E	2	1,280	32	40,960	68	53	47	0	Type II Slurry Seal	$23,757
2028-29	734	1107	Mayfair Avenue	California Street	Lincoln Avenue	AAC	E	2	625	31	19,375	86	0	67	33	Type II Slurry Seal	$11,238
2028-29	734	1268	Mayfair Avenue	Tustin Street	Highland Street	AC	E	2	1,035	31	32,085	65	51	36	13	Grind - ARHM Overlay	$187,697
2028-29	788	2206	Nicholas Avenue	Batavia Street	Hartition Street	AC	I	2	1,075	34	36,550	21	88	12	0	AC Recon	$641,087
2028-29	807	1103	Oakmont Avenue	Cambridge Street	Maplewood Street	AC	E	2	620	31	19,220	55	64	34	2	Grind - ARHM Overlay	$112,437
2028-29	807	1104	Oakmont Avenue	Maplewood Street	California Street	AC	E	2	620	32	19,840	67	7	73	20	Grind - ARHM Overlay	$116,064
2028-29	807	1143	Oakmont Avenue	Grand Street	East End	AC	E	2	465	32	15,930	58	44	30	26	Grind - ARHM Overlay	$93,191
2028-29	807	1317	Oakmont Avenue	130' w/o Markewood	Handy Street	AC	E	2	985	31	30,535	64	60	38	2	Grind - ARHM Overlay	$178,630
2028-29	816	781	Olive Street	Rose Avenue	Walnut Avenue	AC	E	2	650	36	23,400	65	50	50	0	Grind - ARHM Overlay	$136,890
2028-29	823	1116	Orangegrove Avenue	Maplewood Street	California Street	AC	E	2	555	31	17,205	77	19	81	0	Type II Slurry Seal	$9,979
2028-29	823	1286	Orangegrove Avenue	Tustin Street	Wayfield Street	AC	E	2	475	32	15,200	78	32	58	10	Type II Slurry Seal	$8,816
2028-29	823	1297	Orangegrove Avenue	West End (near Park Lane)	East End	AC	E	2	630	32	24,543	69	45	40	15	Type II Slurry Seal	$14,235
2028-29	823	1308	Orangegrove Avenue	Sacramento Street	East End	AC	E	2	215	31	7,715	77	0	68	32	Type II Slurry Seal	$4,475
2028-29	823	1336	Orangegrove Avenue	Handy Street	Hart Street	AAC	E	2	755	31	23,405	73	0	99	1	Type II Slurry Seal	$13,575
2028-29	823	1338	Orangegrove Avenue	Malena Street	East End	AC	E	2	460	32	15,770	63	0	46	54	Grind - ARHM Overlay	$92,255
2028-29	891	2240	Poplar Street	North End	Orangewood Avenue	AC	I	2	1,475	44	64,900	68	15	81	4	Type II Slurry Seal	$37,642
2028-29	891	737	Poplar Street	North End	Maple Avenue	AC	E	2	230	32	7,360	82	10	66	24	Type II Slurry Seal	$4,269
2028-29	960	1117	Rose Avenue	Cambridge Street	California Street	AAC	E	2	1,280	32	40,960	81	0	96	4	Type II Slurry Seal	$23,757
2028-29	960	1119	Rose Avenue	Lincoln Avenue	East End	AC	E	2	295	31	9,145	66	57	43	0	Grind - ARHM Overlay	$53,498
2028-29	960	1287	Rose Avenue	Tustin STreet	Highland Street	AC	E	2	1,150	31	35,650	74	25	75	0	Type II Slurry Seal	$20,677
2028-29	1021	2241	Sequoia Avenue	Eckhoff Street	Popular Street	AC	I	2	890	44	39,160	25	83	9	8	AC Recon	$686,866
2028-29	1197	1123	Waverly Street	Collins Avenue	Oakmont Avenue	AC	E	2	825	31	25,575	69	47	53	0	Type II Slurry Seal	$14,834
2028-29	1217	2029	White Spring Lane	Shadow Ridge Lane	East End	AC	E	2	440	32	15,580	80	0	57	43	Type II Slurry Seal	$9,036
2028-29	1232	2094	Windes Drive	Highpoint Road	Santiago Canyon Road	AC	E	2	990	39	27,720	80	0	88	12	Type II Slurry Seal	$16,078
2028-29	1232	2095	Windes Drive	Grovewood Lane	Highpoint Road	AC	E	2	550	28	15,400	70	0	80	20	Type II Slurry Seal	$8,932
2028-29	1232	2096	Windes Drive	Lewis Street	Grovewood Lane	AC	E	2	860	18	15,480	72	0	74	26	Type II Slurry Seal	$8,978
2028-29	1232	2097	Windes Drive	Lewis Street	535' n/o Lewis Drive	AC	E	2	535	19	10,165	78	0	68	32	Type II Slurry Seal	$5,896
																	$5,138,950
2029-30	3	789	Acacia Avenue	Jewell Place	Lime Street	AC	E	2	435	32	13,920	64	0	93	7	Grind - ARHM Overlay	$84,773
2029-30	118	2428	Beaton Way	Donnybrooke Street	East End	AC	E	2	170	31	6,320	69	74	26	0	Type II Slurry Seal	$3,855
2029-30	127	627	Beverly Drive	Sycamore Avenue	East End	AAC	E	2	1,265	36	45,540	83	0	48	52	Type II Slurry Seal	$27,779
2029-30	127	628	Beverly Drive	Main Street	Crescent Drive	AC	E	2	550	32	17,600	81	0	23	77	Type II Slurry Seal	$10,736
2029-30	190	2515	Bush Street	North End	Almond Avenue	AC	E	2	400	32	12,800	61	46	53	1	Grind - ARHM Overlay	$77,952
2029-30	190	2516	Bush Street	Almond Avenue	Palmyra Place	AC	E	2	470	31	14,570	53	42	49	9	Grind - ARHM Overlay	$88,731
2029-30	190	2517	Bush Street	Stewart Drive	Providence Avenue	AC	I	2	315	33	10,395	75	79	17	4	Type II Slurry Seal	$6,341
2029-30	242	2527	Center Street	530' N Walnut Avenue	Walnut Avenue	AC	E	2	530	20	10,600	79	63	37	0	Type II Slurry Seal	$6,466
2029-30	276	2440	Clark Street	North End	Maple Avenue	AC	E	2	460	36	18,060	76	0	100	0	Type II Slurry Seal	$11,017
2029-30	358	750	Donneybrooke Street	Sycamore Avenue	Palm Avenue	AC	E	2	585	32	18,720	86	10	82	8	Type II Slurry Seal	$11,419
2029-30	358	751	Donneybrooke Street	Palm Avenue	South End	AC	E	2	1,055	32	34,810	80	46	33	21	Type II Slurry Seal	$21,234
2029-30	426	744	Feldner Road	Maple Avenue	Chapman Avenue	AC	E	2	605	30	18,150	72	56	36	8	Type II Slurry Seal	$11,072
2029-30	426	792	Feldner Road	Almond Avenue	Palmyra Avenue	AAC	E	2	700	32	22,400	81	13	84	3	Type II Slurry Seal	$13,664
2029-30	435	736	Fir Street	Maple Avenue	South End	AAC	E	2	360	32	11,520	83	0	95	5	Type II Slurry Seal	$7,027
2029-30	445	727	Flower Street	Maple Avenue	Chapman Avenue	AC	E	2	600	32	19,200	50	69	16	15	Grind - ARHM Overlay	$116,928
2029-30	445	728	Flower Street	North End	Maple Avenue	AC	E	2	450	32	14,400	72	46	37	17	Type II Slurry Seal	$8,784
2029-30	445	729	Flower Street	North End	Palm Avenue	AC	E	2	335	32	10,720	59	57	37	6	Grind - ARHM Overlay	$65,285
2029-30	455	2272	Frampton Street	Palm Avenue	South End	AAC	E	2	170	32	6,490	74	0	84	16	Type II Slurry Seal	$3,959
2029-30	545	735	Hemlock Street	Willow Avenue	South End	AC	E	2	220	32	7,040	70	36	61	3	Type II Slurry Seal	$4,294
2029-30	594	1134	Jefferson Avenue	Shaffer Street	Harwood Street	AC	E	2	625	32	20,000	52	76	24	0	Grind - ARHM Overlay	$121,800
2029-30	661	788	Lester Drive	Maple Avenue	Chapman Avenue	AC	E	2	605	34	20,570	83	16	84	0	Type II Slurry Seal	$12,548
2029-30	669	1112	Lincoln Street	Madison Avenue	Walnut Avenue	AAC	E	2	270	31	8,370	75	63	37	0	Type II Slurry Seal	$5,106
2029-30	669	1121	Lincoln Street	Walnut Avenue	Palm Avenue	AC	E	2	1,265	32	40,480	60	64	31	5	Grind - ARHM Overlay	$246,523
2029-30	715	1026	Maple Avenue	California Street	Shattuck Place	AC	E	2	865	38	32,870	77	29	71	0	Type II Slurry Seal	$20,051
2029-30	715	2394	Maple Avenue	Glassell Street	Shaffer Street	PCC	I	2	1,270	40	50,800	52	67	16	17	PCC Repair	$20,320
2029-30	715	2412	Maple Avenue	Shaffer Street	Cambridge Street	PCC	E	2	1,320	40	52,800	50	57	16	27	PCC Repair	$21,120
2029-30	715	2853	Maple Avenue	Eckhoff Street	Feldner Road	AAC	E	2	1,315	36	47,340	66	53	47	0	Grind - ARHM Overlay	$288,301
2029-30	715	746	Maple Avenue	Bitterbush Street	Eckhoff Street	AC	E	2	905	36	32,580	67	69	25	6	Grind - ARHM Overlay	$198,412

FY	BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
2029-30	715	765	Maple Avenue	Feldner Road	Main Street	AAC	E	2	1,185	37	43,845	53	72	28	0	Grind - ARHM Overlay	$267,016
2029-30	715	766	Maple Avenue	Main Street	Lime Street	AC	E	2	730	32	23,360	86	17	83	0	Type II Slurry Seal	$14,250
2029-30	715	767	Maple Avenue	Lime Street	Batavia Street	AC	E	2	645	36	23,220	80	12	79	9	Type II Slurry Seal	$14,164
2029-30	1321	3193	Nicky Way	Santiago Canyon Road	506' s/o Santiago Canyon Road	AC	E	2	506	20	10,120	58	60	27	13	Grind - ARHM Overlay	$61,631
2029-30	799	2610	Notre Dame Avenue	Canyon View Avenue	Dove Lane	AC	E	2	215	32	6,880	53	0	75	25	Grind - ARHM Overlay	$41,899
2029-30	802	1173	Nutwood Street	Donna Avenue	South End	AC	E	2	320	32	10,990	71	10	74	16	Type II Slurry Seal	$6,704
2029-30	813	2609	Old Chapman Road	North End	Canyon View Avenue	AC	E	2	505	28	14,890	65	0	99	1	Grind - ARHM Overlay	$90,680
2029-30	845	731	Palm Avenue	Donneybrooke Street	Eckhoff Street	AC	E	2	1,200	32	38,400	68	69	31	0	Type II Slurry Seal	$23,424
2029-30	845	786	Palm Avenue	Main Street	Batavia Street	AC	E	2	1,370	39	53,430	75	0	100	0	Type II Slurry Seal	$32,592
2029-30	845	787	Palm Avenue	Batavia Street	Cypress St	AC	E	2	1,310	37	49,210	80	25	71	4	Type II Slurry Seal	$30,018
2029-30	846	785	Palm Drive	Main Street	Maple Avenue	AC	E	2	905	37	33,485	59	74	15	11	Grind - ARHM Overlay	$203,924
2029-30	918	1998	Randall Street	Mustang Avenue	Kennymead Avenue	AC	E	1	334	16	5,844	76	0	65	35	Type II Slurry Seal	$3,565
2029-30	918	3179	Randall Street	Meads Avenue	Mustang Avenue	AC	E	1	795	16	12,720	72	23	35	42	Type II Slurry Seal	$7,759
2029-30	937	1867	Riding Way	Villa Vista Way	Santiago Boulevard	AAC	E	2	1,085	32	34,720	79	0	100	0	Type II Slurry Seal	$21,179
2029-30	1029	1153	Shaffer Street	Walnut Avenue	Palm Avenue	AC	E	2	1,255	34	42,670	72	23	46	31	Type II Slurry Seal	$26,029
2029-30	1029	2174	Shaffer Street	Katella Avenue	Hoover Avenue	AC	I	2	315	37	11,655	78	0	100	0	Type II Slurry Seal	$7,110
2029-30	1029	2415	Shaffer Street	Palm Avenue	Maple Avenue	PCC	E	2	620	34	21,080	45	67	10	23	PCC Repair	$8,432
2029-30	1032	1141	Shattuck Place	Walnut Avenue	Palm Avenue	AC	E	2	1,260	32	40,320	70	38	61	1	Type II Slurry Seal	$24,595
2029-30	1109	782	Sycamore Avenue	Lemon Street	Glassell Street	AC	E	2	620	32	19,840	65	63	33	4	Grind - ARHM Overlay	$120,826
2029-30	1109	784	Sycamore Avenue	Main Street	Batavia Street	AC	E	2	1,365	31	42,315	74	32	67	1	Type II Slurry Seal	$25,812
2029-30	1197	1032	Waverly Street	Palm Avenue	Maple Avenue	AC	E	2	610	34	20,740	55	32	39	29	Grind - ARHM Overlay	$126,307
2029-30	1187	2162	Wayfield Circle	North End	Chapman Avenue	AC	I	2	665	32	22,330	59	54	29	17	Grind - ARHM Overlay	$135,990
																	$2,809,401
2030-31	119	2185	Bedford Road	La Veta Avenue	Bronson Avenue	AAC	I	2	630	45	28,350	84	50	27	23	Type II Slurry Seal	$17,861
2030-31	119	2448	Bedford Road	Culver Avenue	La Veta Avenue	AC	E	2	630	31	19,530	77	40	59	1	Type II Slurry Seal	$12,304
2030-31	119	2449	Bedford Road	Palmyra Avenue	Culver Avenue	AC	E	2	605	40	24,200	84	3	59	38	Type II Slurry Seal	$15,246
2030-31	129	862	Binnacle Street	Jetty Circle	East End	AC	E	2	510	32	16,128	56	55	44	1	Grind - ARHM Overlay	$102,090
2030-31	234	2424	Castle Circle	Almond Avenue	South End	AAC	E	2	200	30	7,050	67	43	56	1	Grind - ARHM Overlay	$44,627
2030-31	253	2626	Chapman Frontage Road	Jetty Drive	East End	AC	E	2	470	28	13,910	39	54	38	8	Grind - ARHM Overlay	$88,050
2030-31	276	2442	Clark Street	North End	Walnut Avenue	AC	E	2	310	33	10,230	85	0	100	0	Type II Slurry Seal	$6,445
2030-31	276	2443	Clark Street	Chapman Avenue	Almond Avenue	AC	E	2	620	36	22,320	77	0	75	25	Type II Slurry Seal	$14,062
2030-31	287	2244	Collins Avenue	West End	Eckhoff Street	AC	I	2	290	50	8,700	50	42	31	27	Grind - ARHM Overlay	$55,071
2030-31	290	2579	Columbia Place	Main Street	East End	AC	E	2	135	32	4,320	58	83	13	4	Grind - ARHM Overlay	$27,346
2030-31	305	2028	Cottage Hill Drive	White Spring Lane	South End	AC	E	2	575	36	22,200	80	29	45	26	Type II Slurry Seal	$13,986
2030-31	306	1692	Cottonwood Street	East End	Crystal View Avenue	AC	E	2	525	32	16,800	77	42	52	6	Type II Slurry Seal	$10,584
2030-31	306	2466	Cottonwood Street	Brookshire Avenue	Woodstock Avenue	AAC	E	2	840	32	26,880	82	44	32	24	Type II Slurry Seal	$16,934
2030-31	320	795	Crest Road	La Veta Avenue	Bronson Avenue	AC	E	2	600	32	19,200	63	70	25	5	Grind - ARHM Overlay	$121,536
2030-31	328	707	Culver Avenue	Devon Road	Crest Road	AC	E	2	265	32	7,840	33	63	35	2	Grind - ARHM Overlay	$49,627
2030-31	328	708	Culver Avenue	Flower Street	Devon Road	AC	E	2	1,415	32	45,280	55	65	33	2	Grind - ARHM Overlay	$286,622
2030-31	328	802	Culver Avenue	Lemon Street	Glassell Street	AC	E	2	620	30	18,600	78	0	100	0	Type II Slurry Seal	$11,718
2030-31	328	972	Culver Avenue	Alpine Street	Main Street	AC	E	2	420	40	16,800	81	37	61	2	Type II Slurry Seal	$10,584
2030-31	328	973	Culver Avenue	Bedford Road	Alpine Street	AC	E	2	240	40	9,600	82	39	55	6	Type II Slurry Seal	$6,048
2030-31	328	974	Culver Avenue	Crest Road	Bedford Road	AC	E	2	290	32	9,280	79	56	44	0	Type II Slurry Seal	$5,846
2030-31	351	704	Devon Road	La Veta Avenue	Bronson Avenue	AC	E	2	605	32	19,360	66	64	33	3	Grind - ARHM Overlay	$122,549
2030-31	351	705	Devon Road	Culver Avenue	La Veta Avenue	AC	E	2	620	32	19,840	68	71	18	11	Type II Slurry Seal	$12,499
2030-31	351	706	Devon Road	Palmyra Avenue	Culver Avenue	AC	E	2	620	32	19,840	73	81	10	9	Type II Slurry Seal	$12,499
2030-31	355	1673	Dixon Avenue	Olympia Way	East End	AC	E	2	150	32	5,900	69	0	100	0	Type II Slurry Seal	$3,717
2030-31	544	14663	Heim Avenue	Orange-Olive Road	Torres Street	AC	E	2	1,571	36	56,556	64	34	32	34	Grind - ARHM Overlay	$357,999
2030-31	555	2168	Highland Street	Coral Avenue	Taft Avenue	AC	I	2	1,980	30	63,400	53	63	23	14	Grind - ARHM Overlay	$401,322
2030-31	555	3224	Highland Street	Coral Ave	North End	AC	E	2	1,076	32	37,232	55	60	30	10	Grind - ARHM Overlay	$235,679
2030-31	596	2883	Jetty Drive	Sirius Avenue	Chapman Avenue	AAC	E	2	725	33	23,325	71	61	30	9	Type II Slurry Seal	$14,695
2030-31	646	699	Larkspur Drive	Flower Street	Poinsettia Drive	AC	E	2	715	32	22,880	62	68	31	1	Grind - ARHM Overlay	$144,830
2030-31	663	2322	Lewis Street	North End	El Prado Avenue	AC	E	2	420	36	16,920	46	61	39	0	Grind - ARHM Overlay	$107,104
2030-31	663	2324	Lewis Street	Lewis Street	South End	AC	E	2	650	36	22,600	52	48	33	19	Grind - ARHM Overlay	$143,058
2030-31	663	3443	Lewis Street	Windes Dr	East End	AC	E	2	779	25	15,170	86	0	79	21	Type II Slurry Seal	$9,557
2030-31	693	712	Louise Place	Almond Ave	South End	AC	E	2	180	32	6,810	36	53	46	1	Grind - ARHM Overlay	$43,107
2030-31	711	2844	Manchester Avenue	City Boulevard West	Chapman Avenue	AAC	I	5	1,225	92	112,700	74	56	29	15	Type II Slurry Seal	$71,001
2030-31	723	804	Marietta Avenue	Clark Street	East End	AC	E	2	110	32	4,570	73	24	76	0	Type II Slurry Seal	$2,879
2030-31	833	711	Orchard Avenue	Flower Street	East End	AC	E	2	635	32	20,320	67	33	56	11	Grind - ARHM Overlay	$128,626
2030-31	848	796	Palmyra Avenue	Main Street	Lime Street	AC	E	2	910	32	29,120	74	0	44	56	Type II Slurry Seal	$18,346
2030-31	848	797	Palmyra Avenue	Lime Street	Batavia Street	AC	E	2	710	32	22,720	82	0	83	17	Type II Slurry Seal	$14,314
2030-31	867	811	Paul Road	Feldner Road	210' e/o Feldner Road	AC	E	2	210	32	6,720	63	0	66	34	Grind - ARHM Overlay	$42,538
2030-31	887	710	Plum Lane	Culver Avenue	Orchard Avenue	AAC	E	2	350	32	11,200	62	49	51	0	Grind - ARHM Overlay	$70,896

FY	BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
2030-31	903	2482	Providence Avenue	Main Street	Bush Street	AC	I	2	290	31	8,990	52	73	27	0	Grind - ARHM Overlay	$56,907
2030-31	1047	715	Silktree Circle	La Veta Avenue	South End	AC	E	2	240	32	7,680	77	29	64	7	Type II Slurry Seal	$4,838
2030-31	1051	578	Sirius Avenue	Spinnaker Street	Lewis Street	AC	E	2	795	33	26,043	65	44	49	7	Grind - ARHM Overlay	$164,852
2030-31	1051	579	Sirius Avenue	City Limit	Spinnaker Street	AC	E	2	1,150	32	36,416	67	35	65	0	Grind - ARHM Overlay	$230,513
2030-31	1080	1166	Stay Court	Jetty Drive	East End	AC	E	2	135	33	5,955	54	62	38	0	Grind - ARHM Overlay	$37,695
2030-31	1084	2186	Stewart Drive	Main Street	Bush Street	AAC	I	2	330	42	13,860	74	63	34	3	Type II Slurry Seal	$8,732
2030-31	1127	576	Tiller Avenue	Halyard Lane	Spinnaker Street	AC	E	2	930	33	31,190	74	28	72	0	Type II Slurry Seal	$19,650
2030-31	1127	577	Tiller Avenue	Spinnaker Street	Lewis Street	AC	E	2	680	33	22,242	76	24	76	0	Type II Slurry Seal	$14,012
2030-31	1191	808	Washington Avenue	Clark Street	East End	AC	E	2	110	32	4,570	60	52	48	0	Grind - ARHM Overlay	$28,928
																	$3,439,929
2031-32	13	842	Alderwood Avenue	West End	Pinewood Street	AAC	E	2	160	32	5,120	66	0	100	0	Grind - ARHM Overlay	$33,690
2031-32	92	1869	Aspen Street	North End	Canyon View Ave	AC	E	2	515	36	20,338	47	40	60	0	Grind - ARHM Overlay	$133,824
2031-32	110	636	Barkley Street	Hart Street	East End	AC	E	2	500	32	16,000	64	17	82	1	Grind - ARHM Overlay	$105,280
2031-32	115	593	Bayberry Street	North End	Sprucewood Avenue	AC	E	2	220	32	8,838	64	82	18	0	Grind - ARHM Overlay	$58,154
2031-32	116	2248	Baywood Avenue	South End	Glassell Street	AC	I	2	640	44	28,160	44	66	29	5	Grind - ARHM Overlay	$185,293
2031-32	120	631	Beechwood Street	Woodstock Avenue	Fletcher Avenue	AAC	E	2	395	32	12,640	78	51	47	2	Type II Slurry Seal	$7,584
2031-32	120	632	Beechwood Street	Dunton Avenue	Crystal View Avenue	AC	E	2	615	32	19,680	58	76	20	4	Grind - ARHM Overlay	$129,494
2031-32	121	608	Belbrook Street	Amber Avenue	Glendora Avenue	AAC	E	2	500	32	16,000	65	48	27	25	Grind - ARHM Overlay	$105,280
2031-32	122	601	Bennett Avenue	West End	Malena Street	AC	E	2	135	32	5,820	66	0	100	0	Grind - ARHM Overlay	$38,296
2031-32	146	618	Bolingridge Drive	Northwest End	Hillview Drive	AC	E	2	1,000	32	32,000	82	20	80	0	Type II Slurry Seal	$19,200
2031-32	174	2247	Bristol Lane	West End	Glassell Street	AC	I	2	520	44	22,880	33	55	34	11	Grind - ARHM Overlay	$150,550
2031-32	224	2423	Carmen Circle	Almond Avenue	South End	AAC	E	2	200	30	7,050	62	51	48	1	Grind - ARHM Overlay	$46,389
2031-32	289	1866	Colorado Lane	North End	Villa Vista Way	AC	E	2	100	32	3,200	71	56	44	0	Type II Slurry Seal	$1,920
2031-32	297	1370	Coolidge Avenue	Sacramento Street	Handy Street	AAC	E	2	925	31	28,675	81	56	44	0	Type II Slurry Seal	$17,205
2031-32	315	1887	Creekside Avenue	Cannon Street	Singingwood Street	AC	E	2	1,320	36	47,520	64	46	22	32	Grind - ARHM Overlay	$312,682
2031-32	318	2561	Crest De Ville Avenue	Goldenrod Lane	South End	AC	E	2	460	36	18,060	57	0	100	0	Grind - ARHM Overlay	$118,835
2031-32	332	1304	Dana Avenue	Milford Street	East End	AC	E	2	360	31	12,210	54	30	70	0	Grind - ARHM Overlay	$80,342
2031-32	348	1711	Delta Street	St. James Avenue	South End	AAC	E	2	140	31	4,340	67	78	22	0	Grind - ARHM Overlay	$28,557
2031-32	366	1704	Dunbar Street	Greenleaf Avenue	South End	AAC	E	2	125	31	3,875	62	43	57	0	Grind - ARHM Overlay	$25,498
2031-32	366	2157	Dunbar Street	North End	Heim Avenue	AAC	E	2	580	32	18,560	86	14	76	10	Type II Slurry Seal	$11,136
2031-32	367	1709	Dunfield Street	St. James Avenue	South End	AC	E	2	230	31	7,130	58	43	44	13	Grind - ARHM Overlay	$46,915
2031-32	374	2246	Eckhoff Street	North End	Collins Avenue	AC	I	2	530	36	19,080	64	41	39	20	Grind - ARHM Overlay	$125,546
2031-32	381	2055	El Rito Drive	Rama Street	Cerro Villa Drive	AC	E	2	985	33	33,255	58	17	62	21	Grind - ARHM Overlay	$218,818
2031-32	500	1148	Grand Street	Rose Avenue	Walnut Avenue	AAC	E	2	595	37	22,015	86	0	60	40	Type II Slurry Seal	$13,209
2031-32	526	1306	Handy Street	Walnut Avenue	Palm Avenue	AC	E	2	1,280	31	39,680	85	0	74	26	Type II Slurry Seal	$23,808
2031-32	529	1360	Hart Street	Chestnut Avenue	Athens Avenue	AAC	E	2	420	32	13,440	84	0	67	33	Type II Slurry Seal	$8,064
2031-32	529	1525	Hart Street	Monroe Avenue	Collins Avenue	AAC	E	2	740	32	23,680	81	0	100	0	Type II Slurry Seal	$14,208
2031-32	585	2661	Irvine Park Road	Jamboree Road	1395' E Jamboree Road	AC	E	3	1,395	40	55,800	64	27	50	23	Grind - ARHM Overlay	$367,164
2031-32	628	1641	Kirkwood Avenue	Esplanade Street	Wesley Street	AC	E	2	345	32	11,540	61	39	58	3	Grind - ARHM Overlay	$75,933
2031-32	628	1648	Kirkwood Avenue	Earlham Street	Winthrope Street	AAC	E	2	540	32	17,780	77	0	65	35	Type II Slurry Seal	$10,668
2031-32	459	1453	La Veta Avenue (Frontage)	La Veta Avenue	East End	AC	E	2	665	32	21,280	55	0	100	0	Grind - ARHM Overlay	$140,022
2031-32	637	971	La Veta Park Circle	Parker Street	La Veta Avenue	AC	E	2	1,105	36	39,780	31	82	9	9	Grind - ARHM Overlay	$261,752
2031-32	659	959	Lemon Street	Palmyra Avenue	La Veta Avenue	AC	E	2	1,275	36	45,900	63	11	89	0	Grind - ARHM Overlay	$302,022
2031-32	659	960	Lemon Street	Almond Avenue	Palmyra Avenue	AC	E	2	625	36	22,500	64	16	78	6	Grind - ARHM Overlay	$148,050
2031-32	816	957	Olive Street	Palmyra Avenue	Culver Avenue	AC	E	2	610	36	21,960	49	58	14	28	Grind - ARHM Overlay	$144,497
2031-32	1109	1135	Sycamore Avenue	Shaffer Street	Center Street	AC	E	2	290	32	9,280	53	37	45	18	Grind - ARHM Overlay	$61,062
2031-32	1109	1136B	Sycamore Avenue	Hardwood Street	Cambridge Street	AAC	E	2	640	34	21,760	56	59	40	1	Grind - ARHM Overlay	$143,181
2031-32	1109	1137	Sycamore Avenue	Cambridge Street	Maplewood Street	AAC	E	2	660	41	27,060	78	0	100	0	Type II Slurry Seal	$16,236
2031-32	1109	1138	Sycamore Avenue	Maplewood Street	California Street	AAC	E	2	815	31	25,265	80	0	100	0	Type II Slurry Seal	$15,159
2031-32	1109	1300	Sycamore Avenue	Milford Street	Clinton Street	AC	E	2	300	31	9,300	81	0	98	2	Type II Slurry Seal	$5,580
2031-32	1186	535	Walnut Avenue	Park Lane	East End	AC	E	2	450	36	17,700	63	38	59	3	Grind - ARHM Overlay	$116,466
2031-32	1186	536	Walnut Avenue	West End	Milford Road	AC	E	2	700	37	28,400	73	0	88	12	Type II Slurry Seal	$17,040
2031-32	1197	995	Waverly Street	Palmyra Avenue	South End	AAC	E	2	235	32	8,570	43	22	29	49	Grind - ARHM Overlay	$56,391
2031-32	1227	734	Willow Avenue	Eckhoff Street	Sycamore Avenue	AC	E	2	1,485	32	47,520	62	55	41	4	Grind - ARHM Overlay	$312,682
2031-32	1230	1510	Wilson Avenue	Tustin Street	East End	AC	E	2	960	31	29,760	74	0	91	9	Type II Slurry Seal	$17,856
																	$4,271,538
2032-33	91	580	Ashwood Street	Brookshire Avenue	Redwood Avenue	AAC	E	2	1,120	32	35,840	83	12	78	10	Type II Slurry Seal	$24,371
2032-33	91	581	Ashwood Street	Dunton Avenue	Crystal Avenue	AC	E	2	730	32	23,360	66	40	43	17	Grind - ARHM Overlay	$160,016
2032-33	94	645	Athens Avenue	Harding Street	East End	AAC	E	2	220	32	7,040	70	9	77	14	Type II Slurry Seal	$4,787
2032-33	98	603	Austin Avenue	Olympia Way	East End	AC	E	2	150	32	5,900	69	0	99	1	Type II Slurry Seal	$4,012
2032-33	102	821	Avenida Palmar	Renee Street	Thora Street	AAC	E	2	603	32	19,296	77	43	52	5	Type II Slurry Seal	$13,121
2032-33	102	823	Avenida Palmar	Thora Street	Cannon Street	AAC	E	2	823	32	26,336	75	9	71	20	Type II Slurry Seal	$17,908
2032-33	108	612	Baldwin Avenue	Oceanview Street	East End	AAC	E	2	255	32	8,160	84	0	100	0	Type II Slurry Seal	$5,549

FY	BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
2032-33	108	613	Baldwin Avenue	Santa Anita Street	Santa Lucia Street	AC	E	2	705	32	22,560	82	0	100	0	Type II Slurry Seal	$15,341
2032-33	223	2213	Carleton Avenue	West End	Glassell Street	AC	I	2	435	44	19,140	38	53	25	22	Grind - ARHM Overlay	$131,109
2032-33	227	2493	Carolet Lane	North End	Craig Drive	AAC	E	2	175	32	7,100	75	0	87	13	Type II Slurry Seal	$4,828
2032-33	242	2401	Center Street	Chapman Avenue	Almond Avenue	PCC	E	2	610	40	24,400	58	63	11	26	PCC Repair	$9,760
2032-33	242	2523	Center Street	Culver Avenue	Plamyra Avenue	AAC	E	2	660	36	23,616	86	0	66	34	Type II Slurry Seal	$16,059
2032-33	242	2524	Center Street	Maple Avenue	South End	PCC	E	2	310	32	9,920	51	73	18	9	PCC Repair	$3,968
2032-33	242	2525	Center Street	Palm Avenue	Maple Avenue	PCC	E	2	600	32	19,200	46	52	11	37	PCC Repair	$7,680
2032-33	243	2498	Century Avenue	Esplanade Street	East End	AC	E	2	170	26	4,420	79	0	100	0	Type II Slurry Seal	$3,006
2032-33	243	2518	Century Avenue	Jamesson Street	Lincoln Avenue	AC	E	2	760	30	22,800	62	25	75	0	Grind - ARHM Overlay	$156,180
2032-33	271	2582	Circulo Way Pvt	Hewes Street	Espanita Street	AC	E	2	800	16	12,800	64	86	14	0	Grind - ARHM Overlay	$87,680
2032-33	328	1002	Culver Avenue	Gardner Drive	California Street	AAC	E	2	600	31	18,600	86	0	100	0	Type II Slurry Seal	$12,648
2032-33	328	1003	Culver Avenue	California Street	Greengrove Drive	AAC	E	2	325	31	10,075	85	15	70	15	Type II Slurry Seal	$6,851
2032-33	328	1004	Culver Avenue	Greengrove Drive	East End	AAC	E	2	335	31	11,435	82	0	55	45	Type II Slurry Seal	$7,776
2032-33	424	7700	Feather Hill Drive	Meadow Grove Rd	Meats Avenue	AC	E	2	986	36	35,496	61	60	24	16	Grind - ARHM Overlay	$243,148
2032-33	444	698	Flower Circle	La Veta Avenue	South End	AC	E	2	155	36	5,580	48	64	25	11	Grind - ARHM Overlay	$38,223
2032-33	458	2251	Freedom Avenue	West End	East End	AC	E	2	1,025	44	45,100	65	56	38	6	Grind - ARHM Overlay	$308,935
2032-33	468	1369	Garfield Avenue	Sacramento Street	Handy Street	AAC	E	2	875	33	28,875	81	0	100	0	Type II Slurry Seal	$19,635
2032-33	494	2563	Goldenrod Lane	Cannon Street	660' E Cannon Street	AC	E	2	660	36	23,460	60	5	93	2	Grind - ARHM Overlay	$160,701
2032-33	513	1633	Greenwood Avenue	Chipwood Street	Esplanade Street	AAC	E	2	500	31	15,500	83	0	64	36	Type II Slurry Seal	$10,540
2032-33	533	920	Harwood Street	Palmyra Avenue	Culver Avenue	AC	E	2	615	33	20,295	63	60	33	7	Grind - ARHM Overlay	$139,021
2032-33	598	1696	Jib Street	White Cap Avenue	South End	AAC	E	2	185	31	5,735	62	64	19	17	Grind - ARHM Overlay	$39,285
2032-33	603	2365	Jordan Avenue	Hewes Street	Esplanade Street	AC	E	2	1,295	37	47,915	65	12	71	17	Grind - ARHM Overlay	$328,218
2032-33	634	1643	La Mirada Street Pvt	Kirkwood Avenue	South End	AC	E	2	125	32	5,800	76	14	73	13	Type II Slurry Seal	$3,944
2032-33	638	1027	Lael Drive	California Street	East End	AC	E	2	545	32	17,440	59	58	23	19	Grind - ARHM Overlay	$119,464
2032-33	643	1385	Lakeside Avenue	Morningside Street	East End	AAC	E	2	325	31	11,575	87	17	78	5	Type II Slurry Seal	$7,871
2032-33	643	1387	Lakeside Avenue	Fern Street	East End	AC	E	2	1,000	32	33,800	62	0	100	0	Grind - ARHM Overlay	$231,530
2032-33	659	2216	Lemon Street	Hoover Avenue	Collins Avenue	AAC	I	2	1,860	36	66,960	82	33	43	24	Type II Slurry Seal	$45,533
2032-33	659	2396	Lemon Street	Chapman Avenue	Almond Avenue	PCC	E	2	610	40	24,400	70	37	19	44	PCC Repair	$9,760
2032-33	659	2402	Lemon Street	Maple Avenue	Palm Avenue	PCC	E	2	625	40	25,000	49	73	18	9	PCC Repair	$10,000
2032-33	700	1113	Madison Avenue	Maplewood Street	California Street	AC	E	2	490	31	15,190	60	43	57	0	Grind - ARHM Overlay	$104,052
2032-33	751	1290	Milford Street	Walnut Avenue	Sycamore Avenue	AC	E	2	905	31	28,055	78	27	54	19	Type II Slurry Seal	$19,077
2032-33	751	1291	Milford Street	Sycarmore Avenue	Sacramento Street	AC	E	2	1,185	31	36,735	86	0	79	21	Type II Slurry Seal	$24,980
2032-33	751	1321	Milford Street	Oakmont Avenue	Walnut Avenue	AC	E	2	1,805	31	55,955	63	47	51	2	Grind - ARHM Overlay	$383,292
2032-33	751	1379	Milford Street	North End	Chestnut Avenue	AC	E	2	135	32	5,420	78	40	51	9	Type II Slurry Seal	$3,686
2032-33	751	1505	Milford Street	Locust Avenue	Collins Avenue	AAC	E	2	490	31	15,190	80	49	51	0	Type II Slurry Seal	$10,329
2032-33	751	2894	Milford Street	Milford Street	East End #1	AC	E	2	95	30	3,850	66	55	45	0	Grind - ARHM Overlay	$26,373
2032-33	751	2916	Milford Street	Milford Street	East End #2	AC	E	2	95	30	3,850	62	55	45	0	Grind - ARHM Overlay	$26,373
2032-33	751	2947	Milford Street	Milford Street	East End #3	AC	E	2	95	30	3,850	58	58	41	1	Grind - ARHM Overlay	$26,373
2032-33	754	2146	Millbrae Street	Amber Avenue	Glendora Avenue	AC	E	2	470	32	15,040	73	56	43	1	Type II Slurry Seal	$10,227
2032-33	761	1508	Monroe Avenue	West End (near Highland St)	East End	AC	E	2	510	30	15,300	64	59	26	15	Grind - ARHM Overlay	$104,805
2032-33	767	1394	Morgan Street	Collins Avenue	Mayfair Avenue	AC	E	2	1,170	36	42,120	62	39	47	14	Grind - ARHM Overlay	$288,522
2032-33	828	929	Orange Street	River Avenue	South End	AC	E	2	300	25	7,500	86	0	95	5	Type II Slurry Seal	$5,100
2032-33	1335	8000	Weeping Willow Avenue	Shadyvale Street	Spicewood Street	AC	E	2	579	32	18,528	71	0	100	0	Type II Slurry Seal	$12,599
2032-33	1335	8001	Weeping Willow Avenue	Shadyvale Street	Sugarberry Street	AC	E	2	696	32	22,272	75	0	98	2	Type II Slurry Seal	$15,145
2032-33	1200	1487	Wellington Street	Ruth Place	La Veta Avenue	AC	E	2	275	32	9,300	64	0	99	1	Grind - ARHM Overlay	$63,705
2032-33	1201	1642	Wesley Street Pvt	Kirkwood Avenue	South End	AC	E	2	150	32	7,300	81	0	88	12	Type II Slurry Seal	$4,964
																	$3,538,057

XII. APPENDIX B – COMPLETE STREET LISTING CURRENT CONDITIONS

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
		Arterial / Collector (MPAH)															
64	2192	Almond Avenue	Batavia Street	Cypress Street	AC	C	2	1,660	39	60,471	5/13/26	65	50	37	13	New Construction - Initial	1/1/80
64	2397	Almond Avenue	Glassell Street	Shaffer Street	PCC	C	2	1,270	40	50,990	5/18/26	46	17	61	22	New Construction - Initial	1/1/80
64	2659	Almond Avenue	Cypress Street	Lemon Street	PCC	C	2	290	39	10,023	5/18/26	42	12	76	12	New Construction - Initial	1/1/80
64	2660	Almond Avenue	Lemon Street	Glassell Street	PCC	C	2	605	39	22,569	5/18/26	49	13	64	23	New Construction - Initial	1/1/80
74	3453	Anaheim Way	State College Boulevard	Orangewood Avenue	AC	B	3	1,650	33	55,605	5/13/26	74	59	35	6	New Construction - Initial	1/1/80
81	2644	Apache Creek Road	Sierra Vista Drive	Serrano Avenue	AC	C	2	1,295	30	41,632	5/26/26	95	100	0	0	Surface Treatment - Slurry Seal	6/1/20
113	121	Batavia Street	Taft Avenue	Railroad Tracks (s/o Taft Avenue)	AAC	B	5	1,180	60	72,534	5/21/26	77	69	31	0	Overlay - AC Structural	1/31/16
113	122	Batavia Street	Railroad Tracks	Katella Avenue	AC	B	5	1,270	60	76,494	5/21/26	71	68	31	1	New Construction - Initial	4/13/17
113	123	Batavia Street	Katella Avenue	Struck Avenue	AAC	B	4	1,095	60	68,763	5/21/26	77	60	34	6	Overlay - AC Structural	1/31/16
113	124	Batavia Street	Struck Avenue	Collins Avenue	AAC	B	4	1,339	60	77,968	4/2/26	98	100	0	0	Mill and Overlay	3/3/22
113	125	Batavia Street	Collins Avenue	Angus Avenue	AAC	B	4	1,280	60	76,778	5/20/26	95	100	0	0	Mill and Overlay	3/3/22
113	126	Batavia Street	Angus Avenue	Walnut Avenue	AAC	B	4	1,340	60	75,900	4/2/26	96	26	0	74	Overlay - AC Thin	1/1/96
113	127	Batavia Street	Walnut Avenue	Palm Avenue	AC	B	4	1,325	60	76,967	4/2/26	96	100	0	0	Surface Treatment - Slurry Seal	11/1/08
113	128A	Batavia Street	Palm Avenue	Maple Avenue	AC	B	4	647	60	39,441	4/2/26	97	100	0	0	Surface Treatment - Slurry Seal	1/1/92
113	128B	Batavia Street	Maple Avenue	Chapman Avenue	AC	B	4	647	60	36,297	4/2/26	68	100	0	0	New Construction - Initial	1/1/80
113	129	Batavia Street	Chapman Avenue	Palmyra Avenue	AC	C	2	1,300	38	50,776	4/3/26	83	55	0	45	New Construction - Initial	4/3/12
113	130	Batavia Street	Palmyra Avenue	La Veta Avenue	AC	C	2	1,300	32	61,593	4/3/26	83	64	0	36	New Construction - Initial	4/3/12
113	144	Batavia Street	Lincoln Avenue	Fletcher Avenue	AC	B	5	1,730	60	85,112	5/20/26	77	55	41	4	New Construction - Initial	4/3/12
113	145	Batavia Street	Fletcher Avenue	Southern Avenue	AAC	B	5	1,782	60	123,278	5/20/26	75	62	38	0	Overlay - AC Structural	8/1/16
113	146	Batavia Street	Southern Avenue	RR Crossing	AAC	B	5	1,490	60	95,063	5/20/26	74	61	39	0	Overlay - AC Structural	8/1/16
113	147	Batavia Street	RR Crossing	Grove Avenue (S)	AC	B	5	825	60	39,733	5/20/26	74	58	41	1	2 in Cold Mill & Overlay	5/8/07
113	148	Batavia Street	Grove Avenue (S)	Taft Avenue	AAC	B	5	1,260	60	70,093	5/21/26	62	43	46	11	2 in Cold Mill & Overlay	5/8/07
147	183	Bond Avenue	Prospect Street	Gravier Street	AC	B	4	185	48	8,220	5/7/26	85	100	0	0	New Construction - Initial	1/1/80
147	185	Bond Avenue	Gravier Street	Little Lane	AC	B	2	1,680	42	66,954	5/7/26	81	85	7	8	Surface Treatment - Slurry Seal	1/1/91
147	186	Bond Avenue	Little Lane	440' E Little Lane	AC	B	4	440	42	16,969	5/7/26	79	84	0	16	Surface Treatment - Slurry Seal	1/1/91
203	221	Cambridge Street	La Veta Avenue	City Limit	AAC	C	2	1,120	60	75,217	3/26/26	80	97	0	3	4 in overlay	3/13/07
203	223	Cambridge Street	Palmyra Avenue	La Veta Avenue	AAC	C	2	1,345	60	71,372	3/26/26	69	81	19	0	Overlay - AC Structural	12/12/12
203	224	Cambridge Street	Chapman Avenue	Palmyra Avenue	AC	C	2	1,305	30	44,784	3/26/26	72	100	0	0	New Construction - Initial	1/1/80
203	225	Cambridge Street	Palm Avenue	Maple Avenue	AC	C	2	610	30	16,199	3/26/26	93	72	0	28	Surface Treatment - Slurry Seal	1/1/91
203	226	Cambridge Street	Walnut Avenue	Sycamore Avenue	AC	C	2	635	40	25,280	3/27/26	55	12	63	25	Surface Treatment - Chip Seal	12/16/06
203	227	Cambridge Street	Rose Avenue	Walnut Avenue	AAC	C	2	825	36	28,370	3/26/26	71	41	42	17	Overlay - AC Structural	2/10/10
203	228	Cambridge Street	Collins Avenue	Rose Avenue	AAC	C	2	1,800	34	54,919	3/26/26	81	80	10	10	Overlay - AC Structural	2/1/10
203	229	Cambridge Street	Adams Avenue	Collins Avenue	AC	C	2	1,380	36	52,751	5/20/26	90	78	22	0	Complete Reconstruction - AC	3/13/07
203	230	Cambridge Street	Katella Avenue	Adams Avenue	AAC	C	2	955	37	37,454	3/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
203	231	Cambridge Street	Trenton Avenue	Katella Avenue	AAC	B	4	980	60	64,385	5/26/26	56	78	21	1	Overlay - AC Structural	1/1/10
203	232	Cambridge Street	Taft Avenue	Trenton Avenue	AAC	B	4	1,385	60	79,804	5/26/26	53	76	17	7	Overlay - AC Structural	1/1/10
203	233	Cambridge Street	Briardale Avenue	Taft Avenue	AAC	B	4	320	60	28,759	4/23/26	76	51	35	14	Overlay - AC Structural	12/1/09
203	238	Cambridge Street	Buckeyewood Avenue	Briardale Avenue	AAC	B	4	1,225	60	68,435	4/23/26	84	98	0	2	Overlay - AC Structural	12/1/09
203	240	Cambridge Street	Meats Avenue	Buckeyewood Avenue	AAC	B	4	1,105	60	64,603	4/23/26	80	80	0	20	Overlay - AC Structural	12/1/09
203	3521	Cambridge Street	Maple Avenue	Chapman Avenue	AC	C	2	1,235	30	23,105	3/26/26	91	65	0	35	Surface Treatment - Slurry Seal	1/1/91
203	3526	Cambridge Street	Sycamore Avenue	Palm Avenue	AC	C	2	630	34	18,445	3/26/26	68	16	13	71	New Construction - Initial	1/1/80
213	3223	Cannon Street	Serrano Avenue	Loma St (Villa Park)	AAC	B	4	787	80	57,850	4/29/26	99	100	0	0	Overlay - AC Structural	6/1/21
213	3512	Cannon Street	Stillwater Avenue	Chapman Avenue	AC	B	4	1,735	60	109,568	5/5/26	77	41	59	0	Surface Treatment - Slurry Seal	8/1/16
213	3514	Cannon Street	Cerritos Drive	Patricia Ct	AAC	B	4	1,103	24	37,723	5/5/26	76	20	61	19	New Construction - Initial	1/1/97
213	3515	Cannon Street	Patricia Ct	Cerritos Drive	AAC	B	4	1,103	35	27,512	5/5/26	79	58	42	0	New Construction - Initial	1/1/97
213	3516	Cannon Street	Cerritos Drive	250' s/o San Juan Drive	AAC	B	4	495	60	14,024	5/6/26	73	55	45	0	New Construction - Initial	1/1/97
213	398	Cannon Street	695' n/o Portofira Way	Portofira Way	AAC	B	4	695	68	50,763	4/29/26	97	100	0	0	Overlay - AC Structural	6/1/21
213	401	Cannon Street	Portofira Way	Goldenrod Lane	AAC	B	4	1,480	68	105,877	4/29/26	97	100	0	0	Overlay - AC Structural	6/1/21
213	407	Cannon Street	Serrano Avenue	Taft Avenue	AAC	B	2	945	70	65,924	5/1/26	96	100	0	0	Overlay - AC Structural	1/31/16
213	408	Cannon Street	Taft Avenue	Bridge	AAC	B	4	960	70	64,245	5/1/26	92	100	0	0	Overlay - AC Structural	1/31/16
213	410	Cannon Street	Bridge	Santiago Canyon Road	AAC	B	4	1,210	75	106,893	5/1/26	81	73	21	6	Overlay - AC Structural	1/1/09
213	412	Cannon Street	Santiago Canyon Road	San Juan Drive	AAC	B	4	655	68	45,738	5/6/26	81	80	0	20	Overlay - AC Structural	1/1/97
213	413	Cannon Street	San Juan Drive	250' s/o San Juan Drive	AAC	B	4	250	60	15,260	5/6/26	66	68	0	32	Overlay - AC Structural	1/1/97
213	415	Cannon Street	250' s/o San Juan Drive	Cerritos Drive	AAC	B	4	495	24	15,130	5/6/26	73	42	0	58	Overlay - AC Structural	1/1/97
213	416	Cannon Street	Patricia Ct	Hillgrove Ct	AAC	B	4	550	60	31,884	5/5/26	78	92	0	8	Overlay - AC Structural	1/1/97
213	419	Cannon Street	Hillgrove Ct	Cliffway Drive	AC	B	4	2,205	60	119,792	5/5/26	76	100	0	0	New Construction - Initial	1/1/80
213	420	Cannon Street	Cliffway Drive	Creekside Avenue	AC	B	4	1,930	60	113,053	5/5/26	77	81	0	19	New Construction - Initial	1/1/80
213	423	Cannon Street	Creekside Avenue	Stillwater Avenue	AC	B	4	345	60	21,099	5/5/26	89	100	0	0	Surface Treatment - Slurry Seal	8/1/16

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
213	426	Cannon Street	Via Escola	1795' s/o Via Escola	AAC	B	4	1,795	68	132,350	4/29/26	97	100	0	0	Overlay - AC Structural	6/1/21
213	7062	Cannon Street	Goldenrod Lane	Loma Street	AAC	B	4	1,308	68	79,296	4/29/26	98	100	0	0	Overlay - AC Structural	6/1/21
216	242	Canyon View Avenue	Hidden Canyon	Outrider Street	AC	B	4	725	48	40,059	5/8/26	77	90	10	0	New Construction - Initial	1/1/80
216	243	Canyon View Avenue	Outrider Street	1230' W Newport Boulevard	AC	B	4	1,025	48	50,041	5/26/26	68	73	27	0	New Construction - Initial	1/1/80
216	244	Canyon View Avenue	White Oak Ridge	Jamboree Road	AC	B	4	1,820	60	107,349	5/26/26	70	91	9	0	Asphalt Rubber Hot Mix	7/1/13
216	249	Canyon View Avenue	Chapman Avenue	Old Chapman Road	AC	B	4	1,180	60	59,871	5/8/26	73	91	9	0	New Construction - Initial	1/1/80
216	250	Canyon View Avenue	Old Chapman Road	Raven Lane	AC	B	4	815	60	53,648	5/8/26	81	100	0	0	New Construction - Initial	1/1/80
216	251	Canyon View Avenue	1230' W Newport Boulevard	Newport Boulevard	AC	B	4	1,230	60	72,440	5/12/26	74	87	13	0	New Construction - Initial	1/1/80
216	252	Canyon View Avenue	Newport Boulevard	Aspen Street	AC	B	4	815	60	45,114	5/12/26	71	83	17	0	Asphalt Rubber Hot Mix	7/1/13
216	253	Canyon View Avenue	Apsen Street	White Oak Ridge	AC	B	4	1,455	60	87,530	5/12/26	73	100	0	0	Asphalt Rubber Hot Mix	7/1/13
216	2823	Canyon View Avenue	Raven Lane	Hidden Canyon	AC	B	4	1,530	48	89,772	5/8/26	77	100	0	0	New Construction - Initial	1/1/80
246	3357	Chadwick Pkwy	Kendra Drive	Altaview Drive	AC	C	2	1,611	30	49,329	4/30/26	95	100	0	0	Surface Treatment - Slurry Seal	6/1/20
252	1	Chapman Avenue	Lewis Street	Manchester Avenue	AC	B	6	1,325	80	97,294	5/22/26	71	44	53	3	New Construction - Initial	10/4/12
252	11	Chapman Avenue	415' w/o Main Street	Main Street	AAC	B	6	415	80	31,614	5/19/26	89	100	0	0	Overlay - AC Structural	8/1/16
252	12	Chapman Avenue	Main Street	Batavia Street	AAC	B	4	1,695	60	102,774	5/19/26	68	58	26	16	Overlay - AC Structural	3/21/11
252	120	Chapman Avenue	Cliffway Drive	Canyon View Avenue	AC	B	2	2,265	37	90,722	5/14/26	75	63	35	2	Surface Treatment - Slurry Seal	10/10/19
252	13	Chapman Avenue	Batavia Street	Clark Street	AAC	B	4	350	60	20,290	5/22/26	61	69	31	0	Overlay - AC Structural	3/21/11
252	14A	Chapman Avenue	Clark Street	RR Tracks	AAC	B	5	907	56	53,093	5/22/26	70	66	26	8	Overlay - AC Structural	3/21/11
252	14B	Chapman Avenue	RR Tracks	Lemon St	AAC	B	5	680	53	31,610	5/21/26	94	100	0	0	New Construction - Initial	3/21/11
252	15	Chapman Avenue	Lemon Street	Chapman Avenue	AC	C	2	545	46	22,671	5/21/26	89	58	0	42	New Construction - Initial	1/1/80
252	16	Chapman Avenue	Glassell Street (Circle)	Grand Street	AC	C	2	465	56	28,367	5/21/26	92	83	0	17	New Construction - Initial	1/1/80
252	17	Chapman Avenue	Grand Street	Center Street	AC	B	4	325	56	19,518	5/22/26	79	52	46	2	Surface Treatment - Slurry Seal	8/1/17
252	18	Chapman Avenue	Center Street	Shaffer Street	AC	B	4	335	56	18,096	5/22/26	75	50	50	0	Surface Treatment - Slurry Seal	8/1/17
252	19	Chapman Avenue	Shaffer Street	Cambridge Street	AC	B	4	1,310	56	74,037	5/22/26	74	56	43	1	Surface Treatment - Slurry Seal	8/1/17
252	2	Chapman Avenue	Manchester Avenue	The City Drive	AC	B	6	730	128	70,325	5/22/26	88	82	18	0	Surface Treatment - Slurry Seal	1/1/91
252	20	Chapman Avenue	Cambridge Street	Jameson Street	AAC	B	4	1,185	60	70,561	5/15/26	79	89	11	0	Overlay - AC Structural	8/1/17
252	21	Chapman Avenue	Lincoln Street	Tustin Avenue	AAC	B	4	600	60	28,901	5/15/26	81	85	15	0	Overlay - AC Structural	8/1/17
252	22	Chapman Avenue	Jameson Street	Lincoln Street	AAC	B	4	798	60	47,888	5/15/26	81	86	14	0	Overlay - AC Structural	8/1/17
252	25	Chapman Avenue	Yorba Street	Malena Street	AAC	B	6	1,145	80	93,090	5/15/26	83	97	3	0	Overlay - AC Structural	8/1/17
252	26	Chapman Avenue	Malena Street	Prospect Street	AC	B	6	1,515	80	120,031	5/15/26	81	51	46	3	Surface Treatment - Slurry Seal	8/1/17
252	27	Chapman Avenue	Prospect Street	James Street	AC	B	6	1,475	80	115,343	5/15/26	80	91	0	9	Surface Treatment - Slurry Seal	8/1/17
252	28	Chapman Avenue	James Street	Esplanade Street	AC	B	6	1,260	80	92,654	5/15/26	80	100	0	0	Surface Treatment - Slurry Seal	8/1/17
252	30	Chapman Avenue	Earlham Street	Hewes Street	AC	B	6	580	80	47,825	5/18/26	78	66	34	0	Surface Seal - Fog Seal	8/7/23
252	31	Chapman Avenue	Hewes Street	Rancho Santiago Blvd	AC	B	3	1,360	80	102,646	5/14/26	69	62	31	7	Surface Seal - Fog Seal	8/7/23
252	32	Chapman Avenue	Rancho Santiago Blvd	Crawford Canyon Road	AC	B	3	1,665	80	130,919	5/26/26	61	66	33	1	New Construction - Initial	1/1/80
252	34	Chapman Avenue	Canyon View Avenue	Cliffway Drive	AC	B	2	2,265	37	86,105	5/14/26	82	79	21	0	Surface Treatment - Slurry Seal	10/10/19
252	35	Chapman Avenue	Cliffway Drive	Calle Grande	AC	B	4	1,080	78	71,709	5/14/26	89	75	25	0	Surface Treatment - Slurry Seal	10/10/19
252	3527	Chapman Avenue	County Line	Equestrian Dr	AAC	B	4	295	80	20,984	5/14/26	86	100	0	0	New Construction - Initial	12/12/12
252	3538	Chapman Avenue	End PCC (130' E/ Tustin St)	Tustin Street	PCC	B	0	130	60	8,122	5/18/26	89	52	0	48	New Construction - Initial	1/1/80
252	3539	Chapman Avenue	End PCC (110' W/ Tustin St)	Tustin Street	PCC	B	0	110	72	12,081	5/15/26	92	94	0	6	New Construction - Initial	1/1/80
252	36	Chapman Avenue	Equestrian Dr	Broadmoor Trail	AAC	B	4	1,520	80	125,361	5/14/26	71	58	33	9	Overlay - AC Structural	12/12/12
252	37	Chapman Avenue	Broadmoor Trail	Newport Boulevard	AAC	B	5	865	80	72,419	5/14/26	66	56	26	18	Overlay - AC Structural	12/12/12
252	38	Chapman Avenue	Newport Boulevard	Trails End Lane	AAC	B	6	1,465	75	126,315	5/13/26	94	100	0	0	Overlay - AC Structural	6/1/19
252	39	Chapman Avenue	Trails End Lane	Jamboree Road	AAC	B	6	1,810	75	163,545	5/13/26	95	100	0	0	Overlay - AC Structural	6/1/19
252	4	Chapman Avenue	5 Fwy SB On-Ramp	Rampart Street	AC	B	7	685	110	69,328	5/22/26	87	68	32	0	Surface Treatment - Slurry Seal	8/1/17
252	47	Chapman Avenue	Crawford Canyon Road/Cannon Roa	Canyon view Avenue	AC	B	4	1,620	80	125,399	5/14/26	68	66	34	0	Surface Treatment - Slurry Seal	10/10/19
252	5	Chapman Avenue	Rampart Street	Santa Ana River Bridge (W)	AC	B	6	1,260	80	127,039	5/22/26	82	78	22	0	Surface Treatment - Slurry Seal	8/1/17
252	55A	Chapman Avenue	Tustin Avenue	Wayfield Street	AAC	B	6	659	80	52,723	5/18/26	82	85	15	0	Surface Treatment - Slurry Seal	8/1/17
252	55B	Chapman Avenue	Wayfield Street	55 NB Ramp	AAC	B	6	1,157	80	121,038	5/15/26	78	64	36	0	Surface Treatment - Slurry Seal	8/1/17
252	55C	Chapman Avenue	55 NB Ramp	Yorba Street	AAC	B	7	796	80	85,554	5/15/26	82	100	0	0	Surface Treatment - Slurry Seal	8/1/17
252	6	Chapman Avenue	Bitterbush Street	Anita Drive	AC	B	3	920	40	32,036	5/22/26	73	82	18	0	Surface Treatment - Slurry Seal	8/1/17
252	7	Chapman Avenue	Anita Drive	Bitterbush Street	AAC	B	3	920	40	33,208	5/22/26	71	97	0	3	Surface Treatment - Slurry Seal	8/1/17
252	70	Chapman Avenue	Feldner Road	415' w/o Main Street	AAC	B	6	550	80	42,916	5/19/26	81	56	35	9	Surface Treatment - Slurry Seal	8/1/17
252	75	Chapman Avenue	Santa Ana River (W)	Anita Drive	AC	B	7	450	80	12,784	5/22/26	74	75	25	0	Surface Treatment - Slurry Seal	8/1/17
252	77	Chapman Avenue	The City Drive	5 Fwy SB On Ramp	AC	B	8	710	126	72,590	5/22/26	79	83	17	0	Surface Treatment - Slurry Seal	8/1/17
252	8	Chapman Avenue	Bitterbush Street	Eckhoff Street	AC	B	6	940	80	72,347	5/19/26	82	48	48	4	Surface Treatment - Slurry Seal	8/1/17
252	82	Chapman Avenue	Glassell Street	Glassell Street	AC	C	2	710	55	39,482	5/22/26	89	37	63	0	New Construction - Initial	1/1/80
252	9	Chapman Avenue	Eckhoff Street	Feldner Road	AC	B	6	1,365	75	102,919	5/19/26	81	50	29	21	Surface Treatment - Slurry Seal	8/1/17
287	150	Collins Avenue	Eckhoff Street	Commerce Street	AAC	B	4	752	60	47,282	4/9/26	63	53	40	7	Overlay - AC Structural	1/1/93

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
287	151	Collins Avenue	Commerce Street	Main Street	AAC	B	4	1,480	60	89,921	4/9/26	72	58	25	17	Overlay - AC Structural	1/1/93
287	152	Collins Avenue	Main Street	Batavia Street	AAC	B	4	1,450	60	86,271	4/10/26	76	71	8	21	Overlay - AC Structural	1/1/93
287	155	Collins Avenue	Glassell Street	Shaffer Street	AAC	B	4	1,350	52	66,644	4/10/26	74	63	24	13	Overlay - AC Structural	1/1/94
287	156	Collins Avenue	Shaffer Street	Cambridge Street	AAC	B	4	1,332	52	68,750	4/10/26	65	38	41	21	Overlay - AC Structural	1/1/94
287	157	Collins Avenue	Cambridge Street	California Street	AAC	B	4	1,335	52	54,096	4/10/26	77	93	7	0	Overlay - AC Structural	1/1/94
287	158	Collins Avenue	California Street	Tustin Street	AAC	B	4	1,290	52	85,213	4/10/26	69	72	0	28	Overlay - AC Structural	1/1/94
287	163	Collins Avenue	Railroad Tracks	Glassell Street	AC	B	4	1,240	52	70,652	4/10/26	66	44	43	13	New Construction - Initial	1/1/80
287	165	Collins Avenue	Batavia Street	Railroad Tracks	AAC	B	4	1,350	52	69,371	4/10/26	66	57	43	0	Overlay - AC Structural	1/1/93
287	167	Collins Avenue	Tustin Street	Highland Street	AAC	B	4	700	52	37,657	5/21/26	60	48	28	24	Overlay - AC Structural	1/1/93
287	169	Collins Avenue	Highland Street	Milford Street	AAC	B	4	1,240	52	72,955	5/21/26	57	55	45	0	Overlay - AC Structural	1/1/93
287	171	Collins Avenue	Milford Street	Handy Street	AAC	B	4	610	52	27,431	5/21/26	55	49	50	1	Overlay - AC Structural	1/1/93
287	173	Collins Avenue	Hart Street	Wanda Road	AAC	B	4	730	52	32,821	5/20/26	67	100	0	0	Overlay - AC Structural	1/1/93
287	175	Collins Avenue	Wanda Road	Mallard Street	AAC	B	4	966	60	62,171	5/20/26	60	73	27	0	Overlay - AC Structural	1/1/93
287	177	Collins Avenue	Mallard Street	105' e/o Roberto Street	AAC	B	4	600	60	40,591	5/20/26	64	80	7	13	Overlay - AC Structural	1/1/93
287	3529	Collins Avenue	Handy Street	Hart Street	AAC	B	4	925	52	45,845	5/20/26	67	86	10	4	New Construction - Initial	1/1/93
1352	3501	Crawford Canyon Road	Chapman Ave	Stoller Lane	AC	B	2	1,056	30	42,681	5/5/26	100	0	0	0	Mill and Overlay	1/3/23
374	179	Eckhoff Street	Orangewood Avenue	Sycamore Avenue	AC	C	2	1,150	60	63,735	5/20/26	74	65	23	12	Surface Treatment - Slurry Seal	1/1/97
374	180	Eckhoff Street	Sequoia Avenue	Orangewood Avenue	AAC	B	2	900	60	57,574	4/9/26	73	74	7	19	Overlay - AC Structural	1/31/16
374	181	Eckhoff Street	RR Tracks (370' S Collins Avenue)	Sequoia Avenue	AAC	B	2	1,070	60	62,391	4/9/26	77	61	24	15	Overlay - AC Structural	1/31/16
374	182	Eckhoff Street	Collins Avenue	370' S Collins Avenue	AAC	B	2	370	60	19,601	4/9/26	85	66	34	0	Overlay - AC Structural	1/1/02
374	2003	Eckhoff Street	Sycamore Avenue	Maple Avenue	AC	C	2	1,160	37	44,092	5/20/26	77	23	41	36	Surface Treatment - Slurry Seal	1/1/97
374	2004	Eckhoff Street	Maple Avenue	Chapman Avenue	AC	C	2	650	39	23,177	4/9/26	72	38	43	19	Surface Treatment - Slurry Seal	1/1/97
403	191	Esplanade Street	Fernwood Avenue	Fairhaven Avenue	AAC	B	4	1,060	60	65,062	5/15/26	79	82	11	7	Overlay - AC Structural	1/1/18
403	193	Esplanade Street	La Veta Avenue	Fernwood Avenue	AAC	B	4	1,355	60	82,759	5/15/26	81	87	13	0	Overlay - AC Structural	1/1/18
403	197	Esplanade Street	Dorothy Ave	La Veta Ave	AAC	B	3	995	54	50,833	5/14/26	83	85	15	0	Overlay - AC Structural	1/31/16
403	200	Esplanade Street	Washinton Avenue	Dorothy Avenue	AAC	B	4	1,220	60	71,950	5/14/26	78	75	25	0	Overlay - AC Structural	1/31/16
403	201	Esplanade Street	Chapman Avenue	Washington Avenue	AAC	B	4	480	60	25,854	5/14/26	76	90	10	0	Overlay - AC Structural	1/31/16
415	2456	Fairhaven Avenue	City Limit	Tustin Avenue	AC	B	2	960	32	30,720	5/18/26	72	63	26	11	New Construction - Initial	1/1/80
415	868	Fairhaven Avenue	Lowry Street	Yorba Street	AC	B	4	400	60	22,570	5/15/26	53	69	31	0	New Construction - Initial	1/1/80
415	869	Fairhaven Avenue	Ponderosa Street	Lowry Street	AC	B	4	1,690	60	77,863	5/21/26	72	62	34	4	New Construction - Initial	1/1/80
415	871	Fairhaven Avenue	Tustin Street	Ponderosa Street	AC	B	5	460	60	32,539	4/10/26	100	0	0	0	Mill and Overlay	1/3/23
443	255	Fletcher Street	American Way	Glassell Street	AAC	B	3	1,571	60	92,843	4/23/26	83	69	11	20	Overlay - AC Structural	1/31/16
443	256	Fletcher Street	Batavia Street	American Way	AC	B	3	1,037	60	63,744	4/23/26	79	70	0	30	New Construction - Initial	2/1/16
445	2002	Flower Street	Chapman Avenue	Almond Avenue	AAC	C	2	625	37	22,104	4/3/26	86	45	37	18	Overlay-Rubber Hot Mix	5/27/25
445	2005	Flower Street	Orchard Avenue	La Veta Avenue	AC	C	2	660	36	28,790	4/3/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
445	2006	Flower Street	Culver Avenue	Orchard Avenue	AC	C	2	485	37	15,038	4/3/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
445	2007	Flower Street	Palmyra Avenue	Culver Avenue	AAC	C	2	465	36	26,625	4/3/26	99	100	0	0	Overlay - AC Structural	7/7/22
445	2008	Flower Street	Larkspur Drive	Palmyra Avenue	AC	C	2	810	36	34,015	4/3/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
445	2009	Flower Street	Almond Avenue	Larkspur Drive	AC	C	2	450	37	16,243	4/3/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
464	1162	Garden Grove Boulevard	Lewis Street	Park Vine Street	AC	B	4	1,075	80	79,710	5/20/26	79	89	9	2	New Construction - Initial	1/1/80
464	1164	Garden Grove Boulevard	The City Drive	Bridge (230' E The City Drive)	AC	B	6	255	80	23,835	5/22/26	71	42	45	13	New Construction - Initial	1/1/80
464	1165	Garden Grove Boulevard	Park Vine Street	The City Drive	AC	B	4	1,235	80	80,441	5/20/26	75	85	13	2	New Construction - Initial	1/1/80
475	101	Glassell Street	420' N Riverdale Avenue	Richland Avenue	AAC	B	4	1,125	64	73,134	5/20/26	61	59	31	10	Overlay - AC Structural	1/1/93
475	102	Glassell Street	Taft Avenue	Trenton Avenue	AAC	B	5	1,365	80	107,676	3/20/26	68	66	28	6	4 in overlay	6/12/07
475	103	Glassell Street	Trenton Avenue	Katella Avenue	AAC	B	4	1,055	80	80,353	3/20/26	77	98	0	2	4 in overlay	6/12/07
475	104	Glassell Street	Katella Avenue	Quincy Avenue	AC	B	4	1,225	60	80,442	3/20/26	66	85	15	0	2 in Cold Mill & Overlay	10/16/07
475	105	Glassell Street	Quincy Avenue	Collins Avenue	AC	B	4	1,190	60	67,540	3/20/26	72	71	29	0	2 in Cold Mill & Overlay	10/16/07
475	106	Glassell Street	Palm Avenue	Maple Avenue	AAC	C	2	660	40	27,723	3/20/26	90	100	0	0	Overlay - AC Structural	1/1/18
475	107	Glassell Street	Walnut Avenue	Palm Avenue	AAC	C	2	1,295	40	57,100	3/20/26	93	100	0	0	Overlay - AC Structural	1/1/18
475	108	Glassell Street	Collins Avenue	Mayfair Avenue	AC	B	2	1,160	42	46,049	3/20/26	81	54	0	46	New Construction - Initial	1/1/80
475	109	Glassell Street	Mayfair Avenue	Walnut Avenue	AC	B	2	1,515	44	59,811	5/22/26	82	39	0	61	New Construction - Initial	1/1/80
475	111	Glassell Street	22 West On/Off Ramp	City Limits (22 East On/Off Ramp)	AAC	B	4	446	105	45,880	3/26/26	40	30	70	0	Overlay - AC Structural	4/13/15
475	113	Glassell Street	La Veta Avenue	22 West On/Off Ramp	AAC	B	4	1,565	80	102,596	3/26/26	82	37	63	0	Overlay - AC	2/28/16
475	115	Glassell Street	Culver Avenue	La Veta Avenue	AAC	C	2	601	40	32,409	3/20/26	88	76	0	24	Overlay - AC Structural	2/28/16
475	3523	Glassell Street	Dunton Avenue	Woodvale Avenue	AAC	B	4	1,465	64	99,087	5/19/26	76	57	40	3	New Construction - Initial	12/1/09
475	83	Glassell Street	Almond Avenue	Culver Avenue	AC	C	2	1,325	40	54,250	5/21/26	89	7	0	93	Surface Treatment - Slurry Seal	8/1/17
475	84	Glassell Street	Chapman Avenue	Almond Avenue	AC	C	2	540	48	25,396	5/21/26	72	21	56	23	New Construction - Initial	1/1/80
475	85	Glassell Street	Maple Avenue	Chapman Avenue	AC	C	2	475	50	25,392	5/22/26	67	45	55	0	New Construction - Initial	1/1/80
475	89	Glassell Street	Lincoln Avenue	Richland Avenue	AAC	B	4	1,760	80	130,160	5/20/26	57	35	45	20	Overlay - AC Structural	1/1/93

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
475	90	Glassell Street	Lincoln Avenue	Dunton Avenue	AAC	B	4	240	64	23,450	5/19/26	71	32	67	1	Overlay - AC Structural	12/1/09
475	91	Glassell Street	Woodvale Avenue	Fletcher Avenue	AAC	B	4	660	64	45,834	5/19/26	74	54	46	0	Overlay - AC Structural	12/1/09
475	92	Glassell Street	Fletcher Avenue	Baywood Avenue	AC	B	4	1,280	80	103,989	3/20/26	67	61	37	2	New Construction - Initial	1/1/80
475	93	Glassell Street	Baywood Avenue	Meats Avenue	AC	B	4	975	80	77,984	3/20/26	65	77	23	0	New Construction - Initial	1/1/80
475	94	Glassell Street	Meats Avenue	Blueridge Avenue	AAC	B	4	1,565	80	122,241	3/20/26	82	90	0	10	Overlay - AC Structural	8/1/16
475	95	Glassell Street	Blueridge Avenue	Taft Avenue	AAC	B	5	1,075	80	64,677	3/20/26	82	45	36	19	Overlay - AC Structural	8/1/16
500	2393	Grand Street	Maple Avenue	Chapman Avenue	PCC	C	2	605	40	23,536	5/21/26	66	21	51	28	New Construction - Initial	1/1/80
500	2400	Grand Street	Chapman Avenue	Almond Avenue	PCC	C	2	610	40	23,322	5/21/26	78	35	53	12	New Construction - Initial	1/1/80
516	2011	Grove Avenue	Batavia Street	Main Street	AAC	C	2	1,535	44	66,242	5/20/26	60	65	28	7	Overlay - AC Structural	9/1/09
548	204	Hewes Street	Phillips Avenue	Fowler Street	AC	B	4	717	60	41,942	5/15/26	60	81	19	0	Surface Treatment - Slurry Seal	1/1/91
548	206	Hewes Street	Marmon Avenue	Phillips Avenue	AC	B	4	1,375	60	85,208	5/15/26	62	84	16	0	Surface Treatment - Slurry Seal	1/1/91
548	208	Hewes Street	Chapman Avenue	Marmon Avenue	AC	B	4	1,560	60	90,967	5/15/26	69	39	34	27	Surface Treatment - Slurry Seal	1/1/91
548	210	Hewes Street	Pearl Street	Chapman Avenue	AC	B	4	350	60	17,655	5/15/26	56	72	24	4	Surface Treatment - Slurry Seal	1/1/95
548	212	Hewes Street	Walnut Avenue	Spring Street	AC	B	4	1,355	60	76,594	5/8/26	72	89	3	8	Surface Treatment - Slurry Seal	1/1/95
548	216	Hewes Street	Adobe Avenue	Bond Avenue	AAC	B	4	1,339	55	78,032	5/7/26	98	0	0	100	Overlay - AC Structural	2/1/24
548	217	Hewes Street	Adobe Avenue	1090' N/O Adobe Avenue	AAC	B	4	1,365	55	64,608	5/7/26	95	100	0	0	Mill and Overlay	1/3/23
548	219	Hewes Street	1090' N/O Adobe Avenue	Rancho Santiago Boulevard	AAC	B	4	771	48	48,820	5/7/26	92	71	29	0	Surface Treatment - Slurry Seal	1/16/22
548	220	Hewes Street	Rancho Santiago Boulevard	Julie Street	AAC	B	4	746	54	48,823	5/7/26	89	100	0	0	Surface Treatment - Slurry Seal	5/27/23
590	3504	Jamboree Road	Chapman Ave	Santiago Canyon Rd	AC	B	6	1,240	40	63,213	5/13/26	65	100	0	0	New Construction - Initial	1/1/80
590	3505	Jamboree Road	Santiago Canyon Rd	Chapman Avenue	AC	B	6	1,215	40	61,375	5/13/26	70	56	44	0	New Construction - Initial	1/1/80
590	437	Jamboree Road	Irvine Park Road	Santiago Canyon Rd	AC	B	6	195	115	33,140	5/13/26	73	72	7	21	New Construction - Initial	1/1/80
590	439	Jamboree Road	Chapman Avenue	Canyon View Avenue	AC	B	6	2,820	84	266,528	5/13/26	73	100	0	0	Asphalt Rubber Hot Mix	7/1/13
590	441	Jamboree Road	Canyon View Avenue	City Limit	AC	B	4	4,175	70	280,123	5/13/26	73	100	0	0	Asphalt Rubber Hot Mix	7/1/13
611	3164	Katella Avenue	Struck Avenue	Santa Ana River	AAC	B	3	953	40	37,627	5/20/26	71	43	46	11	2 in Cold Mill & Overlay	5/8/07
611	3165	Katella Avenue	Santa Ana River	Struck Avenue	AC	B	3	953	41	44,102	5/20/26	74	67	26	7	New Construction - Initial	1/1/80
611	3502	Katella Avenue	Route 55 SB On Ramp	Tustin St	AAC	B	6	786	40	40,694	5/19/26	58	79	16	5	New Construction - Initial	6/1/12
611	3503	Katella Avenue	Sacramento St	Route 55 SB On Ramp	AAC	B	6	845	33	35,209	5/19/26	62	58	39	3	New Construction - Initial	6/1/12
611	3542	Katella Avenue	End PCC (110' E/ Tustin St)	Tustin Street	PCC	B	0	110	60	6,833	5/19/26	91	100	0	0	New Construction - Initial	1/1/80
611	3543	Katella Avenue	End PCC (110' W/ Tustin St)	Tustin Street	PCC	B	0	110	62	14,755	5/26/26	88	100	0	0	New Construction - Initial	1/1/80
611	377	Katella Avenue	Struck Avenue	Main Street	AC	B	6	1,600	80	133,339	5/19/26	69	49	37	14	Surface Treatment - Slurry Seal	8/1/17
611	378	Katella Avenue	Main Street	Batavia Street	AC	B	6	1,390	90	130,599	5/19/26	70	47	45	8	Surface Treatment - Slurry Seal	8/1/17
611	380	Katella Avenue	Batavia Street	Glassell Street	AC	B	6	2,665	90	236,201	5/14/26	72	63	36	1	Surface Treatment - Slurry Seal	8/1/17
611	382	Katella Avenue	Glassell Street	Shaffer Street	AC	B	6	1,170	90	112,244	3/27/26	81	100	0	0	New Construction - Initial	1/1/80
611	384	Katella Avenue	Shaffer Street	Cambridge Street	AC	B	6	1,210	90	115,661	5/22/26	77	83	17	0	New Construction - Initial	1/1/80
611	386	Katella Avenue	Cambridge Street	California Street	AAC	B	6	1,085	90	103,519	3/27/26	79	100	0	0	Overlay - AC Structural	1/1/91
611	388	Katella Avenue	California Street	Tustin Ave.	AAC	B	6	1,320	90	112,396	3/27/26	77	100	0	0	Overlay - AC Structural	1/1/91
611	390	Katella Avenue	Tustin Avenue	Route 55 SB On Ramp	AAC	B	6	930	40	40,009	5/19/26	53	64	32	4	Asphalt Rubber Hot Mix	6/1/12
611	392A	Katella Avenue	Handy Street	Harding Street	AAC	B	4	1,221	64	70,256	4/29/26	98	100	0	0	Mill and Overlay	5/11/22
611	392B	Katella Avenue	Harding Street	Wanda Drive	AAC	B	5	384	64	35,265	4/29/26	87	5	95	0	Overlay - AC Structural	1/1/92
611	396	Katella Avenue	Route 55 SB On Ramp	Sacramento Street	AAC	B	6	845	36	31,965	5/19/26	68	71	29	0	Mill and Overlay	5/11/22
611	397	Katella Avenue	Sacramento Street	Handy Street	AAC	B	5	920	64	61,121	4/29/26	98	100	0	0	Mill and Overlay	5/11/22
615	3279	Kendra Dr	Chadwick Parkway	Serrano	AC	C	2	1,550	36	55,631	4/30/26	92	100	0	0	Surface Treatment - Slurry Seal	6/1/20
636	15396	La Veta Avenue	Yorba Street	106' E Loretta Drive	AC	B	4	702	64	39,952	5/19/26	74	65	35	0	Surface Treatment - Slurry Seal	12/12/12
636	3524	La Veta Avenue	Route 55 Bridge	Fairmont Way	AC	B	4	620	60	45,224	5/19/26	78	80	20	0	New Construction - Initial	1/1/80
636	3528	La Veta Avenue	Pepper Street	Batavia Street	AAC	B	6	975	85	77,818	4/3/26	97	100	0	0	New Construction - Initial	1/1/97
636	491	La Veta Avenue	540' w/o Flower Circle	Flower Circle	AAC	B	4	540	86	35,567	4/3/26	85	100	0	0	Overlay - AC Structural	8/1/17
636	492	La Veta Avenue	Flower Circle	Crest Road	AAC	B	4	1,030	65	66,363	4/3/26	86	100	0	0	Overlay - AC Structural	8/1/17
636	494	La Veta Avenue	Crest Road	Main Street	AAC	B	4	980	70	68,950	4/3/26	86	100	0	0	Overlay - AC Structural	8/1/17
636	496	La Veta Avenue	Main Street	Pepper Street	AAC	B	6	700	75	56,911	5/22/26	82	53	21	26	Overlay - AC Structural	1/1/97
636	498	La Veta Avenue	Batavia Street	Parker Street	AAC	B	4	624	70	45,804	4/3/26	98	100	0	0	Overlay - AC Structural	1/1/97
636	500	La Veta Avenue	Parker Street	Montgomery Street	AAC	B	4	600	50	30,310	5/22/26	80	62	28	10	Overlay - AC Structural	8/1/16
636	502	La Veta Avenue	Montgomery Street	Lemon Street	AAC	B	4	633	60	39,841	5/22/26	77	85	15	0	Overlay - AC Structural	8/1/16
636	504	La Veta Avenue	Lemon Street	Glassell Street	AAC	B	4	601	60	38,717	5/22/26	73	65	35	0	Overlay - AC Structural	8/1/16
636	505	La Veta Avenue	Glassell Street	Orange Street	AC	B	2	285	50	17,054	5/21/26	64	71	29	0	Surface Reconstruction - AC	1/1/94
636	506	La Veta Avenue	Orange Streeet	Grand Street	AC	B	2	345	29	10,182	5/21/26	57	69	23	8	Surface Reconstruction - AC	1/1/94
636	508	La Veta Avenue	Grand Street	Shaffer Street	AC	B	2	450	30	19,861	5/15/26	65	86	9	5	Surface Reconstruction - AC	1/1/94
636	509	La Veta Avenue	Shaffer Street	Cambridge Street	AC	B	2	1,260	60	77,515	5/15/26	63	61	18	21	New Construction - Initial	1/1/80
636	511	La Veta Avenue	Tustin Avenue	Frontage Road	AC	B	4	570	60	40,205	5/19/26	69	74	0	26	New Construction - Initial	1/1/80
636	513	La Veta Avenue	La Veta Ave Frontage Road	Bridge	AC	B	4	606	62	37,983	5/19/26	65	70	30	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
636	514	La Veta Avenue	Fairmont Way	Yorba Street	AC	B	4	304	60	17,297	5/19/26	70	54	46	0	New Construction - Initial	1/1/80
636	517	La Veta Avenue	220' W Wheeler Street	Laurinda Lane	AC	B	4	890	60	45,545	5/19/26	76	85	8	7	Surface Treatment - Slurry Seal	12/12/12
636	518	La Veta Avenue	Laurinda Lane	Prospect Street	AC	B	4	1,190	60	70,287	5/19/26	78	98	0	2	Surface Treatment - Slurry Seal	12/12/12
636	520	La Veta Avenue	Prospect Street	Swidler Place	AC	B	4	1,170	60	72,410	5/21/26	77	89	11	0	New Construction - Initial	1/1/80
636	522	La Veta Avenue	Swidler Place	James Street	AC	B	4	655	60	39,750	5/21/26	71	78	0	22	New Construction - Initial	1/1/80
636	524	La Veta Avenue	James Street	Esplanade Street	AC	B	2	744	60	42,173	5/21/26	57	100	0	0	Asphalt Rubber Hot Mix	6/1/12
653	2191	Lawson Way	Town & Country Road	535' s/o Town & Country Road	AC	C	2	535	60	31,611	3/29/24	85	52	48	0	Asphalt Rubber Hot Mix	5/1/13
659	2199	Lemon Street	Maple Avenue	Chapman Avenue	AAC	C	2	625	36	24,811	5/19/26	90	76	24	0	Overlay - AC Structural	1/1/21
663	362	Lewis Street	Simmons Avenue	Chapman Avenue	AC	B	3	1,225	60	68,594	5/20/26	78	74	12	14	New Construction - Initial	1/1/80
663	363	Lewis Street	Chapman Avenue	Dawn Street	AAC	B	4	1,295	60	79,422	5/20/26	95	100	0	0	Overlay - AC Structural	1/1/19
663	366	Lewis Street	Dawn Street	Metropolitan Drive	AAC	B	4	1,335	60	78,026	5/20/26	95	100	0	0	Overlay - AC Structural	1/1/19
663	367	Lewis Street	Lampson Avenue	1123' s/o Lampson Avenue	AAC	B	4	1,123	60	65,433	5/20/26	93	100	0	0	Overlay - AC Structural	1/1/19
663	369	Lewis Street	630' n/o El Prado Avenue	El Prado Avenue	AAC	B	4	630	60	37,272	5/20/26	97	100	0	0	Overlay - AC Structural	1/1/19
663	372	Lewis Street	El Prado Avenue	Garden Grove Boulevard	AAC	B	4	750	60	44,573	5/20/26	95	96	0	4	Overlay - AC Structural	1/1/19
668	3548	Lincoln Avenue	End PCC (120' W/ Tustin St)	Tustin Street	PCC	B	0	120	52	6,068	5/19/26	87	77	0	23	New Construction - Initial	1/1/80
668	3549	Lincoln Avenue	End PCC (95' E/ Tustin St)	Tustin Street	PCC	B	0	95	48	5,125	5/19/26	72	42	48	10	New Construction - Initial	1/1/80
668	872	Lincoln Avenue	Tustin Street	Santiago Boulevard	AC	B	3	620	48	56,869	5/19/26	62	59	41	0	New Construction - Initial	1/1/80
668	875	Lincoln Avenue	Oceanview Street	Tustin Avenue	AAC	B	5	1,260	75	88,925	5/19/26	75	49	31	20	4 in overlay	9/11/07
668	876	Lincoln Avenue	Orange-Olive Road	Oceanview Street	AAC	B	4	1,930	80	158,778	5/19/26	70	43	35	22	4 in overlay	9/11/07
668	881	Lincoln Avenue	Glassell Street	Orange-Olive Road	AAC	B	4	1,775	80	139,269	5/19/26	67	43	36	21	4 in overlay	9/11/07
668	883	Lincoln Avenue	City Limit/200' E Berkeley	Glassell Street	AAC	B	4	1,320	80	89,943	5/20/26	64	65	22	13	4 in overlay	9/11/07
705	2012	Main Street	North End	Taft Avenue	ST	C	2	1,555	44	71,369	5/20/26	25	41	55	4	Surface Treatment - Micro Surfacing	8/31/07
705	300	Main Street	Taft Avenue	1170' n/o Katella Avenue	AAC	B	4	1,170	80	89,778	5/20/26	59	45	45	10	Overlay - AC Structural	1/1/02
705	302	Main Street	1170' n/o Katella Avenue	Katella Avenue	AAC	B	4	1,175	80	100,874	5/20/26	62	41	47	12	Overlay - AC Structural	1/1/02
705	304	Main Street	Katella Avenue	Struck Avenue	AAC	B	4	1,120	80	88,737	4/9/26	75	36	60	4	Overlay - AC Structural	1/1/02
705	306	Main Street	Struck Avenue	Collins Avenue	AAC	B	4	1,280	80	102,586	4/9/26	83	46	54	0	Overlay - AC Structural	1/1/02
705	308	Main Street	Collins Avenue	Alvarez Avenue	AAC	B	4	1,505	60	89,546	4/2/26	80	78	22	0	Overlay - AC Structural	8/1/16
705	310	Main Street	Alvarez Avenue	Orangewood Avenue	AAC	B	4	1,120	60	65,844	4/2/26	82	100	0	0	Overlay - AC Structural	8/1/16
705	313	Main Street	Orangewood Avenue	Palm Avenue	AAC	B	4	1,270	60	87,111	4/2/26	87	100	0	0	Overlay - AC Structural	8/1/16
705	314	Main Street	Palm Avenue	Chapman Avenue	AAC	B	4	1,375	60	95,480	4/2/26	82	45	25	30	Overlay - AC Structural	8/1/16
705	316	Main Street	Chapman Avenue	Palmyra Avenue	AC	B	4	1,350	60	86,958	4/2/26	68	92	8	0	New Construction - Initial	1/1/80
705	318	Main Street	Palmyra Avenue	Stewart Drive	AAC	B	5	590	60	34,286	4/2/26	73	62	21	17	Overlay - AC Structural	8/1/16
705	320	Main Street	La Veta Avenue	700' s/o La Veta Avenue	AAC	B	6	700	72	60,059	4/2/26	98	100	0	0	Overlay - AC Structural	8/1/16
705	3513	Main Street	Stewart Drive	La Veta Avenue	AAC	B	5	745	60	61,963	4/2/26	77	100	0	0	New Construction - Initial	8/1/16
705	3530	Main Street	Stewart Dr	Palmyra Ave	PCC	B	0	496	10	7,976	5/18/26	94	100	0	0	New Construction - Initial	1/1/80
705	3531	Main Street	Palmyra Ave	Almond Ave	PCC	B	0	655	10	8,839	5/18/26	90	100	0	0	New Construction - Initial	1/1/80
705	3532	Main Street	Almond Ave	255' N/ Almond Ave	PCC	B	0	252	10	2,846	5/18/26	86	38	62	0	New Construction - Initial	1/1/80
705	3533	Main Street	175' N/ Almond Ave	Almond Ave	PCC	B	0	155	10	1,842	5/18/26	94	100	0	0	New Construction - Initial	1/1/80
705	3534	Main Street	Almond Ave	Palmyra Ave	PCC	B	0	643	10	7,070	5/18/26	94	100	0	0	New Construction - Initial	1/1/80
705	3535	Main Street	Palmyra Ave	Stewart Dr	PCC	B	0	475	10	5,185	5/18/26	93	100	0	0	New Construction - Initial	1/1/80
711	2234	Manchester Avenue	Chapman Avenue	Sheringham Avenue	AC	C	2	525	60	17,652	4/22/26	56	33	52	15	Surface Treatment - Slurry Seal	1/1/95
711	3452	Manchester Avenue	Sheringham Avenue	North City Limits	AC	C	2	700	36	25,154	4/22/26	75	71	9	20	Surface Treatment - Slurry Seal	1/1/95
1324	8014	Manchester Avenue	Sheringham Avenue	Compton Avenue	AC	C	2	290	25	7,369	4/22/26	79	66	9	25	New Construction - Initial	10/4/12
743	3517	Meats Avenue	Park Lane	Route 55 Bridge	AC	B	4	676	58	39,780	5/12/26	100	0	0	0	Mill and Overlay	8/30/21
743	889	Meats Avenue	Glassell Street	Orange-Olive Road	AAC	B	4	690	60	39,378	4/23/26	81	100	0	0	Overlay - AC Structural	1/31/16
743	892	Meats Avenue	Orange-Olive Road	Pine Street	AAC	B	4	1,300	60	77,476	4/23/26	81	100	0	0	2 in Cold Mill & Overlay	10/16/07
743	893	Meats Avenue	Pine Street	Cambridge Street	AAC	B	4	695	60	40,406	4/23/26	79	87	0	13	2 in Cold Mill & Overlay	10/16/07
743	895	Meats Avenue	Cambridge Street	Canal Street	AAC	B	4	1,400	60	84,989	4/23/26	78	97	0	3	2 in Cold Mill & Overlay	10/16/07
743	897	Meats Avenue	Canal Street	Tustin Avenue	AAC	B	4	1,035	60	65,693	4/23/26	75	69	25	6	2 in Cold Mill & Overlay	10/16/07
743	899	Meats Avenue	Tustin Street	Park Lane	AC	B	4	375	77	31,362	5/21/26	56	31	69	0	Mill and Overlay	8/30/21
743	901	Meats Avenue	Route 55	Breckenridge Street	AC	B	4	560	60	32,646	5/12/26	100	0	0	0	Mill and Overlay	8/30/21
743	903	Meats Avenue	Breckenridge Street	Santiago Boulevard	AC	B	4	1,280	60	73,713	4/29/26	50	71	28	1	Asphalt Rubber Hot Mix	6/1/12
743	905	Meats Avenue	280' w/o Feather Hill	Summitridge Lane	AAC	B	4	1,660	60	96,054	4/29/26	96	100	0	0	Overlay - AC Structural	6/1/19
743	907	Meats Avenue	Summitridge Lane	Marywood Drive	AAC	B	4	1,290	60	73,059	4/29/26	96	100	0	0	Overlay - AC Structural	6/1/19
743	909	Meats Avenue	Marywood Drive	Via Escola	AAC	B	4	1,455	60	92,747	4/29/26	97	100	0	0	Overlay - AC Structural	6/1/19
743	912	Meats Avenue	Via Escola	1065' n/o Escola Anaheim city limit	AAC	B	4	1,065	60	62,912	4/29/26	98	100	0	0	Overlay - AC Structural	6/1/19
750	3520	Metropolitan Drive	Designer Drive	The City Drive	AAC	B	4	560	85	54,869	5/22/26	98	100	0	0	Overlay - AC Structural	5/13/24
750	669	Metropolitan Drive	Lewis Street	Entertainment Drive	AC	B	4	1,250	46	71,697	5/22/26	53	20	67	13	Surface Treatment - Slurry Seal	1/1/91
750	671	Metropolitan Drive	Entertainment Drive	Designer Drive	AAC	B	4	1,095	44	58,531	5/22/26	95	43	0	57	Overlay - AC Structural	5/13/24

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
787	428	Newport Boulevard	Skylark Place	County Line	AC	B	4	265	80	25,360	5/12/26	74	100	0	0	New Construction - Initial	1/1/80
787	429	Newport Boulevard	Skylark Place	Canyon View Avenue	AC	B	2	1,545	40	52,996	5/12/26	69	100	0	0	New Construction - Initial	1/1/80
787	430	Newport Boulevard	Canyon View Avenue	Skylark Place	AC	B	2	1,545	40	65,563	5/12/26	70	100	0	0	New Construction - Initial	1/1/80
787	431	Newport Boulevard	White Oak Ridge	Canyon View Avenue	AAC	B	4	1,225	80	97,264	5/12/26	80	91	9	0	Overlay - AC Structural	1/1/02
787	434	Newport Boulevard	Chapman Avenue	White Oak Ridge	AAC	B	2	1,675	40	67,689	5/12/26	94	100	0	0	Overlay - AC Structural	6/1/19
787	435	Newport Boulevard	White Oak Ridge	Chapman Avenue	AAC	B	2	1,675	40	67,676	5/12/26	93	100	0	0	Overlay - AC Structural	6/1/19
787	436	Newport Boulevard	Chapman Avenue	Santiago Canyon Road	AAC	B	4	1,830	80	155,891	5/12/26	98	100	0	0	Overlay - AC Structural	6/1/19
791	443	Nohl Ranch Road	Santiago Boulevard	Maple Tree Drive	AC	B	4	710	48	39,255	5/19/26	88	70	17	13	New Construction - Initial	1/1/80
791	444	Nohl Ranch Road	Maple Tree Street	Fernhill Lane	AC	B	2	1,270	48	55,061	5/19/26	75	49	27	24	New Construction - Initial	1/1/80
831	347	Orange-Olive Road	Blue Ridge Avenue	Glassell Street	AAC	B	4	1,010	54	68,899	5/14/26	66	34	49	17	Overlay - AC Structural	1/1/02
831	349	Orange-Olive Road	Meats Avenue	Blue Ridge Avenue	AAC	B	4	1,420	54	77,183	5/14/26	62	37	54	9	Overlay - AC Structural	1/1/02
831	351	Orange-Olive Road	Vista Del Goviota	Meats Avenue	AC	B	4	1,560	54	81,964	5/14/26	98	100	0	0	Overlay-Rubber Hot Mix	5/27/25
831	3518	Orange-Olive Road	Olive Avenue	Santa Ana Canyon	AAC	B	4	690	56	42,761	4/24/26	99	100	0	0	Overlay - AC Structural	6/1/20
831	353	Orange-Olive Road	Fellows Drive	Vista Del Gaviota	AC	B	4	930	60	56,243	4/24/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
831	355	Orange-Olive Road	St. James Avenue	Fellows Drive	AAC	B	4	1,240	60	73,363	4/24/26	99	100	0	0	Overlay - AC Structural	2/8/24
831	357	Orange-Olive Road	Lincoln Avenue	St. James Avenue	AC	B	4	1,215	60	76,458	4/24/26	99	100	0	0	Mill and Overlay	2/1/24
831	359	Orange-Olive Road	565' s/o Olive Avenue	Olive Avenue	AAC	B	4	565	40	23,257	4/24/26	99	100	0	0	Overlay - AC Structural	6/1/20
831	360	Orange-Olive Road	Riverdale Avenue	Santa Ana Canyon	AAC	B	4	1,460	54	88,695	4/24/26	99	100	0	0	Overlay - AC Structural	6/1/20
832	449	Orangewood Avenue	Eckhoff Street	Main Street	AAC	B	5	2,199	60	134,464	5/19/26	56	33	55	12	Overlay - AC Structural	1/1/98
832	453	Orangewood Avenue	1475' w/o Eckhoff Street	Eckhoff Street	AAC	B	4	1,475	80	108,619	5/13/26	48	39	54	7	Overlay - AC Structural	1/1/98
845	2422	Palm Avenue	Cypress St	Glassell Street	PCC	C	2	992	40	38,298	5/13/26	52	18	76	6	New Construction - Initial	1/1/80
862	446	Parker Street	La Veta Avenue	1060' s/o La Veta Avenue	AAC	B	2	1,060	60	61,182	4/3/26	70	59	31	10	Overlay - AC Structural	10/1/08
862	447	Parker Street	1060' s/o La Veta Avenue	470' s/o Town & Country	AC	B	2	890	60	54,322	4/3/26	81	90	10	0	New Construction - Initial	1/1/80
902	2903	Prospect Street	Walnut Avenue	Spring St	AAC	B	4	1,345	50	74,006	5/7/26	82	100	0	0	Overlay - AC Structural	5/1/08
902	657	Prospect Street	105' E Roberto Street	Bond Avenue	AC	B	2	1,571	52	93,975	5/20/26	62	82	18	0	Asphalt Rubber Hot Mix	6/1/12
902	659	Prospect Street	Spring Street	Chapman Avenue	AAC	B	5	1,320	60	79,457	5/13/26	74	72	7	21	Overlay - AC Structural	5/1/08
902	660	Prospect Street	Chapman Avenue	Palmyra Avenue	AC	B	4	1,300	60	79,113	5/14/26	73	72	19	9	Surface Treatment - Slurry Seal	1/1/92
902	661	Prospect Street	Palmyra Avenue	La Veta Avenue	AC	B	4	1,340	60	79,206	5/14/26	73	60	38	2	Surface Treatment - Slurry Seal	1/1/92
902	662	Prospect Street	La Veta Avenue	Larkstone Drive	AC	B	4	1,070	60	63,517	5/15/26	73	63	26	11	Surface Treatment - Slurry Seal	1/1/95
902	663	Prospect Street	Larkstone Drive	Fairhaven Avenue	AAC	B	2	1,405	40	64,715	5/15/26	70	61	29	10	Overlay - AC Structural	12/12/12
902	7657	Prospect Street	Bond Avenue	Walnut Ave	AAC	B	4	1,677	50	89,525	5/7/26	83	94	0	6	Overlay - AC Structural	5/1/08
913	2016	Rancho Santiago Blvd	Orange Grove Avenue	35' s/o Sycamore Avenue	AC	C	2	1,525	36	54,715	5/26/26	55	50	42	8	New Construction - Initial	1/1/80
913	2017	Rancho Santiago Blvd	Condor Crest Avenue	Bond Avenue	AC	C	2	1,050	36	33,178	5/7/26	76	94	6	0	New Construction - Initial	1/1/80
913	2018	Rancho Santiago Blvd	Hewes Street	Condor Crest Avenue	AC	C	2	1,884	30	58,149	5/7/26	61	64	36	0	New Construction - Initial	1/1/80
913	3065	Rancho Santiago Blvd	Bond Avenue	Orange Grove Avenue	AAC	C	2	782	38	34,596	5/7/26	87	51	15	34	Overlay - AC Structural	1/1/04
944	675	Riverdale Avenue	Glassell Street	Hearthside Street	AAC	B	4	1,070	60	65,006	5/20/26	55	56	35	9	Surface Treatment - Slurry Seal	11/1/08
944	676	Riverdale Avenue	Hearthside Street	Beechwood Street	AAC	B	4	900	60	50,953	5/20/26	49	54	38	8	Surface Treatment - Slurry Seal	11/1/08
944	677	Riverdale Avenue	Beechwood Street	Orange-Olive Road	AAC	B	4	1,100	60	60,543	5/20/26	47	64	36	0	Surface Treatment - Slurry Seal	11/1/08
944	678	Riverdale Avenue	Orange-Olive Road	455' e/o Orange-Olive Road	AAC	B	4	455	60	26,855	5/14/26	78	65	35	0	Overlay - AC Structural	10/1/08
944	679	Riverdale Avenue	445' e/o Orange-Olive Road	City Limit	AAC	B	4	1,735	48	90,978	5/14/26	74	62	27	11	Overlay - AC Structural	10/1/08
1011	3214	Santiago Boulevard	Brookside Avenue	City Limits	AAC	B	5	300	60	12,881	5/13/26	80	64	36	0	Overlay - AC Structural	12/1/09
1011	455	Santiago Boulevard	Taft Avenue	Brookside Avenue	AC	B	4	1,080	56	47,631	5/13/26	82	83	17	0	New Construction - Initial	1/1/80
1011	457	Santiago Boulevard	Serrano Avenue	Taft Avenue	AC	B	5	1,320	56	74,963	5/13/26	76	50	48	2	New Construction - Initial	1/1/80
1011	459	Santiago Boulevard	Riding Way	Serrano Avenue	AC	B	5	1,150	56	64,929	5/13/26	81	69	31	0	New Construction - Initial	1/1/80
1011	461	Santiago Boulevard	Villa Real Drive	Riding Way	AC	B	5	1,255	60	79,687	5/19/26	76	38	35	27	New Construction - Initial	1/1/80
1011	463	Santiago Boulevard	Robinhood Place	Villa Real Drive	AC	B	5	1,715	60	101,360	5/19/26	78	53	29	18	New Construction - Initial	1/1/80
1011	464	Santiago Boulevard	Lincoln Avenue	Robinhood Place	AC	B	5	1,950	60	121,916	5/19/26	78	57	36	7	New Construction - Initial	1/1/80
1011	466	Santiago Boulevard	1335' N Lincoln Avenue	Lincoln Avenue	AAC	B	4	1,335	50	71,513	5/19/26	58	43	52	5	Overlay - AC Structural	11/1/07
1012	3192	Santiago Canyon Road	Windes Drive (WB Only)	Orange Park Boulevard	AC	B	4	1,450	34	54,710	5/6/26	84	100	0	0	New Construction - Initial	1/1/80
1012	3550	Santiago Canyon Road	HWY 261 BRIDGE	EAST CITY LIMIT	AC	B	4	122	62	28,329	5/26/26	42	53	27	20	New Construction - Initial	1/1/80
1012	3553	Santiago Canyon Road	Jamboree Road	2050' E/O JAMBOREE ROAD (Buildin	AC	B	4	2,048	64	166,145	5/13/26	84	99	0	1	New Construction - Initial	1/1/80
1012	3554	Santiago Canyon Road	2050' E/O JAMBOREE ROAD (COP)	Route 261 Bridge	AC	B	4	3,034	64	232,944	5/13/26	64	47	53	0	New Construction - Initial	1/1/80
1012	468	Santiago Canyon Road	Linda Vista Street	Cannon Street	AAC	B	4	810	84	62,221	5/1/26	100	0	0	0	Overlay - AC Structural	3/27/25
1012	470	Santiago Canyon Road	Cannon Street	Jamestown Way	AAC	B	4	1,715	84	156,439	5/1/26	100	0	0	0	Overlay - AC Structural	3/27/25
1012	471	Santiago Canyon Road	Jamestown Way	Nicky Way	AAC	B	4	730	84	53,111	5/1/26	100	0	0	0	Overlay - AC Structural	3/27/25
1012	474	Santiago Canyon Road	Nicky Way	Orange Park Boulevard	AAC	B	4	1,350	84	111,378	5/1/26	100	0	0	0	Overlay - AC Structural	3/27/25
1012	477	Santiago Canyon Road	Windes Road	450' w/o Kennymeade Street	AC	B	4	790	80	63,288	5/6/26	70	92	7	1	New Construction - Initial	1/1/80
1012	478	Santiago Canyon Road	450' w/o Kennymeade Street	Lolita Street	AC	B	4	1,595	60	94,705	5/6/26	70	100	0	0	New Construction - Initial	1/1/80
1012	481	Santiago Canyon Road	Lolita Street	Holy Sepulcher (Cemetary Enterance	AC	B	4	1,175	80	89,350	5/6/26	65	88	12	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1012	482	Santiago Canyon Road	Holy Sepulcher (Cemetary Enteranc	Amapola Avenue	AC	B	4	2,278	80	181,972	5/6/26	66	81	19	0	New Construction - Initial	1/1/80
1012	485	Santiago Canyon Road	Amapola Avenue	Lakeview Trail	AC	B	2	1,015	42	39,069	5/6/26	73	100	0	0	New Construction - Initial	1/1/80
1012	486	Santiago Canyon Road	Lakeview Trail	Amapola Avenue	AC	B	2	1,015	42	42,124	5/6/26	74	100	0	0	New Construction - Initial	1/1/80
1012	487	Santiago Canyon Road	Lakeview Trail	Newport Boulevard	AC	B	2	810	80	61,664	5/6/26	70	100	0	0	New Construction - Initial	1/1/80
1012	489	Santiago Canyon Road	Newport Boulevard	Jamboree Road	AC	B	3	2,455	40	111,138	5/6/26	100	0	0	0	New Construction - Initial	1/1/80
1012	490	Santiago Canyon Road	Jamboree Road	Newport Boulevard	AC	B	3	2,455	40	122,929	5/6/26	100	0	0	0	New Construction - Initial	1/1/80
1023	3242	Serrano Avenue	Sierra Vista Drive	Apache Creek Road	AAC	B	4	1,223	46	63,450	4/30/26	94	32	0	68	Overlay - AC Structural	6/1/21
1023	3244	Serrano Avenue	Apache Creek Road	San Lorenzo Court	AAC	B	4	1,077	46	57,429	4/30/26	100	0	0	0	Overlay - AC Structural	6/1/21
1023	3277	Serrano Avenue	San Lorenzo Court	Kendra Road	AC	B	4	3,519	46	169,942	4/30/26	80	69	8	23	New Construction - Initial	1/1/80
1023	3282	Serrano Avenue	Kendra Rd	Nohl Ranch Road	AC	B	4	453	60	27,785	4/30/26	78	70	0	30	New Construction - Initial	1/1/80
1023	3441	Serrano Avenue	Orange Park Boulevard	Sierra Vista Drive	AAC	B	4	1,145	46	61,011	4/30/26	98	100	0	0	Overlay - AC Structural	6/1/21
1023	3522	Serrano Avenue	Glenbrook Ln	Orange Park Boulevard	AC	B	4	568	58	31,704	5/26/26	95	100	0	0	New Construction - Initial	1/1/80
1023	672	Serrano Avenue	Cannon Street	1300' e/o Cannon Street	AAC	B	4	1,300	46	66,199	4/30/26	86	79	21	0	Overlay - AC Structural	3/21/11
1023	673	Serrano Avenue	1300' e/o Cannon Street	Yellowstone Boulevard	AC	B	4	1,095	46	48,506	5/26/26	92	100	0	0	New Construction - Initial	1/1/80
1023	674	Serrano Avenue	Yellowstone Boulevard	Glenbrook Ln	AC	B	4	895	58	37,507	5/26/26	90	100	0	0	New Construction - Initial	1/1/80
1068	648	Spring Street	Prospect Street	Virage Street	AAC	B	4	385	60	24,399	5/7/26	100	0	0	0	Overlay - AC Structural	5/27/25
1068	650	Spring Street	Virage Street	Swidler Place	AAC	B	4	595	60	34,626	5/7/26	100	0	0	0	Overlay - AC Structural	5/27/25
1068	652	Spring Street	Swidler Place	Esplanade Street	AAC	B	5	1,490	60	89,152	5/7/26	100	0	0	0	Overlay - AC Structural	5/27/25
1068	653	Spring Street	Esplanade Street	Esplanade Street	AC	B	4	117	60	9,623	5/7/26	100	0	0	0	New Construction - Initial	10/30/12
1079	689	State College Boulevard	Orangewood Avenue	Orange Center Drive	AC	B	8	890	121	101,927	4/22/26	96	100	0	0	New Construction - Initial	1/1/80
1079	724	State College Boulevard	Orange Center Drive	Anaheim Avenue	AC	B	8	360	140	50,018	4/22/26	97	100	0	0	New Construction - Initial	1/1/80
1079	725	State College Boulevard	5 Fwy SB Off-Ramp	Anaheim Avenue	AC	B	8	1,100	120	92,118	4/22/26	97	100	0	0	New Construction - Initial	1/1/80
1079	726	State College Boulevard	Chapman Avenue	5 Fwy SB Off-Ramp	AC	B	8	250	120	78,276	4/22/26	97	100	0	0	New Construction - Initial	1/1/80
1091	2218	Struck Avenue	Batavia Street	East End	AAC	C	2	1,170	44	53,220	4/2/26	65	45	50	5	Overlay - AC Structural	1/1/97
1091	2219	Struck Avenue	Main Street	Batavia Street	AC	C	2	1,545	44	64,934	4/2/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1091	2220	Struck Avenue	Katella Avenue	Main Street	AC	C	2	1,100	44	48,013	4/2/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1109	2013	Sycamore Avenue	Ash Street	Main Street	AC	C	2	1,205	39	42,075	4/10/26	74	66	29	5	New Construction - Initial	1/1/80
1109	2014	Sycamore Avenue	Eckhoff Street	Ash Street	AC	C	2	1,300	39	50,448	4/10/26	70	53	15	32	Surface Treatment - Slurry Seal	1/1/97
1112	2472	Taft Avenue	Sycamore Street	Yurok Street	AC	C	2	1,035	58	55,866	5/26/26	80	43	39	18	New Construction - Initial	1/1/80
1112	323	Taft Avenue	Neville Street	Glassell Street	AAC	B	4	1,280	80	101,712	5/21/26	58	44	42	14	Overlay - AC Structural	1/1/02
1112	325	Taft Avenue	Batavia Street	Neville Street	AAC	B	4	1,485	80	109,148	5/21/26	65	47	28	25	Overlay - AC Structural	1/1/02
1112	327	Taft Avenue	Main Street	Batavia Street	AC	B	4	1,540	80	125,081	5/21/26	65	41	57	2	2 in Cold Mill & Overlay	5/8/07
1112	328	Taft Avenue	600' w/o Main Street	Main Street	AAC	B	4	600	80	43,736	5/20/26	41	18	82	0	2 in Cold Mill & Overlay	5/8/07
1112	331	Taft Avenue	Greengrove Street	Tustin Avenue	AAC	B	4	1,170	80	91,447	3/27/26	100	0	0	0	Overlay - AC Structural	1/1/02
1112	333	Taft Avenue	Cambridge Street	Greengrove Street	AAC	B	4	1,650	80	133,108	3/27/26	100	0	0	0	Overlay - AC Structural	1/1/02
1112	335	Taft Avenue	Shaffer Street	Cambridge Street	AAC	B	4	1,120	80	75,388	3/27/26	100	0	0	0	Overlay - AC Structural	1/1/02
1112	337	Taft Avenue	Glassell Street	Shaffer Street	AAC	B	2	1,145	80	91,525	3/27/26	100	0	0	0	Overlay - AC Structural	1/1/02
1112	338	Taft Avenue	Tustin Avenue	Scramento Street	AAC	B	4	1,390	60	86,176	5/13/26	79	45	9	46	Overlay - AC Structural	6/1/19
1112	340	Taft Avenue	Sacramento Street	Fern Street	AAC	B	4	1,310	60	77,851	5/13/26	83	45	45	10	Overlay - AC Structural	6/1/19
1112	342	Taft Avenue	Fern Street	Santiago Boulevard	AAC	B	4	1,075	60	63,542	5/13/26	89	100	0	0	Overlay - AC Structural	6/1/19
1112	344	Taft Avenue	Santiago Boulevard	960' e/o Santiago Boulevard	AC	C	2	960	30	59,386	5/13/26	85	100	0	0	New Construction - Initial	1/1/80
1112	3506	Taft Avenue	Cannon Street	Yukon Street	AC	C	2	485	16	10,471	5/1/26	72	38	62	0	New Construction - Initial	1/1/80
1112	3507	Taft Avenue	Yukon Street	Cannon Street	AC	C	2	485	24	12,306	5/1/26	74	73	25	2	New Construction - Initial	1/1/80
1121	3519	The City Drive	Metropolitan Drive	Park Central Avenue	AAC	B	6	1,367	80	97,027	4/16/26	100	0	0	0	Overlay - AC Structural	5/13/24
1121	690	The City Drive	The City Way	Justice Center Way	AAC	B	8	1,310	93	85,960	4/22/26	77	40	59	1	Surface Treatment - Slurry Seal	5/27/25
1121	691	The City Drive	Style Street	Metropolitan Drive	AC	B	6	1,310	110	142,482	4/16/26	74	83	13	4	Surface Treatment - Slurry Seal	8/1/17
1121	692	The City Drive	Park Central Avenue	Garden Grove Boulevard	AC	B	5	1,235	80	65,384	4/16/26	74	71	29	0	Surface Treatment - Slurry Seal	11/1/08
1121	697	The City Drive	Chapman Avenue	The City Way	AAC	B	8	1,170	88	117,729	4/22/26	76	32	60	8	Surface Treatment - Slurry Seal	5/27/25
1134	814	Town & Country Road	Main Street	Lawson Way	AC	B	4	1,220	60	84,882	4/3/26	75	58	23	19	Surface Treatment - Slurry Seal	1/1/91
1134	815	Town & Country Road	Lawson Way	Parker Street	AC	B	4	1,050	64	76,644	4/3/26	72	47	28	25	New Construction - Initial	1/1/80
1144	258	Tustin Street	Santa Ana Canyon	Sunview Drive	AAC	B	4	965	60	58,639	5/19/26	89	75	25	0	Overlay - AC Structural	6/1/21
1144	260	Tustin Street	Bixby Ave	Route 55 SB Off-Ramp	AAC	B	4	1,020	60	33,032	5/15/26	88	100	0	0	Overlay - AC Structural	6/1/21
1144	262	Tustin Street	Route 55 SB Off-Ramp	Lincoln Avenue	AAC	B	5	700	70	47,873	5/15/26	90	74	26	0	Overlay - AC Structural	6/1/21
1144	266	Tustin Street	170' n/o Heim Avenue	Heim Avenue	AC	B	3	170	48	7,427	5/15/26	87	52	17	31	New Construction - Initial	1/1/80
1144	268	Tustin Street	Heim Avenue	East Village Way	AC	B	3	1,480	40	44,678	5/18/26	77	83	17	0	New Construction - Initial	1/1/80
1144	269	Tustin Street	East Village Way	Heim Avenue	AC	B	3	1,480	40	54,758	5/13/26	86	100	0	0	New Construction - Initial	1/1/80
1144	270	Tustin Street	East Village Way	Meats Avenue	AC	B	3	1,165	40	42,761	5/18/26	78	88	12	0	New Construction - Initial	1/1/80
1144	271	Tustin Street	Meats Avenue	East Village Avenue	AC	B	3	1,165	40	42,821	5/13/26	75	87	13	0	New Construction - Initial	1/1/80
1144	272	Tustin Street	Meats Avenue	Briardale Avenue	AAC	B	3	1,985	40	71,790	5/18/26	80	85	15	0	Overlay - AC Structural	8/1/17

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1144	273	Tustin Street	Briardale Avenue	Meats Avenue	AAC	B	3	1,985	40	86,617	5/13/26	79	65	32	3	Overlay - AC Structural	8/1/17
1144	274	Tustin Street	Briardale Avenue	Taft Avenue	AC	B	3	585	40	22,136	5/18/26	76	54	33	13	Surface Treatment - Slurry Seal	8/1/17
1144	275	Tustin Street	Taft Avenue	Briardale Avenue	AC	B	3	590	40	22,412	5/15/26	83	69	11	20	Surface Treatment - Slurry Seal	8/1/17
1144	276	Tustin Street	Chestnut Avenue	Van Owen Avenue	AC	B	3	970	40	37,776	5/18/26	81	76	0	24	Surface Treatment - Slurry Seal	8/1/17
1144	277	Tustin Street	Van Owen Avenue	Chestnut Avenue	AC	B	3	970	40	37,452	5/15/26	71	48	47	5	Surface Treatment - Slurry Seal	8/1/17
1144	278	Tustin Street	Van Owen Avenue	PCC 150' N/ Katella Avenue	AC	B	3	750	40	20,652	5/18/26	74	32	39	29	Surface Treatment - Slurry Seal	8/1/17
1144	279	Tustin Street	Katella Avenue	Van Owen Avenue	AC	B	3	750	40	27,216	5/14/26	50	20	73	7	Surface Treatment - Slurry Seal	8/1/17
1144	280	Tustin Street	Katella Avenue	Adams Avenue	AC	B	3	885	40	38,227	5/18/26	69	30	59	11	Surface Treatment - Slurry Seal	8/1/17
1144	281	Tustin Street	Adams Avenue	Katella Avenue	AC	B	3	885	40	30,227	5/15/26	82	36	43	21	Surface Treatment - Slurry Seal	8/1/17
1144	282	Tustin Street	Adams Avenue	Collins Avenue	AC	B	3	1,540	40	56,802	5/18/26	73	51	48	1	Surface Treatment - Slurry Seal	8/1/16
1144	283	Tustin Street	Collins Avenue	Adams Avenue	AC	B	3	1,540	40	56,071	5/15/26	72	31	43	26	Surface Treatment - Slurry Seal	8/1/17
1144	284	Tustin Street	Collins Avenue	Mayfair Avenue	AC	B	6	1,205	80	90,630	5/14/26	71	35	43	22	Surface Treatment - Slurry Seal	9/8/17
1144	286	Tustin Street	Mayfair Avenue	Walnut Avenue	AC	B	6	1,430	80	111,942	5/14/26	75	44	55	1	Surface Treatment - Slurry Seal	8/1/17
1144	288	Tustin Street	Walnut Avenue	Palm Avenue	AC	B	6	1,310	80	101,967	5/14/26	77	68	29	3	Surface Treatment - Slurry Seal	8/1/17
1144	290	Tustin Street	Palm Avenue	Chapman Avenue	AC	B	6	1,295	80	98,074	5/14/26	77	73	21	6	Surface Treatment - Slurry Seal	8/1/17
1144	292	Tustin Street	Chapman Avenue	Palmyra Avenue	AC	B	6	1,310	80	95,313	5/18/26	75	47	47	6	Surface Treatment - Slurry Seal	8/1/17
1144	294	Tustin Street	Palmyra Avenue	La Veta Avenue	AC	B	6	1,350	80	111,591	5/18/26	67	39	57	4	Surface Treatment - Slurry Seal	8/1/17
1144	296	Tustin Street	La Veta Avenue	22 Fwy Bridge	AC	B	6	800	80	55,796	5/18/26	68	33	58	9	Surface Treatment - Slurry Seal	8/1/17
1144	298	Tustin Street	Seba Street	Fairhaven Avenue	AC	B	6	945	80	69,218	5/18/26	70	54	43	3	New Construction - Initial	1/1/80
1144	3454	Tustin Street	350' s/o Lincoln Ave	170' n/o Heim	AC	B	3	1,180	40	54,348	5/15/26	89	100	0	0	New Construction - Initial	1/1/80
1144	3508	Tustin Street	22 Fwy Bridge	Seba Ave	AC	B	6	530	80	37,745	5/18/26	65	52	47	1	New Construction - Initial	1/1/80
1144	3510	Tustin Street	Taft Ave	Chestnut Avenue	AC	B	3	765	40	29,096	5/18/26	78	51	40	9	New Construction - Initial	1/1/80
1144	3511	Tustin Street	Chestnut Avenue	Taft Avenue	AC	B	3	760	40	29,990	5/15/26	82	81	19	0	Surface Treatment - Slurry Seal	8/1/17
1144	3525	Tustin Street	Sunview Ave	Bixby Ave	AAC	B	4	770	60	46,811	5/19/26	91	100	0	0	Overlay - AC Structural	6/1/21
1144	3536	Tustin Street	End PCC (170' S/ Tustin St)	Chapman Ave	PCC	B	0	167	70	15,029	5/15/26	93	92	0	8	New Construction - Initial	1/1/80
1144	3537	Tustin Street	End PCC (170' N/ Tustin St)	Chapman Ave	PCC	B	0	168	50	8,450	5/14/26	90	93	0	7	New Construction - Initial	1/1/80
1144	3540	Tustin Street	End PCC (130' N/ Katella Ave)	Katella Ave	PCC	B	0	135	50	6,720	5/18/26	80	40	0	60	New Construction - Initial	1/1/80
1144	3541	Tustin Street	End PCC (150' S/ Katella Ave)	Katella Ave	PCC	B	0	155	62	11,894	5/15/26	76	45	49	6	New Construction - Initial	1/1/80
1144	3544	Tustin Street	Heim Ave	End PCC (650' S/ Village Way)	PCC	B	0	2,152	10	26,156	5/15/26	89	88	8	4	New Construction - Initial	1/1/80
1144	3545	Tustin Street	Lincoln Ave	Pvmt Chnge (350' S/ Lincoln Ave)	AC	B	0	345	40	14,989	5/15/26	89	100	0	0	New Construction - Initial	1/1/80
1144	3546	Tustin Street	Pvmt Chnge (350' S/ Lincoln Ave)	Lincoln Ave	AC	B	0	345	40	18,034	5/15/26	90	73	27	0	New Construction - Initial	1/1/80
1144	3547	Tustin Street	End PCC (120' N/ Lincoln Ave)	Lincoln Ave	PCC	B	0	120	52	6,188	5/15/26	90	72	0	28	New Construction - Initial	1/1/80
1144	4000	Tustin Street	170' n/o Heim	350' s/o Lincoln Ave	AC	B	3	1,175	35	51,866	5/13/26	92	100	0	0	New Construction - Initial	1/1/80
1144	4200	Tustin Street	Heim Ave	170' n/o Heim Avenue	AC	B	3	170	34	5,930	5/15/26	85	100	0	0	New Construction - Initial	1/1/80
1156	2030	Via Escola	Rosemere Street	Somerset Street	AAC	B	4	615	60	37,601	5/21/26	100	0	0	0	Overlay - AC Structural	2/1/24
1156	2031	Via Escola	Somerset Street	Springfield Street	AAC	B	4	380	60	24,140	5/21/26	100	0	0	0	Overlay - AC Structural	2/1/24
1156	2032	Via Escola	Springfield Street	Cannon Street	AAC	B	4	3,135	60	183,545	5/21/26	98	100	0	0	Overlay - AC Structural	2/1/24
1156	2065	Via Escola	Meats Avenue	Regency Avenue	AAC	B	4	315	60	17,270	4/29/26	99	52	0	48	Overlay - AC Structural	2/1/24
1156	2066	Via Escola	Regency Avenue	Rosemere Street	AC	B	4	1,330	60	79,510	5/21/26	99	0	100	0	Overlay-Rubber Hot Mix	2/1/24
1333	8017	Villa Park Rd	Wanda Road	City Limits (665' E/O Wanda Road)	AC	B	2	665	32	23,272	5/20/26	66	43	42	15	New Construction - Initial	10/4/12
1164	2022	Villa Real Drive	220' n/o Lake Hill	Marywood Lane	AAC	C	2	730	36	23,641	5/21/26	94	100	0	0	Overlay - AC Structural	10/11/19
1164	2023	Villa Real Drive	1210' n/o Lake Hill	220' n/o Lake Hills	AAC	C	2	990	36	35,206	4/29/26	90	81	19	0	Overlay - AC Structural	12/14/06
1164	2024	Villa Real Drive	Santiago Boulevard	Ridge Park Lane	AAC	C	2	2,400	32	77,012	5/21/26	95	100	0	0	Overlay - AC Structural	10/11/19
1164	2025	Villa Real Drive	Ridge Park Lane	Marywood Lane	AAC	C	2	965	36	34,188	5/21/26	95	100	0	0	Overlay - AC Structural	10/11/19
1186	1258	Walnut Avenue	Prospect Street	West End	AC	C	2	445	32	17,149	5/21/26	63	100	0	0	New Construction - Initial	1/1/80
1186	2972	Walnut Avenue	Park Lane	Milford	AC	C	2	1,335	40	44,051	5/22/26	69	63	30	7	Surface Treatment - Slurry Seal	1/1/91
1186	525	Walnut Avenue	Main Street	Batavia Street	AAC	C	2	1,370	30	44,543	5/19/26	80	48	31	21	Overlay - AC Structural	1/1/96
1186	526	Walnut Avenue	Batavia Street	Cypress Street	AAC	C	2	1,615	48	80,884	5/13/26	90	61	39	0	Overlay - AC Structural	5/27/25
1186	527	Walnut Avenue	Cypress Street	Glassell Street	AAC	C	2	980	36	35,925	5/13/26	61	46	30	24	Overlay - AC Structural	1/1/00
1186	528	Walnut Avenue	Glassell Street	Center Street	AAC	C	3	955	46	42,344	5/14/26	81	82	18	0	Surface Treatment - Slurry Seal	6/1/21
1186	529	Walnut Avenue	Center Street	Shaffer Street	AAC	C	2	365	36	12,330	5/14/26	82	76	24	0	Surface Treatment - Slurry Seal	6/1/21
1186	530	Walnut Avenue	Shaffer Street	Cambridge Street	AAC	C	2	1,280	34	40,762	5/14/26	93	81	0	19	Overlay - AC Structural	1/1/21
1186	531	Walnut Avenue	Cambridge Street	California Street	AAC	C	2	1,305	38	49,032	5/14/26	44	51	42	7	Overlay - AC Structural	1/1/97
1186	532	Walnut Avenue	California Street	Tustin Street	AAC	C	3	1,260	48	63,012	5/14/26	57	48	42	10	Overlay - AC Structural	1/1/97
1186	533	Walnut Avenue	Tustin Street	Wayfield Street	AC	C	2	480	48	25,052	5/21/26	73	93	7	0	Surface Treatment - Slurry Seal	1/1/91
1186	534	Walnut Avenue	Wayfield Street	Park Lane	AC	C	2	300	38	13,598	5/21/26	73	87	0	13	Surface Treatment - Slurry Seal	1/1/91
1186	537	Walnut Avenue	Milford Street	Handy Street	AC	C	2	535	38	24,529	5/19/26	81	100	0	0	New Construction - Initial	4/3/12
1186	538	Walnut Avenue	Handy Street	Hart Street	AC	C	2	790	34	22,814	5/19/26	84	100	0	0	New Construction - Initial	4/3/12
1186	539	Walnut Avenue	Hart Street	Cul-de-sac	AC	C	2	457	48	31,309	5/19/26	77	100	0	0	New Construction - Initial	4/3/12

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1186	543	Walnut Avenue	Hewes Street	Rancho Santiago Boulevard	AAC	C	2	1,270	36	46,513	5/15/26	54	57	42	1	Surface Treatment - Slurry Seal	11/1/08
1186	544	Walnut Avenue	Rancho Santiago Blvd	East End	AAC	C	2	650	36	24,252	5/15/26	77	75	25	0	Overlay - AC Structural	10/1/08
1189	546	Wanda Road	420' s/o Santiago Boulevard	Katella Avenue	AC	B	4	750	60	42,703	5/20/26	69	51	45	4	New Construction - Initial	1/1/80
1189	547	Wanda Road	Katella Avenue	Quincy Avenue	AC	B	2	1,430	54	88,786	5/20/26	63	30	61	9	New Construction - Initial	1/1/80
1189	548	Wanda Road	Quincy Avenue	Collins Avenue	AAC	B	2	1,435	54	78,202	5/20/26	75	77	8	15	Overlay - AC Structural	11/14/06
1258	18488	Yorba Street	La Veta Avenue	Burdie Lane	AC	B	4	1,003	60	49,760	4/10/26	100	0	0	0	Mill and Overlay	1/3/23
1258	549	Yorba Street	135' s/o Burdie Lane	Fairhaven Avenue	AAC	B	4	1,620	60	94,190	4/10/26	100	0	0	0	Overlay - AC Structural	5/27/25
1258	552	Yorba Street	Palmyra Avenue	La Veta Avenue	AAC	B	4	1,320	60	76,368	4/10/26	100	0	0	0	Mill and Overlay	1/3/23
1258	554	Yorba Street	Chapman Avenue	Palmyra Avenue	AC	B	2	1,320	60	79,299	5/19/26	78	49	32	19	Surface Treatment - Slurry Seal	1/1/92
								95.9		**29,615,468**							
		Locals															
3	789	Acacia Avenue	Jewell Place	Lime Street	AC	E	2	435	32	13,920	3/4/24	64	93	0	7	Surface Reconstruction - AC	1/1/91
3	790	Acacia Avenue	Lime Street	Batavia Street	AC	E	2	605	32	19,360	3/4/24	95	100	0	0	Surface Reconstruction - AC	1/1/91
4	834	Adams Avenue	Glassell Street	Grand Street	AAC	E	2	615	32	19,680	3/13/24	65	56	26	18	Surface Treatment - Slurry Seal	1/1/02
4	835	Adams Avenue	Shaffer Street	Cambridge Street	AAC	E	2	1,275	32	40,800	2/9/24	83	96	0	4	Surface Reconstruction - AC	1/1/94
4	836	Adams Avenue	Cambridge Street	California Street	AC	E	2	975	32	31,200	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
4	837	Adams Avenue	California Street	Tustin Avenue	AAC	E	2	1,590	32	50,880	2/9/24	94	100	0	0	Overlay - AC Structural	1/1/04
4	838	Adams Avenue	Tustin Avenue	East End	AC	E	2	930	32	29,760	3/4/24	88	34	0	66	New Construction - Initial	1/1/80
4	839	Adams Avenue	Sacramento Street	Handy Street	AAC	E	2	1,140	32	36,480	2/8/24	90	93	0	7	2 in overlay	8/29/07
4	840	Adams Avenue	Handy Street	Hart Street	AAC	E	2	1,020	32	32,640	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
5	857	Adele Street	North End	120' s/o Mayfair Avenue	AC	E	2	1,240	32	39,680	3/20/24	78	86	13	1	Surface Treatment - Slurry Seal	1/1/02
6	3118	Adobe Way	Hewes Street	Big Sky Lane	AC	E	2	196	34	5,034	11/28/23	92	100	0	0	New Construction - Initial	1/1/80
7	855	Agate Street	North End	Meats Avenue	AAC	E	2	415	32	14,780	12/12/23	95	100	0	0	Overlay - AC Structural	8/30/21
7	856	Agate Street	Meats Avenue	Grove Avenue	AC	E	2	745	32	24,590	12/13/23	66	29	71	0	Surface Treatment - Slurry Seal	8/1/16
9	858	Alanda Avenue	Norwood Street	East End	AC	E	2	200	32	7,900	3/6/24	77	91	9	0	Surface Treatment - Slurry Seal	1/1/02
10	833	Albion Lane	Greengrove Street	East End	AAC	E	2	290	32	10,380	3/15/24	100	0	0	0	Overlay - AC Structural	3/3/22
11	841	Alder Grove Circle	Glendora Avenue	East End	AC	E	2	360	32	11,520	8/27/24	98	100	0	0	Surface Treatment - Slurry Seal	1/1/98
12	827	Alderly Lane	Ridgeway Road	Glen Canyon Road	AC	E	2	810	36	28,585	12/6/23	82	96	0	4	Surface Treatment - Slurry Seal	1/1/02
13	842	Alderwood Avenue	West End	Pinewood Street	AAC	E	2	160	32	5,120	3/28/24	66	100	0	0	Overlay - AC Structural	10/1/08
64	718	Almond Avenue	West End	Flower Street	AC	E	2	520	30	14,040	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
64	719	Almond Avenue	Flower Street	Poinsettia Drive	AC	E	2	715	36	25,740	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
64	720	Almond Avenue	Poinsettia Drive	Feldner Road	AC	E	2	1,295	36	46,620	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
64	818	Almond Avenue	Feldner Road	Main Street	AC	E	2	960	38	36,480	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
64	819	Almond Avenue	Main Street	Batavia Street	AC	E	2	1,615	38	61,370	3/13/24	75	61	22	17	Surface Treatment - Slurry Seal	1/1/04
64	843	Almond Avenue	Solana Drive	Woodlawn Drive	AAC	E	2	515	36	18,252	3/6/24	98	67	0	33	Overlay - AC Structural	3/3/22
64	844	Almond Avenue	Prospect Street	Dunas Street	AC	E	2	465	32	15,380	1/26/24	89	100	0	0	New Construction - Initial	4/3/12
64	845	Almond Avenue	Olympia Way	Swidler Place	AAC	E	2	395	32	14,140	1/26/24	81	87	13	0	Overlay - AC Structural	12/12/12
64	846	Almond Avenue	Yorba Street	Malena Street	AAC	E	2	1,085	32	34,470	1/26/24	85	85	15	0	2 in overlay	8/1/09
64	847	Almond Avenue	Violet Lane	Prospect Street	AAC	E	2	515	32	16,980	1/26/24	80	81	0	19	Overlay - AC Structural	10/1/07
64	848	Almond Avenue	Shaffer Street	Cambridge Street	AAC	E	2	1,270	32	40,640	3/14/24	85	82	0	18	Surface Reconstruction - AC	1/1/03
64	849	Almond Avenue	Cambridge Street	Jameson Street	AAC	E	2	1,170	36	42,120	2/21/24	89	49	46	5	Overlay - AC Structural	1/13/16
64	850	Almond Avenue	Jameson Street	Lincoln Street	AAC	E	2	770	36	27,720	2/20/24	85	83	17	0	Overlay - AC Structural	1/13/16
65	2203	Alpine Road	Orangegrove Avenue	Orangewood Avenue	AAC	I	2	375	44	16,500	3/7/24	80	39	59	2	Overlay - AC Structural	1/1/02
65	820	Alpine Road	Culver Avenue	La Veta Avenue	AC	E	2	625	32	20,000	3/13/24	68	27	28	45	Surface Treatment - Slurry Seal	1/1/04
66	3342	Altaview	Sky Gate Lane	Avalon Avenue	AC	E	2	981	30	30,180	11/20/23	92	100	0	0	Surface Treatment - Slurry Seal	6/1/20
67	851	Altura Avenue	West End	Santiago Boulevard	AC	E	2	820	32	28,040	12/12/23	79	45	55	0	Surface Treatment - Slurry Seal	1/1/04
67	852	Altura Avenue	Santiago Boulevard	East End	AC	E	2	640	32	21,980	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
68	2195	Alvarez Avenue	Main Street	East End	AC	I	2	525	44	23,100	3/8/24	70	100	0	0	Surface Treatment - Slurry Seal	1/1/95
69	829	Amapola Avenue	150' w/o Ridgeline Road	Santiago Canyon Road	AC	E	2	1,185	22	26,070	10/25/23	61	46	42	12	New Construction - Initial	1/1/80
69	830	Amapola Avenue	185' e/o Orange Park Blvd	Ranchwood Trail	AC	E	2	1,600	16	25,600	10/26/23	85	100	0	0	New Construction - Initial	1/1/80
70	853	Amber Avenue	Millbrae Street	Hayford Street	AAC	E	2	1,045	32	33,440	2/28/24	72	39	59	2	Overlay - AC Structural	1/1/04
71	859	Amberwood Street	Timberland Avenue	Sprucewood Avenue	AC	E	2	520	32	18,140	10/19/23	68	27	73	0	Surface Treatment - Slurry Seal	1/1/18
72	2450	American Way	Fletcher Street	Freedom Avenue	AC	E	2	770	44	33,880	4/11/24	38	30	62	8	Surface Treatment - Slurry Seal	1/1/95
73	854	Amos Street	Denise Avenue	Altura Avenue	AC	E	2	405	32	12,360	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
75	625	Anchor Street	Lincoln Avenue	260' w/o Gallery Street	AAC	E	2	515	32	16,480	2/28/24	91	100	0	0	Overlay - AC Structural	12/13/06
75	626	Anchor Street	260' w/o Gallery Street	Buoy Avenue	AAC	E	2	925	32	29,600	2/28/24	87	55	0	45	Overlay - AC Structural	12/13/06
76	2654	Andover Drive	Crown Parkway	Skyline Drive	AC	E	2	209	32	7,188	11/20/23	89	46	54	0	Surface Treatment - Slurry Seal	3/21/22
78	2207	Angus Avenue	Batavia Street	Hariton Street	AC	I	2	1,075	44	47,300	3/8/24	71	57	27	16	Surface Treatment - Slurry Seal	1/1/95
79	2239	Anita Drive	Chapman Avenue	South End	AC	I	2	1,310	36	48,960	3/7/24	88	81	0	19	Surface Treatment - Slurry Seal	1/1/95

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
80	3149	Antonio Circle	Stetson Lane	North End	AC	E	2	662	32	22,684	11/28/23	83	74	0	26	New Construction - Initial	1/1/80
81	2639	Apache Creek Road	Serrano Avenue	Villanueva Drive	AC	E	2	135	36	4,644	11/21/23	85	100	0	0	New Construction - Initial	1/1/80
83	860	Appletree Lane	West End	Deep Spring Road	AC	E	2	460	32	16,220	10/17/23	89	100	0	0	Surface Treatment - Slurry Seal	1/1/18
85	828	Arabian Avenue	Stallion Street	East End	AAC	E	2	295	32	9,348	10/25/23	93	58	0	42	Overlay - AC Structural	1/1/04
86	569	Arbor Way	Eckhoff Street	East End	AC	E	2	250	32	8,000	3/12/24	71	54	46	0	Surface Treatment - Slurry Seal	1/1/04
86	570	Arbor Way	West End	Citrus Street	AC	E	2	400	32	13,850	3/4/24	90	32	0	68	Complete Reconstruction - AC	10/1/06
87	861	Arlington Road	Hartford Road	Gainsborough Road	AAC	E	2	505	32	16,160	2/22/24	88	80	20	0	Surface Reconstruction - AC	1/1/02
88	752	Ash Street	Sycamore Avenue	South End	AAC	E	2	490	32	15,680	3/11/24	100	100	0	0	Overlay - AC Structural	7/7/22
91	580	Ashwood Street	Brookshire Avenue	Redwood Avenue	AAC	E	2	1,120	32	35,840	3/1/24	83	78	12	10	Overlay - AC Structural	1/1/03
91	581	Ashwood Street	Dunton Avenue	Crystal Avenue	AC	E	2	730	32	23,360	3/1/24	66	43	40	17	Surface Treatment - Slurry Seal	1/1/03
91	582	Ashwood Street	Rainier Avenue	Woods Street	AAC	E	2	1,620	30	48,600	2/29/24	85	82	18	0	Surface Treatment - Slurry Seal	3/21/21
91	583	Ashwood Street	Riverview Avenue	Rainier Avenue	AAC	E	2	530	30	15,900	2/29/24	85	80	19	1	Surface Treatment - Slurry Seal	3/21/22
92	1869	Aspen Street	North End	Canyon View Ave	AC	E	2	515	36	20,338	10/17/23	47	60	40	0	Surface Treatment - Slurry Seal	1/1/96
92	591	Aspen Street	Canyon View Avenue	Timberland Avenue	AC	E	2	135	36	4,644	10/19/23	89	85	15	0	Surface Treatment - Slurry Seal	1/1/18
93	2202	Atchison Street	Maple Avenue	Chapman Ave	AC	I	1	615	14	11,110	3/18/24	29	7	74	19	New Construction - Initial	1/1/80
94	645	Athens Avenue	Harding Street	East End	AAC	E	2	220	32	7,040	3/4/24	70	77	9	14	Overlay - AC Structural	11/13/06
94	646	Athens Avenue	Sacramento Street	Handy Street	AAC	E	2	1,160	32	37,120	3/1/24	99	42	0	58	Overlay - AC Structural	3/3/22
94	647	Athens Avenue	Handy Street	Harding Street	AAC	E	2	1,100	32	35,200	3/1/24	87	71	0	29	Overlay - AC Structural	12/13/06
97	2559	Auburn Street	Via Escola	South End	AC	E	2	215	36	9,240	3/20/24	53	29	71	0	New Construction - Initial	1/1/80
98	602	Austin Avenue	West End	Dunas Street	AAC	E	2	140	32	5,980	2/20/24	84	92	0	8	Overlay - AC Structural	6/1/21
98	603	Austin Avenue	Olympia Way	East End	AC	E	2	150	32	5,900	2/20/24	69	99	0	1	Surface Treatment - Slurry Seal	1/1/91
99	592	Autumn Hill Way	Cobblestone Drive	South End	AC	E	2	200	32	7,900	10/19/23	87	53	47	0	Surface Treatment - Slurry Seal	1/1/18
101	3303	Avalon	Altaview Drive	Chadwick Parkway	AC	E	2	1,214	32	39,598	11/21/23	89	100	0	0	Surface Treatment - Slurry Seal	6/1/20
102	821	Avenida Palmar	Renee Street	Thora Street	AAC	E	2	603	32	19,296	11/1/23	77	52	43	5	Overlay - AC Structural	1/1/99
102	822	Avenida Palmar	Cannon Street	Quail Lane	AC	E	2	125	32	3,744	11/1/23	89	100	0	0	New Construction - Initial	1/1/80
102	823	Avenida Palmar	Thora Street	Cannon Street	AAC	E	2	823	32	26,336	11/1/23	75	71	9	20	Overlay - AC Structural	1/1/99
103	831	Avila Place	Cerritos Drive	South End	AC	E	2	350	32	12,700	11/2/23	89	58	42	0	Surface Treatment - Slurry Seal	3/21/22
103	832	Avila Place	North End	Valencia Drive	AAC	E	2	225	32	8,700	11/16/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
106	634	Bailey Drive	Riding Way	Southeast End	AAC	E	2	235	32	9,020	12/13/23	91	100	0	0	Overlay - AC Structural	1/1/18
106	635	Bailey Drive	Denise Avenue	Altura Avenue	AC	E	2	300	32	9,216	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
108	611	Baldwin Avenue	West End	Ramona Street	AAC	E	2	850	32	27,200	2/28/24	92	100	0	0	Overlay - AC Structural	10/1/08
108	612	Baldwin Avenue	Oceanview Street	East End	AAC	E	2	255	32	8,160	2/28/24	84	100	0	0	Overlay - AC Structural	10/1/08
108	613	Baldwin Avenue	Santa Anita Street	Santa Lucia Street	AC	E	2	705	32	22,560	2/28/24	82	100	0	0	Surface Treatment - Slurry Seal	11/1/08
110	2209	Barkley Street	Batavia Street	East End	AAC	E	2	335	44	14,740	3/8/24	87	91	0	9	Overlay - AC Structural	1/1/02
110	636	Barkley Street	Hart Street	East End	AC	E	2	500	32	16,000	2/13/24	64	82	17	1	Surface Treatment - Slurry Seal	1/1/02
110	637	Barkley Street	West End	Highland Street	AC	E	2	295	32	9,440	2/27/24	89	60	0	40	Surface Treatment - Slurry Seal	1/1/02
110	638	Barkley Street	Main Street	Batavia Street	AAC	E	2	1,410	44	62,040	3/8/24	79	93	0	7	Overlay - AC Structural	12/12/12
110	640	Barkley Street	Grand Street	Shaffer Street	AC	E	2	625	32	20,000	3/5/24	87	65	0	35	Surface Treatment - Slurry Seal	6/1/21
110	641	Barkley Street	Shaffer Street	East End	AC	E	2	1,040	32	33,280	2/9/24	89	100	0	0	Surface Treatment - Slurry Seal	1/1/02
110	642	Barkley Street	California Street	Lincoln Street	AAC	E	2	625	32	20,000	2/2/24	91	100	0	0	Overlay - AC Structural	1/1/03
114	606	Baxter Street	Trenton Avenue	Van Owen Avenue	AC	E	2	235	32	7,520	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
115	593	Bayberry Street	North End	Sprucewood Avenue	AC	E	2	220	32	8,838	10/19/23	64	18	82	0	Surface Treatment - Slurry Seal	1/1/18
116	2248	Baywood Avenue	South End	Glassell Street	AC	I	2	640	44	28,160	3/11/24	44	29	66	5	New Construction - Initial	1/1/80
117	595	Bear Tree Lane	Fox Run Lane	Deerfield Lane	AC	E	2	390	32	12,980	10/19/23	81	46	52	2	Surface Treatment - Slurry Seal	1/1/18
118	2428	Beaton Way	Donnybrooke Street	East End	AC	E	2	170	31	6,320	3/12/24	69	26	74	0	Surface Treatment - Slurry Seal	1/1/97
119	2185	Bedford Road	La Veta Avenue	Bronson Avenue	AAC	I	2	630	45	28,350	3/27/24	84	27	50	23	Overlay - AC Structural	1/1/04
119	2448	Bedford Road	Culver Avenue	La Veta Avenue	AC	E	2	630	31	19,530	3/13/24	77	59	40	1	Surface Treatment - Slurry Seal	1/1/04
119	2449	Bedford Road	Palmyra Avenue	Culver Avenue	AC	E	2	605	40	24,200	3/13/24	84	59	3	38	Surface Treatment - Slurry Seal	1/1/02
120	630	Beechwood Street	Riverdale Avenue	Riverview Avenue	AAC	E	2	235	32	7,520	2/29/24	99	100	0	0	Overlay - AC Structural	3/3/22
120	631	Beechwood Street	Woodstock Avenue	Fletcher Avenue	AAC	E	2	395	32	12,640	3/1/24	78	47	51	2	Overlay - AC Structural	1/1/03
120	632	Beechwood Street	Dunton Avenue	Crystal View Avenue	AC	E	2	615	32	19,680	3/1/24	58	20	76	4	Surface Treatment - Slurry Seal	1/1/03
120	633	Beechwood Street	Rainer Avenue	South End	AAC	E	2	325	32	10,400	2/29/24	90	100	0	0	Surface Treatment - Slurry Seal	3/21/22
121	608	Belbrook Street	Amber Avenue	Glendora Avenue	AAC	E	2	500	32	16,000	2/28/24	65	27	48	25	Overlay - AC Structural	1/1/04
122	601	Bennett Avenue	West End	Malena Street	AC	E	2	135	32	5,820	3/4/24	66	100	0	0	Grind Overlay with Dig Outs	10/1/13
124	825	Berkeley Circle	North End	Westway Avenue	AAC	E	2	215	32	6,880	3/1/24	89	100	0	0	Cold Milling	12/14/06
124	825	Berkeley Circle	North End	Westway Avenue	AAC	E	2	215	32	6,880	3/1/24	89	100	0	0	Overlay - AC Structural	12/14/06
124	825	Berkeley Circle	North End	Westway Avenue	AAC	E	2	215	32	6,880	3/1/24	89	100	0	0	Patching - AC Leveling	12/14/06
125	824	Berkeley Street	City Limit	South End	AC	E	2	470	36	16,920	2/29/24	81	71	0	29	Surface Treatment - Slurry Seal	1/1/95
127	627	Beverly Drive	Sycamore Avenue	East End	AAC	E	2	1,265	36	45,540	3/6/24	83	48	0	52	Overlay - AC Structural	1/1/02

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
127	628	Beverly Drive	Main Street	Crescent Drive	AC	E	2	550	32	17,600	3/8/24	81	23	0	77	Surface Reconstruction - AC	7/24/07
127	629	Beverly Drive	Poplar Street	East End	AC	E	2	730	32	23,360	3/6/24	99	100	0	0	Surface Treatment - Slurry Seal	1/1/04
128	3125	Big Sky	Adobe Way	North End	AC	E	2	583	36	23,988	11/28/23	91	90	0	10	Surface Treatment - Slurry Seal	1/1/18
129	862	Binnacle Street	Jetty Circle	East End	AC	E	2	510	32	16,128	3/7/24	56	44	55	1	Surface Treatment - Slurry Seal	1/1/03
130	863	Birch Avenue	Main Street	Fairmont Street	AC	E	2	595	32	19,040	2/1/24	69	100	0	0	New Construction - Initial	1/1/80
131	600	Birchwood Road	Bond Avenue	Cherrywood Lane	AC	E	2	510	36	19,860	11/27/23	77	68	0	32	New Construction - Initial	1/1/80
133	2622	Biscayne Way	Fairfield Lane	Firenza Way	AC	E	2	310	32	10,420	10/17/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
134	623	Bitterbush Street	North End	Chapman Avenue	AC	E	2	1,100	32	35,200	3/12/24	46	26	70	4	Surface Treatment - Slurry Seal	1/1/97
134	624	Bitterbush Street	North End	Palm Avenue	AC	E	2	335	32	10,720	3/11/24	73	65	34	1	Surface Treatment - Slurry Seal	1/1/97
135	620	Bixby Avenue	Magnolia Avenue	Orange Avenue	AAC	E	2	390	32	12,480	1/4/24	93	100	0	0	Overlay - AC Structural	1/1/19
135	621	Bixby Avenue	Orange Avenue	Gayle Street	AAC	E	2	975	26	25,350	1/4/24	93	100	0	0	Overlay - AC Structural	1/1/19
135	622	Bixby Avenue	Gayle Street	Tustin Street	AAC	E	2	1,230	32	39,360	1/4/24	93	100	0	0	Overlay - AC Structural	1/1/19
136	597	Blackberry Cove	Cobblestone Drive	Southwest End	AC	E	2	365	32	13,478	10/19/23	78	43	55	2	Surface Treatment - Slurry Seal	1/1/18
139	607	Blake Street	Trenton Avenue	South End	AAC	E	2	455	32	14,560	2/15/24	91	100	0	0	Surface Reconstruction - AC	9/20/07
141	604	Blue Bird Avenue	Hewes Street	East End	AC	E	2	850	32	28,998	11/28/23	74	26	66	8	Surface Treatment - Slurry Seal	6/1/20
142	605	Blue Jay Avenue	West End	Red Robin Street	AAC	E	2	950	32	32,650	11/27/23	94	100	0	0	Overlay - AC Structural	1/1/21
144	2255A	Blueridge Avenue	Case Street	Neville Street	AAC	I	2	414	44	18,216	4/11/24	32	11	81	8	Overlay - AC Structural	1/1/04
144	2255B	Blueridge Avenue	Neville Street	Glassell Street	AAC	I	2	1,371	44	60,324	4/11/24	63	38	57	5	Overlay - AC Structural	1/1/04
144	573	Blueridge Avenue	Orange-Olive Road	East End	AAC	E	2	635	36	22,860	2/16/24	82	96	0	4	Overlay - AC Structural	1/1/04
144	574	Blueridge Avenue	Fern Street	Hart Street	AAC	E	2	730	32	24,110	1/3/24	94	100	0	0	Overlay - AC Structural	1/1/21
144	575	Blueridge Avenue	Santiago Boulevard	East End	AAC	E	2	1,060	32	33,728	12/13/23	95	100	0	0	Overlay - AC Structural	1/1/19
145	598	Bobwhite Way	North End (near Pearl Street)	South End	AAC	E	2	385	32	15,916	11/1/23	91	100	0	0	Overlay - AC Structural	8/1/16
145	599	Bobwhite Way	North End (near Pearl Street)	Ryals Lane	AAC	E	2	380	23	11,240	11/1/23	89	100	0	0	Overlay - AC Structural	8/1/16
146	618	Bolingridge Drive	Northwest End	Hillview Drive	AC	E	2	1,000	32	32,000	8/27/24	82	80	20	0	New Construction - Initial	1/1/80
146	619	Bolingridge Drive	Westhaven Street	East End	AAC	E	2	135	32	4,320	1/4/24	89	100	0	0	Overlay - AC Structural	1/1/19
147	187	Bond Avenue	120' W Swan Street	Rancho Santiago Road	AAC	E	4	700	56	39,200	11/27/23	80	83	0	17	Overlay - AC Structural	10/1/08
147	188	Bond Avenue	Rancho Santiago Boulevard	120' E Bridle Path	AC	E	2	640	46	29,440	11/27/23	85	100	0	0	Asphalt Rubber Hot Mix	7/1/13
147	189	Bond Avenue	Hewes Street	120' W Swan Street	AC	E	2	590	28	16,520	11/27/23	87	97	0	3	New Construction - Initial	1/1/80
147	190	Bond Avenue	120' E Bridle Path	Birchwood Road	AC	E	4	450	40	17,000	11/27/23	92	100	0	0	New Construction - Initial	1/1/80
148	2645	Bonita Court	West End	Sierra Vista Drive	AC	E	2	220	32	8,540	11/20/23	91	93	7	0	Surface Treatment - Slurry Seal	6/1/20
149	617	Boom Avenue	Gaff Street	East End	AAC	E	2	470	32	15,040	2/28/24	87	74	0	26	Overlay - AC Structural	12/13/06
150	610	Bortz Street	Darby Street	Heim Avenue	AAC	E	2	300	32	9,600	2/28/24	99	54	0	46	Overlay - AC Structural	8/2/21
150	615	Bortz Street	St. James Avenue	Darby Avenue	AAC	E	2	475	32	15,200	2/28/24	97	100	0	0	Overlay - AC Structural	8/2/21
151	2650	Boscana Court	West End	Sierra Vista Drive	AC	E	2	260	32	9,820	11/20/23	93	100	0	0	Surface Treatment - Slurry Seal	6/1/20
153	616	Bourbon Street	Sail Avenue	Heim Avenue	AC	E	2	1,390	36	50,040	2/28/24	88	49	0	51	New Construction - Initial	4/3/12
154	614	Bouy Avenue	Anchor Street	East End	AAC	E	2	805	32	25,760	2/28/24	84	62	0	38	Overlay - AC Structural	12/13/06
156	2225	Braden Court	West End	Main Street	AC	I	2	635	44	27,940	3/8/24	27	47	53	0	New Construction - Initial	1/1/80
158	2594	Bradford Street	West End	Camden Street	AAC	E	2	585	32	20,220	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
158	2595	Bradford Street	Camden Street	Weston Street	AC	E	2	775	32	24,608	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
160	2488	Breckenridge Street	Meats Avenue	Cloverdale Avenue	AC	E	2	475	31	14,450	12/13/23	83	100	0	0	Surface Treatment - Slurry Seal	8/1/16
161	12931	Breezy Way	North End	Delia Lane	AC	E	2	370	32	12,940	2/22/24	74	30	0	70	New Construction - Initial	1/1/80
161	1441	Breezy Way	North End (near Burdie Lane)	South End	AC	E	2	1,440	32	49,680	2/22/24	69	54	44	2	Surface Treatment - Slurry Seal	1/1/02
163	2479	Brenna Lane	West End	Lemon St	AC	E	2	435	44	19,140	2/15/24	98	100	0	0	New Construction - Initial	1/1/80
164	2489	Brentford Avenue	Sacramento Street	Breckenridge Street	AC	E	2	370	31	12,220	12/13/23	80	51	49	0	New Construction - Initial	1/1/80
165	2432	Brentwood Avenue	Pampas Street	Glassell Street	AC	E	2	1,695	32	54,240	3/1/24	65	30	70	0	Surface Treatment - Slurry Seal	10/10/19
165	2484	Brentwood Avenue	West End	Cottonwood Street	AAC	E	2	200	32	6,400	3/1/24	86	100	0	0	Overlay - AC Structural	1/1/03
165	2629	Brentwood Avenue	Batavia Street	Kennedy Street	AAC	E	2	610	32	19,520	2/29/24	96	81	0	19	Overlay - AC Structural	1/1/19
165	3339	Brentwood Avenue	Glassell Street	East End	AC	E	2	532	32	17,024	3/1/24	70	34	53	13	Surface Treatment - Slurry Seal	1/1/03
167	2229	Brian Street	North End	Yale Street	AC	I	2	305	44	14,820	3/8/24	69	68	26	6	Surface Treatment - Slurry Seal	11/1/08
168	2552	Briar Creek Road	Woodwind Avenue	Canyon View Avenue	AC	E	2	125	30	3,390	10/17/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
169	433	Briar Crest Lane	West End	Deep Spring Road	AC	E	2	475	32	16,700	4/15/24	87	100	0	0	Surface Treatment - Slurry Seal	1/1/18
170	346	Briardale Avenue	Orange-Olive Road	East End	AAC	E	2	815	36	30,690	2/27/24	94	84	0	16	Overlay - AC Structural	10/11/19
170	562	Briardale Avenue	Woodside Street	Cambridge Street	AAC	E	2	855	32	27,360	2/27/24	81	21	65	14	Overlay - AC Structural	1/1/04
170	563	Briardale Avenue	West End	Lime Street	AAC	I	2	220	44	9,680	3/19/24	70	100	0	0	Overlay - AC Structural	1/1/99
170	564	Briardale Avenue	Case Street	Neville Street	AC	I	2	475	44	20,900	3/8/24	17	10	90	0	Micro Surfacing	8/31/07
170	566	Briardale Avenue	Lincoln Avenue	Tustin Avenue	AAC	E	2	885	32	28,320	3/4/24	98	71	0	29	Overlay - AC Structural	6/1/21
171	584	Briarwood Road	West End	Deep Spring Road	AC	E	2	550	32	17,600	10/17/23	89	100	0	0	Surface Treatment - Slurry Seal	1/1/18
172	2607	Bridle Path	North End	Bond Avenue	AC	E	2	500	32	17,500	11/27/23	79	100	0	0	New Construction - Initial	1/1/80
174	2180	Bristol Lane	Glassell Street	East End	AC	I	2	525	44	23,100	3/1/24	57	33	54	13	Surface Treatment - Slurry Seal	1/1/95

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
174	2247	Bristol Lane	West End	Glassell Street	AC	I	2	520	44	22,880	4/11/24	33	34	55	11	Surface Treatment - Slurry Seal	1/1/94
177	2425	Bronson Avenue	Devon Road	Bedford Road	AC	E	1	536	16	7,600	12/1/17	60	35	62	3	Surface Treatment - Slurry Seal	1/1/04
178	3460	Brook Glen Lane	Teal Lane	Deerfield Lane	AC	E	2	625	32	20,500	10/17/23	90	100	0	0	Surface Treatment - Slurry Seal	1/1/18
179	558	Brookshire Avenue	West End	Kennedy Street	AAC	E	2	435	32	13,920	2/29/24	95	95	0	5	Overlay - AC Structural	1/1/19
179	559	Brookshire Avenue	Pampas Street	Fernside Avenue	AC	E	2	1,650	32	52,800	3/1/24	70	42	53	5	Surface Treatment - Slurry Seal	10/10/19
179	560	Brookshire Avenue	Hartman Street	East End	AAC	E	2	220	32	7,040	3/1/24	98	100	0	0	Overlay - AC Structural	1/1/19
179	561	Brookshire Avenue	West End	Ashwood Street	AAC	E	2	560	32	17,920	3/1/24	89	100	0	0	Overlay - AC Structural	1/1/03
180	555	Brookside Avenue	Sycamore Street	Modoc Street	AAC	E	2	735	32	23,328	1/3/24	95	100	0	0	Overlay - AC Structural	1/1/21
180	556	Brookside Avenue	Morningside Street	Fireside Street	AAC	E	2	730	32	23,168	1/3/24	84	69	31	0	Overlay - AC Structural	1/31/16
180	557	Brookside Avenue	Fern Street	Santiago Boulevard	AC	E	2	1,140	32	36,480	1/3/24	95	100	0	0	Overlay-Rubber Hot Mix	1/3/23
181	864	Bryce Avenue	Zion Street	Lassen Boulevard	AAC	E	2	990	32	31,488	10/31/23	86	73	0	27	Overlay - AC Structural	8/1/17
181	865	Bryce Avenue	Lassen Boulevard	Yellowstone Boulevard	AAC	E	2	495	32	15,456	11/14/23	82	100	0	0	Overlay - AC Structural	8/1/17
181	866	Bryce Avenue	Yellowstone Boulevard	East End	AAC	E	2	820	32	27,740	11/14/23	82	100	0	0	Overlay - AC Structural	8/1/17
183	567	Buckeyewood Avenue	Shaffer Street	Cambridge Street	AAC	E	2	1,380	32	44,160	2/27/24	81	15	85	0	Overlay - AC Structural	1/1/03
183	568	Buckeyewood Avenue	Cambridge Street	Glendale Avenue	AC	E	2	1,655	32	52,960	2/27/24	100	0	0	100	Overlay-Rubber Hot Mix	2/1/24
184	594	Buckskin Way	Roundup Way	La Cumbre Drive	AC	E	2	550	32	17,600	10/24/23	85	100	0	0	Surface Treatment - Slurry Seal	10/10/19
185	3426	Buena Vista	150' e/o Orange	100' w/o Palm	AC	E	1	50	17	850	12/8/17	100	0	0	0	New Construction - Initial	1/1/80
187	13022	Burdie Lane	175' E Breezy Way	Yorba Street	AC	E	2	686	32	21,952	2/22/24	75	50	38	12	New Construction - Initial	1/1/80
187	643	Burdie Lane	Breezy Way	175' E Breezy Way	AC	E	2	175	32	5,600	2/22/24	76	97	0	3	New Construction - Initial	1/1/80
187	644	Burdie Lane	Yorba Street	Rosalind Street	AAC	E	2	190	32	6,580	2/23/24	87	96	0	4	2 in overlay	8/28/07
188	2495	Burly Avenue	Norwood Street	East End	AC	E	2	225	31	9,475	3/6/24	76	100	0	0	Surface Treatment - Slurry Seal	1/1/02
188	2497	Burly Avenue	Olympia Street	East End	AAC	E	2	410	32	14,620	1/26/24	81	100	0	0	Overlay - AC Structural	12/12/12
188	2802	Burly Avenue	Yorba Street	Malena Drive	AAC	E	2	1,130	32	36,660	2/14/24	86	100	0	0	2 in overlay	8/1/09
189	2536	Burton Avenue	West End	Chouteau Street	AAC	E	2	145	32	5,740	2/27/24	88	14	0	86	Overlay - AC Structural	6/1/19
190	2515	Bush Street	North End	Almond Avenue	AC	E	2	400	32	12,800	4/10/24	61	53	46	1	Surface Treatment - Slurry Seal	1/1/04
190	2516	Bush Street	Almond Avenue	Palmyra Place	AC	E	2	470	31	14,570	4/10/24	53	49	42	9	Surface Treatment - Slurry Seal	1/1/04
190	2517	Bush Street	Stewart Drive	Providence Avenue	AC	I	2	315	33	10,395	4/10/24	75	17	79	4	Surface Treatment - Slurry Seal	1/1/04
191	2242	Business Center Drive	Collins Avenue	Commerce Street	AC	I	2	805	44	35,420	3/8/24	47	48	52	0	Surface Treatment - Slurry Seal	1/1/94
192	2433	Butler Street	North End	Dunton Avenue	AAC	E	2	200	32	6,400	2/29/24	97	100	0	0	Overlay - AC Structural	1/1/19
193	2486	Butterfield Road	Santa Ana Canyon	Bixby Avenue	AC	E	2	1,580	33	52,140	1/4/24	94	100	0	0	Surface Treatment - Slurry Seal	10/10/19
92586	100500	Cabrillo Street	Santiago Canyon Road	Valencia Drive	AAC	E	2	325	32	10,400	8/28/24	82	79	21	0	Overlay - AC Structural	1/31/16
92586	100600	Cabrillo Street	San Juan Drive	Elsinore Avenue	AAC	E	2	340	32	10,880	8/28/24	72	67	33	0	Overlay - AC Structural	1/31/16
198	2176	California Street	Katella Avenue	Wilson Avenue	AC	I	2	575	36	20,700	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
198	2504	California Street	Collins Avenue	Mayfair Avenue	AC	E	2	1,125	32	36,000	2/2/24	85	45	49	6	Surface Treatment - Slurry Seal	1/1/03
198	2505	California Street	Mayfair Avenue	Walnut Avenue	AC	E	2	1,250	32	40,000	2/2/24	83	49	33	18	Surface Treatment - Slurry Seal	1/1/03
198	2506	California Street	Sycamore Avenue	Hickory Lane	AC	E	2	270	32	9,140	2/23/24	90	94	0	6	Surface Treatment - Slurry Seal	1/1/02
198	2507	California Street	Palm Avenue	Maple Avenue	AC	E	2	610	32	19,520	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
198	2508	California Street	Maple Avenue	Lael Drive	AC	E	2	290	32	9,280	2/23/24	68	55	33	12	Surface Treatment - Slurry Seal	8/1/09
198	2509	California Street	Palmyra Avenue	Chalynn Street	AAC	E	2	1,125	32	36,000	2/21/24	81	91	0	9	Overlay - AC Structural	10/1/08
198	2510	California Street	Quincy Avenue	Collins Avenue	AAC	E	2	1,115	32	35,680	2/9/24	87	73	27	0	Overlay - AC Structural	12/14/06
198	2511	California Street	Adams Avenue	Quincy Avenue	AAC	E	2	430	32	13,760	2/9/24	91	100	0	0	Overlay - AC Structural	12/14/06
198	2512	California Street	Wilson Avenue	Adams Avenue	AAC	E	2	260	32	8,320	2/9/24	92	78	0	22	Overlay - AC Structural	1/1/04
199	2549	Calle Alta	La Cumbre Drive	South End	AAC	E	2	670	32	22,940	10/24/23	89	100	0	0	Overlay - AC Structural	8/1/17
200	2550	Calle Baja	Calle Grande	South End	AAC	E	2	530	32	18,460	10/24/23	93	100	0	0	Overlay - AC Structural	8/1/17
201	2551	Calle Grande	Chapman Avenue	La Cumbre Drive	AAC	E	2	1,960	36	70,344	10/24/23	89	66	0	34	Overlay - AC Structural	8/1/17
204	2592	Camden Street	Hastings Avenue	Via Escola	AC	E	2	720	36	25,920	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
204	2597	Camden Street	Via Escola	Ashford Avenue	AC	E	2	170	36	5,608	3/20/24	87	100	0	0	New Construction - Initial	1/1/80
206	2426	Camille Circle	Almond Avenue	South End	AAC	E	2	200	30	7,050	3/12/24	58	36	64	0	Surface Treatment - Slurry Seal	1/1/04
208	2019	Canal Street	Cumberland Avenue	Meats Avenue	AAC	E	2	985	39	38,415	3/11/24	69	68	18	14	Overlay - AC Structural	1/1/94
208	2020	Canal Street	300' N Glendora Avenue	Cumberland Avenue	AAC	E	2	1,600	38	60,800	3/11/24	78	71	8	21	Overlay - AC Structural	1/1/94
208	2021	Canal Street	300' N Glendora Avenue	Heim Avenue	AAC	E	2	450	34	15,300	3/11/24	82	100	0	0	Overlay - AC Structural	1/1/94
208	2485	Canal Street	Lincoln Avenue	St. James Avenue	AC	E	2	1,000	36	27,125	2/28/24	90	44	54	2	New Construction - Initial	4/4/12
208	2537	Canal Street	St. James Avenue	Heim Avenue	AC	E	2	850	32	27,200	2/28/24	91	100	0	0	New Construction - Initial	4/4/12
210	2534	Candlewood Avenue	Maplewood Street	East End	AC	E	2	490	32	16,830	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
210	2535	Candlewood Avenue	Nordic Drive	East End	AAC	E	2	355	32	11,360	2/27/24	86	88	0	12	Surface Treatment - Slurry Seal	5/27/25
210	2628	Candlewood Avenue	West End	Silverwood Street	AAC	E	2	520	32	17,690	3/4/24	90	96	0	4	Surface Treatment - Slurry Seal	5/27/25
1322	3181	Cannon Street Frontage Roa	Valencia Drive	North End	AC	E	2	270	25	6,750	8/28/24	88	100	0	0	New Construction - Initial	1/1/80
214	2227	Canyon Park Circle	North End	Bryce Avenue	AC	E	2	250	32	9,500	11/14/23	81	100	0	0	Surface Treatment - Slurry Seal	1/1/03
215	1982	Canyon Ridge	Terrace Ridge	East End	AC	E	2	465	32	18,178	10/26/23	81	89	11	0	Surface Treatment - Slurry Seal	1/1/04

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
217	2543	Capistrano Place	Muir Drive	South End	AC	E	2	195	32	7,740	11/2/23	94	100	0	0	Surface Treatment - Slurry Seal	3/21/22
218	2434	Capri Street	West Way Avenue	South End	AC	E	2	340	32	10,880	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
223	2213	Carleton Avenue	West End	Glassell Street	AC	I	2	435	44	19,140	4/11/24	38	25	53	22	Surface Treatment - Slurry Seal	1/1/95
220	3455	Carleton Avenue	Cambridge Street	East End	AAC	E	2	1,320	32	43,390	2/15/24	83	100	0	0	Surface Treatment - Slurry Seal	5/27/25
222	222	Carlsbad Street	East End	South End	AAC	E	2	755	32	28,958	10/31/23	90	100	0	0	Overlay - AC Structural	8/1/16
224	2423	Carmen Circle	Almond Avenue	South End	AAC	E	2	200	30	7,050	3/7/24	62	48	51	1	Surface Treatment - Slurry Seal	1/1/04
226	2494	Carole Lane	North End	Karan Lane	AAC	E	2	640	32	21,980	2/14/24	83	100	0	0	Overlay - AC Structural	12/12/12
227	2493	Carolet Lane	North End	Craig Drive	AAC	E	2	175	32	7,100	2/23/24	75	87	0	13	Overlay - AC Structural	10/1/07
229	2490	Carrie Avenue	Sacramento Street	Markwood Street	AC	E	2	310	32	9,920	2/13/24	82	96	0	4	Surface Treatment - Slurry Seal	12/12/12
230	2560	Carver Lane	Cannon Street	East End	AC	I	2	185	60	10,740	3/20/24	45	53	0	47	New Construction - Initial	1/1/80
231	2231	Case Street	Taft Avenue	South End	ST	I	2	670	44	30,630	3/19/24	27	17	73	10	Surface Treatment - Micro Surfacing	8/31/07
231	2256	Case Street	Blueridge Avenue	Taft Avenue	AC	I	2	1,075	44	47,300	4/11/24	49	28	50	22	Surface Treatment - Slurry Seal	1/1/04
232	2500	Casselle Avenue	Prospect Street	340' E Prospect Street	AC	E	2	340	33	11,220	2/22/24	81	77	23	0	Surface Treatment - Slurry Seal	10/1/13
232	2501	Casselle Avenue	130' W Woodland Street	Woodland Street	AC	E	2	130	33	4,290	1/26/24	74	100	0	0	Surface Treatment - Slurry Seal	10/1/13
232	2502	Casselle Avenue	Woodland Street	East End	AAC	E	2	510	31	16,910	1/26/24	81	73	0	27	Overlay - AC Structural	12/14/06
232	2503	Casselle Avenue	Earlham Street	East End	AAC	E	2	235	32	9,020	2/20/24	76	88	0	12	Overlay - AC Structural	1/31/16
234	2424	Castle Circle	Almond Avenue	South End	AAC	E	2	200	30	7,050	3/5/24	67	56	43	1	Surface Treatment - Slurry Seal	1/1/04
236	2546	Catalina Street	San Juan Drive	South End	AAC	E	2	610	32	21,020	11/16/23	82	98	0	2	Overlay - AC Structural	1/31/16
238	1582	Cedar Creek Way	West End	Deep Spring Road	AC	E	2	555	32	19,260	4/15/24	85	99	1	0	Surface Treatment - Slurry Seal	1/1/18
239	2513	Cedar Street	Willow Avenue	South End	AC	E	2	175	31	5,425	3/12/24	83	69	16	15	Surface Treatment - Slurry Seal	1/1/04
239	2514	Cedar Street	Beverly Drive	Sycamore Avenue	AAC	E	2	550	32	17,600	3/6/24	99	100	0	0	Overlay - AC Structural	1/1/22
241	2499	Cedarwood Street	North End	Fairhaven Avenue	AAC	E	2	300	31	10,400	1/26/24	91	100	0	0	Overlay - AC Structural	12/14/06
242	2401	Center Street	Chapman Avenue	Almond Avenue	PCC	E	2	610	40	24,400	8/28/24	58	11	63	26	New Construction - Initial	1/1/80
242	2491	Center Street	West End	First Street	AC	E	2	190	28	5,096	3/4/24	94	87	0	13	Grind Overlay with Dig Outs	10/1/14
242	2521	Center Street	Almond Avenue	Washington Avenue	AAC	E	2	290	32	9,280	2/26/24	93	99	0	1	Overlay - AC Structural	8/1/16
242	2522	Center Street	Washington Avenue	Palmyra Avenue	AAC	E	2	325	32	10,400	2/26/24	94	100	0	0	Overlay - AC Structural	8/1/16
242	2523	Center Street	Culver Avenue	Plamyra Avenue	AAC	E	2	660	36	23,616	2/26/24	86	66	0	34	Overlay - AC Structural	8/1/16
242	2524	Center Street	Maple Avenue	South End	PCC	E	2	310	32	9,920	8/28/24	51	18	73	9	New Construction - Initial	1/1/80
242	2525	Center Street	Palm Avenue	Maple Avenue	PCC	E	2	600	32	19,200	8/28/24	46	11	52	37	New Construction - Initial	1/1/80
242	2526	Center Street	Walnut Avenue	Palm Avenue	AAC	E	2	1,250	32	40,000	2/9/24	91	100	0	0	Overlay - AC Structural	1/1/18
242	2527	Center Street	530' N Walnut Avenue	Walnut Avenue	AC	E	2	530	20	10,600	2/9/24	79	37	63	0	New Construction - Initial	1/1/80
242	2528	Center Street	North End	Jacaranda Avenue	AC	E	2	315	32	11,180	3/5/24	95	100	0	0	Complete Reconstruction - AC	10/1/08
242	2529	Center Street	North End	Quincy Avenue	AAC	E	2	200	32	7,500	3/5/24	96	100	0	0	Overlay - AC Structural	6/1/21
242	2530	Center Street	Trenton Avenue	South End	AAC	E	2	450	32	15,450	2/15/24	91	100	0	0	Surface Reconstruction - AC	9/20/07
242	2538	Center Street	Culver Avenue	La Veta Avenue	AC	E	2	620	32	19,840	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
243	2496	Century Avenue	James Street	Thomas Street	AC	E	2	210	31	7,010	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
243	2498	Century Avenue	Esplanade Street	East End	AC	E	2	170	26	4,420	3/6/24	79	100	0	0	New Construction - Initial	1/1/80
243	2518	Century Avenue	Jamesson Street	Lincoln Avenue	AC	E	2	760	30	22,800	2/21/24	62	75	25	0	Surface Treatment - Slurry Seal	1/1/04
244	2257	Cerritos Drive	West End	Linda Vista Street	AC	E	2	535	32	18,620	11/2/23	90	95	0	5	Surface Treatment - Slurry Seal	3/21/22
244	2544	Cerritos Drive	Encanto Street	Cannon Street	AC	E	2	635	36	22,356	11/2/23	95	100	0	0	Surface Treatment - Slurry Seal	1/1/04
244	2545	Cerritos Drive	Cannon Street	Palo Loma Drive	AAC	E	2	140	36	4,824	11/16/23	89	100	0	0	Overlay - AC Structural	1/31/16
247	2519	Chalynn Avenue	Cambridge Street	California Street	AAC	E	2	1,405	32	44,960	2/21/24	70	84	0	16	Surface Treatment - Slurry Seal	11/1/08
247	2520	Chalynn Avenue	California Street	Greengrove Drive	AAC	E	2	350	32	11,200	2/20/24	78	96	0	4	Overlay - AC Structural	10/1/08
248	2457	Chalynn Circle	Shaffer Street	East End	AAC	E	2	835	30	26,200	2/26/24	74	46	54	0	Overlay - AC Structural	1/1/03
249	2553	Chandler Ranch	Chapman Avenue	Ciriollo Circle	AAC	E	2	1,350	36	48,600	10/24/23	91	100	0	0	Overlay - AC Structural	8/1/17
249	2555	Chandler Ranch	Criollo Circle	Morninglory Way	AAC	E	2	1,014	36	36,288	10/24/23	89	100	0	0	Overlay - AC Structural	8/1/17
251	2487	Chapel Hill Road	West End	Villa Real Drive	AAC	E	2	455	32	16,060	12/5/23	89	66	0	34	Surface Treatment - Slurry Seal	11/1/08
253	2626	Chapman Frontage Road	Jetty Drive	East End	AC	E	2	470	28	13,910	3/12/24	39	38	54	8	Surface Treatment - Slurry Seal	1/1/03
255	2470	Charter Oak Drive	West End	Earlham Street	AAC	E	2	950	33	32,850	11/28/23	86	95	0	5	2 in overlay	8/31/07
256	3312	Chatham	Promontory	Avalon Drive	AC	E	2	373	32	12,436	11/21/23	90	100	0	0	Surface Treatment - Slurry Seal	6/1/20
258	3267	Chelsey	North End	Paragon Way	AC	E	2	214	32	8,348	12/6/17	96	100	0	0	New Construction - Initial	1/1/80
259	2429	Cherry Drive	Stevens Street	Eckhoff Street	AAC	E	2	125	32	4,000	3/6/24	98	69	0	31	Overlay - AC Structural	1/1/22
259	2430	Cherry Drive	Eckhoff Street	Cedar Street	AAC	E	2	825	32	26,400	3/6/24	94	100	0	0	Overlay - AC Structural	1/1/22
259	2431	Cherry Drive	Main Street	North Emerald Drive	AC	E	2	750	31	23,250	2/1/24	83	91	0	9	Surface Treatment - Slurry Seal	1/1/91
260	2475	Cherrywood Lane	Ranchroad Drive	Birchwood Road	AC	E	2	245	36	10,320	11/27/23	83	86	0	14	New Construction - Initial	1/1/80
261	3294	Cheshire	Eaton Ct	Kendra Drive	AC	E	2	1,513	32	48,916	11/21/23	94	100	0	0	Surface Treatment - Slurry Seal	6/1/20
262	2172	Chestnut Avenue	West End	Highland Street	AAC	E	2	260	36	9,360	3/1/24	87	32	0	68	Overlay - AC Structural	1/1/02
262	2461	Chestnut Avenue	Cambridge Street	Maplewood Street	AC	E	2	845	31	26,195	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
262	2464	Chestnut Avenue	Handy Street	Harding Street	AAC	E	2	1,120	32	35,840	3/1/24	88	92	0	8	Overlay - AC Structural	11/13/06

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
262	2465	Chestnut Avenue	Sacramento Street	Handy Street	AAC	E	2	1,165	32	37,280	3/1/24	99	38	0	62	Overlay - AC Structural	3/3/22
262	2481	Chestnut Avenue	Maplewood Street	Tustin Street	AC	E	2	1,970	31	61,070	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
262	2532	Chestnut Avenue	Glassell Street	Shaffer Street	AAC	E	2	1,175	32	37,600	5/27/25	100	0	0	0	Overlay - AC Structural	5/27/25
262	2533	Chestnut Avenue	Shaffer Street	Cambridge Street	AC	E	2	1,060	32	33,920	2/16/24	75	100	0	0	Surface Treatment - Slurry Seal	5/27/25
264	3137	Cheyenne	Stetson	North End	AC	E	2	830	32	28,810	11/28/23	92	93	0	7	New Construction - Initial	1/1/80
266	2468	Chipwood Street	La Veta Avenue	South End	AC	E	2	1,370	31	42,470	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
267	2452A	Choteau Street	Meats Avenue	Del Mar Avenue	AC	E	2	520	31	16,120	2/27/24	96	0	0	100	Surface Treatment - Slurry Seal	1/1/03
267	2452B	Choteau Street	Del Mar Avenue	Grove Avenue	AAC	E	2	362	31	11,222	2/27/24	99	0	0	100	Overlay - AC Structural	6/1/21
267	2453	Choteau Street	Buckeyewood Avenue	South End	AAC	E	2	180	32	5,760	2/27/24	88	0	0	100	Overlay - AC Structural	6/1/19
267	2455	Choteau Street	Emerson Avenue	Burton Avenue	AAC	E	2	240	32	7,680	2/27/24	97	59	0	41	Overlay - AC Structural	6/1/19
268	2474	Christine Street	Walnut Avenue	South End	AAC	E	2	210	32	8,220	11/27/23	64	31	66	3	Surface Treatment - Slurry Seal	11/1/08
268	2627	Christine Street	Silverleaf Avenue	Sycamore Avenue	AAC	E	2	325	32	10,208	11/27/23	92	69	0	31	Overlay - AC Structural	10/1/08
268	3167	Christine Street	North End	Valencia Drive	AAC	E	2	455	32	16,060	11/2/23	100	0	0	0	Overlay - AC Structural	3/3/22
269	2471	Chumash Street	Playano Avenue	Shoshone Avenue	AAC	E	2	675	32	21,408	11/29/23	95	100	0	0	Overlay - AC Structural	1/1/21
271	2582	Circulo Way Pvt	Hewes Street	Espanita Street	AC	E	2	800	16	12,800	11/30/17	64	14	86	0	New Construction - Initial	1/1/80
272	2222	Citrus Street	280' N Struck Avenue	Struck Avenue	AAC	E	2	280	32	8,960	3/28/24	76	27	0	73	Overlay - AC Structural	12/12/12
272	2435	Citrus Street	North End	Walnut Avenue	AAC	E	2	290	31	10,040	3/14/24	91	26	74	0	Surface Reconstruction - AC	1/1/02
272	2436	Citrus Street	Walnut Avenue	Sycamore Avenue	AC	E	2	740	31	22,940	2/1/24	85	44	56	0	Surface Treatment - Slurry Seal	5/27/23
272	2437	Citrus Street	Palm Avenue	Sycamore Avenue	AAC	E	2	505	32	16,160	2/1/24	75	61	39	0	Overlay - AC Structural	1/1/95
272	2438	Citrus Street	Palm Avenue	South End	AC	E	2	180	31	6,630	3/11/24	67	100	0	0	New Construction - Initial	1/1/80
272	2439	Citrus Street	Maple Avenue	Chapman Avenue	AAC	E	2	600	32	19,200	3/11/24	81	62	0	38	Overlay - AC Structural	1/1/97
272	2446	Citrus Street	Chapman Avenue	Almond Avenue	AC	E	2	600	30	18,000	3/11/24	89	100	0	0	Surface Treatment - Slurry Seal	1/1/04
272	2447	Citrus Street	North End	Palmyra Avenue	AC	E	2	335	34	11,390	3/29/24	87	59	0	41	Surface Treatment - Slurry Seal	1/1/04
1351	3500	City Blvd E	Metropolitan Dr	505' n/o Metropolitan Dr	AC	E	2	505	30	15,150	3/12/24	85	85	0	15	New Construction - Initial	10/30/12
273	2666	City Blvd W	Manchester Avenue	The City Way @ The Block	AAC	E	2	970	51	22,310	3/27/24	84	83	11	6	Overlay - AC Structural	1/1/99
276	2440	Clark Street	North End	Maple Avenue	AC	E	2	460	36	18,060	3/18/24	76	100	0	0	New Construction - Initial	1/1/80
276	2441	Clark Street	North End	Palm Avenue	AC	E	2	900	32	30,400	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
276	2442	Clark Street	North End	Walnut Avenue	AC	E	2	310	33	10,230	3/14/24	85	100	0	0	Surface Treatment - Slurry Seal	1/1/04
276	2443	Clark Street	Chapman Avenue	Almond Avenue	AC	E	2	620	36	22,320	3/12/24	77	75	0	25	New Construction - Initial	1/1/80
276	2444	Clark Street	Almond Avenue	Palmyra Avenue	AC	E	2	620	32	19,840	3/12/24	70	53	47	0	Surface Treatment - Slurry Seal	1/1/04
276	2445	Clark Street	Palmyra Avenue	Culver Avenue	AC	E	2	620	33	20,460	3/12/24	60	72	28	0	Surface Treatment - Slurry Seal	1/1/04
277	2451	Cleveland Street	North End	Harwood Street	AAC	E	2	840	31	26,040	2/28/24	72	40	60	0	Overlay - AC Structural	1/1/04
277	2454	Cleveland Street	Meats Avenue	Del Mar Avenue	AAC	E	2	470	31	14,570	2/27/24	100	100	0	0	Overlay - AC Structural	6/1/19
277	2458	Cleveland Street	Maple Avenue	Chapman Avenue	PCC	E	2	605	34	20,570	8/28/24	41	14	65	21	New Construction - Initial	1/1/80
277	2459	Cleveland Street	Palm Avenue	Maple Avenue	PCC	E	2	620	34	21,080	8/28/24	48	18	69	13	New Construction - Initial	1/1/80
277	2462	Cleveland Street	Trenton Avenue	South End	AC	E	2	455	32	14,560	2/15/24	79	100	0	0	Surface Treatment - Slurry Seal	1/1/91
277	2463	Cleveland Street	North End	Collins Avenue	AAC	E	2	575	31	18,925	2/9/24	94	100	0	0	Surface Reconstruction - AC	1/1/02
277	2907	Cleveland Street	Sycamore Avenue	Palm Avenue	AAC	E	2	615	32	19,680	2/9/24	79	100	0	0	Overlay - AC Structural	1/1/02
281	1299	Clinton Street	Walnut Avenue	Palm Avenue	AC	E	2	1,265	31	39,215	2/13/24	96	76	0	24	Complete Reconstruction - AC	6/1/20
281	1312	Clinton Street	Oakmont Avenue	Rose Avenue	AC	E	2	820	31	25,420	2/13/24	78	99	0	1	New Construction - Initial	4/3/12
281	1314	Clinton Street	Rose Avenue	South End	AC	E	2	230	31	8,230	2/14/24	67	75	18	7	Surface Treatment - Slurry Seal	1/1/98
281	1323	Clinton Street	North End	Madison Avenue	AC	E	2	310	31	10,660	2/13/24	77	73	0	27	New Construction - Initial	4/3/12
281	1378	Clinton Street	North End	Chestnut Avenue	AC	E	2	145	32	5,740	3/1/24	82	65	0	35	Surface Treatment - Slurry Seal	1/1/98
281	1504	Clinton Street	Locust Avenue	South End	AAC	E	2	445	31	13,795	2/8/24	76	71	17	12	2 in overlay	8/31/07
281	1864	Clinton Street	North End	Villa Vista Way	AAC	E	2	185	31	7,235	12/12/23	89	100	0	0	Overlay - AC Structural	1/1/18
281	2893	Clinton Street	Clinton Street	West End	AC	E	2	101	30	4,030	2/13/24	95	82	0	18	New Construction - Initial	1/1/80
281	2909	Clinton Street	Clinton Street	West End	AC	E	2	101	30	4,030	2/13/24	96	79	0	21	New Construction - Initial	1/1/80
281	2937	Clinton Street	Clinton Street	West End	AC	E	2	101	30	4,030	2/13/24	96	79	0	21	New Construction - Initial	1/1/80
282	1827	Cloverdale Avenue	Sacramento Street	Meats Avenue	AC	E	2	710	31	22,760	12/13/23	82	59	31	10	Surface Treatment - Slurry Seal	8/1/16
283	2000	Clydesdale Avenue	Stallion Street	Mustang Avenue	AAC	E	2	505	32	17,660	10/25/23	81	25	0	75	Overlay - AC Structural	1/1/04
284	1427	Coate Road	Gainsborough Road	Larkstone Drive	AAC	E	2	450	31	14,450	2/22/24	91	100	0	0	2 in overlay	8/28/07
284	1433	Coate Road	La Veta Avenue	Hartford Road	AC	E	2	130	31	4,030	2/22/24	83	49	0	51	Surface Treatment - Slurry Seal	1/1/91
284	1488	Coate Road	Ruth Place	La Veta Avenue	AC	E	2	305	32	9,568	2/14/24	89	81	0	19	Surface Treatment - Slurry Seal	1/1/92
285	1593	Cobblestone Drive	White Oak Ridge	Oak Tree Lane	AC	E	2	970	32	32,290	10/19/23	76	37	62	1	Surface Treatment - Slurry Seal	1/1/18
286	1564	Colby Street	North End	Orange Grove Avenue	AAC	E	2	140	32	5,980	11/27/23	81	98	0	2	Overlay - AC Structural	10/1/08
287	2244	Collins Avenue	West End	Eckhoff Street	AC	I	2	290	50	8,700	4/10/24	50	31	42	27	Surface Treatment - Slurry Seal	1/1/94
288	2633	Colony Street	Grovewood Lane	South End	AAC	E	2	205	32	6,368	11/14/23	100	0	0	0	Overlay - AC Structural	11/14/23
289	1866	Colorado Lane	North End	Villa Vista Way	AC	E	2	100	32	3,200	8/27/24	71	44	56	0	New Construction - Initial	1/1/80
290	2579	Columbia Place	Main Street	East End	AC	E	2	135	32	4,320	12/8/17	58	13	83	4	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
291	2243	Commerce Street	Collins Avenue	Business Center Drive	AC	I	2	370	44	16,280	3/8/24	55	74	20	6	Surface Treatment - Slurry Seal	1/1/94
292	585	Compton Avenue	Lewis Street	Manchester Avenue	AC	E	2	1,320	33	43,164	3/7/24	77	98	1	1	Overlay	10/1/12
293	2147	Comstock Street	North End	Glendora Avenue	AAC	E	2	240	33	7,920	2/28/24	91	100	0	0	Overlay - AC Structural	12/13/06
294	1077	Concord Avenue	Cambridge Street	Marquart Street	AAC	E	2	310	36	11,160	3/4/24	84	30	65	5	Surface Treatment - Slurry Seal	5/27/25
294	947	Concord Avenue	Maplewood Street	East End	AAC	E	2	1,675	31	51,925	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
295	1609	Condor Crest Avenue	Red Robin Street	Rancho Santiago Blvd	AC	E	2	155	32	4,768	11/27/23	95	100	0	0	Surface Treatment - Slurry Seal	6/1/20
296	1411	Constitution Avenue	Marmon Avenue	Liberty Way	AAC	E	2	290	36	9,928	2/20/24	87	89	0	11	2 in overlay	8/1/09
297	1370	Coolidge Avenue	Sacramento Street	Handy Street	AAC	E	2	925	31	28,675	2/8/24	81	44	56	0	2 in overlay	8/29/07
297	1371	Coolidge Avenue	Handy Street	Wanda Street	AAC	E	2	1,490	31	46,190	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
298	2079	Copper Kettle Road	Meadow Grove Road	Glen Canyon Road	AC	E	2	980	36	35,280	4/15/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
300	1832	Coral Avenue	Sacramento Street	East End	AC	E	2	300	31	10,800	1/3/24	83	62	35	3	Surface Treatment - Slurry Seal	8/1/16
300	1837	Coral Avenue	West End	Highland Street	AAC	E	2	460	32	14,720	3/4/24	78	14	86	0	Overlay - AC Structural	1/1/02
301	3465	Cornwall Avenue	Talbot Street	Whitehall Street	AC	E	2	580	32	20,060	12/4/23	85	100	0	0	Surface Treatment - Slurry Seal	8/1/17
302	1727	Corrida Place	Elsinore Avenue	South End	AAC	E	2	240	32	9,180	11/2/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
305	2028	Cottage Hill Drive	White Spring Lane	South End	AC	E	2	575	36	22,200	12/5/23	80	45	29	26	Surface Treatment - Slurry Seal	1/1/02
306	1212	Cottonwood Street	North End	Riverview Avenue	AAC	E	2	320	32	10,240	2/29/24	87	97	0	3	Surface Treatment - Slurry Seal	3/21/22
306	1228	Cottonwood Street	Riverboat Way	Woods Street	AC	E	2	770	36	27,720	2/29/24	84	4	94	2	Surface Treatment - Slurry Seal	3/21/22
306	1229	Cottonwood Street	Riverboat Way	Lincoln Avenue	AAC	E	2	865	36	31,140	2/29/24	97	0	0	100	Overlay - AC Structural	3/3/22
306	1692	Cottonwood Street	East End	Crystal View Avenue	AC	E	2	525	32	16,800	3/1/24	77	52	42	6	Surface Treatment - Slurry Seal	1/1/03
306	2466	Cottonwood Street	Brookshire Avenue	Woodstock Avenue	AAC	E	2	840	32	26,880	3/1/24	82	32	44	24	Overlay - AC Structural	1/1/03
307	2367	Court Street	West End	Earlham Street	AAC	E	2	225	32	7,200	3/6/24	77	34	66	0	Overlay - AC Structural	1/1/02
308	2060	Courtland Street	Waterford Street	South End	AC	E	2	995	28	29,360	4/15/24	81	67	31	2	Surface Treatment - Slurry Seal	8/1/17
311	1997	Coyote Lane	Kennymead Avenue	South End	AC	E	2	895	18	17,610	10/25/23	83	100	0	0	Surface Treatment - Slurry Seal	1/1/02
312	1482	Craig Drive	Palmyra Avenue	Prospect Street	AAC	E	2	1,600	32	51,200	2/14/24	78	81	0	19	Overlay - AC Structural	10/1/07
312	1483	Craig Drive	North End	Palmyra Avenue	AAC	E	2	1,040	32	34,780	2/14/24	78	70	4	26	Overlay - AC Structural	10/1/07
313	1980	Crater Lake Avenue	Carlsebad Street	Mt. McKinley Boulevard	AAC	E	2	365	32	11,680	10/31/23	91	100	0	0	Overlay - AC Structural	8/1/16
313	1981	Crater Lake Avenue	Mt. McKinley Boulevard	Lassen Boulevard	AAC	E	2	1,200	32	37,968	10/31/23	87	100	0	0	Overlay - AC Structural	8/1/16
313	1983	Crater Lake Avenue	Lassen Boulevard	East End	AAC	E	2	175	32	7,100	10/31/23	88	91	0	9	Overlay - AC Structural	8/1/16
315	1887	Creekside Avenue	Cannon Street	Singingwood Street	AC	E	2	1,320	36	47,520	11/1/23	64	22	46	32	New Construction - Initial	1/1/80
316	1800	Creekview Drive	North End	Horseshoe Road	AAC	E	2	615	21	12,915	10/26/23	95	100	0	0	Overlay - AC Structural	1/1/21
317	2269	Crescent Drive	Walnut Avenue	Beverly Drive	AC	E	2	230	31	7,130	3/8/24	93	100	0	0	Surface Reconstruction - AC	7/24/07
318	2561	Crest De Ville Avenue	Goldenrod Lane	South End	AC	E	2	460	36	18,060	10/31/23	57	100	0	0	New Construction - Initial	1/1/80
320	793	Crest Road	Palmyra Avenue	Culver Avenue	AC	E	2	620	32	19,840	3/12/24	97	100	0	0	Surface Treatment - Slurry Seal	1/1/02
320	794	Crest Road	Culver Avenue	La Veta Avenue	AC	E	2	325	32	10,400	3/12/24	97	100	0	0	Surface Treatment - Slurry Seal	1/1/04
320	795	Crest Road	La Veta Avenue	Bronson Avenue	AC	E	2	600	32	19,200	3/27/24	63	25	70	5	Surface Treatment - Slurry Seal	1/1/04
321	1191	Crestwood Street	North End	Fletcher Street	AAC	E	2	560	32	17,920	3/1/24	90	69	12	19	Cold Milling	12/14/06
321	1191	Crestwood Street	North End	Fletcher Street	AAC	E	2	560	32	17,920	3/1/24	90	69	12	19	Overlay - AC Structural	12/14/06
321	1191	Crestwood Street	North End	Fletcher Street	AAC	E	2	560	32	17,920	3/1/24	90	69	12	19	Patching - AC Leveling	12/14/06
322	1568	Criollo Circle	Chandler Ranch	East End	AC	E	2	235	32	9,020	10/24/23	85	84	16	0	Surface Treatment - Slurry Seal	10/10/19
324	2063	Crossgate Street	Townsend Avenue	Oakhurst Avenue	AC	E	2	425	36	16,800	12/4/23	84	73	0	27	Surface Treatment - Slurry Seal	8/1/17
325	2653	Crown Parkway	Apache Creek Road	East End	AC	E	2	1,040	32	34,780	11/20/23	90	100	0	0	Surface Treatment - Slurry Seal	3/21/22
326	1691	Crystal View Avenue	Hartman Street	Ashwood Street	AC	E	2	1,070	32	34,240	3/11/24	73	43	50	7	Surface Treatment - Slurry Seal	1/1/03
326	756	Crystal View Avenue	Pampas Street	Fernside Street	AAC	E	2	1,820	32	58,240	2/29/24	79	54	41	5	Overlay - AC Structural	1/1/03
326	761	Crystal View Avenue	West End	Kennedy Street	AAC	E	2	375	32	12,000	2/29/24	97	100	0	0	Overlay - AC Structural	1/1/19
327	13607	Cully Drive	Batavia Street E	East End	AC	E	2	1,320	33	66,000	3/1/24	59	23	43	34	Surface Treatment - Slurry Seal	10/10/19
328	1002	Culver Avenue	Gardner Drive	California Street	AAC	E	2	600	31	18,600	2/21/24	86	100	0	0	Overlay - AC Structural	10/1/08
328	1003	Culver Avenue	California Street	Greengrove Drive	AAC	E	2	325	31	10,075	2/21/24	85	70	15	15	Overlay - AC Structural	10/1/08
328	1004	Culver Avenue	Greengrove Drive	East End	AAC	E	2	335	31	11,435	2/21/24	82	55	0	45	Overlay - AC Structural	10/1/08
328	707	Culver Avenue	Devon Road	Crest Road	AC	E	2	265	32	7,840	4/10/24	33	35	63	2	Surface Treatment - Slurry Seal	1/1/04
328	708	Culver Avenue	Flower Street	Devon Road	AC	E	2	1,415	32	45,280	3/12/24	55	33	65	2	Surface Treatment - Slurry Seal	1/1/04
328	802	Culver Avenue	Lemon Street	Glassell Street	AC	E	2	620	30	18,600	3/15/24	78	100	0	0	New Construction - Initial	1/1/80
328	950	Culver Avenue	Clark Street	Parker Street	AC	E	2	335	32	10,720	3/12/24	95	100	0	0	Grind Overlay with Dig Outs	10/1/14
328	951	Culver Avenue	Parker Street	Pixley Street	AC	E	2	305	30	9,150	3/12/24	95	100	0	0	Grind Overlay with Dig Outs	10/1/14
328	952	Culver Avenue	Pixley Street	Montgomery Street	AC	E	2	350	32	11,200	3/12/24	95	100	0	0	Grind Overlay with Dig Outs	10/1/14
328	972	Culver Avenue	Alpine Street	Main Street	AC	E	2	420	40	16,800	4/10/24	81	61	37	2	Surface Treatment - Slurry Seal	1/1/04
328	973	Culver Avenue	Bedford Road	Alpine Street	AC	E	2	240	40	9,600	4/10/24	82	55	39	6	Surface Treatment - Slurry Seal	1/1/04
328	974	Culver Avenue	Crest Road	Bedford Road	AC	E	2	290	32	9,280	4/10/24	79	44	56	0	Surface Treatment - Slurry Seal	1/1/04
328	990	Culver Avenue	Glassell Street	Shaffer Street	AC	E	2	1,315	30	39,450	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
328	991	Culver Avenue	Shaffer Street	Harwood Street	AC	E	2	650	35	22,750	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
328	992	Culver Avenue	Harwood Street	Cambridge Street	AC	E	2	635	32	20,320	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
328	993	Culver Avenue	Cambridge Street	East End	AAC	E	2	595	31	19,595	2/20/24	88	100	0	0	Overlay - AC Structural	10/1/08
329	3246	Cumberland Road	Shaffer Street	Canal St	AAC	E	2	2,614	33	86,262	2/16/24	86	100	0	0	Overlay - AC Structural	8/1/17
330	1845	Cunningham Court	West End	Meadow Grove Road	AAC	E	2	605	32	22,360	12/5/23	93	100	0	0	2 in overlay	8/1/09
331	2190	Cypress Street	Almond Avenue	Palmyra Avenue	AAC	E	2	615	36	22,140	3/5/24	78	15	0	85	Overlay - AC Structural	1/1/02
331	2196	Cypress Street	Collins Avenue	1340' s/o Collins Avenue	AC	I	2	1,340	36	48,240	2/15/24	54	56	44	0	Surface Reconstruction - AC	9/1/09
331	2197	Cypress Street	1340' s/o Collins Avenue	Walnut Avenue	AC	I	2	1,235	38	46,930	2/15/24	58	65	35	0	Surface Reconstruction - AC	9/1/09
331	2198	Cypress Street	Sycamore Avenue	Palm Avenue	AC	I	2	630	36	22,680	3/14/24	83	100	0	0	New Construction - Initial	1/1/80
331	2261	Cypress Street	Walnut Avenue	Sycamore Avenue	AC	I	2	635	35	22,015	3/14/24	93	66	0	34	New Construction - Initial	1/1/80
331	2404	Cypress Street	Chapman Avenue	Almond Avenue	PCC	E	2	620	40	24,800	8/26/24	50	16	54	30	New Construction - Initial	1/1/80
331	2405	Cypress Street	Maple Avenue	Chapman Avenue	PCC	E	2	610	40	24,400	8/26/24	53	17	68	15	New Construction - Initial	1/1/80
331	2406	Cypress Street	Palm Avenue	Maple Avenue	PCC	E	2	620	40	24,800	8/26/24	49	11	64	25	New Construction - Initial	1/1/80
331	970	Cypress Street	Rosewood Avenue	Fairway Drive	AAC	E	2	240	34	8,160	3/12/24	93	100	0	0	Overlay - AC Structural	10/11/19
332	1303	Dana Avenue	West End	Sacramento Street	AAC	E	2	110	31	4,910	2/13/24	95	85	0	15	Overlay - AC Structural	10/10/19
332	1304	Dana Avenue	Milford Street	East End	AC	E	2	360	31	12,210	2/14/24	54	70	30	0	Surface Treatment - Slurry Seal	1/1/98
333	1038	Dana Place	California Street	East End	AAC	E	2	950	32	30,400	2/21/24	92	100	0	0	2 in overlay	8/1/09
333	1280	Dana Place	Park Lane	Highland Street	AC	E	2	90	32	2,880	3/4/24	40	16	84	0	New Construction - Initial	1/1/80
334	2596	Danbury Street	North End	Somerton Avenue	AC	E	2	230	32	8,860	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
336	1566	Dapple Circle	Chandler Ranch	East End	AAC	E	2	355	32	12,860	10/24/23	88	100	0	0	Overlay - AC Structural	1/1/18
337	2159	Darby Street	Franki Street	Bortz Street	AAC	E	2	425	32	13,600	2/28/24	98	4	0	96	Surface Treatment - Slurry Seal	1/1/04
339	1465	Deborah Lane	Jennifer Lane	East End	AAC	E	2	835	36	32,610	2/14/24	79	100	0	0	Overlay - AC Structural	12/12/12
340	1581	Deep Spring Road	White Oak Ridge	Briarwood Road	AC	E	2	1,070	32	34,240	10/17/23	87	74	23	3	Surface Treatment - Slurry Seal	1/1/18
340	1585	Deep Spring Road	Live Oak Drive	White Oak Ridge	AC	E	2	970	32	31,040	10/17/23	84	68	32	0	Surface Treatment - Slurry Seal	1/1/18
341	1806	Deerfield Lane	Brook Glen Lane	Elk Glen Lane	AC	E	2	530	32	17,710	10/19/23	84	52	48	0	Surface Treatment - Slurry Seal	1/1/18
342	2625	Deershire Court	Fairfield Lane	North End	AC	E	2	465	32	17,928	10/17/23	91	100	0	0	Surface Treatment - Slurry Seal	1/1/18
343	1760	Deerwood Street	North End	Ironwood Avenue	AC	E	2	740	32	25,180	10/17/23	92	100	0	0	Surface Treatment - Slurry Seal	3/21/22
344	1840	Del Mar Avenue	Park Lane	Highland Street	AC	E	2	270	36	9,720	3/4/24	93	93	0	7	New Construction - Initial	1/1/80
344	1916	Del Mar Avenue	Cleveland Street	Chouteau Street	AAC	E	2	940	32	30,080	2/27/24	94	0	0	100	Overlay - AC Structural	6/1/19
344	1917	Del Mar Avenue	Chouteau Street	Cambridge Street	AAC	E	2	240	32	7,680	2/27/24	100	100	0	0	Overlay - AC Structural	6/1/19
344	1918	Del Mar Avenue	Cambridge Street	Greengrove Drive	AC	E	2	1,125	32	36,000	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
344	1924	Del Mar Avenue	Lincoln Street	Nordic Street	AAC	E	2	330	36	11,880	3/4/24	74	8	92	0	Overlay - AC Structural	1/1/04
345	1615A	Del Valle Avenue	Gravier Street	Esplanade St	AC	E	2	1,274	32	40,768	11/28/23	92	97	0	3	Surface Treatment - Slurry Seal	1/1/96
345	1615B	Del Valle Avenue	Esplanade St	Wrightwood Street	AAC	E	2	401	32	12,832	11/29/17	82	100	0	0	2 in overlay	10/1/08
346	14093	Delia Lane	West End	Fairmont Way	AC	E	2	689	32	23,148	2/22/24	83	54	21	25	New Construction - Initial	1/1/80
346	14094	Delia Lane	Yorba Street	Loretta Drive	AC	E	2	528	32	16,896	2/22/24	85	71	0	29	New Construction - Initial	1/1/80
347	755	Dell Street	City Limit	Crystal View	AAC	E	2	550	32	17,600	2/29/24	96	85	0	15	Overlay - AC Structural	1/1/19
348	1711	Delta Street	St. James Avenue	South End	AAC	E	2	140	31	4,340	2/28/24	67	22	78	0	Surface Reconstruction - AC	1/1/04
348	2156	Delta Street	North End	Heim Avenue	AAC	E	2	650	31	20,150	2/28/24	73	18	45	37	Overlay - AC Structural	1/1/04
349	1860	Denise Avenue	West End	Santiago Boulevard	AC	E	2	725	30	23,550	12/12/23	84	100	0	0	Surface Treatment - Slurry Seal	1/1/04
349	1870	Denise Avenue	North End	Santiago Boulevard	AC	E	2	1,850	31	59,150	12/12/23	47	25	53	22	Surface Treatment - Slurry Seal	1/1/04
351	704	Devon Road	La Veta Avenue	Bronson Avenue	AC	E	2	605	32	19,360	3/27/24	66	33	64	3	Surface Treatment - Slurry Seal	1/1/04
351	705	Devon Road	Culver Avenue	La Veta Avenue	AC	E	2	620	32	19,840	3/13/24	68	18	71	11	Surface Treatment - Slurry Seal	1/1/04
351	706	Devon Road	Palmyra Avenue	Culver Avenue	AC	E	2	620	32	19,840	3/7/24	73	10	81	9	Surface Treatment - Slurry Seal	1/1/02
352	1830	Diamond Street	Grove Avenue	Sacramento Street	AC	E	2	1,350	31	41,602	12/13/23	81	55	45	0	Surface Treatment - Slurry Seal	8/1/16
352	1847	Diamond Street	North End	Meats Avenue	AAC	E	2	410	32	14,620	12/12/23	95	100	0	0	Overlay - AC Structural	8/30/21
352	3229	Diamond Street	Meats Avenue	Cloverdale	AC	E	2	534	33	18,372	12/13/23	77	50	36	14	Surface Treatment - Slurry Seal	1/1/94
355	1670	Dixon Avenue	Shasta Way	Dunas Street	AAC	E	2	190	32	6,580	2/23/24	79	100	0	0	Overlay - AC Structural	6/1/21
355	1673	Dixon Avenue	Olympia Way	East End	AC	E	2	150	32	5,900	2/20/24	69	100	0	0	Surface Treatment - Slurry Seal	1/1/92
356	1759	Dogwood Street	Flowerwood Avenue	Ironwood Avenue	AC	E	2	305	32	9,504	10/17/23	94	100	0	0	Surface Treatment - Slurry Seal	3/21/22
357	1172	Donna Avenue	Nutwood Street	Heatherstone Drive	AC	E	2	120	32	4,590	2/23/24	70	51	49	0	New Construction - Initial	4/3/12
358	750	Donneybrooke Street	Sycamore Avenue	Palm Avenue	AC	E	2	585	32	18,720	3/6/24	86	82	10	8	Surface Treatment - Slurry Seal	1/1/97
358	751	Donneybrooke Street	Palm Avenue	South End	AC	E	2	1,055	32	34,810	3/12/24	80	33	46	21	Surface Treatment - Slurry Seal	1/1/97
359	1409	Dorothy Avenue	Esplanade Street	Wrightwood Street	AAC	E	2	115	36	3,884	3/15/24	89	96	0	4	Overlay - AC Structural	1/31/16
360	1181	Dorothy Drive	James Street	East End	AAC	E	2	460	31	15,860	1/26/24	81	100	0	0	2 in overlay	11/1/11
360	1477	Dorothy Drive	Wheeler Place	East End	AAC	E	2	395	32	14,140	2/23/24	76	98	0	2	Overlay - AC Structural	12/12/12
360	1498	Dorothy Drive	Yorba Street	Loretta Drive	AAC	E	2	465	32	14,496	2/14/24	70	100	0	0	2 in overlay	8/1/09
364	1218	Driftwood Street	North End	Meadowbrook Avenue	AAC	E	2	465	36	16,740	2/29/24	91	100	0	0	Surface Treatment - Slurry Seal	3/21/22
365	1177	Dunas Street	Almond Avenue	Palmyra Avenue	AC	E	2	840	31	26,540	1/26/24	84	100	0	0	New Construction - Initial	4/3/12
365	1629	Dunas Street	North End	Maple Avenue	AAC	E	2	125	33	5,625	1/2/24	95	100	0	0	Overlay - AC Structural	10/10/19

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
365	1653	Dunas Street	Ruth Place	La Veta Avenue	AAC	E	2	290	32	9,280	2/20/24	99	67	0	33	Overlay - AC Structural	6/1/21
365	1654	Dunas Street	La Veta Avenue	120' S Dixon Avenue	AAC	E	2	625	32	20,000	2/20/24	92	70	0	30	Overlay - AC Structural	6/1/21
366	1704	Dunbar Street	Greenleaf Avenue	South End	AAC	E	2	125	31	3,875	3/11/24	62	57	43	0	Overlay - AC Structural	10/1/08
366	1710	Dunbar Street	St. James Avenue	South End	AAC	E	2	135	31	4,185	2/28/24	91	98	2	0	Surface Reconstruction - AC	1/1/04
366	2157	Dunbar Street	North End	Heim Avenue	AAC	E	2	580	32	18,560	2/28/24	86	76	14	10	Overlay - AC Structural	1/1/04
367	1702	Dunfield Street	Greenleaf Avenue	South End	AAC	E	2	110	32	3,520	3/11/24	75	90	10	0	Overlay - AC Structural	10/1/08
367	1709	Dunfield Street	St. James Avenue	South End	AC	E	2	230	31	7,130	3/11/24	58	44	43	13	Surface Treatment - Slurry Seal	1/1/04
368	1687	Dunton Avenue	West End	Glassell Street	AAC	E	2	560	32	17,920	2/29/24	88	64	33	3	Overlay - AC Structural	1/1/03
368	1693	Dunton Avenue	Glassell Street	Ashwood Street	AC	E	2	1,460	32	46,720	3/1/24	87	37	15	48	Surface Reconstruction - AC	1/1/03
368	753	Dunton Avenue	West End	Dell Street	AAC	E	2	325	36	11,700	2/29/24	95	75	0	25	Overlay - AC Structural	1/1/19
368	762	Dunton Avenue	Batavia Street	Kennedy Street	AAC	E	2	420	32	13,440	2/29/24	95	83	0	17	Overlay - AC Structural	1/1/19
370	1184	Earlham Street	Chapman Avenue	Washington Avenue	AAC	E	2	445	32	14,048	2/20/24	87	97	0	3	Overlay - AC Structural	1/1/04
370	1185	Earlham Street	Washington Avenue	Marmon Avenue	AAC	E	2	565	32	18,080	2/20/24	82	54	0	46	Overlay - AC Structural	1/1/02
370	1414	Earlham Street	Marmon Avenue	South End	AAC	E	2	1,625	32	55,300	2/20/24	82	100	0	0	Overlay - AC Structural	1/31/16
370	1552	Earlham Street	Euclid Avenue	Spring Street	AAC	E	2	990	32	32,180	11/27/23	81	97	0	3	Overlay - AC Structural	10/1/08
370	1637	Earlham Street	Jordan Avenue	South End	AAC	E	2	665	32	21,280	2/20/24	83	90	0	10	Overlay - AC Structural	1/31/16
370	1646	Earlham Street	North End	Fairhaven Avenue	AAC	E	2	1,205	32	38,368	2/20/24	82	82	0	18	Overlay - AC Structural	1/31/16
371	3276	Eaton	Hampshire Rd	Cheshire Rd	AC	E	2	216	32	7,662	11/21/23	90	100	0	0	Surface Treatment - Slurry Seal	6/1/20
371	3278	Eaton	Portico Ter	Hampshire Rd	AC	E	2	572	32	18,304	11/21/23	92	100	0	0	Surface Treatment - Slurry Seal	6/1/20
371	3283	Eaton	West End	Portico Ter	AC	E	2	734	32	25,286	11/21/23	90	100	0	0	Surface Treatment - Slurry Seal	6/1/20
372	1082	Ebonywood Street	North End	Palmdale Avenue	AAC	E	2	190	32	6,080	2/27/24	90	100	0	0	Overlay - AC Structural	1/1/19
372	2113	Ebonywood Street	Buckeyewood Avenue	South End	AC	E	2	240	33	7,920	2/27/24	100	0	0	100	Overlay-Rubber Hot Mix	2/1/24
373	1945	Echo Hill Way	West End	Villa Real Drive	AAC	E	2	835	32	28,220	12/5/23	84	66	15	19	Overlay - AC Structural	10/1/08
374	2246	Eckhoff Street	North End	Collins Avenue	AC	I	2	530	36	19,080	3/8/24	64	39	41	20	Surface Treatment - Slurry Seal	1/1/95
377	1222	Edgewater Street	Paddle Wheel Circle	Richland Street	AAC	E	2	620	32	19,840	2/29/24	81	98	0	2	Surface Treatment - Slurry Seal	3/21/22
378	1545	El Carmen Avenue	Hamlin Street	142' w/o Hamlin Street	AC	E	2	142	31	4,402	11/27/23	86	100	0	0	New Construction - Initial	10/30/12
378	1611	El Carmen Avenue	Gravier Street	Hearthstone Street	AAC	E	2	1,170	32	37,440	11/28/23	72	28	58	14	Surface Treatment - Slurry Seal	11/1/08
379	2317	El Prado Avenue	West End	Fondren Street	AC	E	2	220	32	8,540	3/7/24	58	40	55	5	Surface Treatment - Slurry Seal	1/1/91
379	2319	El Prado Avenue	Lewis Street	Lewis Street	AC	E	2	100	36	3,600	3/27/24	22	31	51	18	New Construction - Initial	1/1/80
380	2300	El Rancho Avenue	Lewis Street	Park Hyde Street	AAC	E	2	720	32	22,790	3/7/24	74	52	48	0	Overlay - AC Structural	9/1/08
381	2055	El Rito Drive	Rama Street	Cerro Villa Drive	AC	E	2	985	33	33,255	3/20/24	58	62	17	21	Surface Treatment - Slurry Seal	1/1/04
382	1560	El Salavador Avenue	Hamlin Street	Noble Street	AAC	E	2	195	32	7,740	11/27/23	81	100	0	0	Overlay - AC Structural	10/1/08
383	1868	El Sereno Drive	Santiago Boulevard	Riding Way	AAC	E	2	700	33	23,100	12/13/23	89	91	0	9	Overlay - AC Structural	1/1/18
384	1797	Elderwood Avenue	West End	Mulberry Street	AC	E	2	515	32	18,278	10/19/23	77	32	68	0	Surface Treatment - Slurry Seal	1/1/18
385	1421	Elgin Drive	West End	Arlington Road	AAC	E	2	240	31	8,940	2/22/24	84	80	0	20	Overlay - AC Structural	1/1/02
386	1065	Elizabeth Avenue	Shaffer Street	East End	AAC	E	2	895	31	28,845	2/9/24	100	0	0	0	Overlay - AC Structural	6/1/21
387	1066	Elizabeth Place	Elizabeth Avenue	South End	AAC	E	2	385	31	13,035	2/9/24	100	0	0	0	Overlay - AC Structural	6/1/21
388	1766	Elk Glen Lane	Fox Run Lane	Deerfield Lane	AC	E	2	280	32	8,960	10/19/23	85	88	0	12	Surface Treatment - Slurry Seal	1/1/18
389	2205	Elm Street	Collins Avenue	South End	AAC	I	2	395	44	17,380	3/8/24	85	33	0	67	Overlay - AC Structural	7/1/08
389	2224	Elm Street	North End	Collins Avenue	AC	I	2	555	44	24,420	3/8/24	53	29	69	2	New Construction - Initial	1/1/80
389	2265	Elm Street	Sycamore Avenue	South End	AC	E	2	490	30	14,700	3/12/24	53	44	56	0	Surface Treatment - Slurry Seal	1/1/04
390	1332	Elmwood Street	Collins Avenue	Mayfair Avenue	AC	E	2	930	32	29,760	2/13/24	79	82	0	18	New Construction - Initial	4/3/12
390	1333	Elmwood Street	Rose Avenue	Mayfair Avenue	AC	E	2	860	32	27,520	2/13/24	76	99	0	1	New Construction - Initial	4/3/12
390	1361	Elmwood Street	North End	Athens Avenue	AAC	E	2	190	32	6,080	3/4/24	92	93	0	7	Overlay - AC Structural	11/13/06
391	1717	Elsinore Avenue	Palo Loma Drive	Cabrillo Street	AAC	E	2	645	32	22,140	11/16/23	89	100	0	0	Overlay - AC Structural	1/31/16
391	1739	Elsinore Avenue	Linda Vista Street	110' E Linda Vista Street	AC	E	2	110	32	3,520	11/2/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
391	1740	Elsinore Avenue	West End	Linda Vista Street	AC	E	2	925	32	29,600	11/2/23	94	79	0	21	Surface Treatment - Slurry Seal	3/21/22
392	2267	Emerald Drive	Primrose Drive	Walnut Avenue	AC	E	2	225	30	6,750	3/8/24	88	55	0	45	New Construction - Initial	1/1/80
392	2268	Emerald Drive	Walnut Avenue	Cherry Drive	AC	E	2	440	30	13,200	2/1/24	84	83	0	17	Surface Treatment - Slurry Seal	1/1/91
393	2128	Emerson Avenue	Pine Street	Chouteau Street	AAC	E	2	400	32	12,800	2/27/24	98	87	0	13	Overlay - AC Structural	6/1/19
393	2181	Emerson Avenue	Glassell Street	East End	AAC	I	2	575	44	25,300	3/1/24	75	99	0	1	Overlay - AC Structural	9/1/09
394	1729	Encanto Street	Granada Drive	South End	AC	E	2	995	36	39,868	11/2/23	93	100	0	0	Surface Treatment - Slurry Seal	3/21/22
395	609	Ensign Avenue	Bortz Street	East End	AAC	E	2	165	31	5,115	2/28/24	95	100	0	0	Overlay - AC Structural	8/2/21
396	2223	Enterprise Street	North End	Collins Avenue	AAC	I	2	615	44	27,060	3/8/24	84	100	0	0	Overlay - AC Structural	7/1/08
396	2260	Enterprise Street	North End	Grove Avenue	AAC	I	2	330	44	15,670	3/11/24	86	99	0	1	Overlay - AC Structural	12/12/12
398	1811	Equestrian Terrace	Chapman Avenue	South End	AAC	E	2	975	27	27,825	10/26/23	87	100	0	0	Overlay - AC Structural	8/1/17
398	3116	Equestrian Terrace	Rancho Santiago Boulevard	East End	AC	E	2	710	22	17,418	8/28/24	46	60	40	0	New Construction - Initial	1/1/80
401	1563	Espanita Street	North End	Orange Grove Avenue	AAC	E	2	145	32	6,140	11/27/23	85	100	0	0	Overlay - AC Structural	10/1/08
401	2360	Espanita Street	Via Lardo Avenue	Circulo Way	AC	E	2	355	32	13,160	3/6/24	84	98	0	2	Surface Treatment - Slurry Seal	1/1/92

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
403	1543	Esplanade Street	Walnut Avenue	Spring Street	AAC	E	2	1,270	34	42,976	1/2/24	84	94	0	6	Surface Treatment - Slurry Seal	11/1/08
403	1544	Esplanade Street	Del Valle Avenue	Walnut Avenue	AAC	E	2	130	32	3,968	1/2/24	70	100	0	0	Overlay - AC Structural	10/1/07
406	1551	Euclid Avenue	Earlham Street	Hewes Street	AAC	E	2	535	32	17,870	1/2/24	84	44	0	56	Overlay - AC Structural	10/1/08
406	1623	Euclid Avenue	James Street	Serandado Street	AAC	E	2	905	32	29,710	1/2/24	85	72	0	28	Overlay - AC Structural	10/1/08
407	1319	Everett Avenue	Markwood Street	East End	AAC	E	2	85	40	3,400	2/14/24	81	98	0	2	Overlay - AC Structural	12/12/12
407	1342	Everett Avenue	Hart Street	East End	AC	E	2	665	31	21,665	2/13/24	100	0	0	100	Overlay-Rubber Hot Mix	1/3/23
408	1100	Everett Place	Cambridge Street	California Street	AAC	E	2	1,280	31	39,680	2/2/24	72	95	5	0	Surface Treatment - Slurry Seal	1/1/03
408	1101	Everett Place	California Street	Lincoln Avenue	AAC	E	2	620	31	19,220	2/23/24	68	24	0	76	Surface Reconstruction - AC	1/1/03
408	1102	Everett Place	Lincoln Avenue	East End	AC	E	2	295	31	9,145	2/2/24	79	100	0	0	Surface Treatment - Slurry Seal	1/1/03
408	1154	Everett Place	Grand Street	Shaffer Street	AAC	E	2	655	33	21,615	3/5/24	98	100	0	0	Overlay - AC Structural	6/1/21
408	1155	Everett Place	Glassell Street	Grand Street	AAC	E	2	655	33	21,615	3/5/24	98	100	0	0	Overlay - AC Structural	6/1/21
409	2102	Everglade Circle	North End	Smokey Avenue	AAC	E	2	180	32	8,308	11/20/23	90	100	0	0	Overlay - AC Structural	1/1/18
411	1426	Exeter Place	North End	Larkstone Drive	AAC	E	2	235	31	8,785	2/22/24	79	98	0	2	Overlay - AC Structural	10/1/07
411	1456	Exeter Place	North End	Stearns Avenue	AAC	E	2	225	31	8,075	2/22/24	84	100	0	0	2 in overlay	8/28/07
413	1678	Fairbairn Street	Skywood Street	Bixby Avenue	AC	E	2	840	32	26,880	1/4/24	88	100	0	0	Surface Treatment - Slurry Seal	10/10/19
414	2652	Fairecliff Drive	Crown Parkway	Skyline Drive	AC	E	2	190	32	6,580	11/20/23	91	100	0	0	Surface Treatment - Slurry Seal	3/21/22
412	2621	Fairfield Lane	Biscayne Way	Heatherview Lane	AC	E	2	535	32	18,620	10/17/23	94	100	0	0	Surface Treatment - Slurry Seal	3/21/22
416	2273	Fairmont Street	Palm Avenue	Sycamore Avene	AC	E	2	500	30	15,000	2/1/24	75	100	0	0	New Construction - Initial	1/1/80
417	14394	Fairmont Way	La Veta Avenue	Burdie Lane	AC	E	2	783	32	24,792	2/22/24	83	96	0	4	New Construction - Initial	1/1/80
417	1443	Fairmont Way	North End	Romelle Avenue	AC	E	2	450	32	15,900	2/22/24	81	98	0	2	Surface Treatment - Chip Seal	1/1/95
417	1444	Fairmont Way	Romelle Avenue	South End	AC	E	2	595	32	20,840	2/22/24	84	60	0	40	Surface Treatment - Slurry Seal	1/1/95
418	3271	Fairport	North End	Paragon Way	AC	E	2	271	32	10,172	12/6/17	93	100	0	0	New Construction - Initial	1/1/80
419	1019	Fairway Drive	Greenview Drive	Tustin Street	AC	E	2	1,590	31	49,290	2/21/24	100	0	0	100	Mill and Overlay	2/1/24
419	1020	Fairway Drive	Cambridge Street	Greenview Drive	AC	E	2	1,205	31	37,355	2/21/24	100	0	0	100	Mill and Overlay	2/1/24
419	1021	Fairway Drive	West End	Cambridge Street	AAC	E	2	615	36	23,290	2/23/24	100	100	0	0	Overlay - AC Structural	3/3/22
419	1452	Fairway Drive	Tustin Street	La Veta Avenue (Frontage)	AC	E	2	1,490	32	47,680	2/23/24	92	93	0	7	Surface Reconstruction - AC	6/1/08
419	968	Fairway Drive	Cypress Street	Fashion Park Street	AAC	E	2	235	34	7,990	3/12/24	92	100	0	0	Overlay - AC Structural	10/11/19
420	3305	Falconer	West End	Portico	AC	E	2	586	32	20,252	11/21/23	89	99	1	0	Surface Treatment - Slurry Seal	6/1/20
422	965	Fashion Park Street	La Veta Avenue	Tularosa Avenue	AAC	E	2	265	36	9,540	3/12/24	93	100	0	0	Surface Reconstruction - AC	6/1/08
422	966	Fashion Park Street	Tularosa Avenue	Fairway Drive	AAC	E	2	660	34	22,440	3/12/24	91	100	0	0	Overlay - AC Structural	10/11/19
423	1807	Fawnwood Lane	Teal Lane	Deerfield Lane	AC	E	2	500	32	16,500	10/17/23	88	69	0	31	Surface Treatment - Slurry Seal	1/1/18
424	1852	Feather Hill Drive	Maple Grove Road	Ridge Park Lane	AC	E	2	230	32	8,110	12/5/23	92	100	0	0	Surface Treatment - Slurry Seal	11/1/08
424	1853	Feather Hill Drive	Ridge Park Lane	Shady Forest Lane	AAC	E	2	310	36	11,160	12/5/23	87	100	0	0	Overlay - AC Structural	11/1/08
424	1854	Feather Hill Drive	Shady Forest Lane	Meadow Grove Rd	AAC	E	2	230	36	8,024	12/5/23	93	100	0	0	Overlay - AC Structural	11/1/08
424	7700	Feather Hill Drive	Meadow Grove Rd	Meats Avenue	AC	E	2	986	36	35,496	12/5/23	61	24	60	16	Surface Treatment - Slurry Seal	7/1/08
426	744	Feldner Road	Maple Avenue	Chapman Avenue	AC	E	2	605	30	18,150	3/12/24	72	36	56	8	Surface Treatment - Slurry Seal	1/1/97
426	791	Feldner Road	Chapman Avenue	Almond Aveneue	AAC	E	2	615	32	19,680	3/5/24	93	100	0	0	Overlay - AC Structural	1/13/16
426	792	Feldner Road	Almond Avenue	Palmyra Avenue	AAC	E	2	700	32	22,400	3/5/24	81	84	13	3	Overlay - AC Structural	1/13/16
428	1298	Fern Street	Walnut Avenue	Handy Street	AC	E	2	1,180	31	36,580	2/14/24	81	98	0	2	Surface Treatment - Slurry Seal	1/1/98
428	1362	Fern Street	North End	Athens Avenue	AAC	E	2	190	32	6,080	3/4/24	81	38	55	7	Overlay - AC Structural	12/14/06
428	1382	Fern Street	Hillside Avenue	South End	AC	E	2	690	32	22,080	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
428	1397	Fern Street	Collins Avenue	Mayfair Avenue	AC	E	2	930	32	29,760	2/13/24	76	98	0	2	New Construction - Initial	4/3/12
428	1398	Fern Street	Mayfair Avenue	Rose Avenue	AC	E	2	765	32	24,480	2/13/24	73	99	0	1	New Construction - Initial	4/3/12
428	1843	Fern Street	Grove Avenue	Taft Avenue	AAC	E	2	1,095	32	35,790	1/3/24	92	94	0	6	Overlay - AC Structural	1/1/21
428	1908	Fern Street	Taft Avenue	Hillside Avenue	AC	E	2	380	32	11,968	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
429	2124	Ferndale Avenue	Ridgewood Street	East End	AAC	E	2	420	32	13,440	2/27/24	89	52	0	48	Overlay - AC Structural	1/1/04
430	1189	Fernside Circle	North End	West Way Avenue	AAC	E	2	185	32	5,920	2/29/24	98	100	0	0	Overlay - AC Structural	1/1/19
431	759	Fernside Street	Dunton Avenue	Brentwood Avenue	AAC	E	2	980	32	31,360	3/1/24	74	43	57	0	Surface Treatment - Slurry Seal	10/10/19
432	1417	Fernwood Avenue	West End	Esplanade Street	AAC	E	2	270	32	9,740	1/26/24	75	67	0	33	Overlay - AC Structural	12/14/06
432	1418	Fernwood Avenue	Esplanade Street	Schug Street	AC	E	2	535	32	17,120	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
432	1647	Fernwood Avenue	Earlham Street	East End	AAC	E	2	375	32	13,500	2/20/24	83	96	0	4	Overlay - AC Structural	1/31/16
432	1665	Fernwood Avenue	Woodland Street	Oakwood Street	AAC	E	2	595	31	18,445	1/26/24	83	61	0	39	Overlay - AC Structural	12/14/06
434	1577	Fieldcrest Lane	West End	Deep Spring Road	AC	E	2	525	32	18,300	10/17/23	87	74	26	0	Surface Treatment - Slurry Seal	1/1/18
435	736	Fir Street	Maple Avenue	South End	AAC	E	2	360	32	11,520	3/12/24	83	95	0	5	Overlay - AC Structural	5/1/09
436	2623	Firenza Way	Biscayne Way	Heatherview Lane	AC	E	2	460	32	14,528	10/17/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
437	1383	Fireside Street	Hillside Avenue	Parkside Avenue	AAC	E	2	745	31	22,903	1/3/24	85	67	31	2	Overlay - AC Structural	1/31/16
437	1907	Fireside Street	North End	Hillside Avenue	AAC	E	2	230	31	8,630	1/3/24	81	59	0	41	Overlay - AC Structural	1/31/16
438	1260	First Street	North End	Chapman Avenue	AC	E	2	620	32	19,648	2/20/24	92	41	0	59	Grind Overlay with Dig Outs	10/1/14
441	2047	Fitzgerald Avenue	Talbot Street	Longhurst Street	AC	E	2	325	32	10,900	12/4/23	88	99	1	0	Surface Treatment - Slurry Seal	8/1/17

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
442	2149	Flanders Street	Glendora Avenue	East End	AAC	E	2	365	33	12,045	2/28/24	79	57	35	8	Overlay - AC Structural	12/13/06
443	2150	Fletcher Street	Glassell Street	East End	AAC	E	2	1,150	36	41,400	3/1/24	94	100	0	0	Overlay - AC	2/29/16
444	698	Flower Circle	La Veta Avenue	South End	AC	E	2	155	36	5,580	3/27/24	48	25	64	11	Surface Treatment - Slurry Seal	1/1/02
445	727	Flower Street	Maple Avenue	Chapman Avenue	AC	E	2	600	32	19,200	3/6/24	50	16	69	15	Surface Treatment - Slurry Seal	1/1/02
445	728	Flower Street	North End	Maple Avenue	AC	E	2	450	32	14,400	3/6/24	72	37	46	17	Surface Treatment - Slurry Seal	1/1/02
445	729	Flower Street	North End	Palm Avenue	AC	E	2	335	32	10,720	3/12/24	59	37	57	6	Surface Treatment - Slurry Seal	1/1/97
445	730	Flower Street	Beverly Drive	Sycamore Avenue	AAC	E	2	410	36	14,760	3/6/24	97	51	0	49	Overlay - AC Structural	1/1/22
446	1761	Flowerwood Avenue	West End	Deerwood Street	AC	E	2	865	32	29,478	10/17/23	84	100	0	0	Surface Treatment - Slurry Seal	3/21/22
448	806	Foley Place	Almond Avenue	South End	AC	E	2	510	32	17,370	4/10/24	46	66	34	0	Surface Treatment - Slurry Seal	1/1/02
449	2315	Fondren Street	North End	El Rancho Avenue	AAC	E	2	845	32	28,540	3/7/24	70	45	55	0	Overlay - AC Structural	9/1/08
450	1985	Forest Street	Shenandoah Avenue	Bryce Avenue	AC	E	2	250	32	7,808	11/14/23	87	86	9	5	Surface Treatment - Slurry Seal	10/10/19
451	1762	Fort Road	Deerwood Street	White Oak Ridge	AC	E	2	125	32	4,000	10/19/23	92	100	0	0	Surface Treatment - Slurry Seal	3/21/22
451	1763	Fort Road	White Oak Ridge	Jamboree Road	AC	E	2	515	48	24,720	4/15/24	82	69	0	31	Surface Treatment - Slurry Seal	1/31/16
452	2080	Fountain Arbor Drive	Copper Kettle Road	South End	AC	E	2	165	32	6,780	12/5/23	100	0	0	0	Overlay-Rubber Hot Mix	12/1/23
453	1767	Fox Run Lane	Bear Tree Lane	Elk Glen Lane	AC	E	2	305	32	10,260	10/19/23	88	100	0	0	Surface Treatment - Slurry Seal	1/1/18
454	2656	Foxworth Drive	Crown Parkway	South End	AC	E	2	199	32	7,868	11/20/23	93	100	0	0	Surface Treatment - Slurry Seal	6/1/20
455	2272	Frampton Street	Palm Avenue	South End	AAC	E	2	170	32	6,490	3/11/24	74	84	0	16	Overlay - AC Structural	1/1/03
457	1705	Franki Street	St. James Avenue	Darby Street	AAC	E	2	500	31	15,500	2/28/24	99	100	0	0	Overlay - AC Structural	8/2/21
458	2251	Freedom Avenue	West End	East End	AC	E	2	1,025	44	45,100	3/20/24	65	38	56	6	Surface Treatment - Slurry Seal	1/1/95
461	1698	Gaff Street	Anchor Street	Buoy Avenue	AAC	E	2	1,155	31	35,805	2/28/24	95	100	0	0	Overlay - AC Structural	12/13/06
461	1701	Gaff Street	Buoy Avenue	St. James Avenue	AAC	E	2	235	31	7,285	2/28/24	91	100	0	0	Overlay - AC Structural	12/13/06
462	3459	Gainsborough Road	Coate Road	Larkstone Drive	AAC	E	2	880	31	28,030	2/22/24	91	94	0	6	2 in overlay	8/28/07
463	1699	Galley Street	Anchor Street	Buoy Avenue	AAC	E	2	970	31	30,070	2/28/24	88	72	0	28	Overlay - AC Structural	12/13/06
466	1001	Gardner Drive	Van Bibber Avenue	Culver Avenue	AAC	E	2	265	31	8,215	2/20/24	85	70	10	20	Overlay - AC Structural	10/1/08
466	994	Gardner Drive	North End	Palmyra Avenue	AAC	E	2	225	30	7,800	2/23/24	88	100	0	0	Overlay - AC Structural	10/1/08
467	1006	Gardner Street	Palmyra Avenue	Van Bibber Avenue	AAC	E	2	355	31	11,005	2/20/24	92	73	27	0	Overlay - AC Structural	10/1/08
467	1009	Gardner Street	Mardell Avenue	Chalynn Avenue	AAC	E	2	220	32	7,040	2/20/24	85	28	0	72	Overlay - AC Structural	10/1/08
467	1010	Gardner Street	Chalynn Avenue	Tularosa Avenue	AAC	E	2	345	32	11,040	2/20/24	90	28	0	72	Surface Reconstruction - AC	1/1/02
467	1011	Gardner Street	Tularosa Avenue	Rosewood Avenue	AAC	E	2	285	32	9,120	2/20/24	80	99	0	1	Overlay - AC Structural	1/1/02
467	1049	Gardner Street	North End	Quincy Avenue	AAC	E	2	190	32	7,180	2/9/24	90	100	0	0	Overlay - AC Structural	12/14/06
468	1368	Garfield Avenue	Handy Street	Wanda Road	AAC	E	2	1,490	33	49,170	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
468	1369	Garfield Avenue	Sacramento Street	Handy Street	AAC	E	2	875	33	28,875	2/8/24	81	100	0	0	2 in overlay	8/29/07
469	1423	Garnet Lane	Laurinda Lane	East End	AAC	E	2	960	31	29,760	2/22/24	81	52	0	48	Overlay - AC Structural	1/1/02
470	1914	Gates Avenue	Cleveland Street	East End	AAC	E	2	220	32	7,040	2/27/24	92	100	0	0	Overlay - AC Structural	6/1/19
472	1250	Gayle Street	Riverdale Avenue	Riverview Avenue	AAC	E	2	110	32	3,520	2/29/24	85	97	0	3	Overlay - AC Structural	10/1/08
472	1251	Gayle Street	Riverview Avenue	South End	AAC	E	2	1,300	32	41,600	2/29/24	81	58	20	22	Overlay - AC Structural	10/1/08
472	1676	Gayle Street	Butterfield Road	Bixby Avenue	AC	E	2	640	32	20,480	1/4/24	92	100	0	0	Surface Treatment - Slurry Seal	10/10/19
473	1915	Genesse Street	North End	Del Mar Avenue	AAC	E	2	370	32	11,840	2/27/24	97	0	0	100	Overlay - AC Structural	6/1/19
473	1921	Genesse Street	North End	Grove Avenue	AAC	E	2	170	32	5,440	2/27/24	99	100	0	0	Overlay - AC Structural	6/1/19
474	1968	Glacier Street	Smokey Avenue	Waterton Avenue	AAC	E	2	290	32	10,030	10/31/23	92	100	0	0	Overlay - AC Structural	1/1/18
479	2083	Glen Canyon Road	Ridgeway Road	Copper Kettle Road	AC	E	2	500	36	18,000	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
479	2084	Glen Canyon Road	Copper Kettle Road	Marywood Drive	AC	E	2	655	36	23,580	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
480	1805	Glen Oak Lane	Deerfield Lane	White Oak Ridge	AC	E	2	110	36	3,744	10/19/23	86	100	0	0	Surface Treatment - Slurry Seal	1/1/18
484	2112	Glendale Avenue	West End	Lincoln Avenue	AAC	E	2	395	31	12,245	2/27/24	98	62	0	38	Overlay - AC Structural	6/1/21
484	2119	Glendale Avenue	Nordic Place	Shattuck Place	AAC	E	2	275	32	8,800	3/4/24	85	49	0	51	2 in overlay	8/1/09
484	2125	Glendale Avenue	Shaffer Street	Cambridge Street	AAC	E	2	1,415	31	43,865	3/11/24	73	77	0	23	Surface Treatment - Slurry Seal	1/1/04
486	2142	Glendora Avenue	Bellbrook Street	Canal Street	AAC	E	2	1,335	32	42,720	2/16/24	82	77	12	11	Overlay - AC Structural	1/1/02
486	2143	Glendora Avenue	Orange-Olive Road	Bellbrook Street	AAC	E	2	1,370	32	43,840	2/16/24	83	76	24	0	Overlay - AC Structural	12/13/06
487	2140	Glennwood Street	Vista Del Playa	Glendora Avenue	AC	E	2	645	32	20,640	2/16/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
488	1532	Glenrose Drive	Charter Oak Drive	Del Valle Avenue	AAC	E	2	935	32	29,920	11/28/23	90	51	0	49	Surface Treatment - Slurry Seal	11/1/08
489	1542	Glenrose Street	North End	Spring Street	AAC	E	2	205	32	8,060	1/2/24	93	72	0	28	Overlay - AC Structural	10/1/08
490	1188	Glenside Circle	North End	Westway Avenue	AAC	E	2	205	32	6,560	2/29/24	98	100	0	0	Overlay - AC Structural	1/1/19
491	760	Glenside Street	Dunton Avenue	Crystal View Avenue	AAC	E	2	375	32	12,000	2/29/24	84	70	10	20	Overlay - AC Structural	1/1/03
492	714	Glenview Place	Almond Avenue	South End	AAC	E	2	510	32	17,370	3/12/24	76	49	42	9	Surface Treatment - Slurry Seal	1/1/04
493	1557	Golden Eagle Avenue	Snow Goose Street	East End	AC	E	2	505	32	17,660	11/28/23	82	60	40	0	Surface Treatment - Slurry Seal	6/1/20
494	2563	Goldenrod Lane	Cannon Street	660' E Cannon Street	AC	E	2	660	36	23,460	8/28/24	60	93	5	2	New Construction - Initial	1/1/80
496	1573	Goldenspur Way	La Cumbre Drive	East End	AC	E	2	980	32	33,158	10/24/23	85	100	0	0	Surface Treatment - Slurry Seal	10/10/19
497	1725	Granada Drive	Elsinore Avenue	Linda Vista Street	AC	E	2	815	32	26,080	11/2/23	92	57	0	43	Surface Treatment - Slurry Seal	3/21/22
497	1728	Granada Drive	Linda Vista Street	Encanto Street	AC	E	2	170	32	6,190	11/2/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
500	1043	Grand Street	Trenton Avenue	South End	AAC	E	2	455	32	15,610	2/15/24	92	48	0	52	Surface Reconstruction - AC	9/20/07
500	1067	Grand Street	Quincy Avenue	Collins Avenue	AC	E	2	1,170	37	43,290	3/13/24	54	59	36	5	Surface Treatment - Slurry Seal	1/1/02
500	1068	Grand Street	Wilson Avenue	Quincy Avenue	AC	E	2	525	37	19,425	3/13/24	54	40	59	1	Surface Treatment - Slurry Seal	1/1/02
500	1069	Grand Street	Hoover Avenue	Wilson Avenue	AAC	E	2	250	37	9,250	3/5/24	98	100	0	0	Overlay - AC Structural	6/1/21
500	1144	Grand Street	Collins Avenue	Lomita Avenue	AC	E	2	610	39	23,790	3/28/24	100	0	0	0	New Construction - Initial	1/1/80
500	1145	Grand Street	Lomita Avenue	Mayfair Avenue	AC	E	2	495	38	18,810	3/28/24	100	0	0	0	New Construction - Initial	1/1/80
500	1146	Grand Street	Mayfair Avenue	Everett Place	AAC	E	2	290	38	11,020	3/5/24	97	100	0	0	Overlay - AC Structural	6/1/21
500	1147	Grand Street	Everett Place	Rose Avenue	AC	E	2	520	37	19,240	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
500	1148	Grand Street	Rose Avenue	Walnut Avenue	AAC	E	2	595	37	22,015	3/14/24	86	60	0	40	Overlay - AC Structural	1/1/04
500	2410	Grand Street	Palm Avenue	Maple Avenue	PCC	E	2	620	40	24,800	8/28/24	44	18	69	13	New Construction - Initial	1/1/02
500	930	Grand Street	Almond Avenue	Washington Avenue	AC	E	2	290	36	10,440	2/26/24	84	38	11	51	Surface Treatment - Slurry Seal	1/1/03
500	931	Grand Street	Washington Avenue	Palmyra Avenue	AC	E	2	300	36	10,800	2/26/24	88	57	0	43	Surface Treatment - Slurry Seal	1/1/03
500	933	Grand Street	Culver Avenue	La Veta Avenue	AC	E	2	615	36	22,140	2/26/24	85	100	0	0	Surface Treatment - Slurry Seal	1/1/03
500	934	Grand Street	La Veta Avenue	River Avenue	AC	E	2	380	25	9,500	4/10/24	79	85	13	2	Surface Treatment - Slurry Seal	1/1/95
500	935	Grand Street	River Avenue	South End	AC	E	2	355	25	8,875	2/26/24	95	100	0	0	Surface Treatment - Slurry Seal	1/1/95
500	978	Grand Street	Palmyra Avenue	Culver Avenue	AC	E	2	625	36	22,500	2/26/24	91	92	0	8	Surface Treatment - Slurry Seal	1/1/03
502	1168	Grant Place	North End	Chapman Avenue	AAC	E	2	480	29	15,420	8/28/24	81	53	19	28	Overlay - AC Structural	1/1/02
503	1608	Gravier Street	Bond Avenue	Walnut Avenue	AAC	E	2	1,275	36	45,900	11/28/23	84	75	0	25	Overlay - AC Structural	10/1/08
505	2051	Green Clover Circle	Summitridge Lane	South End	AC	E	2	675	32	23,100	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
506	2082	Green Garden Lane	Glen Canyon Road	East End	AC	E	2	145	32	6,435	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
508	1016	Greengrove Drive	Culver Avenue	Chalynn Street	AAC	E	2	525	32	16,800	2/20/24	81	99	0	1	Overlay - AC Structural	10/1/08
508	1017	Greengrove Drive	Palmyra Avenue	Culver Avenue	AAC	E	2	620	32	19,840	2/20/24	86	27	44	29	Overlay - AC Structural	10/1/08
509	1050	Greengrove Street	North End	Quincy Avenue	AC	E	2	190	32	7,180	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
509	1913	Greengrove Street	Meats Avenue	South End	AC	E	2	740	32	23,680	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
509	1929	Greengrove Street	Glendale Avenue	Taft Avenue	AC	E	2	980	36	35,280	2/27/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
509	2138A	Greengrove Street	North End	Vista Del Playa (North)	AC	E	2	216	32	6,912	2/16/24	80	100	0	0	Surface Treatment - Slurry Seal	1/1/98
509	2138B	Greengrove Street	Vista Del Playa (North)	Vista Del Playa (South)	AC	E	2	224	32	7,168	2/16/24	79	83	17	0	Surface Treatment - Slurry Seal	1/1/98
509	938	Greengrove Street	City Limit	Fairhaven Avenue	AAC	E	2	620	33	20,460	3/15/24	100	0	0	0	Overlay - AC Structural	3/3/22
510	1703	Greenleaf Avenue	Orange-Olive Road	Dunfield Street	AAC	E	2	705	31	21,855	3/11/24	79	78	0	22	Overlay - AC Structural	10/1/08
511	1022	Greenview Drive	Fairway Drive	Fairway Drive	AC	E	2	1,100	31	34,100	2/21/24	99	0	0	100	Mill and Overlay	2/1/24
512	1190	Greenway Avenue	Crestwood Street	Glassell Street	AAC	E	2	685	32	21,760	2/29/24	92	92	0	8	Cold Milling	12/14/06
512	1190	Greenway Avenue	Crestwood Street	Glassell Street	AAC	E	2	685	32	21,760	2/29/24	92	92	0	8	Overlay - AC Structural	12/14/06
512	1190	Greenway Avenue	Crestwood Street	Glassell Street	AAC	E	2	685	32	21,760	2/29/24	92	92	0	8	Patching - AC Leveling	12/14/06
513	1633	Greenwood Avenue	Chipwood Street	Esplanade Street	AAC	E	2	500	31	15,500	1/26/24	83	64	0	36	Overlay - AC Structural	12/14/06
513	1634	Greenwood Avenue	Esplanade Street	Wrightwood Street	AC	E	2	450	32	14,900	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
514	3138	Grijalva	Rancho Santiago Boulevard	Cheyenne Street	AC	E	2	184	34	2,842	11/28/23	88	43	0	57	New Construction - Initial	1/1/90
516	1823	Grove Avenue	Shaffer Street	Cambridge Street	AAC	E	2	1,425	32	45,600	2/27/24	89	29	0	71	Overlay - AC Structural	1/1/03
516	1824	Grove Avenue	Cambridge Street	East End	AC	E	2	915	32	29,280	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
516	1838	Grove Avenue	Tustin Street	Highland Street	AC	E	2	880	32	28,160	3/4/24	96	100	0	0	Surface Treatment - Slurry Seal	1/1/02
516	1842	Grove Avenue	Fern Street	Santiago Boulevard	AAC	E	2	335	32	11,470	1/3/24	93	100	0	0	Overlay - AC Structural	1/1/21
516	1850	Grove Avenue	Sacramento Street	Agate Street	AC	E	2	930	32	30,260	12/13/23	79	41	59	0	Surface Treatment - Slurry Seal	8/1/16
516	1923	Grove Avenue	Lincoln Street	East End	AAC	E	2	310	36	11,160	3/4/24	95	100	0	0	Overlay - AC Structural	1/1/04
516	2182	Grove Avenue	Glassell Street	East End	AC	I	2	225	44	11,050	4/11/24	72	40	60	0	New Construction - Initial	1/1/80
516	2183	Grove Avenue	Orange-Olive Road	Shaffer Street	AAC	I	2	695	32	22,240	2/16/24	93	100	0	0	Overlay - AC Structural	1/1/19
516	2253	Grove Avenue	Batavia Street	1710' E Batavia Street	AAC	I	2	1,710	44	75,240	3/1/24	84	44	36	20	Surface Reconstruction - AC	1/1/02
516	2254	Grove Avenue	1710' E Batavia Street	Glassell Street	AAC	I	2	910	44	31,850	3/1/24	63	15	72	13	Surface Reconstruction - AC	1/1/02
517	3466	Grovewood Lane	Windes Drive	East End	AAC	E	2	1,250	32	41,800	11/14/23	100	0	0	0	Overlay - AC Structural	11/14/23
519	2599	Halyard Lane	Sirius Avenue	Tiller Avenue	AC	E	2	220	33	7,760	3/7/24	88	100	0	0	Surface Treatment - Slurry Seal	1/1/03
520	1326	Hamilton Avenue	Sacramento Street	Markwood Street	AAC	E	2	165	32	5,280	2/13/24	73	99	0	1	Overlay - AC Structural	12/12/12
520	1335	Hamilton Avenue	Handy Street	East End	AC	E	2	500	31	16,500	2/13/24	83	43	0	57	New Construction - Initial	4/3/12
520	1340	Hamilton Avenue	Hart Street	East End	AAC	E	2	665	31	21,665	2/13/24	100	0	0	100	Overlay-Rubber Hot Mix	2/1/24
521	1548	Hamlin Street	Walnut Avenue	South End	AAC	E	2	215	32	8,678	11/27/23	90	100	0	0	Overlay - AC Structural	10/1/08
521	1559	Hamlin Street	El Salvador Avenue	Orange Grove Avenue	AAC	E	2	600	32	19,950	11/27/23	79	100	0	0	Surface Treatment - Slurry Seal	11/1/08
521	1562	Hamlin Street	Orange Grove Avenue	Walnut Avenue	AAC	E	2	485	32	15,136	11/27/23	86	100	0	0	Overlay - AC Structural	10/1/08
521	2358	Hamlin Street	Chapman Avenue	Washington Avenue	AAC	E	2	615	32	19,488	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
523	3309	Hampshire	Eaton Ct	Kendra Drive	AC	E	2	1,681	32	53,408	11/21/23	95	100	0	0	Surface Treatment - Slurry Seal	6/1/20
526	1306	Handy Street	Walnut Avenue	Palm Avenue	AC	E	2	1,280	31	39,680	2/14/24	85	74	0	26	Surface Treatment - Slurry Seal	1/1/98
526	1330	Handy Street	Mayfair Avenue	Walnut Avenue	AAC	E	2	1,610	31	49,910	3/20/24	72	82	18	0	2 in overlay	10/1/13
526	1331	Handy Street	Collins Avenue	Mayfair Avenue	AAC	E	2	965	30	28,950	3/20/24	78	100	0	0	2 in overlay	10/1/13

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
526	1375	Handy Street	Chestnut Avenue	Katella Avenue	AC	E	2	1,095	36	39,420	3/1/24	99	70	0	30	Mill and Overlay	3/3/22
526	1518	Handy Street	Katella Avenue	Quincy Avenue	AC	E	2	1,540	31	47,740	2/8/24	100	0	0	0	Mill and Overlay	3/3/22
526	3451	Handy Street	Quincy Avenue	Collins Ave	AC	E	2	1,318	31	40,858	2/8/24	100	0	0	0	Mill and Overlay	3/3/22
527	1345	Harding Street	Hoover Avenue	South End	AAC	E	2	415	32	14,380	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
527	1373	Harding Street	Chestnut Avenue	Katella Avenue	AC	E	2	1,080	36	38,880	3/1/24	99	0	0	100	Mill and Overlay	3/3/22
528	2208	Hariton Street	Nicolas Avenue	South End	AC	E	2	875	44	38,500	3/18/24	76	29	56	15	Surface Treatment - Slurry Seal	1/1/95
529	1327	Hart Street	Collins Avenue	Everett Avenue	AAC	E	2	1,300	31	40,300	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
529	1328	Hart Street	Everett Avenue	Orange Grove Avenue	AAC	E	2	985	31	30,535	2/13/24	98	0	0	100	Overlay-Rubber Hot Mix	2/1/24
529	1329	Hart Street	Orange Grove Avenue	Walnut Avenue	AAC	E	2	290	31	8,990	2/13/24	98	0	0	100	Overlay-Rubber Hot Mix	2/1/24
529	1357	Hart Street	Garfield Avenue	Coolidge Avenue	AAC	E	2	220	30	6,600	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
529	1358	Hart Street	Coolidge Avenue	Hoover Avenue	AAC	E	2	250	30	7,500	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
529	1359	Hart Street	Hoover Avenue	Monroe Avenue	AAC	E	2	1,340	31	41,540	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
529	1360	Hart Street	Chestnut Avenue	Athens Avenue	AAC	E	2	420	32	13,440	3/1/24	84	67	0	33	Overlay - AC Structural	11/13/06
529	1388	Hart Street	Lakeside Avenue	Brookside Avenue	AC	E	2	225	32	7,008	1/3/24	91	100	0	0	Surface Treatment - Slurry Seal	1/1/02
529	1525	Hart Street	Monroe Avenue	Collins Avenue	AAC	E	2	740	32	23,680	2/8/24	81	100	0	0	2 in overlay	10/1/13
529	1901	Hart Street	Blueridge Avenue	Hillcrest Avenue	AAC	E	2	255	32	9,660	1/3/24	95	100	0	0	Overlay - AC Structural	1/1/21
529	1910	Hart Street	North End	Hillside Avenue	AC	E	2	215	32	8,380	1/3/24	95	100	0	0	Overlay-Rubber Hot Mix	1/3/23
530	1430	Hartford Road	Kensington Road	Wellington Road	AAC	E	2	300	31	10,800	2/22/24	87	80	0	20	2 in overlay	8/29/07
530	1432	Hartford Road	Coate Road	Arlington Road	AAC	E	2	225	31	6,975	2/22/24	87	100	0	0	Overlay - AC Structural	1/1/02
531	1206	Hartman Street	Riverdale Avenue	Rainer Avenue	AAC	E	2	785	32	25,120	2/29/24	83	57	13	30	Surface Treatment - Slurry Seal	3/21/22
531	1207	Hartman Street	Riverdale Avenue	North End	AAC	E	2	260	32	8,320	3/19/24	86	98	0	2	Overlay - AC Structural	10/1/08
531	1208	Hartman Street	Rainer Avenue	Ashwood Street	AAC	E	2	940	32	30,080	2/29/24	92	93	0	7	Overlay - AC Structural	3/3/22
531	1688	Hartman Street	Brookshire Avenue	Brentwood Avenue	AC	E	2	235	32	7,520	3/1/24	63	28	72	0	Surface Treatment - Slurry Seal	1/1/03
531	1689	Hartman Street	Dunton Avenue	Brookshire Avenue	AAC	E	2	830	32	26,560	3/1/24	88	47	0	53	Overlay - AC Structural	1/1/03
531	2154	Hartman Street	Woodstock Avenue	South End	AAC	E	2	235	32	7,520	3/1/24	85	100	0	0	Overlay - AC Structural	1/1/03
533	1044	Harwood Street	Trenton Avenue	South End	AAC	E	2	455	32	14,560	2/15/24	90	100	0	0	Surface Reconstruction - AC	9/20/07
533	1088	Harwood Street	Monroe Avenue	Collins Avenue	AAC	E	2	775	31	24,025	2/9/24	95	100	0	0	Overlay - AC Structural	1/1/04
533	1108	Harwood Street	Sycamore Avenue	Palm Avenue	AC	E	2	620	34	21,080	2/9/24	86	100	0	0	New Construction - Initial	1/1/80
533	1109	Harwood Street	Walnut Avenue	Sycamore Avenue	AAC	E	2	620	32	19,840	2/9/24	90	84	0	16	Overlay - AC Structural	1/1/02
533	1110	Harwood Street	North End	Walnut Avenue	AC	E	2	315	32	10,080	2/9/24	93	100	0	0	Surface Reconstruction - AC	1/1/02
533	1161	Harwood Street	Lomita Avenue	Oakmont Avenue	AC	E	2	265	32	8,480	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
533	2129	Harwood Street	North End	Meats Avenue Frontage Road	AAC	E	2	595	31	18,445	2/28/24	85	73	0	27	Overlay - AC Structural	1/1/04
533	2420	Harwood Street	Maple Avenue	Chapman Avenue	PCC	E	2	605	34	20,570	8/28/24	58	17	68	15	New Construction - Initial	1/1/80
533	2421	Harwood Street	Palm Avenue	Maple Avenue	PCC	E	2	615	34	20,910	8/28/24	47	9	62	29	New Construction - Initial	1/1/80
533	918	Harwood Street	Chapman Avenue	Almond Avenue	AAC	E	2	615	33	20,295	3/14/24	46	42	48	10	Overlay - AC Structural	12/14/06
533	919	Harwood Street	Almond Avenue	Palmyra Avenue	AC	E	2	610	33	20,130	3/13/24	73	52	33	15	Surface Treatment - Slurry Seal	1/1/03
533	920	Harwood Street	Palmyra Avenue	Culver Avenue	AC	E	2	615	33	20,295	2/26/24	63	33	60	7	Surface Treatment - Slurry Seal	1/1/03
534	2540	Hastings Avenue	West End	Camden Street	AC	E	2	555	32	19,260	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
534	2541	Hastings Avenue	Camden Street	East End	AC	E	2	605	32	21,158	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
536	2583	Havenwood Circle	North End	Fairhaven Avenue	AAC	E	2	140	21	4,440	8/28/24	85	73	27	0	Overlay - AC Structural	1/31/16
537	3296	Hawksfield	West End	Portico Rd	AC	E	2	669	28	20,232	11/21/23	90	100	0	0	Surface Treatment - Slurry Seal	6/1/20
538	2145	Hayford Street	Heim Avenue	Amber Avenue	AAC	E	2	265	33	8,745	2/28/24	98	100	0	0	Overlay - AC Structural	8/2/21
540	1209	Hearthside Street	Rainier Avenue	Ashwood Street	AAC	E	2	760	32	24,320	2/29/24	84	96	0	4	Surface Treatment - Slurry Seal	3/21/22
540	1210	Hearthside Street	Riverdale Avenue	Rainier Avenue	AC	E	2	785	32	25,120	2/29/24	91	62	38	0	Surface Treatment - Slurry Seal	3/21/22
540	1690	Hearthside Street	North End	Crystal View Avenue	AAC	E	2	375	32	12,000	3/1/24	98	100	0	0	Overlay - AC Structural	1/1/19
540	2151	Hearthside Street	Woodstock Avenue	Fletcher Street	AAC	E	2	365	32	11,680	3/1/24	84	39	56	5	Overlay - AC Structural	1/1/03
541	1533	Hearthstone Drive	Charter Oak Drive	Del Valle Avenue	AAC	E	2	945	33	31,185	11/28/23	76	49	51	0	Surface Treatment - Slurry Seal	11/1/08
542	100400	Heatherstone Street	North End (Stearns Dr)	South End (Stearns Dr)	AAC	E	2	310	27	9,810	8/28/24	86	100	0	0	Overlay - AC Structural	1/31/16
542	1171	Heatherstone Street	Palmyra Avenue	South End	AC	E	2	500	32	15,808	2/23/24	84	57	0	43	New Construction - Initial	4/3/12
543	2624	Heatherview Lane	Old Camp Road	Fairfield	AC	E	2	112	32	3,584	10/17/23	95	100	0	0	Surface Treatment - Slurry Seal	1/1/18
543	2778	Heatherview Lane	Fairfield	Firenza	AC	E	2	572	32	19,054	10/17/23	92	100	0	0	Surface Treatment - Slurry Seal	3/21/22
544	14663	Heim Avenue	Orange-Olive Road	Torres Street	AC	E	2	1,571	36	56,556	3/28/24	64	32	34	34	Surface Treatment - Slurry Seal	1/1/98
544	2131	Heim Avenue	Torres Street	Canal Street	AC	E	2	935	36	33,660	2/28/24	94	100	0	0	New Construction - Initial	8/1/17
544	2169	Heim Avenue	Tustin Street	East End	AC	E	2	450	36	16,200	3/14/24	88	83	17	0	Complete Reconstruction - AC	10/1/08
544	257	Heim Avenue	Canal Street	Tustin Street	AAC	E	2	1,050	36	37,800	3/14/24	82	56	44	0	Overlay - AC Structural	8/1/16
545	735	Hemlock Street	Willow Avenue	South End	AC	E	2	220	32	7,040	3/11/24	70	61	36	3	Surface Treatment - Slurry Seal	1/1/04
550	1139	Hickory Lane	California Street	East End	AC	E	2	300	31	10,350	2/23/24	82	55	0	45	Surface Treatment - Slurry Seal	1/1/02
551	1598	Hidden Canyon	Canyon View Avenue	Pinacle Pointe	AC	E	2	140	32	4,224	10/26/23	92	100	0	0	Surface Treatment - Slurry Seal	1/1/04
551	1809	Hidden Canyon	West End	Canyon View Avenue	AC	E	2	420	32	14,940	10/26/23	75	96	0	4	Surface Treatment - Slurry Seal	1/1/04

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
553	1966	Hidden Trail	North End	Bond Avenue	AC	E	2	512	32	17,884	11/27/23	79	42	58	0	New Construction - Initial	1/1/80
555	1281	Highland Street	Dana Place	South End	AC	E	2	425	32	13,600	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
555	1282	Highland Street	Sycamore Avenue	Dana Place	AC	E	2	480	32	15,360	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
555	1289	Highland Street	Barkley Avenue	Mayfair Avenue	AAC	E	2	1,005	31	31,155	2/27/24	91	53	0	47	Overlay - AC Structural	1/1/02
555	1506	Highland Street	Adams Avenue	Collins Avenue	AC	E	2	1,510	30	45,600	3/4/24	26	15	81	4	Surface Treatment - Slurry Seal	1/1/02
555	2168	Highland Street	Coral Avenue	Taft Avenue	AC	I	2	1,980	30	63,400	3/20/24	53	23	63	14	New Construction - Initial	1/1/80
555	2171	Highland Street	North End	Van Owen Avenue	AAC	E	2	745	36	26,820	3/1/24	92	87	0	13	Overlay - AC Structural	1/1/02
555	3224	Highland Street	Coral Ave	North End	AC	E	2	1,076	32	37,232	3/20/24	55	30	60	10	New Construction - Initial	1/1/80
555	3467	Highland Street	Mayfair Avenue	Rose Avenue	AC	E	2	595	31	18,445	2/27/24	78	58	25	17	New Construction - Initial	1/1/80
559	3304	Highwood	Portico Rd	North End	AC	E	2	782	32	28,024	11/21/23	90	100	0	0	Surface Treatment - Slurry Seal	6/1/20
560	2364	Hill Street	Montgomery Place	Phillips Place	AC	E	2	780	28	21,840	2/20/24	82	33	0	67	Surface Treatment - Slurry Seal	1/1/91
561	1902	Hillcrest Avenue	Fern Street	Hart Street	AAC	E	2	815	32	26,830	1/3/24	94	100	0	0	Overlay - AC Structural	1/1/21
561	1905	Hillcrest Avenue	Stoneridge Street	East End	AAC	E	2	880	32	28,910	12/13/23	92	100	0	0	Overlay - AC Structural	1/1/21
563	1934	Hillman Circle	West End	Robinhood Place	AC	E	2	235	32	9,020	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
564	2040	Hillsborough Avenue	Whitehall Street	Roxbury Street	AC	E	2	290	36	11,190	12/4/23	86	52	48	0	Surface Treatment - Slurry Seal	8/1/17
564	2041	Hillsborough Avenue	Longhurst Street	Whitehall Street	AC	E	2	260	36	9,360	12/4/23	87	97	3	0	Surface Treatment - Slurry Seal	8/1/17
564	2042	Hillsborough Avenue	Meredith Street	Longhurst Street	AC	E	2	470	28	13,160	12/4/23	100	0	0	0	Surface Treatment - Slurry Seal	8/1/17
566	1384	Hillside Avenue	Morningside Street	Fern Street	AAC	E	2	590	31	18,290	1/3/24	89	100	0	0	Overlay - AC Structural	1/31/16
566	1909	Hillside Avenue	Warbler Place	Santiago Boulevard	AC	E	2	820	32	26,048	1/3/24	100	0	0	0	Overlay-Rubber Hot Mix	1/3/23
566	1992	Hillside Avenue	Sycamore Avenue	East End	AC	E	2	380	32	13,660	11/29/23	94	100	0	0	Surface Treatment - Slurry Seal	1/1/04
567	1685	Hilltop Drive	Westhaven Street	Valley View Drive	AAC	E	2	630	32	20,160	1/4/24	88	100	0	0	Overlay - AC Structural	1/1/19
568	1937	Hillview Drive	Bolingridge Drive	Sunview Drive	AAC	E	2	280	32	8,960	1/4/24	93	100	0	0	Overlay - AC Structural	1/1/19
571	748	Holly Street	North End	Maple Avenue	AAC	E	2	225	32	7,200	3/12/24	100	0	0	0	Overlay - AC Structural	7/7/22
571	749	Holly Street	Maple Avenue	South End	AAC	E	2	360	32	11,520	3/12/24	100	0	0	0	Overlay - AC Structural	7/7/22
573	1092	Hoover Avenue	Shaffer Street	Cambridge Street	AAC	E	2	1,280	31	39,680	2/9/24	87	54	15	31	Overlay - AC Structural	1/1/99
573	1093	Hoover Avenue	Glassell Street	Shaffer Street	AAC	E	2	1,240	31	38,440	3/5/24	97	73	0	27	Overlay - AC Structural	6/1/21
573	1195	Hoover Avenue	Lemon Street	Glassell Street	AC	E	2	610	41	25,010	2/15/24	78	72	28	0	Surface Reconstruction - AC	1/1/93
573	1351	Hoover Avenue	Sacramento Street	Handy Street	AAC	E	2	1,135	30	34,050	2/8/24	86	64	36	0	2 in overlay	8/29/07
573	1372	Hoover Avenue	Handy Street	Wanda Road	AAC	E	2	1,485	32	47,520	2/8/24	92	100	0	0	Overlay - AC Structural	7/1/08
573	2221	Hoover Avenue	West End	Batavia Street	AAC	I	2	510	31	15,810	3/8/24	82	100	0	0	Overlay - AC Structural	12/12/12
574	3252	Horizon Drive	Alexandria St	West End	AC	E	2	477	32	16,764	12/6/17	96	100	0	0	New Construction - Initial	1/1/80
574	3260	Horizon Drive	Alexandria St	East End	AC	E	2	467	32	16,444	12/6/17	98	100	0	0	New Construction - Initial	1/1/80
575	1812	Horseshoe Road	Orange Park Boulevard	Sundance Circle	AAC	E	2	1,100	21	23,100	10/26/23	92	48	0	52	Overlay - AC Structural	1/1/21
580	1675	Ila Drive	Sunview Drive	East End	AAC	E	2	420	32	13,440	1/4/24	79	43	0	57	Overlay - AC Structural	1/1/19
584	1758	Ironwood Avenue	Flowerwood Avenue	White Oak Ridge	AC	E	2	755	32	25,160	10/17/23	94	100	0	0	Surface Treatment - Slurry Seal	3/21/22
585	2661	Irvine Park Road	Jamboree Road	1395' E Jamboree Road	AC	E	3	1,395	40	55,800	11/27/17	64	50	27	23	New Construction - Initial	1/1/80
586	1973	Isle Royale Circle	North End	Teton Avenue	AC	E	2	240	32	9,180	10/31/23	85	100	0	0	Surface Treatment - Slurry Seal	10/10/19
587	1944	Ivy Hill Lane	West End	Maple Tree Street	AAC	E	2	305	32	11,560	1/4/24	95	100	0	0	Overlay - AC Structural	1/1/21
588	1053	Jacaranda Avenue	Grand Street	Shaffer Street	AAC	E	2	625	31	19,375	3/5/24	90	53	0	47	Overlay - AC Structural	1/1/04
588	1054	Jacaranda Avenue	Glassel St	Grand St	AAC	E	2	673	30	20,070	3/5/24	91	57	0	43	Overlay - AC Structural	12/13/06
588	1059	Jacaranda Avenue	California Street	East End	AAC	E	2	585	31	19,235	2/9/24	89	100	0	0	Overlay - AC Structural	12/14/06
588	1503	Jacaranda Avenue	Handy Street	Hart Street	AAC	E	2	845	32	27,040	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
588	1514	Jacaranda Avenue	Morgan Street	Mallard Street	AAC	E	2	395	32	12,640	3/6/24	83	100	0	0	Overlay - AC Structural	8/1/17
588	1531	Jacaranda Avenue	Sacramento Street	East End	AAC	E	2	400	31	12,400	2/8/24	84	100	0	0	2 in overlay	8/31/07
589	1070	Jackson Avenue	Grand Street	East End	AAC	E	2	380	31	12,880	3/5/24	95	100	0	0	Overlay - AC Structural	6/1/21
589	1523	Jackson Avenue	Sacramento Street	Handy Street	AAC	E	2	1,140	31	35,340	2/8/24	82	100	0	0	2 in overlay	8/29/07
589	1524	Jackson Avenue	Handy Street	Hart Street	AAC	E	2	1,220	31	37,820	2/8/24	70	100	0	0	2 in overlay	10/1/13
589	1528	Jackson Avenue	Morgan Street	Mallard Street	AC	E	2	410	32	13,120	3/6/24	83	100	0	0	Surface Treatment - Slurry Seal	1/1/02
591	1415	James Street	Chapman Avenue	Palmyra Avenue	AC	E	2	1,300	31	40,300	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
591	1416	James Street	Palmyra Avenue	La Veta Avenue	AC	E	2	1,440	31	44,640	1/26/24	74	74	22	4	New Construction - Initial	4/3/12
591	1537	James Street	North End	Del Valle Avenue	AAC	E	2	365	32	13,180	11/28/23	91	100	0	0	Overlay - AC Structural	10/1/08
591	1616	James Street	North End	El Carmen Avenue	AAC	E	2	440	32	15,580	11/28/23	90	88	0	12	2 in overlay	8/31/07
591	1622	James Street	Euclid Avenue	Sycamore Avenue	AAC	E	2	525	32	17,300	1/2/24	86	100	0	0	Overlay - AC Structural	10/1/08
592	982	Jameson Street	Chapman Avenue	Almond Avenue	AC	E	2	620	36	22,320	2/21/24	68	87	6	7	Surface Treatment - Slurry Seal	1/1/04
593	1722	Jamestown Way	Valley Forge Drive	Santiago Canyon Road	AAC	E	2	115	26	2,790	11/29/23	83	48	52	0	Overlay - AC Structural	1/31/16
593	1724	Jamestown Way	Valley Forge Drive	San Juan Drive	AAC	E	2	630	32	19,968	11/16/23	93	100	0	0	Overlay - AC Structural	1/31/16
594	1134	Jefferson Avenue	Shaffer Street	Harwood Street	AC	E	2	625	32	20,000	2/9/24	52	24	76	0	Surface Treatment - Slurry Seal	1/1/03
595	1464	Jennifer Lane	Palmyra Avenue	Deborah Lane	AAC	E	2	825	36	31,200	2/14/24	80	99	0	1	Overlay - AC Structural	12/12/12
596	2883	Jetty Drive	Sirius Avenue	Chapman Avenue	AAC	E	2	725	33	23,325	3/7/24	71	30	61	9	Overlay - AC Structural	1/1/03

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
597	2274	Jewell Place	Palm Avenue	Maple Avenue	AC	E	2	620	32	19,840	3/4/24	87	88	0	12	Surface Reconstruction - AC	1/1/91
597	2275	Jewell Place	Maple Avenue	Chapman Avenue	AC	E	2	605	32	19,360	3/4/24	92	100	0	0	New Construction - Initial	1/1/80
598	1696	Jib Street	White Cap Avenue	South End	AAC	E	2	185	31	5,735	2/28/24	62	19	64	17	Surface Reconstruction - AC	1/1/04
601	1519	Jodi Street	North End	Hoover Avenue	AAC	E	2	250	32	8,000	2/8/24	80	100	0	0	2 in overlay	8/29/07
603	2365	Jordan Avenue	Hewes Street	Esplanade Street	AC	E	2	1,295	37	47,915	3/6/24	65	71	12	17	Surface Treatment - Slurry Seal	1/1/95
604	2109	Joshua Tree Avenue	Orange Park Boulevard	East End	AC	E	2	400	32	14,300	10/31/23	81	45	53	2	Surface Treatment - Slurry Seal	10/10/19
604	2110	Joshua Tree Avenue	West End	Orange Park Boulevard	AAC	E	2	355	32	12,860	10/31/23	91	100	0	0	Overlay - AC Structural	1/1/18
605	1748	Juaneno Avenue	Chumash Street	East End	AAC	E	2	255	32	9,660	11/29/23	95	100	0	0	Overlay - AC Structural	1/1/21
606	1733	Julie Avenue	Hewes Street	Christine Street	AAC	E	2	220	32	6,848	11/2/23	100	0	0	0	Overlay - AC Structural	3/3/22
607	1515	Juniper Avenue	Morgan Street	Mallard Street	AAC	E	2	395	32	12,640	3/6/24	81	100	0	0	Overlay - AC Structural	8/1/17
609	1412	Justice Circle	North End	Liberty Way	AAC	E	2	250	32	10,500	2/20/24	75	66	0	34	2 in overlay	8/1/09
610	1467	Karan Lane	Teri Lane	Yorba Street	AAC	E	2	365	36	12,628	2/14/24	84	98	0	2	Overlay - AC Structural	12/12/12
612	1365	Kathleen Street	Trenton Avenue	Katella Avenue	AAC	E	2	525	32	17,300	3/4/24	92	89	0	11	Overlay - AC Structural	1/1/04
612	1403	Kathleen Street	Collins Avenue	Mayfair Avenue	AC	E	2	1,170	36	42,120	3/20/24	67	43	44	13	Surface Treatment - Slurry Seal	1/1/02
612	1500	Kathleen Street	Chapman Avenue	Palmyra Avenue	AAC	E	2	1,275	32	40,800	1/26/24	83	70	12	18	Overlay - AC Structural	12/14/06
614	803	Kelly Avenue	West End	Lemon Street	AC	E	2	515	36	19,690	3/5/24	88	51	0	49	Grind Overlay with Dig Outs	10/1/14
616	763	Kennedy Street	North End	Brentwood Avenue	AAC	E	2	1,070	36	38,520	2/29/24	97	100	0	0	Overlay - AC Structural	1/1/19
617	1995	Kennymead Avenue	Randall Street	Ridgeline Road	AC	E	2	1,535	22	33,770	10/25/23	84	74	26	0	Surface Treatment - Slurry Seal	1/1/02
617	1996	Kennymead Avenue	Santiagon Canyon Road	Randall Street	AAC	E	2	1,520	26	39,520	10/25/23	95	100	0	0	Overlay - AC Structural	1/1/21
618	1431	Kensington Road	Hartford Road	Gainsborough Road	AAC	E	2	580	31	18,480	2/22/24	84	100	0	0	2 in overlay	8/28/07
619	2483	Kent Street	Ashford Avenue	East End	AC	E	2	235	33	8,755	8/28/24	83	78	22	0	New Construction - Initial	1/1/80
621	1546	Kenyon Place	Noble Street	South End	AAC	E	2	170	32	6,940	11/27/23	75	100	0	0	Overlay - AC Structural	10/1/08
622	1919	Keokuk Street	North End	Grove Avenue	AAC	E	2	170	33	5,610	2/27/24	99	0	0	100	Overlay - AC Structural	6/1/19
623	1276	Killingsworth Avenue	Wheeler Street	Malena Street	AC	E	2	330	31	10,730	3/4/24	47	69	27	4	Surface Treatment - Slurry Seal	1/1/92
624	2632	Kimbark Lane	Lewis Street	South End	AC	E	2	410	36	16,560	11/28/17	98	100	0	0	New Construction - Initial	1/1/80
628	1450	Kirkwood Avenue	Ponderosa Street	East End	AAC	E	2	560	32	19,020	2/21/24	99	0	0	100	Overlay - AC Structural	2/1/24
628	1640	Kirkwood Avenue	West End	Esplanade Street	AAC	E	2	185	32	7,720	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
628	1641	Kirkwood Avenue	Esplanade Street	Wesley Street	AC	E	2	345	32	11,540	1/26/24	61	58	39	3	Surface Treatment - Slurry Seal	1/1/02
628	1648	Kirkwood Avenue	Earlham Street	Winthrope Street	AAC	E	2	540	32	17,780	2/20/24	77	65	0	35	Overlay - AC Structural	1/31/16
628	1663	Kirkwood Avenue	100' W Woodland Street	Woodland Street	AC	E	2	100	33	3,300	1/26/24	79	100	0	0	Surface Treatment - Slurry Seal	10/1/13
628	1664	Kirkwood Avenue	Woodland Street	East End	AAC	E	2	440	31	14,740	1/26/24	83	77	0	23	Overlay - AC Structural	12/14/06
628	1668	Kirkwood Avenue	Prospect Street	East End	AC	E	2	260	33	9,680	2/23/24	83	82	0	18	Surface Treatment - Slurry Seal	1/1/91
629	1746	Klamath Place	North End	Shoshone Avenue	AAC	E	2	205	32	8,060	11/29/23	92	83	0	17	Overlay - AC Structural	1/1/21
631	1578	Knollwood Drive	West End	Deep Spring Road	AC	E	2	400	32	14,300	10/17/23	89	88	12	0	Surface Treatment - Slurry Seal	1/1/18
632	1571	La Cumbre Way	Calle Grande	Chandler Ranch	AAC	E	2	2,344	36	84,384	10/24/23	85	86	10	4	Overlay - AC Structural	1/1/18
632	1575	La Cumbre Way	North End	Calle Grande	AAC	E	2	1,076	32	34,432	10/24/23	88	100	0	0	Overlay - AC Structural	8/1/17
634	1643	La Mirada Street Pvt	Kirkwood Avenue	South End	AC	E	2	125	32	5,800	11/6/17	76	73	14	13	Surface Treatment - Slurry Seal	1/1/02
635	1535	La Nae Street	North End	Del Valle Avenue	AAC	E	2	365	32	13,180	11/28/23	84	68	0	32	Overlay - AC Structural	10/1/08
635	1617	La Nae Street	North End	El Carmen Avenue	AAC	E	2	440	33	16,020	11/28/23	93	88	0	12	2 in overlay	8/31/07
636	1407	La Veta Avenue	Esplanade Street	Wrightwood Street	AAC	E	2	135	36	4,860	3/15/24	84	100	0	0	Overlay - AC Structural	1/31/16
636	510	La Veta Avenue	Cambridge Street	East End	AAC	E	2	475	25	12,625	2/21/24	86	47	0	53	Overlay - AC Structural	10/1/08
459	1453	La Veta Avenue (Frontage)	La Veta Avenue	East End	AC	E	2	665	32	21,280	4/3/24	55	100	0	0	Surface Treatment - Slurry Seal	1/1/91
637	971	La Veta Park Circle	Parker Street	La Veta Avenue	AC	E	2	1,105	36	39,780	3/12/24	31	9	82	9	Surface Treatment - Slurry Seal	1/1/04
638	1027	Lael Drive	California Street	East End	AC	E	2	545	32	17,440	2/23/24	59	23	58	19	Surface Treatment - Slurry Seal	8/1/09
639	2647	Laguna Court	Sierra Vista Drive	West End	AC	E	2	545	32	18,940	11/20/23	94	100	0	0	Surface Treatment - Slurry Seal	6/1/20
640	2570	Lake Drive	West End	Cambridge Street	AC	E	2	635	30	19,050	1/31/01	100	0	0	0	New Construction - Initial	1/1/80
641	1948	Lake Hill Drive	West End	Villa Real Drive	AAC	E	2	640	32	21,980	12/5/23	83	33	51	16	Overlay - AC Structural	1/1/04
642	2104	Lake Mead Avenue	North End	Smokey Avenue	AAC	E	2	275	32	10,300	11/16/23	86	100	0	0	Overlay - AC Structural	1/1/18
643	1385	Lakeside Avenue	Morningside Street	East End	AAC	E	2	325	31	11,575	1/3/24	87	78	17	5	Overlay - AC Structural	1/31/16
643	1387	Lakeside Avenue	Fern Street	East End	AC	E	2	1,000	32	33,800	1/3/24	62	100	0	0	Surface Treatment - Slurry Seal	1/1/02
643	1991	Lakeside Avenue	Sycamore Street	East End	AAC	E	2	415	32	14,780	11/29/23	95	100	0	0	Overlay - AC Structural	1/1/21
646	699	Larkspur Drive	Flower Street	Poinsettia Drive	AC	E	2	715	32	22,880	3/7/24	62	31	68	1	Surface Treatment - Slurry Seal	1/1/04
647	1434	Larkstone Drive	Laurinda Lane	Prospect Street	AAC	E	2	1,140	31	34,968	2/22/24	87	100	0	0	2 in overlay	8/28/07
647	1435	Larkstone Drive	Yorba Street	Laurinda Lane	AAC	E	2	1,400	31	42,966	2/22/24	78	57	37	6	2 in overlay	8/28/07
647	1442	Larkstone Drive	Breezy Way	East End	AC	E	2	125	32	5,500	2/22/24	81	97	0	3	Surface Treatment - Slurry Seal	1/1/02
647	1636	Larkstone Drive	West End	Schug Street	AC	E	2	340	36	13,340	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
647	1638	Larkstone Drive	Earlham Street	East End	AC	E	2	135	32	5,820	2/20/24	82	72	0	28	Reconstruct with AC	1/31/16
647	1661	Larkstone Drive	135' w/o Woodland Street	Woodland Street	AC	E	2	135	33	4,455	1/26/24	80	100	0	0	New Construction - Initial	1/1/80
647	1662	Larkstone Drive	Woodland Street	East End	AAC	E	2	135	33	5,555	1/26/24	84	100	0	0	Overlay - AC Structural	12/14/06

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
649	1972	Lassen Boulevard	North End	Mabury Avenue	AC	E	2	1,320	42	56,940	11/14/23	80	53	47	0	Surface Treatment - Slurry Seal	10/10/19
650	1516	Laurel Drive	North End	Collins Avenue	AAC	E	2	615	32	19,680	2/8/24	90	95	0	5	Grinding (Localized)	12/14/06
651	1454	Laurinda Lane	La Veta Avenue	Stearns Dr	AC	E	2	2,295	31	71,145	2/22/24	85	77	0	23	New Construction - Initial	1/1/80
651	1457	Laurinda Lane	Stearns Avenue	Fairhaven Avenue	AC	E	2	295	31	9,145	2/22/24	84	36	0	64	Surface Treatment - Slurry Seal	1/1/91
651	1474	Laurinda Lane	Ruth Place	La Veta Avenue	AC	E	2	405	32	12,768	2/14/24	90	98	0	2	Surface Treatment - Slurry Seal	1/1/92
657	1606	Lemon Creek Circle	West End	Willow Springs Road	AC	E	2	230	32	8,860	10/19/23	79	41	59	0	Surface Treatment - Slurry Seal	1/1/18
659	2216	Lemon Street	Hoover Avenue	Collins Avenue	AAC	I	2	1,860	36	66,960	2/15/24	82	43	33	24	Overlay - AC Structural	9/1/09
659	2396	Lemon Street	Chapman Avenue	Almond Avenue	PCC	E	2	610	40	24,400	11/14/17	70	19	37	44	New Construction - Initial	1/1/80
659	2402	Lemon Street	Maple Avenue	Palm Avenue	PCC	E	2	625	40	25,000	8/28/24	49	18	73	9	New Construction - Initial	1/1/80
659	773A	Lemon Street	Walnut Avenue	Sycamore Avenue	AAC	E	2	656	36	23,616	3/11/24	97	73	0	27	Overlay - AC Structural	6/1/21
659	773B	Lemon Street	Sycamore Avenue	Palm Avenue	AC	E	2	652	36	23,472	3/11/24	80	46	52	2	New Construction - Initial	1/1/80
659	774	Lemon Street	Mayfair Avenue	Walnut Avenue	AAC	E	2	1,480	36	53,280	2/15/24	78	100	0	0	Overlay - AC Structural	1/1/99
659	775	Lemon Street	Collins Avenue	Mayfair Avenue	AAC	E	2	1,105	37	40,885	2/15/24	72	80	20	0	Overlay - AC Structural	1/1/99
659	959	Lemon Street	Palmyra Avenue	La Veta Avenue	AC	E	2	1,275	36	45,900	3/5/24	63	89	11	0	New Construction - Initial	1/1/80
659	960	Lemon Street	Almond Avenue	Palmyra Avenue	AC	E	2	625	36	22,500	3/13/24	64	78	16	6	New Construction - Initial	1/1/80
660	2232	Leslie Way	Taft Avenue	Levers Place	AC	I	2	685	36	24,660	3/8/24	56	39	61	0	Surface Treatment - Slurry Seal	1/1/94
661	788	Lester Drive	Maple Avenue	Chapman Avenue	AC	E	2	605	34	20,570	3/4/24	83	84	16	0	New Construction - Initial	1/1/80
662	2233	Levers Place	Leslie Way	O'Donnell Way	AC	I	2	555	44	24,420	3/8/24	54	53	40	7	Surface Treatment - Slurry Seal	1/1/94
663	2322	Lewis Street	North End	El Prado Avenue	AC	E	2	420	36	16,920	3/27/24	46	39	61	0	Surface Treatment - Slurry Seal	1/1/95
663	2324	Lewis Street	Lewis Street	South End	AC	E	2	650	36	22,600	3/27/24	52	33	48	19	Surface Treatment - Slurry Seal	1/1/95
663	3443	Lewis Street	Windes Dr	East End	AC	E	2	779	25	15,170	11/14/23	86	79	0	21	New Construction - Initial	1/1/80
664	1742	Lexington Avenue	Cannon Street	Williamsburg Street	AAC	E	2	185	32	5,920	11/21/23	80	100	0	0	Overlay - AC Structural	1/1/02
665	1413	Liberty Way	North End	Justice Circle	AAC	E	2	580	32	21,060	2/20/24	82	43	0	57	2 in overlay	8/1/09
666	709	Lilac Lane	Orchard Avenue	Culver Avenue	AC	E	2	350	32	11,200	3/5/24	100	100	0	0	Surface Treatment - Slurry Seal	1/1/04
667	2226	Lime Street	Briardale Avenue	Taft Avenue	AAC	E	2	375	44	16,500	3/18/24	69	81	11	8	Overlay - AC Structural	1/1/99
667	2259	Lime Street	North End	Grove Avenue	AAC	I	2	170	44	8,630	3/11/24	78	62	38	0	Overlay - AC Structural	12/12/12
667	2270	Lime Street	Palm Avenue	Maple Avenue	AAC	E	2	615	33	20,295	3/4/24	65	74	0	26	Surface Reconstruction - AC	1/1/91
667	2271	Lime Street	Palm Avenue	Sycamore Avenue	AC	E	2	500	32	16,000	2/1/24	83	100	0	0	New Construction - Initial	1/1/80
667	2920	Lime Street	Sycarmore Avenue	North End	AC	E	2	143	24	4,182	8/28/24	17	37	56	7	New Construction - Initial	1/1/80
667	798	Lime Street	North End	Palmyra Avenue	AC	E	2	325	32	10,400	3/29/24	81	41	45	14	Surface Treatment - Slurry Seal	1/1/04
667	949	Lime Street	Chapman Avenue	Almond Avenue	AC	E	2	600	32	19,200	3/13/24	89	68	0	32	Surface Treatment - Slurry Seal	1/1/04
669	1056	Lincoln Street	Adams Avenue	Locust Avenue	AAC	E	2	905	32	28,960	2/9/24	94	84	0	16	Overlay - AC Structural	1/1/04
669	1057	Lincoln Street	North End	Adams Avenue	AAC	E	2	405	32	12,960	2/9/24	91	100	0	0	Overlay - AC Structural	1/1/04
669	1079	Lincoln Street	Briardale Avenue	Taft Avenue	AAC	E	2	505	31	15,655	2/27/24	99	100	0	0	Overlay - AC Structural	6/1/21
669	1111	Lincoln Street	Oakmont Avenue	Madison Avenue	AAC	E	2	1,440	31	44,640	2/2/24	90	100	0	0	Overlay - AC Structural	1/1/03
669	1112	Lincoln Street	Madison Avenue	Walnut Avenue	AAC	E	2	270	31	8,370	2/2/24	75	37	63	0	Overlay - AC Structural	1/1/03
669	1121	Lincoln Street	Walnut Avenue	Palm Avenue	AC	E	2	1,265	32	40,480	2/27/24	60	31	64	5	Surface Treatment - Chip Seal	12/13/06
669	1131	Lincoln Street	Collins Avenue	Oakmont Avenue	AAC	E	2	760	31	23,560	2/2/24	91	100	0	0	Overlay - AC Structural	1/1/03
669	1922	Lincoln Street	Meats Avenue	Grove Avenue	AAC	E	2	890	36	32,040	3/4/24	87	37	62	1	Overlay - AC Structural	1/1/04
669	2111	Lincoln Street	North End	Briardale Avenue	AAC	E	2	760	31	23,560	2/27/24	98	57	0	43	Overlay - AC Structural	6/1/21
669	2175	Lincoln Street	Locust Avenue	Collins Avenue	AAC	E	2	665	37	24,605	2/9/24	93	100	0	0	Overlay - AC Structural	1/1/04
669	983	Lincoln Street	Champman Avenue	Palmyra Avenue	AC	E	2	1,275	32	40,800	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
670	1734	Linda Vista Street	Santiago Canyon Road	Elsinore Avenue	AC	E	2	755	32	23,776	3/22/24	100	0	0	0	Mill and Overlay	3/3/22
670	1735	Linda Vista Street	Elsinore Avenue	Muir Drive	AC	E	2	1,075	32	34,900	11/2/23	95	100	0	0	Mill and Overlay	3/3/22
671	1073	Lindenholtz Street	Palmdale Avenue	Taft Avenue	AAC	E	2	120	32	3,840	2/27/24	89	100	0	0	Overlay - AC Structural	1/1/19
671	1825	Lindenholtz Street	Del Mar Avenue	Grove Avenue	AC	E	2	235	32	7,520	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
671	1826	Lindenholtz Street	North End	Del Mar Avenue	AC	E	2	300	32	9,600	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
671	2114	Lindenholtz Street	Buckeywood Avenue	South End	AC	E	2	270	33	8,910	2/27/24	100	0	0	100	Overlay-Rubber Hot Mix	2/1/24
671	2347	Lindenholtz Street	North End	Palmdale Avenue	AAC	E	2	200	32	6,400	2/27/24	98	100	0	0	Overlay - AC Structural	1/1/19
672	2160	Lisa Place	North End	Heim Avenue	AAC	E	2	80	32	2,560	2/28/24	100	0	0	0	Overlay - AC Structural	8/2/21
673	1613	Little Lane	Bond Avenue	Charter Oak Drive	AAC	E	2	125	33	3,927	11/28/23	83	100	0	0	2 in overlay	8/31/07
674	2262	Little Main Street	Main Street	Chapman Avenue	AC	E	2	450	32	14,400	4/10/24	80	80	12	8	Surface Treatment - Slurry Seal	1/1/95
675	1583	Live Oak Drive	West End	Deep Spring Road	AC	E	2	265	32	9,980	10/17/23	85	100	0	0	Surface Treatment - Slurry Seal	1/1/18
677	1051	Locust Avenue	Lincoln Street	Shattuck Place	AAC	E	2	380	32	12,160	2/9/24	93	100	0	0	Overlay - AC Structural	1/1/02
677	1055	Locust Avenue	Glassell Street	Grand Street	AAC	E	2	615	31	19,065	3/5/24	83	25	0	75	Overlay - AC Structural	1/1/04
677	1060	Locust Avenue	California Street	East End	AAC	E	2	590	31	19,390	2/9/24	90	100	0	0	Overlay - AC Structural	12/14/06
677	1501	Locust Avenue	Sacramento Street	Handy Street	AAC	E	2	1,150	31	35,650	2/8/24	84	85	15	0	2 in overlay	8/29/07
677	1502	Locust Avenue	Handy Street	Hart Street	AAC	E	2	840	31	26,040	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
677	1512	Locust Avenue	Morgan Street	105 e/o Mallard Street	AAC	E	2	105	32	3,360	3/6/24	81	100	0	0	Overlay - AC Structural	8/1/17

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
677	1513	Locust Avenue	Morgan Street	Mallard Street	AAC	E	2	395	32	12,640	3/6/24	82	100	0	0	Overlay - AC Structural	8/1/17
678	2668	Loftwood	Kendra Drive	West End	AC	E	2	1,172	32	39,004	10/2/17	91	64	36	0	New Construction - Initial	1/1/80
679	15590	Lolita Street	Santiago Canyon Road	528' e/o Santiago Canyon Road	AC	E	2	528	20	10,560	3/22/24	69	60	40	0	New Construction - Initial	1/1/80
681	1129	Lomita Avenue	California Street	Lincoln Street	AC	E	2	630	31	19,530	2/2/24	85	61	39	0	Surface Treatment - Slurry Seal	1/1/03
681	1130	Lomita Avenue	Maplewood Street	California Street	AC	E	2	620	31	19,220	2/2/24	79	58	42	0	Surface Treatment - Slurry Seal	1/1/03
681	1157	Lomita Avenue	Glassell Street	Grand Street	AC	E	2	615	33	20,295	3/13/24	55	33	55	12	Surface Treatment - Slurry Seal	1/1/02
681	1158	Lomita Avenue	Grand Street	Shaffer Street	AC	E	2	625	32	20,000	3/11/24	77	33	0	67	Surface Treatment - Slurry Seal	1/1/02
681	1159	Lomita Avenue	Shaffer Street	Cambridge Street	AC	E	2	1,305	32	41,760	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
681	1269	Lomita Avenue	Tustin Street	Highland Street	AC	E	2	980	31	30,380	2/27/24	85	85	0	15	Surface Treatment - Slurry Seal	1/1/91
681	1316	Lomita Avenue	Adelle Street	Kathleen Street	AC	E	2	220	32	7,040	3/20/24	73	58	42	0	Surface Treatment - Slurry Seal	1/1/02
681	1396	Lomita Avenue	Hart Street	East End	AAC	E	2	695	31	21,545	2/13/24	100	0	0	100	Overlay-Rubber Hot Mix	1/3/23
684	2045	Longhurst Street	Fitzgerald Avenue	Hillsborough Avenue	AC	E	2	145	32	4,640	12/4/23	90	100	0	0	Surface Treatment - Slurry Seal	8/1/17
684	2046	Longhurst Street	North End	Fitzgerald Avenue	AC	E	2	255	32	8,160	12/4/23	87	100	0	0	Surface Treatment - Slurry Seal	8/1/17
685	1846	Longridge Drive	Meats Avenue	Meadowridge Road	AC	E	2	440	32	14,080	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
685	2070	Longridge Drive	Meadowridge Road	Westridge Drive	AC	E	2	1,595	32	51,040	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
685	2071	Longridge Drive	Westridge Drive	Rockridge Place	AC	E	2	480	32	15,860	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
687	2477	Loredo Avenue	Shadow Pines Road	White Oak Ridge	AC	E	2	120	36	4,064	10/17/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
687	2620	Loredo Avenue	White Oak Ridge	Fairfield Lane	AC	E	2	90	32	2,880	10/17/23	86	100	0	0	Surface Treatment - Slurry Seal	3/21/22
688	1437	Loretta Drive	North End	Romelle Avenue	AC	E	2	400	32	12,800	2/22/24	82	73	0	27	New Construction - Initial	1/1/80
688	1494	Loretta Drive	Burly Avenue	Palmyra Avenue	AAC	E	2	660	32	20,896	2/14/24	87	75	0	25	2 in overlay	8/1/09
688	1495	Loretta Drive	Palmyra Avenue	Dorothy Drive	AAC	E	2	640	32	20,480	2/14/24	83	99	0	1	2 in overlay	8/1/09
688	1496	Loretta Drive	505' n/o Larkstone Drive	Larkstone Drive	AC	E	2	505	31	15,469	2/22/24	83	53	0	47	New Construction - Initial	1/1/80
688	15605	Loretta Drive	158' s/o Delia Lane	686' n/o La Veta Avenue	AC	E	2	1,373	33	44,715	2/14/24	79	58	4	38	Surface Treatment - Slurry Seal	1/1/96
689	1738	Los Altos Place	Muir Drive	South End	AC	E	2	190	32	7,180	11/2/23	95	100	0	0	Surface Treatment - Slurry Seal	1/1/04
690	1898	Los Arboles Street	Los Timbres Street	Los Mequites Street	AAC	E	2	290	33	10,070	3/6/24	99	100	0	0	Overlay - AC Structural	3/3/22
691	1899	Los Mequites Street	Los Arboles Street	South End	AAC	E	2	220	33	9,808	3/6/24	97	100	0	0	Overlay - AC Structural	3/3/22
692	1897	Los Timbres Street	Chapman Avenue	South End	AAC	E	2	585	36	22,858	3/6/24	99	100	0	0	Overlay - AC Structural	3/3/22
693	712	Louise Place	Almond Ave	South End	AC	E	2	180	32	6,810	3/12/24	36	46	53	1	Surface Treatment - Slurry Seal	1/1/04
695	15674	Lowry Lane	North End	Delia Lane	AC	E	2	213	32	7,916	2/22/24	80	100	0	0	New Construction - Initial	1/1/80
696	1445	Lowry Street	North End	Lowry Street	AC	E	2	1,120	32	37,640	2/22/24	84	96	0	4	Surface Treatment - Slurry Seal	1/1/95
696	1446	Lowry Street	110' w/o Lowry Street	Fairhaven Avenue	AC	E	2	235	32	7,264	2/22/24	82	79	0	21	New Construction - Initial	1/1/80
697	1124	Lynn Drive	Collins Avenue	South End	AC	E	2	300	31	10,900	2/2/24	80	90	10	0	Surface Treatment - Slurry Seal	1/1/03
698	1632	Lynwood Avenue	Chipwood	East End	AC	E	2	485	32	17,285	1/26/24	100	0	0	0	Overlay-Rubber Hot Mix	1/19/23
699	2088	Mabury Avenue	Mountain Avenue	Yellowstone Boulevard	AAC	E	2	812	36	29,232	10/31/23	84	72	0	28	Overlay - AC Structural	8/1/16
699	2089	Mabury Avenue	Yellowstone Boulevard	Orange Park Boulevard	AAC	E	2	1,580	36	56,880	10/31/23	87	100	0	0	Overlay - AC Structural	8/1/17
700	1113	Madison Avenue	Maplewood Street	California Street	AC	E	2	490	31	15,190	2/2/24	60	57	43	0	Surface Treatment - Slurry Seal	1/1/03
700	1114	Madison Avenue	California Street	Lincoln Avenue	AC	E	2	610	31	18,910	2/2/24	85	100	0	0	Surface Treatment - Slurry Seal	1/1/03
700	1285	Madison Avenue	West End	Wayfield Street	AC	E	2	450	32	14,400	2/26/24	86	26	0	74	Surface Reconstruction - AC	1/1/04
700	1307	Madison Avenue	Sacramento Street	East End	AC	E	2	200	31	7,250	2/13/24	75	65	0	35	Reconstruction	12/12/12
700	1322	Madison Avenue	Milford Street	Clinton Street	AC	E	2	290	31	8,990	2/13/24	84	100	0	0	New Construction - Initial	4/3/12
700	1339	Madison Avenue	Malena Street	East End	AC	E	2	415	32	14,330	2/13/24	71	48	0	52	Surface Treatment - Slurry Seal	1/1/98
701	2635	Magdalena Drive	Serrano Avenue	San Lorenzo Court	AC	E	2	2,315	32	74,830	11/20/23	89	99	0	1	New Construction - Initial	1/1/80
702	1035	Magnolia Street	Sycamore Avenue	Palm Avenue	AC	E	2	615	27	16,605	2/23/24	91	95	0	5	New Construction - Initial	1/1/80
702	1036	Magnolia Street	Palm Avenue	Maple Avenue	AC	E	2	615	34	20,910	2/21/24	89	33	0	67	Surface Reconstruction - AC	1/1/02
704	1793	Mahogany Street	Canyon View Avenue	Timberland Avenue	AC	E	2	135	36	4,644	10/19/23	87	100	0	0	Surface Treatment - Slurry Seal	1/1/18
706	1273	Malena Drive	North End	Chapman Avenue	AC	E	2	1,090	31	35,290	3/4/24	76	100	0	0	Surface Treatment - Slurry Seal	8/30/22
706	1475	Malena Drive	Ruth Place	La Veta Avenue	AAC	E	2	450	32	14,400	2/14/24	80	99	0	1	Overlay - AC Structural	1/1/02
707	1337	Malena Street	Orange Grove Avenue	Walnut Avenue	AC	E	2	540	32	17,280	2/13/24	66	60	0	40	Surface Treatment - Slurry Seal	1/1/98
707	1489	Malena Street	Burly Avenue	Washington Avenue	AAC	E	2	390	32	13,980	2/14/24	88	93	0	7	2 in overlay	8/1/09
707	2166	Malena Street	Chapman Avenue	Almond Avenue	AAC	I	2	455	32	14,560	1/26/24	93	68	0	32	2 in overlay	8/1/09
707	2678	Malena Street	Larkstone Drive	115' s/o Larkstone Drive	AC	E	2	115	32	3,680	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
709	1401	Mallard Street	Collins Avenue	South End	AC	E	2	1,205	32	38,560	3/15/24	71	100	0	0	Surface Treatment - Slurry Seal	1/1/02
709	1529	Mallard Street	Jackson Avenue	Monroe Avenue	AAC	E	2	250	32	8,000	3/6/24	83	95	0	5	Overlay - AC Structural	8/1/17
709	1530	Mallard Street	Monroe Avenue	Collins Avenue	AAC	E	2	860	32	27,520	3/6/24	83	85	15	0	Overlay - AC Structural	8/1/17
710	1974	Mammoth Circle	Teton Avenue	East End	AC	E	2	455	32	16,810	10/31/23	88	66	34	0	Surface Treatment - Slurry Seal	10/10/19
711	2844	Manchester Avenue	City Boulevard West	Chapman Avenue	AAC	I	5	1,225	92	112,700	3/27/24	74	29	56	15	Overlay - AC Structural	1/1/98
714	2214	Manzanita Street	North End	Katella Avenue	AAC	E	2	830	44	38,020	3/8/24	87	87	0	13	Overlay - AC Structural	7/1/08
715	1025	Maple Avenue	Cambridge Street	California Street	AAC	E	2	1,285	40	51,400	2/21/24	88	59	38	3	Overlay - AC Structural	7/1/09
715	1026	Maple Avenue	California Street	Shattuck Place	AC	E	2	865	38	32,870	2/21/24	77	71	29	0	Surface Treatment - Slurry Seal	8/1/09

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
715	1627	Maple Avenue	Prospect Street	Olympia Street	AAC	E	2	700	33	23,600	1/2/24	76	27	0	73	Overlay - AC Structural	10/10/19
715	2201	Maple Avenue	Atchison Street	Lemon Street	AAC	I	2	515	40	20,600	3/14/24	96	100	0	0	Overlay - AC Structural	1/1/21
715	2394	Maple Avenue	Glassell Street	Shaffer Street	PCC	I	2	1,270	40	50,800	8/28/24	52	16	67	17	New Construction - Initial	1/1/80
715	2403	Maple Avenue	Lemon Street	Glassell Street	PCC	I	2	665	40	26,600	8/28/24	93	64	36	0	Complete Reconstruction - PCC	10/1/13
715	2412	Maple Avenue	Shaffer Street	Cambridge Street	PCC	E	2	1,320	40	52,800	8/28/24	50	16	57	27	New Construction - Initial	1/1/80
715	2853	Maple Avenue	Eckhoff Street	Feldner Road	AAC	E	2	1,315	36	47,340	3/14/24	66	47	53	0	Surface Reconstruction - AC	5/1/09
715	746	Maple Avenue	Bitterbush Street	Eckhoff Street	AC	E	2	905	36	32,580	3/14/24	67	25	69	6	Surface Treatment - Slurry Seal	1/1/97
715	747	Maple Avenue	Donneybrooke Street	Bitterbush Street	AC	E	2	260	36	9,360	8/28/24	93	100	0	0	Surface Treatment - Slurry Seal	1/1/97
715	764	Maple Avenue	Batavia Street	East End	AC	E	2	1,165	36	41,940	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
715	765	Maple Avenue	Feldner Road	Main Street	AAC	E	2	1,185	37	43,845	3/12/24	53	28	72	0	Surface Reconstruction - AC	5/1/09
715	766	Maple Avenue	Main Street	Lime Street	AC	E	2	730	32	23,360	3/12/24	86	83	17	0	New Construction - Initial	1/1/80
715	767	Maple Avenue	Lime Street	Batavia Street	AC	E	2	645	36	23,220	3/12/24	80	79	12	9	New Construction - Initial	1/1/80
717	1857	Maple Grove Road	Feather Hill Lane	Shady Forest Lane	AAC	E	2	520	32	18,140	12/5/23	95	100	0	0	Surface Treatment - Slurry Seal	11/1/08
718	3417	Maple Tree Street	North End	Nohl Ranch Road	AC	E	2	1,135	32	36,320	1/4/24	94	90	0	10	Surface Treatment - Slurry Seal	5/27/24
719	1030	Maplewood Place	Maplewood Street	East End	AC	E	2	210	31	7,510	2/21/24	79	35	65	0	Surface Treatment - Slurry Seal	8/1/09
719	2115	Maplewood Place	Buckeyewood Avenue	South End	AC	E	2	270	33	8,910	2/27/24	100	0	0	100	Overlay-Rubber Hot Mix	2/1/24
719	2139A	Maplewood Place	North End	Vista Del Playa (North)	AAC	E	2	306	32	9,792	2/16/24	83	100	0	0	Overlay - AC Structural	1/1/02
719	2139B	Maplewood Place	Vista Del Playa (North)	Vista Del Playa (South)	AAC	E	2	129	32	4,128	2/16/24	80	100	0	0	Overlay - AC Structural	1/1/02
720	1029	Maplewood Street	Maple Avenue	Maplewood Place	AC	E	2	315	31	9,765	2/21/24	93	100	0	0	Surface Treatment - Slurry Seal	8/1/09
720	1034	Maplewood Street	Sycamore Avenue	South End	AAC	E	2	425	32	13,600	2/23/24	92	84	0	16	Overlay - AC Structural	10/1/08
720	1037	Maplewood Street	Palm Avenue	Maple Avenue	AAC	E	2	610	34	20,740	2/21/24	75	12	57	31	Overlay - AC Structural	7/1/09
720	1083	Maplewood Street	North End	Palmdale Avenue	AAC	E	2	200	32	6,400	2/27/24	97	100	0	0	Overlay - AC Structural	1/1/19
720	1125	Maplewood Street	Rose Avenue	Walnut Avenue	AC	E	2	805	31	24,955	2/2/24	56	55	45	0	Surface Treatment - Slurry Seal	1/1/02
720	1126	Maplewood Street	Everett Place	Rose Avenue	AC	E	2	290	32	9,280	2/2/24	77	100	0	0	Surface Treatment - Slurry Seal	1/1/03
720	1127	Maplewood Street	Mayfair Avenue	Everett Place	AC	E	2	270	32	8,640	2/2/24	60	43	57	0	Surface Treatment - Slurry Seal	1/1/03
720	1128	Maplewood Street	Collins Avenue	Mayfair Avenue	AC	E	2	1,120	32	35,840	2/2/24	67	40	60	0	Surface Treatment - Slurry Seal	1/1/03
720	1911	Maplewood Street	North End	Del Mar Avenue	AC	E	2	300	32	9,600	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
720	946	Maplewood Street	Taft Avenue	Chestnut Avenue	AC	E	2	710	31	22,010	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
720	997	Maplewood Street	Almond Avenue	Washington Avenue	AAC	E	2	290	30	8,700	2/21/24	68	74	26	0	Overlay - AC Structural	10/1/08
721	1007	Mardell Avenue	Cambridge Street	Gardner Street	AAC	E	2	570	32	18,240	2/21/24	85	40	0	60	Overlay - AC Structural	10/1/08
721	1008	Mardell Avenue	Gardner Street	East End	AAC	E	2	605	31	19,905	2/20/24	93	84	0	16	Overlay - AC Structural	10/1/08
722	713	Marie Place	North End	Larkspur Drive	AC	E	2	205	32	7,610	3/12/24	71	38	61	1	Surface Treatment - Slurry Seal	1/1/04
723	804	Marietta Avenue	Clark Street	East End	AC	E	2	110	32	4,570	3/12/24	73	76	24	0	Surface Treatment - Slurry Seal	1/1/04
724	805	Marietta Place	West End	Cypress Street	AC	E	2	145	23	3,335	4/10/24	81	100	0	0	New Construction - Initial	1/1/80
727	2238	Marks Way	Chapman Avenue	Almond Avenue	AC	E	2	605	31	18,755	3/5/24	92	97	0	3	New Construction - Initial	4/3/12
728	1318	Markwood Street	Oakmont Avenue	Carie Avenue	AC	E	2	615	32	19,680	2/14/24	77	82	7	11	Surface Treatment - Slurry Seal	12/12/12
728	1325	Markwood Street	Carrie Avenue	Hamilton Avenue	AC	E	2	385	32	12,320	2/13/24	72	92	0	8	Surface Treatment - Slurry Seal	12/12/12
729	1410	Marmon Avenue	Esplanade Street	Hewes Street	AAC	E	2	1,335	34	45,390	2/23/24	70	52	43	5	Overlay - AC Structural	1/1/04
730	1076	Marquart Street	Candlewood Avenue	Concord Avenue	AAC	E	2	225	32	7,200	3/4/24	91	58	0	42	Surface Treatment - Slurry Seal	5/27/25
730	1085	Marquart Street	North End	Palmdale Avenue	AAC	E	2	200	32	6,400	2/27/24	98	100	0	0	Overlay - AC Structural	1/1/19
731	1294	Martha Avenue	West End	Sacramento Street	AAC	E	2	170	32	6,940	2/13/24	95	84	0	16	Overlay - AC Structural	10/10/19
732	1261	Martha Lane	Park Lane	East End	AAC	E	2	225	31	6,975	2/27/24	86	96	0	4	Surface Treatment - Slurry Seal	5/27/25
733	1817	Marywood Lane	Meadow Grove Road	Shadow Ridge Lane	AC	E	2	325	36	11,444	12/5/23	74	60	0	40	Surface Treatment - Slurry Seal	1/1/02
733	1818	Marywood Lane	Shadow Ridge Lane	Meats Avenue	AC	E	2	955	36	34,380	12/5/23	79	78	0	22	Surface Treatment - Slurry Seal	1/1/02
733	1946	Marywood Lane	West End	Villa Real Drive	AAC	E	2	935	26	25,810	12/5/23	80	70	30	0	Surface Treatment - Slurry Seal	11/1/08
733	1947	Marywood Lane	Villa Real Drive	Meadow Grove Road	AAC	E	2	815	36	28,828	12/5/23	81	54	2	44	Overlay - AC Structural	10/1/08
734	1106	Mayfair Avenue	Cambridge Street	California Street	AC	E	2	1,280	32	40,960	2/2/24	68	47	53	0	Surface Treatment - Slurry Seal	1/1/03
734	1107	Mayfair Avenue	California Street	Lincoln Avenue	AAC	E	2	625	31	19,375	2/2/24	86	67	0	33	Overlay - AC Structural	1/1/03
734	1156	Mayfair Avenue	Glassell Street	Shaffer Street	AAC	E	2	1,280	32	40,960	3/5/24	99	100	0	0	Overlay - AC Structural	6/1/21
734	1268	Mayfair Avenue	Tustin Street	Highland Street	AC	E	2	1,035	31	32,085	2/27/24	65	36	51	13	New Construction - Initial	1/1/80
734	1315	Mayfair Avenue	Adele Street	Morgan Street	AC	E	2	440	32	14,080	3/15/24	74	62	23	15	Surface Treatment - Slurry Seal	1/1/02
734	1320	Mayfair Avenue	Markwood Street	East End	AAC	E	2	90	40	3,600	2/14/24	86	97	0	3	Overlay - AC Structural	12/12/12
734	1343	Mayfair Avenue	Hart Street	East End	AC	E	2	690	31	22,440	2/13/24	100	0	0	100	Overlay-Rubber Hot Mix	1/3/23
734	1399	Mayfair Avenue	Handy Street	Elmwood Street	AC	E	2	520	32	16,640	2/13/24	68	76	0	24	New Construction - Initial	4/3/12
734	1400	Mayfair Avenue	Elmwood Street	Hart Street	AC	E	2	230	32	7,360	2/13/24	82	100	0	0	New Construction - Initial	4/3/12
734	2179	Mayfair Avenue	Lincoln Street	Tustin Street	AC	I	2	600	31	18,600	2/2/24	89	100	0	0	Surface Reconstruction - AC	1/1/03
734	2263	Mayfair Avenue	Lemon Street	Glassell Street	AC	E	2	620	31	19,220	2/15/24	84	65	35	0	Surface Treatment - Slurry Seal	1/1/03
735	812	McCoy Road	Almond Avenue	South End	AC	E	2	465	32	14,880	3/7/24	83	86	14	0	Surface Treatment - Slurry Seal	1/1/04
736	1844	McCrory Street	North End	Taft Avenue	AAC	E	2	390	32	13,980	1/3/24	77	83	0	17	Overlay - AC Structural	1/1/99

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
737	2164	McPherson Street	Spring Street	540' s/o Spring Street	AC	E	2	540	32	17,280	2/20/24	88	93	0	7	New Construction - Initial	1/1/80
737	2165	McPherson Street	540' s/o Spring Street	Chapman Avenue	AC	E	2	755	36	27,180	2/20/24	77	32	0	68	New Construction - Initial	1/1/80
738	1858	Meadow Grove Road	Marywood Lane	Feather Hill Drive	AAC	E	2	1,235	36	44,110	12/5/23	83	49	0	51	Overlay - AC Structural	1/1/02
738	3340	Meadow Grove Road	Ridgeway Road	Marywood Drive	AC	E	2	445	36	16,020	2/1/24	100	0	0	0	Mill and Overlay	2/1/24
739	1211	Meadowbrook Avenue	Hearthside Street	Ashwood Street	AAC	E	2	1,250	32	40,000	2/29/24	83	84	16	0	Surface Treatment - Slurry Seal	3/21/22
739	1213	Meadowbrook Avenue	Driftwood Street	Richland Street	AC	E	2	625	36	22,500	2/29/24	88	50	50	0	Surface Treatment - Slurry Seal	3/21/22
739	1238	Meadowbrook Avenue	Sunset Street	Baldwin Avenue	AAC	E	2	730	32	23,360	2/29/24	92	100	0	0	Overlay - AC Structural	10/1/08
740	1389	Meadowlark Place	Brookside Avenue	South End	AC	E	2	160	32	6,620	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
741	2074	Meadowridge Road	Longridge Drive	Summitridge Lane	AC	E	2	1,160	32	38,620	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
742	3195	Meads Avenue	Randall Street	Santiago Canyon	AC	E	1	1,474	15	22,110	10/25/23	67	56	35	9	New Construction - Initial	1/1/80
743	2249	Meats Avenue	Pacific Street	Glassell Street	AC	I	2	1,230	44	54,120	3/1/24	75	7	13	80	Surface Treatment - Slurry Seal	1/1/94
1353	3555	Meats Ave Frontage	Meats Avenue	End	AC	E	2	368	32	14,720	5/13/26	27	32	56	12	New Construction - Initial	5/12/26
746	2043	Meredith Street	Regency Avenue	Hillsborough Avenue	AC	E	2	1,280	28	35,615	12/4/23	86	76	24	0	Surface Treatment - Slurry Seal	8/1/17
747	1480	Merelet Lane	Craig Drive	North End	AAC	E	2	440	32	15,717	2/14/24	82	86	0	14	Overlay - AC Structural	10/1/07
748	2061	Meridian Street	Waterford Street	Oakhurst Avenue	AC	E	2	995	32	33,340	12/6/23	81	84	7	9	Surface Treatment - Slurry Seal	8/1/17
753	1859	Milbank Drive	Meadow Grove Road	South End	AAC	E	2	780	28	23,340	4/15/24	82	37	0	63	2 in overlay	8/1/09
751	1290	Milford Street	Walnut Avenue	Sycamore Avenue	AC	E	2	905	31	28,055	2/13/24	78	54	27	19	Surface Treatment - Slurry Seal	1/1/98
751	1291	Milford Street	Sycarmore Avenue	Sacramento Street	AC	E	2	1,185	31	36,735	2/13/24	86	79	0	21	Surface Treatment - Slurry Seal	1/1/02
751	1321	Milford Street	Oakmont Avenue	Walnut Avenue	AC	E	2	1,805	31	55,955	2/13/24	63	51	47	2	Surface Treatment - Slurry Seal	1/1/98
751	1379	Milford Street	North End	Chestnut Avenue	AC	E	2	135	32	5,420	3/1/24	78	51	40	9	Surface Treatment - Slurry Seal	1/1/98
751	1505	Milford Street	Locust Avenue	Collins Avenue	AAC	E	2	490	31	15,190	2/8/24	80	51	49	0	2 in overlay	8/31/07
751	1863	Milford Street	North End	Villa Vista Way	AAC	E	2	185	31	7,235	12/12/23	89	72	0	28	Overlay - AC Structural	1/1/18
751	2894	Milford Street	Milford Street	East End #1	AC	E	2	95	30	3,850	4/2/24	66	45	55	0	Surface Treatment - Slurry Seal	1/1/02
751	2916	Milford Street	Milford Street	East End #2	AC	E	2	95	30	3,850	4/2/24	62	45	55	0	Surface Treatment - Slurry Seal	1/1/02
751	2947	Milford Street	Milford Street	East End #3	AC	E	2	95	30	3,850	4/2/24	58	41	58	1	Surface Treatment - Slurry Seal	1/1/02
754	2146	Millbrae Street	Amber Avenue	Glendora Avenue	AC	E	2	470	32	15,040	2/28/24	73	43	56	1	Surface Treatment - Slurry Seal	1/1/04
755	700	Mills Drive	Flower Street	Poinsettia Drive	AC	E	2	735	32	23,520	3/7/24	90	64	0	36	Surface Treatment - Slurry Seal	1/1/04
755	703	Mills Drive	Alley Flower Street	Flower Street	AC	E	2	395	30	10,665	3/7/24	95	100	0	0	Surface Treatment - Slurry Seal	1/1/04
758	1391	Mockingbird Place	Brookside Avenue	South End	AC	E	2	170	32	6,940	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
758	1900	Mockingbird Place	North End	Hillside Avenue	AC	E	2	205	32	8,060	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
759	1744	Modoc Street	Taft Avenue	Shoshone Avenue	AAC	E	2	1,120	32	35,648	11/29/23	95	90	0	10	Overlay - AC Structural	1/1/21
760	3241	Monaco	Alexandria St	West End	AC	E	2	329	32	12,326	8/28/24	80	63	37	0	New Construction - Initial	1/1/80
760	3254	Monaco	West End	Apache Creek Road	AC	E	2	1,067	32	36,644	10/2/17	89	35	65	0	New Construction - Initial	1/1/80
761	1047	Monroe Avenue	California Street	Lincoln Street	AAC	E	2	855	31	26,505	2/9/24	86	69	31	0	Overlay - AC Structural	12/14/06
761	1071	Monroe Avenue	Grand Street	East End	AAC	E	2	375	31	12,725	3/5/24	84	69	0	31	Overlay - AC Structural	1/1/02
761	1072	Monroe Avenue	West End	Grand Street	AAC	E	2	280	32	10,060	3/5/24	84	100	0	0	Overlay - AC Structural	12/13/06
761	1089	Monroe Avenue	West End (near Harwood St)	East End	AAC	E	2	445	32	16,440	2/9/24	94	100	0	0	Overlay - AC Structural	1/1/04
761	1347	Monroe Avenue	Handy Street	Wanda Drive	AAC	E	2	1,475	31	45,725	2/8/24	85	84	16	0	Overlay - AC Structural	7/1/08
761	1348	Monroe Avenue	Sacramento Street	Handy Street	AAC	E	2	1,135	31	35,185	2/8/24	84	79	15	6	2 in overlay	8/29/07
761	1508	Monroe Avenue	West End (near Highland St)	East End	AC	E	2	510	30	15,300	3/6/24	64	26	59	15	New Construction - Initial	1/1/80
761	1511	Monroe Avenue	Morgan Street	Mallard Street	AAC	E	2	395	32	12,640	3/6/24	82	85	0	15	Overlay - AC Structural	8/1/17
762	1750	Montecito Place	North End	Patria Court	AC	E	2	405	32	14,758	11/2/23	88	100	0	0	Surface Treatment - Slurry Seal	3/21/22
763	1028	Monterey Road	Maple Avenue	Chapman Avenue	AAC	E	2	610	38	23,180	2/21/24	89	98	0	2	Overlay - AC Structural	7/1/09
764	2362	Montgomery Place	Hewes Street	East End	AC	E	2	345	34	11,730	2/20/24	86	45	0	55	Surface Treatment - Slurry Seal	1/1/91
765	2189	Montgomery Street	Culver Avenue	La Veta Avenue	AAC	E	1	615	16	9,840	8/28/24	83	100	0	0	2 in overlay	10/1/13
766	2398	Moreland Drive	Shaffer Street	Harwood Street	PCC	E	2	620	17	10,540	8/28/24	89	63	30	7	New Construction - Initial	1/1/80
767	1394	Morgan Street	Collins Avenue	Mayfair Avenue	AC	E	2	1,170	36	42,120	3/20/24	62	47	39	14	Surface Treatment - Slurry Seal	1/1/04
767	1526	Morgan Street	Monroe Avenue	Collins Avenue	AAC	E	2	850	32	27,200	3/6/24	87	96	0	4	Overlay - AC Structural	8/1/17
767	1527	Morgan Street	Jackson Avenue	Monroe Avenue	AAC	E	2	290	32	9,280	3/6/24	85	100	0	0	Overlay - AC Structural	8/1/17
768	1828	Mori Lane	Meats Avenue	South End	AC	E	2	470	32	16,389	12/13/23	90	100	0	0	Surface Treatment - Slurry Seal	8/1/16
768	1849	Mori Lane	North End	Riding Way	AAC	E	2	180	32	7,260	12/12/23	95	100	0	0	Overlay - AC Structural	8/30/21
769	1590	Morning Glory Way	White Oak Ridge	Willow Springs Road	AC	E	2	985	32	32,270	10/19/23	67	32	55	13	Surface Treatment - Slurry Seal	1/1/18
770	1380	Morningside Street	North End	Chestnut Avenue	AC	E	2	130	32	5,260	1/3/24	81	56	29	15	Surface Treatment - Slurry Seal	1/1/98
770	1906	Morningside Street	Taft Avenue	Parkside Avenue	AAC	E	2	1,315	31	42,265	1/3/24	88	68	0	32	Overlay - AC Structural	1/31/16
771	2085	Mount McKinley Boulevard	Serrano Avenue	Crater Lake Avenue	AAC	E	2	525	30	17,750	11/16/23	83	41	59	0	Overlay - AC Structural	1/1/03
771	2087	Mount McKinley Boulevard	Crater Lake Avenue	Mountain Avenue	AAC	E	2	1,115	36	40,140	10/31/23	91	74	0	26	Overlay - AC Structural	8/1/17
772	1262	Mount Vernon Avenue	Wayfield Street	525' e/o Wayfield Street	AAC	E	2	525	31	16,275	2/27/24	91	62	30	8	Surface Treatment - Slurry Seal	5/27/25
772	1293	Mount Vernon Avenue	West End	Sacramento Street	AAC	E	2	165	32	6,330	2/13/24	87	94	0	6	Overlay - AC Structural	10/10/19
773	1978	Mountain Avenue	Mt. McKinley Boulevard	Mabury Avenue	AC	E	2	715	32	22,496	10/31/23	87	96	0	4	Surface Treatment - Slurry Seal	10/10/19

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
773	1979	Mountain Avenue	Mt. McKinley Boulevard	South End	AC	E	2	764	32	25,948	10/31/23	85	63	37	0	Surface Treatment - Slurry Seal	10/10/19
775	1730	Muir Drive	Palo Loma Drive	North End	AAC	E	2	990	32	33,180	11/16/23	78	100	0	0	Overlay - AC Structural	1/31/16
775	1736	Muir Drive	Linda Vista Street	South End	AC	E	2	745	36	26,995	11/2/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
776	1795	Mulberry Street	Timberland Avenue	Sprucewood Avenue	AC	E	2	495	32	15,840	10/24/23	89	100	0	0	Surface Treatment - Slurry Seal	1/1/18
776	1796	Mulberry Street	Sprucewood Avenue	Santa Cruz Ave	AC	E	2	271	32	8,480	10/25/23	88	100	0	0	Surface Treatment - Slurry Seal	1/1/18
778	2001	Mustang Avenue	Clydesdale Avenue	Randall Street	AAC	E	2	1,185	32	38,670	10/25/23	95	100	0	0	Overlay - AC Structural	1/1/21
779	1920	Namuria Street	North End	Grove Avenue	AAC	E	2	170	33	5,610	2/27/24	100	100	0	0	Overlay - AC Structural	6/1/19
783	1716	Navarro Place	San Juan Drive	South End	AC	E	2	110	36	5,460	11/16/23	74	100	0	0	Reconstruct with AC	1/31/16
783	1731	Navarro Place	Elsinore Avenue	Muir Place	AAC	E	2	720	32	22,608	11/16/23	84	83	17	0	Overlay - AC Structural	1/31/16
783	1752	Navarro Place	North End	Valencia Drive	AAC	E	2	180	32	7,260	11/16/23	75	100	0	0	Overlay - AC Structural	1/31/16
784	2258	Neville Street	Blue Ridge Avenue	Taft Avenue	ST	I	2	1,115	44	49,060	3/8/24	13	7	93	0	Surface Treatment - Micro Surfacing	8/31/07
785	2056	Newgate Way	Meats Avenue	Waterford Street	AC	E	2	170	36	5,820	4/15/24	92	100	0	0	Surface Treatment - Slurry Seal	8/1/17
785	2081	Newgate Way	Glen Canyon Road	Meats Avenue	AC	E	2	610	36	21,960	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
786	1650	Newhaven Drive	Kirkwood Avenue	Fairhaven Avenue	AAC	E	2	495	32	15,456	2/20/24	80	69	0	31	Overlay - AC Structural	1/31/16
788	2206	Nicholas Avenue	Batavia Street	Hartition Street	AC	I	2	1,075	34	36,550	3/8/24	21	12	88	0	Surface Treatment - Slurry Seal	1/1/95
1321	3193	Nicky Way	Santiago Canyon Road	506' s/o Santiago Canyon Road	AC	E	2	506	20	10,120	3/22/24	58	27	60	13	New Construction - Initial	1/1/80
789	1549	Noble Street	Walnut Avenue	South End	AAC	E	2	215	32	8,678	11/27/23	82	57	0	43	Overlay - AC Structural	10/1/08
789	1561	Noble Street	El Salvador Avenue	Hamlin Street	AAC	E	2	840	32	27,380	11/27/23	81	80	0	20	Overlay - AC Structural	10/1/08
790	1932	Nohl Canyon Road	Nohl Ranch Road	290' e/o Valleyglen Lane	AC	E	2	905	26	23,530	4/11/24	74	100	0	0	New Construction - Initial	1/1/80
792	1074	Nordic Drive	Taft Avenue	Concord Avenue	AAC	E	2	400	32	12,800	2/27/24	93	86	0	14	Surface Treatment - Slurry Seal	5/27/25
793	2120	Nordic Place	North End	Glendale Avenue	AAC	E	2	335	32	10,720	3/4/24	85	34	0	66	2 in overlay	8/1/09
794	1925	Nordic Street	Meats Avenue	Del Mar Avenue	AAC	E	2	270	36	9,720	3/4/24	94	89	0	11	Overlay - AC Structural	1/1/04
794	2117	Nordic Street	North End	Briardale Avenue	AAC	E	2	200	32	6,400	3/4/24	85	62	38	0	2 in overlay	8/1/09
795	3348	Norfolk	Avalon Dr	Promontory	AC	E	2	697	32	22,804	11/21/23	90	95	0	5	Surface Treatment - Slurry Seal	6/1/20
797	2132	Northumberland Street	Heim Avenue	Amber Avenue	AC	E	2	285	33	9,405	2/28/24	73	26	68	6	Surface Treatment - Slurry Seal	1/1/98
797	2133	Northumberland Street	Amber Avenue	Glendora Avenue	AAC	E	2	505	32	16,160	2/16/24	77	52	48	0	Overlay - AC Structural	1/1/02
797	2134	Northumberland Street	Glendora Avenue	Vista Del Playa	AC	E	2	710	32	22,720	2/16/24	83	100	0	0	Surface Treatment - Slurry Seal	1/1/98
797	3261	Northumberland Street	South End	Vista del Playa (S)	AC	E	2	487	33	16,071	2/16/24	83	100	0	0	Surface Treatment - Slurry Seal	1/1/98
798	1174	Norwood Street	Burly Avenue	Palmyra Avenue	AC	E	2	470	31	15,070	3/6/24	78	96	4	0	Surface Treatment - Slurry Seal	1/1/91
799	2610	Notre Dame Avenue	Canyon View Avenue	Dove Lane	AC	E	2	215	32	6,880	10/26/23	53	75	0	25	New Construction - Initial	1/1/80
801	939	Nubian Lane	Greengrove Street	East End	AAC	E	2	285	33	10,505	3/15/24	99	100	0	0	Overlay - AC Structural	3/3/22
802	1173	Nutwood Street	Donna Avenue	South End	AC	E	2	320	32	10,990	2/23/24	71	74	10	16	New Construction - Initial	4/3/12
802	1420	Nutwood Street	Lynwood Avenue	Sherwood Avenue	AC	E	2	350	31	10,850	1/26/24	100	0	0	0	Overlay-Rubber Hot Mix	1/26/24
803	1265	Oak Street	Palm Avenue	South End	AC	E	2	485	36	17,460	3/4/24	80	69	31	0	Surface Treatment - Slurry Seal	5/27/25
803	1266	Oak Street	Walnut Avenue	Palm Avenue	AC	E	2	1,260	31	39,060	2/27/24	86	93	0	7	Surface Treatment - Slurry Seal	5/27/25
803	1469	Oak Street	North End	Palmyra Avenue	AC	E	2	580	31	19,030	3/14/24	84	25	50	25	Complete Reconstruction - AC	10/1/06
805	1584	Oak Tree Lane	Willow Springs Road	Canyon View Avenue	AC	E	2	155	34	5,270	11/1/23	95	100	0	0	Surface Treatment - Slurry Seal	1/1/18
805	1601	Oak Tree Lane	Canyon View Avenue	Wildflower Avenue	AC	E	2	160	34	5,440	11/1/23	93	100	0	0	Surface Treatment - Slurry Seal	1/1/18
806	2062	Oakhurst Avenue	Meridian Street	Crossgate Street	AC	E	2	225	32	8,700	12/4/23	82	100	0	0	Surface Treatment - Slurry Seal	8/1/17
807	1103	Oakmont Avenue	Cambridge Street	Maplewood Street	AC	E	2	620	31	19,220	2/2/24	55	34	64	2	Surface Treatment - Slurry Seal	1/1/03
807	1104	Oakmont Avenue	Maplewood Street	California Street	AC	E	2	620	32	19,840	2/2/24	67	73	7	20	Surface Treatment - Slurry Seal	1/1/03
807	1105	Oakmont Avenue	California Street	Lincoln Avenue	AAC	E	2	625	31	19,375	2/2/24	84	100	0	0	Overlay - AC Structural	10/1/08
807	1142	Oakmont Avenue	Shaffer Street	Harwood Street	AC	E	2	805	32	25,760	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
807	1143	Oakmont Avenue	Grand Street	East End	AC	E	2	465	32	15,930	3/5/24	58	30	44	26	Surface Treatment - Slurry Seal	1/1/02
807	1317	Oakmont Avenue	130' w/o Markewood	Handy Street	AC	E	2	985	31	30,535	2/13/24	64	38	60	2	Surface Treatment - Slurry Seal	1/1/98
807	1395	Oakmont Avenue	Hart Street	East End	AC	E	2	690	31	22,440	2/13/24	100	0	0	100	Overlay-Rubber Hot Mix	1/3/23
807	1402	Oakmont Avenue	Morgan Street	Mallard Street	AC	E	2	215	32	6,880	3/15/24	86	100	0	0	Surface Treatment - Slurry Seal	1/1/02
808	1666	Oakwood Street	Fernwood Avenue	Fairhaven Avenue	AAC	E	2	1,045	31	32,395	1/26/24	85	54	0	46	Surface Reconstruction - AC	1/1/02
809	1255	Oceanview Street	San Alto Avenue	Santa Ana Canyon	AAC	E	2	765	32	24,480	1/4/24	76	10	0	90	Overlay - AC Structural	10/1/08
809	1677	Oceanview Street	Butterfield Road	Bixby Avenue	AC	E	2	635	32	20,320	1/4/24	84	53	47	0	Surface Treatment - Slurry Seal	10/10/19
809	2184	Oceanview Street	310' n/o Lincoln Avenue	Lincoln Avenue	AC	I	2	310	36	11,160	3/19/24	100	100	0	0	New Construction - Initial	1/1/80
811	2212	O'Donnell Way	Taft Avenue	Levers Place	AC	E	2	655	44	28,820	3/19/24	55	39	51	10	Surface Treatment - Slurry Seal	1/1/94
812	3456	Old Camp Road	North End	Canyon View Avenue	AC	E	2	470	36	18,420	10/17/23	81	100	0	0	Surface Treatment - Slurry Seal	1/1/18
813	2609	Old Chapman Road	North End	Canyon View Avenue	AC	E	2	505	28	14,890	10/26/23	65	99	0	1	New Construction - Initial	1/1/80
815	1686	Olive Avenue	Orange-Olive Avenue	200' n/o Buena Vista Street	AC	E	2	490	32	15,680	3/19/24	92	100	0	0	Surface Treatment - Slurry Seal	1/1/02
815	2167	Olive Avenue	200' n/o Lincoln Avenue	Lincoln Avenue	AAC	I	2	200	30	5,700	4/15/24	67	26	10	64	Overlay - AC Structural	1/1/98
816	2395	Olive Street	Chapman Avenue	Almond Avenue	PCC	E	2	615	40	24,600	8/26/24	57	16	52	32	New Construction - Initial	1/1/80
816	776	Olive Street	Collins Avenue	Alley Mayfair Avenue	AAC	E	2	605	37	22,385	2/15/24	83	100	0	0	Overlay - AC Structural	1/1/94
816	777	Olive Street	Maple Avenue	Chapman Avenue	PCC	E	2	615	40	24,600	8/26/24	61	14	40	46	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
816	778	Olive Street	Palm AVenue	Maple Avenue	PCC	E	2	620	40	24,800	8/26/24	58	14	32	54	New Construction - Initial	1/1/80
816	779	Olive Street	North End	Palm Avenue	AC	E	2	305	36	10,724	3/14/24	43	45	46	9	New Construction - Initial	1/1/80
816	780	Olive Street	Walnut Avenue	Sycamore Avenue	AC	E	2	620	36	21,808	3/14/24	75	55	27	18	Surface Treatment - Slurry Seal	1/1/03
816	781	Olive Street	Rose Avenue	Walnut Avenue	AC	E	2	650	36	23,400	2/15/24	65	50	50	0	Surface Treatment - Slurry Seal	1/1/03
816	956	Olive Street	Almond Avenue	Palmyra Avenue	AC	E	2	600	36	21,600	3/18/24	38	41	27	32	New Construction - Initial	1/1/80
816	957	Olive Street	Palmyra Avenue	Culver Avenue	AC	E	2	610	36	21,960	3/18/24	49	14	58	28	New Construction - Initial	1/1/80
816	958	Olive Street	Culver Avenue	La Veta Avenue	AC	E	2	615	36	22,140	3/5/24	94	30	0	70	Complete Reconstruction - AC	6/1/20
817	1178	Olympia Street	Almond Avenue	Palmyra Avenue	AAC	E	2	855	32	27,860	1/26/24	84	100	0	0	Overlay - AC Structural	12/12/12
818	1626	Olympia Way	Spring Street	Maple Avenue	AAC	E	2	575	32	18,900	1/2/24	93	67	0	33	Overlay - AC Structural	10/10/19
818	1656	Olympia Way	Ruth Place	La Veta Avenue	AAC	E	2	260	32	8,820	2/20/24	99	100	0	0	Overlay - AC Structural	6/1/21
818	1672	Olympia Way	La Veta Avenue	Dixon Avenue	AC	E	2	640	32	20,480	2/20/24	81	100	0	0	Surface Treatment - Slurry Seal	1/1/91
819	1831	Onyx Avenue	Sacramento Street	East End	AC	E	2	150	31	6,150	1/3/24	73	37	63	0	Surface Treatment - Slurry Seal	8/1/16
820	1829	Opal Avenue	Agate Street	Mori Lane	AC	E	2	295	31	8,984	12/13/23	83	53	47	0	Surface Treatment - Slurry Seal	8/1/16
825	1873	Orange Hill Road	North End	Orange View Lane	AC	E	2	475	32	16,700	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
827	2099	Orange Park Boulevard	Serrano Avenue	Joshua Street	AAC	E	2	1,210	40	50,820	11/16/23	89	100	0	0	Overlay - AC Structural	8/1/17
828	1063	Orange Street	Quincy Avenue	South End	AC	E	2	170	31	6,320	3/13/24	64	31	65	4	Surface Treatment - Slurry Seal	1/1/02
828	1097	Orange Street	Rose Avenue	Walnut AVenue	AC	E	2	615	36	22,140	3/13/24	63	47	14	39	Surface Treatment - Slurry Seal	1/1/02
828	1098	Orange Street	North End	Rose Avenue	AC	E	2	305	38	11,590	3/13/24	69	59	11	30	Surface Treatment - Slurry Seal	1/1/02
828	1149	Orange Street	Collins Avenue	Lomita Avenue	AC	E	2	615	40	24,600	3/11/24	72	100	0	0	Surface Treatment - Slurry Seal	1/1/02
828	1150	Orange Street	Lomita Avenue	South End	AC	E	2	300	32	10,650	3/11/24	92	100	0	0	Complete Reconstruction - AC	10/1/08
828	2392	Orange Street	Maple Avenue	Chapman Avenue	PCC	E	2	605	40	24,200	8/28/24	52	17	64	19	New Construction - Initial	1/1/80
828	2399	Orange Street	Chapman Avenue	Almond Avenue	PCC	I	2	615	40	24,600	8/28/24	73	17	34	49	New Construction - Initial	1/1/80
828	2407	Orange Street	Almond Avenue	Washington Avenue	PCC	E	2	295	40	11,800	8/26/24	70	17	51	32	New Construction - Initial	1/1/80
828	2408	Orange Street	Washington Avenue	Palmyra Avenue	PCC	E	2	300	40	12,000	8/26/24	70	13	53	34	New Construction - Initial	1/1/80
828	2411	Orange Street	Palm Avenue	Maple Avenue	PCC	E	2	620	40	24,800	8/28/24	45	13	75	12	New Construction - Initial	1/1/80
828	926	Orange Street	Palmyra Avenue	Culver Avenue	AC	E	2	620	36	22,320	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
828	927	Orange Street	Culver Avenue	La Veta Avenue	AC	E	2	625	36	22,500	2/26/24	81	98	0	2	Surface Treatment - Slurry Seal	1/1/03
828	928	Orange Street	La Veta Avenue	River Avenue	AC	E	2	350	25	8,750	4/10/24	80	100	0	0	Surface Treatment - Slurry Seal	1/1/95
828	929	Orange Street	River Avenue	South End	AC	E	2	300	25	7,500	2/26/24	86	95	0	5	Surface Treatment - Slurry Seal	1/1/94
829	2558	Orange Tree Lane	Shaffer Street	South End	AAC	E	2	355	29	11,395	8/27/24	59	90	0	10	Overlay - AC Structural	6/1/21
823	1115	Orangegrove Avenue	California Street	Lincoln Street	AC	E	2	625	31	19,375	2/2/24	90	93	0	7	Surface Reconstruction - AC	1/1/03
823	1116	Orangegrove Avenue	Maplewood Street	California Street	AC	E	2	555	31	17,205	2/2/24	77	81	19	0	Surface Treatment - Slurry Seal	1/1/03
823	1120	Orangegrove Avenue	Lincoln Street	East End	AC	E	2	305	31	9,455	2/2/24	95	100	0	0	Surface Treatment - Slurry Seal	1/1/04
823	1286	Orangegrove Avenue	Tustin Street	Wayfield Street	AC	E	2	475	32	15,200	2/27/24	78	58	32	10	Surface Treatment - Slurry Seal	1/1/04
823	1297	Orangegrove Avenue	West End (near Park Lane)	East End	AC	E	2	630	32	24,543	2/27/24	69	40	45	15	New Construction - Initial	1/1/80
823	1308	Orangegrove Avenue	Sacramento Street	East End	AC	E	2	215	31	7,715	2/13/24	77	68	0	32	Reconstruction	12/12/12
823	1336	Orangegrove Avenue	Handy Street	Hart Street	AAC	E	2	755	31	23,405	2/13/24	73	99	0	1	2 in overlay	10/1/13
823	1338	Orangegrove Avenue	Malena Street	East End	AC	E	2	460	32	15,770	2/13/24	63	46	0	54	Surface Treatment - Slurry Seal	1/1/98
823	1547	Orangegrove Avenue	Noble Street	Rancho Santiago Boulevard	AAC	E	2	235	32	7,328	11/27/23	86	100	0	0	Overlay - AC Structural	10/1/08
823	1558	Orangegrove Avenue	Hewes Street	Hamlin Street	AAC	E	2	690	32	21,888	11/27/23	91	100	0	0	Overlay - AC Structural	10/1/08
823	2204	Orangegrove Avenue	West End	Alpine Road	AAC	I	2	715	44	31,460	3/7/24	76	47	32	21	Overlay - AC Structural	1/1/02
830	1875	Orangeview Lane	North End	East End	AC	E	2	2,105	36	79,380	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
833	711	Orchard Avenue	Flower Street	East End	AC	E	2	635	32	20,320	3/5/24	67	56	33	11	Surface Treatment - Slurry Seal	1/1/04
835	1390	Oriole Place	Brookside Avenue	South End	AC	E	2	165	32	6,780	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
836	1572	Outrider Street	La Cumbre Drive	Canyon View AVenue	AC	E	2	220	32	7,040	10/24/23	65	54	43	3	Surface Treatment - Slurry Seal	1/1/02
838	2250	Pacific Street	Freedom Avenue	Meats Avenue	AC	I	2	1,420	44	62,480	3/1/24	59	17	61	22	Surface Treatment - Slurry Seal	1/1/94
840	1223	Paddle Wheel Circle	Edgewater Street	East End	AAC	E	2	155	36	5,735	2/29/24	84	81	0	19	Surface Treatment - Slurry Seal	3/21/22
843	1747	Pala Place	North End	Shoshone Avenue	AAC	E	2	140	32	5,980	11/29/23	92	100	0	0	Overlay - AC Structural	1/1/21
844	2637	Palermo Court	Magdalena Drive	South End	AC	E	2	150	32	6,300	11/20/23	88	100	0	0	New Construction - Initial	1/1/80
845	1023	Palm Avenue	California Street	Tustin Avenue	AC	E	2	1,295	37	47,915	2/23/24	86	100	0	0	Surface Treatment - Slurry Seal	1/1/91
845	1024	Palm Avenue	Waverly Street	California Street	AC	E	2	1,000	37	37,000	2/23/24	88	80	0	20	Surface Treatment - Slurry Seal	5/27/25
845	1277	Palm Avenue	Tustin Street	Wayfield Circle	AC	E	2	695	37	25,715	3/4/24	76	96	0	4	Surface Treatment - Slurry Seal	5/27/25
845	1278	Palm Avenue	Wayfield Circle	Park Lane	AC	E	2	345	32	11,040	3/4/24	90	90	0	10	New Construction - Initial	1/1/80
845	1295	Palm Avenue	West End	Sacramento Street	AAC	E	2	170	32	6,940	2/13/24	91	92	0	8	Overlay - AC Structural	10/10/19
845	1305	Palm Avenue	Milford Street	Handy Street	AAC	E	2	660	31	20,460	2/13/24	88	97	0	3	Overlay - AC Structural	10/10/19
845	1538	Palm Avenue	Earlham Street	East End	AAC	E	2	365	32	11,680	11/27/23	87	100	0	0	Surface Treatment - Slurry Seal	11/1/08
845	1621	Palm Avenue	Swidler Street	Seranado Street	AAC	E	2	1,190	32	37,888	1/2/24	89	100	0	0	Overlay - AC Structural	10/1/08
845	2413	Palm Avenue	Shaffer Street	Waverly Street	PCC	E	2	1,610	40	64,400	8/28/24	53	9	63	28	New Construction - Initial	1/1/80
845	2414	Palm Avenue	Glassell Street	Shaffer Street	PCC	E	2	1,310	40	52,400	8/28/24	67	21	65	14	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
845	3431	Palm Avenue	Bixby Ave	County Limit	AC	E	2	100	38	3,800	1/4/24	93	100	0	0	New Construction - Initial	1/1/80
845	731	Palm Avenue	Donneybrooke Street	Eckhoff Street	AC	E	2	1,200	32	38,400	3/14/24	68	31	69	0	Surface Treatment - Slurry Seal	1/1/97
845	786	Palm Avenue	Main Street	Batavia Street	AC	E	2	1,370	39	53,430	2/1/24	75	100	0	0	Grind Overlay with Dig Outs	10/1/13
845	787	Palm Avenue	Batavia Street	Cypress St	AC	E	2	1,310	37	49,210	3/5/24	80	71	25	4	New Construction - Initial	1/1/80
846	785	Palm Drive	Main Street	Maple Avenue	AC	E	2	905	37	33,485	3/11/24	59	15	74	11	Surface Treatment - Chip Seal	1/1/97
847	1080	Palmdale Avenue	Woodside Street	Cambridge Street	AAC	E	2	740	31	22,940	2/27/24	93	91	0	9	Overlay - AC Structural	1/1/02
847	1081	Palmdale Avenue	Cambridge Street	Ebonywood Street	AAC	E	2	1,445	31	44,795	2/27/24	94	94	0	6	Overlay - AC Structural	1/1/19
847	1087	Palmdale Avenue	West End	East End	AC	E	2	745	36	26,820	2/27/24	94	100	0	0	Surface Treatment - Slurry Seal	1/1/04
848	1169	Palmyra Avenue	Prospect Street	James Street	AC	E	2	1,390	37	51,282	1/26/24	79	65	24	11	Surface Treatment - Slurry Seal	1/1/02
848	1170	Palmyra Avenue	James Street	Esplanade Street	AC	E	2	1,155	37	42,735	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
848	1459	Palmyra Avenue	Craig Drive	Prospect Street	AAC	E	2	1,135	32	36,320	1/26/24	78	63	36	1	Overlay - AC Structural	12/14/06
848	1460	Palmyra Avenue	Yorba Street	Craig Drive	AAC	E	2	1,425	32	45,600	1/26/24	78	52	31	17	Overlay - AC Structural	12/14/06
848	1461	Palmyra Avenue	Tracy Lane	Yorba Street	AAC	E	2	635	36	23,610	2/14/24	80	83	0	17	Overlay - AC Structural	12/12/12
848	1463	Palmyra Avenue	Jennifer Lane	Tracy Lane	AAC	E	2	215	36	8,490	2/14/24	85	100	0	0	Overlay - AC Structural	12/12/12
848	2757	Palmyra Avenue	Tustin Street	East End	AC	E	2	1,225	31	38,675	3/14/24	63	20	80	0	Surface Treatment - Slurry Seal	1/1/92
848	716	Palmyra Avenue	Flower Street	Feldner Road	AAC	E	2	1,685	36	60,660	3/5/24	100	0	0	0	Overlay - AC Structural	7/7/22
848	796	Palmyra Avenue	Main Street	Lime Street	AC	E	2	910	32	29,120	3/12/24	74	44	0	56	Surface Treatment - Slurry Seal	1/1/04
848	797	Palmyra Avenue	Lime Street	Batavia Street	AC	E	2	710	32	22,720	3/12/24	82	83	0	17	Surface Treatment - Slurry Seal	1/1/04
848	799	Palmyra Avenue	Batavia Street	Parker Street	AAC	E	2	655	38	24,890	3/5/24	76	24	76	0	Overlay - AC Structural	10/11/19
848	800A	Palmyra Avenue	Parker Street	RR Crossing	AAC	E	2	644	38	24,472	3/5/24	85	48	45	7	Overlay - AC Structural	10/11/19
848	800B	Palmyra Avenue	RR Crossing	Lemon Street	AC	E	2	653	38	24,814	3/5/24	92	95	0	5	Surface Treatment - Slurry Seal	1/1/03
848	801	Palmyra Avenue	Lemon Street	Glassell Street	AC	E	2	620	38	23,560	3/12/24	95	100	0	0	Surface Treatment - Slurry Seal	1/1/92
848	809	Palmyra Avenue	Bedford Road	Main Street	AAC	E	2	650	47	30,550	3/13/24	86	96	0	4	Overlay - AC Structural	7/7/22
848	810	Palmyra Avenue	Feldner Road	Bedford Road	AAC	E	2	310	42	13,020	4/10/24	47	47	42	11	Overlay - AC Structural	7/7/22
848	984	Palmyra Avenue	Lincoln Street	Tustin Avenue	AC	E	2	600	30	18,000	2/20/24	88	57	0	43	New Construction - Initial	1/1/80
848	985	Palmyra Avenue	Gardner Drive	Lincoln street	AC	E	2	1,020	30	30,600	2/21/24	74	56	24	20	New Construction - Initial	1/1/80
848	986	Palmyra Avenue	Cambridge Street	Gardner Drive	AAC	E	2	1,015	32	32,480	2/21/24	87	35	56	9	Overlay - AC Structural	12/13/06
848	987	Palmyra Avenue	Hardwood Street	Cambridge Street	AAC	E	2	645	32	20,640	2/26/24	89	71	25	4	Overlay - AC Structural	10/11/19
848	988	Palmyra Avenue	Shaffer Street	Harwood Street	AAC	E	2	675	32	21,600	2/26/24	88	96	0	4	Overlay - AC Structural	10/11/19
848	989A	Palmyra Avenue	Shaffer Street	Grand Street	AAC	E	2	633	32	20,256	2/26/24	84	30	69	1	Overlay - AC Structural	10/11/19
848	989B	Palmyra Avenue	Grand Street	Glassell Street	AC	E	2	643	32	20,576	2/26/24	69	22	78	0	Surface Treatment - Slurry Seal	1/1/03
849	2299	Palmyra Place	Main Street	Bush Street	PCC	E	1	300	15	4,500	8/26/24	58	18	55	27	New Construction - Initial	1/1/80
850	1737	Palo Alto Place	Muir Drive	South End	AC	E	2	215	32	8,380	11/2/23	93	100	0	0	Surface Treatment - Slurry Seal	3/21/22
851	1718	Palo Loma Place	Elsinore Avenue	South End	AAC	E	2	945	32	32,788	11/16/23	83	100	0	0	Overlay - AC Structural	4/13/15
851	1753	Palo Loma Place	North End	Valencia Drive	AAC	E	2	160	32	6,620	11/16/23	74	89	0	11	Overlay - AC Structural	1/31/16
853	758	Pampas Street	City Limit	Brentwood Avenue	AC	E	2	1,085	32	34,720	3/11/24	57	28	72	0	Surface Treatment - Slurry Seal	10/10/19
854	3262	Paragon	West End	Chelsey Court	AC	E	2	785	32	26,918	12/6/17	85	100	0	0	New Construction - Initial	1/1/80
855	2311	Park Balboa Avenue	Park Hyde	Park Central	AC	E	2	1,450	36	54,700	3/7/24	18	11	87	2	Surface Treatment - Slurry Seal	1/1/98
856	2237	Park Central Avenue	195' w/o The City Drive	The City Drive	AAC	I	2	195	44	8,220	4/2/24	92	100	0	0	Surface Reconstruction - AC	9/1/08
856	2290	Park Central Avenue	Park Vine Street	195' w/o The City Drive	AAC	E	2	1,110	32	36,270	3/7/24	83	74	26	0	Surface Reconstruction - AC	9/1/08
857	2313	Park Griffith Avenue	Park Hyde Street	Park Vine Street	AAC	E	2	215	32	6,880	3/7/24	87	82	18	0	Overlay - AC Structural	9/1/08
858	2309	Park Hyde Street	Park Balboa Avenue	El Rancho Avenue	AAC	E	2	851	32	27,982	3/7/24	75	49	22	29	Overlay - AC Structural	9/1/08
859	1279	Park Lane	Palm Avenue	Dana Place	AC	E	2	300	32	9,600	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
859	1283	Park Lane	Mount Vernon Avenue	Sycamore Avenue	AC	E	2	595	31	18,445	2/27/24	86	34	0	66	Surface Treatment - Slurry Seal	5/27/25
859	1296	Park Lane	Orange Grove Avenue	Walnut Avenue	AC	E	2	450	32	14,400	2/27/24	77	29	34	37	New Construction - Initial	1/1/80
859	1839	Park Lane	Meats Avenue	Del Mar Avenue	AC	E	2	735	32	23,520	3/4/24	87	100	0	0	New Construction - Initial	1/1/80
859	2807	Park Lane	North End	Washington Avenue	AC	E	2	595	31	19,495	2/20/24	80	90	0	10	Surface Treatment - Slurry Seal	1/1/96
860	1186	Park Street	Washington Avenue	Philo Avenue	AAC	E	2	635	32	20,320	3/6/24	81	97	1	2	Overlay - AC Structural	1/1/04
860	1187	Park Street	Chapman Avenue	Washington Avenue	AAC	E	2	435	32	13,536	3/6/24	82	99	0	1	Overlay - AC Structural	1/1/04
861	2298	Park Vine Street	Garden Grove Boulevard	Park Central Avenue	AC	E	2	1,015	32	34,480	3/7/24	10	6	94	0	Surface Treatment - Slurry Seal	1/1/98
862	2215	Parker Street	Katella Avenue	South End	AC	E	2	565	38	21,470	3/8/24	64	29	36	35	Surface Reconstruction - AC	1/1/93
862	2217	Parker Street	Struck Avenue	Collins Avenue	AAC	I	2	1,265	37	46,805	2/15/24	65	33	63	4	Overlay - AC Structural	1/1/97
862	768	Parker Street	Maple Avenue	Chapman Avenue	AC	E	2	615	36	22,140	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
862	769	Parker Street	North End	Maple Avenue	AC	E	1	305	18	5,490	3/18/24	79	69	0	31	New Construction - Initial	1/1/80
862	770	Parker Street	North End	Palm Avenue	AC	E	2	705	37	27,135	3/5/24	59	50	35	15	New Construction - Initial	1/1/80
862	771	Parker Street	North End	Walnut Avenue	AAC	E	2	320	33	10,560	10/18/17	98	100	0	0	Surface Reconstruction - AC	1/1/04
862	961	Parker Street	Chapman Avenue	Almond Avenue	AC	E	2	620	36	22,320	3/5/24	76	89	11	0	Surface Treatment - Slurry Seal	1/1/02
862	962	Parker Street	Almond AVenue	Palmyra Avenue	AC	E	2	620	36	22,320	3/5/24	62	23	41	36	Surface Treatment - Slurry Seal	1/1/04
862	963	Parker Street	Palmrya Avenue	Culver Avenue	AC	E	2	615	32	19,680	3/12/24	67	45	48	7	Surface Treatment - Slurry Seal	1/1/04

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
862	964	Parker Street	Culver Avenue	La Veta Avenue	AAC	E	2	600	32	19,200	3/12/24	93	65	0	35	Overlay - AC Structural	1/13/16
863	2655	Parkhurst Drive	Crown Parkway	Serrano Avenue	AC	I	2	336	32	10,752	11/20/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
864	1386	Parkside Avenue	West End	East End	AAC	E	2	1,245	31	40,395	1/3/24	84	91	9	0	Overlay - AC Structural	1/31/16
865	1891	Partridge Lane	Bobwhite Way	Cannon Street	AAC	E	2	130	32	3,968	11/1/23	72	29	0	71	Overlay - AC Structural	8/1/16
865	1892	Partridge Lane	Cannon Street	East End	AAC	E	2	535	32	18,620	11/1/23	87	100	0	0	Overlay - AC Structural	8/1/16
866	1749	Patria Court	West End	Cannon Street	AC	E	2	365	32	13,180	11/2/23	88	82	0	18	Surface Treatment - Slurry Seal	3/21/22
867	811	Paul Road	Feldner Road	210' e/o Feldner Road	AC	E	2	210	32	6,720	4/10/24	63	66	0	34	Surface Treatment - Slurry Seal	1/1/04
870	1259	Pearl Street	McPherson Street	First Street	AC	E	2	500	32	16,000	2/20/24	61	95	0	5	New Construction - Initial	1/1/80
870	1880	Pearl Street	Cannon Street	East End	AAC	E	2	610	36	21,960	11/1/23	87	100	0	0	Overlay - AC Structural	8/1/16
870	3462	Pearl Street	Bobwhite Way	Cannon Street	AAC	E	2	47	36	1,476	11/1/23	91	100	0	0	Overlay - AC Structural	8/1/16
1326	8007	Pebble Creek Lane	Spicewood Street	Shadyvale Street	AC	E	2	705	36	25,380	4/15/24	73	100	0	0	New Construction - Initial	10/4/12
1326	8008	Pebble Creek Lane	Shadyvale Street	36 ft E/O Sugarberry Street	AC	E	2	826	36	29,736	2/29/24	81	94	0	6	New Construction - Initial	10/4/12
871	1000	Penn Drive	Van Bibber Avenue	Culver Avenue	AAC	E	2	245	31	7,595	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
873	1943	Pepper Hill Lane	Maple Tree	East End	AC	E	2	475	32	16,773	1/4/24	95	100	0	0	Surface Treatment - Slurry Seal	5/27/24
874	2187	Pepper Street	North End	La Veta Avenue	AAC	E	2	690	40	27,600	4/10/24	92	100	0	0	Overlay - AC Structural	1/1/97
874	948	Pepper Street	Chapman Avenue	Almond Avenue	AC	E	2	600	30	18,000	3/13/24	62	36	56	8	Surface Treatment - Slurry Seal	1/1/04
877	2363	Phillips Place	Hewes Street	Hill Street	AC	E	2	335	28	9,380	2/20/24	75	33	0	67	Surface Treatment - Slurry Seal	1/1/91
878	2361	Philo Avenue	Hewes Street	Espanita Street	AC	E	2	370	32	11,328	2/20/24	68	99	0	1	Surface Treatment - Slurry Seal	1/1/92
878	2366	Philo Avenue	Marmon Avenue	Hewes Street	AAC	E	2	420	32	13,440	3/6/24	76	84	16	0	Overlay - AC Structural	1/1/04
880	1015	Pine Street	Tularosa Avenue	South End	AC	E	2	130	32	5,210	4/10/24	69	63	37	0	Surface Treatment - Slurry Seal	1/1/03
880	1045	Pine Street	Trenton Avenue	South End	AC	E	2	455	32	14,560	2/15/24	88	68	0	32	Surface Reconstruction - AC	9/20/07
880	1132	Pine Street	Walnut Avenue	Sycamore AVenue	AAC	E	2	625	31	19,375	2/9/24	87	100	0	0	Overlay - AC Structural	12/12/12
880	1133	Pine Street	North End	Walnut Avenue	AC	E	2	620	34	22,130	2/9/24	82	100	0	0	Surface Treatment - Slurry Seal	11/1/08
880	1160	Pine Street	Lomita Avenue	South End	AC	E	2	210	32	7,470	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
880	2127	Pine Street	Meats Avenue	Emerson Avenue	AAC	E	2	520	32	16,640	2/27/24	99	100	0	0	Overlay - AC Structural	6/1/19
880	2417	Pine Street	Maple Avenue	Chapman Avenue	PCC	E	2	600	40	24,000	8/28/24	51	15	60	25	New Construction - Initial	1/1/80
880	2418	Pine Street	Palm Avenue	Maple Avenue	PCC	E	2	615	34	20,910	8/28/24	54	18	53	29	New Construction - Initial	1/1/80
880	2419	Pine Street	Sycamore Avenue	Palm Avenue	PCC	E	2	620	34	21,080	8/28/24	55	24	69	7	New Construction - Initial	1/1/80
880	922	Pine Street	Chapman Avenue	Almond Avenue	AC	E	2	605	36	21,780	3/15/24	70	83	0	17	New Construction - Initial	1/1/80
880	923	Pine Street	Van Bibber Avenue	Culver Avenue	AAC	E	2	415	32	13,280	2/23/24	91	98	0	2	Overlay - AC Structural	1/1/03
880	925	Pine Street	La Veta Avenue	End	AC	E	2	290	32	10,330	3/12/24	78	31	46	23	Surface Treatment - Slurry Seal	1/1/03
881	1197	Pinewood Street	Alderwood Avenue	Riverdale Avenue	AAC	E	2	270	32	8,640	3/28/24	75	73	27	0	Overlay - AC Structural	3/3/22
881	1198	Pinewood Street	Riverdale Avenue	Rainer Avenue	AC	E	2	785	32	25,120	2/29/24	88	36	64	0	Surface Treatment - Slurry Seal	3/21/22
881	1202	Pinewood Street	Rainer Avenue	Ashwood Street	AC	E	2	1,060	32	33,920	2/29/24	92	92	0	8	Surface Treatment - Slurry Seal	11/1/08
882	1599	Pinnacle Pointe	Hidden Canyon	East End	AC	E	2	480	32	17,158	10/26/23	84	100	0	0	Surface Treatment - Slurry Seal	1/1/04
882	1799	Pinnacle Pointe	South End	Hidden Canyon	AC	E	2	930	28	27,838	10/26/23	73	72	28	0	Surface Treatment - Slurry Seal	1/1/04
883	1569	Pinto Way	Chandler Ranch	Saddlehorn Way	AC	E	2	645	32	21,890	10/24/23	83	100	0	0	Surface Treatment - Slurry Seal	10/10/19
885	772	Pixley Street	Maple Avenue	Chapman Avenue	AC	E	2	610	36	21,704	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
885	807	Pixley Street	North End	Palmyra Avenue	AC	E	2	415	32	14,330	4/10/24	54	68	28	4	Surface Treatment - Slurry Seal	1/1/02
885	953	Pixley Street	Culver Avenue	La Veta Avenue	AC	E	2	615	30	18,450	3/12/24	94	62	0	38	Grind Overlay with Dig Outs	10/1/14
885	954	Pixley Street	Palmyra Avenue	Culver Avenue	AC	E	2	615	30	18,450	4/10/24	45	37	48	15	Surface Treatment - Slurry Seal	1/1/04
885	955	Pixley Street	Chapman Avenue	Almond Avenue	AAC	E	2	615	36	22,140	3/5/24	84	57	13	30	Overlay - AC Structural	1/1/02
886	1990	Playano Avenue	Yurok Avenue	East End	AAC	E	2	430	32	15,260	11/29/23	94	100	0	0	Overlay - AC Structural	1/1/21
887	710	Plum Lane	Culver Avenue	Orchard Avenue	AAC	E	2	350	32	11,200	4/10/24	62	51	49	0	Surface Treatment - Slurry Seal	1/1/04
888	701	Poinsettia Drive	Mills Drive	Almond Avenue	AC	E	2	200	32	6,400	3/7/24	63	55	45	0	Surface Treatment - Slurry Seal	1/1/04
888	702	Poinsettia Drive	Almond Avenue	Larkspur Drive	AC	E	2	385	32	12,320	3/7/24	77	51	33	16	Surface Treatment - Slurry Seal	1/1/04
889	1447	Ponderosa Street	Seba Avenue	Fairhaven Avenue	AC	E	2	855	32	27,360	3/15/24	91	87	0	13	New Construction - Initial	1/1/80
890	1567	Pony Court	Chandler Ranch	East End	AAC	E	2	415	32	14,780	10/24/23	87	100	0	0	Overlay - AC Structural	1/1/18
891	2240	Poplar Street	North End	Orangewood Avenue	AC	I	2	1,475	44	64,900	3/7/24	68	81	15	4	Surface Treatment - Slurry Seal	1/1/95
891	737	Poplar Street	North End	Maple Avenue	AC	E	2	230	32	7,360	3/12/24	82	66	10	24	Surface Treatment - Slurry Seal	1/1/04
891	738	Poplar Street	Sycamore Avenue	Spruce Avenue	AAC	E	2	470	32	15,040	3/6/24	96	21	0	79	Overlay - AC Structural	1/1/22
891	739	Poplar Street	Beverly Drive	Cherry Drive	AAC	E	2	370	32	11,840	3/6/24	99	100	0	0	Overlay - AC Structural	1/1/22
892	3285	Portico Ter	Eaton Ct	Skytop Ct	AC	E	2	768	32	24,384	11/21/23	95	100	0	0	Surface Treatment - Slurry Seal	6/1/20
892	3320	Portico Ter	Skytop Ct	Kendra Dr	AC	E	2	1,450	32	46,400	11/21/23	95	100	0	0	Surface Treatment - Slurry Seal	6/1/20
894	1714	Portsmouth Circle	Valley Forge Drive	South End	AAC	E	2	280	32	11,508	11/16/23	80	100	0	0	Overlay - AC Structural	1/31/16
896	2646	Prescott Court	West End	Sierra Vista Drive	AC	E	2	445	32	15,740	11/20/23	90	95	0	5	Surface Treatment - Slurry Seal	6/1/20
897	1788	Presidio Way	San Luis Drive	Skylark Place	AC	E	2	130	32	4,160	10/24/23	90	100	0	0	Surface Treatment - Slurry Seal	1/1/18
898	2539	Preston Street	North End	Somerton Avenue	AC	E	2	385	32	14,868	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
899	2266	Primrose Drive	Main Street	North Emerald Drive	AC	E	2	791	30	23,730	3/8/24	91	75	0	25	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
900	3349	Promontory	Norfolk	Chatham	AC	E	2	705	32	24,060	11/21/23	92	94	0	6	Surface Treatment - Slurry Seal	6/1/20
903	2482	Providence Avenue	Main Street	Bush Street	AC	I	2	290	31	8,990	4/10/24	52	27	73	0	New Construction - Initial	1/1/80
904	1883	Quail Lane	North End	Pearl Street	AAC	E	2	485	32	14,496	11/1/23	90	100	0	0	Overlay - AC Structural	8/1/16
904	1884	Quail Lane	Pearl Street	South End	AAC	E	2	275	32	10,300	11/1/23	88	100	0	0	Overlay - AC Structural	8/1/16
904	1893	Quail Lane	North End	Partridge Lane	AC	E	2	490	32	17,180	11/1/23	89	100	0	0	New Construction - Initial	1/1/80
905	2052	Queens Gate Way	Rolling Green Lane	Summitridge Lane	AC	E	2	170	32	5,248	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
906	1048	Quincy Avenue	California Street	Lincoln Street	AAC	E	2	865	32	27,680	2/9/24	91	100	0	0	Overlay - AC Structural	12/14/06
906	1061	Quincy Avenue	Grand Street	Shaffer Street	AAC	E	2	620	31	19,220	3/5/24	94	100	0	0	Overlay - AC Structural	6/1/21
906	1062	Quincy Avenue	Glassell Street	Grand Street	AC	E	2	605	31	18,755	3/5/24	57	28	69	3	Surface Treatment - Slurry Seal	1/1/02
906	1346	Quincy Avenue	West End	Wanda Road	AAC	E	2	180	32	6,860	2/8/24	73	100	0	0	2 in overlay	10/1/13
906	1350	Quincy Avenue	Handy Street	Hart Street	AAC	E	2	1,100	31	34,100	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
906	1507	Quincy Avenue	Highland Street	East End	AC	E	2	350	30	10,500	4/11/24	68	73	27	0	New Construction - Initial	1/1/80
906	1522	Quincy Avenue	Sacramento Street	Handy Street	AAC	E	2	1,140	31	35,340	2/8/24	88	100	0	0	2 in overlay	8/29/07
906	2177	Quincy Avenue	West End	Tustin Street	AC	I	2	330	36	12,980	2/9/24	90	100	0	0	Complete Reconstruction - AC	10/1/08
906	3156	Quincy Avenue	Highland Street	156' w/o Highland Street	AC	E	2	156	30	4,680	4/11/24	58	57	43	0	New Construction - Initial	1/1/80
908	1200	Rainier Avenue	Woods Street	Ashwood Street	AAC	E	2	1,620	36	58,320	2/29/24	86	81	0	19	Surface Treatment - Slurry Seal	3/21/22
908	1201	Rainier Avenue	Richland Street	Woods Street	AC	E	2	845	36	30,420	2/29/24	90	100	0	0	Surface Treatment - Slurry Seal	3/21/22
908	1237	Rainier Avenue	Sunset Street	East End	AAC	E	2	130	32	4,160	2/29/24	84	100	0	0	Overlay - AC Structural	10/1/08
909	1580	Raintree Road	Canyon View Avenue	Brairwood Road	AC	E	2	180	36	5,730	10/17/23	85	56	0	44	Surface Treatment - Slurry Seal	1/1/18
910	2054	Rama Street	El Rito Drive	Cerro Villa Drive	AC	E	2	220	32	7,540	4/15/24	61	50	50	0	Surface Treatment - Slurry Seal	1/1/04
911	1236	Ramona Street	Riverview Avenue	Santa Ana Canyon	AAC	E	2	1,265	32	40,480	2/28/24	90	98	0	2	Overlay - AC Structural	10/1/08
912	2245	Rampart Street	Chapman Avenue	2100' n/o Chapman Avenue	AAC	I	2	2,100	44	92,400	3/7/24	83	69	11	20	Overlay - AC Structural	12/14/06
913	2015	Rancho Santiago Blvd	Pearl Street	Chapman Avenue	AC	E	2	305	48	14,640	4/15/24	84	73	25	2	New Construction - Initial	1/1/80
915	1965	Ranchroad Drive	Bond Avenue	Cherrywood Lane	AC	E	2	475	32	15,700	11/27/23	85	100	0	0	New Construction - Initial	1/1/80
916	1684	Ranchview Drive	Hilltop Drive	Bixby Avenue	AAC	E	2	435	32	13,920	1/4/24	90	100	0	0	Overlay - AC Structural	1/1/19
917	1993	Ranchwood Trail	Amapola Avenue	South End	AC	E	2	1,775	32	58,598	10/26/23	81	31	60	9	Surface Treatment - Slurry Seal	1/1/02
918	1998	Randall Street	Mustang Avenue	Kennymead Avenue	AC	E	1	334	16	5,844	10/25/23	76	65	0	35	Surface Treatment - Slurry Seal	1/1/97
918	3179	Randall Street	Meads Avenue	Mustang Avenue	AC	E	1	795	16	12,720	10/25/23	72	35	23	42	New Construction - Initial	1/1/80
921	1556	Red Robin Street	Swallow Avenue	Blue Jay Avenue	AC	E	2	780	32	26,460	11/27/23	86	53	39	8	Surface Treatment - Slurry Seal	6/1/20
922	2152	Redwood Avenue	Beechwood Street	Ashwood Street	AAC	E	2	415	32	13,280	3/1/24	72	44	56	0	Overlay - AC Structural	1/1/03
923	2035	Regency Avenue	Meredith Street	Via Escola	AC	E	2	1,430	32	45,510	12/4/23	85	67	30	3	Surface Treatment - Slurry Seal	8/1/17
923	2067	Regency Avenue	Meredith Street	Roxbury Street	AC	E	2	580	32	18,560	12/4/23	85	67	33	0	Surface Treatment - Slurry Seal	8/1/17
924	1353	Rembrandt Circle	North End	Garfield Avenue	AAC	E	2	125	32	4,000	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
925	1890	Renee Street	North End	Ryals Lane	AAC	E	2	435	32	15,420	11/1/23	88	100	0	0	Overlay - AC Structural	8/1/16
925	1894	Renee Street	North End	Avendia Palmar	AC	E	2	135	32	4,104	11/1/23	93	100	0	0	Reconstruct with AC	1/31/16
926	1355	Reubens Circle	North End	Garfield Avenue	AC	E	2	125	32	4,000	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
927	1756	Richard Street	North End	Valencia Drive	AC	E	2	435	32	15,420	11/2/23	92	100	0	0	Surface Treatment - Slurry Seal	1/12/24
927	1962	Richard Street	Silverleaf Avenue	Sycamore Avenue	AAC	E	2	395	32	14,140	11/27/23	74	66	0	34	Overlay - AC Structural	10/1/08
927	1964	Richard Street	Walnut AVenue	South End	AAC	E	2	210	32	8,220	11/27/23	68	20	71	9	Surface Treatment - Slurry Seal	11/1/08
928	1216	Richland Avenue	Glassell Street	Rainier Avenue	AC	E	2	840	36	30,240	2/29/24	83	20	80	0	Surface Treatment - Slurry Seal	3/21/22
929	1534	Rick Street	North End	Del Valle Avenue	AAC	E	2	365	32	13,180	11/28/23	86	100	0	0	Overlay - AC Structural	10/1/08
929	1612	Rick Street	Bond Avenue	El Carmen Avenue	AAC	E	2	475	33	15,477	11/28/23	89	42	0	58	2 in overlay	8/31/07
930	1851	Ridge Park Lane	Villa Real Drive	South End	AAC	E	2	655	32	22,760	12/5/23	94	100	0	0	Overlay - AC Structural	10/1/08
931	1874	Ridgecrest Lane	East End	Orange View Lane	AC	E	2	485	32	18,320	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
932	1994	Ridgeline Road	North End	Amapola Avenue	AC	E	2	2,285	22	53,270	10/25/23	75	100	0	0	Surface Treatment - Slurry Seal	1/1/97
935	1819	Ridgeway Road	Glen Canyon Road	East End	AC	E	2	640	32	22,275	12/6/23	76	86	14	0	Surface Treatment - Slurry Seal	1/1/02
935	1820	Ridgeway Road	Meadow Grove Road	Glen Canyon Road	AC	E	2	1,351	36	70,915	12/6/23	77	100	0	0	Surface Treatment - Slurry Seal	1/1/02
1327	8019	Ridgeway Road	Meadow Grove Road	End	AC	E	2	569	36	20,484	10/17/17	94	100	0	0	New Construction - Initial	10/4/12
936	1926	Ridgewood Street	Buckeyewood Avenue	South End	AAC	E	2	170	32	5,440	2/27/24	100	100	0	0	Overlay - AC Structural	6/1/19
936	2123	Ridgewood Street	Glendale Avenue	Briardale Avenue	AAC	E	2	540	32	17,280	2/27/24	81	19	26	55	Overlay - AC Structural	1/1/04
937	1848	Riding Way	Agate Street	East End	AAC	E	2	480	32	16,860	12/12/23	95	100	0	0	Overlay - AC Structural	8/30/21
937	1867	Riding Way	Villa Vista Way	Santiago Boulevard	AAC	E	2	1,085	32	34,720	12/13/23	79	100	0	0	Overlay - AC Structural	1/1/18
938	1224	Rippling Creek Drive	Edgewater Street	Sand Pebble Way	AAC	E	2	630	36	22,680	2/29/24	82	100	0	0	Surface Treatment - Slurry Seal	3/21/22
939	940	River Avenue	Glassell Street	East End	AC	E	2	1,090	32	34,880	4/10/24	82	100	0	0	Surface Treatment - Slurry Seal	1/1/94
941	1220	River Mist Circle	North End	Riverview Avenue	AAC	E	2	205	32	6,560	2/29/24	85	80	16	4	Surface Treatment - Slurry Seal	3/21/22
1328	8010	Riverbend Parkway	Shadyvale Street	Honey Tree Way	AC	E	2	996	40	39,840	2/29/24	88	93	0	7	New Construction - Initial	10/4/12
1328	8011	Riverbend Parkway	Shadyvale Street	Glassell Street	AC	E	2	982	44	43,208	3/19/24	90	96	0	4	New Construction - Initial	10/4/12
1328	8013	Riverbend Parkway	Honey Tree Way	Lincoln Avenue	AC	E	2	1,354	40	54,160	2/29/24	85	96	0	4	New Construction - Initial	10/4/12
943	1227	Riverboat Way	White Shores Drive	Cottonwood Street	AAC	E	2	455	36	16,380	2/29/24	90	100	0	0	Surface Treatment - Slurry Seal	3/21/22

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
945	1205	Riverview Avenue	Hearthside Street	Ashwood Street	AAC	E	2	1,525	32	48,800	2/29/24	81	82	18	0	Surface Treatment - Slurry Seal	3/21/22
945	1219	Riverview Avenue	Richland Street	Driftwood Street	AAC	E	2	605	32	19,360	2/29/24	86	96	0	4	Surface Treatment - Slurry Seal	3/21/22
945	1240	Riverview Avenue	Sunset Street	Gayle Street	AAC	E	2	800	32	25,600	2/29/24	88	100	0	0	Overlay - AC Structural	10/1/08
945	1241	Riverview Avenue	Gayle Street	Santa Lucia Street	AC	E	2	1,070	32	34,240	2/29/24	76	84	0	16	Surface Treatment - Slurry Seal	11/1/08
946	1182	Roberta Drive	James Street	East End	AC	E	2	545	31	18,495	1/26/24	83	100	0	0	New Construction - Initial	4/3/12
946	1458	Roberta Drive	Wheeler Place	East End	AAC	E	2	440	32	15,580	2/23/24	82	97	0	3	Overlay - AC Structural	12/12/12
946	1481	Roberta Drive	Craig Drive	East End	AAC	E	2	430	32	15,260	2/23/24	78	89	11	0	Overlay - AC Structural	10/1/07
946	1499	Roberta Drive	West End	Loretta Drive	AC	E	2	405	32	14,460	2/14/24	82	99	0	1	Surface Treatment - Slurry Seal	1/1/92
948	717	Robin Road	West End	Feldner Road	AAC	E	2	500	32	17,050	3/7/24	80	91	0	9	Surface Treatment - Slurry Seal	1/1/04
948	813	Robin Road	Feldner Road	East End	AAC	E	2	495	32	16,890	3/7/24	64	40	55	5	Surface Treatment - Slurry Seal	1/1/04
949	1876	Robinhood Place	North End	Santiago Blvd (North Side)	AC	E	2	575	32	20,124	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
949	1878	Robinhood Place	Santiago Boulevard (South Side)	North End	AC	E	2	1,280	31	44,180	12/12/23	84	100	0	0	Surface Treatment - Slurry Seal	1/1/02
952	2556	Rock Creek Drive	Bridge	Tustin Street	AC	E	2	365	40	14,563	8/28/24	100	0	0	0	New Construction - Initial	1/1/80
955	2073	Rockridge Circle	North End	Summitridge Lane	AC	E	2	485	32	17,020	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1312	2072	Rockridge Place	Summitridge Lane	Longridge Drive	AC	E	2	510	32	16,820	12/10/24	71	43	30	27	New Construction - Initial	1/1/80
956	1803	Rodeo Circle	Amapola Avenue	South End	AAC	E	2	490	32	17,478	10/26/23	88	100	0	0	Overlay - AC Structural	1/1/21
957	2053	Rolling Green Lane	West End	East End	AC	E	2	1,175	32	40,900	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
958	1422	Romelle Avenue	Laurinda Lane	East End	AC	E	2	155	31	5,955	2/22/24	86	100	0	0	Surface Treatment - Slurry Seal	10/1/13
958	1436	Romelle Avenue	Yorba Street	Loretta Drive	AC	E	2	535	32	17,120	2/22/24	77	64	18	18	Surface Treatment - Slurry Seal	1/1/03
958	1439	Romelle Avenue	Lowry Lane	Yorba Street	AC	E	2	475	32	14,816	2/22/24	83	95	0	5	Surface Treatment - Slurry Seal	1/1/03
958	1440	Romelle Avenue	Breezy Way	Lowry Lane	AC	E	2	245	32	7,648	2/22/24	89	56	44	0	Surface Treatment - Slurry Seal	1/1/03
958	1669	Romelle Avenue	Prospect Street	East End	AC	E	2	255	33	9,515	2/23/24	77	83	0	17	Surface Treatment - Slurry Seal	1/1/91
959	1438	Rosalind Drive	North End	Romelle Avenue	AC	E	2	415	32	13,280	2/22/24	76	80	0	20	New Construction - Initial	1/1/80
959	1492	Rosalind Drive	North End	Washington Avenue	AAC	E	2	155	32	7,210	2/14/24	81	97	0	3	2 in overlay	8/1/09
959	1497	Rosalind Drive	Burdie Lane	Larkstone Drive	AAC	E	2	415	31	13,365	2/22/24	74	48	49	3	2 in overlay	8/28/07
959	22459	Rosalind Drive	North End	Delia Lane	AC	E	2	455	32	15,660	2/22/24	74	41	20	39	New Construction - Initial	1/1/80
959	22460	Rosalind Drive	North End	La Veta Avenue	AC	E	2	531	32	18,092	2/14/24	85	75	0	25	New Construction - Initial	1/1/80
960	1099	Rose Avenue	Glassell Street	Grand Street	AC	E	2	620	35	21,700	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
960	1117	Rose Avenue	Cambridge Street	California Street	AAC	E	2	1,280	32	40,960	2/2/24	81	96	0	4	Overlay - AC Structural	1/1/03
960	1118	Rose Avenue	California Street	Lincoln Street	AC	E	2	620	31	19,220	2/2/24	94	100	0	0	Surface Reconstruction - AC	1/1/03
960	1119	Rose Avenue	Lincoln Avenue	East End	AC	E	2	295	31	9,145	2/2/24	66	43	57	0	Surface Treatment - Slurry Seal	1/1/03
960	1287	Rose Avenue	Tustin STreet	Highland Street	AC	E	2	1,150	31	35,650	3/13/24	74	75	25	0	New Construction - Initial	1/1/80
960	1309	Rose Avenue	Markwood Street	Milford Street	AAC	E	2	215	31	6,665	2/13/24	71	81	19	0	Overlay - AC Structural	12/12/12
960	1310	Rose Avenue	Milford Street	Clinton Sreet	AC	E	2	255	31	7,905	2/13/24	75	100	0	0	Surface Treatment - Slurry Seal	1/1/98
960	1311	Rose Avenue	Clinton Street	Handy Street	AAC	E	2	230	31	7,130	2/13/24	82	100	0	0	Overlay - AC Structural	12/12/12
960	1334	Rose Avenue	Handy Street	Elmwood Street	AC	E	2	475	31	14,725	2/13/24	82	98	0	2	New Construction - Initial	4/3/12
960	1341	Rose Avenue	Hart Street	East End	AC	E	2	660	31	21,510	2/13/24	100	0	0	100	Overlay-Rubber Hot Mix	1/3/23
960	2264	Rose Avenue	Olive Street	Glassell Street	AC	E	2	285	32	9,120	2/15/24	63	59	41	0	Surface Treatment - Slurry Seal	1/1/02
962	2044	Rosemere Street	Via Escola	Townsend Avenue	AC	E	2	160	36	5,760	12/4/23	87	66	34	0	Surface Treatment - Slurry Seal	8/1/17
963	1018	Rosewood Avenue	Cambridge Street	East End	AAC	E	2	840	31	26,040	2/21/24	92	48	0	52	Surface Reconstruction - AC	1/1/02
963	969	Rosewood Avenue	Cypress Street	Fashion Park Street	AAC	E	2	290	34	9,860	3/12/24	91	100	0	0	Overlay - AC Structural	10/11/19
964	1881	Roth Lane	North End	South End	AAC	E	2	540	32	16,256	11/1/23	85	83	17	0	Overlay - AC Structural	8/1/16
966	1574	Roundup Way	Bucksin Way	Goldenspur Way	AC	E	2	535	32	17,120	10/24/23	86	62	33	5	Surface Treatment - Slurry Seal	10/10/19
967	2036	Roxbury Street	North End	Regency Avenue	AC	E	2	520	32	18,140	12/4/23	83	42	58	0	Surface Treatment - Slurry Seal	8/1/17
967	2037	Roxbury Street	Regency Avenue	Springfield Street	AC	E	2	370	32	11,840	12/4/23	92	100	0	0	Surface Treatment - Slurry Seal	8/1/17
967	2038	Roxbury Street	Springfield Street	Hillsborough Avenue	AC	E	2	325	32	11,150	12/4/23	92	85	0	15	Surface Treatment - Slurry Seal	8/1/17
969	2106	Rushmore Street	Waterton Avenue	Yosemite Avenue	AC	E	2	230	32	7,360	11/14/23	76	37	61	2	Surface Treatment - Slurry Seal	10/10/19
970	1271	Russell Drive	North End	Mayfair Avenue	AC	E	2	430	31	13,330	2/27/24	70	49	38	13	New Construction - Initial	1/1/80
971	445	Rustic Gate Way	Nohl Ranch Road	South End	AC	E	2	240	32	7,680	1/4/24	90	100	0	0	Surface Treatment - Slurry Seal	6/1/21
972	1180	Ruth Place	James Street	East End	AC	E	2	185	31	7,335	1/26/24	83	100	0	0	New Construction - Initial	4/3/12
972	1405	Ruth Place	Earlham Street	Wrightwood Street	AAC	E	2	750	32	25,250	2/20/24	79	100	0	0	Overlay - AC Structural	1/31/16
972	1485	Ruth Place	Laurinda Lane	Wellington Street	AC	E	2	1,110	32	36,270	2/14/24	86	100	0	0	Surface Treatment - Slurry Seal	1/1/02
972	1486	Ruth Place	Wheeler Place	Laurinda Lane	AAC	E	2	550	32	17,600	2/14/24	85	66	0	34	Overlay - AC Structural	1/1/02
972	1655	Ruth Place	Prospect Street	Olympia Street	AAC	E	2	935	32	29,670	2/20/24	95	83	0	17	Overlay - AC Structural	6/1/21
973	1879	Ryals Lane	West End	Bobwhite Way	AAC	E	2	1,612	32	52,334	11/1/23	85	100	0	0	Overlay - AC Structural	8/1/16
974	1292	Sacramento Street	Mt. Vernon Avenue	South End	AC	E	2	1,910	32	64,620	2/13/24	96	94	0	6	Complete Reconstruction - AC	6/1/20
974	1324	Sacramento Street	Carrie Avenue	Walnut Avenue	AAC	E	2	1,195	31	37,045	2/13/24	82	100	0	0	Overlay - AC Structural	12/12/12
974	1352	Sacramento Street	Katella Avenue	Hoover Avenue	AAC	E	2	775	31	24,025	2/8/24	89	100	0	0	2 in overlay	8/31/07
974	1376	Sacramento Street	Van Owen Avenue	Katella Avenue	AC	E	2	115	32	3,680	3/1/24	99	100	0	0	Mill and Overlay	3/3/22

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
974	1377	Sacramento Street	North End	Van Owen Avenue	AAC	E	2	935	32	31,020	3/1/24	98	20	0	80	Overlay - AC Structural	3/3/22
974	1520	Sacramento Street	Hoover Avenue	Monroe Avenue	AAC	E	2	1,290	31	39,990	2/8/24	79	44	56	0	2 in overlay	8/31/07
974	1521	Sacramento Street	Monroe Avenue	Jacaranda Avenue	AAC	E	2	525	31	16,275	2/8/24	83	71	29	0	2 in overlay	8/31/07
974	1834	Sacramento Street	Brentford Avenue	Cloverdale Avenue	AC	E	2	360	33	12,630	1/3/24	89	100	0	0	Surface Treatment - Slurry Seal	8/1/16
974	1835	Sacramento Street	Cloverdale Avenue	Taft Avenue	AC	E	2	1,480	31	45,880	1/3/24	83	67	33	0	Surface Treatment - Slurry Seal	8/1/16
974	1862	Sacramento Street	North End	Villa Vista Way	AAC	E	2	185	31	7,235	12/12/23	92	100	0	0	Overlay - AC Structural	1/1/18
975	1815	Saddleback Drive	Orange Park Boulevard	Wildhorse Circle	AAC	E	2	640	21	13,440	10/26/23	95	100	0	0	Overlay - AC Structural	1/1/21
976	1801	Saddlehill Trail	Ranchwood Terrace	East End	AAC	E	2	1,645	20	34,698	10/26/23	95	100	0	0	Overlay - AC Structural	1/1/21
977	1570	Saddlehorn Way	North End	Chandler Ranch	AC	E	2	920	32	31,238	10/24/23	82	67	0	33	Surface Treatment - Slurry Seal	10/10/19
978	1765	Sage Hills Road	Shadow Pines Road	Woodwind Avenue	AC	E	2	545	32	18,190	10/17/23	94	100	0	0	Surface Treatment - Slurry Seal	3/21/22
979	1600	Sagewood Street	North End	Sprucewood Avenue	AC	E	2	245	32	9,638	10/19/23	68	25	75	0	Surface Treatment - Slurry Seal	1/1/18
981	1700	Sail Avenue	Gaff Street	East End	AAC	E	2	300	31	9,300	2/28/24	80	30	0	70	Overlay - AC Structural	12/13/06
981	1707	Sail Avenue	Canal Street	Bourbon Street	AC	E	2	220	31	6,820	3/14/24	45	24	66	10	Surface Treatment - Slurry Seal	1/1/04
983	1785	Salinas Court	Santa Maria Canyon	East End	AC	E	2	415	32	14,380	10/24/23	85	72	26	2	Surface Treatment - Slurry Seal	1/1/18
985	2467	San Alano Avenue	Oceanview Street	South End	AAC	E	2	290	36	10,440	2/28/24	79	95	0	5	Overlay - AC Structural	10/1/08
986	1247	San Alano Place	Santa Anita Street	East End	AAC	E	2	210	32	6,720	2/28/24	82	87	0	13	Overlay - AC Structural	10/1/08
987	1248	San Alto Place	Santa Anita Street	East End	AAC	E	2	200	32	6,400	2/28/24	79	98	0	2	Overlay - AC Structural	10/1/08
987	1254	San Alto Place	Oceanview Street	Gayle Street	AAC	E	2	475	32	15,200	2/28/24	87	82	0	18	Overlay - AC Structural	10/1/08
988	1253	San Bruno Avenue	Gayle Street	Santa Anita Street	AAC	E	2	215	32	6,880	2/28/24	89	57	0	43	Overlay - AC Structural	10/1/08
989	1249	San Carlos Place	Santa Anita Street	East End	AAC	E	2	200	32	6,400	2/28/24	83	56	0	44	Overlay - AC Structural	10/1/08
989	1252	San Carlos Place	West End	Gayle Street	AAC	E	2	520	32	16,640	2/28/24	89	86	0	14	Overlay - AC Structural	10/1/08
990	1720	San Juan Drive	Cannon Stret	Navarro Place	AAC	E	2	555	32	17,568	11/16/23	89	78	16	6	Overlay - AC Structural	1/1/04
990	1721	San Juan Drive	Navarro Place	Jamestown Way	AAC	E	2	1,130	32	36,160	11/16/23	92	60	0	40	Overlay - AC Structural	1/1/04
991	2638	San Lorenzo Court	Serrano Avenue	Magdalena Drive	AC	E	2	310	36	11,910	11/20/23	94	100	0	0	New Construction - Initial	1/1/80
992	1781	San Luis Drive	Santa Cruz Drive	End	AC	E	2	285	32	10,918	10/24/23	80	44	56	0	Surface Treatment - Slurry Seal	1/1/18
992	1782	San Luis Drive	Santa Maria Canyon	Santa Cruz Drive	AC	E	2	1,055	32	34,510	10/24/23	90	100	0	0	Surface Treatment - Slurry Seal	1/1/18
993	2648	San Marcos Court	West End	Sierra Vista Drive	AC	E	2	460	32	16,220	11/20/23	92	100	0	0	Surface Treatment - Slurry Seal	6/1/20
995	2636	San Rafael Court	Magdalena Drive	South End	AC	E	2	235	32	9,020	11/20/23	91	100	0	0	New Construction - Initial	1/1/80
996	1757	San Remo Place	North End	Valencia Drive	AC	E	2	255	32	9,660	11/2/23	96	100	0	0	Surface Treatment - Slurry Seal	3/21/22
997	1225	Sand Pebble Way	White Shores Drive	Rippling Creek Drive	AAC	E	2	190	36	6,840	2/29/24	82	61	0	39	Surface Treatment - Slurry Seal	3/21/22
998	1217	Sandbar Circle	North End	Rainier Avenue	AAC	E	2	225	32	7,200	2/29/24	84	48	52	0	Surface Treatment - Slurry Seal	3/21/22
998	1221	Sandbar Circle	North End	Riverview Avenue	AAC	E	2	238	32	7,616	2/29/24	87	81	19	0	Surface Treatment - Slurry Seal	3/21/22
1000	1889	Sandpiper Circle	North End	Ryals Lane	AAC	E	2	180	32	7,260	11/1/23	90	100	0	0	Overlay - AC Structural	8/1/16
1002	100000	Santa Ana Canyon Road	Santa Anita St	325' e/o Orange Ave	PCC	E	2	1,770	24	42,480	3/28/24	69	9	91	0	New Construction - Initial	1/1/80
1002	100100	Santa Ana Canyon Road	Santa Anita St	Santa Lucia St	PCC	E	2	745	24	17,880	3/28/24	68	8	78	14	New Construction - Initial	1/1/80
1002	100200	Santa Ana Canyon Road	Santa Lucia St	475' e/o Tustin St	PCC	E	2	1,245	20	24,900	3/28/24	63	7	78	15	New Construction - Initial	1/1/80
1002	1230	Santa Ana Canyon Road	Orange-Olive Road	325' e/o Orange-Olive Road	AAC	E	2	325	32	8,450	3/20/24	86	100	0	0	Overlay - AC Structural	10/1/08
1002	1233	Santa Ana Canyon Road	325' e/o Orange-Olive Road	Santa Anita Street	APC	E	2	1,770	36	28,320	3/28/24	86	46	54	0	Overlay - AC Structural	10/1/08
1002	1235	Santa Ana Canyon Road	Santa Anita Street	Santa Lucia Street	AAC	E	2	745	36	11,920	3/28/24	79	37	63	0	Overlay - AC Structural	10/1/08
1002	1930	Santa Ana Canyon Road	Santa Lucia Street	475' e/o Tustin Street	AAC	E	2	1,245	20	12,360	3/28/24	80	54	46	0	Overlay - AC Structural	10/1/08
1003	1243	Santa Anita Street	Riverview Avenue	Santa Ana Canyon	AAC	E	2	1,345	32	43,040	2/28/24	84	77	0	23	Overlay - AC Structural	10/1/08
1004	1246	Santa Barbara Place	North End	Baldwin Avenue	AC	E	2	95	32	3,040	2/29/24	79	98	0	2	Surface Treatment - Slurry Seal	11/1/08
1005	1244	Santa Cecilia Street	Riverview Avenue	Baldwin Avenue	AC	E	2	1,185	32	37,920	2/28/24	84	77	0	23	Surface Treatment - Slurry Seal	1/1/98
1006	1786	Santa Cruz Avenue	Santa Maria Canyon	Mulberry Street	AC	E	2	440	34	15,710	10/24/23	87	100	0	0	Surface Treatment - Slurry Seal	1/1/18
1006	1787	Santa Cruz Avenue	Mulberry Street	San Luis Drive	AC	E	2	395	32	12,640	10/24/23	88	100	0	0	Surface Treatment - Slurry Seal	1/1/18
1007	2580	Santa Fe Place	North End	Lincoln Avenue	AC	E	2	770	32	24,640	12/8/17	89	100	0	0	New Construction - Initial	1/1/80
1008	2649	Santa Isabel Court	North End	San Marcos Court	AC	E	2	110	50	6,000	11/20/23	92	100	0	0	Surface Treatment - Slurry Seal	6/1/20
1009	1242	Santa Lucia Street	Riverview Avenue	Santa Ana Canyon	AC	E	2	1,390	32	44,480	2/28/24	83	100	0	0	Surface Treatment - Slurry Seal	11/1/08
1010	1783	Santa Maria Street	Salinas Court	San Luis Drive	AC	E	2	250	32	8,750	10/24/23	92	100	0	0	Surface Treatment - Slurry Seal	1/1/18
1010	1784	Santa Maria Street	Santa Cruz Drive	Salinas Court	AC	E	2	260	32	9,070	10/24/23	87	100	0	0	Surface Treatment - Slurry Seal	1/1/18
1014	1715	Saratoga Court	San Juan Drive	South End	AAC	E	2	290	32	10,780	11/16/23	74	78	8	14	Overlay - AC Structural	1/31/16
1015	1732	Sarita Place	North End	Valencia Drive	AAC	E	2	200	32	7,900	11/16/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
1016	3323	Scarborough	Avalon Avenue	North End	AC	E	2	242	32	9,244	11/20/23	81	100	0	0	Surface Treatment - Slurry Seal	6/1/20
1017	1406	Schug Street	Wrightwood Street	Ruth Place	AAC	E	2	675	32	23,850	2/20/24	80	95	0	5	Overlay - AC Structural	1/31/16
1017	1639	Schug Street	Jordan Avenue	Fernwood Avenue	AC	E	2	810	32	25,920	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1019	1448	Seba Avenue	Tustin Street	Ponderosa Street	AC	E	2	425	23	9,775	2/21/24	80	79	19	2	New Construction - Initial	1/1/80
1021	2241	Sequoia Avenue	Eckhoff Street	Popular Street	AC	I	2	890	44	39,160	3/8/24	25	9	83	8	Surface Treatment - Slurry Seal	1/1/95
1022	1618	Seranado Street	Walnut Avenue	Spring Street	AAC	E	2	1,275	32	40,416	1/2/24	89	100	0	0	Overlay - AC Structural	10/1/08
1022	2161	Seranado Street	Chapman Avenue	South End	AC	I	2	365	36	14,940	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1023	1841	Serrano Avenue	West End	Santiago Boulevard	AC	E	2	200	32	7,900	4/11/24	68	54	33	13	Surface Treatment - Slurry Seal	1/1/02
1025	1791	Shadow Pines Road	Sage Hills Road	Woodwind Avenue	AC	E	2	500	32	17,500	10/17/23	94	100	0	0	Surface Treatment - Slurry Seal	3/21/22
1026	2027	Shadow Ridge Place	Marywood Lane	South End	AAC	E	2	1,210	32	40,220	12/5/23	84	62	25	13	Overlay - AC Structural	10/1/08
1027	1855	Shady Forest Lane	North End	Feather Hill Lane	AAC	E	2	360	32	12,770	12/5/23	82	84	0	16	Overlay - AC Structural	10/1/08
1027	1856	Shady Forest Lane	Maple Grove Road	Feather Hill Lane	AAC	E	2	1,160	32	37,620	12/5/23	91	90	0	10	Surface Treatment - Slurry Seal	11/1/08
1028	1941	Shady Glen Lane	Maple Tree Street	Nohl Ranch Road	AAC	E	2	495	32	15,648	1/4/24	95	100	0	0	Overlay - AC Structural	1/1/21
1329	8002	Shadyvale Street	Weeping Willow Avenue	Pebble Creek Lane	AC	E	2	454	36	16,344	2/29/24	81	95	0	5	New Construction - Initial	10/4/12
1329	8009	Shadyvale Street	Pebble Creek Lane	Riverbend Parkway	AC	E	2	196	36	7,056	4/15/24	82	74	26	0	New Construction - Initial	10/4/12
1329	8012	Shadyvale Street	Riverbend Parkway	Juneberry Street	AC	E	2	522	36	18,792	2/29/24	85	67	0	33	New Construction - Initial	10/4/12
1029	1042	Shaffer Street	Trenton Avenue	Katella Avenue	AAC	E	2	975	36	35,100	2/15/24	56	100	0	0	Overlay - AC Structural	1/1/95
1029	1078	Shaffer Street	Buckeyewood Avenue	Taft Avenue	AAC	E	2	1,370	36	49,320	2/16/24	94	100	0	0	Overlay - AC Structural	6/1/19
1029	1090	Shaffer Street	Quincy Avenue	Collins Avenue	AAC	E	2	1,300	37	48,100	2/15/24	82	100	0	0	Overlay - AC Structural	1/1/99
1029	1091	Shaffer Street	Hoover Avenue	Quincy Avenue	AAC	E	2	750	37	27,750	2/15/24	82	100	0	0	Overlay - AC Structural	1/1/99
1029	1151	Shaffer Street	Collins Avenue	Everett Place	AAC	E	2	1,435	31	44,485	3/11/24	77	75	5	20	Overlay - AC Structural	1/1/99
1029	1152	Shaffer Street	Everett Place	Walnut Avenue	AAC	E	2	1,140	36	41,040	3/11/24	84	26	0	74	Overlay - AC Structural	1/1/99
1029	1153	Shaffer Street	Walnut Avenue	Palm Avenue	AC	E	2	1,255	34	42,670	2/9/24	72	46	23	31	Surface Reconstruction - AC	1/1/03
1029	1821	Shaffer Street	Meats Avenue	Buckeyewood Avenue	AAC	E	2	1,180	36	42,480	2/16/24	94	100	0	0	Overlay - AC Structural	6/1/19
1029	1822	Shaffer Street	Vista Del Gaviota	Meats Avenue	AAC	E	2	1,510	37	55,870	2/16/24	91	100	0	0	Overlay - AC Structural	8/1/17
1029	2174	Shaffer Street	Katella Avenue	Hoover Avenue	AC	I	2	315	37	11,655	2/15/24	78	100	0	0	Surface Treatment - Slurry Seal	1/1/95
1029	2194	Shaffer Street	Chapman Avenue	Almond Avenue	AAC	I	2	610	34	20,740	3/14/24	94	100	0	0	Overlay - AC Structural	1/1/93
1029	2415	Shaffer Street	Palm Avenue	Maple Avenue	PCC	E	2	620	34	21,080	8/28/24	45	10	67	23	New Construction - Initial	1/1/80
1029	2416	Shaffer Street	Maple Avenue	Chapman Avenue	PCC	E	2	605	34	20,570	8/28/24	48	12	79	9	New Construction - Initial	1/1/80
1029	913	Shaffer Street	La Veta Avenue	South End	AC	E	2	475	36	17,100	2/26/24	95	79	0	21	Complete Reconstruction - AC	6/1/20
1029	914	Shaffer Street	Culver Avenue	La Veta Avenue	AAC	E	2	610	30	18,300	2/26/24	69	33	66	1	Overlay - AC Structural	1/1/03
1029	915	Shaffer Street	Palmyra Avenue	Culver Avenue	AC	E	2	620	30	18,600	2/26/24	71	24	66	10	Surface Treatment - Slurry Seal	1/1/03
1029	916	Shaffer Street	Washington Avenue	Palmyra Avenue	AC	E	2	290	30	8,700	3/13/24	94	92	0	8	Surface Treatment - Slurry Seal	1/1/03
1029	917	Shaffer Street	Almond Avenue	Washington Avenue	AC	E	2	290	30	8,700	2/26/24	72	19	60	21	New Construction - Initial	1/1/80
1029	945	Shaffer Street	Taft Avenue	Chestnut Avenue	AC	E	2	710	32	22,720	2/16/24	81	87	0	13	Surface Reconstruction - AC	5/1/09
1024	2026	Shallow Brook Lane	Marywood Lane	Cottage Hill Drive	AC	E	2	875	36	31,500	12/5/23	63	13	28	59	Surface Treatment - Slurry Seal	1/1/02
1030	1176	Shasta Street	Almond Avenue	Palmyra Avenue	AC	E	2	825	31	25,450	1/2/24	100	0	0	0	New Construction - Initial	4/3/12
1030	1630	Shasta Street	North End	Maple Avenue	AAC	E	2	125	31	5,375	1/2/24	95	100	0	0	Overlay - AC Structural	10/10/19
1031	1671	Shasta Way	North End	Dixon Avenue	AAC	E	2	140	32	6,980	2/23/24	88	93	0	7	Overlay - AC Structural	6/1/21
1032	1039	Shattuck Place	Dana Place	Maple Avenue	AAC	E	2	285	32	9,120	2/21/24	94	90	0	10	Overlay - AC Structural	7/1/09
1032	1040	Shattuck Place	Maple Avenue	Chapman Avenue	AAC	E	2	645	34	21,930	2/21/24	92	93	0	7	Overlay - AC Structural	7/1/09
1032	1041	Shattuck Place	North End	Adams Avenue	AC	E	2	405	31	13,655	2/9/24	90	100	0	0	New Construction - Initial	1/1/80
1032	1052	Shattuck Place	North End	Locust Avenue	AAC	E	2	260	32	9,420	2/9/24	93	100	0	0	Reconstruct with AC	1/31/16
1032	1141	Shattuck Place	Walnut Avenue	Palm Avenue	AC	E	2	1,260	32	40,320	2/27/24	70	61	38	1	Surface Treatment - Chip Seal	12/13/06
1032	2118	Shattuck Place	North End	Briardale Avenue	AAC	E	2	800	32	25,600	3/4/24	85	34	0	66	2 in overlay	8/1/09
1032	2178	Shattuck Place	Collins Avenue	Mayfair Avenue	AAC	I	2	1,115	31	34,565	2/2/24	96	100	0	0	Overlay - AC Structural	6/1/21
1032	979	Shattuck Place	North End	Washington Avenue	AAC	E	2	575	31	18,875	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1034	2211	Shelly Court	Main Street	East End	AC	I	2	430	44	18,920	3/8/24	76	83	17	0	New Construction - Initial	1/1/80
1035	1986	Shenadoah Avenue	Yellowstone Boulevard	Forest Street	AC	E	2	530	32	16,768	11/14/23	82	39	61	0	Surface Treatment - Slurry Seal	10/10/19
1035	1987	Shenadoah Avenue	Lassen Boulevard	Yellowstone Boulevard	AC	E	2	515	32	16,096	11/14/23	76	34	56	10	Surface Treatment - Slurry Seal	10/10/19
1035	1988	Shenadoah Avenue	West End	Lassen Boulevard	AC	E	2	285	32	10,620	10/31/23	78	54	46	0	Surface Treatment - Slurry Seal	10/10/19
1036	1681	Sheri Street	Skywood Street	Bixby Avenue	AC	E	2	765	32	24,480	1/4/24	86	99	1	0	Surface Treatment - Slurry Seal	10/10/19
1037	588	Sheringham Avenue	Windgap Drive	Manchester Avenue	AC	E	2	680	32	21,364	3/7/24	80	98	0	2	Surface Treatment - Slurry Seal	1/1/04
1038	1274	Sherman Avenue	West End	Malena Street	AC	E	2	135	31	5,685	3/4/24	61	92	8	0	Grind Overlay with Dig Outs	10/1/13
1039	1419	Sherwood Avenue	Chipwood Street	East End	AC	E	2	450	31	15,550	1/26/24	100	0	0	0	Overlay-Rubber Hot Mix	1/26/24
1040	1270	Shirley Street	North End	Mayfair Avenue	AC	E	2	430	31	13,330	2/27/24	73	86	13	1	Grind Overlay with Dig Outs	10/1/13
1042	1745	Shoshone Avenue	Sycamore Avenue	East End	AAC	E	2	1,625	32	53,500	11/29/23	95	100	0	0	Overlay - AC Structural	1/1/21
1046	2643	Sierra Vista Drive	Serrano Avenue	Apache Creek Road	AC	E	2	1,575	30	47,250	11/20/23	91	100	0	0	Surface Treatment - Slurry Seal	6/1/20
1047	715	Silktree Circle	La Veta Avenue	South End	AC	E	2	240	32	7,680	3/5/24	77	64	29	7	New Construction - Initial	1/1/80
1048	1539	Silver Leaf Avenue	Earlham Street	East End	AAC	E	2	360	32	13,020	11/27/23	88	100	0	0	Overlay - AC Structural	10/1/08
1048	1550	Silver Leaf Avenue	Hewes Street	Rancho Santiago Boulevard	AAC	E	2	1,270	32	40,448	11/27/23	89	95	0	5	Overlay - AC Structural	10/1/08
1048	1624	Silver Leaf Avenue	Thomas Street	Seranado Street	AAC	E	2	725	32	23,200	1/2/24	89	88	0	12	Overlay - AC Structural	1/1/02
1048	1961	Silver Leaf Avenue	Rancho Santiago Boulevard	Richard Street	AAC	E	2	480	32	15,860	11/27/23	81	96	0	4	Overlay - AC Structural	10/1/08
1049	1075	Silverwood Street	Candlewood Avenue	Chestnut Avenue	AAC	E	2	555	31	17,205	3/4/24	93	62	0	38	Surface Treatment - Slurry Seal	5/27/25
1049	1084	Silverwood Street	North End	Palmdale Avenue	AC	E	2	200	32	6,400	2/27/24	99	100	0	0	Surface Treatment - Slurry Seal	1/1/04
1049	1912	Silverwood Street	North End	Del Mar Avenue	AC	E	2	300	32	9,600	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1049	2116	Silverwood Street	Buckeyewood Avenue	South End	AC	E	2	270	33	8,910	2/27/24	100	0	0	100	Overlay-Rubber Hot Mix	2/1/24
1050	1886	Singingwood Street	North End	Stillwater Avenue	AC	E	2	1,635	36	61,408	11/1/23	73	35	18	47	New Construction - Initial	1/1/80
1051	578	Sirius Avenue	Spinnaker Street	Lewis Street	AC	E	2	795	33	26,043	3/12/24	65	49	44	7	Surface Treatment - Slurry Seal	1/1/03
1051	579	Sirius Avenue	City Limit	Spinnaker Street	AC	E	2	1,150	32	36,416	3/12/24	67	65	35	0	Surface Treatment - Slurry Seal	1/1/03
1052	3347	Sky Gate	Altaview Dr	East End	AC	E	2	171	30	4,950	11/21/23	95	100	0	0	Surface Treatment - Slurry Seal	6/1/20
1053	1595	Skylark Place	Willow Springs Road	Newport Boulevard	AC	E	2	130	34	3,468	4/15/24	76	34	11	55	Surface Treatment - Slurry Seal	1/1/18
1053	1597	Skylark Place	Newport Boulevard	Presido Way	AC	E	2	1,290	36	46,440	10/24/23	94	100	0	0	Surface Treatment - Slurry Seal	6/1/21
1053	1605	Skylark Place	West End	Skylark Place	001	E	2	420	32	15,988	10/19/23	65	30	70	0	Surface Treatment - Slurry Seal	1/1/18
1053	2770	Skylark Place	Presido Way	Canyon View	AC	E	2	1,023	36	38,078	10/24/23	87	56	0	44	Surface Treatment - Slurry Seal	6/1/21
1054	2651	Skyline Drive	Fairecliff Drive	Andover Drive	AC	E	2	697	32	23,804	11/20/23	93	100	0	0	Surface Treatment - Slurry Seal	3/21/22
1055	3321	Skytop Ct	West End	Portico Rd	AC	E	2	667	32	22,844	11/21/23	86	97	0	3	Surface Treatment - Slurry Seal	6/1/20
1057	1679	Skywood Street	Skywood Street	Butterfield Road	AC	E	2	710	32	22,720	1/4/24	90	100	0	0	Surface Treatment - Slurry Seal	10/10/19
1057	1680	Skywood Street	Skywood Street	Bixby Avenue	AC	E	2	730	32	23,360	1/4/24	86	100	0	0	Surface Treatment - Slurry Seal	10/10/19
1059	1969	Smokey Avenue	West End	Glacier Street	AAC	E	2	365	32	13,728	11/20/23	86	100	0	0	Overlay - AC Structural	1/1/18
1059	2101	Smokey Avenue	Everglades Circle	Orange Park Boulevard	AAC	E	2	190	32	6,580	11/20/23	90	100	0	0	Overlay - AC Structural	1/1/18
1059	2103	Smokey Avenue	Orange Park Boulevard	East End	AAC	E	2	365	32	13,180	11/16/23	89	100	0	0	Overlay - AC Structural	1/1/18
1061	2069	Snow Goose Street	Swallow Avenue	Blue Bird Avenue	AC	E	2	545	32	17,940	11/28/23	89	94	0	6	Surface Treatment - Slurry Seal	6/1/20
1062	1895	Solana Drive	Chapman Avenue	South End	AAC	E	2	625	36	22,500	3/6/24	84	10	0	90	Overlay - AC Structural	1/1/04
1063	2033	Somerset Street	Via Escola	Wickham Avenue	AC	E	2	130	32	4,660	12/6/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1064	2542	Somerton Avenue	Preston Street	Camden	AC	E	2	444	32	14,708	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1064	92542	Somerton Avenue	Camden	East End	AC	E	2	757	32	25,724	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
1065	3139	Sonora Circle	Stetson	North End	AC	E	2	472	32	16,604	11/28/23	91	100	0	0	New Construction - Initial	1/1/80
1066	2252	Southern Avenue	Batavia Street	Pacific Street	AC	I	2	1,400	44	61,600	3/1/24	74	80	16	4	Surface Treatment - Slurry Seal	1/1/95
1330	8005	Spicewood Street	Weeping Willow Avenue	Pebble Creek Lane	AC	E	2	465	32	14,880	4/15/24	74	100	0	0	New Construction - Initial	10/4/12
1067	590	Spinnaker Street	Simmons Road	Binnacle Street	AC	E	2	970	33	31,812	3/7/24	72	47	0	53	Surface Treatment - Slurry Seal	1/1/03
1068	2163	Spring Street	McPherson Street	Prospect Street	AC	E	2	1,215	23	27,945	3/29/24	91	100	0	0	New Construction - Initial	1/1/80
1070	2039	Springfield Street	Roxbury Street	Via Escola	AC	E	2	585	32	18,528	12/4/23	90	100	0	0	Surface Treatment - Slurry Seal	8/1/17
1072	733	Spruce Avenue	Eckhoff Street	Sycamore Avenue	AAC	E	2	935	32	29,920	3/6/24	90	93	0	7	Overlay - AC Structural	1/1/22
1073	1794	Sprucewood Avenue	Amberwood Street	Timberland Avenue	AC	E	2	1,110	32	36,270	10/19/23	86	57	43	0	Surface Treatment - Slurry Seal	1/1/18
1074	1708	St. James Avenue	Orange-Olive Road	Dunfield Street	AAC	E	2	770	31	23,870	3/11/24	71	75	25	0	Surface Treatment - Slurry Seal	1/1/04
1074	1712	St. James Avenue	Dunfield Street	Canal Street	AAC	E	2	1,485	31	46,035	2/28/24	74	65	23	12	Surface Treatment - Slurry Seal	1/1/04
1075	2577	St. Thomas Circle	North End	Taft Avenue	AC	E	2	325	44	15,450	3/19/24	54	15	50	35	New Construction - Initial	1/1/80
1076	1719	Stacey Lee Lane	Santiago Boulevard	East End	AAC	E	2	280	32	10,760	3/22/24	93	100	0	0	Overlay - AC Structural	1/1/21
1077	1999	Stallion Street	Clydesdale Avenue	Randall Street	AAC	E	2	1,200	33	40,100	10/25/23	86	47	0	53	Overlay - AC Structural	1/1/04
1080	1166	Stay Court	Jetty Drive	East End	AC	E	2	135	33	5,955	3/12/24	54	38	62	0	Surface Treatment - Slurry Seal	1/1/03
1081	1449	Stearns Avenue	Ponderosa Street	East End	AC	E	2	705	32	23,660	2/21/24	76	87	0	13	New Construction - Initial	1/1/80
1081	1455	Stearns Avenue	Laurinda Lane	Exeter Place	AC	E	2	375	31	11,625	2/22/24	76	83	0	17	Surface Treatment - Slurry Seal	1/1/91
1081	1644	Stearns Avenue	Heathertone Street	Esplanade Street	AAC	E	2	105	32	3,360	1/26/24	75	67	0	33	Overlay - AC Structural	1/31/16
1081	1667	Stearns Avenue	Prospect Street	East End	AC	E	2	260	33	9,680	2/23/24	81	94	0	6	Surface Treatment - Slurry Seal	1/1/91
1082	3132	Stetson	Big Sky	Cheyenne	AC	E	2	1,006	36	36,966	11/28/23	90	100	0	0	New Construction - Initial	1/1/80
1083	740	Stevens Street	Maple Avenue	Chapman Avenue	AC	E	2	600	32	19,200	3/12/24	48	24	74	2	Surface Treatment - Slurry Seal	1/1/97
1083	741	Stevens Street	North End	Maple Avenue	AC	E	2	450	32	14,400	3/12/24	63	23	52	25	Surface Treatment - Slurry Seal	1/1/97
1083	742	Stevens Street	North End	Palm Avenue	AC	E	2	335	32	10,720	3/11/24	77	51	40	9	Surface Treatment - Slurry Seal	1/1/97
1083	743	Stevens Street	Beverly Drive	Cherry Drive	AAC	E	2	270	32	8,640	3/6/24	99	100	0	0	Overlay - AC Structural	1/1/22
1084	2186	Stewart Drive	Main Street	Bush Street	AAC	I	2	330	42	13,860	4/10/24	74	34	63	3	Overlay - AC Structural	1/1/97
1085	1885	Stillwater Avenue	Cannon Street	Singingwood Street	AC	E	2	1,240	36	46,890	11/1/23	69	31	32	37	New Construction - Initial	1/1/80
1089	1904	Stoneridge Street	Blueridge Avenue	Hillcrest Avenue	AAC	E	2	230	31	7,630	12/13/23	95	100	0	0	Overlay - AC Structural	1/1/19
1090	1607	Strawberry Ridge	West End	Willow Springs Road	AC	E	2	300	32	11,100	10/19/23	85	85	15	0	Surface Treatment - Slurry Seal	1/1/18
1092	2091	Suffolk Circle	Stallion Street	East End	AAC	E	2	305	32	11,260	10/25/23	93	79	0	21	Overlay - AC Structural	1/1/04
1331	8006	Sugarberry Street	Weeping Willow Avenue	Pebble Creek Lane	AC	E	2	467	36	16,812	4/15/24	75	100	0	0	New Construction - Initial	10/4/12
1095	2076	Summitridge Lane	Meats Avenue	Rockridge Place	AC	E	2	920	36	33,120	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1095	2077	Summitridge Lane	Rockridge Place	Cerro Villa Drive	AC	E	2	1,340	36	47,984	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1096	1813	Sundance Circle	Turnabout Road	East End	AAC	E	2	345	21	7,245	10/26/23	95	100	0	0	Overlay - AC Structural	1/1/21
1098	586	Sunningdale Drive	Compton Avenue	South End	AC	E	2	270	32	10,140	3/12/24	85	100	0	0	Surface Treatment - Slurry Seal	1/1/04
1099	1239	Sunset Street	Baldwin Avenue	Riverview Avenue	AAC	E	2	1,240	32	39,680	2/28/24	85	65	35	0	Overlay - AC Structural	10/1/08
1100	1674	Sunview Drive	Santa Ana Canyon	East End	AAC	E	2	880	32	28,160	1/4/24	91	100	0	0	Overlay - AC Structural	1/1/19
1100	1683	Sunview Drive	Westhaven Street	Tustin Street	AAC	E	2	985	32	31,520	1/4/24	88	100	0	0	Overlay - AC Structural	1/1/19
1102	2068	Swallow Avenue	Snow Goose Street	Red Robin Street	AC	E	2	665	32	22,780	11/28/23	88	70	30	0	Surface Treatment - Slurry Seal	6/1/20
1103	1553	Swan Street	Blue Jay Avenue	Bond Avenue	AAC	E	2	550	32	17,600	11/27/23	95	100	0	0	Overlay - AC Structural	1/1/21

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1105	1576	Sweetwater Lane	Fieldcrest Lane	South End	AC	E	2	200	32	7,900	10/17/23	86	58	42	0	Surface Treatment - Slurry Seal	1/1/18
1106	1697	Swell Street	White Cap Avenue	South End	AC	E	2	190	31	5,890	2/28/24	71	37	44	19	Surface Reconstruction - AC	1/1/04
1107	1179	Swidler Place	Chapman Avenue	Almond Avenue	AAC	E	2	405	32	13,710	1/26/24	83	65	35	0	Overlay - AC Structural	12/12/12
1107	1659	Swidler Place	North End	La Veta Avenue	AAC	E	2	320	32	11,740	2/20/24	99	65	0	35	Overlay - AC Structural	6/1/21
1107	1660	Swidler Place	La Veta Avenue	685' s/o La Veta Avenue	AAC	E	2	685	31	21,235	2/20/24	86	94	0	6	Overlay - AC Structural	12/14/06
1108	1619	Swidler Street	Walnut Avenue	Spring Street	AAC	E	2	1,275	32	40,800	1/2/24	89	37	0	63	Overlay - AC Structural	1/1/02
1109	1135	Sycamore Avenue	Shaffer Street	Center Street	AC	E	2	290	32	9,280	4/2/24	53	45	37	18	Surface Treatment - Slurry Seal	1/1/02
1109	1136A	Sycamore Avenue	Shaffer Street	Hardwood Street	AAC	E	2	672	34	22,848	2/23/24	89	83	0	17	Overlay - AC Structural	12/16/06
1109	1136B	Sycamore Avenue	Hardwood Street	Cambridge Street	AAC	E	2	640	34	21,760	2/23/24	56	40	59	1	Overlay - AC Structural	12/16/06
1109	1137	Sycamore Avenue	Cambridge Street	Maplewood Street	AAC	E	2	660	41	27,060	3/11/24	78	100	0	0	Overlay - AC Structural	10/1/08
1109	1138	Sycamore Avenue	Maplewood Street	California Street	AAC	E	2	815	31	25,265	2/23/24	80	100	0	0	Overlay - AC Structural	10/1/08
1109	1140	Sycamore Avenue	California Street	Lincoln Street	AC	E	2	480	31	14,880	2/23/24	89	100	0	0	Surface Treatment - Slurry Seal	1/1/02
1109	1300	Sycamore Avenue	Milford Street	Clinton Street	AC	E	2	300	31	9,300	2/13/24	81	98	0	2	Surface Treatment - Slurry Seal	1/1/02
1109	1301	Sycamore Avenue	Sacramento Street	Milford Street	AC	E	2	225	31	6,975	2/13/24	63	45	35	20	Surface Treatment - Slurry Seal	1/1/02
1109	1302	Sycamore Avenue	West End	Sacramento Street	AAC	E	2	225	31	8,775	2/13/24	96	100	0	0	Overlay - AC Structural	10/10/19
1109	1540	Sycamore Avenue	Earlham Street	Hewes Street	AAC	E	2	475	32	14,816	11/27/23	91	100	0	0	Overlay - AC Structural	10/1/08
1109	1620	Sycamore Avenue	Swidler Street	Seranado Street	AAC	E	2	1,180	32	37,568	1/2/24	84	72	0	28	Overlay - AC Structural	10/1/08
1109	1963	Sycamore Avenue	Rancho Santiago Boulevard	Richard Street	AAC	E	2	475	32	15,700	11/27/23	83	52	12	36	Overlay - AC Structural	10/1/08
1109	2480	Sycamore Avenue	Clinton Street	East End	AC	E	2	101	30	4,030	2/13/24	93	87	0	13	Surface Treatment - Slurry Seal	1/1/98
1109	2887	Sycamore Avenue	Wayfield Street	Highland Street	AC	E	2	560	35	19,600	2/27/24	80	77	12	11	Surface Treatment - Slurry Seal	5/27/25
1109	2915	Sycamore Avenue	Cypress Street	West End	AC	E	2	78	32	2,304	4/10/24	100	0	0	0	New Construction - Initial	1/1/80
1109	732	Sycamore Avenue	Donneybrooke Street	Eckhoff Street	AAC	E	2	1,085	36	39,060	3/6/24	98	71	0	29	Overlay - AC Structural	7/7/22
1109	782	Sycamore Avenue	Lemon Street	Glassell Street	AC	E	2	620	32	19,840	3/14/24	65	33	63	4	Surface Treatment - Slurry Seal	1/1/03
1109	783	Sycamore Avenue	Cypress Street	Lemon Street	AC	E	2	295	31	9,145	4/10/24	28	25	62	13	New Construction - Initial	1/1/80
1109	784	Sycamore Avenue	Main Street	Batavia Street	AC	E	2	1,365	31	42,315	2/1/24	74	67	32	1	Complete Reconstruction - AC	10/1/06
1111	757	Sylvan Circle	North End	Crystal View Avenue	AAC	E	2	170	32	5,440	2/29/24	93	100	0	0	Overlay - AC Structural	1/1/19
1112	3490	Taft Avenue	Cannon Street	End	AC	E	2	386	27	10,422	11/21/23	93	100	0	0	New Construction - Initial	10/30/12
1113	2048	Talbot Street	Cornwall Avenue	Fitzgerald Avenue	AC	E	2	325	32	11,900	12/4/23	86	100	0	0	Surface Treatment - Slurry Seal	8/1/17
1114	1802	Tanglewood Terrace	West End	Ranchwood Terrace	AAC	E	2	315	20	8,098	10/26/23	95	100	0	0	Overlay - AC Structural	1/1/21
1115	1808	Teal Lane	West End	Fawnwood Lane	AC	E	2	440	32	16,875	10/17/23	83	62	38	0	Surface Treatment - Slurry Seal	1/1/18
1117	1466	Teri Lane	Palmyra Avenue	Deborah Lane	AAC	E	2	1,070	36	38,008	2/14/24	81	98	0	2	Overlay - AC Structural	12/12/12
1119	1798	Terrace Ridge	Pinnacle Pointe	Canyon Ridge	AC	E	2	205	33	6,765	10/26/23	86	56	44	0	Surface Treatment - Slurry Seal	1/1/04
1118	1872	Terrace View Court	Orange View Lane	South End	AC	E	2	155	32	6,760	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1120	1975	Teton Avenue	Yellowstone Boulevard	East End	AC	E	2	470	32	16,540	11/14/23	84	72	28	0	Surface Treatment - Slurry Seal	10/10/19
1120	1976	Teton Avenue	Lassen Boulevard	Yellowstone Boulevard	AC	E	2	525	32	16,416	11/14/23	79	51	37	12	Surface Treatment - Slurry Seal	10/10/19
1120	1977	Teton Avenue	West End	Lassen Boulevard	AC	E	2	335	32	12,220	10/31/23	84	55	45	0	Surface Treatment - Slurry Seal	10/10/19
1122	2662	The City Way	Manchester Avenue	The City Drive	AC	E	2	410	38	33,620	8/28/24	88	45	55	0	New Construction - Initial	1/1/80
1124	1175	Thomas Street	Century Avenue	Palmyra Avenue	AC	E	2	955	31	30,105	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1124	1536	Thomas Street	Del Valle Avenue	North End	AAC	E	2	365	32	13,180	11/28/23	84	100	0	0	Overlay - AC Structural	10/1/08
1124	1625	Thomas Street	Silver Leaf Avenue	Sycamore Avenue	AAC	E	2	200	32	6,400	3/6/24	83	49	44	7	Overlay - AC Structural	1/1/02
1125	1888	Thora Street	Avendia Palmar	Ryals Lane	AAC	E	2	620	32	19,648	11/1/23	88	88	0	12	Overlay - AC Structural	8/1/16
1126	1652	Tilden Avenue	Olympia Street	East End	AC	E	2	155	32	6,060	2/20/24	72	100	0	0	Surface Treatment - Slurry Seal	1/1/91
1127	576	Tiller Avenue	Halyard Lane	Spinnaker Street	AC	E	2	930	33	31,190	3/7/24	74	72	28	0	Surface Treatment - Slurry Seal	1/1/03
1127	577	Tiller Avenue	Spinnaker Street	Lewis Street	AC	E	2	680	33	22,242	3/7/24	76	76	24	0	Surface Treatment - Slurry Seal	1/1/03
1129	1804	Timberland Avenue	Amberwood Street	South End	AC	E	2	1,645	32	54,140	10/19/23	67	18	61	21	Surface Treatment - Slurry Seal	1/1/18
1131	936	Toluca Avenue	Grand Street	East End	AC	E	2	290	25	7,250	2/26/24	83	98	0	2	Surface Treatment - Slurry Seal	1/1/95
1132	1833	Topaz Street	Grove Avenue	South End	AC	E	2	180	31	7,080	1/3/24	71	39	52	9	Surface Treatment - Slurry Seal	8/1/16
1133	2158	Torres Street	St. James Avenue	Heim Avenue	AAC	E	2	800	32	25,600	2/28/24	87	99	0	1	Overlay - AC Structural	12/13/06
1135	2064	Townsend Avenue	Crossgate Street	Rosemere Street	AC	E	2	860	36	32,460	12/4/23	84	65	35	0	Surface Treatment - Slurry Seal	8/1/17
1136	1462	Tracy Lane	Palmyra Avenue	Deborah Lane	AAC	E	2	1,005	36	36,930	2/14/24	86	93	0	7	Overlay - AC Structural	12/12/12
1137	1770	Trails End Lane	Chapman Avenue	White Oak Ridge	AAC	E	4	500	58	28,500	10/19/23	95	100	0	0	Overlay - AC Structural	1/31/16
1138	1363	Trenton Avenue	Sacramento Street	Handy Street	AAC	E	2	1,160	32	37,120	3/1/24	99	37	0	63	Overlay - AC Structural	3/3/22
1138	1366	Trenton Avenue	Kathleen Street	East End	AAC	E	2	255	32	10,460	3/4/24	90	69	24	7	Overlay - AC Structural	1/1/04
1138	1374	Trenton Avenue	Harding Street	East End	AAC	E	2	240	32	9,180	3/4/24	88	100	0	0	Overlay - AC Structural	11/13/06
1138	2173	Trenton Avenue	West End	Highland Street	AAC	E	2	230	36	8,280	3/1/24	88	33	0	67	Overlay - AC Structural	1/1/02
1138	2230	Trenton Avenue	Main Street	East End	AC	I	2	805	44	36,920	3/8/24	86	77	0	23	Surface Treatment - Slurry Seal	1/1/94
1138	941	Trenton Avenue	Baxter Street	East End	AC	E	2	1,545	32	50,590	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1138	942	Trenton Avenue	Cambridge Street	Baxter Street	AC	E	2	1,025	33	33,825	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1138	943	Trenton Avenue	Shaffer Street	Cambridge Street	AAC	E	2	935	32	29,920	2/15/24	70	85	0	15	Surface Treatment - Slurry Seal	5/27/25

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1138	944	Trenton Avenue	Glassell Street	Shaffer Street	AAC	E	2	1,300	32	41,600	5/27/25	100	0	0	0	Overlay - AC Structural	5/27/25
1140	1012	Tularosa Avenue	Gardner Street	East End	AAC	E	2	130	32	5,310	2/21/24	72	100	0	0	Overlay - AC Structural	1/1/99
1140	1013	Tularosa Avenue	Cambridge Street	Gardner Street	AAC	E	2	375	31	11,625	2/20/24	91	53	0	47	Overlay - AC Structural	10/1/08
1140	1014	Tularosa Avenue	West End	Cambridge Street	AC	E	2	560	32	19,070	2/23/24	65	52	39	9	Surface Treatment - Slurry Seal	1/1/03
1140	967	Tularosa Avenue	West End	Fashion Park Street	AAC	E	2	300	34	10,200	3/12/24	92	100	0	0	Overlay - AC Structural	10/11/19
1332	8003	Tulip Tree Avenue	Spicewood Street	Shadyvale Street	AC	E	2	647	36	23,292	4/15/24	82	100	0	0	New Construction - Initial	10/4/12
1332	8004	Tulip Tree Avenue	Shadyvale Street	Sugarberry Street	AC	E	2	745	36	26,820	4/15/24	73	100	0	0	New Construction - Initial	10/4/12
1142	1814	Turnabout Road	Sundance Circle	Wildhorse Circle	AAC	E	2	605	21	12,705	10/26/23	95	100	0	0	Overlay - AC Structural	1/1/21
1146	2391	University Avenue	Glassell Street	330' e/o Glassell Street	AC	E	2	330	32	10,560	12/7/17	92	33	35	32	New Construction - Initial	1/1/80
1147	1723	Valencia Drive	West End	Jamestown Way	AAC	E	2	365	32	13,478	11/16/23	81	57	0	43	Overlay - AC Structural	1/31/16
1147	1751	Valencia Drive	Cannon Street	East End	AAC	E	2	1,180	32	37,568	11/16/23	90	93	0	7	Overlay - AC Structural	1/31/16
1147	1754	Valencia Drive	Linda Vista Street	Cannon Street	AAC	E	2	740	32	23,680	11/16/23	100	0	0	0	Overlay - AC Structural	3/3/22
1147	1755	Valencia Drive	West End	Linda Vista Street	AAC	E	2	1,120	32	37,638	11/2/23	95	100	0	0	Overlay - AC Structural	3/3/22
1148	1713	Valley Forge Drive	Jamestown Way	Portsmouth Circle	AAC	E	2	340	32	11,380	11/16/23	83	100	0	0	Overlay - AC Structural	1/31/16
1148	1726	Valley Forge Drive	West End	Jamestown Way	AAC	E	2	380	32	13,958	11/16/23	88	100	0	0	Overlay - AC Structural	1/31/16
1149	3418	Valley Glen Lane	Nohl Ranch Road	Nohl Canyon Road	AAC	E	2	1,250	26	32,344	1/4/24	94	79	0	21	Overlay - AC Structural	1/1/21
1150	1936	Valley View Drive	Hilltop Drive	Bixby Avenue	AAC	E	2	495	32	15,480	1/4/24	92	100	0	0	Overlay - AC Structural	1/1/19
1151	1005	Van Bibber Avenue	Greengrove Drive	East End	AAC	E	2	335	31	11,435	2/20/24	89	55	0	45	Overlay - AC Structural	10/1/08
1151	921	Van Bibber Avenue	Shaffer Street	Harwood Street	AC	E	2	625	30	18,750	2/26/24	83	66	0	34	Surface Treatment - Slurry Seal	1/1/03
1151	924	Van Bibber Avenue	Pine Street	Cambridge Street	AAC	E	2	335	32	10,720	2/23/24	84	61	12	27	Overlay - AC Structural	1/1/03
1151	999	Van Bibber Avenue	Cambridge Street	Penn Drive	AC	E	2	1,125	31	34,875	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1152	1356	Van Gogh Circle	North End	Garfield Avenue	AC	E	2	125	32	4,000	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1153	1046	Van Owen Avenue	Cambridge Street	East End	AC	E	2	1,395	33	47,185	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1153	1364	Van Owen Avenue	Sacramento Street	Handy Street	AAC	E	2	1,215	32	38,880	3/1/24	98	38	0	62	Overlay - AC Structural	3/3/22
1153	1367	Van Owen Avenue	Kathleen Street	East End	AAC	E	2	305	32	11,260	3/4/24	92	79	0	21	Overlay - AC Structural	1/1/04
1153	1381	Van Owen Avenue	Harding Street	East End	AAC	E	2	340	32	10,880	3/4/24	82	100	0	0	Overlay - AC Structural	11/13/06
1153	2170	Van Owen Avenue	Tustin Street	East End	AC	E	2	850	37	31,450	4/3/24	46	40	45	15	New Construction - Initial	1/1/80
9999A	1A	Via El Modena	Hewes st	East end	AC	E	0	115	30	3,450	4/3/24	59	100	0	0	New Construction - Initial	10/1/22
1158	2359	Via Lardo Avenue	Hewes Street	East End	AC	E	2	515	32	16,224	3/6/24	77	71	28	1	Surface Treatment - Slurry Seal	1/1/92
1160	1272	Victoria Drive	North End	Mayfair Avenue	AC	E	2	430	31	13,330	2/27/24	72	98	0	2	Grind Overlay with Dig Outs	10/1/13
1163	391	Villa Park Road	Tustin Street	East End	AC	E	2	820	33	27,060	12/7/17	96	60	0	40	New Construction - Initial	1/1/80
1165	1861	Villa Vista Way	West End	Santiago Boulevard	AAC	E	2	1,085	31	35,435	12/12/23	86	94	0	6	Overlay - AC Structural	1/1/18
1165	1865	Villa Vista Way	Santiago Boulevard	Colorado Lane	AAC	E	2	1,240	32	39,680	12/13/23	90	100	0	0	Overlay - AC Structural	1/1/18
1161	2641	Villanueva Drive	West End	San Lorenzo Court	AC	E	2	1,455	32	46,560	11/20/23	91	42	0	58	New Construction - Initial	1/1/80
1161	2642	Villanueva Drive	San Lorenzo Court	East End	AC	E	2	170	32	6,940	11/20/23	95	100	0	0	New Construction - Initial	1/1/80
1166	1628	Vine Avenue	West End	Olympa Way	AAC	E	2	570	32	19,740	1/2/24	95	100	0	0	Overlay - AC Structural	10/10/19
1168	1478	Violet Lane	Almond Avenue	Palmyra Avenue	AAC	E	2	845	32	27,790	1/26/24	82	77	0	23	Overlay - AC Structural	10/1/07
1168	1479	Violet Lane	Palmyra Avenue	Craig Drive	AAC	E	2	665	32	21,280	2/14/24	93	96	0	4	Overlay - AC Structural	10/1/07
1169	1631	Virage Street	Walnut Avenue	Spring Street	AAC	E	2	1,290	36	46,184	1/2/24	84	86	0	14	Overlay - AC Structural	10/1/08
1170	1954	Vista Bluff Road	Vista Royale Drive	Vista Canyon Road	AC	E	2	630	32	20,910	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1171	1955	Vista Canyon Road	Santiago Boulevard	Vista Bluff Road	AC	E	2	1,635	32	52,320	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1172	1952	Vista Circle	Vista Royale Drive	South End	AC	E	2	205	32	8,060	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1173	1953	Vista Court	Vista Royale Drive	South End	AC	E	2	225	32	8,700	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
1174	1958	Vista Crest Road	Vista Ridge Drive	Vista Point Drive	AC	E	2	780	32	25,460	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1175	2144	Vista Del Gaviota	Orange-Olive Road	Northumberland Street	AC	E	2	1,700	32	54,400	2/16/24	83	93	0	7	Surface Treatment - Slurry Seal	1/1/98
1176	2135	Vista Del Playa	Shaffer Street	Northumberland Street	AC	E	2	1,610	31	49,910	2/16/24	77	55	45	0	Surface Treatment - Slurry Seal	1/1/98
1176	2136	Vista Del Playa	Maplewood Street	Greengrove Street	AAC	E	2	585	32	18,720	2/16/24	80	100	0	0	Overlay - AC Structural	8/1/17
1176	2137	Vista Del Playa	Northumberland Street	Maplewood Place	AC	E	2	250	31	7,750	2/16/24	80	100	0	0	Surface Treatment - Slurry Seal	1/1/98
1176	3463	Vista Del Playa	Greengrove Drive	Canal Street	AC	E	2	185	32	5,920	2/16/24	90	100	0	0	Surface Treatment - Slurry Seal	1/1/98
1177	1950	Vista Glen Road	Vista Park Avenue	Vista Canyon Road	AC	E	2	575	32	18,208	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1178	1957	Vista Heights Road	Vista Ridge Drive	Vista Point Drive	AC	E	2	685	32	22,670	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1179	2078	Vista Knoll Road	Vista Royale Drive	Vista Mesa Way	AC	E	2	450	32	14,900	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1180	1949	Vista Mesa Way	Vista Glen Road	Vista Knoll Road	AC	E	2	910	32	29,870	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1181	1938	Vista Park Avenue	Santiago Boulevard	Vista Glen Road	AC	E	2	215	34	7,310	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1182	1956	Vista Point Drive	Vista Canyon Road	Vista Crest Road	AC	E	2	815	32	26,830	12/13/23	95	0	0	100	Surface Treatment - Slurry Seal	5/27/23
1183	1959	Vista Ridge Drive	Vista Heights Road	South End	AC	E	2	915	32	30,030	12/13/23	99	0	0	100	Surface Treatment - Slurry Seal	5/27/23
1184	1951	Vista Royale Drive	Vista Park Avenue	Vista Bluff Road	AC	E	2	1,250	32	40,750	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1185	1960	Vista Valley Road	Vista Ridge Drive	South End	AC	E	2	650	32	22,300	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1334	8018	Walnut Ave	Cul-de-sac	East End	AC	E	2	258	32	8,256	10/23/17	100	100	0	0	New Construction - Initial	10/4/12

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1186	1610	Walnut Avenue	Prospect Street	Swidler Place	AC	E	2	950	36	34,200	1/2/24	83	62	16	22	New Construction - Initial	1/1/80
1186	535	Walnut Avenue	Park Lane	East End	AC	E	2	450	36	17,700	4/2/24	63	59	38	3	New Construction - Initial	1/1/80
1186	536	Walnut Avenue	West End	Milford Road	AC	E	2	700	37	28,400	4/2/24	73	88	0	12	New Construction - Initial	1/1/80
1186	540	Walnut Avenue	Swidler Place	Gravier Street	AAC	E	2	155	36	5,580	1/2/24	93	100	0	0	Overlay - AC Structural	10/1/08
1186	541	Walnut Avenue	Gravier Street	Seranado Street	AAC	E	2	1,045	36	37,620	1/2/24	75	66	8	26	Overlay - AC Structural	10/1/08
1186	542	Walnut Avenue	Seranado Street	Earlham Street	AAC	E	2	930	36	33,480	1/2/24	81	100	0	0	Overlay - AC Structural	10/1/08
1188	1579	Walnut Ridge Road	West End	Deep Spring Road	AC	E	2	595	32	19,040	10/17/23	87	100	0	0	Surface Treatment - Slurry Seal	1/1/18
1190	1392	Warbler Place	Brookside Avenue	South End	AC	E	2	170	32	6,940	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
1190	1393	Warbler Place	North End	Lakeside Avenue	AC	E	2	445	32	15,740	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
1190	1903	Warbler Place	North End	Blueridge Avenue	AAC	E	2	520	32	19,140	1/3/24	93	100	0	0	Overlay - AC Structural	1/1/21
1191	1183	Washington Avenue	Olympia Street	East End	AAC	E	2	410	32	14,620	1/26/24	84	100	0	0	Overlay - AC Structural	12/12/12
1191	1472	Washington Avenue	Wayfield Street	Park Lane	AAC	E	2	300	31	9,300	3/14/24	79	57	43	0	Overlay - AC Structural	2/1/10
1191	1490	Washington Avenue	Loretta Drive	Malena Street	AC	E	2	535	32	17,620	2/14/24	85	67	0	33	Surface Treatment - Slurry Seal	1/1/02
1191	1491	Washington Avenue	Rosalind Drive	Loretta Drive	AAC	E	2	345	32	11,540	2/14/24	86	100	0	0	2 in overlay	8/1/09
1191	2357	Washington Avenue	Hewes Street	East End	AAC	E	2	1,035	36	37,260	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1191	2368	Washington Avenue	Esplanade Street	Hewes Street	AAC	E	2	1,125	32	35,808	2/23/24	72	83	14	3	Overlay - AC Structural	1/1/04
1191	2409	Washington Avenue	Glassell Street	Orange Street	PCC	E	2	325	33	10,725	8/26/24	65	24	53	23	New Construction - Initial	1/1/80
1191	2776	Washington Avenue	Lincoln Avenue	Tustin Avenue	AC	E	2	595	31	18,445	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1191	808	Washington Avenue	Clark Street	East End	AC	E	2	110	32	4,570	3/12/24	60	48	52	0	Surface Treatment - Slurry Seal	1/1/04
1191	975	Washington Avenue	Orange Street	Center Street	AC	E	2	645	34	21,930	2/26/24	81	37	59	4	Surface Treatment - Slurry Seal	8/1/17
1191	976	Washington Avenue	Center Street	Harwood Street	AC	E	2	950	34	32,300	2/26/24	94	100	0	0	Surface Treatment - Slurry Seal	1/1/03
1191	977	Washington Avenue	Harwood Street	Cambridge Street	AC	E	2	625	35	21,875	3/13/24	92	100	0	0	Surface Treatment - Slurry Seal	1/1/03
1191	998	Washington Avenue	Waverly Street	East End	AAC	E	2	455	31	15,105	2/21/24	89	95	0	5	Overlay - AC Structural	10/1/08
1192	981	Water Street	Chapman Avenue	Almond Avenue	AAC	E	2	615	35	21,525	2/20/24	100	0	0	100	Overlay - AC Structural	1/13/16
1193	2148	Waterberry Street	North End	Glendora Avenue	AAC	E	2	235	33	7,755	2/28/24	86	63	5	32	Overlay - AC Structural	12/13/06
1194	2057	Waterford Street	Newgate Way	South End	AC	E	2	825	25	22,410	12/6/23	92	100	0	0	Surface Treatment - Slurry Seal	8/1/17
1194	2058	Waterford Street	Courtland Street	New Gate Way	AC	E	2	285	30	8,550	12/6/23	79	86	9	5	Surface Treatment - Slurry Seal	8/1/17
1194	2059	Waterford Street	Meridian Street	Courtland Street	AC	E	2	235	30	7,800	12/6/23	86	100	0	0	Surface Treatment - Slurry Seal	8/1/17
1195	1967	Waterton Avenue	Orange Park Boulevard	Yosemite Avenue	AAC	E	2	765	32	24,288	11/14/23	90	100	0	0	Overlay - AC Structural	1/1/18
1195	2105	Waterton Avenue	Orange Park Boulevard	East End	AC	E	2	1,090	32	35,030	11/14/23	83	64	36	0	Surface Treatment - Slurry Seal	10/10/19
1197	1031	Waverly Street	Maple Avenue	Chapman Avenue	AAC	E	2	600	34	20,400	2/21/24	88	62	38	0	Overlay - AC Structural	7/1/09
1197	1032	Waverly Street	Palm Avenue	Maple Avenue	AC	E	2	610	34	20,740	3/15/24	55	39	32	29	Surface Treatment - Slurry Seal	1/1/02
1197	1033	Waverly Street	Sycamore Avenue	Palm Avenue	AAC	E	2	615	32	19,680	2/23/24	82	57	41	2	Overlay - AC Structural	1/1/02
1197	1122	Waverly Street	North End	Walnut Avenue	AC	E	2	625	32	20,000	2/2/24	87	43	57	0	Surface Treatment - Slurry Seal	1/1/03
1197	1123	Waverly Street	Collins Avenue	Oakmont Avenue	AC	E	2	825	31	25,575	2/2/24	69	53	47	0	Surface Treatment - Slurry Seal	1/1/03
1197	980	Waverly Street	Chapman Avenue	Almond Avenue	AC	E	2	605	30	18,150	2/20/24	86	100	0	0	New Construction - Initial	1/1/80
1197	995	Waverly Street	Palmyra Avenue	South End	AAC	E	2	235	32	8,570	2/23/24	43	29	22	49	Overlay - AC Structural	10/1/08
1197	996	Waverly Street	Almond Avenue	Palmyra Avenue	AAC	E	2	600	14	6,900	2/23/24	92	56	0	44	Overlay - AC Structural	10/1/08
1187	1264	Wayfield Circle	Palm Avenue	South End	AC	E	2	110	32	3,520	3/4/24	84	100	0	0	Surface Treatment - Slurry Seal	5/27/25
1187	1267	Wayfield Circle	Walnut Avenue	Palm Avenue	AAC	E	2	1,265	42	53,130	2/27/24	74	67	16	17	Surface Treatment - Slurry Seal	5/27/25
1187	1284	Wayfield Circle	Orange Grove Avenue	Walnut Avenue	AAC	E	2	540	31	16,740	2/26/24	91	100	0	0	Surface Reconstruction - AC	1/1/04
1187	1451	Wayfield Circle	North End	Kirkwood Avenue	AAC	E	2	255	32	9,260	2/21/24	100	0	0	100	Overlay - AC Structural	2/1/24
1187	1470	Wayfield Circle	Palmyra Avenue	South End	AAC	E	2	270	31	9,370	3/14/24	85	100	0	0	Overlay - AC Structural	2/1/10
1187	1471	Wayfield Circle	North End	Palmyra Avenue	AC	E	2	1,105	31	35,305	3/14/24	87	33	67	0	Complete Reconstruction - AC	11/2/06
1187	2162	Wayfield Circle	North End	Chapman Avenue	AC	I	2	665	32	22,330	3/4/24	59	29	54	17	Surface Treatment - Slurry Seal	8/1/09
1335	8000	Weeping Willow Avenue	Shadyvale Street	Spicewood Street	AC	E	2	579	32	18,528	4/15/24	71	100	0	0	New Construction - Initial	10/4/12
1335	8001	Weeping Willow Avenue	Shadyvale Street	Sugarberry Street	AC	E	2	696	32	22,272	4/15/24	75	98	0	2	New Construction - Initial	10/4/12
1199	1429	Wellington Road	Hartford Road	Gainsborough Road	AAC	E	2	755	31	23,905	2/22/24	88	97	0	3	2 in overlay	8/28/07
1200	1487	Wellington Street	Ruth Place	La Veta Avenue	AC	E	2	275	32	9,300	2/23/24	64	99	0	1	Surface Treatment - Slurry Seal	1/1/02
1201	1642	Wesley Street Pvt	Kirkwood Avenue	South End	AC	E	2	150	32	7,300	11/6/17	81	88	0	12	Surface Treatment - Slurry Seal	1/1/02
1203	1192	West Way Avenue	Glassel	Crestwood	AAC	E	2	703	32	22,496	2/29/24	82	27	34	39	Cold Milling	12/14/06
1203	1192	West Way Avenue	Glassel	Crestwood	AAC	E	2	703	32	22,496	2/29/24	82	27	34	39	Overlay - AC Structural	12/14/06
1203	1193	West Way Avenue	West End	Crestwood Street	AAC	E	2	345	32	11,040	3/1/24	93	84	3	13	Cold Milling	12/14/06
1203	1193	West Way Avenue	West End	Crestwood Street	AAC	E	2	345	32	11,040	3/1/24	93	84	3	13	Overlay - AC Structural	12/14/06
1203	1193	West Way Avenue	West End	Crestwood Street	AAC	E	2	345	32	11,040	3/1/24	93	84	3	13	Patching - AC Leveling	12/14/06
1203	1194	West Way Avenue	Batavia Street	Capri Street	AC	E	2	255	32	8,160	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1204	1682	Westhaven Street	Bolingridge Drive	Bixby Avenue	AAC	E	2	1,085	32	34,720	1/4/24	93	100	0	0	Overlay - AC Structural	1/1/19
1205	2588	Weston Street	Via Escola	Ashford Avenue	AC	E	2	125	36	4,500	10/25/17	98	100	0	0	Surface Treatment - Slurry Seal	11/1/08
1205	2593	Weston Street	North End	Via Escola	AC	E	2	690	32	23,580	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1206	2075	Westridge Drive	Meadowridge Road	Longridge Drive	AC	E	2	1,485	32	46,020	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1208	1424	Wheeler Place	Larkstone Drive	115' s/o Larkstone Drive	AAC	E	2	115	32	3,680	5/27/25	100	0	0	0	Overlay - AC Structural	5/27/25
1208	1476	Wheeler Place	Ruth Place	La Veta Avenue	AC	E	2	455	32	14,368	2/14/24	81	98	0	2	Surface Treatment - Slurry Seal	1/1/92
1208	1484	Wheeler Place	Palmyra Avenue	Ruth Place	AAC	E	2	870	32	27,840	2/14/24	83	100	0	0	Overlay - AC Structural	12/12/12
1208	1493	Wheeler Place	North End	Washington Avenue	AAC	E	2	175	32	7,100	2/14/24	77	98	0	2	2 in overlay	8/1/09
1209	1275	Wheeler Street	Killingswoth Avenue	Chapman Avenue	AC	E	2	940	31	29,640	3/4/24	48	61	39	0	Surface Treatment - Slurry Seal	1/1/02
1211	1695	White Cap Avenue	Orange-Olive Avenue	Anchor Street	AC	E	2	805	37	29,785	3/19/24	53	34	52	14	Surface Treatment - Slurry Seal	1/1/04
1213	1554	White Dove Avenue	Swan Street	East End	AC	E	2	375	32	13,500	11/27/23	91	75	25	0	Surface Treatment - Slurry Seal	6/1/20
1213	1555	White Dove Avenue	West End	Swan Street	AAC	E	2	600	32	20,700	11/27/23	93	100	0	0	Overlay - AC Structural	1/1/21
1214	1933	White Lantern Lane	Nohl Canyon Road	Nohl Ranch Road	AAC	E	2	1,005	26	26,130	1/4/24	95	100	0	0	Overlay - AC Structural	1/1/21
1215	1586	White Oak Ridge	Newport Boulevard	Deep Springs Road	AAC	E	2	560	44	24,640	10/19/23	94	100	0	0	Overlay - AC Structural	1/31/16
1215	1588	White Oak Ridge	Willow Springs Road	Newport Boulevard	AC	E	2	165	34	4,658	10/19/23	81	25	75	0	Surface Treatment - Slurry Seal	1/1/18
1215	1589	White Oak Ridge	Morning Glory Way	Willow Springs road	AC	E	2	1,040	32	34,780	10/19/23	71	32	67	1	Surface Treatment - Slurry Seal	1/1/18
1215	1768	White Oak Ridge	Royal Oak Drive	Fort Road	AAC	E	2	1,335	41	48,060	10/17/23	94	100	0	0	Overlay - AC Structural	1/31/16
1215	1769	White Oak Ridge	Deep Spring Road	Royal Oak Drive	AAC	E	2	1,565	36	56,340	10/17/23	94	100	0	0	Overlay - AC Structural	1/31/16
1215	1789	White Oak Ridge	Fort Road	Canyon View Avenue	AC	E	2	1,485	36	53,460	4/15/24	87	100	0	0	Surface Treatment - Slurry Seal	1/1/96
1216	1226	White Shores Drive	Sand Pebble Way	Riverboat Way	AAC	E	2	235	36	8,460	2/29/24	84	73	0	27	Surface Treatment - Slurry Seal	3/21/22
1217	2029	White Spring Lane	Shadow Ridge Lane	East End	AC	E	2	440	32	15,580	12/5/23	80	57	0	43	Surface Treatment - Slurry Seal	1/1/02
1219	2050	Whitehall Avenue	Cornwall Avenue	Hillsborough Avenue	AC	E	2	550	32	18,100	12/4/23	83	58	42	0	Surface Treatment - Slurry Seal	8/1/17
1220	2034	Wickham Avenue	Somerset Street	East End	AC	E	2	450	32	16,948	12/6/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1221	1086	Widdows Way	Palmdale Avenue	Taft Avenue	AAC	E	2	260	36	9,360	2/27/24	97	100	0	0	Overlay - AC Structural	10/11/19
1221	2126	Widdows Way	Briardale Avenue	Palmdale Avenue	AAC	E	2	295	32	9,440	2/27/24	90	90	0	10	Overlay - AC Structural	10/11/19
1222	2090	Wilderness Avenue	Meads Avenue	Stallion Street	AAC	E	2	615	32	19,680	10/25/23	79	25	69	6	Overlay - AC Structural	1/1/04
1222	2092	Wilderness Avenue	Mustang Avenue	Kennymead Avenue	AAC	E	2	340	32	10,880	10/25/23	95	100	0	0	Overlay - AC Structural	1/1/21
1222	2476	Wilderness Avenue	Stallion Street	East End	AAC	E	2	340	32	12,678	10/25/23	94	100	0	0	Overlay - AC Structural	1/1/04
1223	1603	Wildflower Avenue	West End	Willow Springs Road	AC	E	2	520	32	18,938	10/19/23	85	74	26	0	Surface Treatment - Slurry Seal	1/1/18
1224	1816	Wildhorse Circle	Saddleback Drive	South End	AAC	E	2	290	21	6,090	10/26/23	93	100	0	0	Overlay - AC Structural	1/1/21
1226	1743	Williamsburg Street	North End	Lexington Avenue	AAC	E	2	395	32	14,440	11/21/23	91	100	0	0	Overlay - AC Structural	1/1/02
1227	734	Willow Avenue	Eckhoff Street	Sycamore Avenue	AC	E	2	1,485	32	47,520	3/6/24	62	41	55	4	Surface Treatment - Slurry Seal	1/1/04
1228	1591	Willow Springs Road	North End	White Oak Ridge	AC	E	2	495	32	17,638	10/19/23	75	32	67	1	Surface Treatment - Slurry Seal	1/1/18
1228	1592	Willow Springs Road	White Oak Ridge	South End	AC	E	2	520	32	18,438	10/19/23	74	42	49	9	Surface Treatment - Slurry Seal	1/1/18
1228	1594	Willow Springs Road	North End	Oak Tree Lane	AC	E	2	505	32	19,458	10/19/23	68	31	69	0	Surface Treatment - Slurry Seal	1/1/18
1228	1604	Willow Springs Road	Wildflower Avenue	Skylark Place	AC	E	2	955	32	31,810	10/19/23	78	40	42	18	Surface Treatment - Slurry Seal	1/1/18
1230	1058	Wilson Avenue	California Street	Lincoln Street	AAC	E	2	665	32	21,280	2/9/24	94	100	0	0	Overlay - AC Structural	1/1/04
1230	1064	Wilson Avenue	Cambridge Street	California Street	AAC	E	2	955	32	30,560	2/9/24	84	26	43	31	Overlay - AC Structural	1/1/04
1230	1094	Wilson Avenue	Glassell Street	Shaffer Street	AAC	E	2	1,255	31	38,905	3/5/24	94	100	0	0	Overlay - AC Structural	6/1/21
1230	1095	Wilson Avenue	Shaffer Street	Cambridge Street	AC	E	2	1,275	31	39,525	2/9/24	72	27	60	13	New Construction - Initial	1/1/80
1230	1196	Wilson Avenue	Lemon Street	Glassell Street	AAC	E	2	595	31	18,445	2/15/24	80	79	21	0	Surface Reconstruction - AC	1/1/93
1230	1344	Wilson Avenue	Hart Street	Adams Avenue	AAC	E	2	900	31	27,900	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1230	1349	Wilson Avenue	Sacramento Street	Hoover Avenue	AAC	E	2	1,085	31	33,635	2/8/24	91	100	0	0	2 in overlay	8/29/07
1230	1510	Wilson Avenue	Tustin Street	East End	AC	E	2	960	31	29,760	3/4/24	74	91	0	9	New Construction - Initial	1/1/80
1231	2806	Wimbleton Pvt	Old Chapman Road	East End	AC	E	2	399	28	12,672	12/6/17	71	43	52	5	New Construction - Initial	1/1/80
1232	2094	Windes Drive	Highpoint Road	Santiago Canyon Road	AC	E	2	990	39	27,720	11/14/23	80	88	0	12	New Construction - Initial	1/1/80
1232	2095	Windes Drive	Grovewood Lane	Highpoint Road	AC	E	2	550	28	15,400	11/14/23	70	80	0	20	New Construction - Initial	10/30/12
1232	2096	Windes Drive	Lewis Street	Grovewood Lane	AC	E	2	860	18	15,480	11/14/23	72	74	0	26	New Construction - Initial	1/1/80
1232	2097	Windes Drive	Lewis Street	535' n/o Lewis Drive	AC	E	2	535	19	10,165	11/14/23	78	68	0	32	New Construction - Initial	1/1/80
1232	23890	Windes Drive	535' n/ o Lewis Dr	1214' n/o Lewis Dr	AC	E	2	1,274	20	25,480	11/14/23	88	65	0	35	New Construction - Initial	1/1/80
1233	2861	Windgap Drive	Compton Avenue	South End	AC	E	2	270	32	10,140	3/12/24	90	100	0	0	Surface Treatment - Slurry Seal	1/1/04
1234	1810	Windy Pointe	West End	Canyon View Avenue	AC	E	2	445	32	15,740	10/26/23	81	100	0	0	Surface Treatment - Slurry Seal	1/1/04
1235	1927	Winlock Street	Buckeyewood Avenue	South End	AAC	E	2	170	32	5,440	2/27/24	88	0	0	100	Overlay - AC Structural	6/1/19
1235	2122	Winlock Street	Briardale Avenue	Glendale Avenue	AC	E	2	540	32	17,280	2/27/24	89	88	0	12	New Construction - Initial	1/1/80
1237	1649	Winthrope Street	Kirkwood Avenue	Fairhaven Avenue	AAC	E	2	480	32	15,860	2/20/24	83	84	0	16	Overlay - AC Structural	1/31/16
1241	937	Woodbury Drive	North End	Fairhaven Avenue	AAC	E	2	580	33	20,240	3/15/24	98	100	0	0	Overlay - AC Structural	3/3/22
1242	1651	Woodland Street	Kirkwood Avenue	Fairhaven Avenue	AAC	E	2	495	31	15,345	1/26/24	68	100	0	0	Surface Reconstruction - AC	1/1/94
1242	1657	Woodland Street	Larkstone Drive	Kirkwood Avenue	AAC	E	2	850	31	26,350	1/26/24	93	100	0	0	Overlay - AC Structural	12/14/06
1242	1658	Woodland Street	La Veta Avenue	Larkstone Drive	AAC	E	2	1,165	31	36,115	1/26/24	89	60	0	40	Overlay - AC Structural	12/14/06
1243	1896	Woodlawn Drive	North End	Almond Avenue	AAC	E	2	420	36	17,620	3/6/24	97	100	0	0	Overlay - AC Structural	3/3/22
1244	589	Woodridge Circle	Sheringham Avenue	South End	AC	E	2	235	32	9,020	3/12/24	75	100	0	0	Surface Treatment - Slurry Seal	1/1/04
1245	1214	Woods Street	Rainier Avenue	Ashwood Street	AC	E	2	1,210	36	43,560	2/29/24	89	76	24	0	Surface Treatment - Slurry Seal	3/21/22

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1245	1313	Woods Street	Rainier Avenue	Meadowbrook Avenue	AAC	E	2	260	36	9,360	2/29/24	88	100	0	0	Surface Treatment - Slurry Seal	3/21/22
1246	1928	Woodside Street	Buckeyewood Avenue	South End	AAC	E	2	170	32	5,440	2/27/24	100	100	0	0	Overlay - AC Structural	6/1/19
1246	2121	Woodside Street	Glendale Avenue	Palmdale Avenue	AAC	E	2	860	32	27,520	2/27/24	82	35	36	29	Overlay - AC Structural	1/1/04
1247	2153	Woodstock Avenue	Hartman Street	Cottonwood Street	AAC	E	2	800	32	25,600	3/1/24	76	51	48	1	Overlay - AC Structural	1/1/03
1248	2155	Woodvale Avenue	Glassell Street	Cottonwood Street	AAC	E	2	955	32	30,560	3/1/24	77	30	69	1	Overlay - AC Structural	1/1/03
1250	1764	Woodwind Avenue	West End	Shadow Pines Road	AC	E	2	1,510	32	61,320	10/17/23	94	100	0	0	Surface Treatment - Slurry Seal	3/21/22
1251	1565	Wrangle Circle	Chandler Ranch	East End	AAC	E	2	410	32	14,620	10/24/23	90	100	0	0	Overlay - AC Structural	1/1/18
1252	1404	Wrightwood Street	North End (near Ruth Place)	South End	AAC	E	2	920	32	32,740	2/20/24	84	41	0	59	Overlay - AC Structural	1/31/16
1252	1408	Wrightwood Street	North End	Schug Street	AAC	E	2	955	32	33,110	2/20/24	81	97	0	3	Overlay - AC Structural	1/31/16
1252	1541	Wrightwood Street	North End	Spring Street	AAC	E	2	205	32	8,060	3/6/24	91	64	0	36	Overlay - AC Structural	10/1/08
1252	1614	Wrightwood Street	Charter Oak Drive	Del Valle Avenue	AAC	E	2	935	33	31,605	11/28/23	86	100	0	0	2 in overlay	8/31/07
1252	1635	Wrightwood Street	Greenwood Avenue	Larkstone Drive	AC	E	2	215	32	6,880	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1253	1354	Wyeth Circle	North End	Garfield Circle	AC	E	2	130	32	4,160	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1254	1931	Wyngate Road	Nohl Ranch Road	South End	AAC	E	2	315	32	11,580	1/4/24	94	100	0	0	Overlay - AC Structural	1/1/21
1255	2578	Xtra Way	North End	Katella Avenue	AC	E	2	845	56	47,320	8/27/24	87	81	0	19	New Construction - Initial	1/1/80
1256	2228	Yale Avenue	Brian Street	Main Street	AC	I	2	535	44	23,540	3/8/24	66	72	28	0	Surface Treatment - Slurry Seal	11/1/08
1257	1970	Yellowstone Boulevard	Serrano Avenue	Mabury Avenue	AAC	E	2	1,250	34	43,250	11/16/23	66	21	79	0	Overlay - AC Structural	1/1/03
1258	2673	Yorba Street	Chapman Ave	North End	AC	E	4	500	60	30,000	8/28/24	48	39	60	1	New Construction - Initial	1/1/80
1262	2107	Yosemite Avenue	Orange Park Boulevard	Rushmore Street	AC	E	2	455	32	14,368	11/14/23	83	76	24	0	Surface Treatment - Slurry Seal	10/10/19
1262	2108	Yosemite Avenue	Waterton Avenue	Orange Park Boulevard	AAC	E	2	855	32	27,168	11/14/23	92	100	0	0	Overlay - AC Structural	1/1/18
1263	2328	Young Circle	Fairway Drive	South End	AC	E	2	120	31	4,870	2/21/24	99	0	0	100	Mill and Overlay	2/1/24
1264	1989	Yurok Street	Taft Avenue	Shohone Avenue	AAC	E	2	935	32	29,728	11/29/23	95	100	0	0	Overlay - AC Structural	1/1/21
1265	1871	Zenith Point Rd	Orange View Lane	Denise Avenue	AC	E	2	240	36	8,384	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1266	1984	Zion Street	North End	Crater Lake Avenue	AAC	E	2	480	32	16,860	10/31/23	86	100	0	0	Overlay - AC Structural	8/1/17
								222.8		**39,467,321**							
		Alleys															
1313	3160	Alley Adams Ave	150' w/o Highland	258' e/o Highland Ave	AC	N	2	408	20	5,712	8/27/24	82	97	0	3	New Construction - Initial	1/1/80
15	2308	Alley Almond Avenue	Clark Street	Parker Street	PCC	N	1	270	11	2,970	8/26/24	61	23	69	8	New Construction - Initial	1/1/80
15	2310	Alley Almond Avenue	Parker Street	Pixley Street	PCC	N	1	270	11	2,970	8/26/24	69	26	51	23	New Construction - Initial	1/1/80
15	2312	Alley Almond Avenue	Parker Street	Pixley Street	PCC	N	1	270	11	2,970	8/26/24	88	74	0	26	New Construction - Initial	1/1/80
15	2314	Alley Almond Avenue	Clark Street	Parker Street	PCC	N	1	270	11	2,970	8/26/24	86	60	0	40	New Construction - Initial	1/1/80
15	2316	Alley Almond Avenue	130' W Glassell Street	Glassell Street	PCC	N	1	130	12	1,560	8/26/24	92	100	0	0	New Construction - Initial	1/1/80
15	2318	Alley Almond Avenue	Shaffer Street	Harwood Street	PCC	N	1	600	14	8,400	8/26/24	81	19	81	0	New Construction - Initial	1/1/80
16	2384	Alley Amos Street	Denise Avenue	Altura Avenue	AC	N	2	400	20	4,800	8/27/24	63	30	68	2	Surface Treatment - Slurry Seal	1/1/04
17	2287	Alley Barkley Avenue	Main Street	Collins Avenue	AC	N	2	795	16	12,720	8/27/24	85	74	24	2	Reconstruction	12/12/12
18	2282	Alley Berkeley Street	Dell Street	Berkeley Street	AC	N	2	1,145	14	16,030	8/27/24	90	100	0	0	Surface Treatment - Slurry Seal	1/1/95
18	2283	Alley Berkeley Street	Berkeley Street	Berkeley Street	AAC	N	2	645	15	9,675	8/27/24	89	100	0	0	2 in overlay	10/1/13
1315	3332	Alley Bourbon Street	Sail Ave	Heim Ave	AAC	N	2	1,432	20	20,048	8/27/24	92	85	0	15	New Construction - Initial	4/4/12
1319	3427	Alley Buena Vista	150' e/o Orange Ave	100' w/o Palm Ave	AC	N	1	50	19	750	8/27/24	100	0	0	0	New Construction - Initial	1/1/80
19	2381	Alley Burton Avenue	Pine Street	East End	AC	N	2	490	14	6,860	8/27/24	49	64	36	0	Surface Treatment - Slurry Seal	12/13/06
20	2297	Alley Bush Street	Almond Avenue	Palmyra Place	PCC	N	1	460	10	4,600	8/26/24	87	76	24	0	New Construction - Initial	1/1/80
21	2334	Alley California Street	Maple Avenue	Chapman Avenue	AAC	N	2	575	11	6,325	8/28/24	68	74	0	26	2 in overlay	8/1/09
21	80	Alley California Street	Katella Avenue	400' N Katella Avenue	AAC	N	2	400	24	9,600	8/27/24	46	36	64	0	2 in Cold Mill & Overlay	8/31/07
22	2325	Alley Center Street	Alley Palmyra Avenue	Culver Avenue	PCC	N	1	460	13	5,980	8/26/24	93	45	55	0	New Construction - Initial	1/1/80
22	2327	Alley Center Street	Alley Palmyra Avenue	Culver Avenue	PCC	N	1	460	13	5,980	8/26/24	83	21	79	0	New Construction - Initial	1/1/80
22	2329	Alley Center Street	Culver Avenue	La Veta Avenue	PCC	N	1	600	14	8,400	8/26/24	72	21	79	0	New Construction - Initial	1/1/80
22	2330	Alley Center Street	Culver Avenue	South End	PCC	N	1	400	14	5,600	8/26/24	80	19	81	0	New Construction - Initial	1/1/80
23	2345	Alley Century Avenue	West End	James Street	AC	N	1	125	16	2,000	8/28/24	58	65	28	7	New Construction - Initial	1/1/80
23	41	Alley Century Avenue	James Street	East End	AC	N	2	380	20	6,460	8/28/24	55	35	65	0	New Construction - Initial	1/1/80
24	2295	Alley Chapman Avenue	Cypress Street	Lemon Street	PCC	N	1	132	20	2,640	8/26/24	91	100	0	0	New Construction - Initial	1/1/80
25	2286	Alley Citrus Street	Struck Avenue	Batavia Street	AC	N	2	1,055	14	14,770	8/27/24	81	46	0	54	New Construction - Initial	1/1/80
1302	3127	Alley Collins Ave	Highland	296' e/o Highland	AC	N	2	367	20	5,138	8/27/24	73	80	20	0	New Construction - Initial	1/1/80
26	2305	Alley Cypress Street	Cypress Street	Alley Fashion Park	AC	N	2	115	14	1,610	8/28/24	82	100	0	0	Surface Treatment - Slurry Seal	1/1/96
26	2306	Alley Cypress Street	Rosewood Avenue	Fairway Drive	AC	N	2	270	20	5,400	8/28/24	82	100	0	0	Surface Treatment - Slurry Seal	1/1/04
27	2279	Alley El Prado Avenue	320' W Fondren Street	Fondren Street	AC	N	1	320	20	4,480	8/28/24	52	34	66	0	New Construction - Initial	4/4/12
28	2278	Alley El Rancho Avenue	Lewis Street	East End	AC	N	2	600	20	8,400	8/28/24	89	96	0	4	New Construction - Initial	1/1/80
29	2307	Alley Fairway Drive	Fairway Drive	Alley Fashion Park	AC	N	2	105	14	1,470	8/28/24	70	83	17	0	Surface Treatment - Slurry Seal	1/1/04
29	2373	Alley Fairway Drive	Alley Cypress Street	Fashion Park Street	AC	N	2	1,835	14	25,690	8/28/24	72	68	30	2	Surface Treatment - Slurry Seal	1/1/04
29	2374	Alley Fairway Drive	La Veta Frontage	Fairway Drive	AC	N	2	790	16	12,640	8/28/24	73	29	63	8	Surface Treatment - Slurry Seal	1/1/04

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
29	2700	Alley Fairway Drive	Fairway Drive	Fairway Drive	AC	N	2	1,910	21	28,650	8/28/24	63	49	50	1	New Construction - Initial	1/1/80
30	2303	Alley Fashion Park	Fashion Park Street	190' E Fashion Park Street	AC	N	2	190	14	2,660	8/28/24	48	74	20	6	Surface Treatment - Slurry Seal	1/1/96
1318	2688	Alley Foundren Street	150' n/o El Rancho Ave	750' n/o El Rancho Ave	AAC	N	1	876	20	12,264	8/28/24	67	43	57	0	New Construction - Initial	4/4/12
1318	2689	Alley Foundren Street	500' n/o El Rancho Ave	750' n/o El Rancho Ave	AAC	N	1	574	20	8,036	8/28/24	70	41	53	6	New Construction - Initial	4/4/12
31	2387	Alley Garfield Avenue	Sacramento Street	Handy Street	AC	N	2	860	17	14,620	8/27/24	20	39	45	16	New Construction - Initial	1/1/80
1350	2336	Alley Glassell Street	Rose Avenue	Walnut Avenue	PCC	N	0	659	10	6,590	8/27/24	69	10	90	0	New Construction - Initial	10/30/12
32	2377	Alley Grove Avenue	Highland Street	Grove Avenue	AC	N	2	720	14	10,080	8/27/24	90	78	11	11	New Construction - Initial	1/1/80
32	2378	Alley Grove Avenue	Highland Street	Grove Avenue	AC	N	2	720	14	10,080	8/27/24	46	60	33	7	New Construction - Initial	1/1/80
1311	3333	Alley Heim Ave	Bourbon St	140' w/o Bourbon St	AC	N	2	140	20	1,820	8/27/24	91	78	22	0	New Construction - Initial	1/1/80
1311	3351	Alley Heim Ave	Bourbon St	140' w/o Bourbon St	AC	N	2	140	20	1,820	8/27/24	89	84	16	0	New Construction - Initial	1/1/80
33	2356	Alley Hewes Street	Chapman Avenue	115' N Chapman Avenue	AC	N	1	115	30	3,450	8/28/24	37	52	48	0	New Construction - Initial	1/1/80
34	2379	Alley Highland Street	Highland Street	Highland Street	AC	N	2	585	14	8,190	8/27/24	87	60	26	14	New Construction - Initial	1/1/80
1314	3140	Alley Highland Street	155' n/o Quincy Avenue	Collins Avenue	AC	N	2	1,219	20	17,066	8/27/24	86	100	0	0	New Construction - Initial	1/1/80
1320	3147	Alley Highland Street	Collins Avenue	Quincy Avenue	AC	N	2	1,000	20	12,426	8/27/24	76	70	19	11	New Construction - Initial	1/1/80
1300	3182	Alley Katella Avenue	Tustin Street	1400' w/o Tustin St	AAC	N	2	1,400	19	18,200	8/27/24	25	41	52	7	2 in Cold Mill & Overlay	8/31/07
35	2390	Alley Kathleen Street	Kathleen Street	165' E Kathleen Street	AAC	N	2	165	20	3,300	8/28/24	72	37	63	0	Grinding (Localized)	12/14/06
35	2390	Alley Kathleen Street	Kathleen Street	165' E Kathleen Street	AAC	N	2	165	20	3,300	8/28/24	72	37	63	0	Overlay - AC Structural	12/14/06
1305	2671	Alley La Veta Avenue	Flower Circle	Silk Tree Circle	AC	N	2	516	19	9,679	8/26/24	94	100	0	0	New Construction - Initial	1/1/80
36	2388	Alley Laurel Drive	Collins Avenue	North End	AAC	N	1	580	14	8,120	8/27/24	49	31	5	64	Overlay - AC Structural	11/14/06
1304	2385	Alley Lincoln Avenue	Oceanview Avenue	East End	AC	N	1	250	11	2,750	8/27/24	92	87	0	13	New Construction - Initial	1/1/80
37	2375	Alley Lincoln Street	Grove Avenue	Nordic Street	AC	N	1	830	14	11,620	8/27/24	38	24	75	1	New Construction - Initial	1/1/80
1306	3128	Alley Locust Street	Highland Street	254' e/o Highland Street	AC	N	2	254	20	3,556	8/27/24	77	100	0	0	New Construction - Initial	1/1/80
38	2296	Alley Main Street	Alley Barkley Avenue	Barkley Avenue	AC	N	2	125	18	2,250	8/27/24	91	100	0	0	New Construction - Initial	1/1/80
39	2280	Alley Maple Avenue	Bitterbush Street	Eckhoff Street	AC	N	2	790	15	11,850	8/28/24	53	41	46	13	New Construction - Initial	1/1/80
39	2289	Alley Maple Avenue	Parker Street	Pixley Street	PCC	N	1	285	15	4,275	8/26/24	88	68	32	0	New Construction - Initial	1/1/80
39	2291	Alley Maple Avenue	Batavia Street	Parker Street	AC	N	1	590	10	4,130	8/26/24	11	37	57	6	New Construction - Initial	1/1/80
39	2331	Alley Maple Avenue	Grand Street	Shaffer Street	PCC	N	2	540	20	10,800	8/28/24	59	12	71	17	New Construction - Initial	1/1/80
39	2332	Alley Maple Avenue	Cleveland Street	Pine Street	PCC	N	2	540	15	8,100	8/28/24	45	6	91	3	New Construction - Initial	1/1/80
39	2333	Alley Maple Avenue	Cleveland Street	Pine Street	PCC	N	2	540	15	8,100	8/28/24	45	16	83	1	New Construction - Initial	1/1/80
40	2294	Alley Mayfair Avenue	Lemon Street	Glassell Street	AC	N	2	595	14	8,330	8/27/24	61	35	50	15	New Construction - Initial	1/1/80
41	2301	Alley McCoy Road	Almond Avenue	McCoy Road	AC	N	2	580	22	12,760	8/26/24	57	49	34	17	New Construction - Initial	1/1/80
41	2302	Alley McCoy Road	Almond Avenue	McCoy Road	AC	N	2	580	22	12,760	8/26/24	55	50	37	13	New Construction - Initial	1/1/80
42	2341	Alley Meats Avenue	Meats Avenue	Chouteau Street	AC	N	1	690	14	9,660	8/27/24	28	46	54	0	Surface Treatment - Slurry Seal	1/1/98
42	2369	Alley Meats Avenue	Cambridge Street	Greengrove Street	AC	N	1	1,120	14	15,680	8/27/24	38	32	54	14	New Construction - Initial	1/1/80
1307	3141	Alley Monroe Avenue	Highland Street	240' e/o Highland Avenue	AC	N	2	240	20	3,360	8/27/24	85	98	0	2	New Construction - Initial	1/1/80
1323	8016	Alley N/O La Veta Avenue	Wellington Street	End	AC	N	2	493	16	7,888	8/28/24	49	59	8	33	New Construction - Initial	10/4/12
43	2376	Alley Nordic Street	Del Mar Avenue	Meats Avenue	AC	N	1	260	14	3,640	8/27/24	74	29	71	0	New Construction - Initial	1/1/80
44	100300	Alley Oak Street	Oak St	Oak St	AC	N	2	1,235	25	24,740	8/28/24	20	39	48	13	New Construction - Initial	1/1/80
44	2370	Alley Oak Street	Palmyra Avenue	North End	AC	N	2	630	14	8,820	8/28/24	54	27	63	10	Surface Reconstruction - AC	2/1/10
45	2292	Alley Olive Street	North End	Alley Mayfair Avenue	AC	N	2	310	14	4,340	8/27/24	31	74	11	15	New Construction - Initial	1/1/80
45	2293	Alley Olive Street	North End	Alley Mayfair Avenue	AC	N	2	305	14	4,270	8/27/24	57	78	0	22	New Construction - Initial	1/1/80
46	2320	Alley Orange Street	North End	Almond Avenue	AAC	N	1	465	12	5,580	8/28/24	74	26	64	10	Overlay - AC Structural	1/1/96
46	2321	Alley Orange Street	Culver Avenue	La Veta Avenue	PCC	N	1	600	12	7,200	8/26/24	90	56	44	0	New Construction - Initial	1/1/80
46	2323	Alley Orange Street	Culver Avenue	La Veta Avenue	PCC	N	1	600	12	7,200	8/26/24	94	100	0	0	New Construction - Initial	1/1/80
46	2337	Alley Orange Street	Rose Avenue	Walnut Avenue	PCC	N	2	605	14	8,470	8/27/24	71	20	80	0	New Construction - Initial	1/1/80
46	2852	Alley Orange Street	Maple Avenue	389' s/o Maple Avenue	AC	N	1	389	17	5,763	8/28/24	77	24	26	50	New Construction - Initial	1/1/80
47	2349	Alley Palm Avenue	Earlham Street	Hewes Street	AC	N	1	455	20	6,370	8/28/24	70	50	50	0	Surface Treatment - Slurry Seal	11/1/08
47	2469	Alley Palm Avenue	Swidler Street	Seranado Street	AC	N	1	1,170	20	16,380	8/28/24	42	33	67	0	Surface Treatment - Slurry Seal	11/1/08
48	2342	Alley Palmdale Avenue	Widdows Way	East End	AC	N	2	490	16	7,840	8/27/24	91	79	21	0	New Construction - Initial	1/1/80
49	2335	Alley Palmyra Avenue	Shaffer Street	Harwood Street	PCC	N	1	615	11	6,765	8/26/24	68	16	84	0	New Construction - Initial	1/1/80
49	2338	Alley Palmyra Avenue	Cambridge Street	Waverly Street	PCC	N	2	295	15	4,425	8/26/24	96	100	0	0	New Construction - Initial	1/1/80
49	2339	Alley Palmyra Avenue	Harwood Street	Shaffer Street	PCC	N	1	615	11	6,765	8/26/24	68	16	84	0	New Construction - Initial	1/1/80
49	2340	Alley Palmyra Avenue	Grand Street	Shaffer Street	PCC	N	1	530	14	7,420	8/26/24	84	34	66	0	New Construction - Initial	1/1/80
49	2750	Alley Palmyra Avenue	Olive Street	End	AC	N	2	187	15	2,805	8/28/24	81	64	36	0	New Construction - Initial	1/1/80
1303	2277	Alley Park Central	Park Central Avenue	Park Central Avenue	AC	N	1	849	20	11,480	8/28/24	82	64	36	0	Surface Reconstruction - AC	2/1/10
50	2372	Alley Park Lane	Washington Avenue	Park Lane	AC	N	2	580	14	8,120	8/28/24	88	100	0	0	Surface Treatment - Slurry Seal	1/1/02
50	2380	Alley Park Lane	Del Mar Avenue	Highland Street	AC	N	2	435	14	6,090	8/27/24	61	33	64	3	New Construction - Initial	1/1/80
1309	3152	Alley Quincy Ave	Highland Street	236' e/o Highland Street	AC	N	2	236	20	3,304	8/27/24	82	95	0	5	New Construction - Initial	1/1/80
51	2386	Alley Riverview Avenue	Hearthside Street	Riverview Avenue	AC	N	2	1,440	20	28,800	8/27/24	71	53	38	9	Surface Treatment - Slurry Seal	11/1/08

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1310	3372	Alley Sail Ave	Sail Avenue	Bourbon St	AC	N	2	474	20	6,636	8/27/24	62	49	51	0	New Construction - Initial	1/1/80
9004	2350	Alley Shasta Street	Almond Avenue	Palmyra Avenue	AC	N	1	805	20	16,100	8/28/24	72	45	55	0	New Construction - Initial	4/4/12
52	2351	Alley Shattuck Place	Shattuck Place	Lincoln Avenue	AC	N	2	1,170	20	23,400	8/27/24	53	30	65	5	Reconstruction	2/29/16
52	2352	Alley Shattuck Place	Locust Avenue	North End	AC	N	2	300	20	6,000	8/27/24	90	100	0	0	New Construction - Initial	1/1/80
53	2288	Alley Shelly Court	Main Street	Barkley Street	AC	N	2	670	19	12,730	8/27/24	75	26	74	0	New Construction - Initial	1/1/80
54	2276	Alley Sunningdale Circle	Compton Avenue	Chapman Avenue	PCC	N	1	265	18	4,770	8/28/24	96	100	0	0	Surface Reconstruction - PCC	2/1/10
55	2343	Alley Taft Avenue	Widdows Way	East End	AC	N	2	315	16	5,040	8/27/24	83	38	28	34	New Construction - Initial	1/1/80
55	2344	Alley Taft Avenue	Palmdale Avenue	Widdows Way	AC	N	2	530	14	7,420	8/27/24	88	59	41	0	Surface Treatment - Slurry Seal	1/1/98
56	2304	Alley Tularosa Avenue	Fashion Park Street	Alley Fashion Park Street	AC	N	2	420	14	5,880	8/28/24	71	86	14	0	Surface Treatment - Slurry Seal	1/1/04
57	2383	Alley Villa Real Drive	Santiago Boulevard	East End	AC	N	1	735	19	13,965	8/27/24	98	69	0	31	Overlay-Rubber Hot Mix	1/4/23
58	2371	Alley Wayfield Street	Washington Avenue	North End	AAC	N	2	475	14	6,650	8/28/24	83	55	29	16	Surface Reconstruction - AC	2/1/10
59	2382	Alley Widdows Way	Briardale Avenue	Palmdale Avenue	AC	N	2	280	14	3,920	8/27/24	83	43	46	11	Surface Treatment - Slurry Seal	1/1/98
61	2284	Alley Wilson St (N)	Lemon Street	Glassell Street	AC	N	2	580	16	9,280	8/27/24	73	29	70	1	New Construction - Initial	1/1/80
60	2285	Alley Wilson St (S)	Lemon Street	Glassell Street	AC	N	2	580	14	8,120	8/27/24	64	57	42	1	New Construction - Initial	1/1/80
62	13231	Alley Yorba Street	La Veta Avenue	North End	AC	N	2	581	20	11,620	8/28/24	63	72	21	7	New Construction - Initial	1/1/80
62	13286	Alley Yorba Street	Delia Lane	North End	AC	N	1	422	20	8,440	8/28/24	63	59	41	0	New Construction - Initial	1/1/80
62	13654	Alley Yorba Street	Burdie Lane	La Veta Avenue	AC	N	2	765	20	15,300	8/28/24	66	61	39	0	New Construction - Initial	1/1/80
								11.5		**915,696**							

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
		Arterial / Collector (MPAH)															
705	2012	Main Street	North End	Taft Avenue	ST	C	2	1,555	44	71,369	5/20/26	25	41	55	4	Surface Treatment - Micro Surfacing	8/31/07
475	111	Glassell Street	22 West On/Off Ramp	City Limits (22 East On/Off Ramp)	AAC	B	4	446	105	45,880	3/26/26	40	30	70	0	Overlay - AC Structural	4/13/15
1112	328	Taft Avenue	600' w/o Main Street	Main Street	AAC	B	4	600	80	43,736	5/20/26	41	18	82	0	2 in Cold Mill & Overlay	5/8/07
1012	3550	Santiago Canyon Road	HWY 261 BRIDGE	EAST CITY LIMIT	AC	B	4	122	62	28,329	5/26/26	42	53	27	20	New Construction - Initial	1/1/80
64	2659	Almond Avenue	Cypress Street	Lemon Street	PCC	C	2	290	39	10,023	5/18/26	42	12	76	12	New Construction - Initial	1/1/80
1186	531	Walnut Avenue	Cambridge Street	California Street	AAC	C	2	1,305	38	49,032	5/14/26	44	51	42	7	Overlay - AC Structural	1/1/97
64	2397	Almond Avenue	Glassell Street	Shaffer Street	PCC	C	2	1,270	40	50,990	5/18/26	46	17	61	22	New Construction - Initial	1/1/80
944	677	Riverdale Avenue	Beechwood Street	Orange-Olive Road	AAC	B	4	1,100	60	60,543	5/20/26	47	64	36	0	Surface Treatment - Slurry Seal	11/1/08
832	453	Orangewood Avenue	1475' w/o Eckhoff Street	Eckhoff Street	AAC	B	4	1,475	80	108,619	5/13/26	48	39	54	7	Overlay - AC Structural	1/1/98
944	676	Riverdale Avenue	Hearthside Street	Beechwood Street	AAC	B	4	900	60	50,953	5/20/26	49	54	38	8	Surface Treatment - Slurry Seal	11/1/08
64	2660	Almond Avenue	Lemon Street	Glassell Street	PCC	C	2	605	39	22,569	5/18/26	49	13	64	23	New Construction - Initial	1/1/80
743	903	Meats Avenue	Breckenridge Street	Santiago Boulevard	AC	B	4	1,280	60	73,713	4/29/26	50	71	28	1	Asphalt Rubber Hot Mix	6/1/12
1144	279	Tustin Street	Katella Avenue	Van Owen Avenue	AC	B	3	750	40	27,216	5/14/26	50	20	73	7	Surface Treatment - Slurry Seal	8/1/17
845	2422	Palm Avenue	Cypress St	Glassell Street	PCC	C	2	992	40	38,298	5/13/26	52	18	76	6	New Construction - Initial	1/1/80
203	232	Cambridge Street	Taft Avenue	Trenton Avenue	AAC	B	4	1,385	60	79,804	5/26/26	53	76	17	7	Overlay - AC Structural	1/1/10
750	669	Metropolitan Drive	Lewis Street	Entertainment Drive	AC	B	4	1,250	46	71,697	5/22/26	53	20	67	13	Surface Treatment - Slurry Seal	1/1/91
611	390	Katella Avenue	Tustin Avenue	Route 55 SB On Ramp	AAC	B	6	930	40	40,009	5/19/26	53	64	32	4	Asphalt Rubber Hot Mix	6/1/12
415	868	Fairhaven Avenue	Lowry Street	Yorba Street	AC	B	4	400	60	22,570	5/15/26	53	69	31	0	New Construction - Initial	1/1/80
1186	543	Walnut Avenue	Hewes Street	Rancho Santiago Boulevard	AAC	C	2	1,270	36	46,513	5/15/26	54	57	42	1	Surface Treatment - Slurry Seal	11/1/08
944	675	Riverdale Avenue	Glassell Street	Hearthside Street	AAC	B	4	1,070	60	65,006	5/20/26	55	56	35	9	Surface Treatment - Slurry Seal	11/1/08
287	171	Collins Avenue	Milford Street	Handy Street	AAC	B	4	610	52	27,431	5/21/26	55	49	50	1	Overlay - AC Structural	1/1/93
203	226	Cambridge Street	Walnut Avenue	Sycamore Avenue	AC	C	2	635	40	25,280	3/27/26	55	12	63	25	Surface Treatment - Chip Seal	12/16/06
913	2016	Rancho Santiago Blvd	Orange Grove Avenue	35' s/o Sycamore Avenue	AC	C	2	1,525	36	54,715	5/26/26	55	50	42	8	New Construction - Initial	1/1/80
711	2234	Manchester Avenue	Chapman Avenue	Sheringham Avenue	AC	C	2	525	60	17,652	4/22/26	56	33	52	15	Surface Treatment - Slurry Seal	1/1/95
203	231	Cambridge Street	Trenton Avenue	Katella Avenue	AAC	B	4	980	60	64,385	5/26/26	56	78	21	1	Overlay - AC Structural	1/1/10
743	899	Meats Avenue	Tustin Street	Park Lane	AC	B	4	375	77	31,362	5/21/26	56	31	69	0	Mill and Overlay	8/30/21
548	210	Hewes Street	Pearl Street	Chapman Avenue	AC	B	4	350	60	17,655	5/15/26	56	72	24	4	Surface Treatment - Slurry Seal	1/1/95
832	449	Orangewood Avenue	Eckhoff Street	Main Street	AAC	B	5	2,199	60	134,464	5/19/26	56	33	55	12	Overlay - AC Structural	1/1/98
287	169	Collins Avenue	Highland Street	Milford Street	AAC	B	4	1,240	52	72,955	5/21/26	57	55	45	0	Overlay - AC Structural	1/1/93
1186	532	Walnut Avenue	California Street	Tustin Street	AAC	C	3	1,260	48	63,012	5/14/26	57	48	42	10	Overlay - AC Structural	1/1/97
636	524	La Veta Avenue	James Street	Esplanade Street	AC	B	2	744	60	42,173	5/21/26	57	100	0	0	Asphalt Rubber Hot Mix	6/1/12
475	89	Glassell Street	Lincoln Avenue	Richland Avenue	AAC	B	4	1,760	80	130,160	5/20/26	57	35	45	20	Overlay - AC Structural	1/1/93
636	506	La Veta Avenue	Orange Streeet	Grand Street	AC	B	2	345	29	10,182	5/21/26	57	69	23	8	Surface Reconstruction - AC	1/1/94
1011	466	Santiago Boulevard	1335' N Lincoln Avenue	Lincoln Avenue	AAC	B	4	1,335	50	71,513	5/19/26	58	43	52	5	Overlay - AC Structural	11/1/07
611	3502	Katella Avenue	Route 55 SB On Ramp	Tustin St	AAC	B	6	786	40	40,694	5/19/26	58	79	16	5	New Construction - Initial	6/1/12
1112	323	Taft Avenue	Neville Street	Glassell Street	AAC	B	4	1,280	80	101,712	5/21/26	58	44	42	14	Overlay - AC Structural	1/1/02
705	300	Main Street	Taft Avenue	1170' n/o Katella Avenue	AAC	B	4	1,170	80	89,778	5/20/26	59	45	45	10	Overlay - AC Structural	1/1/02
287	167	Collins Avenue	Tustin Street	Highland Street	AAC	B	4	700	52	37,657	5/21/26	60	48	28	24	Overlay - AC Structural	1/1/93
287	175	Collins Avenue	Wanda Road	Mallard Street	AAC	B	4	966	60	62,171	5/20/26	60	73	27	0	Overlay - AC Structural	1/1/93
516	2011	Grove Avenue	Batavia Street	Main Street	AAC	C	2	1,535	44	66,242	5/20/26	60	65	28	7	Overlay - AC Structural	9/1/09
548	204	Hewes Street	Phillips Avenue	Fowler Street	AC	B	4	717	60	41,942	5/15/26	60	81	19	0	Surface Treatment - Slurry Seal	1/1/91
252	13	Chapman Avenue	Batavia Street	Clark Street	AAC	B	4	350	60	20,290	5/22/26	61	69	31	0	Overlay - AC Structural	3/21/11
1186	527	Walnut Avenue	Cypress Street	Glassell Street	AAC	C	2	980	36	35,925	5/13/26	61	46	30	24	Overlay - AC Structural	1/1/00
475	101	Glassell Street	420' N Riverdale Avenue	Richland Avenue	AAC	B	4	1,125	64	73,134	5/20/26	61	59	31	10	Overlay - AC Structural	1/1/93
252	32	Chapman Avenue	Rancho Santiago Blvd	Crawford Canyon Road	AC	B	3	1,665	80	130,919	5/26/26	61	66	33	1	New Construction - Initial	1/1/80
913	2018	Rancho Santiago Blvd	Hewes Street	Condor Crest Avenue	AC	C	2	1,884	30	58,149	5/7/26	61	64	36	0	New Construction - Initial	1/1/80
548	206	Hewes Street	Marmon Avenue	Phillips Avenue	AC	B	4	1,375	60	85,208	5/15/26	62	84	16	0	Surface Treatment - Slurry Seal	1/1/91
705	302	Main Street	1170' n/o Katella Avenue	Katella Avenue	AAC	B	4	1,175	80	100,874	5/20/26	62	41	47	12	Overlay - AC Structural	1/1/02
668	872	Lincoln Avenue	Tustin Street	Santiago Boulevard	AC	B	3	620	48	56,869	5/19/26	62	59	41	0	New Construction - Initial	1/1/80
831	349	Orange-Olive Road	Meats Avenue	Blue Ridge Avenue	AAC	B	4	1,420	54	77,183	5/14/26	62	37	54	9	Overlay - AC Structural	1/1/02
611	3503	Katella Avenue	Sacramento St	Route 55 SB On Ramp	AAC	B	6	845	33	35,209	5/19/26	62	58	39	3	New Construction - Initial	6/1/12
113	148	Batavia Street	Grove Avenue (S)	Taft Avenue	AAC	B	5	1,260	60	70,093	5/21/26	62	43	46	11	2 in Cold Mill & Overlay	5/8/07
902	657	Prospect Street	105' E Roberto Street	Bond Avenue	AC	B	2	1,571	52	93,975	5/20/26	62	82	18	0	Asphalt Rubber Hot Mix	6/1/12
287	150	Collins Avenue	Eckhoff Street	Commerce Street	AAC	B	4	752	60	47,282	4/9/26	63	53	40	7	Overlay - AC Structural	1/1/93
1189	547	Wanda Road	Katella Avenue	Quincy Avenue	AC	B	2	1,430	54	88,786	5/20/26	63	30	61	9	New Construction - Initial	1/1/80
1186	1258	Walnut Avenue	Prospect Street	West End	AC	C	2	445	32	17,149	5/21/26	63	100	0	0	New Construction - Initial	1/1/80
636	509	La Veta Avenue	Shaffer Street	Cambridge Street	AC	B	2	1,260	60	77,515	5/15/26	63	61	18	21	New Construction - Initial	1/1/80
668	883	Lincoln Avenue	City Limit/200' E Berkeley	Glassell Street	AAC	B	4	1,320	80	89,943	5/20/26	64	65	22	13	4 in overlay	9/11/07

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1012	3554	Santiago Canyon Road	2050' E/O JAMBOREE ROAD (COP)	Route 261 Bridge	AC	B	4	3,034	64	232,944	5/13/26	64	47	53	0	New Construction - Initial	1/1/80
287	177	Collins Avenue	Mallard Street	105' e/o Roberto Street	AAC	B	4	600	60	40,591	5/20/26	64	80	7	13	Overlay - AC Structural	1/1/93
636	505	La Veta Avenue	Glassell Street	Orange Street	AC	B	2	285	50	17,054	5/21/26	64	71	29	0	Surface Reconstruction - AC	1/1/94
475	93	Glassell Street	Baywood Avenue	Meats Avenue	AC	B	4	975	80	77,984	3/20/26	65	77	23	0	New Construction - Initial	1/1/80
1144	3508	Tustin Street	22 Fwy Bridge	Seba Ave	AC	B	6	530	80	37,745	5/18/26	65	52	47	1	New Construction - Initial	1/1/80
1091	2218	Struck Avenue	Batavia Street	East End	AAC	C	2	1,170	44	53,220	4/2/26	65	45	50	5	Overlay - AC Structural	1/1/97
1112	327	Taft Avenue	Main Street	Batavia Street	AC	B	4	1,540	80	125,081	5/21/26	65	41	57	2	2 in Cold Mill & Overlay	5/8/07
1112	325	Taft Avenue	Batavia Street	Neville Street	AAC	B	4	1,485	80	109,148	5/21/26	65	47	28	25	Overlay - AC Structural	1/1/02
64	2192	Almond Avenue	Batavia Street	Cypress Street	AC	C	2	1,660	39	60,471	5/13/26	65	50	37	13	New Construction - Initial	1/1/80
287	156	Collins Avenue	Shaffer Street	Cambridge Street	AAC	B	4	1,332	52	68,750	4/10/26	65	38	41	21	Overlay - AC Structural	1/1/94
636	508	La Veta Avenue	Grand Street	Shaffer Street	AC	B	2	450	30	19,861	5/15/26	65	86	9	5	Surface Reconstruction - AC	1/1/94
636	513	La Veta Avenue	La Veta Ave Frontage Road	Bridge	AC	B	4	606	62	37,983	5/19/26	65	70	30	0	New Construction - Initial	1/1/80
590	3504	Jamboree Road	Chapman Ave	Santiago Canyon Rd	AC	B	6	1,240	40	63,213	5/13/26	65	100	0	0	New Construction - Initial	1/1/80
1012	481	Santiago Canyon Road	Lolita Street	Holy Sepulcher (Cemetary Enterance	AC	B	4	1,175	80	89,350	5/6/26	65	88	12	0	New Construction - Initial	1/1/80
1012	482	Santiago Canyon Road	Holy Sepulcher (Cemetary Enteranc	Amapola Avenue	AC	B	4	2,278	80	181,972	5/6/26	66	81	19	0	New Construction - Initial	1/1/80
287	165	Collins Avenue	Batavia Street	Railroad Tracks	AAC	B	4	1,350	52	69,371	4/10/26	66	57	43	0	Overlay - AC Structural	1/1/93
213	413	Cannon Street	San Juan Drive	250' s/o San Juan Drive	AAC	B	4	250	60	15,260	5/6/26	66	68	0	32	Overlay - AC Structural	1/1/97
831	347	Orange-Olive Road	Blue Ridge Avenue	Glassell Street	AAC	B	4	1,010	54	68,899	5/14/26	66	34	49	17	Overlay - AC Structural	1/1/02
1333	8017	Villa Park Rd	Wanda Road	City Limits (665' E/O Wanda Road)	AC	B	2	665	32	23,272	5/20/26	66	43	42	15	New Construction - Initial	10/4/12
252	37	Chapman Avenue	Broadmoor Trail	Newport Boulevard	AAC	B	5	865	80	72,419	5/14/26	66	56	26	18	Overlay - AC Structural	12/12/12
287	163	Collins Avenue	Railroad Tracks	Glassell Street	AC	B	4	1,240	52	70,652	4/10/26	66	44	43	13	New Construction - Initial	1/1/80
475	104	Glassell Street	Katella Avenue	Quincy Avenue	AC	B	4	1,225	60	80,442	3/20/26	66	85	15	0	2 in Cold Mill & Overlay	10/16/07
500	2393	Grand Street	Maple Avenue	Chapman Avenue	PCC	C	2	605	40	23,536	5/21/26	66	21	51	28	New Construction - Initial	1/1/80
1144	294	Tustin Street	Palmyra Avenue	La Veta Avenue	AC	B	6	1,350	80	111,591	5/18/26	67	39	57	4	Surface Treatment - Slurry Seal	8/1/17
287	173	Collins Avenue	Hart Street	Wanda Road	AAC	B	4	730	52	32,821	5/20/26	67	100	0	0	Overlay - AC Structural	1/1/93
287	3529	Collins Avenue	Handy Street	Hart Street	AAC	B	4	925	52	45,845	5/20/26	67	86	10	4	New Construction - Initial	1/1/93
475	85	Glassell Street	Maple Avenue	Chapman Avenue	AC	C	2	475	50	25,392	5/22/26	67	45	55	0	New Construction - Initial	1/1/80
668	881	Lincoln Avenue	Glassell Street	Orange-Olive Road	AAC	B	4	1,775	80	139,269	5/19/26	67	43	36	21	4 in overlay	9/11/07
475	92	Glassell Street	Fletcher Avenue	Baywood Avenue	AC	B	4	1,280	80	103,989	3/20/26	67	61	37	2	New Construction - Initial	1/1/80
611	396	Katella Avenue	Route 55 SB On Ramp	Sacramento Street	AAC	B	6	845	36	31,965	5/19/26	68	71	29	0	Mill and Overlay	5/11/22
1144	296	Tustin Street	La Veta Avenue	22 Fwy Bridge	AC	B	6	800	80	55,796	5/18/26	68	33	58	9	Surface Treatment - Slurry Seal	8/1/17
113	128B	Batavia Street	Maple Avenue	Chapman Avenue	AC	B	4	647	60	36,297	4/2/26	68	100	0	0	New Construction - Initial	1/1/80
252	12	Chapman Avenue	Main Street	Batavia Street	AAC	B	4	1,695	60	102,774	5/19/26	68	58	26	16	Overlay - AC Structural	3/21/11
475	102	Glassell Street	Taft Avenue	Trenton Avenue	AAC	B	5	1,365	80	107,676	3/20/26	68	66	28	6	4 in overlay	6/12/07
203	3526	Cambridge Street	Sycamore Avenue	Palm Avenue	AC	C	2	630	34	18,445	3/26/26	68	16	13	71	New Construction - Initial	1/1/80
216	243	Canyon View Avenue	Outrider Street	1230' W Newport Boulevard	AC	B	4	1,025	48	50,041	5/26/26	68	73	27	0	New Construction - Initial	1/1/80
252	47	Chapman Avenue	Crawford Canyon Road/Cannon Roa	Canyon view Avenue	AC	B	4	1,620	80	125,399	5/14/26	68	66	34	0	Surface Treatment - Slurry Seal	10/10/19
705	316	Main Street	Chapman Avenue	Palmyra Avenue	AC	B	4	1,350	60	86,958	4/2/26	68	92	8	0	New Construction - Initial	1/1/80
548	208	Hewes Street	Chapman Avenue	Marmon Avenue	AC	B	4	1,560	60	90,967	5/15/26	69	39	34	27	Surface Treatment - Slurry Seal	1/1/91
1144	280	Tustin Street	Katella Avenue	Adams Avenue	AC	B	3	885	40	38,227	5/18/26	69	30	59	11	Surface Treatment - Slurry Seal	8/1/17
1186	2972	Walnut Avenue	Park Lane	Milford	AC	C	2	1,335	40	44,051	5/22/26	69	63	30	7	Surface Treatment - Slurry Seal	1/1/91
636	511	La Veta Avenue	Tustin Avenue	Frontage Road	AC	B	4	570	60	40,205	5/19/26	69	74	0	26	New Construction - Initial	1/1/80
1189	546	Wanda Road	420' s/o Santiago Boulevard	Katella Avenue	AC	B	4	750	60	42,703	5/20/26	69	51	45	4	New Construction - Initial	1/1/80
787	429	Newport Boulevard	Skylark Place	Canyon View Avenue	AC	B	2	1,545	40	52,996	5/12/26	69	100	0	0	New Construction - Initial	1/1/80
203	223	Cambridge Street	Palmyra Avenue	La Veta Avenue	AAC	C	2	1,345	60	71,372	3/26/26	69	81	19	0	Overlay - AC Structural	12/12/12
611	377	Katella Avenue	Struck Avenue	Main Street	AC	B	6	1,600	80	133,339	5/19/26	69	49	37	14	Surface Treatment - Slurry Seal	8/1/17
252	31	Chapman Avenue	Hewes Street	Rancho Santiago Blvd	AC	B	3	1,360	80	102,646	5/14/26	69	62	31	7	Surface Seal - Fog Seal	8/7/23
287	158	Collins Avenue	California Street	Tustin Street	AAC	B	4	1,290	52	85,213	4/10/26	69	72	0	28	Overlay - AC Structural	1/1/94
216	244	Canyon View Avenue	White Oak Ridge	Jamboree Road	AC	B	4	1,820	60	107,349	5/26/26	70	91	9	0	Asphalt Rubber Hot Mix	7/1/13
1012	477	Santiago Canyon Road	Windes Road	450' w/o Kennymeade Street	AC	B	4	790	80	63,288	5/6/26	70	92	7	1	New Construction - Initial	1/1/80
252	14A	Chapman Avenue	Clark Street	RR Tracks	AAC	B	5	907	56	53,093	5/22/26	70	66	26	8	Overlay - AC Structural	3/21/11
668	876	Lincoln Avenue	Orange-Olive Road	Oceanview Street	AAC	B	4	1,930	80	158,778	5/19/26	70	43	35	22	4 in overlay	9/11/07
862	446	Parker Street	La Veta Avenue	1060' s/o La Veta Avenue	AAC	B	2	1,060	60	61,182	4/3/26	70	59	31	10	Overlay - AC Structural	10/1/08
636	514	La Veta Avenue	Fairmont Way	Yorba Street	AC	B	4	304	60	17,297	5/19/26	70	54	46	0	New Construction - Initial	1/1/80
590	3505	Jamboree Road	Santiago Canyon Rd	Chapman Avenue	AC	B	6	1,215	40	61,375	5/13/26	70	56	44	0	New Construction - Initial	1/1/80
1012	487	Santiago Canyon Road	Lakeview Trail	Newport Boulevard	AC	B	2	810	80	61,664	5/6/26	70	100	0	0	New Construction - Initial	1/1/80
1109	2014	Sycamore Avenue	Eckhoff Street	Ash Street	AC	C	2	1,300	39	50,448	4/10/26	70	53	15	32	Surface Treatment - Slurry Seal	1/1/97
611	378	Katella Avenue	Main Street	Batavia Street	AC	B	6	1,390	90	130,599	5/19/26	70	47	45	8	Surface Treatment - Slurry Seal	8/1/17
787	430	Newport Boulevard	Canyon View Avenue	Skylark Place	AC	B	2	1,545	40	65,563	5/12/26	70	100	0	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1012	478	Santiago Canyon Road	450' w/o Kennymeade Street	Lolita Street	AC	B	4	1,595	60	94,705	5/6/26	70	100	0	0	New Construction - Initial	1/1/80
902	663	Prospect Street	Larkstone Drive	Fairhaven Avenue	AAC	B	2	1,405	40	64,715	5/15/26	70	61	29	10	Overlay - AC Structural	12/12/12
1144	298	Tustin Street	Seba Street	Fairhaven Avenue	AC	B	6	945	80	69,218	5/18/26	70	54	43	3	New Construction - Initial	1/1/80
252	1	Chapman Avenue	Lewis Street	Manchester Avenue	AC	B	6	1,325	80	97,294	5/22/26	71	44	53	3	New Construction - Initial	10/4/12
252	36	Chapman Avenue	Equestrian Dr	Broadmoor Trail	AAC	B	4	1,520	80	125,361	5/14/26	71	58	33	9	Overlay - AC Structural	12/12/12
475	90	Glassell Street	Lincoln Avenue	Dunton Avenue	AAC	B	4	240	64	23,450	5/19/26	71	32	67	1	Overlay - AC Structural	12/1/09
611	3164	Katella Avenue	Struck Avenue	Santa Ana River	AAC	B	3	953	40	37,627	5/20/26	71	43	46	11	2 in Cold Mill & Overlay	5/8/07
636	522	La Veta Avenue	Swidler Place	James Street	AC	B	4	655	60	39,750	5/21/26	71	78	0	22	New Construction - Initial	1/1/80
216	252	Canyon View Avenue	Newport Boulevard	Aspen Street	AC	B	4	815	60	45,114	5/12/26	71	83	17	0	Asphalt Rubber Hot Mix	7/1/13
252	7	Chapman Avenue	Anita Drive	Bitterbush Street	AAC	B	3	920	40	33,208	5/22/26	71	97	0	3	Surface Treatment - Slurry Seal	8/1/17
1144	277	Tustin Street	Van Owen Avenue	Chestnut Avenue	AC	B	3	970	40	37,452	5/15/26	71	48	47	5	Surface Treatment - Slurry Seal	8/1/17
464	1164	Garden Grove Boulevard	The City Drive	Bridge (230' E The City Drive)	AC	B	6	255	80	23,835	5/22/26	71	42	45	13	New Construction - Initial	1/1/80
203	227	Cambridge Street	Rose Avenue	Walnut Avenue	AAC	C	2	825	36	28,370	3/26/26	71	41	42	17	Overlay - AC Structural	2/10/10
113	122	Batavia Street	Railroad Tracks	Katella Avenue	AC	B	5	1,270	60	76,494	5/21/26	71	68	31	1	New Construction - Initial	4/13/17
1144	284	Tustin Street	Collins Avenue	Mayfair Avenue	AC	B	6	1,205	80	90,630	5/14/26	71	35	43	22	Surface Treatment - Slurry Seal	9/8/17
475	105	Glassell Street	Quincy Avenue	Collins Avenue	AC	B	4	1,190	60	67,540	3/20/26	72	71	29	0	2 in Cold Mill & Overlay	10/16/07
287	151	Collins Avenue	Commerce Street	Main Street	AAC	B	4	1,480	60	89,921	4/9/26	72	58	25	17	Overlay - AC Structural	1/1/93
1144	283	Tustin Street	Collins Avenue	Adams Avenue	AC	B	3	1,540	40	56,071	5/15/26	72	31	43	26	Surface Treatment - Slurry Seal	8/1/17
374	2004	Eckhoff Street	Maple Avenue	Chapman Avenue	AC	C	2	650	39	23,177	4/9/26	72	38	43	19	Surface Treatment - Slurry Seal	1/1/97
1134	815	Town & Country Road	Lawson Way	Parker Street	AC	B	4	1,050	64	76,644	4/3/26	72	47	28	25	New Construction - Initial	1/1/80
203	224	Cambridge Street	Chapman Avenue	Palmyra Avenue	AC	C	2	1,305	30	44,784	3/26/26	72	100	0	0	New Construction - Initial	1/1/80
415	869	Fairhaven Avenue	Ponderosa Street	Lowry Street	AC	B	4	1,690	60	77,863	5/21/26	72	62	34	4	New Construction - Initial	1/1/80
548	212	Hewes Street	Walnut Avenue	Spring Street	AC	B	4	1,355	60	76,594	5/8/26	72	89	3	8	Surface Treatment - Slurry Seal	1/1/95
668	3549	Lincoln Avenue	End PCC (95' E/ Tustin St)	Tustin Street	PCC	B	0	95	48	5,125	5/19/26	72	42	48	10	New Construction - Initial	1/1/80
1112	3506	Taft Avenue	Cannon Street	Yukon Street	AC	C	2	485	16	10,471	5/1/26	72	38	62	0	New Construction - Initial	1/1/80
415	2456	Fairhaven Avenue	City Limit	Tustin Avenue	AC	B	2	960	32	30,720	5/18/26	72	63	26	11	New Construction - Initial	1/1/80
611	380	Katella Avenue	Batavia Street	Glassell Street	AC	B	6	2,665	90	236,201	5/14/26	72	63	36	1	Surface Treatment - Slurry Seal	8/1/17
475	84	Glassell Street	Chapman Avenue	Almond Avenue	AC	C	2	540	48	25,396	5/21/26	72	21	56	23	New Construction - Initial	1/1/80
590	439	Jamboree Road	Chapman Avenue	Canyon View Avenue	AC	B	6	2,820	84	266,528	5/13/26	73	100	0	0	Asphalt Rubber Hot Mix	7/1/13
1186	533	Walnut Avenue	Tustin Street	Wayfield Street	AC	C	2	480	48	25,052	5/21/26	73	93	7	0	Surface Treatment - Slurry Seal	1/1/91
374	180	Eckhoff Street	Sequoia Avenue	Orangewood Avenue	AAC	B	2	900	60	57,574	4/9/26	73	74	7	19	Overlay - AC Structural	1/31/16
705	318	Main Street	Palmyra Avenue	Stewart Drive	AAC	B	5	590	60	34,286	4/2/26	73	62	21	17	Overlay - AC Structural	8/1/16
1144	282	Tustin Street	Adams Avenue	Collins Avenue	AC	B	3	1,540	40	56,802	5/18/26	73	51	48	1	Surface Treatment - Slurry Seal	8/1/16
213	3516	Cannon Street	Cerritos Drive	250' s/o San Juan Drive	AAC	B	4	495	60	14,024	5/6/26	73	55	45	0	New Construction - Initial	1/1/97
590	441	Jamboree Road	Canyon View Avenue	City Limit	AC	B	4	4,175	70	280,123	5/13/26	73	100	0	0	Asphalt Rubber Hot Mix	7/1/13
1186	534	Walnut Avenue	Wayfield Street	Park Lane	AC	C	2	300	38	13,598	5/21/26	73	87	0	13	Surface Treatment - Slurry Seal	1/1/91
216	253	Canyon View Avenue	Apsen Street	White Oak Ridge	AC	B	4	1,455	60	87,530	5/12/26	73	100	0	0	Asphalt Rubber Hot Mix	7/1/13
902	661	Prospect Street	Palmyra Avenue	La Veta Avenue	AC	B	4	1,340	60	79,206	5/14/26	73	60	38	2	Surface Treatment - Slurry Seal	1/1/92
216	249	Canyon View Avenue	Chapman Avenue	Old Chapman Road	AC	B	4	1,180	60	59,871	5/8/26	73	91	9	0	New Construction - Initial	1/1/80
636	504	La Veta Avenue	Lemon Street	Glassell Street	AAC	B	4	601	60	38,717	5/22/26	73	65	35	0	Overlay - AC Structural	8/1/16
902	662	Prospect Street	La Veta Avenue	Larkstone Drive	AC	B	4	1,070	60	63,517	5/15/26	73	63	26	11	Surface Treatment - Slurry Seal	1/1/95
213	415	Cannon Street	250' s/o San Juan Drive	Cerritos Drive	AAC	B	4	495	24	15,130	5/6/26	73	42	0	58	Overlay - AC Structural	1/1/97
590	437	Jamboree Road	Irvine Park Road	Santiago Canyon Rd	AC	B	6	195	115	33,140	5/13/26	73	72	7	21	New Construction - Initial	1/1/80
902	660	Prospect Street	Chapman Avenue	Palmyra Avenue	AC	B	4	1,300	60	79,113	5/14/26	73	72	19	9	Surface Treatment - Slurry Seal	1/1/92
252	6	Chapman Avenue	Bitterbush Street	Anita Drive	AC	B	3	920	40	32,036	5/22/26	73	82	18	0	Surface Treatment - Slurry Seal	8/1/17
1012	485	Santiago Canyon Road	Amapola Avenue	Lakeview Trail	AC	B	2	1,015	42	39,069	5/6/26	73	100	0	0	New Construction - Initial	1/1/80
611	3165	Katella Avenue	Santa Ana River	Struck Avenue	AC	B	3	953	41	44,102	5/20/26	74	67	26	7	New Construction - Initial	1/1/80
216	251	Canyon View Avenue	1230' W Newport Boulevard	Newport Boulevard	AC	B	4	1,230	60	72,440	5/12/26	74	87	13	0	New Construction - Initial	1/1/80
113	147	Batavia Street	RR Crossing	Grove Avenue (S)	AC	B	5	825	60	39,733	5/20/26	74	58	41	1	2 in Cold Mill & Overlay	5/8/07
475	91	Glassell Street	Woodvale Avenue	Fletcher Avenue	AAC	B	4	660	64	45,834	5/19/26	74	54	46	0	Overlay - AC Structural	12/1/09
287	155	Collins Avenue	Glassell Street	Shaffer Street	AAC	B	4	1,350	52	66,644	4/10/26	74	63	24	13	Overlay - AC Structural	1/1/94
902	659	Prospect Street	Spring Street	Chapman Avenue	AAC	B	5	1,320	60	79,457	5/13/26	74	72	7	21	Overlay - AC Structural	5/1/08
1112	3507	Taft Avenue	Yukon Street	Cannon Street	AC	C	2	485	24	12,306	5/1/26	74	73	25	2	New Construction - Initial	1/1/80
787	428	Newport Boulevard	Skylark Place	County Line	AC	B	4	265	80	25,360	5/12/26	74	100	0	0	New Construction - Initial	1/1/80
1012	486	Santiago Canyon Road	Lakeview Trail	Amapola Avenue	AC	B	2	1,015	42	42,124	5/6/26	74	100	0	0	New Construction - Initial	1/1/80
1121	692	The City Drive	Park Central Avenue	Garden Grove Boulevard	AC	B	5	1,235	80	65,384	4/16/26	74	71	29	0	Surface Treatment - Slurry Seal	11/1/08
1109	2013	Sycamore Avenue	Ash Street	Main Street	AC	C	2	1,205	39	42,075	4/10/26	74	66	29	5	New Construction - Initial	1/1/80
252	75	Chapman Avenue	Santa Ana River (W)	Anita Drive	AC	B	7	450	80	12,784	5/22/26	74	75	25	0	Surface Treatment - Slurry Seal	8/1/17
1144	278	Tustin Street	Van Owen Avenue	PCC 150' N/ Katella Avenue	AC	B	3	750	40	20,652	5/18/26	74	32	39	29	Surface Treatment - Slurry Seal	8/1/17

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
113	146	Batavia Street	Southern Avenue	RR Crossing	AAC	B	5	1,490	60	95,063	5/20/26	74	61	39	0	Overlay - AC Structural	8/1/16
252	19	Chapman Avenue	Shaffer Street	Cambridge Street	AC	B	4	1,310	56	74,037	5/22/26	74	56	43	1	Surface Treatment - Slurry Seal	8/1/17
944	679	Riverdale Avenue	445' e/o Orange-Olive Road	City Limit	AAC	B	4	1,735	48	90,978	5/14/26	74	62	27	11	Overlay - AC Structural	10/1/08
374	179	Eckhoff Street	Orangewood Avenue	Sycamore Avenue	AC	C	2	1,150	60	63,735	5/20/26	74	65	23	12	Surface Treatment - Slurry Seal	1/1/97
1121	691	The City Drive	Style Street	Metropolitan Drive	AC	B	6	1,310	110	142,482	4/16/26	74	83	13	4	Surface Treatment - Slurry Seal	8/1/17
74	3453	Anaheim Way	State College Boulevard	Orangewood Avenue	AC	B	3	1,650	33	55,605	5/13/26	74	59	35	6	New Construction - Initial	1/1/80
636	15396	La Veta Avenue	Yorba Street	106' E Loretta Drive	AC	B	4	702	64	39,952	5/19/26	74	65	35	0	Surface Treatment - Slurry Seal	12/12/12
252	120	Chapman Avenue	Cliffway Drive	Canyon View Avenue	AC	B	2	2,265	37	90,722	5/14/26	75	63	35	2	Surface Treatment - Slurry Seal	10/10/19
668	875	Lincoln Avenue	Oceanview Street	Tustin Avenue	AAC	B	5	1,260	75	88,925	5/19/26	75	49	31	20	4 in overlay	9/11/07
791	444	Nohl Ranch Road	Maple Tree Street	Fernhill Lane	AC	B	2	1,270	48	55,061	5/19/26	75	49	27	24	New Construction - Initial	1/1/80
1144	292	Tustin Street	Chapman Avenue	Palmyra Avenue	AC	B	6	1,310	80	95,313	5/18/26	75	47	47	6	Surface Treatment - Slurry Seal	8/1/17
1189	548	Wanda Road	Quincy Avenue	Collins Avenue	AAC	B	2	1,435	54	78,202	5/20/26	75	77	8	15	Overlay - AC Structural	11/14/06
464	1165	Garden Grove Boulevard	Park Vine Street	The City Drive	AC	B	4	1,235	80	80,441	5/20/26	75	85	13	2	New Construction - Initial	1/1/80
705	304	Main Street	Katella Avenue	Struck Avenue	AAC	B	4	1,120	80	88,737	4/9/26	75	36	60	4	Overlay - AC Structural	1/1/02
1134	814	Town & Country Road	Main Street	Lawson Way	AC	B	4	1,220	60	84,882	4/3/26	75	58	23	19	Surface Treatment - Slurry Seal	1/1/91
711	3452	Manchester Avenue	Sheringham Avenue	North City Limits	AC	C	2	700	36	25,154	4/22/26	75	71	9	20	Surface Treatment - Slurry Seal	1/1/95
1144	286	Tustin Street	Mayfair Avenue	Walnut Avenue	AC	B	6	1,430	80	111,942	5/14/26	75	44	55	1	Surface Treatment - Slurry Seal	8/1/17
252	18	Chapman Avenue	Center Street	Shaffer Street	AC	B	4	335	56	18,096	5/22/26	75	50	50	0	Surface Treatment - Slurry Seal	8/1/17
1144	271	Tustin Street	Meats Avenue	East Village Avenue	AC	B	3	1,165	40	42,821	5/13/26	75	87	13	0	New Construction - Initial	1/1/80
113	145	Batavia Street	Fletcher Avenue	Southern Avenue	AAC	B	5	1,782	60	123,278	5/20/26	75	62	38	0	Overlay - AC Structural	8/1/16
743	897	Meats Avenue	Canal Street	Tustin Avenue	AAC	B	4	1,035	60	65,693	4/23/26	75	69	25	6	2 in Cold Mill & Overlay	10/16/07
213	419	Cannon Street	Hillgrove Ct	Cliffway Drive	AC	B	4	2,205	60	119,792	5/5/26	76	100	0	0	New Construction - Initial	1/1/80
1011	461	Santiago Boulevard	Villa Real Drive	Riding Way	AC	B	5	1,255	60	79,687	5/19/26	76	38	35	27	New Construction - Initial	1/1/80
213	3514	Cannon Street	Cerritos Drive	Patricia Ct	AAC	B	4	1,103	24	37,723	5/5/26	76	20	61	19	New Construction - Initial	1/1/97
913	2017	Rancho Santiago Blvd	Condor Crest Avenue	Bond Avenue	AC	C	2	1,050	36	33,178	5/7/26	76	94	6	0	New Construction - Initial	1/1/80
203	233	Cambridge Street	Briardale Avenue	Taft Avenue	AAC	B	4	320	60	28,759	4/23/26	76	51	35	14	Overlay - AC Structural	12/1/09
1121	697	The City Drive	Chapman Avenue	The City Way	AAC	B	8	1,170	88	117,729	4/22/26	76	32	60	8	Surface Treatment - Slurry Seal	5/27/25
1144	3541	Tustin Street	End PCC (150' S/ Katella Ave)	Katella Ave	PCC	B	0	155	62	11,894	5/15/26	76	45	49	6	New Construction - Initial	1/1/80
1144	274	Tustin Street	Briardale Avenue	Taft Avenue	AC	B	3	585	40	22,136	5/18/26	76	54	33	13	Surface Treatment - Slurry Seal	8/1/17
287	152	Collins Avenue	Main Street	Batavia Street	AAC	B	4	1,450	60	86,271	4/10/26	76	71	8	21	Overlay - AC Structural	1/1/93
636	517	La Veta Avenue	220' W Wheeler Street	Laurinda Lane	AC	B	4	890	60	45,545	5/19/26	76	85	8	7	Surface Treatment - Slurry Seal	12/12/12
403	201	Esplanade Street	Chapman Avenue	Washington Avenue	AAC	B	4	480	60	25,854	5/14/26	76	90	10	0	Overlay - AC Structural	1/31/16
1011	457	Santiago Boulevard	Serrano Avenue	Taft Avenue	AC	B	5	1,320	56	74,963	5/13/26	76	50	48	2	New Construction - Initial	1/1/80
475	3523	Glassell Street	Dunton Avenue	Woodvale Avenue	AAC	B	4	1,465	64	99,087	5/19/26	76	57	40	3	New Construction - Initial	12/1/09
213	3512	Cannon Street	Stillwater Avenue	Chapman Avenue	AC	B	4	1,735	60	109,568	5/5/26	77	41	59	0	Surface Treatment - Slurry Seal	8/1/16
374	2003	Eckhoff Street	Sycamore Avenue	Maple Avenue	AC	C	2	1,160	37	44,092	5/20/26	77	23	41	36	Surface Treatment - Slurry Seal	1/1/97
1186	539	Walnut Avenue	Hart Street	Cul-de-sac	AC	C	2	457	48	31,309	5/19/26	77	100	0	0	New Construction - Initial	4/3/12
287	157	Collins Avenue	Cambridge Street	California Street	AAC	B	4	1,335	52	54,096	4/10/26	77	93	7	0	Overlay - AC Structural	1/1/94
374	181	Eckhoff Street	RR Tracks (370' S Collins Avenue)	Sequoia Avenue	AAC	B	2	1,070	60	62,391	4/9/26	77	61	24	15	Overlay - AC Structural	1/31/16
113	144	Batavia Street	Lincoln Avenue	Fletcher Avenue	AC	B	5	1,730	60	85,112	5/20/26	77	55	41	4	New Construction - Initial	4/3/12
213	420	Cannon Street	Cliffway Drive	Creekside Avenue	AC	B	4	1,930	60	113,053	5/5/26	77	81	0	19	New Construction - Initial	1/1/80
636	502	La Veta Avenue	Montgomery Street	Lemon Street	AAC	B	4	633	60	39,841	5/22/26	77	85	15	0	Overlay - AC Structural	8/1/16
216	2823	Canyon View Avenue	Raven Lane	Hidden Canyon	AC	B	4	1,530	48	89,772	5/8/26	77	100	0	0	New Construction - Initial	1/1/80
611	384	Katella Avenue	Shaffer Street	Cambridge Street	AC	B	6	1,210	90	115,661	5/22/26	77	83	17	0	New Construction - Initial	1/1/80
705	3513	Main Street	Stewart Drive	La Veta Avenue	AAC	B	5	745	60	61,963	4/2/26	77	100	0	0	New Construction - Initial	8/1/16
1144	290	Tustin Street	Palm Avenue	Chapman Avenue	AC	B	6	1,295	80	98,074	5/14/26	77	73	21	6	Surface Treatment - Slurry Seal	8/1/17
216	242	Canyon View Avenue	Hidden Canyon	Outrider Street	AC	B	4	725	48	40,059	5/8/26	77	90	10	0	New Construction - Initial	1/1/80
1121	690	The City Drive	The City Way	Justice Center Way	AAC	B	8	1,310	93	85,960	4/22/26	77	40	59	1	Surface Treatment - Slurry Seal	5/27/25
1144	268	Tustin Street	Heim Avenue	East Village Way	AC	B	3	1,480	40	44,678	5/18/26	77	83	17	0	New Construction - Initial	1/1/80
636	520	La Veta Avenue	Prospect Street	Swidler Place	AC	B	4	1,170	60	72,410	5/21/26	77	89	11	0	New Construction - Initial	1/1/80
1186	544	Walnut Avenue	Rancho Santiago Blvd	East End	AAC	C	2	650	36	24,252	5/15/26	77	75	25	0	Overlay - AC Structural	10/1/08
1144	288	Tustin Street	Walnut Avenue	Palm Avenue	AC	B	6	1,310	80	101,967	5/14/26	77	68	29	3	Surface Treatment - Slurry Seal	8/1/17
113	123	Batavia Street	Katella Avenue	Struck Avenue	AAC	B	4	1,095	60	68,763	5/21/26	77	60	34	6	Overlay - AC Structural	1/31/16
113	121	Batavia Street	Taft Avenue	Railroad Tracks (s/o Taft Avenue)	AAC	B	5	1,180	60	72,534	5/21/26	77	69	31	0	Overlay - AC Structural	1/31/16
475	103	Glassell Street	Trenton Avenue	Katella Avenue	AAC	B	4	1,055	80	80,353	3/20/26	77	98	0	2	4 in overlay	6/12/07
611	388	Katella Avenue	California Street	Tustin Ave.	AAC	B	6	1,320	90	112,396	3/27/26	77	100	0	0	Overlay - AC Structural	1/1/91
1011	463	Santiago Boulevard	Robinhood Place	Villa Real Drive	AC	B	5	1,715	60	101,360	5/19/26	78	53	29	18	New Construction - Initial	1/1/80
1258	554	Yorba Street	Chapman Avenue	Palmyra Avenue	AC	B	2	1,320	60	79,299	5/19/26	78	49	32	19	Surface Treatment - Slurry Seal	1/1/92
403	200	Esplanade Street	Washinton Avenue	Dorothy Avenue	AAC	B	4	1,220	60	71,950	5/14/26	78	75	25	0	Overlay - AC Structural	1/31/16

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
663	362	Lewis Street	Simmons Avenue	Chapman Avenue	AC	B	3	1,225	60	68,594	5/20/26	78	74	12	14	New Construction - Initial	1/1/80
1023	3282	Serrano Avenue	Kendra Rd	Nohl Ranch Road	AC	B	4	453	60	27,785	4/30/26	78	70	0	30	New Construction - Initial	1/1/80
1144	3510	Tustin Street	Taft Ave	Chestnut Avenue	AC	B	3	765	40	29,096	5/18/26	78	51	40	9	New Construction - Initial	1/1/80
1144	270	Tustin Street	East Village Way	Meats Avenue	AC	B	3	1,165	40	42,761	5/18/26	78	88	12	0	New Construction - Initial	1/1/80
636	3524	La Veta Avenue	Route 55 Bridge	Fairmont Way	AC	B	4	620	60	45,224	5/19/26	78	80	20	0	New Construction - Initial	1/1/80
944	678	Riverdale Avenue	Orange-Olive Road	455' e/o Orange-Olive Road	AAC	B	4	455	60	26,855	5/14/26	78	65	35	0	Overlay - AC Structural	10/1/08
252	30	Chapman Avenue	Earlham Street	Hewes Street	AC	B	6	580	80	47,825	5/18/26	78	66	34	0	Surface Seal - Fog Seal	8/7/23
636	518	La Veta Avenue	Laurinda Lane	Prospect Street	AC	B	4	1,190	60	70,287	5/19/26	78	98	0	2	Surface Treatment - Slurry Seal	12/12/12
1011	464	Santiago Boulevard	Lincoln Avenue	Robinhood Place	AC	B	5	1,950	60	121,916	5/19/26	78	57	36	7	New Construction - Initial	1/1/80
743	895	Meats Avenue	Cambridge Street	Canal Street	AAC	B	4	1,400	60	84,989	4/23/26	78	97	0	3	2 in Cold Mill & Overlay	10/16/07
213	416	Cannon Street	Patricia Ct	Hillgrove Ct	AAC	B	4	550	60	31,884	5/5/26	78	92	0	8	Overlay - AC Structural	1/1/97
252	55B	Chapman Avenue	Wayfield Street	55 NB Ramp	AAC	B	6	1,157	80	121,038	5/15/26	78	64	36	0	Surface Treatment - Slurry Seal	8/1/17
500	2400	Grand Street	Chapman Avenue	Almond Avenue	PCC	C	2	610	40	23,322	5/21/26	78	35	53	12	New Construction - Initial	1/1/80
213	3515	Cannon Street	Patricia Ct	Cerritos Drive	AAC	B	4	1,103	35	27,512	5/5/26	79	58	42	0	New Construction - Initial	1/1/97
464	1162	Garden Grove Boulevard	Lewis Street	Park Vine Street	AC	B	4	1,075	80	79,710	5/20/26	79	89	9	2	New Construction - Initial	1/1/80
403	191	Esplanade Street	Fernwood Avenue	Fairhaven Avenue	AAC	B	4	1,060	60	65,062	5/15/26	79	82	11	7	Overlay - AC Structural	1/1/18
443	256	Fletcher Street	Batavia Street	American Way	AC	B	3	1,037	60	63,744	4/23/26	79	70	0	30	New Construction - Initial	2/1/16
743	893	Meats Avenue	Pine Street	Cambridge Street	AAC	B	4	695	60	40,406	4/23/26	79	87	0	13	2 in Cold Mill & Overlay	10/16/07
611	386	Katella Avenue	Cambridge Street	California Street	AAC	B	6	1,085	90	103,519	3/27/26	79	100	0	0	Overlay - AC Structural	1/1/91
252	17	Chapman Avenue	Grand Street	Center Street	AC	B	4	325	56	19,518	5/22/26	79	52	46	2	Surface Treatment - Slurry Seal	8/1/17
147	186	Bond Avenue	Little Lane	440' E Little Lane	AC	B	4	440	42	16,969	5/7/26	79	84	0	16	Surface Treatment - Slurry Seal	1/1/91
252	77	Chapman Avenue	The City Drive	5 Fwy SB On Ramp	AC	B	8	710	126	72,590	5/22/26	79	83	17	0	Surface Treatment - Slurry Seal	8/1/17
252	20	Chapman Avenue	Cambridge Street	Jameson Street	AAC	B	4	1,185	60	70,561	5/15/26	79	89	11	0	Overlay - AC Structural	8/1/17
1112	338	Taft Avenue	Tustin Avenue	Scramento Street	AAC	B	4	1,390	60	86,176	5/13/26	79	45	9	46	Overlay - AC Structural	6/1/19
1144	273	Tustin Street	Briardale Avenue	Meats Avenue	AAC	B	3	1,985	40	86,617	5/13/26	79	65	32	3	Overlay - AC Structural	8/1/17
1324	8014	Manchester Avenue	Sheringham Avenue	Compton Avenue	AC	C	2	290	25	7,369	4/22/26	79	66	9	25	New Construction - Initial	10/4/12
1112	2472	Taft Avenue	Sycamore Street	Yurok Street	AC	C	2	1,035	58	55,866	5/26/26	80	43	39	18	New Construction - Initial	1/1/80
252	28	Chapman Avenue	James Street	Esplanade Street	AC	B	6	1,260	80	92,654	5/15/26	80	100	0	0	Surface Treatment - Slurry Seal	8/1/17
1011	3214	Santiago Boulevard	Brookside Avenue	City Limits	AAC	B	5	300	60	12,881	5/13/26	80	64	36	0	Overlay - AC Structural	12/1/09
203	221	Cambridge Street	La Veta Avenue	City Limit	AAC	C	2	1,120	60	75,217	3/26/26	80	97	0	3	4 in overlay	3/13/07
705	308	Main Street	Collins Avenue	Alvarez Avenue	AAC	B	4	1,505	60	89,546	4/2/26	80	78	22	0	Overlay - AC Structural	8/1/16
1144	272	Tustin Street	Meats Avenue	Briardale Avenue	AAC	B	3	1,985	40	71,790	5/18/26	80	85	15	0	Overlay - AC Structural	8/1/17
203	240	Cambridge Street	Meats Avenue	Buckeyewood Avenue	AAC	B	4	1,105	60	64,603	4/23/26	80	80	0	20	Overlay - AC Structural	12/1/09
1144	3540	Tustin Street	End PCC (130' N/ Katella Ave)	Katella Ave	PCC	B	0	135	50	6,720	5/18/26	80	40	0	60	New Construction - Initial	1/1/80
252	27	Chapman Avenue	Prospect Street	James Street	AC	B	6	1,475	80	115,343	5/15/26	80	91	0	9	Surface Treatment - Slurry Seal	8/1/17
636	500	La Veta Avenue	Parker Street	Montgomery Street	AAC	B	4	600	50	30,310	5/22/26	80	62	28	10	Overlay - AC Structural	8/1/16
787	431	Newport Boulevard	White Oak Ridge	Canyon View Avenue	AAC	B	4	1,225	80	97,264	5/12/26	80	91	9	0	Overlay - AC Structural	1/1/02
1023	3277	Serrano Avenue	San Lorenzo Court	Kendra Road	AC	B	4	3,519	46	169,942	4/30/26	80	69	8	23	New Construction - Initial	1/1/80
1186	525	Walnut Avenue	Main Street	Batavia Street	AAC	C	2	1,370	30	44,543	5/19/26	80	48	31	21	Overlay - AC Structural	1/1/96
1144	276	Tustin Street	Chestnut Avenue	Van Owen Avenue	AC	B	3	970	40	37,776	5/18/26	81	76	0	24	Surface Treatment - Slurry Seal	8/1/17
213	412	Cannon Street	Santiago Canyon Road	San Juan Drive	AAC	B	4	655	68	45,738	5/6/26	81	80	0	20	Overlay - AC Structural	1/1/97
403	193	Esplanade Street	La Veta Avenue	Fernwood Avenue	AAC	B	4	1,355	60	82,759	5/15/26	81	87	13	0	Overlay - AC Structural	1/1/18
475	108	Glassell Street	Collins Avenue	Mayfair Avenue	AC	B	2	1,160	42	46,049	3/20/26	81	54	0	46	New Construction - Initial	1/1/80
1011	459	Santiago Boulevard	Riding Way	Serrano Avenue	AC	B	5	1,150	56	64,929	5/13/26	81	69	31	0	New Construction - Initial	1/1/80
1186	528	Walnut Avenue	Glassell Street	Center Street	AAC	C	3	955	46	42,344	5/14/26	81	82	18	0	Surface Treatment - Slurry Seal	6/1/21
213	410	Cannon Street	Bridge	Santiago Canyon Road	AAC	B	4	1,210	75	106,893	5/1/26	81	73	21	6	Overlay - AC Structural	1/1/09
862	447	Parker Street	1060' s/o La Veta Avenue	470' s/o Town & Country	AC	B	2	890	60	54,322	4/3/26	81	90	10	0	New Construction - Initial	1/1/80
216	250	Canyon View Avenue	Old Chapman Road	Raven Lane	AC	B	4	815	60	53,648	5/8/26	81	100	0	0	New Construction - Initial	1/1/80
252	26	Chapman Avenue	Malena Street	Prospect Street	AC	B	6	1,515	80	120,031	5/15/26	81	51	46	3	Surface Treatment - Slurry Seal	8/1/17
147	185	Bond Avenue	Gravier Street	Little Lane	AC	B	2	1,680	42	66,954	5/7/26	81	85	7	8	Surface Treatment - Slurry Seal	1/1/91
743	892	Meats Avenue	Orange-Olive Road	Pine Street	AAC	B	4	1,300	60	77,476	4/23/26	81	100	0	0	2 in Cold Mill & Overlay	10/16/07
252	22	Chapman Avenue	Jameson Street	Lincoln Street	AAC	B	4	798	60	47,888	5/15/26	81	86	14	0	Overlay - AC Structural	8/1/17
252	70	Chapman Avenue	Feldner Road	415' w/o Main Street	AAC	B	6	550	80	42,916	5/19/26	81	56	35	9	Surface Treatment - Slurry Seal	8/1/17
252	21	Chapman Avenue	Lincoln Street	Tustin Avenue	AAC	B	4	600	60	28,901	5/15/26	81	85	15	0	Overlay - AC Structural	8/1/17
743	889	Meats Avenue	Glassell Street	Orange-Olive Road	AAC	B	4	690	60	39,378	4/23/26	81	100	0	0	Overlay - AC Structural	1/31/16
1186	537	Walnut Avenue	Milford Street	Handy Street	AC	C	2	535	38	24,529	5/19/26	81	100	0	0	New Construction - Initial	4/3/12
252	9	Chapman Avenue	Eckhoff Street	Feldner Road	AC	B	6	1,365	75	102,919	5/19/26	81	50	29	21	Surface Treatment - Slurry Seal	8/1/17
611	382	Katella Avenue	Glassell Street	Shaffer Street	AC	B	6	1,170	90	112,244	3/27/26	81	100	0	0	New Construction - Initial	1/1/80
203	228	Cambridge Street	Collins Avenue	Rose Avenue	AAC	C	2	1,800	34	54,919	3/26/26	81	80	10	10	Overlay - AC Structural	2/1/10

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
475	94	Glassell Street	Meats Avenue	Blueridge Avenue	AAC	B	4	1,565	80	122,241	3/20/26	82	90	0	10	Overlay - AC Structural	8/1/16
475	95	Glassell Street	Blueridge Avenue	Taft Avenue	AAC	B	5	1,075	80	64,677	3/20/26	82	45	36	19	Overlay - AC Structural	8/1/16
252	34	Chapman Avenue	Canyon View Avenue	Cliffway Drive	AC	B	2	2,265	37	86,105	5/14/26	82	79	21	0	Surface Treatment - Slurry Seal	10/10/19
252	8	Chapman Avenue	Bitterbush Street	Eckhoff Street	AC	B	6	940	80	72,347	5/19/26	82	48	48	4	Surface Treatment - Slurry Seal	8/1/17
1144	281	Tustin Street	Adams Avenue	Katella Avenue	AC	B	3	885	40	30,227	5/15/26	82	36	43	21	Surface Treatment - Slurry Seal	8/1/17
252	5	Chapman Avenue	Rampart Street	Santa Ana River Bridge (W)	AC	B	6	1,260	80	127,039	5/22/26	82	78	22	0	Surface Treatment - Slurry Seal	8/1/17
705	314	Main Street	Palm Avenue	Chapman Avenue	AAC	B	4	1,375	60	95,480	4/2/26	82	45	25	30	Overlay - AC Structural	8/1/16
705	310	Main Street	Alvarez Avenue	Orangewood Avenue	AAC	B	4	1,120	60	65,844	4/2/26	82	100	0	0	Overlay - AC Structural	8/1/16
1011	455	Santiago Boulevard	Taft Avenue	Brookside Avenue	AC	B	4	1,080	56	47,631	5/13/26	82	83	17	0	New Construction - Initial	1/1/80
1144	3511	Tustin Street	Chestnut Avenue	Taft Avenue	AC	B	3	760	40	29,990	5/15/26	82	81	19	0	Surface Treatment - Slurry Seal	8/1/17
252	55C	Chapman Avenue	55 NB Ramp	Yorba Street	AAC	B	7	796	80	85,554	5/15/26	82	100	0	0	Surface Treatment - Slurry Seal	8/1/17
252	55A	Chapman Avenue	Tustin Avenue	Wayfield Street	AAC	B	6	659	80	52,723	5/18/26	82	85	15	0	Surface Treatment - Slurry Seal	8/1/17
902	2903	Prospect Street	Walnut Avenue	Spring St	AAC	B	4	1,345	50	74,006	5/7/26	82	100	0	0	Overlay - AC Structural	5/1/08
1186	529	Walnut Avenue	Center Street	Shaffer Street	AAC	C	2	365	36	12,330	5/14/26	82	76	24	0	Surface Treatment - Slurry Seal	6/1/21
636	496	La Veta Avenue	Main Street	Pepper Street	AAC	B	6	700	75	56,911	5/22/26	82	53	21	26	Overlay - AC Structural	1/1/97
475	109	Glassell Street	Mayfair Avenue	Walnut Avenue	AC	B	2	1,515	44	59,811	5/22/26	82	39	0	61	New Construction - Initial	1/1/80
475	113	Glassell Street	La Veta Avenue	22 West On/Off Ramp	AAC	B	4	1,565	80	102,596	3/26/26	82	37	63	0	Overlay - AC	2/28/16
1112	340	Taft Avenue	Sacramento Street	Fern Street	AAC	B	4	1,310	60	77,851	5/13/26	83	45	45	10	Overlay - AC Structural	6/1/19
443	255	Fletcher Street	American Way	Glassell Street	AAC	B	3	1,571	60	92,843	4/23/26	83	69	11	20	Overlay - AC Structural	1/31/16
902	7657	Prospect Street	Bond Avenue	Walnut Ave	AAC	B	4	1,677	50	89,525	5/7/26	83	94	0	6	Overlay - AC Structural	5/1/08
1144	275	Tustin Street	Taft Avenue	Briardale Avenue	AC	B	3	590	40	22,412	5/15/26	83	69	11	20	Surface Treatment - Slurry Seal	8/1/17
113	130	Batavia Street	Palmyra Avenue	La Veta Avenue	AC	C	2	1,300	32	61,593	4/3/26	83	64	0	36	New Construction - Initial	4/3/12
252	25	Chapman Avenue	Yorba Street	Malena Street	AAC	B	6	1,145	80	93,090	5/15/26	83	97	3	0	Overlay - AC Structural	8/1/17
113	129	Batavia Street	Chapman Avenue	Palmyra Avenue	AC	C	2	1,300	38	50,776	4/3/26	83	55	0	45	New Construction - Initial	4/3/12
403	197	Esplanade Street	Dorothy Ave	La Veta Ave	AAC	B	3	995	54	50,833	5/14/26	83	85	15	0	Overlay - AC Structural	1/31/16
705	306	Main Street	Struck Avenue	Collins Avenue	AAC	B	4	1,280	80	102,586	4/9/26	83	46	54	0	Overlay - AC Structural	1/1/02
203	238	Cambridge Street	Buckeyewood Avenue	Briardale Avenue	AAC	B	4	1,225	60	68,435	4/23/26	84	98	0	2	Overlay - AC Structural	12/1/09
1012	3553	Santiago Canyon Road	Jamboree Road	2050' E/O JAMBOREE ROAD (Buildin	AC	B	4	2,048	64	166,145	5/13/26	84	99	0	1	New Construction - Initial	1/1/80
1012	3192	Santiago Canyon Road	Windes Drive (WB Only)	Orange Park Boulevard	AC	B	4	1,450	34	54,710	5/6/26	84	100	0	0	New Construction - Initial	1/1/80
1186	538	Walnut Avenue	Handy Street	Hart Street	AC	C	2	790	34	22,814	5/19/26	84	100	0	0	New Construction - Initial	4/3/12
653	2191	Lawson Way	Town & Country Road	535' s/o Town & Country Road	AC	C	2	535	60	31,611	3/29/24	85	52	48	0	Asphalt Rubber Hot Mix	5/1/13
1144	4200	Tustin Street	Heim Ave	170' n/o Heim Avenue	AC	B	3	170	34	5,930	5/15/26	85	100	0	0	New Construction - Initial	1/1/80
636	491	La Veta Avenue	540' w/o Flower Circle	Flower Circle	AAC	B	4	540	86	35,567	4/3/26	85	100	0	0	Overlay - AC Structural	8/1/17
374	182	Eckhoff Street	Collins Avenue	370' S Collins Avenue	AAC	B	2	370	60	19,601	4/9/26	85	66	34	0	Overlay - AC Structural	1/1/02
1112	344	Taft Avenue	Santiago Boulevard	960' e/o Santiago Boulevard	AC	C	2	960	30	59,386	5/13/26	85	100	0	0	New Construction - Initial	1/1/80
147	183	Bond Avenue	Prospect Street	Gravier Street	AC	B	4	185	48	8,220	5/7/26	85	100	0	0	New Construction - Initial	1/1/80
705	3532	Main Street	Almond Ave	255' N/ Almond Ave	PCC	B	0	252	10	2,846	5/18/26	86	38	62	0	New Construction - Initial	1/1/80
1144	269	Tustin Street	East Village Way	Heim Avenue	AC	B	3	1,480	40	54,758	5/13/26	86	100	0	0	New Construction - Initial	1/1/80
252	3527	Chapman Avenue	County Line	Equestrian Dr	AAC	B	4	295	80	20,984	5/14/26	86	100	0	0	New Construction - Initial	12/12/12
445	2002	Flower Street	Chapman Avenue	Almond Avenue	AAC	C	2	625	37	22,104	4/3/26	86	45	37	18	Overlay-Rubber Hot Mix	5/27/25
1023	672	Serrano Avenue	Cannon Street	1300' e/o Cannon Street	AAC	B	4	1,300	46	66,199	4/30/26	86	79	21	0	Overlay - AC Structural	3/21/11
636	492	La Veta Avenue	Flower Circle	Crest Road	AAC	B	4	1,030	65	66,363	4/3/26	86	100	0	0	Overlay - AC Structural	8/1/17
636	494	La Veta Avenue	Crest Road	Main Street	AAC	B	4	980	70	68,950	4/3/26	86	100	0	0	Overlay - AC Structural	8/1/17
705	313	Main Street	Orangewood Avenue	Palm Avenue	AAC	B	4	1,270	60	87,111	4/2/26	87	100	0	0	Overlay - AC Structural	8/1/16
1144	266	Tustin Street	170' n/o Heim Avenue	Heim Avenue	AC	B	3	170	48	7,427	5/15/26	87	52	17	31	New Construction - Initial	1/1/80
252	4	Chapman Avenue	5 Fwy SB On-Ramp	Rampart Street	AC	B	7	685	110	69,328	5/22/26	87	68	32	0	Surface Treatment - Slurry Seal	8/1/17
668	3548	Lincoln Avenue	End PCC (120' W/ Tustin St)	Tustin Street	PCC	B	0	120	52	6,068	5/19/26	87	77	0	23	New Construction - Initial	1/1/80
611	392B	Katella Avenue	Harding Street	Wanda Drive	AAC	B	5	384	64	35,265	4/29/26	87	5	95	0	Overlay - AC Structural	1/1/92
913	3065	Rancho Santiago Blvd	Bond Avenue	Orange Grove Avenue	AAC	C	2	782	38	34,596	5/7/26	87	51	15	34	Overlay - AC Structural	1/1/04
791	443	Nohl Ranch Road	Santiago Boulevard	Maple Tree Drive	AC	B	4	710	48	39,255	5/19/26	88	70	17	13	New Construction - Initial	1/1/80
611	3543	Katella Avenue	End PCC (110' W/ Tustin St)	Tustin Street	PCC	B	0	110	62	14,755	5/26/26	88	100	0	0	New Construction - Initial	1/1/80
1144	260	Tustin Street	Bixby Ave	Route 55 SB Off-Ramp	AAC	B	4	1,020	60	33,032	5/15/26	88	100	0	0	Overlay - AC Structural	6/1/21
252	2	Chapman Avenue	Manchester Avenue	The City Drive	AC	B	6	730	128	70,325	5/22/26	88	82	18	0	Surface Treatment - Slurry Seal	1/1/91
475	115	Glassell Street	Culver Avenue	La Veta Avenue	AAC	C	2	601	40	32,409	3/20/26	88	76	0	24	Overlay - AC Structural	2/28/16
252	3538	Chapman Avenue	End PCC (130' E/ Tustin St)	Tustin Street	PCC	B	0	130	60	8,122	5/18/26	89	52	0	48	New Construction - Initial	1/1/80
252	35	Chapman Avenue	Cliffway Drive	Calle Grande	AC	B	4	1,080	78	71,709	5/14/26	89	75	25	0	Surface Treatment - Slurry Seal	10/10/19
1144	3454	Tustin Street	350' s/o Lincoln Ave	170' n/o Heim	AC	B	3	1,180	40	54,348	5/15/26	89	100	0	0	New Construction - Initial	1/1/80
475	83	Glassell Street	Almond Avenue	Culver Avenue	AC	C	2	1,325	40	54,250	5/21/26	89	7	0	93	Surface Treatment - Slurry Seal	8/1/17
1144	3545	Tustin Street	Lincoln Ave	Pvmt Chnge (350' S/ Lincoln Ave)	AC	B	0	345	40	14,989	5/15/26	89	100	0	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
252	15	Chapman Avenue	Lemon Street	Chapman Avenue	AC	C	2	545	46	22,671	5/21/26	89	58	0	42	New Construction - Initial	1/1/80
213	423	Cannon Street	Creekside Avenue	Stillwater Avenue	AC	B	4	345	60	21,099	5/5/26	89	100	0	0	Surface Treatment - Slurry Seal	8/1/16
252	11	Chapman Avenue	415' w/o Main Street	Main Street	AAC	B	6	415	80	31,614	5/19/26	89	100	0	0	Overlay - AC Structural	8/1/16
548	220	Hewes Street	Rancho Santiago Boulevard	Julie Street	AAC	B	4	746	54	48,823	5/7/26	89	100	0	0	Surface Treatment - Slurry Seal	5/27/23
1112	342	Taft Avenue	Fern Street	Santiago Boulevard	AAC	B	4	1,075	60	63,542	5/13/26	89	100	0	0	Overlay - AC Structural	6/1/19
252	82	Chapman Avenue	Glassell Street	Glassell Street	AC	C	2	710	55	39,482	5/22/26	89	37	63	0	New Construction - Initial	1/1/80
1144	3544	Tustin Street	Heim Ave	End PCC (650' S/ Village Way)	PCC	B	0	2,152	10	26,156	5/15/26	89	88	8	4	New Construction - Initial	1/1/80
1144	258	Tustin Street	Santa Ana Canyon	Sunview Drive	AAC	B	4	965	60	58,639	5/19/26	89	75	25	0	Overlay - AC Structural	6/1/21
1144	262	Tustin Street	Route 55 SB Off-Ramp	Lincoln Avenue	AAC	B	5	700	70	47,873	5/15/26	90	74	26	0	Overlay - AC Structural	6/1/21
1164	2023	Villa Real Drive	1210' n/o Lake Hill	220' n/o Lake Hills	AAC	C	2	990	36	35,206	4/29/26	90	81	19	0	Overlay - AC Structural	12/14/06
1144	3546	Tustin Street	Pvmt Chnge (350' S/ Lincoln Ave)	Lincoln Ave	AC	B	0	345	40	18,034	5/15/26	90	73	27	0	New Construction - Initial	1/1/80
659	2199	Lemon Street	Maple Avenue	Chapman Avenue	AAC	C	2	625	36	24,811	5/19/26	90	76	24	0	Overlay - AC Structural	1/1/21
203	229	Cambridge Street	Adams Avenue	Collins Avenue	AC	C	2	1,380	36	52,751	5/20/26	90	78	22	0	Complete Reconstruction - AC	3/13/07
1186	526	Walnut Avenue	Batavia Street	Cypress Street	AAC	C	2	1,615	48	80,884	5/13/26	90	61	39	0	Overlay - AC Structural	5/27/25
1023	674	Serrano Avenue	Yellowstone Boulevard	Glenbrook Ln	AC	B	4	895	58	37,507	5/26/26	90	100	0	0	New Construction - Initial	1/1/80
705	3531	Main Street	Palmyra Ave	Almond Ave	PCC	B	0	655	10	8,839	5/18/26	90	100	0	0	New Construction - Initial	1/1/80
1144	3547	Tustin Street	End PCC (120' N/ Lincoln Ave)	Lincoln Ave	PCC	B	0	120	52	6,188	5/15/26	90	72	0	28	New Construction - Initial	1/1/80
1144	3537	Tustin Street	End PCC (170' N/ Tustin St)	Chapman Ave	PCC	B	0	168	50	8,450	5/14/26	90	93	0	7	New Construction - Initial	1/1/80
475	106	Glassell Street	Palm Avenue	Maple Avenue	AAC	C	2	660	40	27,723	3/20/26	90	100	0	0	Overlay - AC Structural	1/1/18
203	3521	Cambridge Street	Maple Avenue	Chapman Avenue	AC	C	2	1,235	30	23,105	3/26/26	91	65	0	35	Surface Treatment - Slurry Seal	1/1/91
611	3542	Katella Avenue	End PCC (110' E/ Tustin St)	Tustin Street	PCC	B	0	110	60	6,833	5/19/26	91	100	0	0	New Construction - Initial	1/1/80
1144	3525	Tustin Street	Sunview Ave	Bixby Ave	AAC	B	4	770	60	46,811	5/19/26	91	100	0	0	Overlay - AC Structural	6/1/21
548	219	Hewes Street	1090' N/O Adobe Avenue	Rancho Santiago Boulevard	AAC	B	4	771	48	48,820	5/7/26	92	71	29	0	Surface Treatment - Slurry Seal	1/16/22
1023	673	Serrano Avenue	1300' e/o Cannon Street	Yellowstone Boulevard	AC	B	4	1,095	46	48,506	5/26/26	92	100	0	0	New Construction - Initial	1/1/80
615	3279	Kendra Dr	Chadwick Parkway	Serrano	AC	C	2	1,550	36	55,631	4/30/26	92	100	0	0	Surface Treatment - Slurry Seal	6/1/20
1144	4000	Tustin Street	170' n/o Heim	350' s/o Lincoln Ave	AC	B	3	1,175	35	51,866	5/13/26	92	100	0	0	New Construction - Initial	1/1/80
213	408	Cannon Street	Taft Avenue	Bridge	AAC	B	4	960	70	64,245	5/1/26	92	100	0	0	Overlay - AC Structural	1/31/16
252	16	Chapman Avenue	Glassell Street (Circle)	Grand Street	AC	C	2	465	56	28,367	5/21/26	92	83	0	17	New Construction - Initial	1/1/80
252	3539	Chapman Avenue	End PCC (110' W/ Tustin St)	Tustin Street	PCC	B	0	110	72	12,081	5/15/26	92	94	0	6	New Construction - Initial	1/1/80
787	435	Newport Boulevard	White Oak Ridge	Chapman Avenue	AAC	B	2	1,675	40	67,676	5/12/26	93	100	0	0	Overlay - AC Structural	6/1/19
203	225	Cambridge Street	Palm Avenue	Maple Avenue	AC	C	2	610	30	16,199	3/26/26	93	72	0	28	Surface Treatment - Slurry Seal	1/1/91
475	107	Glassell Street	Walnut Avenue	Palm Avenue	AAC	C	2	1,295	40	57,100	3/20/26	93	100	0	0	Overlay - AC Structural	1/1/18
705	3535	Main Street	Palmyra Ave	Stewart Dr	PCC	B	0	475	10	5,185	5/18/26	93	100	0	0	New Construction - Initial	1/1/80
1144	3536	Tustin Street	End PCC (170' S/ Tustin St)	Chapman Ave	PCC	B	0	167	70	15,029	5/15/26	93	92	0	8	New Construction - Initial	1/1/80
1186	530	Walnut Avenue	Shaffer Street	Cambridge Street	AAC	C	2	1,280	34	40,762	5/14/26	93	81	0	19	Overlay - AC Structural	1/1/21
663	367	Lewis Street	Lampson Avenue	1123' s/o Lampson Avenue	AAC	B	4	1,123	60	65,433	5/20/26	93	100	0	0	Overlay - AC Structural	1/1/19
787	434	Newport Boulevard	Chapman Avenue	White Oak Ridge	AAC	B	2	1,675	40	67,689	5/12/26	94	100	0	0	Overlay - AC Structural	6/1/19
705	3534	Main Street	Almond Ave	Palmyra Ave	PCC	B	0	643	10	7,070	5/18/26	94	100	0	0	New Construction - Initial	1/1/80
252	14B	Chapman Avenue	RR Tracks	Lemon St	AAC	B	5	680	53	31,610	5/21/26	94	100	0	0	New Construction - Initial	3/21/11
705	3530	Main Street	Stewart Dr	Palmyra Ave	PCC	B	0	496	10	7,976	5/18/26	94	100	0	0	New Construction - Initial	1/1/80
705	3533	Main Street	175' N/ Almond Ave	Almond Ave	PCC	B	0	155	10	1,842	5/18/26	94	100	0	0	New Construction - Initial	1/1/80
1023	3242	Serrano Avenue	Sierra Vista Drive	Apache Creek Road	AAC	B	4	1,223	46	63,450	4/30/26	94	32	0	68	Overlay - AC Structural	6/1/21
1164	2022	Villa Real Drive	220' n/o Lake Hill	Marywood Lane	AAC	C	2	730	36	23,641	5/21/26	94	100	0	0	Overlay - AC Structural	10/11/19
252	38	Chapman Avenue	Newport Boulevard	Trails End Lane	AAC	B	6	1,465	75	126,315	5/13/26	94	100	0	0	Overlay - AC Structural	6/1/19
663	372	Lewis Street	El Prado Avenue	Garden Grove Boulevard	AAC	B	4	750	60	44,573	5/20/26	95	96	0	4	Overlay - AC Structural	1/1/19
246	3357	Chadwick Pkwy	Kendra Drive	Altaview Drive	AC	C	2	1,611	30	49,329	4/30/26	95	100	0	0	Surface Treatment - Slurry Seal	6/1/20
548	217	Hewes Street	Adobe Avenue	1090' N/O Adobe Avenue	AAC	B	4	1,365	55	64,608	5/7/26	95	100	0	0	Mill and Overlay	1/3/23
663	366	Lewis Street	Dawn Street	Metropolitan Drive	AAC	B	4	1,335	60	78,026	5/20/26	95	100	0	0	Overlay - AC Structural	1/1/19
113	125	Batavia Street	Collins Avenue	Angus Avenue	AAC	B	4	1,280	60	76,778	5/20/26	95	100	0	0	Mill and Overlay	3/3/22
252	39	Chapman Avenue	Trails End Lane	Jamboree Road	AAC	B	6	1,810	75	163,545	5/13/26	95	100	0	0	Overlay - AC Structural	6/1/19
663	363	Lewis Street	Chapman Avenue	Dawn Street	AAC	B	4	1,295	60	79,422	5/20/26	95	100	0	0	Overlay - AC Structural	1/1/19
1023	3522	Serrano Avenue	Glenbrook Ln	Orange Park Boulevard	AC	B	4	568	58	31,704	5/26/26	95	100	0	0	New Construction - Initial	1/1/80
1164	2025	Villa Real Drive	Ridge Park Lane	Marywood Lane	AAC	C	2	965	36	34,188	5/21/26	95	100	0	0	Overlay - AC Structural	10/11/19
1164	2024	Villa Real Drive	Santiago Boulevard	Ridge Park Lane	AAC	C	2	2,400	32	77,012	5/21/26	95	100	0	0	Overlay - AC Structural	10/11/19
750	671	Metropolitan Drive	Entertainment Drive	Designer Drive	AAC	B	4	1,095	44	58,531	5/22/26	95	43	0	57	Overlay - AC Structural	5/13/24
81	2644	Apache Creek Road	Sierra Vista Drive	Serrano Avenue	AC	C	2	1,295	30	41,632	5/26/26	95	100	0	0	Surface Treatment - Slurry Seal	6/1/20
113	126	Batavia Street	Angus Avenue	Walnut Avenue	AAC	B	4	1,340	60	75,900	4/2/26	96	26	0	74	Overlay - AC Thin	1/1/96
113	127	Batavia Street	Walnut Avenue	Palm Avenue	AC	B	4	1,325	60	76,967	4/2/26	96	100	0	0	Surface Treatment - Slurry Seal	11/1/08
213	407	Cannon Street	Serrano Avenue	Taft Avenue	AAC	B	2	945	70	65,924	5/1/26	96	100	0	0	Overlay - AC Structural	1/31/16

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1079	689	State College Boulevard	Orangewood Avenue	Orange Center Drive	AC	B	8	890	121	101,927	4/22/26	96	100	0	0	New Construction - Initial	1/1/80
743	907	Meats Avenue	Summitridge Lane	Marywood Drive	AAC	B	4	1,290	60	73,059	4/29/26	96	100	0	0	Overlay - AC Structural	6/1/19
743	905	Meats Avenue	280' w/o Feather Hill	Summitridge Lane	AAC	B	4	1,660	60	96,054	4/29/26	96	100	0	0	Overlay - AC Structural	6/1/19
1079	726	State College Boulevard	Chapman Avenue	5 Fwy SB Off-Ramp	AC	B	8	250	120	78,276	4/22/26	97	100	0	0	New Construction - Initial	1/1/80
636	3528	La Veta Avenue	Pepper Street	Batavia Street	AAC	B	6	975	85	77,818	4/3/26	97	100	0	0	New Construction - Initial	1/1/97
1079	725	State College Boulevard	5 Fwy SB Off-Ramp	Anaheim Avenue	AC	B	8	1,100	120	92,118	4/22/26	97	100	0	0	New Construction - Initial	1/1/80
213	401	Cannon Street	Portofira Way	Goldenrod Lane	AAC	B	4	1,480	68	105,877	4/29/26	97	100	0	0	Overlay - AC Structural	6/1/21
113	128A	Batavia Street	Palm Avenue	Maple Avenue	AC	B	4	647	60	39,441	4/2/26	97	100	0	0	Surface Treatment - Slurry Seal	1/1/92
1079	724	State College Boulevard	Orange Center Drive	Anaheim Avenue	AC	B	8	360	140	50,018	4/22/26	97	100	0	0	New Construction - Initial	1/1/80
213	426	Cannon Street	Via Escola	1795' s/o Via Escola	AAC	B	4	1,795	68	132,350	4/29/26	97	100	0	0	Overlay - AC Structural	6/1/21
213	398	Cannon Street	695' n/o Portofira Way	Portofira Way	AAC	B	4	695	68	50,763	4/29/26	97	100	0	0	Overlay - AC Structural	6/1/21
743	909	Meats Avenue	Marywood Drive	Via Escola	AAC	B	4	1,455	60	92,747	4/29/26	97	100	0	0	Overlay - AC Structural	6/1/19
663	369	Lewis Street	630' n/o El Prado Avenue	El Prado Avenue	AAC	B	4	630	60	37,272	5/20/26	97	100	0	0	Overlay - AC Structural	1/1/19
611	397	Katella Avenue	Sacramento Street	Handy Street	AAC	B	5	920	64	61,121	4/29/26	98	100	0	0	Mill and Overlay	5/11/22
636	498	La Veta Avenue	Batavia Street	Parker Street	AAC	B	4	624	70	45,804	4/3/26	98	100	0	0	Overlay - AC Structural	1/1/97
750	3520	Metropolitan Drive	Designer Drive	The City Drive	AAC	B	4	560	85	54,869	5/22/26	98	100	0	0	Overlay - AC Structural	5/13/24
787	436	Newport Boulevard	Chapman Avenue	Santiago Canyon Road	AAC	B	4	1,830	80	155,891	5/12/26	98	100	0	0	Overlay - AC Structural	6/1/19
1023	3441	Serrano Avenue	Orange Park Boulevard	Sierra Vista Drive	AAC	B	4	1,145	46	61,011	4/30/26	98	100	0	0	Overlay - AC Structural	6/1/21
705	320	Main Street	La Veta Avenue	700' s/o La Veta Avenue	AAC	B	6	700	72	60,059	4/2/26	98	100	0	0	Overlay - AC Structural	8/1/16
213	7062	Cannon Street	Goldenrod Lane	Loma Street	AAC	B	4	1,308	68	79,296	4/29/26	98	100	0	0	Overlay - AC Structural	6/1/21
113	124	Batavia Street	Struck Avenue	Collins Avenue	AAC	B	4	1,339	60	77,968	4/2/26	98	100	0	0	Mill and Overlay	3/3/22
611	392A	Katella Avenue	Handy Street	Harding Street	AAC	B	4	1,221	64	70,256	4/29/26	98	100	0	0	Mill and Overlay	5/11/22
1156	2032	Via Escola	Springfield Street	Cannon Street	AAC	B	4	3,135	60	183,545	5/21/26	98	100	0	0	Overlay - AC Structural	2/1/24
831	351	Orange-Olive Road	Vista Del Goviota	Meats Avenue	AC	B	4	1,560	54	81,964	5/14/26	98	100	0	0	Overlay-Rubber Hot Mix	5/27/25
548	216	Hewes Street	Adobe Avenue	Bond Avenue	AAC	B	4	1,339	55	78,032	5/7/26	98	0	0	100	Overlay - AC Structural	2/1/24
743	912	Meats Avenue	Via Escola	1065' n/o Escola Anaheim city limit	AAC	B	4	1,065	60	62,912	4/29/26	98	100	0	0	Overlay - AC Structural	6/1/19
831	355	Orange-Olive Road	St. James Avenue	Fellows Drive	AAC	B	4	1,240	60	73,363	4/24/26	99	100	0	0	Overlay - AC Structural	2/8/24
1156	2065	Via Escola	Meats Avenue	Regency Avenue	AAC	B	4	315	60	17,270	4/29/26	99	52	0	48	Overlay - AC Structural	2/1/24
831	359	Orange-Olive Road	565' s/o Olive Avenue	Olive Avenue	AAC	B	4	565	40	23,257	4/24/26	99	100	0	0	Overlay - AC Structural	6/1/20
831	357	Orange-Olive Road	Lincoln Avenue	St. James Avenue	AC	B	4	1,215	60	76,458	4/24/26	99	100	0	0	Mill and Overlay	2/1/24
213	3223	Cannon Street	Serrano Avenue	Loma St (Villa Park)	AAC	B	4	787	80	57,850	4/29/26	99	100	0	0	Overlay - AC Structural	6/1/21
445	2007	Flower Street	Palmyra Avenue	Culver Avenue	AAC	C	2	465	36	26,625	4/3/26	99	100	0	0	Overlay - AC Structural	7/7/22
831	360	Orange-Olive Road	Riverdale Avenue	Santa Ana Canyon	AAC	B	4	1,460	54	88,695	4/24/26	99	100	0	0	Overlay - AC Structural	6/1/20
1156	2066	Via Escola	Regency Avenue	Rosemere Street	AC	B	4	1,330	60	79,510	5/21/26	99	0	100	0	Overlay-Rubber Hot Mix	2/1/24
831	3518	Orange-Olive Road	Olive Avenue	Santa Ana Canyon	AAC	B	4	690	56	42,761	4/24/26	99	100	0	0	Overlay - AC Structural	6/1/20
1352	3501	Crawford Canyon Road	Chapman Ave	Stoller Lane	AC	B	2	1,056	30	42,681	5/5/26	100	0	0	0	Mill and Overlay	1/3/23
415	871	Fairhaven Avenue	Tustin Street	Ponderosa Street	AC	B	5	460	60	32,539	4/10/26	100	0	0	0	Mill and Overlay	1/3/23
743	3517	Meats Avenue	Park Lane	Route 55 Bridge	AC	B	4	676	58	39,780	5/12/26	100	0	0	0	Mill and Overlay	8/30/21
743	901	Meats Avenue	Route 55	Breckenridge Street	AC	B	4	560	60	32,646	5/12/26	100	0	0	0	Mill and Overlay	8/30/21
831	353	Orange-Olive Road	Fellows Drive	Vista Del Gaviota	AC	B	4	930	60	56,243	4/24/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1012	474	Santiago Canyon Road	Nicky Way	Orange Park Boulevard	AAC	B	4	1,350	84	111,378	5/1/26	100	0	0	0	Overlay - AC Structural	3/27/25
1012	468	Santiago Canyon Road	Linda Vista Street	Cannon Street	AAC	B	4	810	84	62,221	5/1/26	100	0	0	0	Overlay - AC Structural	3/27/25
1012	471	Santiago Canyon Road	Jamestown Way	Nicky Way	AAC	B	4	730	84	53,111	5/1/26	100	0	0	0	Overlay - AC Structural	3/27/25
1012	490	Santiago Canyon Road	Jamboree Road	Newport Boulevard	AC	B	3	2,455	40	122,929	5/6/26	100	0	0	0	New Construction - Initial	1/1/80
1012	470	Santiago Canyon Road	Cannon Street	Jamestown Way	AAC	B	4	1,715	84	156,439	5/1/26	100	0	0	0	Overlay - AC Structural	3/27/25
1012	489	Santiago Canyon Road	Newport Boulevard	Jamboree Road	AC	B	3	2,455	40	111,138	5/6/26	100	0	0	0	New Construction - Initial	1/1/80
1023	3244	Serrano Avenue	Apache Creek Road	San Lorenzo Court	AAC	B	4	1,077	46	57,429	4/30/26	100	0	0	0	Overlay - AC Structural	6/1/21
1068	648	Spring Street	Prospect Street	Virage Street	AAC	B	4	385	60	24,399	5/7/26	100	0	0	0	Overlay - AC Structural	5/27/25
1068	652	Spring Street	Swidler Place	Esplanade Street	AAC	B	5	1,490	60	89,152	5/7/26	100	0	0	0	Overlay - AC Structural	5/27/25
1068	650	Spring Street	Virage Street	Swidler Place	AAC	B	4	595	60	34,626	5/7/26	100	0	0	0	Overlay - AC Structural	5/27/25
1068	653	Spring Street	Esplanade Street	Esplanade Street	AC	B	4	117	60	9,623	5/7/26	100	0	0	0	New Construction - Initial	10/30/12
1112	335	Taft Avenue	Shaffer Street	Cambridge Street	AAC	B	4	1,120	80	75,388	3/27/26	100	0	0	0	Overlay - AC Structural	1/1/02
1112	333	Taft Avenue	Cambridge Street	Greengrove Street	AAC	B	4	1,650	80	133,108	3/27/26	100	0	0	0	Overlay - AC Structural	1/1/02
1112	331	Taft Avenue	Greengrove Street	Tustin Avenue	AAC	B	4	1,170	80	91,447	3/27/26	100	0	0	0	Overlay - AC Structural	1/1/02
1112	337	Taft Avenue	Glassell Street	Shaffer Street	AAC	B	2	1,145	80	91,525	3/27/26	100	0	0	0	Overlay - AC Structural	1/1/02
1121	3519	The City Drive	Metropolitan Drive	Park Central Avenue	AAC	B	6	1,367	80	97,027	4/16/26	100	0	0	0	Overlay - AC Structural	5/13/24
1156	2030	Via Escola	Rosemere Street	Somerset Street	AAC	B	4	615	60	37,601	5/21/26	100	0	0	0	Overlay - AC Structural	2/1/24
1156	2031	Via Escola	Somerset Street	Springfield Street	AAC	B	4	380	60	24,140	5/21/26	100	0	0	0	Overlay - AC Structural	2/1/24
1258	552	Yorba Street	Palmyra Avenue	La Veta Avenue	AAC	B	4	1,320	60	76,368	4/10/26	100	0	0	0	Mill and Overlay	1/3/23

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1258	18488	Yorba Street	La Veta Avenue	Burdie Lane	AC	B	4	1,003	60	49,760	4/10/26	100	0	0	0	Mill and Overlay	1/3/23
1258	549	Yorba Street	135' s/o Burdie Lane	Fairhaven Avenue	AAC	B	4	1,620	60	94,190	4/10/26	100	0	0	0	Overlay - AC Structural	5/27/25
203	230	Cambridge Street	Katella Avenue	Adams Avenue	AAC	C	2	955	37	37,454	3/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
445	2009	Flower Street	Almond Avenue	Larkspur Drive	AC	C	2	450	37	16,243	4/3/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
445	2006	Flower Street	Culver Avenue	Orchard Avenue	AC	C	2	485	37	15,038	4/3/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
445	2005	Flower Street	Orchard Avenue	La Veta Avenue	AC	C	2	660	36	28,790	4/3/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
445	2008	Flower Street	Larkspur Drive	Palmyra Avenue	AC	C	2	810	36	34,015	4/3/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1091	2220	Struck Avenue	Katella Avenue	Main Street	AC	C	2	1,100	44	48,013	4/2/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1091	2219	Struck Avenue	Main Street	Batavia Street	AC	C	2	1,545	44	64,934	4/2/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
								95.9		**29,615,468**							
		Locals															
861	2298	Park Vine Street	Garden Grove Boulevard	Park Central Avenue	AC	E	2	1,015	32	34,480	3/7/24	10	6	94	0	Surface Treatment - Slurry Seal	1/1/98
784	2258	Neville Street	Blue Ridge Avenue	Taft Avenue	ST	I	2	1,115	44	49,060	3/8/24	13	7	93	0	Surface Treatment - Micro Surfacing	8/31/07
667	2920	Lime Street	Sycarmore Avenue	North End	AC	E	2	143	24	4,182	8/28/24	17	37	56	7	New Construction - Initial	1/1/80
170	564	Briardale Avenue	Case Street	Neville Street	AC	I	2	475	44	20,900	3/8/24	17	10	90	0	Micro Surfacing	8/31/07
855	2311	Park Balboa Avenue	Park Hyde	Park Central	AC	E	2	1,450	36	54,700	3/7/24	18	11	87	2	Surface Treatment - Slurry Seal	1/1/98
788	2206	Nicholas Avenue	Batavia Street	Hartition Street	AC	I	2	1,075	34	36,550	3/8/24	21	12	88	0	Surface Treatment - Slurry Seal	1/1/95
379	2319	El Prado Avenue	Lewis Street	Lewis Street	AC	E	2	100	36	3,600	3/27/24	22	31	51	18	New Construction - Initial	1/1/80
1021	2241	Sequoia Avenue	Eckhoff Street	Popular Street	AC	I	2	890	44	39,160	3/8/24	25	9	83	8	Surface Treatment - Slurry Seal	1/1/95
555	1506	Highland Street	Adams Avenue	Collins Avenue	AC	E	2	1,510	30	45,600	3/4/24	26	15	81	4	Surface Treatment - Slurry Seal	1/1/02
231	2231	Case Street	Taft Avenue	South End	ST	I	2	670	44	30,630	3/19/24	27	17	73	10	Surface Treatment - Micro Surfacing	8/31/07
1353	3555	Meats Ave Frontage	Meats Avenue	End	AC	E	2	368	32	14,720	5/13/26	27	32	56	12	New Construction - Initial	5/12/26
156	2225	Braden Court	West End	Main Street	AC	I	2	635	44	27,940	3/8/24	27	47	53	0	New Construction - Initial	1/1/80
1109	783	Sycamore Avenue	Cypress Street	Lemon Street	AC	E	2	295	31	9,145	4/10/24	28	25	62	13	New Construction - Initial	1/1/80
93	2202	Atchison Street	Maple Avenue	Chapman Ave	AC	I	1	615	14	11,110	3/18/24	29	7	74	19	New Construction - Initial	1/1/80
637	971	La Veta Park Circle	Parker Street	La Veta Avenue	AC	E	2	1,105	36	39,780	3/12/24	31	9	82	9	Surface Treatment - Slurry Seal	1/1/04
144	2255A	Blueridge Avenue	Case Street	Neville Street	AAC	I	2	414	44	18,216	4/11/24	32	11	81	8	Overlay - AC Structural	1/1/04
174	2247	Bristol Lane	West End	Glassell Street	AC	I	2	520	44	22,880	4/11/24	33	34	55	11	Surface Treatment - Slurry Seal	1/1/94
328	707	Culver Avenue	Devon Road	Crest Road	AC	E	2	265	32	7,840	4/10/24	33	35	63	2	Surface Treatment - Slurry Seal	1/1/04
693	712	Louise Place	Almond Ave	South End	AC	E	2	180	32	6,810	3/12/24	36	46	53	1	Surface Treatment - Slurry Seal	1/1/04
223	2213	Carleton Avenue	West End	Glassell Street	AC	I	2	435	44	19,140	4/11/24	38	25	53	22	Surface Treatment - Slurry Seal	1/1/95
72	2450	American Way	Fletcher Street	Freedom Avenue	AC	E	2	770	44	33,880	4/11/24	38	30	62	8	Surface Treatment - Slurry Seal	1/1/95
816	956	Olive Street	Almond Avenue	Palmyra Avenue	AC	E	2	600	36	21,600	3/18/24	38	41	27	32	New Construction - Initial	1/1/80
253	2626	Chapman Frontage Road	Jetty Drive	East End	AC	E	2	470	28	13,910	3/12/24	39	38	54	8	Surface Treatment - Slurry Seal	1/1/03
333	1280	Dana Place	Park Lane	Highland Street	AC	E	2	90	32	2,880	3/4/24	40	16	84	0	New Construction - Initial	1/1/80
277	2458	Cleveland Street	Maple Avenue	Chapman Avenue	PCC	E	2	605	34	20,570	8/28/24	41	14	65	21	New Construction - Initial	1/1/80
816	779	Olive Street	North End	Palm Avenue	AC	E	2	305	36	10,724	3/14/24	43	45	46	9	New Construction - Initial	1/1/80
1197	995	Waverly Street	Palmyra Avenue	South End	AAC	E	2	235	32	8,570	2/23/24	43	29	22	49	Overlay - AC Structural	10/1/08
116	2248	Baywood Avenue	South End	Glassell Street	AC	I	2	640	44	28,160	3/11/24	44	29	66	5	New Construction - Initial	1/1/80
500	2410	Grand Street	Palm Avenue	Maple Avenue	PCC	E	2	620	40	24,800	8/28/24	44	18	69	13	New Construction - Initial	1/1/02
828	2411	Orange Street	Palm Avenue	Maple Avenue	PCC	E	2	620	40	24,800	8/28/24	45	13	75	12	New Construction - Initial	1/1/80
1029	2415	Shaffer Street	Palm Avenue	Maple Avenue	PCC	E	2	620	34	21,080	8/28/24	45	10	67	23	New Construction - Initial	1/1/80
885	954	Pixley Street	Palmyra Avenue	Culver Avenue	AC	E	2	615	30	18,450	4/10/24	45	37	48	15	Surface Treatment - Slurry Seal	1/1/04
230	2560	Carver Lane	Cannon Street	East End	AC	I	2	185	60	10,740	3/20/24	45	53	0	47	New Construction - Initial	1/1/80
981	1707	Sail Avenue	Canal Street	Bourbon Street	AC	E	2	220	31	6,820	3/14/24	45	24	66	10	Surface Treatment - Slurry Seal	1/1/04
242	2525	Center Street	Palm Avenue	Maple Avenue	PCC	E	2	600	32	19,200	8/28/24	46	11	52	37	New Construction - Initial	1/1/80
134	623	Bitterbush Street	North End	Chapman Avenue	AC	E	2	1,100	32	35,200	3/12/24	46	26	70	4	Surface Treatment - Slurry Seal	1/1/97
398	3116	Equestrian Terrace	Rancho Santiago Boulevard	East End	AC	E	2	710	22	17,418	8/28/24	46	60	40	0	New Construction - Initial	1/1/80
533	918	Harwood Street	Chapman Avenue	Almond Avenue	AAC	E	2	615	33	20,295	3/14/24	46	42	48	10	Overlay - AC Structural	12/14/06
663	2322	Lewis Street	North End	El Prado Avenue	AC	E	2	420	36	16,920	3/27/24	46	39	61	0	Surface Treatment - Slurry Seal	1/1/95
448	806	Foley Place	Almond Avenue	South End	AC	E	2	510	32	17,370	4/10/24	46	66	34	0	Surface Treatment - Slurry Seal	1/1/02
1153	2170	Van Owen Avenue	Tustin Street	East End	AC	E	2	850	37	31,450	4/3/24	46	40	45	15	New Construction - Initial	1/1/80
623	1276	Killingsworth Avenue	Wheeler Street	Malena Street	AC	E	2	330	31	10,730	3/4/24	47	69	27	4	Surface Treatment - Slurry Seal	1/1/92
349	1870	Denise Avenue	North End	Santiago Boulevard	AC	E	2	1,850	31	59,150	12/12/23	47	25	53	22	Surface Treatment - Slurry Seal	1/1/04
533	2421	Harwood Street	Palm Avenue	Maple Avenue	PCC	E	2	615	34	20,910	8/28/24	47	9	62	29	New Construction - Initial	1/1/80
92	1869	Aspen Street	North End	Canyon View Ave	AC	E	2	515	36	20,338	10/17/23	47	60	40	0	Surface Treatment - Slurry Seal	1/1/96
848	810	Palmyra Avenue	Feldner Road	Bedford Road	AAC	E	2	310	42	13,020	4/10/24	47	47	42	11	Overlay - AC Structural	7/7/22
191	2242	Business Center Drive	Collins Avenue	Commerce Street	AC	I	2	805	44	35,420	3/8/24	47	48	52	0	Surface Treatment - Slurry Seal	1/1/94

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1029	2416	Shaffer Street	Maple Avenue	Chapman Avenue	PCC	E	2	605	34	20,570	8/28/24	48	12	79	9	New Construction - Initial	1/1/80
444	698	Flower Circle	La Veta Avenue	South End	AC	E	2	155	36	5,580	3/27/24	48	25	64	11	Surface Treatment - Slurry Seal	1/1/02
1209	1275	Wheeler Street	Killingswoth Avenue	Chapman Avenue	AC	E	2	940	31	29,640	3/4/24	48	61	39	0	Surface Treatment - Slurry Seal	1/1/02
1083	740	Stevens Street	Maple Avenue	Chapman Avenue	AC	E	2	600	32	19,200	3/12/24	48	24	74	2	Surface Treatment - Slurry Seal	1/1/97
1258	2673	Yorba Street	Chapman Ave	North End	AC	E	4	500	60	30,000	8/28/24	48	39	60	1	New Construction - Initial	1/1/80
277	2459	Cleveland Street	Palm Avenue	Maple Avenue	PCC	E	2	620	34	21,080	8/28/24	48	18	69	13	New Construction - Initial	1/1/80
659	2402	Lemon Street	Maple Avenue	Palm Avenue	PCC	E	2	625	40	25,000	8/28/24	49	18	73	9	New Construction - Initial	1/1/80
816	957	Olive Street	Palmyra Avenue	Culver Avenue	AC	E	2	610	36	21,960	3/18/24	49	14	58	28	New Construction - Initial	1/1/80
331	2406	Cypress Street	Palm Avenue	Maple Avenue	PCC	E	2	620	40	24,800	8/26/24	49	11	64	25	New Construction - Initial	1/1/80
231	2256	Case Street	Blueridge Avenue	Taft Avenue	AC	I	2	1,075	44	47,300	4/11/24	49	28	50	22	Surface Treatment - Slurry Seal	1/1/04
445	727	Flower Street	Maple Avenue	Chapman Avenue	AC	E	2	600	32	19,200	3/6/24	50	16	69	15	Surface Treatment - Slurry Seal	1/1/02
287	2244	Collins Avenue	West End	Eckhoff Street	AC	I	2	290	50	8,700	4/10/24	50	31	42	27	Surface Treatment - Slurry Seal	1/1/94
331	2404	Cypress Street	Chapman Avenue	Almond Avenue	PCC	E	2	620	40	24,800	8/26/24	50	16	54	30	New Construction - Initial	1/1/80
715	2412	Maple Avenue	Shaffer Street	Cambridge Street	PCC	E	2	1,320	40	52,800	8/28/24	50	16	57	27	New Construction - Initial	1/1/80
242	2524	Center Street	Maple Avenue	South End	PCC	E	2	310	32	9,920	8/28/24	51	18	73	9	New Construction - Initial	1/1/80
880	2417	Pine Street	Maple Avenue	Chapman Avenue	PCC	E	2	600	40	24,000	8/28/24	51	15	60	25	New Construction - Initial	1/1/80
828	2392	Orange Street	Maple Avenue	Chapman Avenue	PCC	E	2	605	40	24,200	8/28/24	52	17	64	19	New Construction - Initial	1/1/80
715	2394	Maple Avenue	Glassell Street	Shaffer Street	PCC	I	2	1,270	40	50,800	8/28/24	52	16	67	17	New Construction - Initial	1/1/80
903	2482	Providence Avenue	Main Street	Bush Street	AC	I	2	290	31	8,990	4/10/24	52	27	73	0	New Construction - Initial	1/1/80
663	2324	Lewis Street	Lewis Street	South End	AC	E	2	650	36	22,600	3/27/24	52	33	48	19	Surface Treatment - Slurry Seal	1/1/95
594	1134	Jefferson Avenue	Shaffer Street	Harwood Street	AC	E	2	625	32	20,000	2/9/24	52	24	76	0	Surface Treatment - Slurry Seal	1/1/03
190	2516	Bush Street	Almond Avenue	Palmyra Place	AC	E	2	470	31	14,570	4/10/24	53	49	42	9	Surface Treatment - Slurry Seal	1/1/04
97	2559	Auburn Street	Via Escola	South End	AC	E	2	215	36	9,240	3/20/24	53	29	71	0	New Construction - Initial	1/1/80
389	2265	Elm Street	Sycamore Avenue	South End	AC	E	2	490	30	14,700	3/12/24	53	44	56	0	Surface Treatment - Slurry Seal	1/1/04
555	2168	Highland Street	Coral Avenue	Taft Avenue	AC	I	2	1,980	30	63,400	3/20/24	53	23	63	14	New Construction - Initial	1/1/80
845	2413	Palm Avenue	Shaffer Street	Waverly Street	PCC	E	2	1,610	40	64,400	8/28/24	53	9	63	28	New Construction - Initial	1/1/80
1211	1695	White Cap Avenue	Orange-Olive Avenue	Anchor Street	AC	E	2	805	37	29,785	3/19/24	53	34	52	14	Surface Treatment - Slurry Seal	1/1/04
799	2610	Notre Dame Avenue	Canyon View Avenue	Dove Lane	AC	E	2	215	32	6,880	10/26/23	53	75	0	25	New Construction - Initial	1/1/80
389	2224	Elm Street	North End	Collins Avenue	AC	I	2	555	44	24,420	3/8/24	53	29	69	2	New Construction - Initial	1/1/80
331	2405	Cypress Street	Maple Avenue	Chapman Avenue	PCC	E	2	610	40	24,400	8/26/24	53	17	68	15	New Construction - Initial	1/1/80
1109	1135	Sycamore Avenue	Shaffer Street	Center Street	AC	E	2	290	32	9,280	4/2/24	53	45	37	18	Surface Treatment - Slurry Seal	1/1/02
715	765	Maple Avenue	Feldner Road	Main Street	AAC	E	2	1,185	37	43,845	3/12/24	53	28	72	0	Surface Reconstruction - AC	5/1/09
880	2418	Pine Street	Palm Avenue	Maple Avenue	PCC	E	2	615	34	20,910	8/28/24	54	18	53	29	New Construction - Initial	1/1/80
500	1068	Grand Street	Wilson Avenue	Quincy Avenue	AC	E	2	525	37	19,425	3/13/24	54	40	59	1	Surface Treatment - Slurry Seal	1/1/02
662	2233	Levers Place	Leslie Way	O'Donnell Way	AC	I	2	555	44	24,420	3/8/24	54	53	40	7	Surface Treatment - Slurry Seal	1/1/94
500	1067	Grand Street	Quincy Avenue	Collins Avenue	AC	E	2	1,170	37	43,290	3/13/24	54	59	36	5	Surface Treatment - Slurry Seal	1/1/02
331	2196	Cypress Street	Collins Avenue	1340' s/o Collins Avenue	AC	I	2	1,340	36	48,240	2/15/24	54	56	44	0	Surface Reconstruction - AC	9/1/09
885	807	Pixley Street	North End	Palmyra Avenue	AC	E	2	415	32	14,330	4/10/24	54	68	28	4	Surface Treatment - Slurry Seal	1/1/02
1075	2577	St. Thomas Circle	North End	Taft Avenue	AC	E	2	325	44	15,450	3/19/24	54	15	50	35	New Construction - Initial	1/1/80
1080	1166	Stay Court	Jetty Drive	East End	AC	E	2	135	33	5,955	3/12/24	54	38	62	0	Surface Treatment - Slurry Seal	1/1/03
332	1304	Dana Avenue	Milford Street	East End	AC	E	2	360	31	12,210	2/14/24	54	70	30	0	Surface Treatment - Slurry Seal	1/1/98
807	1103	Oakmont Avenue	Cambridge Street	Maplewood Street	AC	E	2	620	31	19,220	2/2/24	55	34	64	2	Surface Treatment - Slurry Seal	1/1/03
681	1157	Lomita Avenue	Glassell Street	Grand Street	AC	E	2	615	33	20,295	3/13/24	55	33	55	12	Surface Treatment - Slurry Seal	1/1/02
1197	1032	Waverly Street	Palm Avenue	Maple Avenue	AC	E	2	610	34	20,740	3/15/24	55	39	32	29	Surface Treatment - Slurry Seal	1/1/02
459	1453	La Veta Avenue (Frontage)	La Veta Avenue	East End	AC	E	2	665	32	21,280	4/3/24	55	100	0	0	Surface Treatment - Slurry Seal	1/1/91
328	708	Culver Avenue	Flower Street	Devon Road	AC	E	2	1,415	32	45,280	3/12/24	55	33	65	2	Surface Treatment - Slurry Seal	1/1/04
291	2243	Commerce Street	Collins Avenue	Business Center Drive	AC	I	2	370	44	16,280	3/8/24	55	74	20	6	Surface Treatment - Slurry Seal	1/1/94
555	3224	Highland Street	Coral Ave	North End	AC	E	2	1,076	32	37,232	3/20/24	55	30	60	10	New Construction - Initial	1/1/80
811	2212	O'Donnell Way	Taft Avenue	Levers Place	AC	E	2	655	44	28,820	3/19/24	55	39	51	10	Surface Treatment - Slurry Seal	1/1/94
880	2419	Pine Street	Sycamore Avenue	Palm Avenue	PCC	E	2	620	34	21,080	8/28/24	55	24	69	7	New Construction - Initial	1/1/80
129	862	Binnacle Street	Jetty Circle	East End	AC	E	2	510	32	16,128	3/7/24	56	44	55	1	Surface Treatment - Slurry Seal	1/1/03
720	1125	Maplewood Street	Rose Avenue	Walnut Avenue	AC	E	2	805	31	24,955	2/2/24	56	55	45	0	Surface Treatment - Slurry Seal	1/1/02
1109	1136B	Sycamore Avenue	Hardwood Street	Cambridge Street	AAC	E	2	640	34	21,760	2/23/24	56	40	59	1	Overlay - AC Structural	12/16/06
1029	1042	Shaffer Street	Trenton Avenue	Katella Avenue	AAC	E	2	975	36	35,100	2/15/24	56	100	0	0	Overlay - AC Structural	1/1/95
660	2232	Leslie Way	Taft Avenue	Levers Place	AC	I	2	685	36	24,660	3/8/24	56	39	61	0	Surface Treatment - Slurry Seal	1/1/94
816	2395	Olive Street	Chapman Avenue	Almond Avenue	PCC	E	2	615	40	24,600	8/26/24	57	16	52	32	New Construction - Initial	1/1/80
318	2561	Crest De Ville Avenue	Goldenrod Lane	South End	AC	E	2	460	36	18,060	10/31/23	57	100	0	0	New Construction - Initial	1/1/80
174	2180	Bristol Lane	Glassell Street	East End	AC	I	2	525	44	23,100	3/1/24	57	33	54	13	Surface Treatment - Slurry Seal	1/1/95
853	758	Pampas Street	City Limit	Brentwood Avenue	AC	E	2	1,085	32	34,720	3/11/24	57	28	72	0	Surface Treatment - Slurry Seal	10/10/19

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
906	1062	Quincy Avenue	Glassell Street	Grand Street	AC	E	2	605	31	18,755	3/5/24	57	28	69	3	Surface Treatment - Slurry Seal	1/1/02
206	2426	Camille Circle	Almond Avenue	South End	AAC	E	2	200	30	7,050	3/12/24	58	36	64	0	Surface Treatment - Slurry Seal	1/1/04
242	2401	Center Street	Chapman Avenue	Almond Avenue	PCC	E	2	610	40	24,400	8/28/24	58	11	63	26	New Construction - Initial	1/1/80
1321	3193	Nicky Way	Santiago Canyon Road	506' s/o Santiago Canyon Road	AC	E	2	506	20	10,120	3/22/24	58	27	60	13	New Construction - Initial	1/1/80
816	778	Olive Street	Palm AVenue	Maple Avenue	PCC	E	2	620	40	24,800	8/26/24	58	14	32	54	New Construction - Initial	1/1/80
290	2579	Columbia Place	Main Street	East End	AC	E	2	135	32	4,320	12/8/17	58	13	83	4	New Construction - Initial	1/1/80
381	2055	El Rito Drive	Rama Street	Cerro Villa Drive	AC	E	2	985	33	33,255	3/20/24	58	62	17	21	Surface Treatment - Slurry Seal	1/1/04
751	2947	Milford Street	Milford Street	East End #3	AC	E	2	95	30	3,850	4/2/24	58	41	58	1	Surface Treatment - Slurry Seal	1/1/02
906	3156	Quincy Avenue	Highland Street	156' w/o Highland Street	AC	E	2	156	30	4,680	4/11/24	58	57	43	0	New Construction - Initial	1/1/80
367	1709	Dunfield Street	St. James Avenue	South End	AC	E	2	230	31	7,130	3/11/24	58	44	43	13	Surface Treatment - Slurry Seal	1/1/04
807	1143	Oakmont Avenue	Grand Street	East End	AC	E	2	465	32	15,930	3/5/24	58	30	44	26	Surface Treatment - Slurry Seal	1/1/02
849	2299	Palmyra Place	Main Street	Bush Street	PCC	E	1	300	15	4,500	8/26/24	58	18	55	27	New Construction - Initial	1/1/80
533	2420	Harwood Street	Maple Avenue	Chapman Avenue	PCC	E	2	605	34	20,570	8/28/24	58	17	68	15	New Construction - Initial	1/1/80
331	2197	Cypress Street	1340' s/o Collins Avenue	Walnut Avenue	AC	I	2	1,235	38	46,930	2/15/24	58	65	35	0	Surface Reconstruction - AC	9/1/09
120	632	Beechwood Street	Dunton Avenue	Crystal View Avenue	AC	E	2	615	32	19,680	3/1/24	58	20	76	4	Surface Treatment - Slurry Seal	1/1/03
379	2317	El Prado Avenue	West End	Fondren Street	AC	E	2	220	32	8,540	3/7/24	58	40	55	5	Surface Treatment - Slurry Seal	1/1/91
327	13607	Cully Drive	Batavia Street E	East End	AC	E	2	1,320	33	66,000	3/1/24	59	23	43	34	Surface Treatment - Slurry Seal	10/10/19
638	1027	Lael Drive	California Street	East End	AC	E	2	545	32	17,440	2/23/24	59	23	58	19	Surface Treatment - Slurry Seal	8/1/09
829	2558	Orange Tree Lane	Shaffer Street	South End	AAC	E	2	355	29	11,395	8/27/24	59	90	0	10	Overlay - AC Structural	6/1/21
9999A	1A	Via El Modena	Hewes st	East end	AC	E	0	115	30	3,450	4/3/24	59	100	0	0	New Construction - Initial	10/1/22
846	785	Palm Drive	Main Street	Maple Avenue	AC	E	2	905	37	33,485	3/11/24	59	15	74	11	Surface Treatment - Chip Seal	1/1/97
862	770	Parker Street	North End	Palm Avenue	AC	E	2	705	37	27,135	3/5/24	59	50	35	15	New Construction - Initial	1/1/80
445	729	Flower Street	North End	Palm Avenue	AC	E	2	335	32	10,720	3/12/24	59	37	57	6	Surface Treatment - Slurry Seal	1/1/97
838	2250	Pacific Street	Freedom Avenue	Meats Avenue	AC	I	2	1,420	44	62,480	3/1/24	59	17	61	22	Surface Treatment - Slurry Seal	1/1/94
1187	2162	Wayfield Circle	North End	Chapman Avenue	AC	I	2	665	32	22,330	3/4/24	59	29	54	17	Surface Treatment - Slurry Seal	8/1/09
669	1121	Lincoln Street	Walnut Avenue	Palm Avenue	AC	E	2	1,265	32	40,480	2/27/24	60	31	64	5	Surface Treatment - Chip Seal	12/13/06
1191	808	Washington Avenue	Clark Street	East End	AC	E	2	110	32	4,570	3/12/24	60	48	52	0	Surface Treatment - Slurry Seal	1/1/04
177	2425	Bronson Avenue	Devon Road	Bedford Road	AC	E	1	536	16	7,600	12/1/17	60	35	62	3	Surface Treatment - Slurry Seal	1/1/04
720	1127	Maplewood Street	Mayfair Avenue	Everett Place	AC	E	2	270	32	8,640	2/2/24	60	43	57	0	Surface Treatment - Slurry Seal	1/1/03
494	2563	Goldenrod Lane	Cannon Street	660' E Cannon Street	AC	E	2	660	36	23,460	8/28/24	60	93	5	2	New Construction - Initial	1/1/80
276	2445	Clark Street	Palmyra Avenue	Culver Avenue	AC	E	2	620	33	20,460	3/12/24	60	72	28	0	Surface Treatment - Slurry Seal	1/1/04
700	1113	Madison Avenue	Maplewood Street	California Street	AC	E	2	490	31	15,190	2/2/24	60	57	43	0	Surface Treatment - Slurry Seal	1/1/03
424	7700	Feather Hill Drive	Meadow Grove Rd	Meats Avenue	AC	E	2	986	36	35,496	12/5/23	61	24	60	16	Surface Treatment - Slurry Seal	7/1/08
816	777	Olive Street	Maple Avenue	Chapman Avenue	PCC	E	2	615	40	24,600	8/26/24	61	14	40	46	New Construction - Initial	1/1/80
69	829	Amapola Avenue	150' w/o Ridgeline Road	Santiago Canyon Road	AC	E	2	1,185	22	26,070	10/25/23	61	46	42	12	New Construction - Initial	1/1/80
1038	1274	Sherman Avenue	West End	Malena Street	AC	E	2	135	31	5,685	3/4/24	61	92	8	0	Grind Overlay with Dig Outs	10/1/13
870	1259	Pearl Street	McPherson Street	First Street	AC	E	2	500	32	16,000	2/20/24	61	95	0	5	New Construction - Initial	1/1/80
190	2515	Bush Street	North End	Almond Avenue	AC	E	2	400	32	12,800	4/10/24	61	53	46	1	Surface Treatment - Slurry Seal	1/1/04
628	1641	Kirkwood Avenue	Esplanade Street	Wesley Street	AC	E	2	345	32	11,540	1/26/24	61	58	39	3	Surface Treatment - Slurry Seal	1/1/02
910	2054	Rama Street	El Rito Drive	Cerro Villa Drive	AC	E	2	220	32	7,540	4/15/24	61	50	50	0	Surface Treatment - Slurry Seal	1/1/04
751	2916	Milford Street	Milford Street	East End #2	AC	E	2	95	30	3,850	4/2/24	62	45	55	0	Surface Treatment - Slurry Seal	1/1/02
598	1696	Jib Street	White Cap Avenue	South End	AAC	E	2	185	31	5,735	2/28/24	62	19	64	17	Surface Reconstruction - AC	1/1/04
224	2423	Carmen Circle	Almond Avenue	South End	AAC	E	2	200	30	7,050	3/7/24	62	48	51	1	Surface Treatment - Slurry Seal	1/1/04
646	699	Larkspur Drive	Flower Street	Poinsettia Drive	AC	E	2	715	32	22,880	3/7/24	62	31	68	1	Surface Treatment - Slurry Seal	1/1/04
862	962	Parker Street	Almond AVenue	Palmyra Avenue	AC	E	2	620	36	22,320	3/5/24	62	23	41	36	Surface Treatment - Slurry Seal	1/1/04
874	948	Pepper Street	Chapman Avenue	Almond Avenue	AC	E	2	600	30	18,000	3/13/24	62	36	56	8	Surface Treatment - Slurry Seal	1/1/04
243	2518	Century Avenue	Jamesson Street	Lincoln Avenue	AC	E	2	760	30	22,800	2/21/24	62	75	25	0	Surface Treatment - Slurry Seal	1/1/04
366	1704	Dunbar Street	Greenleaf Avenue	South End	AAC	E	2	125	31	3,875	3/11/24	62	57	43	0	Overlay - AC Structural	10/1/08
643	1387	Lakeside Avenue	Fern Street	East End	AC	E	2	1,000	32	33,800	1/3/24	62	100	0	0	Surface Treatment - Slurry Seal	1/1/02
1227	734	Willow Avenue	Eckhoff Street	Sycamore Avenue	AC	E	2	1,485	32	47,520	3/6/24	62	41	55	4	Surface Treatment - Slurry Seal	1/1/04
767	1394	Morgan Street	Collins Avenue	Mayfair Avenue	AC	E	2	1,170	36	42,120	3/20/24	62	47	39	14	Surface Treatment - Slurry Seal	1/1/04
887	710	Plum Lane	Culver Avenue	Orchard Avenue	AAC	E	2	350	32	11,200	4/10/24	62	51	49	0	Surface Treatment - Slurry Seal	1/1/04
531	1688	Hartman Street	Brookshire Avenue	Brentwood Avenue	AC	E	2	235	32	7,520	3/1/24	63	28	72	0	Surface Treatment - Slurry Seal	1/1/03
751	1321	Milford Street	Oakmont Avenue	Walnut Avenue	AC	E	2	1,805	31	55,955	2/13/24	63	51	47	2	Surface Treatment - Slurry Seal	1/1/98
848	2757	Palmyra Avenue	Tustin Street	East End	AC	E	2	1,225	31	38,675	3/14/24	63	20	80	0	Surface Treatment - Slurry Seal	1/1/92
320	795	Crest Road	La Veta Avenue	Bronson Avenue	AC	E	2	600	32	19,200	3/27/24	63	25	70	5	Surface Treatment - Slurry Seal	1/1/04
867	811	Paul Road	Feldner Road	210' e/o Feldner Road	AC	E	2	210	32	6,720	4/10/24	63	66	0	34	Surface Treatment - Slurry Seal	1/1/04
1024	2026	Shallow Brook Lane	Marywood Lane	Cottage Hill Drive	AC	E	2	875	36	31,500	12/5/23	63	13	28	59	Surface Treatment - Slurry Seal	1/1/02
888	701	Poinsettia Drive	Mills Drive	Almond Avenue	AC	E	2	200	32	6,400	3/7/24	63	55	45	0	Surface Treatment - Slurry Seal	1/1/04

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
823	1338	Orangegrove Avenue	Malena Street	East End	AC	E	2	460	32	15,770	2/13/24	63	46	0	54	Surface Treatment - Slurry Seal	1/1/98
1002	100200	Santa Ana Canyon Road	Santa Lucia St	475' e/o Tustin St	PCC	E	2	1,245	20	24,900	3/28/24	63	7	78	15	New Construction - Initial	1/1/80
1186	535	Walnut Avenue	Park Lane	East End	AC	E	2	450	36	17,700	4/2/24	63	59	38	3	New Construction - Initial	1/1/80
516	2254	Grove Avenue	1710' E Batavia Street	Glassell Street	AAC	I	2	910	44	31,850	3/1/24	63	15	72	13	Surface Reconstruction - AC	1/1/02
533	920	Harwood Street	Palmyra Avenue	Culver Avenue	AC	E	2	615	33	20,295	2/26/24	63	33	60	7	Surface Treatment - Slurry Seal	1/1/03
828	1097	Orange Street	Rose Avenue	Walnut AVenue	AC	E	2	615	36	22,140	3/13/24	63	47	14	39	Surface Treatment - Slurry Seal	1/1/02
960	2264	Rose Avenue	Olive Street	Glassell Street	AC	E	2	285	32	9,120	2/15/24	63	59	41	0	Surface Treatment - Slurry Seal	1/1/02
659	959	Lemon Street	Palmyra Avenue	La Veta Avenue	AC	E	2	1,275	36	45,900	3/5/24	63	89	11	0	New Construction - Initial	1/1/80
1083	741	Stevens Street	North End	Maple Avenue	AC	E	2	450	32	14,400	3/12/24	63	23	52	25	Surface Treatment - Slurry Seal	1/1/97
1109	1301	Sycamore Avenue	Sacramento Street	Milford Street	AC	E	2	225	31	6,975	2/13/24	63	45	35	20	Surface Treatment - Slurry Seal	1/1/02
144	2255B	Blueridge Avenue	Neville Street	Glassell Street	AAC	I	2	1,371	44	60,324	4/11/24	63	38	57	5	Overlay - AC Structural	1/1/04
761	1508	Monroe Avenue	West End (near Highland St)	East End	AC	E	2	510	30	15,300	3/6/24	64	26	59	15	New Construction - Initial	1/1/80
1200	1487	Wellington Street	Ruth Place	La Veta Avenue	AC	E	2	275	32	9,300	2/23/24	64	99	0	1	Surface Treatment - Slurry Seal	1/1/02
659	960	Lemon Street	Almond Avenue	Palmyra Avenue	AC	E	2	625	36	22,500	3/13/24	64	78	16	6	New Construction - Initial	1/1/80
807	1317	Oakmont Avenue	130' w/o Markewood	Handy Street	AC	E	2	985	31	30,535	2/13/24	64	38	60	2	Surface Treatment - Slurry Seal	1/1/98
315	1887	Creekside Avenue	Cannon Street	Singingwood Street	AC	E	2	1,320	36	47,520	11/1/23	64	22	46	32	New Construction - Initial	1/1/80
268	2474	Christine Street	Walnut Avenue	South End	AAC	E	2	210	32	8,220	11/27/23	64	31	66	3	Surface Treatment - Slurry Seal	11/1/08
374	2246	Eckhoff Street	North End	Collins Avenue	AC	I	2	530	36	19,080	3/8/24	64	39	41	20	Surface Treatment - Slurry Seal	1/1/95
110	636	Barkley Street	Hart Street	East End	AC	E	2	500	32	16,000	2/13/24	64	82	17	1	Surface Treatment - Slurry Seal	1/1/02
271	2582	Circulo Way Pvt	Hewes Street	Espanita Street	AC	E	2	800	16	12,800	11/30/17	64	14	86	0	New Construction - Initial	1/1/80
115	593	Bayberry Street	North End	Sprucewood Avenue	AC	E	2	220	32	8,838	10/19/23	64	18	82	0	Surface Treatment - Slurry Seal	1/1/18
862	2215	Parker Street	Katella Avenue	South End	AC	E	2	565	38	21,470	3/8/24	64	29	36	35	Surface Reconstruction - AC	1/1/93
3	789	Acacia Avenue	Jewell Place	Lime Street	AC	E	2	435	32	13,920	3/4/24	64	93	0	7	Surface Reconstruction - AC	1/1/91
544	14663	Heim Avenue	Orange-Olive Road	Torres Street	AC	E	2	1,571	36	56,556	3/28/24	64	32	34	34	Surface Treatment - Slurry Seal	1/1/98
585	2661	Irvine Park Road	Jamboree Road	1395' E Jamboree Road	AC	E	3	1,395	40	55,800	11/27/17	64	50	27	23	New Construction - Initial	1/1/80
828	1063	Orange Street	Quincy Avenue	South End	AC	E	2	170	31	6,320	3/13/24	64	31	65	4	Surface Treatment - Slurry Seal	1/1/02
948	813	Robin Road	Feldner Road	East End	AAC	E	2	495	32	16,890	3/7/24	64	40	55	5	Surface Treatment - Slurry Seal	1/1/04
458	2251	Freedom Avenue	West End	East End	AC	E	2	1,025	44	45,100	3/20/24	65	38	56	6	Surface Treatment - Slurry Seal	1/1/95
1051	578	Sirius Avenue	Spinnaker Street	Lewis Street	AC	E	2	795	33	26,043	3/12/24	65	49	44	7	Surface Treatment - Slurry Seal	1/1/03
1109	782	Sycamore Avenue	Lemon Street	Glassell Street	AC	E	2	620	32	19,840	3/14/24	65	33	63	4	Surface Treatment - Slurry Seal	1/1/03
121	608	Belbrook Street	Amber Avenue	Glendora Avenue	AAC	E	2	500	32	16,000	2/28/24	65	27	48	25	Overlay - AC Structural	1/1/04
1053	1605	Skylark Place	West End	Skylark Place	001	E	2	420	32	15,988	10/19/23	65	30	70	0	Surface Treatment - Slurry Seal	1/1/18
667	2270	Lime Street	Palm Avenue	Maple Avenue	AAC	E	2	615	33	20,295	3/4/24	65	74	0	26	Surface Reconstruction - AC	1/1/91
1140	1014	Tularosa Avenue	West End	Cambridge Street	AC	E	2	560	32	19,070	2/23/24	65	52	39	9	Surface Treatment - Slurry Seal	1/1/03
4	834	Adams Avenue	Glassell Street	Grand Street	AAC	E	2	615	32	19,680	3/13/24	65	56	26	18	Surface Treatment - Slurry Seal	1/1/02
603	2365	Jordan Avenue	Hewes Street	Esplanade Street	AC	E	2	1,295	37	47,915	3/6/24	65	71	12	17	Surface Treatment - Slurry Seal	1/1/95
816	781	Olive Street	Rose Avenue	Walnut Avenue	AC	E	2	650	36	23,400	2/15/24	65	50	50	0	Surface Treatment - Slurry Seal	1/1/03
862	2217	Parker Street	Struck Avenue	Collins Avenue	AAC	I	2	1,265	37	46,805	2/15/24	65	33	63	4	Overlay - AC Structural	1/1/97
836	1572	Outrider Street	La Cumbre Drive	Canyon View AVenue	AC	E	2	220	32	7,040	10/24/23	65	54	43	3	Surface Treatment - Slurry Seal	1/1/02
734	1268	Mayfair Avenue	Tustin Street	Highland Street	AC	E	2	1,035	31	32,085	2/27/24	65	36	51	13	New Construction - Initial	1/1/80
165	2432	Brentwood Avenue	Pampas Street	Glassell Street	AC	E	2	1,695	32	54,240	3/1/24	65	30	70	0	Surface Treatment - Slurry Seal	10/10/19
813	2609	Old Chapman Road	North End	Canyon View Avenue	AC	E	2	505	28	14,890	10/26/23	65	99	0	1	New Construction - Initial	1/1/80
1191	2409	Washington Avenue	Glassell Street	Orange Street	PCC	E	2	325	33	10,725	8/26/24	65	24	53	23	New Construction - Initial	1/1/80
122	601	Bennett Avenue	West End	Malena Street	AC	E	2	135	32	5,820	3/4/24	66	100	0	0	Grind Overlay with Dig Outs	10/1/13
91	581	Ashwood Street	Dunton Avenue	Crystal Avenue	AC	E	2	730	32	23,360	3/1/24	66	43	40	17	Surface Treatment - Slurry Seal	1/1/03
960	1119	Rose Avenue	Lincoln Avenue	East End	AC	E	2	295	31	9,145	2/2/24	66	43	57	0	Surface Treatment - Slurry Seal	1/1/03
1257	1970	Yellowstone Boulevard	Serrano Avenue	Mabury Avenue	AAC	E	2	1,250	34	43,250	11/16/23	66	21	79	0	Overlay - AC Structural	1/1/03
351	704	Devon Road	La Veta Avenue	Bronson Avenue	AC	E	2	605	32	19,360	3/27/24	66	33	64	3	Surface Treatment - Slurry Seal	1/1/04
751	2894	Milford Street	Milford Street	East End #1	AC	E	2	95	30	3,850	4/2/24	66	45	55	0	Surface Treatment - Slurry Seal	1/1/02
707	1337	Malena Street	Orange Grove Avenue	Walnut Avenue	AC	E	2	540	32	17,280	2/13/24	66	60	0	40	Surface Treatment - Slurry Seal	1/1/98
7	856	Agate Street	Meats Avenue	Grove Avenue	AC	E	2	745	32	24,590	12/13/23	66	29	71	0	Surface Treatment - Slurry Seal	8/1/16
13	842	Alderwood Avenue	West End	Pinewood Street	AAC	E	2	160	32	5,120	3/28/24	66	100	0	0	Overlay - AC Structural	10/1/08
1256	2228	Yale Avenue	Brian Street	Main Street	AC	I	2	535	44	23,540	3/8/24	66	72	28	0	Surface Treatment - Slurry Seal	11/1/08
715	2853	Maple Avenue	Eckhoff Street	Feldner Road	AAC	E	2	1,315	36	47,340	3/14/24	66	47	53	0	Surface Reconstruction - AC	5/1/09
833	711	Orchard Avenue	Flower Street	East End	AC	E	2	635	32	20,320	3/5/24	67	56	33	11	Surface Treatment - Slurry Seal	1/1/04
1129	1804	Timberland Avenue	Amberwood Street	South End	AC	E	2	1,645	32	54,140	10/19/23	67	18	61	21	Surface Treatment - Slurry Seal	1/1/18
815	2167	Olive Avenue	200' n/o Lincoln Avenue	Lincoln Avenue	AAC	I	2	200	30	5,700	4/15/24	67	26	10	64	Overlay - AC Structural	1/1/98
715	746	Maple Avenue	Bitterbush Street	Eckhoff Street	AC	E	2	905	36	32,580	3/14/24	67	25	69	6	Surface Treatment - Slurry Seal	1/1/97
742	3195	Meads Avenue	Randall Street	Santiago Canyon	AC	E	1	1,474	15	22,110	10/25/23	67	56	35	9	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
612	1403	Kathleen Street	Collins Avenue	Mayfair Avenue	AC	E	2	1,170	36	42,120	3/20/24	67	43	44	13	Surface Treatment - Slurry Seal	1/1/02
720	1128	Maplewood Street	Collins Avenue	Mayfair Avenue	AC	E	2	1,120	32	35,840	2/2/24	67	40	60	0	Surface Treatment - Slurry Seal	1/1/03
769	1590	Morning Glory Way	White Oak Ridge	Willow Springs Road	AC	E	2	985	32	32,270	10/19/23	67	32	55	13	Surface Treatment - Slurry Seal	1/1/18
845	2414	Palm Avenue	Glassell Street	Shaffer Street	PCC	E	2	1,310	40	52,400	8/28/24	67	21	65	14	New Construction - Initial	1/1/80
234	2424	Castle Circle	Almond Avenue	South End	AAC	E	2	200	30	7,050	3/5/24	67	56	43	1	Surface Treatment - Slurry Seal	1/1/04
1051	579	Sirius Avenue	City Limit	Spinnaker Street	AC	E	2	1,150	32	36,416	3/12/24	67	65	35	0	Surface Treatment - Slurry Seal	1/1/03
272	2438	Citrus Street	Palm Avenue	South End	AC	E	2	180	31	6,630	3/11/24	67	100	0	0	New Construction - Initial	1/1/80
348	1711	Delta Street	St. James Avenue	South End	AAC	E	2	140	31	4,340	2/28/24	67	22	78	0	Surface Reconstruction - AC	1/1/04
807	1104	Oakmont Avenue	Maplewood Street	California Street	AC	E	2	620	32	19,840	2/2/24	67	73	7	20	Surface Treatment - Slurry Seal	1/1/03
281	1314	Clinton Street	Rose Avenue	South End	AC	E	2	230	31	8,230	2/14/24	67	75	18	7	Surface Treatment - Slurry Seal	1/1/98
862	963	Parker Street	Palmrya Avenue	Culver Avenue	AC	E	2	615	32	19,680	3/12/24	67	45	48	7	Surface Treatment - Slurry Seal	1/1/04
65	820	Alpine Road	Culver Avenue	La Veta Avenue	AC	E	2	625	32	20,000	3/13/24	68	27	28	45	Surface Treatment - Slurry Seal	1/1/04
1002	100100	Santa Ana Canyon Road	Santa Anita St	Santa Lucia St	PCC	E	2	745	24	17,880	3/28/24	68	8	78	14	New Construction - Initial	1/1/80
1023	1841	Serrano Avenue	West End	Santiago Boulevard	AC	E	2	200	32	7,900	4/11/24	68	54	33	13	Surface Treatment - Slurry Seal	1/1/02
1242	1651	Woodland Street	Kirkwood Avenue	Fairhaven Avenue	AAC	E	2	495	31	15,345	1/26/24	68	100	0	0	Surface Reconstruction - AC	1/1/94
734	1399	Mayfair Avenue	Handy Street	Elmwood Street	AC	E	2	520	32	16,640	2/13/24	68	76	0	24	New Construction - Initial	4/3/12
878	2361	Philo Avenue	Hewes Street	Espanita Street	AC	E	2	370	32	11,328	2/20/24	68	99	0	1	Surface Treatment - Slurry Seal	1/1/92
906	1507	Quincy Avenue	Highland Street	East End	AC	E	2	350	30	10,500	4/11/24	68	73	27	0	New Construction - Initial	1/1/80
927	1964	Richard Street	Walnut AVenue	South End	AAC	E	2	210	32	8,220	11/27/23	68	20	71	9	Surface Treatment - Slurry Seal	11/1/08
198	2508	California Street	Maple Avenue	Lael Drive	AC	E	2	290	32	9,280	2/23/24	68	55	33	12	Surface Treatment - Slurry Seal	8/1/09
408	1101	Everett Place	California Street	Lincoln Avenue	AAC	E	2	620	31	19,220	2/23/24	68	24	0	76	Surface Reconstruction - AC	1/1/03
720	997	Maplewood Street	Almond Avenue	Washington Avenue	AAC	E	2	290	30	8,700	2/21/24	68	74	26	0	Overlay - AC Structural	10/1/08
734	1106	Mayfair Avenue	Cambridge Street	California Street	AC	E	2	1,280	32	40,960	2/2/24	68	47	53	0	Surface Treatment - Slurry Seal	1/1/03
351	705	Devon Road	Culver Avenue	La Veta Avenue	AC	E	2	620	32	19,840	3/13/24	68	18	71	11	Surface Treatment - Slurry Seal	1/1/04
592	982	Jameson Street	Chapman Avenue	Almond Avenue	AC	E	2	620	36	22,320	2/21/24	68	87	6	7	Surface Treatment - Slurry Seal	1/1/04
979	1600	Sagewood Street	North End	Sprucewood Avenue	AC	E	2	245	32	9,638	10/19/23	68	25	75	0	Surface Treatment - Slurry Seal	1/1/18
1228	1594	Willow Springs Road	North End	Oak Tree Lane	AC	E	2	505	32	19,458	10/19/23	68	31	69	0	Surface Treatment - Slurry Seal	1/1/18
891	2240	Poplar Street	North End	Orangewood Avenue	AC	I	2	1,475	44	64,900	3/7/24	68	81	15	4	Surface Treatment - Slurry Seal	1/1/95
71	859	Amberwood Street	Timberland Avenue	Sprucewood Avenue	AC	E	2	520	32	18,140	10/19/23	68	27	73	0	Surface Treatment - Slurry Seal	1/1/18
845	731	Palm Avenue	Donneybrooke Street	Eckhoff Street	AC	E	2	1,200	32	38,400	3/14/24	68	31	69	0	Surface Treatment - Slurry Seal	1/1/97
1197	1123	Waverly Street	Collins Avenue	Oakmont Avenue	AC	E	2	825	31	25,575	2/2/24	69	53	47	0	Surface Treatment - Slurry Seal	1/1/03
355	1673	Dixon Avenue	Olympia Way	East End	AC	E	2	150	32	5,900	2/20/24	69	100	0	0	Surface Treatment - Slurry Seal	1/1/92
828	1098	Orange Street	North End	Rose Avenue	AC	E	2	305	38	11,590	3/13/24	69	59	11	30	Surface Treatment - Slurry Seal	1/1/02
1002	100000	Santa Ana Canyon Road	Santa Anita St	325' e/o Orange Ave	PCC	E	2	1,770	24	42,480	3/28/24	69	9	91	0	New Construction - Initial	1/1/80
98	603	Austin Avenue	Olympia Way	East End	AC	E	2	150	32	5,900	2/20/24	69	99	0	1	Surface Treatment - Slurry Seal	1/1/91
848	989B	Palmyra Avenue	Grand Street	Glassell Street	AC	E	2	643	32	20,576	2/26/24	69	22	78	0	Surface Treatment - Slurry Seal	1/1/03
118	2428	Beaton Way	Donnybrooke Street	East End	AC	E	2	170	31	6,320	3/12/24	69	26	74	0	Surface Treatment - Slurry Seal	1/1/97
161	1441	Breezy Way	North End (near Burdie Lane)	South End	AC	E	2	1,440	32	49,680	2/22/24	69	54	44	2	Surface Treatment - Slurry Seal	1/1/02
823	1297	Orangegrove Avenue	West End (near Park Lane)	East End	AC	E	2	630	32	24,543	2/27/24	69	40	45	15	New Construction - Initial	1/1/80
880	1015	Pine Street	Tularosa Avenue	South End	AC	E	2	130	32	5,210	4/10/24	69	63	37	0	Surface Treatment - Slurry Seal	1/1/03
1029	914	Shaffer Street	Culver Avenue	La Veta Avenue	AAC	E	2	610	30	18,300	2/26/24	69	33	66	1	Overlay - AC Structural	1/1/03
167	2229	Brian Street	North End	Yale Street	AC	I	2	305	44	14,820	3/8/24	69	68	26	6	Surface Treatment - Slurry Seal	11/1/08
667	2226	Lime Street	Briardale Avenue	Taft Avenue	AAC	E	2	375	44	16,500	3/18/24	69	81	11	8	Overlay - AC Structural	1/1/99
1085	1885	Stillwater Avenue	Cannon Street	Singingwood Street	AC	E	2	1,240	36	46,890	11/1/23	69	31	32	37	New Construction - Initial	1/1/80
130	863	Birch Avenue	Main Street	Fairmont Street	AC	E	2	595	32	19,040	2/1/24	69	100	0	0	New Construction - Initial	1/1/80
208	2019	Canal Street	Cumberland Avenue	Meats Avenue	AAC	E	2	985	39	38,415	3/11/24	69	68	18	14	Overlay - AC Structural	1/1/94
679	15590	Lolita Street	Santiago Canyon Road	528' e/o Santiago Canyon Road	AC	E	2	528	20	10,560	3/22/24	69	60	40	0	New Construction - Initial	1/1/80
94	645	Athens Avenue	Harding Street	East End	AAC	E	2	220	32	7,040	3/4/24	70	77	9	14	Overlay - AC Structural	11/13/06
589	1524	Jackson Avenue	Handy Street	Hart Street	AAC	E	2	1,220	31	37,820	2/8/24	70	100	0	0	2 in overlay	10/1/13
247	2519	Chalynn Avenue	Cambridge Street	California Street	AAC	E	2	1,405	32	44,960	2/21/24	70	84	0	16	Surface Treatment - Slurry Seal	11/1/08
659	2396	Lemon Street	Chapman Avenue	Almond Avenue	PCC	E	2	610	40	24,400	11/14/17	70	19	37	44	New Construction - Initial	1/1/80
828	2407	Orange Street	Almond Avenue	Washington Avenue	PCC	E	2	295	40	11,800	8/26/24	70	17	51	32	New Construction - Initial	1/1/80
880	922	Pine Street	Chapman Avenue	Almond Avenue	AC	E	2	605	36	21,780	3/15/24	70	83	0	17	New Construction - Initial	1/1/80
970	1271	Russell Drive	North End	Mayfair Avenue	AC	E	2	430	31	13,330	2/27/24	70	49	38	13	New Construction - Initial	1/1/80
1032	1141	Shattuck Place	Walnut Avenue	Palm Avenue	AC	E	2	1,260	32	40,320	2/27/24	70	61	38	1	Surface Treatment - Chip Seal	12/13/06
170	563	Briardale Avenue	West End	Lime Street	AAC	I	2	220	44	9,680	3/19/24	70	100	0	0	Overlay - AC Structural	1/1/99
179	559	Brookshire Avenue	Pampas Street	Fernside Avenue	AC	E	2	1,650	32	52,800	3/1/24	70	42	53	5	Surface Treatment - Slurry Seal	10/10/19
165	3339	Brentwood Avenue	Glassell Street	East End	AC	E	2	532	32	17,024	3/1/24	70	34	53	13	Surface Treatment - Slurry Seal	1/1/03
828	2408	Orange Street	Washington Avenue	Palmyra Avenue	PCC	E	2	300	40	12,000	8/26/24	70	13	53	34	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
357	1172	Donna Avenue	Nutwood Street	Heatherstone Drive	AC	E	2	120	32	4,590	2/23/24	70	51	49	0	New Construction - Initial	4/3/12
276	2444	Clark Street	Almond Avenue	Palmyra Avenue	AC	E	2	620	32	19,840	3/12/24	70	53	47	0	Surface Treatment - Slurry Seal	1/1/04
545	735	Hemlock Street	Willow Avenue	South End	AC	E	2	220	32	7,040	3/11/24	70	61	36	3	Surface Treatment - Slurry Seal	1/1/04
1232	2095	Windes Drive	Grovewood Lane	Highpoint Road	AC	E	2	550	28	15,400	11/14/23	70	80	0	20	New Construction - Initial	10/30/12
68	2195	Alvarez Avenue	Main Street	East End	AC	I	2	525	44	23,100	3/8/24	70	100	0	0	Surface Treatment - Slurry Seal	1/1/95
360	1498	Dorothy Drive	Yorba Street	Loretta Drive	AAC	E	2	465	32	14,496	2/14/24	70	100	0	0	2 in overlay	8/1/09
449	2315	Fondren Street	North End	El Rancho Avenue	AAC	E	2	845	32	28,540	3/7/24	70	45	55	0	Overlay - AC Structural	9/1/08
729	1410	Marmon Avenue	Esplanade Street	Hewes Street	AAC	E	2	1,335	34	45,390	2/23/24	70	52	43	5	Overlay - AC Structural	1/1/04
403	1544	Esplanade Street	Del Valle Avenue	Walnut Avenue	AAC	E	2	130	32	3,968	1/2/24	70	100	0	0	Overlay - AC Structural	10/1/07
1138	943	Trenton Avenue	Shaffer Street	Cambridge Street	AAC	E	2	935	32	29,920	2/15/24	70	85	0	15	Surface Treatment - Slurry Seal	5/27/25
289	1866	Colorado Lane	North End	Villa Vista Way	AC	E	2	100	32	3,200	8/27/24	71	44	56	0	New Construction - Initial	1/1/80
596	2883	Jetty Drive	Sirius Avenue	Chapman Avenue	AAC	E	2	725	33	23,325	3/7/24	71	30	61	9	Overlay - AC Structural	1/1/03
709	1401	Mallard Street	Collins Avenue	South End	AC	E	2	1,205	32	38,560	3/15/24	71	100	0	0	Surface Treatment - Slurry Seal	1/1/02
802	1173	Nutwood Street	Donna Avenue	South End	AC	E	2	320	32	10,990	2/23/24	71	74	10	16	New Construction - Initial	4/3/12
960	1309	Rose Avenue	Markwood Street	Milford Street	AAC	E	2	215	31	6,665	2/13/24	71	81	19	0	Overlay - AC Structural	12/12/12
1106	1697	Swell Street	White Cap Avenue	South End	AC	E	2	190	31	5,890	2/28/24	71	37	44	19	Surface Reconstruction - AC	1/1/04
1312	2072	Rockridge Place	Summitridge Lane	Longridge Drive	AC	E	2	510	32	16,820	12/10/24	71	43	30	27	New Construction - Initial	1/1/80
1074	1708	St. James Avenue	Orange-Olive Road	Dunfield Street	AAC	E	2	770	31	23,870	3/11/24	71	75	25	0	Surface Treatment - Slurry Seal	1/1/04
1231	2806	Wimbleton Pvt	Old Chapman Road	East End	AC	E	2	399	28	12,672	12/6/17	71	43	52	5	New Construction - Initial	1/1/80
1335	8000	Weeping Willow Avenue	Shadyvale Street	Spicewood Street	AC	E	2	579	32	18,528	4/15/24	71	100	0	0	New Construction - Initial	10/4/12
700	1339	Madison Avenue	Malena Street	East End	AC	E	2	415	32	14,330	2/13/24	71	48	0	52	Surface Treatment - Slurry Seal	1/1/98
722	713	Marie Place	North End	Larkspur Drive	AC	E	2	205	32	7,610	3/12/24	71	38	61	1	Surface Treatment - Slurry Seal	1/1/04
1215	1589	White Oak Ridge	Morning Glory Way	Willow Springs road	AC	E	2	1,040	32	34,780	10/19/23	71	32	67	1	Surface Treatment - Slurry Seal	1/1/18
86	569	Arbor Way	Eckhoff Street	East End	AC	E	2	250	32	8,000	3/12/24	71	54	46	0	Surface Treatment - Slurry Seal	1/1/04
1029	915	Shaffer Street	Palmyra Avenue	Culver Avenue	AC	E	2	620	30	18,600	2/26/24	71	24	66	10	Surface Treatment - Slurry Seal	1/1/03
1132	1833	Topaz Street	Grove Avenue	South End	AC	E	2	180	31	7,080	1/3/24	71	39	52	9	Surface Treatment - Slurry Seal	8/1/16
78	2207	Angus Avenue	Batavia Street	Hariton Street	AC	I	2	1,075	44	47,300	3/8/24	71	57	27	16	Surface Treatment - Slurry Seal	1/1/95
1230	1095	Wilson Avenue	Shaffer Street	Cambridge Street	AC	E	2	1,275	31	39,525	2/9/24	72	27	60	13	New Construction - Initial	1/1/80
277	2451	Cleveland Street	North End	Harwood Street	AAC	E	2	840	31	26,040	2/28/24	72	40	60	0	Overlay - AC Structural	1/1/04
408	1100	Everett Place	Cambridge Street	California Street	AAC	E	2	1,280	31	39,680	2/2/24	72	95	5	0	Surface Treatment - Slurry Seal	1/1/03
659	775	Lemon Street	Collins Avenue	Mayfair Avenue	AAC	E	2	1,105	37	40,885	2/15/24	72	80	20	0	Overlay - AC Structural	1/1/99
828	1149	Orange Street	Collins Avenue	Lomita Avenue	AC	E	2	615	40	24,600	3/11/24	72	100	0	0	Surface Treatment - Slurry Seal	1/1/02
922	2152	Redwood Avenue	Beechwood Street	Ashwood Street	AAC	E	2	415	32	13,280	3/1/24	72	44	56	0	Overlay - AC Structural	1/1/03
516	2182	Grove Avenue	Glassell Street	East End	AC	I	2	225	44	11,050	4/11/24	72	40	60	0	New Construction - Initial	1/1/80
92586	100600	Cabrillo Street	San Juan Drive	Elsinore Avenue	AAC	E	2	340	32	10,880	8/28/24	72	67	33	0	Overlay - AC Structural	1/31/16
445	728	Flower Street	North End	Maple Avenue	AC	E	2	450	32	14,400	3/6/24	72	37	46	17	Surface Treatment - Slurry Seal	1/1/02
1029	917	Shaffer Street	Almond Avenue	Washington Avenue	AC	E	2	290	30	8,700	2/26/24	72	19	60	21	New Construction - Initial	1/1/80
1067	590	Spinnaker Street	Simmons Road	Binnacle Street	AC	E	2	970	33	31,812	3/7/24	72	47	0	53	Surface Treatment - Slurry Seal	1/1/03
1160	1272	Victoria Drive	North End	Mayfair Avenue	AC	E	2	430	31	13,330	2/27/24	72	98	0	2	Grind Overlay with Dig Outs	10/1/13
70	853	Amber Avenue	Millbrae Street	Hayford Street	AAC	E	2	1,045	32	33,440	2/28/24	72	39	59	2	Overlay - AC Structural	1/1/04
426	744	Feldner Road	Maple Avenue	Chapman Avenue	AC	E	2	605	30	18,150	3/12/24	72	36	56	8	Surface Treatment - Slurry Seal	1/1/97
865	1891	Partridge Lane	Bobwhite Way	Cannon Street	AAC	E	2	130	32	3,968	11/1/23	72	29	0	71	Overlay - AC Structural	8/1/16
526	1330	Handy Street	Mayfair Avenue	Walnut Avenue	AAC	E	2	1,610	31	49,910	3/20/24	72	82	18	0	2 in overlay	10/1/13
1191	2368	Washington Avenue	Esplanade Street	Hewes Street	AAC	E	2	1,125	32	35,808	2/23/24	72	83	14	3	Overlay - AC Structural	1/1/04
1232	2096	Windes Drive	Lewis Street	Grovewood Lane	AC	E	2	860	18	15,480	11/14/23	72	74	0	26	New Construction - Initial	1/1/80
728	1325	Markwood Street	Carrie Avenue	Hamilton Avenue	AC	E	2	385	32	12,320	2/13/24	72	92	0	8	Surface Treatment - Slurry Seal	12/12/12
1029	1153	Shaffer Street	Walnut Avenue	Palm Avenue	AC	E	2	1,255	34	42,670	2/9/24	72	46	23	31	Surface Reconstruction - AC	1/1/03
378	1611	El Carmen Avenue	Gravier Street	Hearthstone Street	AAC	E	2	1,170	32	37,440	11/28/23	72	28	58	14	Surface Treatment - Slurry Seal	11/1/08
918	3179	Randall Street	Meads Avenue	Mustang Avenue	AC	E	1	795	16	12,720	10/25/23	72	35	23	42	New Construction - Initial	1/1/80
1126	1652	Tilden Avenue	Olympia Street	East End	AC	E	2	155	32	6,060	2/20/24	72	100	0	0	Surface Treatment - Slurry Seal	1/1/91
1140	1012	Tularosa Avenue	Gardner Street	East End	AAC	E	2	130	32	5,310	2/21/24	72	100	0	0	Overlay - AC Structural	1/1/99
351	706	Devon Road	Palmyra Avenue	Culver Avenue	AC	E	2	620	32	19,840	3/7/24	73	10	81	9	Surface Treatment - Slurry Seal	1/1/02
428	1398	Fern Street	Mayfair Avenue	Rose Avenue	AC	E	2	765	32	24,480	2/13/24	73	99	0	1	New Construction - Initial	4/3/12
484	2125	Glendale Avenue	Shaffer Street	Cambridge Street	AAC	E	2	1,415	31	43,865	3/11/24	73	77	0	23	Surface Treatment - Slurry Seal	1/1/04
754	2146	Millbrae Street	Amber Avenue	Glendora Avenue	AC	E	2	470	32	15,040	2/28/24	73	43	56	1	Surface Treatment - Slurry Seal	1/1/04
326	1691	Crystal View Avenue	Hartman Street	Ashwood Street	AC	E	2	1,070	32	34,240	3/11/24	73	43	50	7	Surface Treatment - Slurry Seal	1/1/03
828	2399	Orange Street	Chapman Avenue	Almond Avenue	PCC	I	2	615	40	24,600	8/28/24	73	17	34	49	New Construction - Initial	1/1/80
1326	8007	Pebble Creek Lane	Spicewood Street	Shadyvale Street	AC	E	2	705	36	25,380	4/15/24	73	100	0	0	New Construction - Initial	10/4/12
348	2156	Delta Street	North End	Heim Avenue	AAC	E	2	650	31	20,150	2/28/24	73	18	45	37	Overlay - AC Structural	1/1/04

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
797	2132	Northumberland Street	Heim Avenue	Amber Avenue	AC	E	2	285	33	9,405	2/28/24	73	26	68	6	Surface Treatment - Slurry Seal	1/1/98
906	1346	Quincy Avenue	West End	Wanda Road	AAC	E	2	180	32	6,860	2/8/24	73	100	0	0	2 in overlay	10/1/13
1050	1886	Singingwood Street	North End	Stillwater Avenue	AC	E	2	1,635	36	61,408	11/1/23	73	35	18	47	New Construction - Initial	1/1/80
1186	536	Walnut Avenue	West End	Milford Road	AC	E	2	700	37	28,400	4/2/24	73	88	0	12	New Construction - Initial	1/1/80
533	919	Harwood Street	Almond Avenue	Palmyra Avenue	AC	E	2	610	33	20,130	3/13/24	73	52	33	15	Surface Treatment - Slurry Seal	1/1/03
819	1831	Onyx Avenue	Sacramento Street	East End	AC	E	2	150	31	6,150	1/3/24	73	37	63	0	Surface Treatment - Slurry Seal	8/1/16
723	804	Marietta Avenue	Clark Street	East End	AC	E	2	110	32	4,570	3/12/24	73	76	24	0	Surface Treatment - Slurry Seal	1/1/04
1040	1270	Shirley Street	North End	Mayfair Avenue	AC	E	2	430	31	13,330	2/27/24	73	86	13	1	Grind Overlay with Dig Outs	10/1/13
1332	8004	Tulip Tree Avenue	Shadyvale Street	Sugarberry Street	AC	E	2	745	36	26,820	4/15/24	73	100	0	0	New Construction - Initial	10/4/12
823	1336	Orangegrove Avenue	Handy Street	Hart Street	AAC	E	2	755	31	23,405	2/13/24	73	99	0	1	2 in overlay	10/1/13
882	1799	Pinnacle Pointe	South End	Hidden Canyon	AC	E	2	930	28	27,838	10/26/23	73	72	28	0	Surface Treatment - Slurry Seal	1/1/04
134	624	Bitterbush Street	North End	Palm Avenue	AC	E	2	335	32	10,720	3/11/24	73	65	34	1	Surface Treatment - Slurry Seal	1/1/97
681	1316	Lomita Avenue	Adelle Street	Kathleen Street	AC	E	2	220	32	7,040	3/20/24	73	58	42	0	Surface Treatment - Slurry Seal	1/1/02
520	1326	Hamilton Avenue	Sacramento Street	Markwood Street	AAC	E	2	165	32	5,280	2/13/24	73	99	0	1	Overlay - AC Structural	12/12/12
733	1817	Marywood Lane	Meadow Grove Road	Shadow Ridge Lane	AC	E	2	325	36	11,444	12/5/23	74	60	0	40	Surface Treatment - Slurry Seal	1/1/02
734	1315	Mayfair Avenue	Adele Street	Morgan Street	AC	E	2	440	32	14,080	3/15/24	74	62	23	15	Surface Treatment - Slurry Seal	1/1/02
232	2501	Casselle Avenue	130' W Woodland Street	Woodland Street	AC	E	2	130	33	4,290	1/26/24	74	100	0	0	Surface Treatment - Slurry Seal	10/1/13
248	2457	Chalynn Circle	Shaffer Street	East End	AAC	E	2	835	30	26,200	2/26/24	74	46	54	0	Overlay - AC Structural	1/1/03
455	2272	Frampton Street	Palm Avenue	South End	AAC	E	2	170	32	6,490	3/11/24	74	84	0	16	Overlay - AC Structural	1/1/03
141	604	Blue Bird Avenue	Hewes Street	East End	AC	E	2	850	32	28,998	11/28/23	74	26	66	8	Surface Treatment - Slurry Seal	6/1/20
344	1924	Del Mar Avenue	Lincoln Street	Nordic Street	AAC	E	2	330	36	11,880	3/4/24	74	8	92	0	Overlay - AC Structural	1/1/04
1109	784	Sycamore Avenue	Main Street	Batavia Street	AC	E	2	1,365	31	42,315	2/1/24	74	67	32	1	Complete Reconstruction - AC	10/1/06
1084	2186	Stewart Drive	Main Street	Bush Street	AAC	I	2	330	42	13,860	4/10/24	74	34	63	3	Overlay - AC Structural	1/1/97
380	2300	El Rancho Avenue	Lewis Street	Park Hyde Street	AAC	E	2	720	32	22,790	3/7/24	74	52	48	0	Overlay - AC Structural	9/1/08
848	796	Palmyra Avenue	Main Street	Lime Street	AC	E	2	910	32	29,120	3/12/24	74	44	0	56	Surface Treatment - Slurry Seal	1/1/04
1127	576	Tiller Avenue	Halyard Lane	Spinnaker Street	AC	E	2	930	33	31,190	3/7/24	74	72	28	0	Surface Treatment - Slurry Seal	1/1/03
783	1716	Navarro Place	San Juan Drive	South End	AC	E	2	110	36	5,460	11/16/23	74	100	0	0	Reconstruct with AC	1/31/16
848	985	Palmyra Avenue	Gardner Drive	Lincoln street	AC	E	2	1,020	30	30,600	2/21/24	74	56	24	20	New Construction - Initial	1/1/80
960	1287	Rose Avenue	Tustin STreet	Highland Street	AC	E	2	1,150	31	35,650	3/13/24	74	75	25	0	New Construction - Initial	1/1/80
1330	8005	Spicewood Street	Weeping Willow Avenue	Pebble Creek Lane	AC	E	2	465	32	14,880	4/15/24	74	100	0	0	New Construction - Initial	10/4/12
1074	1712	St. James Avenue	Dunfield Street	Canal Street	AAC	E	2	1,485	31	46,035	2/28/24	74	65	23	12	Surface Treatment - Slurry Seal	1/1/04
1187	1267	Wayfield Circle	Walnut Avenue	Palm Avenue	AAC	E	2	1,265	42	53,130	2/27/24	74	67	16	17	Surface Treatment - Slurry Seal	5/27/25
1228	1592	Willow Springs Road	White Oak Ridge	South End	AC	E	2	520	32	18,438	10/19/23	74	42	49	9	Surface Treatment - Slurry Seal	1/1/18
161	12931	Breezy Way	North End	Delia Lane	AC	E	2	370	32	12,940	2/22/24	74	30	0	70	New Construction - Initial	1/1/80
431	759	Fernside Street	Dunton Avenue	Brentwood Avenue	AAC	E	2	980	32	31,360	3/1/24	74	43	57	0	Surface Treatment - Slurry Seal	10/10/19
959	1497	Rosalind Drive	Burdie Lane	Larkstone Drive	AAC	E	2	415	31	13,365	2/22/24	74	48	49	3	2 in overlay	8/28/07
1014	1715	Saratoga Court	San Juan Drive	South End	AAC	E	2	290	32	10,780	11/16/23	74	78	8	14	Overlay - AC Structural	1/31/16
1066	2252	Southern Avenue	Batavia Street	Pacific Street	AC	I	2	1,400	44	61,600	3/1/24	74	80	16	4	Surface Treatment - Slurry Seal	1/1/95
591	1416	James Street	Palmyra Avenue	La Veta Avenue	AC	E	2	1,440	31	44,640	1/26/24	74	74	22	4	New Construction - Initial	4/3/12
790	1932	Nohl Canyon Road	Nohl Ranch Road	290' e/o Valleyglen Lane	AC	E	2	905	26	23,530	4/11/24	74	100	0	0	New Construction - Initial	1/1/80
959	22459	Rosalind Drive	North End	Delia Lane	AC	E	2	455	32	15,660	2/22/24	74	41	20	39	New Construction - Initial	1/1/80
851	1753	Palo Loma Place	North End	Valencia Drive	AAC	E	2	160	32	6,620	11/16/23	74	89	0	11	Overlay - AC Structural	1/31/16
927	1962	Richard Street	Silverleaf Avenue	Sycamore Avenue	AAC	E	2	395	32	14,140	11/27/23	74	66	0	34	Overlay - AC Structural	10/1/08
1230	1510	Wilson Avenue	Tustin Street	East End	AC	E	2	960	31	29,760	3/4/24	74	91	0	9	New Construction - Initial	1/1/80
711	2844	Manchester Avenue	City Boulevard West	Chapman Avenue	AAC	I	5	1,225	92	112,700	3/27/24	74	29	56	15	Overlay - AC Structural	1/1/98
272	2437	Citrus Street	Palm Avenue	Sycamore Avenue	AAC	E	2	505	32	16,160	2/1/24	75	61	39	0	Overlay - AC Structural	1/1/95
432	1417	Fernwood Avenue	West End	Esplanade Street	AAC	E	2	270	32	9,740	1/26/24	75	67	0	33	Overlay - AC Structural	12/14/06
881	1197	Pinewood Street	Alderwood Avenue	Riverdale Avenue	AAC	E	2	270	32	8,640	3/28/24	75	73	27	0	Overlay - AC Structural	3/3/22
262	2533	Chestnut Avenue	Shaffer Street	Cambridge Street	AC	E	2	1,060	32	33,920	2/16/24	75	100	0	0	Surface Treatment - Slurry Seal	5/27/25
932	1994	Ridgeline Road	North End	Amapola Avenue	AC	E	2	2,285	22	53,270	10/25/23	75	100	0	0	Surface Treatment - Slurry Seal	1/1/97
1186	541	Walnut Avenue	Gravier Street	Seranado Street	AAC	E	2	1,045	36	37,620	1/2/24	75	66	8	26	Overlay - AC Structural	10/1/08
393	2181	Emerson Avenue	Glassell Street	East End	AAC	I	2	575	44	25,300	3/1/24	75	99	0	1	Overlay - AC Structural	9/1/09
609	1412	Justice Circle	North End	Liberty Way	AAC	E	2	250	32	10,500	2/20/24	75	66	0	34	2 in overlay	8/1/09
720	1037	Maplewood Street	Palm Avenue	Maple Avenue	AAC	E	2	610	34	20,740	2/21/24	75	12	57	31	Overlay - AC Structural	7/1/09
960	1310	Rose Avenue	Milford Street	Clinton Sreet	AC	E	2	255	31	7,905	2/13/24	75	100	0	0	Surface Treatment - Slurry Seal	1/1/98
1228	1591	Willow Springs Road	North End	White Oak Ridge	AC	E	2	495	32	17,638	10/19/23	75	32	67	1	Surface Treatment - Slurry Seal	1/1/18
1244	589	Woodridge Circle	Sheringham Avenue	South End	AC	E	2	235	32	9,020	3/12/24	75	100	0	0	Surface Treatment - Slurry Seal	1/1/04
816	780	Olive Street	Walnut Avenue	Sycamore Avenue	AC	E	2	620	36	21,808	3/14/24	75	55	27	18	Surface Treatment - Slurry Seal	1/1/03
1081	1644	Stearns Avenue	Heathertone Street	Esplanade Street	AAC	E	2	105	32	3,360	1/26/24	75	67	0	33	Overlay - AC Structural	1/31/16

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
551	1809	Hidden Canyon	West End	Canyon View Avenue	AC	E	2	420	32	14,940	10/26/23	75	96	0	4	Surface Treatment - Slurry Seal	1/1/04
621	1546	Kenyon Place	Noble Street	South End	AAC	E	2	170	32	6,940	11/27/23	75	100	0	0	Overlay - AC Structural	10/1/08
783	1752	Navarro Place	North End	Valencia Drive	AAC	E	2	180	32	7,260	11/16/23	75	100	0	0	Overlay - AC Structural	1/31/16
858	2309	Park Hyde Street	Park Balboa Avenue	El Rancho Avenue	AAC	E	2	851	32	27,982	3/7/24	75	49	22	29	Overlay - AC Structural	9/1/08
1331	8006	Sugarberry Street	Weeping Willow Avenue	Pebble Creek Lane	AC	E	2	467	36	16,812	4/15/24	75	100	0	0	New Construction - Initial	10/4/12
102	823	Avenida Palmar	Thora Street	Cannon Street	AAC	E	2	823	32	26,336	11/1/23	75	71	9	20	Overlay - AC Structural	1/1/99
187	13022	Burdie Lane	175' E Breezy Way	Yorba Street	AC	E	2	686	32	21,952	2/22/24	75	50	38	12	New Construction - Initial	1/1/80
227	2493	Carolet Lane	North End	Craig Drive	AAC	E	2	175	32	7,100	2/23/24	75	87	0	13	Overlay - AC Structural	10/1/07
416	2273	Fairmont Street	Palm Avenue	Sycamore Avene	AC	E	2	500	30	15,000	2/1/24	75	100	0	0	New Construction - Initial	1/1/80
669	1112	Lincoln Street	Madison Avenue	Walnut Avenue	AAC	E	2	270	31	8,370	2/2/24	75	37	63	0	Overlay - AC Structural	1/1/03
845	786	Palm Avenue	Main Street	Batavia Street	AC	E	2	1,370	39	53,430	2/1/24	75	100	0	0	Grind Overlay with Dig Outs	10/1/13
877	2363	Phillips Place	Hewes Street	Hill Street	AC	E	2	335	28	9,380	2/20/24	75	33	0	67	Surface Treatment - Slurry Seal	1/1/91
1335	8001	Weeping Willow Avenue	Shadyvale Street	Sugarberry Street	AC	E	2	696	32	22,272	4/15/24	75	98	0	2	New Construction - Initial	10/4/12
190	2517	Bush Street	Stewart Drive	Providence Avenue	AC	I	2	315	33	10,395	4/10/24	75	17	79	4	Surface Treatment - Slurry Seal	1/1/04
367	1702	Dunfield Street	Greenleaf Avenue	South End	AAC	E	2	110	32	3,520	3/11/24	75	90	10	0	Overlay - AC Structural	10/1/08
700	1307	Madison Avenue	Sacramento Street	East End	AC	E	2	200	31	7,250	2/13/24	75	65	0	35	Reconstruction	12/12/12
64	819	Almond Avenue	Main Street	Batavia Street	AC	E	2	1,615	38	61,370	3/13/24	75	61	22	17	Surface Treatment - Slurry Seal	1/1/04
743	2249	Meats Avenue	Pacific Street	Glassell Street	AC	I	2	1,230	44	54,120	3/1/24	75	7	13	80	Surface Treatment - Slurry Seal	1/1/94
232	2503	Casselle Avenue	Earlham Street	East End	AAC	E	2	235	32	9,020	2/20/24	76	88	0	12	Overlay - AC Structural	1/31/16
272	2222	Citrus Street	280' N Struck Avenue	Struck Avenue	AAC	E	2	280	32	8,960	3/28/24	76	27	0	73	Overlay - AC Structural	12/12/12
276	2440	Clark Street	North End	Maple Avenue	AC	E	2	460	36	18,060	3/18/24	76	100	0	0	New Construction - Initial	1/1/80
281	1504	Clinton Street	Locust Avenue	South End	AAC	E	2	445	31	13,795	2/8/24	76	71	17	12	2 in overlay	8/31/07
360	1477	Dorothy Drive	Wheeler Place	East End	AAC	E	2	395	32	14,140	2/23/24	76	98	0	2	Overlay - AC Structural	12/12/12
634	1643	La Mirada Street Pvt	Kirkwood Avenue	South End	AC	E	2	125	32	5,800	11/6/17	76	73	14	13	Surface Treatment - Slurry Seal	1/1/02
809	1255	Oceanview Street	San Alto Avenue	Santa Ana Canyon	AAC	E	2	765	32	24,480	1/4/24	76	10	0	90	Overlay - AC Structural	10/1/08
1035	1987	Shenadoah Avenue	Lassen Boulevard	Yellowstone Boulevard	AC	E	2	515	32	16,096	11/14/23	76	34	56	10	Surface Treatment - Slurry Seal	10/10/19
848	799	Palmyra Avenue	Batavia Street	Parker Street	AAC	E	2	655	38	24,890	3/5/24	76	24	76	0	Overlay - AC Structural	10/11/19
1081	1455	Stearns Avenue	Laurinda Lane	Exeter Place	AC	E	2	375	31	11,625	2/22/24	76	83	0	17	Surface Treatment - Slurry Seal	1/1/91
1127	577	Tiller Avenue	Spinnaker Street	Lewis Street	AC	E	2	680	33	22,242	3/7/24	76	76	24	0	Surface Treatment - Slurry Seal	1/1/03
845	1277	Palm Avenue	Tustin Street	Wayfield Circle	AC	E	2	695	37	25,715	3/4/24	76	96	0	4	Surface Treatment - Slurry Seal	5/27/25
878	2366	Philo Avenue	Marmon Avenue	Hewes Street	AAC	E	2	420	32	13,440	3/6/24	76	84	16	0	Overlay - AC Structural	1/1/04
1247	2153	Woodstock Avenue	Hartman Street	Cottonwood Street	AAC	E	2	800	32	25,600	3/1/24	76	51	48	1	Overlay - AC Structural	1/1/03
1034	2211	Shelly Court	Main Street	East End	AC	I	2	430	44	18,920	3/8/24	76	83	17	0	New Construction - Initial	1/1/80
541	1533	Hearthstone Drive	Charter Oak Drive	Del Valle Avenue	AAC	E	2	945	33	31,185	11/28/23	76	49	51	0	Surface Treatment - Slurry Seal	11/1/08
187	643	Burdie Lane	Breezy Way	175' E Breezy Way	AC	E	2	175	32	5,600	2/22/24	76	97	0	3	New Construction - Initial	1/1/80
428	1397	Fern Street	Collins Avenue	Mayfair Avenue	AC	E	2	930	32	29,760	2/13/24	76	98	0	2	New Construction - Initial	4/3/12
918	1998	Randall Street	Mustang Avenue	Kennymead Avenue	AC	E	1	334	16	5,844	10/25/23	76	65	0	35	Surface Treatment - Slurry Seal	1/1/97
969	2106	Rushmore Street	Waterton Avenue	Yosemite Avenue	AC	E	2	230	32	7,360	11/14/23	76	37	61	2	Surface Treatment - Slurry Seal	10/10/19
706	1273	Malena Drive	North End	Chapman Avenue	AC	E	2	1,090	31	35,290	3/4/24	76	100	0	0	Surface Treatment - Slurry Seal	8/30/22
715	1627	Maple Avenue	Prospect Street	Olympia Street	AAC	E	2	700	33	23,600	1/2/24	76	27	0	73	Overlay - AC Structural	10/10/19
862	961	Parker Street	Chapman Avenue	Almond Avenue	AC	E	2	620	36	22,320	3/5/24	76	89	11	0	Surface Treatment - Slurry Seal	1/1/02
1053	1595	Skylark Place	Willow Springs Road	Newport Boulevard	AC	E	2	130	34	3,468	4/15/24	76	34	11	55	Surface Treatment - Slurry Seal	1/1/18
285	1593	Cobblestone Drive	White Oak Ridge	Oak Tree Lane	AC	E	2	970	32	32,290	10/19/23	76	37	62	1	Surface Treatment - Slurry Seal	1/1/18
959	1438	Rosalind Drive	North End	Romelle Avenue	AC	E	2	415	32	13,280	2/22/24	76	80	0	20	New Construction - Initial	1/1/80
390	1333	Elmwood Street	Rose Avenue	Mayfair Avenue	AC	E	2	860	32	27,520	2/13/24	76	99	0	1	New Construction - Initial	4/3/12
492	714	Glenview Place	Almond Avenue	South End	AAC	E	2	510	32	17,370	3/12/24	76	49	42	9	Surface Treatment - Slurry Seal	1/1/04
945	1241	Riverview Avenue	Gayle Street	Santa Lucia Street	AC	E	2	1,070	32	34,240	2/29/24	76	84	0	16	Surface Treatment - Slurry Seal	11/1/08
1081	1449	Stearns Avenue	Ponderosa Street	East End	AC	E	2	705	32	23,660	2/21/24	76	87	0	13	New Construction - Initial	1/1/80
823	2204	Orangegrove Avenue	West End	Alpine Road	AAC	I	2	715	44	31,460	3/7/24	76	47	32	21	Overlay - AC Structural	1/1/02
188	2495	Burly Avenue	Norwood Street	East End	AC	E	2	225	31	9,475	3/6/24	76	100	0	0	Surface Treatment - Slurry Seal	1/1/02
528	2208	Hariton Street	Nicolas Avenue	South End	AC	E	2	875	44	38,500	3/18/24	76	29	56	15	Surface Treatment - Slurry Seal	1/1/95
935	1819	Ridgeway Road	Glen Canyon Road	East End	AC	E	2	640	32	22,275	12/6/23	76	86	14	0	Surface Treatment - Slurry Seal	1/1/02
131	600	Birchwood Road	Bond Avenue	Cherrywood Lane	AC	E	2	510	36	19,860	11/27/23	77	68	0	32	New Construction - Initial	1/1/80
736	1844	McCrory Street	North End	Taft Avenue	AAC	E	2	390	32	13,980	1/3/24	77	83	0	17	Overlay - AC Structural	1/1/99
1158	2359	Via Lardo Avenue	Hewes Street	East End	AC	E	2	515	32	16,224	3/6/24	77	71	28	1	Surface Treatment - Slurry Seal	1/1/92
720	1126	Maplewood Street	Everett Place	Rose Avenue	AC	E	2	290	32	9,280	2/2/24	77	100	0	0	Surface Treatment - Slurry Seal	1/1/03
958	1436	Romelle Avenue	Yorba Street	Loretta Drive	AC	E	2	535	32	17,120	2/22/24	77	64	18	18	Surface Treatment - Slurry Seal	1/1/03
102	821	Avenida Palmar	Renee Street	Thora Street	AAC	E	2	603	32	19,296	11/1/23	77	52	43	5	Overlay - AC Structural	1/1/99
307	2367	Court Street	West End	Earlham Street	AAC	E	2	225	32	7,200	3/6/24	77	34	66	0	Overlay - AC Structural	1/1/02

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
384	1797	Elderwood Avenue	West End	Mulberry Street	AC	E	2	515	32	18,278	10/19/23	77	32	68	0	Surface Treatment - Slurry Seal	1/1/18
797	2133	Northumberland Street	Amber Avenue	Glendora Avenue	AAC	E	2	505	32	16,160	2/16/24	77	52	48	0	Overlay - AC Structural	1/1/02
1029	1151	Shaffer Street	Collins Avenue	Everett Place	AAC	E	2	1,435	31	44,485	3/11/24	77	75	5	20	Overlay - AC Structural	1/1/99
281	1323	Clinton Street	North End	Madison Avenue	AC	E	2	310	31	10,660	2/13/24	77	73	0	27	New Construction - Initial	4/3/12
292	585	Compton Avenue	Lewis Street	Manchester Avenue	AC	E	2	1,320	33	43,164	3/7/24	77	98	1	1	Overlay	10/1/12
628	1648	Kirkwood Avenue	Earlham Street	Winthrope Street	AAC	E	2	540	32	17,780	2/20/24	77	65	0	35	Overlay - AC Structural	1/31/16
9	858	Alanda Avenue	Norwood Street	East End	AC	E	2	200	32	7,900	3/6/24	77	91	9	0	Surface Treatment - Slurry Seal	1/1/02
119	2448	Bedford Road	Culver Avenue	La Veta Avenue	AC	E	2	630	31	19,530	3/13/24	77	59	40	1	Surface Treatment - Slurry Seal	1/1/04
715	1026	Maple Avenue	California Street	Shattuck Place	AC	E	2	865	38	32,870	2/21/24	77	71	29	0	Surface Treatment - Slurry Seal	8/1/09
728	1318	Markwood Street	Oakmont Avenue	Carie Avenue	AC	E	2	615	32	19,680	2/14/24	77	82	7	11	Surface Treatment - Slurry Seal	12/12/12
888	702	Poinsettia Drive	Almond Avenue	Larkspur Drive	AC	E	2	385	32	12,320	3/7/24	77	51	33	16	Surface Treatment - Slurry Seal	1/1/04
1047	715	Silktree Circle	La Veta Avenue	South End	AC	E	2	240	32	7,680	3/5/24	77	64	29	7	New Construction - Initial	1/1/80
1083	742	Stevens Street	North End	Palm Avenue	AC	E	2	335	32	10,720	3/11/24	77	51	40	9	Surface Treatment - Slurry Seal	1/1/97
306	1692	Cottonwood Street	East End	Crystal View Avenue	AC	E	2	525	32	16,800	3/1/24	77	52	42	6	Surface Treatment - Slurry Seal	1/1/03
276	2443	Clark Street	Chapman Avenue	Almond Avenue	AC	E	2	620	36	22,320	3/12/24	77	75	0	25	New Construction - Initial	1/1/80
681	1158	Lomita Avenue	Grand Street	Shaffer Street	AC	E	2	625	32	20,000	3/11/24	77	33	0	67	Surface Treatment - Slurry Seal	1/1/02
823	1116	Orangegrove Avenue	Maplewood Street	California Street	AC	E	2	555	31	17,205	2/2/24	77	81	19	0	Surface Treatment - Slurry Seal	1/1/03
958	1669	Romelle Avenue	Prospect Street	East End	AC	E	2	255	33	9,515	2/23/24	77	83	0	17	Surface Treatment - Slurry Seal	1/1/91
352	3229	Diamond Street	Meats Avenue	Cloverdale	AC	E	2	534	33	18,372	12/13/23	77	50	36	14	Surface Treatment - Slurry Seal	1/1/94
859	1296	Park Lane	Orange Grove Avenue	Walnut Avenue	AC	E	2	450	32	14,400	2/27/24	77	29	34	37	New Construction - Initial	1/1/80
1176	2135	Vista Del Playa	Shaffer Street	Northumberland Street	AC	E	2	1,610	31	49,910	2/16/24	77	55	45	0	Surface Treatment - Slurry Seal	1/1/98
737	2165	McPherson Street	540' s/o Spring Street	Chapman Avenue	AC	E	2	755	36	27,180	2/20/24	77	32	0	68	New Construction - Initial	1/1/80
823	1308	Orangegrove Avenue	Sacramento Street	East End	AC	E	2	215	31	7,715	2/13/24	77	68	0	32	Reconstruction	12/12/12
935	1820	Ridgeway Road	Meadow Grove Road	Glen Canyon Road	AC	E	2	1,351	36	70,915	12/6/23	77	100	0	0	Surface Treatment - Slurry Seal	1/1/02
1208	1493	Wheeler Place	North End	Washington Avenue	AAC	E	2	175	32	7,100	2/14/24	77	98	0	2	2 in overlay	8/1/09
1248	2155	Woodvale Avenue	Glassell Street	Cottonwood Street	AAC	E	2	955	32	30,560	3/1/24	77	30	69	1	Overlay - AC Structural	1/1/03
555	3467	Highland Street	Mayfair Avenue	Rose Avenue	AC	E	2	595	31	18,445	2/27/24	78	58	25	17	New Construction - Initial	1/1/80
751	1379	Milford Street	North End	Chestnut Avenue	AC	E	2	135	32	5,420	3/1/24	78	51	40	9	Surface Treatment - Slurry Seal	1/1/98
247	2520	Chalynn Avenue	California Street	Greengrove Drive	AAC	E	2	350	32	11,200	2/20/24	78	96	0	4	Overlay - AC Structural	10/1/08
281	1312	Clinton Street	Oakmont Avenue	Rose Avenue	AC	E	2	820	31	25,420	2/13/24	78	99	0	1	New Construction - Initial	4/3/12
328	802	Culver Avenue	Lemon Street	Glassell Street	AC	E	2	620	30	18,600	3/15/24	78	100	0	0	New Construction - Initial	1/1/80
659	774	Lemon Street	Mayfair Avenue	Walnut Avenue	AAC	E	2	1,480	36	53,280	2/15/24	78	100	0	0	Overlay - AC Structural	1/1/99
751	1290	Milford Street	Walnut Avenue	Sycamore Avenue	AC	E	2	905	31	28,055	2/13/24	78	54	27	19	Surface Treatment - Slurry Seal	1/1/98
848	1460	Palmyra Avenue	Yorba Street	Craig Drive	AAC	E	2	1,425	32	45,600	1/26/24	78	52	31	17	Overlay - AC Structural	12/14/06
526	1331	Handy Street	Collins Avenue	Mayfair Avenue	AAC	E	2	965	30	28,950	3/20/24	78	100	0	0	2 in overlay	10/1/13
1029	2174	Shaffer Street	Katella Avenue	Hoover Avenue	AC	I	2	315	37	11,655	2/15/24	78	100	0	0	Surface Treatment - Slurry Seal	1/1/95
312	1483	Craig Drive	North End	Palmyra Avenue	AAC	E	2	1,040	32	34,780	2/14/24	78	70	4	26	Overlay - AC Structural	10/1/07
331	2190	Cypress Street	Almond Avenue	Palmyra Avenue	AAC	E	2	615	36	22,140	3/5/24	78	15	0	85	Overlay - AC Structural	1/1/02
823	1286	Orangegrove Avenue	Tustin Street	Wayfield Street	AC	E	2	475	32	15,200	2/27/24	78	58	32	10	Surface Treatment - Slurry Seal	1/1/04
798	1174	Norwood Street	Burly Avenue	Palmyra Avenue	AC	E	2	470	31	15,070	3/6/24	78	96	4	0	Surface Treatment - Slurry Seal	1/1/91
667	2259	Lime Street	North End	Grove Avenue	AAC	I	2	170	44	8,630	3/11/24	78	62	38	0	Overlay - AC Structural	12/12/12
120	631	Beechwood Street	Woodstock Avenue	Fletcher Avenue	AAC	E	2	395	32	12,640	3/1/24	78	47	51	2	Overlay - AC Structural	1/1/03
573	1195	Hoover Avenue	Lemon Street	Glassell Street	AC	E	2	610	41	25,010	2/15/24	78	72	28	0	Surface Reconstruction - AC	1/1/93
946	1481	Roberta Drive	Craig Drive	East End	AAC	E	2	430	32	15,260	2/23/24	78	89	11	0	Overlay - AC Structural	10/1/07
136	597	Blackberry Cove	Cobblestone Drive	Southwest End	AC	E	2	365	32	13,478	10/19/23	78	43	55	2	Surface Treatment - Slurry Seal	1/1/18
208	2020	Canal Street	300' N Glendora Avenue	Cumberland Avenue	AAC	E	2	1,600	38	60,800	3/11/24	78	71	8	21	Overlay - AC Structural	1/1/94
300	1837	Coral Avenue	West End	Highland Street	AAC	E	2	460	32	14,720	3/4/24	78	14	86	0	Overlay - AC Structural	1/1/02
775	1730	Muir Drive	Palo Loma Drive	North End	AAC	E	2	990	32	33,180	11/16/23	78	100	0	0	Overlay - AC Structural	1/31/16
1109	1137	Sycamore Avenue	Cambridge Street	Maplewood Street	AAC	E	2	660	41	27,060	3/11/24	78	100	0	0	Overlay - AC Structural	10/1/08
312	1482	Craig Drive	Palmyra Avenue	Prospect Street	AAC	E	2	1,600	32	51,200	2/14/24	78	81	0	19	Overlay - AC Structural	10/1/07
848	1459	Palmyra Avenue	Craig Drive	Prospect Street	AAC	E	2	1,135	32	36,320	1/26/24	78	63	36	1	Overlay - AC Structural	12/14/06
880	925	Pine Street	La Veta Avenue	End	AC	E	2	290	32	10,330	3/12/24	78	31	46	23	Surface Treatment - Slurry Seal	1/1/03
5	857	Adele Street	North End	120' s/o Mayfair Avenue	AC	E	2	1,240	32	39,680	3/20/24	78	86	13	1	Surface Treatment - Slurry Seal	1/1/02
647	1435	Larkstone Drive	Yorba Street	Laurinda Lane	AAC	E	2	1,400	31	42,966	2/22/24	78	57	37	6	2 in overlay	8/28/07
1035	1988	Shenadoah Avenue	West End	Lassen Boulevard	AC	E	2	285	32	10,620	10/31/23	78	54	46	0	Surface Treatment - Slurry Seal	10/10/19
1228	1604	Willow Springs Road	Wildflower Avenue	Skylark Place	AC	E	2	955	32	31,810	10/19/23	78	40	42	18	Surface Treatment - Slurry Seal	1/1/18
1232	2097	Windes Drive	Lewis Street	535' n/o Lewis Drive	AC	E	2	535	19	10,165	11/14/23	78	68	0	32	New Construction - Initial	1/1/80
411	1426	Exeter Place	North End	Larkstone Drive	AAC	E	2	235	31	8,785	2/22/24	79	98	0	2	Overlay - AC Structural	10/1/07
688	15605	Loretta Drive	158' s/o Delia Lane	686' n/o La Veta Avenue	AC	E	2	1,373	33	44,715	2/14/24	79	58	4	38	Surface Treatment - Slurry Seal	1/1/96

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
339	1465	Deborah Lane	Jennifer Lane	East End	AAC	E	2	835	36	32,610	2/14/24	79	100	0	0	Overlay - AC Structural	12/12/12
733	1818	Marywood Lane	Shadow Ridge Lane	Meats Avenue	AC	E	2	955	36	34,380	12/5/23	79	78	0	22	Surface Treatment - Slurry Seal	1/1/02
987	1248	San Alto Place	Santa Anita Street	East End	AAC	E	2	200	32	6,400	2/28/24	79	98	0	2	Overlay - AC Structural	10/1/08
355	1670	Dixon Avenue	Shasta Way	Dunas Street	AAC	E	2	190	32	6,580	2/23/24	79	100	0	0	Overlay - AC Structural	6/1/21
628	1663	Kirkwood Avenue	100' W Woodland Street	Woodland Street	AC	E	2	100	33	3,300	1/26/24	79	100	0	0	Surface Treatment - Slurry Seal	10/1/13
862	769	Parker Street	North End	Maple Avenue	AC	E	1	305	18	5,490	3/18/24	79	69	0	31	New Construction - Initial	1/1/80
1194	2058	Waterford Street	Courtland Street	New Gate Way	AC	E	2	285	30	8,550	12/6/23	79	86	9	5	Surface Treatment - Slurry Seal	8/1/17
681	1130	Lomita Avenue	Maplewood Street	California Street	AC	E	2	620	31	19,220	2/2/24	79	58	42	0	Surface Treatment - Slurry Seal	1/1/03
985	2467	San Alano Avenue	Oceanview Street	South End	AAC	E	2	290	36	10,440	2/28/24	79	95	0	5	Overlay - AC Structural	10/1/08
1120	1976	Teton Avenue	Lassen Boulevard	Yellowstone Boulevard	AC	E	2	525	32	16,416	11/14/23	79	51	37	12	Surface Treatment - Slurry Seal	10/10/19
67	851	Altura Avenue	West End	Santiago Boulevard	AC	E	2	820	32	28,040	12/12/23	79	45	55	0	Surface Treatment - Slurry Seal	1/1/04
110	638	Barkley Street	Main Street	Batavia Street	AAC	E	2	1,410	44	62,040	3/8/24	79	93	0	7	Overlay - AC Structural	12/12/12
509	2138B	Greengrove Street	Vista Del Playa (North)	Vista Del Playa (South)	AC	E	2	224	32	7,168	2/16/24	79	83	17	0	Surface Treatment - Slurry Seal	1/1/98
553	1966	Hidden Trail	North End	Bond Avenue	AC	E	2	512	32	17,884	11/27/23	79	42	58	0	New Construction - Initial	1/1/80
1191	1472	Washington Avenue	Wayfield Street	Park Lane	AAC	E	2	300	31	9,300	3/14/24	79	57	43	0	Overlay - AC Structural	2/1/10
442	2149	Flanders Street	Glendora Avenue	East End	AAC	E	2	365	33	12,045	2/28/24	79	57	35	8	Overlay - AC Structural	12/13/06
974	1520	Sacramento Street	Hoover Avenue	Monroe Avenue	AAC	E	2	1,290	31	39,990	2/8/24	79	44	56	0	2 in overlay	8/31/07
172	2607	Bridle Path	North End	Bond Avenue	AC	E	2	500	32	17,500	11/27/23	79	100	0	0	New Construction - Initial	1/1/80
390	1332	Elmwood Street	Collins Avenue	Mayfair Avenue	AC	E	2	930	32	29,760	2/13/24	79	82	0	18	New Construction - Initial	4/3/12
516	1850	Grove Avenue	Sacramento Street	Agate Street	AC	E	2	930	32	30,260	12/13/23	79	41	59	0	Surface Treatment - Slurry Seal	8/1/16
657	1606	Lemon Creek Circle	West End	Willow Springs Road	AC	E	2	230	32	8,860	10/19/23	79	41	59	0	Surface Treatment - Slurry Seal	1/1/18
848	1169	Palmyra Avenue	Prospect Street	James Street	AC	E	2	1,390	37	51,282	1/26/24	79	65	24	11	Surface Treatment - Slurry Seal	1/1/02
326	756	Crystal View Avenue	Pampas Street	Fernside Street	AAC	E	2	1,820	32	58,240	2/29/24	79	54	41	5	Overlay - AC Structural	1/1/03
328	974	Culver Avenue	Crest Road	Bedford Road	AC	E	2	290	32	9,280	4/10/24	79	44	56	0	Surface Treatment - Slurry Seal	1/1/04
408	1102	Everett Place	Lincoln Avenue	East End	AC	E	2	295	31	9,145	2/2/24	79	100	0	0	Surface Treatment - Slurry Seal	1/1/03
719	1030	Maplewood Place	Maplewood Street	East End	AC	E	2	210	31	7,510	2/21/24	79	35	65	0	Surface Treatment - Slurry Seal	8/1/09
937	1867	Riding Way	Villa Vista Way	Santiago Boulevard	AAC	E	2	1,085	32	34,720	12/13/23	79	100	0	0	Overlay - AC Structural	1/1/18
1002	1235	Santa Ana Canyon Road	Santa Anita Street	Santa Lucia Street	AAC	E	2	745	36	11,920	3/28/24	79	37	63	0	Overlay - AC Structural	10/1/08
1004	1246	Santa Barbara Place	North End	Baldwin Avenue	AC	E	2	95	32	3,040	2/29/24	79	98	0	2	Surface Treatment - Slurry Seal	11/1/08
242	2527	Center Street	530' N Walnut Avenue	Walnut Avenue	AC	E	2	530	20	10,600	2/9/24	79	37	63	0	New Construction - Initial	1/1/80
500	934	Grand Street	La Veta Avenue	River Avenue	AC	E	2	380	25	9,500	4/10/24	79	85	13	2	Surface Treatment - Slurry Seal	1/1/95
510	1703	Greenleaf Avenue	Orange-Olive Road	Dunfield Street	AAC	E	2	705	31	21,855	3/11/24	79	78	0	22	Overlay - AC Structural	10/1/08
521	1559	Hamlin Street	El Salvador Avenue	Orange Grove Avenue	AAC	E	2	600	32	19,950	11/27/23	79	100	0	0	Surface Treatment - Slurry Seal	11/1/08
580	1675	Ila Drive	Sunview Drive	East End	AAC	E	2	420	32	13,440	1/4/24	79	43	0	57	Overlay - AC Structural	1/1/19
243	2498	Century Avenue	Esplanade Street	East End	AC	E	2	170	26	4,420	3/6/24	79	100	0	0	New Construction - Initial	1/1/80
277	2907	Cleveland Street	Sycamore Avenue	Palm Avenue	AAC	E	2	615	32	19,680	2/9/24	79	100	0	0	Overlay - AC Structural	1/1/02
277	2462	Cleveland Street	Trenton Avenue	South End	AC	E	2	455	32	14,560	2/15/24	79	100	0	0	Surface Treatment - Slurry Seal	1/1/91
972	1405	Ruth Place	Earlham Street	Wrightwood Street	AAC	E	2	750	32	25,250	2/20/24	79	100	0	0	Overlay - AC Structural	1/31/16
1222	2090	Wilderness Avenue	Meads Avenue	Stallion Street	AAC	E	2	615	32	19,680	10/25/23	79	25	69	6	Overlay - AC Structural	1/1/04
64	847	Almond Avenue	Violet Lane	Prospect Street	AAC	E	2	515	32	16,980	1/26/24	80	81	0	19	Overlay - AC Structural	10/1/07
659	773B	Lemon Street	Sycamore Avenue	Palm Avenue	AC	E	2	652	36	23,472	3/11/24	80	46	52	2	New Construction - Initial	1/1/80
674	2262	Little Main Street	Main Street	Chapman Avenue	AC	E	2	450	32	14,400	4/10/24	80	80	12	8	Surface Treatment - Slurry Seal	1/1/95
948	717	Robin Road	West End	Feldner Road	AAC	E	2	500	32	17,050	3/7/24	80	91	0	9	Surface Treatment - Slurry Seal	1/1/04
305	2028	Cottage Hill Drive	White Spring Lane	South End	AC	E	2	575	36	22,200	12/5/23	80	45	29	26	Surface Treatment - Slurry Seal	1/1/02
706	1475	Malena Drive	Ruth Place	La Veta Avenue	AAC	E	2	450	32	14,400	2/14/24	80	99	0	1	Overlay - AC Structural	1/1/02
719	2139B	Maplewood Place	Vista Del Playa (North)	Vista Del Playa (South)	AAC	E	2	129	32	4,128	2/16/24	80	100	0	0	Overlay - AC Structural	1/1/02
859	2807	Park Lane	North End	Washington Avenue	AC	E	2	595	31	19,495	2/20/24	80	90	0	10	Surface Treatment - Slurry Seal	1/1/96
981	1700	Sail Avenue	Gaff Street	East End	AAC	E	2	300	31	9,300	2/28/24	80	30	0	70	Overlay - AC Structural	12/13/06
1037	588	Sheringham Avenue	Windgap Drive	Manchester Avenue	AC	E	2	680	32	21,364	3/7/24	80	98	0	2	Surface Treatment - Slurry Seal	1/1/04
1109	1138	Sycamore Avenue	Maplewood Street	California Street	AAC	E	2	815	31	25,265	2/23/24	80	100	0	0	Overlay - AC Structural	10/1/08
1176	2137	Vista Del Playa	Northumberland Street	Maplewood Place	AC	E	2	250	31	7,750	2/16/24	80	100	0	0	Surface Treatment - Slurry Seal	1/1/98
1230	1196	Wilson Avenue	Lemon Street	Glassell Street	AAC	E	2	595	31	18,445	2/15/24	80	79	21	0	Surface Reconstruction - AC	1/1/93
647	1661	Larkstone Drive	135' w/o Woodland Street	Woodland Street	AC	E	2	135	33	4,455	1/26/24	80	100	0	0	New Construction - Initial	1/1/80
649	1972	Lassen Boulevard	North End	Mabury Avenue	AC	E	2	1,320	42	56,940	11/14/23	80	53	47	0	Surface Treatment - Slurry Seal	10/10/19
697	1124	Lynn Drive	Collins Avenue	South End	AC	E	2	300	31	10,900	2/2/24	80	90	10	0	Surface Treatment - Slurry Seal	1/1/03
751	1505	Milford Street	Locust Avenue	Collins Avenue	AAC	E	2	490	31	15,190	2/8/24	80	51	49	0	2 in overlay	8/31/07
1017	1406	Schug Street	Wrightwood Street	Ruth Place	AAC	E	2	675	32	23,850	2/20/24	80	95	0	5	Overlay - AC Structural	1/31/16
164	2489	Brentford Avenue	Sacramento Street	Breckenridge Street	AC	E	2	370	31	12,220	12/13/23	80	51	49	0	New Construction - Initial	1/1/80
509	2138A	Greengrove Street	North End	Vista Del Playa (North)	AC	E	2	216	32	6,912	2/16/24	80	100	0	0	Surface Treatment - Slurry Seal	1/1/98

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
715	767	Maple Avenue	Lime Street	Batavia Street	AC	E	2	645	36	23,220	3/12/24	80	79	12	9	New Construction - Initial	1/1/80
1232	2094	Windes Drive	Highpoint Road	Santiago Canyon Road	AC	E	2	990	39	27,720	11/14/23	80	88	0	12	New Construction - Initial	1/1/80
601	1519	Jodi Street	North End	Hoover Avenue	AAC	E	2	250	32	8,000	2/8/24	80	100	0	0	2 in overlay	8/29/07
848	1461	Palmyra Avenue	Tracy Lane	Yorba Street	AAC	E	2	635	36	23,610	2/14/24	80	83	0	17	Overlay - AC Structural	12/12/12
992	1781	San Luis Drive	Santa Cruz Drive	End	AC	E	2	285	32	10,918	10/24/23	80	44	56	0	Surface Treatment - Slurry Seal	1/1/18
1176	2136	Vista Del Playa	Maplewood Street	Greengrove Street	AAC	E	2	585	32	18,720	2/16/24	80	100	0	0	Overlay - AC Structural	8/1/17
1217	2029	White Spring Lane	Shadow Ridge Lane	East End	AC	E	2	440	32	15,580	12/5/23	80	57	0	43	Surface Treatment - Slurry Seal	1/1/02
695	15674	Lowry Lane	North End	Delia Lane	AC	E	2	213	32	7,916	2/22/24	80	100	0	0	New Construction - Initial	1/1/80
803	1265	Oak Street	Palm Avenue	South End	AC	E	2	485	36	17,460	3/4/24	80	69	31	0	Surface Treatment - Slurry Seal	5/27/25
828	928	Orange Street	La Veta Avenue	River Avenue	AC	E	2	350	25	8,750	4/10/24	80	100	0	0	Surface Treatment - Slurry Seal	1/1/95
1109	2887	Sycamore Avenue	Wayfield Street	Highland Street	AC	E	2	560	35	19,600	2/27/24	80	77	12	11	Surface Treatment - Slurry Seal	5/27/25
467	1011	Gardner Street	Tularosa Avenue	Rosewood Avenue	AAC	E	2	285	32	9,120	2/20/24	80	99	0	1	Overlay - AC Structural	1/1/02
664	1742	Lexington Avenue	Cannon Street	Williamsburg Street	AAC	E	2	185	32	5,920	11/21/23	80	100	0	0	Overlay - AC Structural	1/1/02
845	787	Palm Avenue	Batavia Street	Cypress St	AC	E	2	1,310	37	49,210	3/5/24	80	71	25	4	New Construction - Initial	1/1/80
786	1650	Newhaven Drive	Kirkwood Avenue	Fairhaven Avenue	AAC	E	2	495	32	15,456	2/20/24	80	69	0	31	Overlay - AC Structural	1/31/16
1019	1448	Seba Avenue	Tustin Street	Ponderosa Street	AC	E	2	425	23	9,775	2/21/24	80	79	19	2	New Construction - Initial	1/1/80
65	2203	Alpine Road	Orangegrove Avenue	Orangewood Avenue	AAC	I	2	375	44	16,500	3/7/24	80	39	59	2	Overlay - AC Structural	1/1/02
147	187	Bond Avenue	120' W Swan Street	Rancho Santiago Road	AAC	E	4	700	56	39,200	11/27/23	80	83	0	17	Overlay - AC Structural	10/1/08
358	751	Donneybrooke Street	Palm Avenue	South End	AC	E	2	1,055	32	34,810	3/12/24	80	33	46	21	Surface Treatment - Slurry Seal	1/1/97
595	1464	Jennifer Lane	Palmyra Avenue	Deborah Lane	AAC	E	2	825	36	31,200	2/14/24	80	99	0	1	Overlay - AC Structural	12/12/12
733	1946	Marywood Lane	West End	Villa Real Drive	AAC	E	2	935	26	25,810	12/5/23	80	70	30	0	Surface Treatment - Slurry Seal	11/1/08
760	3241	Monaco	Alexandria St	West End	AC	E	2	329	32	12,326	8/28/24	80	63	37	0	New Construction - Initial	1/1/80
894	1714	Portsmouth Circle	Valley Forge Drive	South End	AAC	E	2	280	32	11,508	11/16/23	80	100	0	0	Overlay - AC Structural	1/31/16
1002	1930	Santa Ana Canyon Road	Santa Lucia Street	475' e/o Tustin Street	AAC	E	2	1,245	20	12,360	3/28/24	80	54	46	0	Overlay - AC Structural	10/1/08
647	1442	Larkstone Drive	Breezy Way	East End	AC	E	2	125	32	5,500	2/22/24	81	97	0	3	Surface Treatment - Slurry Seal	1/1/02
125	824	Berkeley Street	City Limit	South End	AC	E	2	470	36	16,920	2/29/24	81	71	0	29	Surface Treatment - Slurry Seal	1/1/95
232	2500	Casselle Avenue	Prospect Street	340' E Prospect Street	AC	E	2	340	33	11,220	2/22/24	81	77	23	0	Surface Treatment - Slurry Seal	10/1/13
382	1560	El Salvador Avenue	Hamlin Street	Noble Street	AAC	E	2	195	32	7,740	11/27/23	81	100	0	0	Overlay - AC Structural	10/1/08
417	1443	Fairmont Way	North End	Romelle Avenue	AC	E	2	450	32	15,900	2/22/24	81	98	0	2	Surface Treatment - Chip Seal	1/1/95
428	1298	Fern Street	Walnut Avenue	Handy Street	AC	E	2	1,180	31	36,580	2/14/24	81	98	0	2	Surface Treatment - Slurry Seal	1/1/98
604	2109	Joshua Tree Avenue	Orange Park Boulevard	East End	AC	E	2	400	32	14,300	10/31/23	81	45	53	2	Surface Treatment - Slurry Seal	10/10/19
733	1947	Marywood Lane	Villa Real Drive	Meadow Grove Road	AAC	E	2	815	36	28,828	12/5/23	81	54	2	44	Overlay - AC Structural	10/1/08
770	1380	Morningside Street	North End	Chestnut Avenue	AC	E	2	130	32	5,260	1/3/24	81	56	29	15	Surface Treatment - Slurry Seal	1/1/98
860	1186	Park Street	Washington Avenue	Philo Avenue	AAC	E	2	635	32	20,320	3/6/24	81	97	1	2	Overlay - AC Structural	1/1/04
917	1993	Ranchwood Trail	Amapola Avenue	South End	AC	E	2	1,775	32	58,598	10/26/23	81	31	60	9	Surface Treatment - Slurry Seal	1/1/02
1147	1723	Valencia Drive	West End	Jamestown Way	AAC	E	2	365	32	13,478	11/16/23	81	57	0	43	Overlay - AC Structural	1/31/16
1208	1476	Wheeler Place	Ruth Place	La Veta Avenue	AC	E	2	455	32	14,368	2/14/24	81	98	0	2	Surface Treatment - Slurry Seal	1/1/92
64	845	Almond Avenue	Olympia Way	Swidler Place	AAC	E	2	395	32	14,140	1/26/24	81	87	13	0	Overlay - AC Structural	12/12/12
214	2227	Canyon Park Circle	North End	Bryce Avenue	AC	E	2	250	32	9,500	11/14/23	81	100	0	0	Surface Treatment - Slurry Seal	1/1/03
352	1830	Diamond Street	Grove Avenue	Sacramento Street	AC	E	2	1,350	31	41,602	12/13/23	81	55	45	0	Surface Treatment - Slurry Seal	8/1/16
502	1168	Grant Place	North End	Chapman Avenue	AAC	E	2	480	29	15,420	8/28/24	81	53	19	28	Overlay - AC Structural	1/1/02
828	927	Orange Street	Culver Avenue	La Veta Avenue	AC	E	2	625	36	22,500	2/26/24	81	98	0	2	Surface Treatment - Slurry Seal	1/1/03
127	628	Beverly Drive	Main Street	Crescent Drive	AC	E	2	550	32	17,600	3/8/24	81	23	0	77	Surface Reconstruction - AC	7/24/07
215	1982	Canyon Ridge	Terrace Ridge	East End	AC	E	2	465	32	18,178	10/26/23	81	89	11	0	Surface Treatment - Slurry Seal	1/1/04
370	1552	Earlham Street	Euclid Avenue	Spring Street	AAC	E	2	990	32	32,180	11/27/23	81	97	0	3	Overlay - AC Structural	10/1/08
426	792	Feldner Road	Almond Avenue	Palmyra Avenue	AAC	E	2	700	32	22,400	3/5/24	81	84	13	3	Overlay - AC Structural	1/13/16
437	1907	Fireside Street	North End	Hillside Avenue	AAC	E	2	230	31	8,630	1/3/24	81	59	0	41	Overlay - AC Structural	1/31/16
469	1423	Garnet Lane	Laurinda Lane	East End	AAC	E	2	960	31	29,760	2/22/24	81	52	0	48	Overlay - AC Structural	1/1/02
607	1515	Juniper Avenue	Morgan Street	Mallard Street	AAC	E	2	395	32	12,640	3/6/24	81	100	0	0	Overlay - AC Structural	8/1/17
667	798	Lime Street	North End	Palmyra Avenue	AC	E	2	325	32	10,400	3/29/24	81	41	45	14	Surface Treatment - Slurry Seal	1/1/04
959	1492	Rosalind Drive	North End	Washington Avenue	AAC	E	2	155	32	7,210	2/14/24	81	97	0	3	2 in overlay	8/1/09
1016	3323	Scarborough	Avalon Avenue	North End	AC	E	2	242	32	9,244	11/20/23	81	100	0	0	Surface Treatment - Slurry Seal	6/1/20
297	1370	Coolidge Avenue	Sacramento Street	Handy Street	AAC	E	2	925	31	28,675	2/8/24	81	44	56	0	2 in overlay	8/29/07
328	972	Culver Avenue	Alpine Street	Main Street	AC	E	2	420	40	16,800	4/10/24	81	61	37	2	Surface Treatment - Slurry Seal	1/1/04
428	1362	Fern Street	North End	Athens Avenue	AAC	E	2	190	32	6,080	3/4/24	81	38	55	7	Overlay - AC Structural	12/14/06
468	1369	Garfield Avenue	Sacramento Street	Handy Street	AAC	E	2	875	33	28,875	2/8/24	81	100	0	0	2 in overlay	8/29/07
945	1205	Riverview Avenue	Hearthside Street	Ashwood Street	AAC	E	2	1,525	32	48,800	2/29/24	81	82	18	0	Surface Treatment - Slurry Seal	3/21/22
272	2439	Citrus Street	Maple Avenue	Chapman Avenue	AAC	E	2	600	32	19,200	3/11/24	81	62	0	38	Overlay - AC Structural	1/1/97
308	2060	Courtland Street	Waterford Street	South End	AC	E	2	995	28	29,360	4/15/24	81	67	31	2	Surface Treatment - Slurry Seal	8/1/17

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
360	1181	Dorothy Drive	James Street	East End	AAC	E	2	460	31	15,860	1/26/24	81	100	0	0	2 in overlay	11/1/11
529	1525	Hart Street	Monroe Avenue	Collins Avenue	AAC	E	2	740	32	23,680	2/8/24	81	100	0	0	2 in overlay	10/1/13
748	2061	Meridian Street	Waterford Street	Oakhurst Avenue	AC	E	2	995	32	33,340	12/6/23	81	84	7	9	Surface Treatment - Slurry Seal	8/1/17
1117	1466	Teri Lane	Palmyra Avenue	Deborah Lane	AAC	E	2	1,070	36	38,008	2/14/24	81	98	0	2	Overlay - AC Structural	12/12/12
1186	542	Walnut Avenue	Seranado Street	Earlham Street	AAC	E	2	930	36	33,480	1/2/24	81	100	0	0	Overlay - AC Structural	10/1/08
170	562	Briardale Avenue	Woodside Street	Cambridge Street	AAC	E	2	855	32	27,360	2/27/24	81	21	65	14	Overlay - AC Structural	1/1/04
183	567	Buckeyewood Avenue	Shaffer Street	Cambridge Street	AAC	E	2	1,380	32	44,160	2/27/24	81	15	85	0	Overlay - AC Structural	1/1/03
283	2000	Clydesdale Avenue	Stallion Street	Mustang Avenue	AAC	E	2	505	32	17,660	10/25/23	81	25	0	75	Overlay - AC Structural	1/1/04
677	1512	Locust Avenue	Morgan Street	105 e/o Mallard Street	AAC	E	2	105	32	3,360	3/6/24	81	100	0	0	Overlay - AC Structural	8/1/17
936	2123	Ridgewood Street	Glendale Avenue	Briardale Avenue	AAC	E	2	540	32	17,280	2/27/24	81	19	26	55	Overlay - AC Structural	1/1/04
960	1117	Rose Avenue	Cambridge Street	California Street	AAC	E	2	1,280	32	40,960	2/2/24	81	96	0	4	Overlay - AC Structural	1/1/03
1029	945	Shaffer Street	Taft Avenue	Chestnut Avenue	AC	E	2	710	32	22,720	2/16/24	81	87	0	13	Surface Reconstruction - AC	5/1/09
1048	1961	Silver Leaf Avenue	Rancho Santiago Boulevard	Richard Street	AAC	E	2	480	32	15,860	11/27/23	81	96	0	4	Overlay - AC Structural	10/1/08
1081	1667	Stearns Avenue	Prospect Street	East End	AC	E	2	260	33	9,680	2/23/24	81	94	0	6	Surface Treatment - Slurry Seal	1/1/91
117	595	Bear Tree Lane	Fox Run Lane	Deerfield Lane	AC	E	2	390	32	12,980	10/19/23	81	46	52	2	Surface Treatment - Slurry Seal	1/1/18
198	2509	California Street	Palmyra Avenue	Chalynn Street	AAC	E	2	1,125	32	36,000	2/21/24	81	91	0	9	Overlay - AC Structural	10/1/08
286	1564	Colby Street	North End	Orange Grove Avenue	AAC	E	2	140	32	5,980	11/27/23	81	98	0	2	Overlay - AC Structural	10/1/08
818	1672	Olympia Way	La Veta Avenue	Dixon Avenue	AC	E	2	640	32	20,480	2/20/24	81	100	0	0	Surface Treatment - Slurry Seal	1/1/91
1109	1300	Sycamore Avenue	Milford Street	Clinton Street	AC	E	2	300	31	9,300	2/13/24	81	98	0	2	Surface Treatment - Slurry Seal	1/1/02
1234	1810	Windy Pointe	West End	Canyon View Avenue	AC	E	2	445	32	15,740	10/26/23	81	100	0	0	Surface Treatment - Slurry Seal	1/1/04
188	2497	Burly Avenue	Olympia Street	East End	AAC	E	2	410	32	14,620	1/26/24	81	100	0	0	Overlay - AC Structural	12/12/12
232	2502	Casselle Avenue	Woodland Street	East End	AAC	E	2	510	31	16,910	1/26/24	81	73	0	27	Overlay - AC Structural	12/14/06
377	1222	Edgewater Street	Paddle Wheel Circle	Richland Street	AAC	E	2	620	32	19,840	2/29/24	81	98	0	2	Surface Treatment - Slurry Seal	3/21/22
407	1319	Everett Avenue	Markwood Street	East End	AAC	E	2	85	40	3,400	2/14/24	81	98	0	2	Overlay - AC Structural	12/12/12
472	1251	Gayle Street	Riverview Avenue	South End	AAC	E	2	1,300	32	41,600	2/29/24	81	58	20	22	Overlay - AC Structural	10/1/08
508	1016	Greengrove Drive	Culver Avenue	Chalynn Street	AAC	E	2	525	32	16,800	2/20/24	81	99	0	1	Overlay - AC Structural	10/1/08
724	805	Marietta Place	West End	Cypress Street	AC	E	2	145	23	3,335	4/10/24	81	100	0	0	New Construction - Initial	1/1/80
789	1561	Noble Street	El Salvador Avenue	Hamlin Street	AAC	E	2	840	32	27,380	11/27/23	81	80	0	20	Overlay - AC Structural	10/1/08
1326	8008	Pebble Creek Lane	Shadyvale Street	36 ft E/O Sugarberry Street	AC	E	2	826	36	29,736	2/29/24	81	94	0	6	New Construction - Initial	10/4/12
1329	8002	Shadyvale Street	Weeping Willow Avenue	Pebble Creek Lane	AC	E	2	454	36	16,344	2/29/24	81	95	0	5	New Construction - Initial	10/4/12
812	3456	Old Camp Road	North End	Canyon View Avenue	AC	E	2	470	36	18,420	10/17/23	81	100	0	0	Surface Treatment - Slurry Seal	1/1/18
1191	975	Washington Avenue	Orange Street	Center Street	AC	E	2	645	34	21,930	2/26/24	81	37	59	4	Surface Treatment - Slurry Seal	8/1/17
1201	1642	Wesley Street Pvt	Kirkwood Avenue	South End	AC	E	2	150	32	7,300	11/6/17	81	88	0	12	Surface Treatment - Slurry Seal	1/1/02
1215	1588	White Oak Ridge	Willow Springs Road	Newport Boulevard	AC	E	2	165	34	4,658	10/19/23	81	25	75	0	Surface Treatment - Slurry Seal	1/1/18
1252	1408	Wrightwood Street	North End	Schug Street	AAC	E	2	955	32	33,110	2/20/24	81	97	0	3	Overlay - AC Structural	1/31/16
92586	100500	Cabrillo Street	Santiago Canyon Road	Valencia Drive	AAC	E	2	325	32	10,400	8/28/24	82	79	21	0	Overlay - AC Structural	1/31/16
370	1414	Earlham Street	Marmon Avenue	South End	AAC	E	2	1,625	32	55,300	2/20/24	82	100	0	0	Overlay - AC Structural	1/31/16
696	1446	Lowry Street	110' w/o Lowry Street	Fairhaven Avenue	AC	E	2	235	32	7,264	2/22/24	82	79	0	21	New Construction - Initial	1/1/80
734	1400	Mayfair Avenue	Elmwood Street	Hart Street	AC	E	2	230	32	7,360	2/13/24	82	100	0	0	New Construction - Initial	4/3/12
753	1859	Milbank Drive	Meadow Grove Road	South End	AAC	E	2	780	28	23,340	4/15/24	82	37	0	63	2 in overlay	8/1/09
789	1549	Noble Street	Walnut Avenue	South End	AAC	E	2	215	32	8,678	11/27/23	82	57	0	43	Overlay - AC Structural	10/1/08
960	1334	Rose Avenue	Handy Street	Elmwood Street	AC	E	2	475	31	14,725	2/13/24	82	98	0	2	New Construction - Initial	4/3/12
977	1570	Saddlehorn Way	North End	Chandler Ranch	AC	E	2	920	32	31,238	10/24/23	82	67	0	33	Surface Treatment - Slurry Seal	10/10/19
1027	1855	Shady Forest Lane	North End	Feather Hill Lane	AAC	E	2	360	32	12,770	12/5/23	82	84	0	16	Overlay - AC Structural	10/1/08
370	1646	Earlham Street	North End	Fairhaven Avenue	AAC	E	2	1,205	32	38,368	2/20/24	82	82	0	18	Overlay - AC Structural	1/31/16
493	1557	Golden Eagle Avenue	Snow Goose Street	East End	AC	E	2	505	32	17,660	11/28/23	82	60	40	0	Surface Treatment - Slurry Seal	6/1/20
647	1638	Larkstone Drive	Earlham Street	East End	AC	E	2	135	32	5,820	2/20/24	82	72	0	28	Reconstruct with AC	1/31/16
938	1224	Rippling Creek Drive	Edgewater Street	Sand Pebble Way	AAC	E	2	630	36	22,680	2/29/24	82	100	0	0	Surface Treatment - Slurry Seal	3/21/22
573	2221	Hoover Avenue	West End	Batavia Street	AAC	I	2	510	31	15,810	3/8/24	82	100	0	0	Overlay - AC Structural	12/12/12
108	613	Baldwin Avenue	Santa Anita Street	Santa Lucia Street	AC	E	2	705	32	22,560	2/28/24	82	100	0	0	Surface Treatment - Slurry Seal	11/1/08
229	2490	Carrie Avenue	Sacramento Street	Markwood Street	AC	E	2	310	32	9,920	2/13/24	82	96	0	4	Surface Treatment - Slurry Seal	12/12/12
860	1187	Park Street	Chapman Avenue	Washington Avenue	AAC	E	2	435	32	13,536	3/6/24	82	99	0	1	Overlay - AC Structural	1/1/04
997	1225	Sand Pebble Way	White Shores Drive	Rippling Creek Drive	AAC	E	2	190	36	6,840	2/29/24	82	61	0	39	Surface Treatment - Slurry Seal	3/21/22
1153	1381	Van Owen Avenue	Harding Street	East End	AAC	E	2	340	32	10,880	3/4/24	82	100	0	0	Overlay - AC Structural	11/13/06
486	2142	Glendora Avenue	Bellbrook Street	Canal Street	AAC	E	2	1,335	32	42,720	2/16/24	82	77	12	11	Overlay - AC Structural	1/1/02
946	1499	Roberta Drive	West End	Loretta Drive	AC	E	2	405	32	14,460	2/14/24	82	99	0	1	Surface Treatment - Slurry Seal	1/1/92
282	1827	Cloverdale Avenue	Sacramento Street	Meats Avenue	AC	E	2	710	31	22,760	12/13/23	82	59	31	10	Surface Treatment - Slurry Seal	8/1/16
306	2466	Cottonwood Street	Brookshire Avenue	Woodstock Avenue	AAC	E	2	840	32	26,880	3/1/24	82	32	44	24	Overlay - AC Structural	1/1/03
328	973	Culver Avenue	Bedford Road	Alpine Street	AC	E	2	240	40	9,600	4/10/24	82	55	39	6	Surface Treatment - Slurry Seal	1/1/04

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
370	1185	Earlham Street	Washington Avenue	Marmon Avenue	AAC	E	2	565	32	18,080	2/20/24	82	54	0	46	Overlay - AC Structural	1/1/02
677	1513	Locust Avenue	Morgan Street	Mallard Street	AAC	E	2	395	32	12,640	3/6/24	82	100	0	0	Overlay - AC Structural	8/1/17
761	1511	Monroe Avenue	Morgan Street	Mallard Street	AAC	E	2	395	32	12,640	3/6/24	82	85	0	15	Overlay - AC Structural	8/1/17
1197	1033	Waverly Street	Sycamore Avenue	Palm Avenue	AAC	E	2	615	32	19,680	2/23/24	82	57	41	2	Overlay - AC Structural	1/1/02
1203	1192	West Way Avenue	Glassel	Crestwood	AAC	E	2	703	32	22,496	2/29/24	82	27	34	39	Cold Milling	12/14/06
1203	1192	West Way Avenue	Glassel	Crestwood	AAC	E	2	703	32	22,496	2/29/24	82	27	34	39	Overlay - AC Structural	12/14/06
451	1763	Fort Road	White Oak Ridge	Jamboree Road	AC	E	2	515	48	24,720	4/15/24	82	69	0	31	Surface Treatment - Slurry Seal	1/31/16
544	257	Heim Avenue	Canal Street	Tustin Street	AAC	E	2	1,050	36	37,800	3/14/24	82	56	44	0	Overlay - AC Structural	8/1/16
589	1523	Jackson Avenue	Sacramento Street	Handy Street	AAC	E	2	1,140	31	35,340	2/8/24	82	100	0	0	2 in overlay	8/29/07
659	2216	Lemon Street	Hoover Avenue	Collins Avenue	AAC	I	2	1,860	36	66,960	2/15/24	82	43	33	24	Overlay - AC Structural	9/1/09
146	618	Bolingridge Drive	Northwest End	Hillview Drive	AC	E	2	1,000	32	32,000	8/27/24	82	80	20	0	New Construction - Initial	1/1/80
181	866	Bryce Avenue	Yellowstone Boulevard	East End	AAC	E	2	820	32	27,740	11/14/23	82	100	0	0	Overlay - AC Structural	8/1/17
208	2021	Canal Street	300' N Glendora Avenue	Heim Avenue	AAC	E	2	450	34	15,300	3/11/24	82	100	0	0	Overlay - AC Structural	1/1/94
1329	8009	Shadyvale Street	Pebble Creek Lane	Riverbend Parkway	AC	E	2	196	36	7,056	4/15/24	82	74	26	0	New Construction - Initial	10/4/12
1035	1986	Shenadoah Avenue	Yellowstone Boulevard	Forest Street	AC	E	2	530	32	16,768	11/14/23	82	39	61	0	Surface Treatment - Slurry Seal	10/10/19
1246	2121	Woodside Street	Glendale Avenue	Palmdale Avenue	AAC	E	2	860	32	27,520	2/27/24	82	35	36	29	Overlay - AC Structural	1/1/04
328	1004	Culver Avenue	Greengrove Drive	East End	AAC	E	2	335	31	11,435	2/21/24	82	55	0	45	Overlay - AC Structural	10/1/08
560	2364	Hill Street	Montgomery Place	Phillips Place	AC	E	2	780	28	21,840	2/20/24	82	33	0	67	Surface Treatment - Slurry Seal	1/1/91
848	797	Palmyra Avenue	Lime Street	Batavia Street	AC	E	2	710	32	22,720	3/12/24	82	83	0	17	Surface Treatment - Slurry Seal	1/1/04
880	1133	Pine Street	North End	Walnut Avenue	AC	E	2	620	34	22,130	2/9/24	82	100	0	0	Surface Treatment - Slurry Seal	11/1/08
986	1247	San Alano Place	Santa Anita Street	East End	AAC	E	2	210	32	6,720	2/28/24	82	87	0	13	Overlay - AC Structural	10/1/08
1029	1091	Shaffer Street	Hoover Avenue	Quincy Avenue	AAC	E	2	750	37	27,750	2/15/24	82	100	0	0	Overlay - AC Structural	1/1/99
688	1437	Loretta Drive	North End	Romelle Avenue	AC	E	2	400	32	12,800	2/22/24	82	73	0	27	New Construction - Initial	1/1/80
891	737	Poplar Street	North End	Maple Avenue	AC	E	2	230	32	7,360	3/12/24	82	66	10	24	Surface Treatment - Slurry Seal	1/1/04
939	940	River Avenue	Glassell Street	East End	AC	E	2	1,090	32	34,880	4/10/24	82	100	0	0	Surface Treatment - Slurry Seal	1/1/94
960	1311	Rose Avenue	Clinton Street	Handy Street	AAC	E	2	230	31	7,130	2/13/24	82	100	0	0	Overlay - AC Structural	12/12/12
974	1324	Sacramento Street	Carrie Avenue	Walnut Avenue	AAC	E	2	1,195	31	37,045	2/13/24	82	100	0	0	Overlay - AC Structural	12/12/12
1332	8003	Tulip Tree Avenue	Spicewood Street	Shadyvale Street	AC	E	2	647	36	23,292	4/15/24	82	100	0	0	New Construction - Initial	10/4/12
12	827	Alderly Lane	Ridgeway Road	Glen Canyon Road	AC	E	2	810	36	28,585	12/6/23	82	96	0	4	Surface Treatment - Slurry Seal	1/1/02
144	573	Blueridge Avenue	Orange-Olive Road	East End	AAC	E	2	635	36	22,860	2/16/24	82	96	0	4	Overlay - AC Structural	1/1/04
181	865	Bryce Avenue	Lassen Boulevard	Yellowstone Boulevard	AAC	E	2	495	32	15,456	11/14/23	82	100	0	0	Overlay - AC Structural	8/1/17
236	2546	Catalina Street	San Juan Drive	South End	AAC	E	2	610	32	21,020	11/16/23	82	98	0	2	Overlay - AC Structural	1/31/16
281	1378	Clinton Street	North End	Chestnut Avenue	AC	E	2	145	32	5,740	3/1/24	82	65	0	35	Surface Treatment - Slurry Seal	1/1/98
345	1615B	Del Valle Avenue	Esplanade St	Wrightwood Street	AAC	E	2	401	32	12,832	11/29/17	82	100	0	0	2 in overlay	10/1/08
550	1139	Hickory Lane	California Street	East End	AC	E	2	300	31	10,350	2/23/24	82	55	0	45	Surface Treatment - Slurry Seal	1/1/02
665	1413	Liberty Way	North End	Justice Circle	AAC	E	2	580	32	21,060	2/20/24	82	43	0	57	2 in overlay	8/1/09
747	1480	Merelet Lane	Craig Drive	North End	AAC	E	2	440	32	15,717	2/14/24	82	86	0	14	Overlay - AC Structural	10/1/07
806	2062	Oakhurst Avenue	Meridian Street	Crossgate Street	AC	E	2	225	32	8,700	12/4/23	82	100	0	0	Surface Treatment - Slurry Seal	8/1/17
946	1458	Roberta Drive	Wheeler Place	East End	AAC	E	2	440	32	15,580	2/23/24	82	97	0	3	Overlay - AC Structural	12/12/12
1029	1090	Shaffer Street	Quincy Avenue	Collins Avenue	AAC	E	2	1,300	37	48,100	2/15/24	82	100	0	0	Overlay - AC Structural	1/1/99
1168	1478	Violet Lane	Almond Avenue	Palmyra Avenue	AAC	E	2	845	32	27,790	1/26/24	82	77	0	23	Overlay - AC Structural	10/1/07
300	1832	Coral Avenue	Sacramento Street	East End	AC	E	2	300	31	10,800	1/3/24	83	62	35	3	Surface Treatment - Slurry Seal	8/1/16
486	2143	Glendora Avenue	Orange-Olive Road	Bellbrook Street	AAC	E	2	1,370	32	43,840	2/16/24	83	76	24	0	Overlay - AC Structural	12/13/06
628	1668	Kirkwood Avenue	Prospect Street	East End	AC	E	2	260	33	9,680	2/23/24	83	82	0	18	Surface Treatment - Slurry Seal	1/1/91
677	1055	Locust Avenue	Glassell Street	Grand Street	AAC	E	2	615	31	19,065	3/5/24	83	25	0	75	Overlay - AC Structural	1/1/04
958	1439	Romelle Avenue	Lowry Lane	Yorba Street	AC	E	2	475	32	14,816	2/22/24	83	95	0	5	Surface Treatment - Slurry Seal	1/1/03
1148	1713	Valley Forge Drive	Jamestown Way	Portsmouth Circle	AAC	E	2	340	32	11,380	11/16/23	83	100	0	0	Overlay - AC Structural	1/31/16
1195	2105	Waterton Avenue	Orange Park Boulevard	East End	AC	E	2	1,090	32	35,030	11/14/23	83	64	36	0	Surface Treatment - Slurry Seal	10/10/19
239	2513	Cedar Street	Willow Avenue	South End	AC	E	2	175	31	5,425	3/12/24	83	69	16	15	Surface Treatment - Slurry Seal	1/1/04
370	1637	Earlham Street	Jordan Avenue	South End	AAC	E	2	665	32	21,280	2/20/24	83	90	0	10	Overlay - AC Structural	1/31/16
531	1206	Hartman Street	Riverdale Avenue	Rainer Avenue	AAC	E	2	785	32	25,120	2/29/24	83	57	13	30	Surface Treatment - Slurry Seal	3/21/22
661	788	Lester Drive	Maple Avenue	Chapman Avenue	AC	E	2	605	34	20,570	3/4/24	83	84	16	0	New Construction - Initial	1/1/80
667	2271	Lime Street	Palm Avenue	Sycamore Avenue	AC	E	2	500	32	16,000	2/1/24	83	100	0	0	New Construction - Initial	1/1/80
719	2139A	Maplewood Place	North End	Vista Del Playa (North)	AAC	E	2	306	32	9,792	2/16/24	83	100	0	0	Overlay - AC Structural	1/1/02
739	1211	Meadowbrook Avenue	Hearthside Street	Ashwood Street	AAC	E	2	1,250	32	40,000	2/29/24	83	84	16	0	Surface Treatment - Slurry Seal	3/21/22
851	1718	Palo Loma Place	Elsinore Avenue	South End	AAC	E	2	945	32	32,788	11/16/23	83	100	0	0	Overlay - AC Structural	4/13/15
946	1182	Roberta Drive	James Street	East End	AC	E	2	545	31	18,495	1/26/24	83	100	0	0	New Construction - Initial	4/3/12
1115	1808	Teal Lane	West End	Fawnwood Lane	AC	E	2	440	32	16,875	10/17/23	83	62	38	0	Surface Treatment - Slurry Seal	1/1/18
1175	2144	Vista Del Gaviota	Orange-Olive Road	Northumberland Street	AC	E	2	1,700	32	54,400	2/16/24	83	93	0	7	Surface Treatment - Slurry Seal	1/1/98

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
127	627	Beverly Drive	Sycamore Avenue	East End	AAC	E	2	1,265	36	45,540	3/6/24	83	48	0	52	Overlay - AC Structural	1/1/02
612	1500	Kathleen Street	Chapman Avenue	Palmyra Avenue	AAC	E	2	1,275	32	40,800	1/26/24	83	70	12	18	Overlay - AC Structural	12/14/06
641	1948	Lake Hill Drive	West End	Villa Real Drive	AAC	E	2	640	32	21,980	12/5/23	83	33	51	16	Overlay - AC Structural	1/1/04
673	1613	Little Lane	Bond Avenue	Charter Oak Drive	AAC	E	2	125	33	3,927	11/28/23	83	100	0	0	2 in overlay	8/31/07
765	2189	Montgomery Street	Culver Avenue	La Veta Avenue	AAC	E	1	615	16	9,840	8/28/24	83	100	0	0	2 in overlay	10/1/13
928	1216	Richland Avenue	Glassell Street	Rainier Avenue	AC	E	2	840	36	30,240	2/29/24	83	20	80	0	Surface Treatment - Slurry Seal	3/21/22
1009	1242	Santa Lucia Street	Riverview Avenue	Santa Ana Canyon	AC	E	2	1,390	32	44,480	2/28/24	83	100	0	0	Surface Treatment - Slurry Seal	11/1/08
1131	936	Toluca Avenue	Grand Street	East End	AC	E	2	290	25	7,250	2/26/24	83	98	0	2	Surface Treatment - Slurry Seal	1/1/95
1219	2050	Whitehall Avenue	Cornwall Avenue	Hillsborough Avenue	AC	E	2	550	32	18,100	12/4/23	83	58	42	0	Surface Treatment - Slurry Seal	8/1/17
198	2505	California Street	Mayfair Avenue	Walnut Avenue	AC	E	2	1,250	32	40,000	2/2/24	83	49	33	18	Surface Treatment - Slurry Seal	1/1/03
417	14394	Fairmont Way	La Veta Avenue	Burdie Lane	AC	E	2	783	32	24,792	2/22/24	83	96	0	4	New Construction - Initial	1/1/80
520	1335	Hamilton Avenue	Handy Street	East End	AC	E	2	500	31	16,500	2/13/24	83	43	0	57	New Construction - Initial	4/3/12
820	1829	Opal Avenue	Agate Street	Mori Lane	AC	E	2	295	31	8,984	12/13/23	83	53	47	0	Surface Treatment - Slurry Seal	8/1/16
967	2036	Roxbury Street	North End	Regency Avenue	AC	E	2	520	32	18,140	12/4/23	83	42	58	0	Surface Treatment - Slurry Seal	8/1/17
972	1180	Ruth Place	James Street	East End	AC	E	2	185	31	7,335	1/26/24	83	100	0	0	New Construction - Initial	4/3/12
989	1249	San Carlos Place	Santa Anita Street	East End	AAC	E	2	200	32	6,400	2/28/24	83	56	0	44	Overlay - AC Structural	10/1/08
1107	1179	Swidler Place	Chapman Avenue	Almond Avenue	AAC	E	2	405	32	13,710	1/26/24	83	65	35	0	Overlay - AC Structural	12/12/12
346	14093	Delia Lane	West End	Fairmont Way	AC	E	2	689	32	23,148	2/22/24	83	54	21	25	New Construction - Initial	1/1/80
432	1647	Fernwood Avenue	Earlham Street	East End	AAC	E	2	375	32	13,500	2/20/24	83	96	0	4	Overlay - AC Structural	1/31/16
589	1528	Jackson Avenue	Morgan Street	Mallard Street	AC	E	2	410	32	13,120	3/6/24	83	100	0	0	Surface Treatment - Slurry Seal	1/1/02
311	1997	Coyote Lane	Kennymead Avenue	South End	AC	E	2	895	18	17,610	10/25/23	83	100	0	0	Surface Treatment - Slurry Seal	1/1/02
435	736	Fir Street	Maple Avenue	South End	AAC	E	2	360	32	11,520	3/12/24	83	95	0	5	Overlay - AC Structural	5/1/09
628	1664	Kirkwood Avenue	Woodland Street	East End	AAC	E	2	440	31	14,740	1/26/24	83	77	0	23	Overlay - AC Structural	12/14/06
709	1530	Mallard Street	Monroe Avenue	Collins Avenue	AAC	E	2	860	32	27,520	3/6/24	83	85	15	0	Overlay - AC Structural	8/1/17
974	1521	Sacramento Street	Monroe Avenue	Jacaranda Avenue	AAC	E	2	525	31	16,275	2/8/24	83	71	29	0	2 in overlay	8/31/07
1186	1610	Walnut Avenue	Prospect Street	Swidler Place	AC	E	2	950	36	34,200	1/2/24	83	62	16	22	New Construction - Initial	1/1/80
1237	1649	Winthrope Street	Kirkwood Avenue	Fairhaven Avenue	AAC	E	2	480	32	15,860	2/20/24	83	84	0	16	Overlay - AC Structural	1/31/16
4	835	Adams Avenue	Shaffer Street	Cambridge Street	AAC	E	2	1,275	32	40,800	2/9/24	83	96	0	4	Surface Reconstruction - AC	1/1/94
220	3455	Carleton Avenue	Cambridge Street	East End	AAC	E	2	1,320	32	43,390	2/15/24	83	100	0	0	Surface Treatment - Slurry Seal	5/27/25
259	2431	Cherry Drive	Main Street	North Emerald Drive	AC	E	2	750	31	23,250	2/1/24	83	91	0	9	Surface Treatment - Slurry Seal	1/1/91
593	1722	Jamestown Way	Valley Forge Drive	Santiago Canyon Road	AAC	E	2	115	26	2,790	11/29/23	83	48	52	0	Overlay - AC Structural	1/31/16
688	1496	Loretta Drive	505' n/o Larkstone Drive	Larkstone Drive	AC	E	2	505	31	15,469	2/22/24	83	53	0	47	New Construction - Initial	1/1/80
771	2085	Mount McKinley Boulevard	Serrano Avenue	Crater Lake Avenue	AAC	E	2	525	30	17,750	11/16/23	83	41	59	0	Overlay - AC Structural	1/1/03
797	2134	Northumberland Street	Glendora Avenue	Vista Del Playa	AC	E	2	710	32	22,720	2/16/24	83	100	0	0	Surface Treatment - Slurry Seal	1/1/98
797	3261	Northumberland Street	South End	Vista del Playa (S)	AC	E	2	487	33	16,071	2/16/24	83	100	0	0	Surface Treatment - Slurry Seal	1/1/98
816	776	Olive Street	Collins Avenue	Alley Mayfair Avenue	AAC	E	2	605	37	22,385	2/15/24	83	100	0	0	Overlay - AC Structural	1/1/94
1124	1625	Thomas Street	Silver Leaf Avenue	Sycamore Avenue	AAC	E	2	200	32	6,400	3/6/24	83	49	44	7	Overlay - AC Structural	1/1/02
1151	921	Van Bibber Avenue	Shaffer Street	Harwood Street	AC	E	2	625	30	18,750	2/26/24	83	66	0	34	Surface Treatment - Slurry Seal	1/1/03
331	2198	Cypress Street	Sycamore Avenue	Palm Avenue	AC	I	2	630	36	22,680	3/14/24	83	100	0	0	New Construction - Initial	1/1/80
91	580	Ashwood Street	Brookshire Avenue	Redwood Avenue	AAC	E	2	1,120	32	35,840	3/1/24	83	78	12	10	Overlay - AC Structural	1/1/03
260	2475	Cherrywood Lane	Ranchroad Drive	Birchwood Road	AC	E	2	245	36	10,320	11/27/23	83	86	0	14	New Construction - Initial	1/1/80
284	1433	Coate Road	La Veta Avenue	Hartford Road	AC	E	2	130	31	4,030	2/22/24	83	49	0	51	Surface Treatment - Slurry Seal	1/1/91
738	1858	Meadow Grove Road	Marywood Lane	Feather Hill Drive	AAC	E	2	1,235	36	44,110	12/5/23	83	49	0	51	Overlay - AC Structural	1/1/02
856	2290	Park Central Avenue	Park Vine Street	195' w/o The City Drive	AAC	E	2	1,110	32	36,270	3/7/24	83	74	26	0	Surface Reconstruction - AC	9/1/08
974	1835	Sacramento Street	Cloverdale Avenue	Taft Avenue	AC	E	2	1,480	31	45,880	1/3/24	83	67	33	0	Surface Treatment - Slurry Seal	8/1/16
1109	1963	Sycamore Avenue	Rancho Santiago Boulevard	Richard Street	AAC	E	2	475	32	15,700	11/27/23	83	52	12	36	Overlay - AC Structural	10/1/08
1208	1484	Wheeler Place	Palmyra Avenue	Ruth Place	AAC	E	2	870	32	27,840	2/14/24	83	100	0	0	Overlay - AC Structural	12/12/12
160	2488	Breckenridge Street	Meats Avenue	Cloverdale Avenue	AC	E	2	475	31	14,450	12/13/23	83	100	0	0	Surface Treatment - Slurry Seal	8/1/16
432	1665	Fernwood Avenue	Woodland Street	Oakwood Street	AAC	E	2	595	31	18,445	1/26/24	83	61	0	39	Overlay - AC Structural	12/14/06
588	1514	Jacaranda Avenue	Morgan Street	Mallard Street	AAC	E	2	395	32	12,640	3/6/24	83	100	0	0	Overlay - AC Structural	8/1/17
619	2483	Kent Street	Ashford Avenue	East End	AC	E	2	235	33	8,755	8/28/24	83	78	22	0	New Construction - Initial	1/1/80
688	1495	Loretta Drive	Palmyra Avenue	Dorothy Drive	AAC	E	2	640	32	20,480	2/14/24	83	99	0	1	2 in overlay	8/1/09
709	1529	Mallard Street	Jackson Avenue	Monroe Avenue	AAC	E	2	250	32	8,000	3/6/24	83	95	0	5	Overlay - AC Structural	8/1/17
80	3149	Antonio Circle	Stetson Lane	North End	AC	E	2	662	32	22,684	11/28/23	83	74	0	26	New Construction - Initial	1/1/80
226	2494	Carole Lane	North End	Karan Lane	AAC	E	2	640	32	21,980	2/14/24	83	100	0	0	Overlay - AC Structural	12/12/12
513	1633	Greenwood Avenue	Chipwood Street	Esplanade Street	AAC	E	2	500	31	15,500	1/26/24	83	64	0	36	Overlay - AC Structural	12/14/06
735	812	McCoy Road	Almond Avenue	South End	AC	E	2	465	32	14,880	3/7/24	83	86	14	0	Surface Treatment - Slurry Seal	1/1/04
883	1569	Pinto Way	Chandler Ranch	Saddlehorn Way	AC	E	2	645	32	21,890	10/24/23	83	100	0	0	Surface Treatment - Slurry Seal	10/10/19
1262	2107	Yosemite Avenue	Orange Park Boulevard	Rushmore Street	AC	E	2	455	32	14,368	11/14/23	83	76	24	0	Surface Treatment - Slurry Seal	10/10/19

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
912	2245	Rampart Street	Chapman Avenue	2100' n/o Chapman Avenue	AAC	I	2	2,100	44	92,400	3/7/24	83	69	11	20	Overlay - AC Structural	12/14/06
349	1860	Denise Avenue	West End	Santiago Boulevard	AC	E	2	725	30	23,550	12/12/23	84	100	0	0	Surface Treatment - Slurry Seal	1/1/04
500	930	Grand Street	Almond Avenue	Washington Avenue	AC	E	2	290	36	10,440	2/26/24	84	38	11	51	Surface Treatment - Slurry Seal	1/1/03
1169	1631	Virage Street	Walnut Avenue	Spring Street	AAC	E	2	1,290	36	46,184	1/2/24	84	86	0	14	Overlay - AC Structural	10/1/08
385	1421	Elgin Drive	West End	Arlington Road	AAC	E	2	240	31	8,940	2/22/24	84	80	0	20	Overlay - AC Structural	1/1/02
417	1444	Fairmont Way	Romelle Avenue	South End	AC	E	2	595	32	20,840	2/22/24	84	60	0	40	Surface Treatment - Slurry Seal	1/1/95
540	2151	Hearthside Street	Woodstock Avenue	Fletcher Street	AAC	E	2	365	32	11,680	3/1/24	84	39	56	5	Overlay - AC Structural	1/1/03
647	1662	Larkstone Drive	Woodland Street	East End	AAC	E	2	135	33	5,555	1/26/24	84	100	0	0	Overlay - AC Structural	12/14/06
677	1501	Locust Avenue	Sacramento Street	Handy Street	AAC	E	2	1,150	31	35,650	2/8/24	84	85	15	0	2 in overlay	8/29/07
1062	1895	Solana Drive	Chapman Avenue	South End	AAC	E	2	625	36	22,500	3/6/24	84	10	0	90	Overlay - AC Structural	1/1/04
1252	1404	Wrightwood Street	North End (near Ruth Place)	South End	AAC	E	2	920	32	32,740	2/20/24	84	41	0	59	Overlay - AC Structural	1/31/16
119	2185	Bedford Road	La Veta Avenue	Bronson Avenue	AAC	I	2	630	45	28,350	3/27/24	84	27	50	23	Overlay - AC Structural	1/1/04
154	614	Bouy Avenue	Anchor Street	East End	AAC	E	2	805	32	25,760	2/28/24	84	62	0	38	Overlay - AC Structural	12/13/06
617	1995	Kennymead Avenue	Randall Street	Ridgeline Road	AC	E	2	1,535	22	33,770	10/25/23	84	74	26	0	Surface Treatment - Slurry Seal	1/1/02
636	1407	La Veta Avenue	Esplanade Street	Wrightwood Street	AAC	E	2	135	36	4,860	3/15/24	84	100	0	0	Overlay - AC Structural	1/31/16
783	1731	Navarro Place	Elsinore Avenue	Muir Place	AAC	E	2	720	32	22,608	11/16/23	84	83	17	0	Overlay - AC Structural	1/31/16
817	1178	Olympia Street	Almond Avenue	Palmyra Avenue	AAC	E	2	855	32	27,860	1/26/24	84	100	0	0	Overlay - AC Structural	12/12/12
1151	924	Van Bibber Avenue	Pine Street	Cambridge Street	AAC	E	2	335	32	10,720	2/23/24	84	61	12	27	Overlay - AC Structural	1/1/03
180	556	Brookside Avenue	Morningside Street	Fireside Street	AAC	E	2	730	32	23,168	1/3/24	84	69	31	0	Overlay - AC Structural	1/31/16
294	1077	Concord Avenue	Cambridge Street	Marquart Street	AAC	E	2	310	36	11,160	3/4/24	84	30	65	5	Surface Treatment - Slurry Seal	5/27/25
403	1543	Esplanade Street	Walnut Avenue	Spring Street	AAC	E	2	1,270	34	42,976	1/2/24	84	94	0	6	Surface Treatment - Slurry Seal	11/1/08
491	760	Glenside Street	Dunton Avenue	Crystal View Avenue	AAC	E	2	375	32	12,000	2/29/24	84	70	10	20	Overlay - AC Structural	1/1/03
610	1467	Karan Lane	Teri Lane	Yorba Street	AAC	E	2	365	36	12,628	2/14/24	84	98	0	2	Overlay - AC Structural	12/12/12
864	1386	Parkside Avenue	West End	East End	AAC	E	2	1,245	31	40,395	1/3/24	84	91	9	0	Overlay - AC Structural	1/31/16
885	955	Pixley Street	Chapman Avenue	Almond Avenue	AAC	E	2	615	36	22,140	3/5/24	84	57	13	30	Overlay - AC Structural	1/1/02
1026	2027	Shadow Ridge Place	Marywood Lane	South End	AAC	E	2	1,210	32	40,220	12/5/23	84	62	25	13	Overlay - AC Structural	10/1/08
1191	1183	Washington Avenue	Olympia Street	East End	AAC	E	2	410	32	14,620	1/26/24	84	100	0	0	Overlay - AC Structural	12/12/12
1187	1264	Wayfield Circle	Palm Avenue	South End	AC	E	2	110	32	3,520	3/4/24	84	100	0	0	Surface Treatment - Slurry Seal	5/27/25
1216	1226	White Shores Drive	Sand Pebble Way	Riverboat Way	AAC	E	2	235	36	8,460	2/29/24	84	73	0	27	Surface Treatment - Slurry Seal	3/21/22
108	612	Baldwin Avenue	Oceanview Street	East End	AAC	E	2	255	32	8,160	2/28/24	84	100	0	0	Overlay - AC Structural	10/1/08
540	1209	Hearthside Street	Rainier Avenue	Ashwood Street	AAC	E	2	760	32	24,320	2/29/24	84	96	0	4	Surface Treatment - Slurry Seal	3/21/22
949	1878	Robinhood Place	Santiago Boulevard (South Side)	North End	AC	E	2	1,280	31	44,180	12/12/23	84	100	0	0	Surface Treatment - Slurry Seal	1/1/02
1120	1977	Teton Avenue	West End	Lassen Boulevard	AC	E	2	335	32	12,220	10/31/23	84	55	45	0	Surface Treatment - Slurry Seal	10/10/19
1230	1064	Wilson Avenue	Cambridge Street	California Street	AAC	E	2	955	32	30,560	2/9/24	84	26	43	31	Overlay - AC Structural	1/1/04
340	1585	Deep Spring Road	Live Oak Drive	White Oak Ridge	AC	E	2	970	32	31,040	10/17/23	84	68	32	0	Surface Treatment - Slurry Seal	1/1/18
406	1551	Euclid Avenue	Earlham Street	Hewes Street	AAC	E	2	535	32	17,870	1/2/24	84	44	0	56	Overlay - AC Structural	10/1/08
542	1171	Heatherstone Street	Palmyra Avenue	South End	AC	E	2	500	32	15,808	2/23/24	84	57	0	43	New Construction - Initial	4/3/12
696	1445	Lowry Street	North End	Lowry Street	AC	E	2	1,120	32	37,640	2/22/24	84	96	0	4	Surface Treatment - Slurry Seal	1/1/95
700	1322	Madison Avenue	Milford Street	Clinton Street	AC	E	2	290	31	8,990	2/13/24	84	100	0	0	New Construction - Initial	4/3/12
734	2263	Mayfair Avenue	Lemon Street	Glassell Street	AC	E	2	620	31	19,220	2/15/24	84	65	35	0	Surface Treatment - Slurry Seal	1/1/03
761	1072	Monroe Avenue	West End	Grand Street	AAC	E	2	280	32	10,060	3/5/24	84	100	0	0	Overlay - AC Structural	12/13/06
761	1348	Monroe Avenue	Sacramento Street	Handy Street	AAC	E	2	1,135	31	35,185	2/8/24	84	79	15	6	2 in overlay	8/29/07
809	1677	Oceanview Street	Butterfield Road	Bixby Avenue	AC	E	2	635	32	20,320	1/4/24	84	53	47	0	Surface Treatment - Slurry Seal	10/10/19
98	602	Austin Avenue	West End	Dunas Street	AAC	E	2	140	32	5,980	2/20/24	84	92	0	8	Overlay - AC Structural	6/1/21
273	2666	City Blvd W	Manchester Avenue	The City Way @ The Block	AAC	E	2	970	51	22,310	3/27/24	84	83	11	6	Overlay - AC Structural	1/1/99
392	2268	Emerald Drive	Walnut Avenue	Cherry Drive	AC	E	2	440	30	13,200	2/1/24	84	83	0	17	Surface Treatment - Slurry Seal	1/1/91
411	1456	Exeter Place	North End	Stearns Avenue	AAC	E	2	225	31	8,075	2/22/24	84	100	0	0	2 in overlay	8/28/07
651	1457	Laurinda Lane	Stearns Avenue	Fairhaven Avenue	AC	E	2	295	31	9,145	2/22/24	84	36	0	64	Surface Treatment - Slurry Seal	1/1/91
1120	1975	Teton Avenue	Yellowstone Boulevard	East End	AC	E	2	470	32	16,540	11/14/23	84	72	28	0	Surface Treatment - Slurry Seal	10/10/19
1124	1536	Thomas Street	Del Valle Avenue	North End	AAC	E	2	365	32	13,180	11/28/23	84	100	0	0	Overlay - AC Structural	10/1/08
396	2223	Enterprise Street	North End	Collins Avenue	AAC	I	2	615	44	27,060	3/8/24	84	100	0	0	Overlay - AC Structural	7/1/08
119	2449	Bedford Road	Palmyra Avenue	Culver Avenue	AC	E	2	605	40	24,200	3/13/24	84	59	3	38	Surface Treatment - Slurry Seal	1/1/02
365	1177	Dunas Street	Almond Avenue	Palmyra Avenue	AC	E	2	840	31	26,540	1/26/24	84	100	0	0	New Construction - Initial	4/3/12
529	1360	Hart Street	Chestnut Avenue	Athens Avenue	AAC	E	2	420	32	13,440	3/1/24	84	67	0	33	Overlay - AC Structural	11/13/06
588	1531	Jacaranda Avenue	Sacramento Street	East End	AAC	E	2	400	31	12,400	2/8/24	84	100	0	0	2 in overlay	8/31/07
840	1223	Paddle Wheel Circle	Edgewater Street	East End	AAC	E	2	155	36	5,735	2/29/24	84	81	0	19	Surface Treatment - Slurry Seal	3/21/22
882	1599	Pinnacle Pointe	Hidden Canyon	East End	AC	E	2	480	32	17,158	10/26/23	84	100	0	0	Surface Treatment - Slurry Seal	1/1/04
913	2015	Rancho Santiago Blvd	Pearl Street	Chapman Avenue	AC	E	2	305	48	14,640	4/15/24	84	73	25	2	New Construction - Initial	1/1/80
324	2063	Crossgate Street	Townsend Avenue	Oakhurst Avenue	AC	E	2	425	36	16,800	12/4/23	84	73	0	27	Surface Treatment - Slurry Seal	8/1/17

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
373	1945	Echo Hill Way	West End	Villa Real Drive	AAC	E	2	835	32	28,220	12/5/23	84	66	15	19	Overlay - AC Structural	10/1/08
401	2360	Espanita Street	Via Lardo Avenue	Circulo Way	AC	E	2	355	32	13,160	3/6/24	84	98	0	2	Surface Treatment - Slurry Seal	1/1/92
635	1535	La Nae Street	North End	Del Valle Avenue	AAC	E	2	365	32	13,180	11/28/23	84	68	0	32	Overlay - AC Structural	10/1/08
699	2088	Mabury Avenue	Mountain Avenue	Yellowstone Boulevard	AAC	E	2	812	36	29,232	10/31/23	84	72	0	28	Overlay - AC Structural	8/1/16
908	1237	Rainier Avenue	Sunset Street	East End	AAC	E	2	130	32	4,160	2/29/24	84	100	0	0	Overlay - AC Structural	10/1/08
1005	1244	Santa Cecilia Street	Riverview Avenue	Baldwin Avenue	AC	E	2	1,185	32	37,920	2/28/24	84	77	0	23	Surface Treatment - Slurry Seal	1/1/98
1029	1152	Shaffer Street	Everett Place	Walnut Avenue	AAC	E	2	1,140	36	41,040	3/11/24	84	26	0	74	Overlay - AC Structural	1/1/99
1109	1620	Sycamore Avenue	Swidler Street	Seranado Street	AAC	E	2	1,180	32	37,568	1/2/24	84	72	0	28	Overlay - AC Structural	10/1/08
516	2253	Grove Avenue	Batavia Street	1710' E Batavia Street	AAC	I	2	1,710	44	75,240	3/1/24	84	44	36	20	Surface Reconstruction - AC	1/1/02
306	1228	Cottonwood Street	Riverboat Way	Woods Street	AC	E	2	770	36	27,720	2/29/24	84	4	94	2	Surface Treatment - Slurry Seal	3/21/22
341	1806	Deerfield Lane	Brook Glen Lane	Elk Glen Lane	AC	E	2	530	32	17,710	10/19/23	84	52	48	0	Surface Treatment - Slurry Seal	1/1/18
446	1761	Flowerwood Avenue	West End	Deerwood Street	AC	E	2	865	32	29,478	10/17/23	84	100	0	0	Surface Treatment - Slurry Seal	3/21/22
503	1608	Gravier Street	Bond Avenue	Walnut Avenue	AAC	E	2	1,275	36	45,900	11/28/23	84	75	0	25	Overlay - AC Structural	10/1/08
618	1431	Kensington Road	Hartford Road	Gainsborough Road	AAC	E	2	580	31	18,480	2/22/24	84	100	0	0	2 in overlay	8/28/07
761	1071	Monroe Avenue	Grand Street	East End	AAC	E	2	375	31	12,725	3/5/24	84	69	0	31	Overlay - AC Structural	1/1/02
803	1469	Oak Street	North End	Palmyra Avenue	AC	E	2	580	31	19,030	3/14/24	84	25	50	25	Complete Reconstruction - AC	10/1/06
807	1105	Oakmont Avenue	California Street	Lincoln Avenue	AAC	E	2	625	31	19,375	2/2/24	84	100	0	0	Overlay - AC Structural	10/1/08
848	989A	Palmyra Avenue	Shaffer Street	Grand Street	AAC	E	2	633	32	20,256	2/26/24	84	30	69	1	Overlay - AC Structural	10/11/19
998	1217	Sandbar Circle	North End	Rainier Avenue	AAC	E	2	225	32	7,200	2/29/24	84	48	52	0	Surface Treatment - Slurry Seal	3/21/22
1003	1243	Santa Anita Street	Riverview Avenue	Santa Ana Canyon	AAC	E	2	1,345	32	43,040	2/28/24	84	77	0	23	Overlay - AC Structural	10/1/08
1135	2064	Townsend Avenue	Crossgate Street	Rosemere Street	AC	E	2	860	36	32,460	12/4/23	84	65	35	0	Surface Treatment - Slurry Seal	8/1/17
272	2436	Citrus Street	Walnut Avenue	Sycamore Avenue	AC	E	2	740	31	22,940	2/1/24	85	44	56	0	Surface Treatment - Slurry Seal	5/27/23
681	1129	Lomita Avenue	California Street	Lincoln Street	AC	E	2	630	31	19,530	2/2/24	85	61	39	0	Surface Treatment - Slurry Seal	1/1/03
854	3262	Paragon	West End	Chelsey Court	AC	E	2	785	32	26,918	12/6/17	85	100	0	0	New Construction - Initial	1/1/80
1328	8013	Riverbend Parkway	Honey Tree Way	Lincoln Avenue	AC	E	2	1,354	40	54,160	2/29/24	85	96	0	4	New Construction - Initial	10/4/12
91	583	Ashwood Street	Riverview Avenue	Rainier Avenue	AAC	E	2	530	30	15,900	2/29/24	85	80	19	1	Surface Treatment - Slurry Seal	3/21/22
147	188	Bond Avenue	Rancho Santiago Boulevard	120' E Bridle Path	AC	E	2	640	46	29,440	11/27/23	85	100	0	0	Asphalt Rubber Hot Mix	7/1/13
1351	3500	City Blvd E	Metropolitan Dr	505' n/o Metropolitan Dr	AC	E	2	505	30	15,150	3/12/24	85	85	0	15	New Construction - Initial	10/30/12
467	1009	Gardner Street	Mardell Avenue	Chalynn Avenue	AAC	E	2	220	32	7,040	2/20/24	85	28	0	72	Overlay - AC Structural	10/1/08
536	2583	Havenwood Circle	North End	Fairhaven Avenue	AAC	E	2	140	21	4,440	8/28/24	85	73	27	0	Overlay - AC Structural	1/31/16
767	1527	Morgan Street	Jackson Avenue	Monroe Avenue	AAC	E	2	290	32	9,280	3/6/24	85	100	0	0	Overlay - AC Structural	8/1/17
909	1580	Raintree Road	Canyon View Avenue	Brairwood Road	AC	E	2	180	36	5,730	10/17/23	85	56	0	44	Surface Treatment - Slurry Seal	1/1/18
1090	1607	Strawberry Ridge	West End	Willow Springs Road	AC	E	2	300	32	11,100	10/19/23	85	85	15	0	Surface Treatment - Slurry Seal	1/1/18
64	846	Almond Avenue	Yorba Street	Malena Street	AAC	E	2	1,085	32	34,470	1/26/24	85	85	15	0	2 in overlay	8/1/09
500	933	Grand Street	Culver Avenue	La Veta Avenue	AC	E	2	615	36	22,140	2/26/24	85	100	0	0	Surface Treatment - Slurry Seal	1/1/03
923	2067	Regency Avenue	Meredith Street	Roxbury Street	AC	E	2	580	32	18,560	12/4/23	85	67	33	0	Surface Treatment - Slurry Seal	8/1/17
1098	586	Sunningdale Drive	Compton Avenue	South End	AC	E	2	270	32	10,140	3/12/24	85	100	0	0	Surface Treatment - Slurry Seal	1/1/04
91	582	Ashwood Street	Rainier Avenue	Woods Street	AAC	E	2	1,620	30	48,600	2/29/24	85	82	18	0	Surface Treatment - Slurry Seal	3/21/21
346	14094	Delia Lane	Yorba Street	Loretta Drive	AC	E	2	528	32	16,896	2/22/24	85	71	0	29	New Construction - Initial	1/1/80
406	1623	Euclid Avenue	James Street	Serandado Street	AAC	E	2	905	32	29,710	1/2/24	85	72	0	28	Overlay - AC Structural	10/1/08
437	1383	Fireside Street	Hillside Avenue	Parkside Avenue	AAC	E	2	745	31	22,903	1/3/24	85	67	31	2	Overlay - AC Structural	1/31/16
496	1573	Goldenspur Way	La Cumbre Drive	East End	AC	E	2	980	32	33,158	10/24/23	85	100	0	0	Surface Treatment - Slurry Seal	10/10/19
531	2154	Hartman Street	Woodstock Avenue	South End	AAC	E	2	235	32	7,520	3/1/24	85	100	0	0	Overlay - AC Structural	1/1/03
586	1973	Isle Royale Circle	North End	Teton Avenue	AC	E	2	240	32	9,180	10/31/23	85	100	0	0	Surface Treatment - Slurry Seal	10/10/19
1187	1470	Wayfield Circle	Palmyra Avenue	South End	AAC	E	2	270	31	9,370	3/14/24	85	100	0	0	Overlay - AC Structural	2/1/10
184	594	Buckskin Way	Roundup Way	La Cumbre Drive	AC	E	2	550	32	17,600	10/24/23	85	100	0	0	Surface Treatment - Slurry Seal	10/10/19
301	3465	Cornwall Avenue	Talbot Street	Whitehall Street	AC	E	2	580	32	20,060	12/4/23	85	100	0	0	Surface Treatment - Slurry Seal	8/1/17
401	1563	Espanita Street	North End	Orange Grove Avenue	AAC	E	2	145	32	6,140	11/27/23	85	100	0	0	Overlay - AC Structural	10/1/08
808	1666	Oakwood Street	Fernwood Avenue	Fairhaven Avenue	AAC	E	2	1,045	31	32,395	1/26/24	85	54	0	46	Surface Reconstruction - AC	1/1/02
972	1486	Ruth Place	Wheeler Place	Laurinda Lane	AAC	E	2	550	32	17,600	2/14/24	85	66	0	34	Overlay - AC Structural	1/1/02
1329	8012	Shadyvale Street	Riverbend Parkway	Juneberry Street	AC	E	2	522	36	18,792	2/29/24	85	67	0	33	New Construction - Initial	10/4/12
198	2504	California Street	Collins Avenue	Mayfair Avenue	AC	E	2	1,125	32	36,000	2/2/24	85	45	49	6	Surface Treatment - Slurry Seal	1/1/03
651	1454	Laurinda Lane	La Veta Avenue	Stearns Dr	AC	E	2	2,295	31	71,145	2/22/24	85	77	0	23	New Construction - Initial	1/1/80
700	1114	Madison Avenue	California Street	Lincoln Avenue	AC	E	2	610	31	18,910	2/2/24	85	100	0	0	Surface Treatment - Slurry Seal	1/1/03
721	1007	Mardell Avenue	Cambridge Street	Gardner Street	AAC	E	2	570	32	18,240	2/21/24	85	40	0	60	Overlay - AC Structural	10/1/08
973	1879	Ryals Lane	West End	Bobwhite Way	AAC	E	2	1,612	32	52,334	11/1/23	85	100	0	0	Overlay - AC Structural	8/1/16
983	1785	Salinas Court	Santa Maria Canyon	East End	AC	E	2	415	32	14,380	10/24/23	85	72	26	2	Surface Treatment - Slurry Seal	1/1/18
1032	2118	Shattuck Place	North End	Briardale Avenue	AAC	E	2	800	32	25,600	3/4/24	85	34	0	66	2 in overlay	8/1/09
69	830	Amapola Avenue	185' e/o Orange Park Blvd	Ranchwood Trail	AC	E	2	1,600	16	25,600	10/26/23	85	100	0	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
238	1582	Cedar Creek Way	West End	Deep Spring Road	AC	E	2	555	32	19,260	4/15/24	85	99	1	0	Surface Treatment - Slurry Seal	1/1/18
466	1001	Gardner Drive	Van Bibber Avenue	Culver Avenue	AAC	E	2	265	31	8,215	2/20/24	85	70	10	20	Overlay - AC Structural	10/1/08
675	1583	Live Oak Drive	West End	Deep Spring Road	AC	E	2	265	32	9,980	10/17/23	85	100	0	0	Surface Treatment - Slurry Seal	1/1/18
681	1269	Lomita Avenue	Tustin Street	Highland Street	AC	E	2	980	31	30,380	2/27/24	85	85	0	15	Surface Treatment - Slurry Seal	1/1/91
794	2117	Nordic Street	North End	Briardale Avenue	AAC	E	2	200	32	6,400	3/4/24	85	62	38	0	2 in overlay	8/1/09
848	800A	Palmyra Avenue	Parker Street	RR Crossing	AAC	E	2	644	38	24,472	3/5/24	85	48	45	7	Overlay - AC Structural	10/11/19
848	1463	Palmyra Avenue	Jennifer Lane	Tracy Lane	AAC	E	2	215	36	8,490	2/14/24	85	100	0	0	Overlay - AC Structural	12/12/12
1099	1239	Sunset Street	Baldwin Avenue	Riverview Avenue	AAC	E	2	1,240	32	39,680	2/28/24	85	65	35	0	Overlay - AC Structural	10/1/08
64	848	Almond Avenue	Shaffer Street	Cambridge Street	AAC	E	2	1,270	32	40,640	3/14/24	85	82	0	18	Surface Reconstruction - AC	1/1/03
81	2639	Apache Creek Road	Serrano Avenue	Villanueva Drive	AC	E	2	135	36	4,644	11/21/23	85	100	0	0	New Construction - Initial	1/1/80
276	2442	Clark Street	North End	Walnut Avenue	AC	E	2	310	33	10,230	3/14/24	85	100	0	0	Surface Treatment - Slurry Seal	1/1/04
322	1568	Criollo Circle	Chandler Ranch	East End	AC	E	2	235	32	9,020	10/24/23	85	84	16	0	Surface Treatment - Slurry Seal	10/10/19
388	1766	Elk Glen Lane	Fox Run Lane	Deerfield Lane	AC	E	2	280	32	8,960	10/19/23	85	88	0	12	Surface Treatment - Slurry Seal	1/1/18
773	1979	Mountain Avenue	Mt. McKinley Boulevard	South End	AC	E	2	764	32	25,948	10/31/23	85	63	37	0	Surface Treatment - Slurry Seal	10/10/19
923	2035	Regency Avenue	Meredith Street	Via Escola	AC	E	2	1,430	32	45,510	12/4/23	85	67	30	3	Surface Treatment - Slurry Seal	8/1/17
389	2205	Elm Street	Collins Avenue	South End	AAC	I	2	395	44	17,380	3/8/24	85	33	0	67	Overlay - AC Structural	7/1/08
484	2119	Glendale Avenue	Nordic Place	Shattuck Place	AAC	E	2	275	32	8,800	3/4/24	85	49	0	51	2 in overlay	8/1/09
526	1306	Handy Street	Walnut Avenue	Palm Avenue	AC	E	2	1,280	31	39,680	2/14/24	85	74	0	26	Surface Treatment - Slurry Seal	1/1/98
632	1571	La Cumbre Way	Calle Grande	Chandler Ranch	AAC	E	2	2,344	36	84,384	10/24/23	85	86	10	4	Overlay - AC Structural	1/1/18
915	1965	Ranchroad Drive	Bond Avenue	Cherrywood Lane	AC	E	2	475	32	15,700	11/27/23	85	100	0	0	New Construction - Initial	1/1/80
941	1220	River Mist Circle	North End	Riverview Avenue	AAC	E	2	205	32	6,560	2/29/24	85	80	16	4	Surface Treatment - Slurry Seal	3/21/22
959	22460	Rosalind Drive	North End	La Veta Avenue	AC	E	2	531	32	18,092	2/14/24	85	75	0	25	New Construction - Initial	1/1/80
1223	1603	Wildflower Avenue	West End	Willow Springs Road	AC	E	2	520	32	18,938	10/19/23	85	74	26	0	Surface Treatment - Slurry Seal	1/1/18
64	850	Almond Avenue	Jameson Street	Lincoln Street	AAC	E	2	770	36	27,720	2/20/24	85	83	17	0	Overlay - AC Structural	1/13/16
328	1003	Culver Avenue	California Street	Greengrove Drive	AAC	E	2	325	31	10,075	2/21/24	85	70	15	15	Overlay - AC Structural	10/1/08
472	1250	Gayle Street	Riverdale Avenue	Riverview Avenue	AAC	E	2	110	32	3,520	2/29/24	85	97	0	3	Overlay - AC Structural	10/1/08
533	2129	Harwood Street	North End	Meats Avenue Frontage Road	AAC	E	2	595	31	18,445	2/28/24	85	73	0	27	Overlay - AC Structural	1/1/04
761	1347	Monroe Avenue	Handy Street	Wanda Drive	AAC	E	2	1,475	31	45,725	2/8/24	85	84	16	0	Overlay - AC Structural	7/1/08
793	2120	Nordic Place	North End	Glendale Avenue	AAC	E	2	335	32	10,720	3/4/24	85	34	0	66	2 in overlay	8/1/09
964	1881	Roth Lane	North End	South End	AAC	E	2	540	32	16,256	11/1/23	85	83	17	0	Overlay - AC Structural	8/1/16
1191	1490	Washington Avenue	Loretta Drive	Malena Street	AC	E	2	535	32	17,620	2/14/24	85	67	0	33	Surface Treatment - Slurry Seal	1/1/02
242	2523	Center Street	Culver Avenue	Plamyra Avenue	AAC	E	2	660	36	23,616	2/26/24	86	66	0	34	Overlay - AC Structural	8/1/16
803	1266	Oak Street	Walnut Avenue	Palm Avenue	AC	E	2	1,260	31	39,060	2/27/24	86	93	0	7	Surface Treatment - Slurry Seal	5/27/25
828	929	Orange Street	River Avenue	South End	AC	E	2	300	25	7,500	2/26/24	86	95	0	5	Surface Treatment - Slurry Seal	1/1/94
1077	1999	Stallion Street	Clydesdale Avenue	Randall Street	AAC	E	2	1,200	33	40,100	10/25/23	86	47	0	53	Overlay - AC Structural	1/1/04
1197	980	Waverly Street	Chapman Avenue	Almond Avenue	AC	E	2	605	30	18,150	2/20/24	86	100	0	0	New Construction - Initial	1/1/80
396	2260	Enterprise Street	North End	Grove Avenue	AAC	I	2	330	44	15,670	3/11/24	86	99	0	1	Overlay - AC Structural	12/12/12
366	2157	Dunbar Street	North End	Heim Avenue	AAC	E	2	580	32	18,560	2/28/24	86	76	14	10	Overlay - AC Structural	1/1/04
573	1351	Hoover Avenue	Sacramento Street	Handy Street	AAC	E	2	1,135	30	34,050	2/8/24	86	64	36	0	2 in overlay	8/29/07
700	1285	Madison Avenue	West End	Wayfield Street	AC	E	2	450	32	14,400	2/26/24	86	26	0	74	Surface Reconstruction - AC	1/1/04
921	1556	Red Robin Street	Swallow Avenue	Blue Jay Avenue	AC	E	2	780	32	26,460	11/27/23	86	53	39	8	Surface Treatment - Slurry Seal	6/1/20
1055	3321	Skytop Ct	West End	Portico Rd	AC	E	2	667	32	22,844	11/21/23	86	97	0	3	Surface Treatment - Slurry Seal	6/1/20
1119	1798	Terrace Ridge	Pinnacle Pointe	Canyon Ridge	AC	E	2	205	33	6,765	10/26/23	86	56	44	0	Surface Treatment - Slurry Seal	1/1/04
1191	1491	Washington Avenue	Rosalind Drive	Loretta Drive	AAC	E	2	345	32	11,540	2/14/24	86	100	0	0	2 in overlay	8/1/09
329	3246	Cumberland Road	Shaffer Street	Canal St	AAC	E	2	2,614	33	86,262	2/16/24	86	100	0	0	Overlay - AC Structural	8/1/17
542	100400	Heatherstone Street	North End (Stearns Dr)	South End (Stearns Dr)	AAC	E	2	310	27	9,810	8/28/24	86	100	0	0	Overlay - AC Structural	1/31/16
734	1320	Mayfair Avenue	Markwood Street	East End	AAC	E	2	90	40	3,600	2/14/24	86	97	0	3	Overlay - AC Structural	12/12/12
751	1291	Milford Street	Sycarmore Avenue	Sacramento Street	AC	E	2	1,185	31	36,735	2/13/24	86	79	0	21	Surface Treatment - Slurry Seal	1/1/02
761	1047	Monroe Avenue	California Street	Lincoln Street	AAC	E	2	855	31	26,505	2/9/24	86	69	31	0	Overlay - AC Structural	12/14/06
1136	1462	Tracy Lane	Palmyra Avenue	Deborah Lane	AAC	E	2	1,005	36	36,930	2/14/24	86	93	0	7	Overlay - AC Structural	12/12/12
1193	2148	Waterberry Street	North End	Glendora Avenue	AAC	E	2	235	33	7,755	2/28/24	86	63	5	32	Overlay - AC Structural	12/13/06
181	864	Bryce Avenue	Zion Street	Lassen Boulevard	AAC	E	2	990	32	31,488	10/31/23	86	73	0	27	Overlay - AC Structural	8/1/17
358	750	Donneybrooke Street	Sycamore Avenue	Palm Avenue	AC	E	2	585	32	18,720	3/6/24	86	82	10	8	Surface Treatment - Slurry Seal	1/1/97
531	1207	Hartman Street	Riverdale Avenue	North End	AAC	E	2	260	32	8,320	3/19/24	86	98	0	2	Overlay - AC Structural	10/1/08
663	3443	Lewis Street	Windes Dr	East End	AC	E	2	779	25	15,170	11/14/23	86	79	0	21	New Construction - Initial	1/1/80
734	1107	Mayfair Avenue	California Street	Lincoln Avenue	AAC	E	2	625	31	19,375	2/2/24	86	67	0	33	Overlay - AC Structural	1/1/03
764	2362	Montgomery Place	Hewes Street	East End	AC	E	2	345	34	11,730	2/20/24	86	45	0	55	Surface Treatment - Slurry Seal	1/1/91
859	1283	Park Lane	Mount Vernon Avenue	Sycamore Avenue	AC	E	2	595	31	18,445	2/27/24	86	34	0	66	Surface Treatment - Slurry Seal	5/27/25
1059	1969	Smokey Avenue	West End	Glacier Street	AAC	E	2	365	32	13,728	11/20/23	86	100	0	0	Overlay - AC Structural	1/1/18

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
165	2484	Brentwood Avenue	West End	Cottonwood Street	AAC	E	2	200	32	6,400	3/1/24	86	100	0	0	Overlay - AC Structural	1/1/03
188	2802	Burly Avenue	Yorba Street	Malena Drive	AAC	E	2	1,130	32	36,660	2/14/24	86	100	0	0	2 in overlay	8/1/09
378	1545	El Carmen Avenue	Hamlin Street	142' w/o Hamlin Street	AC	E	2	142	31	4,402	11/27/23	86	100	0	0	New Construction - Initial	10/30/12
591	1622	James Street	Euclid Avenue	Sycamore Avenue	AAC	E	2	525	32	17,300	1/2/24	86	100	0	0	Overlay - AC Structural	10/1/08
636	510	La Veta Avenue	Cambridge Street	East End	AAC	E	2	475	25	12,625	2/21/24	86	47	0	53	Overlay - AC Structural	10/1/08
715	766	Maple Avenue	Main Street	Lime Street	AC	E	2	730	32	23,360	3/12/24	86	83	17	0	New Construction - Initial	1/1/80
807	1402	Oakmont Avenue	Morgan Street	Mallard Street	AC	E	2	215	32	6,880	3/15/24	86	100	0	0	Surface Treatment - Slurry Seal	1/1/02
210	2535	Candlewood Avenue	Nordic Drive	East End	AAC	E	2	355	32	11,360	2/27/24	86	88	0	12	Surface Treatment - Slurry Seal	5/27/25
500	1148	Grand Street	Rose Avenue	Walnut Avenue	AAC	E	2	595	37	22,015	3/14/24	86	60	0	40	Overlay - AC Structural	1/1/04
823	1547	Orangegrove Avenue	Noble Street	Rancho Santiago Boulevard	AAC	E	2	235	32	7,328	11/27/23	86	100	0	0	Overlay - AC Structural	10/1/08
848	809	Palmyra Avenue	Bedford Road	Main Street	AAC	E	2	650	47	30,550	3/13/24	86	96	0	4	Overlay - AC Structural	7/7/22
1002	1230	Santa Ana Canyon Road	Orange-Olive Road	325' e/o Orange-Olive Road	AAC	E	2	325	32	8,450	3/20/24	86	100	0	0	Overlay - AC Structural	10/1/08
1036	1681	Sheri Street	Skywood Street	Bixby Avenue	AC	E	2	765	32	24,480	1/4/24	86	99	1	0	Surface Treatment - Slurry Seal	10/10/19
255	2470	Charter Oak Drive	West End	Earlham Street	AAC	E	2	950	33	32,850	11/28/23	86	95	0	5	2 in overlay	8/31/07
642	2104	Lake Mead Avenue	North End	Smokey Avenue	AAC	E	2	275	32	10,300	11/16/23	86	100	0	0	Overlay - AC Structural	1/1/18
732	1261	Martha Lane	Park Lane	East End	AAC	E	2	225	31	6,975	2/27/24	86	96	0	4	Surface Treatment - Slurry Seal	5/27/25
746	2043	Meredith Street	Regency Avenue	Hillsborough Avenue	AC	E	2	1,280	28	35,615	12/4/23	86	76	24	0	Surface Treatment - Slurry Seal	8/1/17
908	1200	Rainier Avenue	Woods Street	Ashwood Street	AAC	E	2	1,620	36	58,320	2/29/24	86	81	0	19	Surface Treatment - Slurry Seal	3/21/22
1165	1861	Villa Vista Way	West End	Santiago Boulevard	AAC	E	2	1,085	31	35,435	12/12/23	86	94	0	6	Overlay - AC Structural	1/1/18
508	1017	Greengrove Drive	Palmyra Avenue	Culver Avenue	AAC	E	2	620	32	19,840	2/20/24	86	27	44	29	Overlay - AC Structural	10/1/08
521	1562	Hamlin Street	Orange Grove Avenue	Walnut Avenue	AAC	E	2	485	32	15,136	11/27/23	86	100	0	0	Overlay - AC Structural	10/1/08
533	1108	Harwood Street	Sycamore Avenue	Palm Avenue	AC	E	2	620	34	21,080	2/9/24	86	100	0	0	New Construction - Initial	1/1/80
687	2620	Loredo Avenue	White Oak Ridge	Fairfield Lane	AC	E	2	90	32	2,880	10/17/23	86	100	0	0	Surface Treatment - Slurry Seal	3/21/22
929	1534	Rick Street	North End	Del Valle Avenue	AAC	E	2	365	32	13,180	11/28/23	86	100	0	0	Overlay - AC Structural	10/1/08
958	1422	Romelle Avenue	Laurinda Lane	East End	AC	E	2	155	31	5,955	2/22/24	86	100	0	0	Surface Treatment - Slurry Seal	10/1/13
1138	2230	Trenton Avenue	Main Street	East End	AC	I	2	805	44	36,920	3/8/24	86	77	0	23	Surface Treatment - Slurry Seal	1/1/94
480	1805	Glen Oak Lane	Deerfield Lane	White Oak Ridge	AC	E	2	110	36	3,744	10/19/23	86	100	0	0	Surface Treatment - Slurry Seal	1/1/18
845	1023	Palm Avenue	California Street	Tustin Avenue	AC	E	2	1,295	37	47,915	2/23/24	86	100	0	0	Surface Treatment - Slurry Seal	1/1/91
945	1219	Riverview Avenue	Richland Street	Driftwood Street	AAC	E	2	605	32	19,360	2/29/24	86	96	0	4	Surface Treatment - Slurry Seal	3/21/22
972	1485	Ruth Place	Laurinda Lane	Wellington Street	AC	E	2	1,110	32	36,270	2/14/24	86	100	0	0	Surface Treatment - Slurry Seal	1/1/02
1002	1233	Santa Ana Canyon Road	325' e/o Orange-Olive Road	Santa Anita Street	APC	E	2	1,770	36	28,320	3/28/24	86	46	54	0	Overlay - AC Structural	10/1/08
1057	1680	Skywood Street	Skywood Street	Bixby Avenue	AC	E	2	730	32	23,360	1/4/24	86	100	0	0	Surface Treatment - Slurry Seal	10/10/19
1073	1794	Sprucewood Avenue	Amberwood Street	Timberland Avenue	AC	E	2	1,110	32	36,270	10/19/23	86	57	43	0	Surface Treatment - Slurry Seal	1/1/18
1105	1576	Sweetwater Lane	Fieldcrest Lane	South End	AC	E	2	200	32	7,900	10/17/23	86	58	42	0	Surface Treatment - Slurry Seal	1/1/18
1107	1660	Swidler Place	La Veta Avenue	685' s/o La Veta Avenue	AAC	E	2	685	31	21,235	2/20/24	86	94	0	6	Overlay - AC Structural	12/14/06
1113	2048	Talbot Street	Cornwall Avenue	Fitzgerald Avenue	AC	E	2	325	32	11,900	12/4/23	86	100	0	0	Surface Treatment - Slurry Seal	8/1/17
1194	2059	Waterford Street	Meridian Street	Courtland Street	AC	E	2	235	30	7,800	12/6/23	86	100	0	0	Surface Treatment - Slurry Seal	8/1/17
1252	1614	Wrightwood Street	Charter Oak Drive	Del Valle Avenue	AAC	E	2	935	33	31,605	11/28/23	86	100	0	0	2 in overlay	8/31/07
328	1002	Culver Avenue	Gardner Drive	California Street	AAC	E	2	600	31	18,600	2/21/24	86	100	0	0	Overlay - AC Structural	10/1/08
564	2040	Hillsborough Avenue	Whitehall Street	Roxbury Street	AC	E	2	290	36	11,190	12/4/23	86	52	48	0	Surface Treatment - Slurry Seal	8/1/17
966	1574	Roundup Way	Bucksin Way	Goldenspur Way	AC	E	2	535	32	17,120	10/24/23	86	62	33	5	Surface Treatment - Slurry Seal	10/10/19
1266	1984	Zion Street	North End	Crater Lake Avenue	AAC	E	2	480	32	16,860	10/31/23	86	100	0	0	Overlay - AC Structural	8/1/17
99	592	Autumn Hill Way	Cobblestone Drive	South End	AC	E	2	200	32	7,900	10/19/23	87	53	47	0	Surface Treatment - Slurry Seal	1/1/18
147	189	Bond Avenue	Hewes Street	120' W Swan Street	AC	E	2	590	28	16,520	11/27/23	87	97	0	3	New Construction - Initial	1/1/80
149	617	Boom Avenue	Gaff Street	East End	AAC	E	2	470	32	15,040	2/28/24	87	74	0	26	Overlay - AC Structural	12/13/06
187	644	Burdie Lane	Yorba Street	Rosalind Street	AAC	E	2	190	32	6,580	2/23/24	87	96	0	4	2 in overlay	8/28/07
272	2447	Citrus Street	North End	Palmyra Avenue	AC	E	2	335	34	11,390	3/29/24	87	59	0	41	Surface Treatment - Slurry Seal	1/1/04
450	1985	Forest Street	Shenandoah Avenue	Bryce Avenue	AC	E	2	250	32	7,808	11/14/23	87	86	9	5	Surface Treatment - Slurry Seal	10/10/19
714	2214	Manzanita Street	North End	Katella Avenue	AAC	E	2	830	44	38,020	3/8/24	87	87	0	13	Overlay - AC Structural	7/1/08
865	1892	Partridge Lane	Cannon Street	East End	AAC	E	2	535	32	18,620	11/1/23	87	100	0	0	Overlay - AC Structural	8/1/16
870	1880	Pearl Street	Cannon Street	East End	AAC	E	2	610	36	21,960	11/1/23	87	100	0	0	Overlay - AC Structural	8/1/16
1187	1471	Wayfield Circle	North End	Palmyra Avenue	AC	E	2	1,105	31	35,305	3/14/24	87	33	67	0	Complete Reconstruction - AC	11/2/06
1215	1789	White Oak Ridge	Fort Road	Canyon View Avenue	AC	E	2	1,485	36	53,460	4/15/24	87	100	0	0	Surface Treatment - Slurry Seal	1/1/96
962	2044	Rosemere Street	Via Escola	Townsend Avenue	AC	E	2	160	36	5,760	12/4/23	87	66	34	0	Surface Treatment - Slurry Seal	8/1/17
1197	1122	Waverly Street	North End	Walnut Avenue	AC	E	2	625	32	20,000	2/2/24	87	43	57	0	Surface Treatment - Slurry Seal	1/1/03
94	647	Athens Avenue	Handy Street	Harding Street	AAC	E	2	1,100	32	35,200	3/1/24	87	71	0	29	Overlay - AC Structural	12/13/06
110	2209	Barkley Street	Batavia Street	East End	AAC	E	2	335	44	14,740	3/8/24	87	91	0	9	Overlay - AC Structural	1/1/02
699	2089	Mabury Avenue	Yellowstone Boulevard	Orange Park Boulevard	AAC	E	2	1,580	36	56,880	10/31/23	87	100	0	0	Overlay - AC Structural	8/1/17
845	1538	Palm Avenue	Earlham Street	East End	AAC	E	2	365	32	11,680	11/27/23	87	100	0	0	Surface Treatment - Slurry Seal	11/1/08

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
857	2313	Park Griffith Avenue	Park Hyde Street	Park Vine Street	AAC	E	2	215	32	6,880	3/7/24	87	82	18	0	Overlay - AC Structural	9/1/08
1188	1579	Walnut Ridge Road	West End	Deep Spring Road	AC	E	2	595	32	19,040	10/17/23	87	100	0	0	Surface Treatment - Slurry Seal	1/1/18
204	2597	Camden Street	Via Escola	Ashford Avenue	AC	E	2	170	36	5,608	3/20/24	87	100	0	0	New Construction - Initial	1/1/80
296	1411	Constitution Avenue	Marmon Avenue	Liberty Way	AAC	E	2	290	36	9,928	2/20/24	87	89	0	11	2 in overlay	8/1/09
573	1092	Hoover Avenue	Shaffer Street	Cambridge Street	AAC	E	2	1,280	31	39,680	2/9/24	87	54	15	31	Overlay - AC Structural	1/1/99
643	1385	Lakeside Avenue	Morningside Street	East End	AAC	E	2	325	31	11,575	1/3/24	87	78	17	5	Overlay - AC Structural	1/31/16
848	986	Palmyra Avenue	Cambridge Street	Gardner Drive	AAC	E	2	1,015	32	32,480	2/21/24	87	35	56	9	Overlay - AC Structural	12/13/06
370	1184	Earlham Street	Chapman Avenue	Washington Avenue	AAC	E	2	445	32	14,048	2/20/24	87	97	0	3	Overlay - AC Structural	1/1/04
398	1811	Equestrian Terrace	Chapman Avenue	South End	AAC	E	2	975	27	27,825	10/26/23	87	100	0	0	Overlay - AC Structural	8/1/17
434	1577	Fieldcrest Lane	West End	Deep Spring Road	AC	E	2	525	32	18,300	10/17/23	87	74	26	0	Surface Treatment - Slurry Seal	1/1/18
564	2041	Hillsborough Avenue	Longhurst Street	Whitehall Street	AC	E	2	260	36	9,360	12/4/23	87	97	3	0	Surface Treatment - Slurry Seal	8/1/17
880	1132	Pine Street	Walnut Avenue	Sycamore AVenue	AAC	E	2	625	31	19,375	2/9/24	87	100	0	0	Overlay - AC Structural	12/12/12
75	626	Anchor Street	260' w/o Gallery Street	Buoy Avenue	AAC	E	2	925	32	29,600	2/28/24	87	55	0	45	Overlay - AC Structural	12/13/06
110	640	Barkley Street	Grand Street	Shaffer Street	AC	E	2	625	32	20,000	3/5/24	87	65	0	35	Surface Treatment - Slurry Seal	6/1/21
262	2172	Chestnut Avenue	West End	Highland Street	AAC	E	2	260	36	9,360	3/1/24	87	32	0	68	Overlay - AC Structural	1/1/02
424	1853	Feather Hill Drive	Ridge Park Lane	Shady Forest Lane	AAC	E	2	310	36	11,160	12/5/23	87	100	0	0	Overlay - AC Structural	11/1/08
1006	1786	Santa Cruz Avenue	Santa Maria Canyon	Mulberry Street	AC	E	2	440	34	15,710	10/24/23	87	100	0	0	Surface Treatment - Slurry Seal	1/1/18
530	1432	Hartford Road	Coate Road	Arlington Road	AAC	E	2	225	31	6,975	2/22/24	87	100	0	0	Overlay - AC Structural	1/1/02
669	1922	Lincoln Street	Meats Avenue	Grove Avenue	AAC	E	2	890	36	32,040	3/4/24	87	37	62	1	Overlay - AC Structural	1/1/04
684	2046	Longhurst Street	North End	Fitzgerald Avenue	AC	E	2	255	32	8,160	12/4/23	87	100	0	0	Surface Treatment - Slurry Seal	8/1/17
688	1494	Loretta Drive	Burly Avenue	Palmyra Avenue	AAC	E	2	660	32	20,896	2/14/24	87	75	0	25	2 in overlay	8/1/09
998	1221	Sandbar Circle	North End	Riverview Avenue	AAC	E	2	238	32	7,616	2/29/24	87	81	19	0	Surface Treatment - Slurry Seal	3/21/22
1010	1784	Santa Maria Street	Santa Cruz Drive	Salinas Court	AC	E	2	260	32	9,070	10/24/23	87	100	0	0	Surface Treatment - Slurry Seal	1/1/18
1053	2770	Skylark Place	Presido Way	Canyon View	AC	E	2	1,023	36	38,078	10/24/23	87	56	0	44	Surface Treatment - Slurry Seal	6/1/21
169	433	Briar Crest Lane	West End	Deep Spring Road	AC	E	2	475	32	16,700	4/15/24	87	100	0	0	Surface Treatment - Slurry Seal	1/1/18
306	1212	Cottonwood Street	North End	Riverview Avenue	AAC	E	2	320	32	10,240	2/29/24	87	97	0	3	Surface Treatment - Slurry Seal	3/21/22
340	1581	Deep Spring Road	White Oak Ridge	Briarwood Road	AC	E	2	1,070	32	34,240	10/17/23	87	74	23	3	Surface Treatment - Slurry Seal	1/1/18
530	1430	Hartford Road	Kensington Road	Wellington Road	AAC	E	2	300	31	10,800	2/22/24	87	80	0	20	2 in overlay	8/29/07
597	2274	Jewell Place	Palm Avenue	Maple Avenue	AC	E	2	620	32	19,840	3/4/24	87	88	0	12	Surface Reconstruction - AC	1/1/91
704	1793	Mahogany Street	Canyon View Avenue	Timberland Avenue	AC	E	2	135	36	4,644	10/19/23	87	100	0	0	Surface Treatment - Slurry Seal	1/1/18
773	1978	Mountain Avenue	Mt. McKinley Boulevard	Mabury Avenue	AC	E	2	715	32	22,496	10/31/23	87	96	0	4	Surface Treatment - Slurry Seal	10/10/19
368	1693	Dunton Avenue	Glassell Street	Ashwood Street	AC	E	2	1,460	32	46,720	3/1/24	87	37	15	48	Surface Reconstruction - AC	1/1/03
772	1293	Mount Vernon Avenue	West End	Sacramento Street	AAC	E	2	165	32	6,330	2/13/24	87	94	0	6	Overlay - AC Structural	10/10/19
987	1254	San Alto Place	Oceanview Street	Gayle Street	AAC	E	2	475	32	15,200	2/28/24	87	82	0	18	Overlay - AC Structural	10/1/08
1133	2158	Torres Street	St. James Avenue	Heim Avenue	AAC	E	2	800	32	25,600	2/28/24	87	99	0	1	Overlay - AC Structural	12/13/06
198	2510	California Street	Quincy Avenue	Collins Avenue	AAC	E	2	1,115	32	35,680	2/9/24	87	73	27	0	Overlay - AC Structural	12/14/06
313	1981	Crater Lake Avenue	Mt. McKinley Boulevard	Lassen Boulevard	AAC	E	2	1,200	32	37,968	10/31/23	87	100	0	0	Overlay - AC Structural	8/1/16
647	1434	Larkstone Drive	Laurinda Lane	Prospect Street	AAC	E	2	1,140	31	34,968	2/22/24	87	100	0	0	2 in overlay	8/28/07
767	1526	Morgan Street	Monroe Avenue	Collins Avenue	AAC	E	2	850	32	27,200	3/6/24	87	96	0	4	Overlay - AC Structural	8/1/17
859	1839	Park Lane	Meats Avenue	Del Mar Avenue	AC	E	2	735	32	23,520	3/4/24	87	100	0	0	New Construction - Initial	1/1/80
890	1567	Pony Court	Chandler Ranch	East End	AAC	E	2	415	32	14,780	10/24/23	87	100	0	0	Overlay - AC Structural	1/1/18
1255	2578	Xtra Way	North End	Katella Avenue	AC	E	2	845	56	47,320	8/27/24	87	81	0	19	New Construction - Initial	1/1/80
87	861	Arlington Road	Hartford Road	Gainsborough Road	AAC	E	2	505	32	16,160	2/22/24	88	80	20	0	Surface Reconstruction - AC	1/1/02
632	1575	La Cumbre Way	North End	Calle Grande	AAC	E	2	1,076	32	34,432	10/24/23	88	100	0	0	Overlay - AC Structural	8/1/17
710	1974	Mammoth Circle	Teton Avenue	East End	AC	E	2	455	32	16,810	10/31/23	88	66	34	0	Surface Treatment - Slurry Seal	10/10/19
776	1796	Mulberry Street	Sprucewood Avenue	Santa Cruz Ave	AC	E	2	271	32	8,480	10/25/23	88	100	0	0	Surface Treatment - Slurry Seal	1/1/18
1048	1539	Silver Leaf Avenue	Earlham Street	East End	AAC	E	2	360	32	13,020	11/27/23	88	100	0	0	Overlay - AC Structural	10/1/08
1322	3181	Cannon Street Frontage Roa	Valencia Drive	North End	AC	E	2	270	25	6,750	8/28/24	88	100	0	0	New Construction - Initial	1/1/80
441	2047	Fitzgerald Avenue	Talbot Street	Longhurst Street	AC	E	2	325	32	10,900	12/4/23	88	99	1	0	Surface Treatment - Slurry Seal	8/1/17
519	2599	Halyard Lane	Sirius Avenue	Tiller Avenue	AC	E	2	220	33	7,760	3/7/24	88	100	0	0	Surface Treatment - Slurry Seal	1/1/03
614	803	Kelly Avenue	West End	Lemon Street	AC	E	2	515	36	19,690	3/5/24	88	51	0	49	Grind Overlay with Dig Outs	10/1/14
737	2164	McPherson Street	Spring Street	540' s/o Spring Street	AC	E	2	540	32	17,280	2/20/24	88	93	0	7	New Construction - Initial	1/1/80
904	1884	Quail Lane	Pearl Street	South End	AAC	E	2	275	32	10,300	11/1/23	88	100	0	0	Overlay - AC Structural	8/1/16
1138	2173	Trenton Avenue	West End	Highland Street	AAC	E	2	230	36	8,280	3/1/24	88	33	0	67	Overlay - AC Structural	1/1/02
1199	1429	Wellington Road	Hartford Road	Gainsborough Road	AAC	E	2	755	31	23,905	2/22/24	88	97	0	3	2 in overlay	8/28/07
4	838	Adams Avenue	Tustin Avenue	East End	AC	E	2	930	32	29,760	3/4/24	88	34	0	66	New Construction - Initial	1/1/80
392	2267	Emerald Drive	Primrose Drive	Walnut Avenue	AC	E	2	225	30	6,750	3/8/24	88	55	0	45	New Construction - Initial	1/1/80
707	1489	Malena Street	Burly Avenue	Washington Avenue	AAC	E	2	390	32	13,980	2/14/24	88	93	0	7	2 in overlay	8/1/09
945	1240	Riverview Avenue	Sunset Street	Gayle Street	AAC	E	2	800	32	25,600	2/29/24	88	100	0	0	Overlay - AC Structural	10/1/08

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
368	1687	Dunton Avenue	West End	Glassell Street	AAC	E	2	560	32	17,920	2/29/24	88	64	33	3	Overlay - AC Structural	1/1/03
423	1807	Fawnwood Lane	Teal Lane	Deerfield Lane	AC	E	2	500	32	16,500	10/17/23	88	69	0	31	Surface Treatment - Slurry Seal	1/1/18
466	994	Gardner Drive	North End	Palmyra Avenue	AAC	E	2	225	30	7,800	2/23/24	88	100	0	0	Overlay - AC Structural	10/1/08
544	2169	Heim Avenue	Tustin Street	East End	AC	E	2	450	36	16,200	3/14/24	88	83	17	0	Complete Reconstruction - AC	10/1/08
848	988	Palmyra Avenue	Shaffer Street	Harwood Street	AAC	E	2	675	32	21,600	2/26/24	88	96	0	4	Overlay - AC Structural	10/11/19
881	1198	Pinewood Street	Riverdale Avenue	Rainer Avenue	AC	E	2	785	32	25,120	2/29/24	88	36	64	0	Surface Treatment - Slurry Seal	3/21/22
906	1522	Quincy Avenue	Sacramento Street	Handy Street	AAC	E	2	1,140	31	35,340	2/8/24	88	100	0	0	2 in overlay	8/29/07
514	3138	Grijalva	Rancho Santiago Boulevard	Cheyenne Street	AC	E	2	184	34	2,842	11/28/23	88	43	0	57	New Construction - Initial	1/1/90
770	1906	Morningside Street	Taft Avenue	Parkside Avenue	AAC	E	2	1,315	31	42,265	1/3/24	88	68	0	32	Overlay - AC Structural	1/31/16
1100	1683	Sunview Drive	Westhaven Street	Tustin Street	AAC	E	2	985	32	31,520	1/4/24	88	100	0	0	Overlay - AC Structural	1/1/19
1122	2662	The City Way	Manchester Avenue	The City Drive	AC	E	2	410	38	33,620	8/28/24	88	45	55	0	New Construction - Initial	1/1/80
1125	1888	Thora Street	Avendia Palmar	Ryals Lane	AAC	E	2	620	32	19,648	11/1/23	88	88	0	12	Overlay - AC Structural	8/1/16
453	1767	Fox Run Lane	Bear Tree Lane	Elk Glen Lane	AC	E	2	305	32	10,260	10/19/23	88	100	0	0	Surface Treatment - Slurry Seal	1/1/18
262	2464	Chestnut Avenue	Handy Street	Harding Street	AAC	E	2	1,120	32	35,840	3/1/24	88	92	0	8	Overlay - AC Structural	11/13/06
336	1566	Dapple Circle	Chandler Ranch	East End	AAC	E	2	355	32	12,860	10/24/23	88	100	0	0	Overlay - AC Structural	1/1/18
413	1678	Fairbairn Street	Skywood Street	Bixby Avenue	AC	E	2	840	32	26,880	1/4/24	88	100	0	0	Surface Treatment - Slurry Seal	10/10/19
531	1689	Hartman Street	Dunton Avenue	Brookshire Avenue	AAC	E	2	830	32	26,560	3/1/24	88	47	0	53	Overlay - AC Structural	1/1/03
715	1025	Maple Avenue	Cambridge Street	California Street	AAC	E	2	1,285	40	51,400	2/21/24	88	59	38	3	Overlay - AC Structural	7/1/09
762	1750	Montecito Place	North End	Patria Court	AC	E	2	405	32	14,758	11/2/23	88	100	0	0	Surface Treatment - Slurry Seal	3/21/22
844	2637	Palermo Court	Magdalena Drive	South End	AC	E	2	150	32	6,300	11/20/23	88	100	0	0	New Construction - Initial	1/1/80
845	1024	Palm Avenue	Waverly Street	California Street	AC	E	2	1,000	37	37,000	2/23/24	88	80	0	20	Surface Treatment - Slurry Seal	5/27/25
848	984	Palmyra Avenue	Lincoln Street	Tustin Avenue	AC	E	2	600	30	18,000	2/20/24	88	57	0	43	New Construction - Initial	1/1/80
925	1890	Renee Street	North End	Ryals Lane	AAC	E	2	435	32	15,420	11/1/23	88	100	0	0	Overlay - AC Structural	8/1/16
1102	2068	Swallow Avenue	Snow Goose Street	Red Robin Street	AC	E	2	665	32	22,780	11/28/23	88	70	30	0	Surface Treatment - Slurry Seal	6/1/20
1138	1374	Trenton Avenue	Harding Street	East End	AAC	E	2	240	32	9,180	3/4/24	88	100	0	0	Overlay - AC Structural	11/13/06
1245	1313	Woods Street	Rainier Avenue	Meadowbrook Avenue	AAC	E	2	260	36	9,360	2/29/24	88	100	0	0	Surface Treatment - Slurry Seal	3/21/22
79	2239	Anita Drive	Chapman Avenue	South End	AC	I	2	1,310	36	48,960	3/7/24	88	81	0	19	Surface Treatment - Slurry Seal	1/1/95
328	993	Culver Avenue	Cambridge Street	East End	AAC	E	2	595	31	19,595	2/20/24	88	100	0	0	Overlay - AC Structural	10/1/08
463	1699	Galley Street	Anchor Street	Buoy Avenue	AAC	E	2	970	31	30,070	2/28/24	88	72	0	28	Overlay - AC Structural	12/13/06
500	931	Grand Street	Washington Avenue	Palmyra Avenue	AC	E	2	300	36	10,800	2/26/24	88	57	0	43	Surface Treatment - Slurry Seal	1/1/03
880	1045	Pine Street	Trenton Avenue	South End	AC	E	2	455	32	14,560	2/15/24	88	68	0	32	Surface Reconstruction - AC	9/20/07
1328	8010	Riverbend Parkway	Shadyvale Street	Honey Tree Way	AC	E	2	996	40	39,840	2/29/24	88	93	0	7	New Construction - Initial	10/4/12
956	1803	Rodeo Circle	Amapola Avenue	South End	AAC	E	2	490	32	17,478	10/26/23	88	100	0	0	Overlay - AC Structural	1/1/21
1006	1787	Santa Cruz Avenue	Mulberry Street	San Luis Drive	AC	E	2	395	32	12,640	10/24/23	88	100	0	0	Surface Treatment - Slurry Seal	1/1/18
1148	1726	Valley Forge Drive	West End	Jamestown Way	AAC	E	2	380	32	13,958	11/16/23	88	100	0	0	Overlay - AC Structural	1/31/16
153	616	Bourbon Street	Sail Avenue	Heim Avenue	AC	E	2	1,390	36	50,040	2/28/24	88	49	0	51	New Construction - Initial	4/3/12
313	1983	Crater Lake Avenue	Lassen Boulevard	East End	AAC	E	2	175	32	7,100	10/31/23	88	91	0	9	Overlay - AC Structural	8/1/16
739	1213	Meadowbrook Avenue	Driftwood Street	Richland Street	AC	E	2	625	36	22,500	2/29/24	88	50	50	0	Surface Treatment - Slurry Seal	3/21/22
845	1305	Palm Avenue	Milford Street	Handy Street	AAC	E	2	660	31	20,460	2/13/24	88	97	0	3	Overlay - AC Structural	10/10/19
866	1749	Patria Court	West End	Cannon Street	AC	E	2	365	32	13,180	11/2/23	88	82	0	18	Surface Treatment - Slurry Seal	3/21/22
1197	1031	Waverly Street	Maple Avenue	Chapman Avenue	AAC	E	2	600	34	20,400	2/21/24	88	62	38	0	Overlay - AC Structural	7/1/09
1235	1927	Winlock Street	Buckeyewood Avenue	South End	AAC	E	2	170	32	5,440	2/27/24	88	0	0	100	Overlay - AC Structural	6/1/19
189	2536	Burton Avenue	West End	Chouteau Street	AAC	E	2	145	32	5,740	2/27/24	88	14	0	86	Overlay - AC Structural	6/1/19
267	2453	Choteau Street	Buckeyewood Avenue	South End	AAC	E	2	180	32	5,760	2/27/24	88	0	0	100	Overlay - AC Structural	6/1/19
567	1685	Hilltop Drive	Westhaven Street	Valley View Drive	AAC	E	2	630	32	20,160	1/4/24	88	100	0	0	Overlay - AC Structural	1/1/19
1031	1671	Shasta Way	North End	Dixon Avenue	AAC	E	2	140	32	6,980	2/23/24	88	93	0	7	Overlay - AC Structural	6/1/21
1232	23890	Windes Drive	535' n/ o Lewis Dr	1214' n/o Lewis Dr	AC	E	2	1,274	20	25,480	11/14/23	88	65	0	35	New Construction - Initial	1/1/80
124	825	Berkeley Circle	North End	Westway Avenue	AAC	E	2	215	32	6,880	3/1/24	89	100	0	0	Cold Milling	12/14/06
124	825	Berkeley Circle	North End	Westway Avenue	AAC	E	2	215	32	6,880	3/1/24	89	100	0	0	Overlay - AC Structural	12/14/06
124	825	Berkeley Circle	North End	Westway Avenue	AAC	E	2	215	32	6,880	3/1/24	89	100	0	0	Patching - AC Leveling	12/14/06
251	2487	Chapel Hill Road	West End	Villa Real Drive	AAC	E	2	455	32	16,060	12/5/23	89	66	0	34	Surface Treatment - Slurry Seal	11/1/08
827	2099	Orange Park Boulevard	Serrano Avenue	Joshua Street	AAC	E	2	1,210	40	50,820	11/16/23	89	100	0	0	Overlay - AC Structural	8/1/17
1007	2580	Santa Fe Place	North End	Lincoln Avenue	AC	E	2	770	32	24,640	12/8/17	89	100	0	0	New Construction - Initial	1/1/80
102	822	Avenida Palmar	Cannon Street	Quail Lane	AC	E	2	125	32	3,744	11/1/23	89	100	0	0	New Construction - Initial	1/1/80
201	2551	Calle Grande	Chapman Avenue	La Cumbre Drive	AAC	E	2	1,960	36	70,344	10/24/23	89	66	0	34	Overlay - AC Structural	8/1/17
359	1409	Dorothy Avenue	Esplanade Street	Wrightwood Street	AAC	E	2	115	36	3,884	3/15/24	89	96	0	4	Overlay - AC Structural	1/31/16
429	2124	Ferndale Avenue	Ridgewood Street	East End	AAC	E	2	420	32	13,440	2/27/24	89	52	0	48	Overlay - AC Structural	1/1/04
701	2635	Magdalena Drive	Serrano Avenue	San Lorenzo Court	AC	E	2	2,315	32	74,830	11/20/23	89	99	0	1	New Construction - Initial	1/1/80
702	1036	Magnolia Street	Palm Avenue	Maple Avenue	AC	E	2	615	34	20,910	2/21/24	89	33	0	67	Surface Reconstruction - AC	1/1/02

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
904	1893	Quail Lane	North End	Partridge Lane	AC	E	2	490	32	17,180	11/1/23	89	100	0	0	New Construction - Initial	1/1/80
958	1440	Romelle Avenue	Breezy Way	Lowry Lane	AC	E	2	245	32	7,648	2/22/24	89	56	44	0	Surface Treatment - Slurry Seal	1/1/03
1109	1136A	Sycamore Avenue	Shaffer Street	Hardwood Street	AAC	E	2	672	34	22,848	2/23/24	89	83	0	17	Overlay - AC Structural	12/16/06
1242	1658	Woodland Street	La Veta Avenue	Larkstone Drive	AAC	E	2	1,165	31	36,115	1/26/24	89	60	0	40	Overlay - AC Structural	12/14/06
101	3303	Avalon	Altaview Drive	Chadwick Parkway	AC	E	2	1,214	32	39,598	11/21/23	89	100	0	0	Surface Treatment - Slurry Seal	6/1/20
146	619	Bolingridge Drive	Westhaven Street	East End	AAC	E	2	135	32	4,320	1/4/24	89	100	0	0	Overlay - AC Structural	1/1/19
284	1488	Coate Road	Ruth Place	La Veta Avenue	AC	E	2	305	32	9,568	2/14/24	89	81	0	19	Surface Treatment - Slurry Seal	1/1/92
631	1578	Knollwood Drive	West End	Deep Spring Road	AC	E	2	400	32	14,300	10/17/23	89	88	12	0	Surface Treatment - Slurry Seal	1/1/18
760	3254	Monaco	West End	Apache Creek Road	AC	E	2	1,067	32	36,644	10/2/17	89	35	65	0	New Construction - Initial	1/1/80
845	1621	Palm Avenue	Swidler Street	Seranado Street	AAC	E	2	1,190	32	37,888	1/2/24	89	100	0	0	Overlay - AC Structural	10/1/08
988	1253	San Bruno Avenue	Gayle Street	Santa Anita Street	AAC	E	2	215	32	6,880	2/28/24	89	57	0	43	Overlay - AC Structural	10/1/08
1109	1140	Sycamore Avenue	California Street	Lincoln Street	AC	E	2	480	31	14,880	2/23/24	89	100	0	0	Surface Treatment - Slurry Seal	1/1/02
64	849	Almond Avenue	Cambridge Street	Jameson Street	AAC	E	2	1,170	36	42,120	2/21/24	89	49	46	5	Overlay - AC Structural	1/13/16
92	591	Aspen Street	Canyon View Avenue	Timberland Avenue	AC	E	2	135	36	4,644	10/19/23	89	85	15	0	Surface Treatment - Slurry Seal	1/1/18
103	831	Avila Place	Cerritos Drive	South End	AC	E	2	350	32	12,700	11/2/23	89	58	42	0	Surface Treatment - Slurry Seal	3/21/22
199	2549	Calle Alta	La Cumbre Drive	South End	AAC	E	2	670	32	22,940	10/24/23	89	100	0	0	Overlay - AC Structural	8/1/17
391	1717	Elsinore Avenue	Palo Loma Drive	Cabrillo Street	AAC	E	2	645	32	22,140	11/16/23	89	100	0	0	Overlay - AC Structural	1/31/16
667	949	Lime Street	Chapman Avenue	Almond Avenue	AC	E	2	600	32	19,200	3/13/24	89	68	0	32	Surface Treatment - Slurry Seal	1/1/04
763	1028	Monterey Road	Maple Avenue	Chapman Avenue	AAC	E	2	610	38	23,180	2/21/24	89	98	0	2	Overlay - AC Structural	7/1/09
989	1252	San Carlos Place	West End	Gayle Street	AAC	E	2	520	32	16,640	2/28/24	89	86	0	14	Overlay - AC Structural	10/1/08
1022	1618	Seranado Street	Walnut Avenue	Spring Street	AAC	E	2	1,275	32	40,416	1/2/24	89	100	0	0	Overlay - AC Structural	10/1/08
1059	2103	Smokey Avenue	Orange Park Boulevard	East End	AAC	E	2	365	32	13,180	11/16/23	89	100	0	0	Overlay - AC Structural	1/1/18
1061	2069	Snow Goose Street	Swallow Avenue	Blue Bird Avenue	AC	E	2	545	32	17,940	11/28/23	89	94	0	6	Surface Treatment - Slurry Seal	6/1/20
734	2179	Mayfair Avenue	Lincoln Street	Tustin Street	AC	I	2	600	31	18,600	2/2/24	89	100	0	0	Surface Reconstruction - AC	1/1/03
244	2545	Cerritos Drive	Cannon Street	Palo Loma Drive	AAC	E	2	140	36	4,824	11/16/23	89	100	0	0	Overlay - AC Structural	1/31/16
249	2555	Chandler Ranch	Criollo Circle	Morninglory Way	AAC	E	2	1,014	36	36,288	10/24/23	89	100	0	0	Overlay - AC Structural	8/1/17
671	1073	Lindenholtz Street	Palmdale Avenue	Taft Avenue	AAC	E	2	120	32	3,840	2/27/24	89	100	0	0	Overlay - AC Structural	1/1/19
1048	1550	Silver Leaf Avenue	Hewes Street	Rancho Santiago Boulevard	AAC	E	2	1,270	32	40,448	11/27/23	89	95	0	5	Overlay - AC Structural	10/1/08
83	860	Appletree Lane	West End	Deep Spring Road	AC	E	2	460	32	16,220	10/17/23	89	100	0	0	Surface Treatment - Slurry Seal	1/1/18
566	1384	Hillside Avenue	Morningside Street	Fern Street	AAC	E	2	590	31	18,290	1/3/24	89	100	0	0	Overlay - AC Structural	1/31/16
929	1612	Rick Street	Bond Avenue	El Carmen Avenue	AAC	E	2	475	33	15,477	11/28/23	89	42	0	58	2 in overlay	8/31/07
171	584	Briarwood Road	West End	Deep Spring Road	AC	E	2	550	32	17,600	10/17/23	89	100	0	0	Surface Treatment - Slurry Seal	1/1/18
420	3305	Falconer	West End	Portico	AC	E	2	586	32	20,252	11/21/23	89	99	1	0	Surface Treatment - Slurry Seal	6/1/20
751	1863	Milford Street	North End	Villa Vista Way	AAC	E	2	185	31	7,235	12/12/23	89	72	0	28	Overlay - AC Structural	1/1/18
974	1352	Sacramento Street	Katella Avenue	Hoover Avenue	AAC	E	2	775	31	24,025	2/8/24	89	100	0	0	2 in overlay	8/31/07
1048	1624	Silver Leaf Avenue	Thomas Street	Seranado Street	AAC	E	2	725	32	23,200	1/2/24	89	88	0	12	Overlay - AC Structural	1/1/02
110	637	Barkley Street	West End	Highland Street	AC	E	2	295	32	9,440	2/27/24	89	60	0	40	Surface Treatment - Slurry Seal	1/1/02
272	2446	Citrus Street	Chapman Avenue	Almond Avenue	AC	E	2	600	30	18,000	3/11/24	89	100	0	0	Surface Treatment - Slurry Seal	1/1/04
383	1868	El Sereno Drive	Santiago Boulevard	Riding Way	AAC	E	2	700	33	23,100	12/13/23	89	91	0	9	Overlay - AC Structural	1/1/18
766	2398	Moreland Drive	Shaffer Street	Harwood Street	PCC	E	2	620	17	10,540	8/28/24	89	63	30	7	New Construction - Initial	1/1/80
990	1720	San Juan Drive	Cannon Stret	Navarro Place	AAC	E	2	555	32	17,568	11/16/23	89	78	16	6	Overlay - AC Structural	1/1/04
1108	1619	Swidler Street	Walnut Avenue	Spring Street	AAC	E	2	1,275	32	40,800	1/2/24	89	37	0	63	Overlay - AC Structural	1/1/02
64	844	Almond Avenue	Prospect Street	Dunas Street	AC	E	2	465	32	15,380	1/26/24	89	100	0	0	New Construction - Initial	4/3/12
110	641	Barkley Street	Shaffer Street	East End	AC	E	2	1,040	32	33,280	2/9/24	89	100	0	0	Surface Treatment - Slurry Seal	1/1/02
179	561	Brookshire Avenue	West End	Ashwood Street	AAC	E	2	560	32	17,920	3/1/24	89	100	0	0	Overlay - AC Structural	1/1/03
588	1059	Jacaranda Avenue	California Street	East End	AAC	E	2	585	31	19,235	2/9/24	89	100	0	0	Overlay - AC Structural	12/14/06
776	1795	Mulberry Street	Timberland Avenue	Sprucewood Avenue	AC	E	2	495	32	15,840	10/24/23	89	100	0	0	Surface Treatment - Slurry Seal	1/1/18
974	1834	Sacramento Street	Brentford Avenue	Cloverdale Avenue	AC	E	2	360	33	12,630	1/3/24	89	100	0	0	Surface Treatment - Slurry Seal	8/1/16
1151	1005	Van Bibber Avenue	Greengrove Drive	East End	AAC	E	2	335	31	11,435	2/20/24	89	55	0	45	Overlay - AC Structural	10/1/08
1191	998	Washington Avenue	Waverly Street	East End	AAC	E	2	455	31	15,105	2/21/24	89	95	0	5	Overlay - AC Structural	10/1/08
1245	1214	Woods Street	Rainier Avenue	Ashwood Street	AC	E	2	1,210	36	43,560	2/29/24	89	76	24	0	Surface Treatment - Slurry Seal	3/21/22
76	2654	Andover Drive	Crown Parkway	Skyline Drive	AC	E	2	209	32	7,188	11/20/23	89	46	54	0	Surface Treatment - Slurry Seal	3/21/22
145	599	Bobwhite Way	North End (near Pearl Street)	Ryals Lane	AAC	E	2	380	23	11,240	11/1/23	89	100	0	0	Overlay - AC Structural	8/1/16
281	1864	Clinton Street	North End	Villa Vista Way	AAC	E	2	185	31	7,235	12/12/23	89	100	0	0	Overlay - AC Structural	1/1/18
516	1823	Grove Avenue	Shaffer Street	Cambridge Street	AAC	E	2	1,425	32	45,600	2/27/24	89	29	0	71	Overlay - AC Structural	1/1/03
848	987	Palmyra Avenue	Hardwood Street	Cambridge Street	AAC	E	2	645	32	20,640	2/26/24	89	71	25	4	Overlay - AC Structural	10/11/19
1235	2122	Winlock Street	Briardale Avenue	Glendale Avenue	AC	E	2	540	32	17,280	2/27/24	89	88	0	12	New Construction - Initial	1/1/80
210	2628	Candlewood Avenue	West End	Silverwood Street	AAC	E	2	520	32	17,690	3/4/24	90	96	0	4	Surface Treatment - Slurry Seal	5/27/25
521	1548	Hamlin Street	Walnut Avenue	South End	AAC	E	2	215	32	8,678	11/27/23	90	100	0	0	Overlay - AC Structural	10/1/08

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
533	1109	Harwood Street	Walnut Avenue	Sycamore Avenue	AAC	E	2	620	32	19,840	2/9/24	90	84	0	16	Overlay - AC Structural	1/1/02
1070	2039	Springfield Street	Roxbury Street	Via Escola	AC	E	2	585	32	18,528	12/4/23	90	100	0	0	Surface Treatment - Slurry Seal	8/1/17
321	1191	Crestwood Street	North End	Fletcher Street	AAC	E	2	560	32	17,920	3/1/24	90	69	12	19	Cold Milling	12/14/06
321	1191	Crestwood Street	North End	Fletcher Street	AAC	E	2	560	32	17,920	3/1/24	90	69	12	19	Overlay - AC Structural	12/14/06
321	1191	Crestwood Street	North End	Fletcher Street	AAC	E	2	560	32	17,920	3/1/24	90	69	12	19	Patching - AC Leveling	12/14/06
409	2102	Everglade Circle	North End	Smokey Avenue	AAC	E	2	180	32	8,308	11/20/23	90	100	0	0	Overlay - AC Structural	1/1/18
488	1532	Glenrose Drive	Charter Oak Drive	Del Valle Avenue	AAC	E	2	935	32	29,920	11/28/23	90	51	0	49	Surface Treatment - Slurry Seal	11/1/08
588	1053	Jacaranda Avenue	Grand Street	Shaffer Street	AAC	E	2	625	31	19,375	3/5/24	90	53	0	47	Overlay - AC Structural	1/1/04
755	700	Mills Drive	Flower Street	Poinsettia Drive	AC	E	2	735	32	23,520	3/7/24	90	64	0	36	Surface Treatment - Slurry Seal	1/1/04
971	445	Rustic Gate Way	Nohl Ranch Road	South End	AC	E	2	240	32	7,680	1/4/24	90	100	0	0	Surface Treatment - Slurry Seal	6/1/21
1059	2101	Smokey Avenue	Everglades Circle	Orange Park Boulevard	AAC	E	2	190	32	6,580	11/20/23	90	100	0	0	Overlay - AC Structural	1/1/18
1082	3132	Stetson	Big Sky	Cheyenne	AC	E	2	1,006	36	36,966	11/28/23	90	100	0	0	New Construction - Initial	1/1/80
1147	1751	Valencia Drive	Cannon Street	East End	AAC	E	2	1,180	32	37,568	11/16/23	90	93	0	7	Overlay - AC Structural	1/31/16
1251	1565	Wrangle Circle	Chandler Ranch	East End	AAC	E	2	410	32	14,620	10/24/23	90	100	0	0	Overlay - AC Structural	1/1/18
591	1616	James Street	North End	El Carmen Avenue	AAC	E	2	440	32	15,580	11/28/23	90	88	0	12	2 in overlay	8/31/07
768	1828	Mori Lane	Meats Avenue	South End	AC	E	2	470	32	16,389	12/13/23	90	100	0	0	Surface Treatment - Slurry Seal	8/1/16
908	1201	Rainier Avenue	Richland Street	Woods Street	AC	E	2	845	36	30,420	2/29/24	90	100	0	0	Surface Treatment - Slurry Seal	3/21/22
178	3460	Brook Glen Lane	Teal Lane	Deerfield Lane	AC	E	2	625	32	20,500	10/17/23	90	100	0	0	Surface Treatment - Slurry Seal	1/1/18
198	2506	California Street	Sycamore Avenue	Hickory Lane	AC	E	2	270	32	9,140	2/23/24	90	94	0	6	Surface Treatment - Slurry Seal	1/1/02
325	2653	Crown Parkway	Apache Creek Road	East End	AC	E	2	1,040	32	34,780	11/20/23	90	100	0	0	Surface Treatment - Slurry Seal	3/21/22
372	1082	Ebonywood Street	North End	Palmdale Avenue	AAC	E	2	190	32	6,080	2/27/24	90	100	0	0	Overlay - AC Structural	1/1/19
650	1516	Laurel Drive	North End	Collins Avenue	AAC	E	2	615	32	19,680	2/8/24	90	95	0	5	Grinding (Localized)	12/14/06
823	1115	Orangegrove Avenue	California Street	Lincoln Street	AC	E	2	625	31	19,375	2/2/24	90	93	0	7	Surface Reconstruction - AC	1/1/03
904	1883	Quail Lane	North End	Pearl Street	AAC	E	2	485	32	14,496	11/1/23	90	100	0	0	Overlay - AC Structural	8/1/16
1072	733	Spruce Avenue	Eckhoff Street	Sycamore Avenue	AAC	E	2	935	32	29,920	3/6/24	90	93	0	7	Overlay - AC Structural	1/1/22
1138	1366	Trenton Avenue	Kathleen Street	East End	AAC	E	2	255	32	10,460	3/4/24	90	69	24	7	Overlay - AC Structural	1/1/04
906	2177	Quincy Avenue	West End	Tustin Street	AC	I	2	330	36	12,980	2/9/24	90	100	0	0	Complete Reconstruction - AC	10/1/08
4	839	Adams Avenue	Sacramento Street	Handy Street	AAC	E	2	1,140	32	36,480	2/8/24	90	93	0	7	2 in overlay	8/29/07
86	570	Arbor Way	West End	Citrus Street	AC	E	2	400	32	13,850	3/4/24	90	32	0	68	Complete Reconstruction - AC	10/1/06
244	2257	Cerritos Drive	West End	Linda Vista Street	AC	E	2	535	32	18,620	11/2/23	90	95	0	5	Surface Treatment - Slurry Seal	3/21/22
371	3283	Eaton	West End	Portico Ter	AC	E	2	734	32	25,286	11/21/23	90	100	0	0	Surface Treatment - Slurry Seal	6/1/20
651	1474	Laurinda Lane	Ruth Place	La Veta Avenue	AC	E	2	405	32	12,768	2/14/24	90	98	0	2	Surface Treatment - Slurry Seal	1/1/92
677	1060	Locust Avenue	California Street	East End	AAC	E	2	590	31	19,390	2/9/24	90	100	0	0	Overlay - AC Structural	12/14/06
795	3348	Norfolk	Avalon Dr	Promontory	AC	E	2	697	32	22,804	11/21/23	90	95	0	5	Surface Treatment - Slurry Seal	6/1/20
943	1227	Riverboat Way	White Shores Drive	Cottonwood Street	AAC	E	2	455	36	16,380	2/29/24	90	100	0	0	Surface Treatment - Slurry Seal	3/21/22
992	1782	San Luis Drive	Santa Maria Canyon	Santa Cruz Drive	AC	E	2	1,055	32	34,510	10/24/23	90	100	0	0	Surface Treatment - Slurry Seal	1/1/18
1000	1889	Sandpiper Circle	North End	Ryals Lane	AAC	E	2	180	32	7,260	11/1/23	90	100	0	0	Overlay - AC Structural	8/1/16
1032	1041	Shattuck Place	North End	Adams Avenue	AC	E	2	405	31	13,655	2/9/24	90	100	0	0	New Construction - Initial	1/1/80
208	2485	Canal Street	Lincoln Avenue	St. James Avenue	AC	E	2	1,000	36	27,125	2/28/24	90	44	54	2	New Construction - Initial	4/4/12
222	222	Carlsbad Street	East End	South End	AAC	E	2	755	32	28,958	10/31/23	90	100	0	0	Overlay - AC Structural	8/1/16
256	3312	Chatham	Promontory	Avalon Drive	AC	E	2	373	32	12,436	11/21/23	90	100	0	0	Surface Treatment - Slurry Seal	6/1/20
371	3276	Eaton	Hampshire Rd	Cheshire Rd	AC	E	2	216	32	7,662	11/21/23	90	100	0	0	Surface Treatment - Slurry Seal	6/1/20
845	1278	Palm Avenue	Wayfield Circle	Park Lane	AC	E	2	345	32	11,040	3/4/24	90	90	0	10	New Construction - Initial	1/1/80
897	1788	Presidio Way	San Luis Drive	Skylark Place	AC	E	2	130	32	4,160	10/24/23	90	100	0	0	Surface Treatment - Slurry Seal	1/1/18
916	1684	Ranchview Drive	Hilltop Drive	Bixby Avenue	AAC	E	2	435	32	13,920	1/4/24	90	100	0	0	Overlay - AC Structural	1/1/19
1328	8011	Riverbend Parkway	Shadyvale Street	Glassell Street	AC	E	2	982	44	43,208	3/19/24	90	96	0	4	New Construction - Initial	10/4/12
1165	1865	Villa Vista Way	Santiago Boulevard	Colorado Lane	AAC	E	2	1,240	32	39,680	12/13/23	90	100	0	0	Overlay - AC Structural	1/1/18
1176	3463	Vista Del Playa	Greengrove Drive	Canal Street	AC	E	2	185	32	5,920	2/16/24	90	100	0	0	Surface Treatment - Slurry Seal	1/1/98
1195	1967	Waterton Avenue	Orange Park Boulevard	Yosemite Avenue	AAC	E	2	765	32	24,288	11/14/23	90	100	0	0	Overlay - AC Structural	1/1/18
467	1010	Gardner Street	Chalynn Avenue	Tularosa Avenue	AAC	E	2	345	32	11,040	2/20/24	90	28	0	72	Surface Reconstruction - AC	1/1/02
1057	1679	Skywood Street	Skywood Street	Butterfield Road	AC	E	2	710	32	22,720	1/4/24	90	100	0	0	Surface Treatment - Slurry Seal	10/10/19
1221	2126	Widdows Way	Briardale Avenue	Palmdale Avenue	AAC	E	2	295	32	9,440	2/27/24	90	90	0	10	Overlay - AC Structural	10/11/19
1233	2861	Windgap Drive	Compton Avenue	South End	AC	E	2	270	32	10,140	3/12/24	90	100	0	0	Surface Treatment - Slurry Seal	1/1/04
120	633	Beechwood Street	Rainer Avenue	South End	AAC	E	2	325	32	10,400	2/29/24	90	100	0	0	Surface Treatment - Slurry Seal	3/21/22
467	1049	Gardner Street	North End	Quincy Avenue	AAC	E	2	190	32	7,180	2/9/24	90	100	0	0	Overlay - AC Structural	12/14/06
533	1044	Harwood Street	Trenton Avenue	South End	AAC	E	2	455	32	14,560	2/15/24	90	100	0	0	Surface Reconstruction - AC	9/20/07
537	3296	Hawksfield	West End	Portico Rd	AC	E	2	669	28	20,232	11/21/23	90	100	0	0	Surface Treatment - Slurry Seal	6/1/20
896	2646	Prescott Court	West End	Sierra Vista Drive	AC	E	2	445	32	15,740	11/20/23	90	95	0	5	Surface Treatment - Slurry Seal	6/1/20
911	1236	Ramona Street	Riverview Avenue	Santa Ana Canyon	AAC	E	2	1,265	32	40,480	2/28/24	90	98	0	2	Overlay - AC Structural	10/1/08

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
684	2045	Longhurst Street	Fitzgerald Avenue	Hillsborough Avenue	AC	E	2	145	32	4,640	12/4/23	90	100	0	0	Surface Treatment - Slurry Seal	8/1/17
559	3304	Highwood	Portico Rd	North End	AC	E	2	782	32	28,024	11/21/23	90	100	0	0	Surface Treatment - Slurry Seal	6/1/20
669	1111	Lincoln Street	Oakmont Avenue	Madison Avenue	AAC	E	2	1,440	31	44,640	2/2/24	90	100	0	0	Overlay - AC Structural	1/1/03
241	2499	Cedarwood Street	North End	Fairhaven Avenue	AAC	E	2	300	31	10,400	1/26/24	91	100	0	0	Overlay - AC Structural	12/14/06
313	1980	Crater Lake Avenue	Carlsebad Street	Mt. McKinley Boulevard	AAC	E	2	365	32	11,680	10/31/23	91	100	0	0	Overlay - AC Structural	8/1/16
540	1210	Hearthside Street	Riverdale Avenue	Rainier Avenue	AC	E	2	785	32	25,120	2/29/24	91	62	38	0	Surface Treatment - Slurry Seal	3/21/22
591	1537	James Street	North End	Del Valle Avenue	AAC	E	2	365	32	13,180	11/28/23	91	100	0	0	Overlay - AC Structural	10/1/08
889	1447	Ponderosa Street	Seba Avenue	Fairhaven Avenue	AC	E	2	855	32	27,360	3/15/24	91	87	0	13	New Construction - Initial	1/1/80
1027	1856	Shady Forest Lane	Maple Grove Road	Feather Hill Lane	AAC	E	2	1,160	32	37,620	12/5/23	91	90	0	10	Surface Treatment - Slurry Seal	11/1/08
1109	1540	Sycamore Avenue	Earlham Street	Hewes Street	AAC	E	2	475	32	14,816	11/27/23	91	100	0	0	Overlay - AC Structural	10/1/08
1230	1349	Wilson Avenue	Sacramento Street	Hoover Avenue	AAC	E	2	1,085	31	33,635	2/8/24	91	100	0	0	2 in overlay	8/29/07
148	2645	Bonita Court	West End	Sierra Vista Drive	AC	E	2	220	32	8,540	11/20/23	91	93	7	0	Surface Treatment - Slurry Seal	6/1/20
461	1701	Gaff Street	Buoy Avenue	St. James Avenue	AAC	E	2	235	31	7,285	2/28/24	91	100	0	0	Overlay - AC Structural	12/13/06
500	978	Grand Street	Palmyra Avenue	Culver Avenue	AC	E	2	625	36	22,500	2/26/24	91	92	0	8	Surface Treatment - Slurry Seal	1/1/03
529	1388	Hart Street	Lakeside Avenue	Brookside Avenue	AC	E	2	225	32	7,008	1/3/24	91	100	0	0	Surface Treatment - Slurry Seal	1/1/02
771	2087	Mount McKinley Boulevard	Crater Lake Avenue	Mountain Avenue	AAC	E	2	1,115	36	40,140	10/31/23	91	74	0	26	Overlay - AC Structural	8/1/17
899	2266	Primrose Drive	Main Street	North Emerald Drive	AC	E	2	791	30	23,730	3/8/24	91	75	0	25	New Construction - Initial	1/1/80
995	2636	San Rafael Court	Magdalena Drive	South End	AC	E	2	235	32	9,020	11/20/23	91	100	0	0	New Construction - Initial	1/1/80
1029	1822	Shaffer Street	Vista Del Gaviota	Meats Avenue	AAC	E	2	1,510	37	55,870	2/16/24	91	100	0	0	Overlay - AC Structural	8/1/17
75	625	Anchor Street	Lincoln Avenue	260' w/o Gallery Street	AAC	E	2	515	32	16,480	2/28/24	91	100	0	0	Overlay - AC Structural	12/13/06
110	642	Barkley Street	California Street	Lincoln Street	AAC	E	2	625	32	20,000	2/2/24	91	100	0	0	Overlay - AC Structural	1/1/03
678	2668	Loftwood	Kendra Drive	West End	AC	E	2	1,172	32	39,004	10/2/17	91	64	36	0	New Construction - Initial	1/1/80
823	1558	Orangegrove Avenue	Hewes Street	Hamlin Street	AAC	E	2	690	32	21,888	11/27/23	91	100	0	0	Overlay - AC Structural	10/1/08
198	2511	California Street	Adams Avenue	Quincy Avenue	AAC	E	2	430	32	13,760	2/9/24	91	100	0	0	Overlay - AC Structural	12/14/06
242	2530	Center Street	Trenton Avenue	South End	AAC	E	2	450	32	15,450	2/15/24	91	100	0	0	Surface Reconstruction - AC	9/20/07
293	2147	Comstock Street	North End	Glendora Avenue	AAC	E	2	240	33	7,920	2/28/24	91	100	0	0	Overlay - AC Structural	12/13/06
880	923	Pine Street	Van Bibber Avenue	Culver Avenue	AAC	E	2	415	32	13,280	2/23/24	91	98	0	2	Overlay - AC Structural	1/1/03
963	969	Rosewood Avenue	Cypress Street	Fashion Park Street	AAC	E	2	290	34	9,860	3/12/24	91	100	0	0	Overlay - AC Structural	10/11/19
1100	1674	Sunview Drive	Santa Ana Canyon	East End	AAC	E	2	880	32	28,160	1/4/24	91	100	0	0	Overlay - AC Structural	1/1/19
1161	2641	Villanueva Drive	West End	San Lorenzo Court	AC	E	2	1,455	32	46,560	11/20/23	91	42	0	58	New Construction - Initial	1/1/80
1252	1541	Wrightwood Street	North End	Spring Street	AAC	E	2	205	32	8,060	3/6/24	91	64	0	36	Overlay - AC Structural	10/1/08
128	3125	Big Sky	Adobe Way	North End	AC	E	2	583	36	23,988	11/28/23	91	90	0	10	Surface Treatment - Slurry Seal	1/1/18
906	1048	Quincy Avenue	California Street	Lincoln Street	AAC	E	2	865	32	27,680	2/9/24	91	100	0	0	Overlay - AC Structural	12/14/06
1213	1554	White Dove Avenue	Swan Street	East End	AC	E	2	375	32	13,500	11/27/23	91	75	25	0	Surface Treatment - Slurry Seal	6/1/20
106	634	Bailey Drive	Riding Way	Southeast End	AAC	E	2	235	32	9,020	12/13/23	91	100	0	0	Overlay - AC Structural	1/1/18
366	1710	Dunbar Street	St. James Avenue	South End	AAC	E	2	135	31	4,185	2/28/24	91	98	2	0	Surface Reconstruction - AC	1/1/04
414	2652	Fairecliff Drive	Crown Parkway	Skyline Drive	AC	E	2	190	32	6,580	11/20/23	91	100	0	0	Surface Treatment - Slurry Seal	3/21/22
669	1131	Lincoln Street	Collins Avenue	Oakmont Avenue	AAC	E	2	760	31	23,560	2/2/24	91	100	0	0	Overlay - AC Structural	1/1/03
669	1057	Lincoln Street	North End	Adams Avenue	AAC	E	2	405	32	12,960	2/9/24	91	100	0	0	Overlay - AC Structural	1/1/04
702	1035	Magnolia Street	Sycamore Avenue	Palm Avenue	AC	E	2	615	27	16,605	2/23/24	91	95	0	5	New Construction - Initial	1/1/80
772	1262	Mount Vernon Avenue	Wayfield Street	525' e/o Wayfield Street	AAC	E	2	525	31	16,275	2/27/24	91	62	30	8	Surface Treatment - Slurry Seal	5/27/25
845	1295	Palm Avenue	West End	Sacramento Street	AAC	E	2	170	32	6,940	2/13/24	91	92	0	8	Overlay - AC Structural	10/10/19
870	3462	Pearl Street	Bobwhite Way	Cannon Street	AAC	E	2	47	36	1,476	11/1/23	91	100	0	0	Overlay - AC Structural	8/1/16
1068	2163	Spring Street	McPherson Street	Prospect Street	AC	E	2	1,215	23	27,945	3/29/24	91	100	0	0	New Construction - Initial	1/1/80
284	1427	Coate Road	Gainsborough Road	Larkstone Drive	AAC	E	2	450	31	14,450	2/22/24	91	100	0	0	2 in overlay	8/28/07
422	966	Fashion Park Street	Tularosa Avenue	Fairway Drive	AAC	E	2	660	34	22,440	3/12/24	91	100	0	0	Overlay - AC Structural	10/11/19
462	3459	Gainsborough Road	Coate Road	Larkstone Drive	AAC	E	2	880	31	28,030	2/22/24	91	94	0	6	2 in overlay	8/28/07
588	1054	Jacaranda Avenue	Glassel St	Grand St	AAC	E	2	673	30	20,070	3/5/24	91	57	0	43	Overlay - AC Structural	12/13/06
604	2110	Joshua Tree Avenue	West End	Orange Park Boulevard	AAC	E	2	355	32	12,860	10/31/23	91	100	0	0	Overlay - AC Structural	1/1/18
1065	3139	Sonora Circle	Stetson	North End	AC	E	2	472	32	16,604	11/28/23	91	100	0	0	New Construction - Initial	1/1/80
242	2526	Center Street	Walnut Avenue	Palm Avenue	AAC	E	2	1,250	32	40,000	2/9/24	91	100	0	0	Overlay - AC Structural	1/1/18
342	2625	Deershire Court	Fairfield Lane	North End	AC	E	2	465	32	17,928	10/17/23	91	100	0	0	Surface Treatment - Slurry Seal	1/1/18
730	1076	Marquart Street	Candlewood Avenue	Concord Avenue	AAC	E	2	225	32	7,200	3/4/24	91	58	0	42	Surface Treatment - Slurry Seal	5/27/25
1046	2643	Sierra Vista Drive	Serrano Avenue	Apache Creek Road	AC	E	2	1,575	30	47,250	11/20/23	91	100	0	0	Surface Treatment - Slurry Seal	6/1/20
1226	1743	Williamsburg Street	North End	Lexington Avenue	AAC	E	2	395	32	14,440	11/21/23	91	100	0	0	Overlay - AC Structural	1/1/02
139	607	Blake Street	Trenton Avenue	South End	AAC	E	2	455	32	14,560	2/15/24	91	100	0	0	Surface Reconstruction - AC	9/20/07
145	598	Bobwhite Way	North End (near Pearl Street)	South End	AAC	E	2	385	32	15,916	11/1/23	91	100	0	0	Overlay - AC Structural	8/1/16
208	2537	Canal Street	St. James Avenue	Heim Avenue	AC	E	2	850	32	27,200	2/28/24	91	100	0	0	New Construction - Initial	4/4/12
249	2553	Chandler Ranch	Chapman Avenue	Ciriollo Circle	AAC	E	2	1,350	36	48,600	10/24/23	91	100	0	0	Overlay - AC Structural	8/1/17

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
272	2435	Citrus Street	North End	Walnut Avenue	AAC	E	2	290	31	10,040	3/14/24	91	26	74	0	Surface Reconstruction - AC	1/1/02
364	1218	Driftwood Street	North End	Meadowbrook Avenue	AAC	E	2	465	36	16,740	2/29/24	91	100	0	0	Surface Treatment - Slurry Seal	3/21/22
555	1289	Highland Street	Barkley Avenue	Mayfair Avenue	AAC	E	2	1,005	31	31,155	2/27/24	91	53	0	47	Overlay - AC Structural	1/1/02
1140	1013	Tularosa Avenue	Cambridge Street	Gardner Street	AAC	E	2	375	31	11,625	2/20/24	91	53	0	47	Overlay - AC Structural	10/1/08
1187	1284	Wayfield Circle	Orange Grove Avenue	Walnut Avenue	AAC	E	2	540	31	16,740	2/26/24	91	100	0	0	Surface Reconstruction - AC	1/1/04
66	3342	Altaview	Sky Gate Lane	Avalon Avenue	AC	E	2	981	30	30,180	11/20/23	92	100	0	0	Surface Treatment - Slurry Seal	6/1/20
333	1038	Dana Place	California Street	East End	AAC	E	2	950	32	30,400	2/21/24	92	100	0	0	2 in overlay	8/1/09
424	1852	Feather Hill Drive	Maple Grove Road	Ridge Park Lane	AC	E	2	230	32	8,110	12/5/23	92	100	0	0	Surface Treatment - Slurry Seal	11/1/08
512	1190	Greenway Avenue	Crestwood Street	Glassell Street	AAC	E	2	685	32	21,760	2/29/24	92	92	0	8	Cold Milling	12/14/06
512	1190	Greenway Avenue	Crestwood Street	Glassell Street	AAC	E	2	685	32	21,760	2/29/24	92	92	0	8	Overlay - AC Structural	12/14/06
512	1190	Greenway Avenue	Crestwood Street	Glassell Street	AAC	E	2	685	32	21,760	2/29/24	92	92	0	8	Patching - AC Leveling	12/14/06
543	2778	Heatherview Lane	Fairfield	Firenza	AC	E	2	572	32	19,054	10/17/23	92	100	0	0	Surface Treatment - Slurry Seal	3/21/22
551	1598	Hidden Canyon	Canyon View Avenue	Pinacle Pointe	AC	E	2	140	32	4,224	10/26/23	92	100	0	0	Surface Treatment - Slurry Seal	1/1/04
575	1812	Horseshoe Road	Orange Park Boulevard	Sundance Circle	AAC	E	2	1,100	21	23,100	10/26/23	92	48	0	52	Overlay - AC Structural	1/1/21
739	1238	Meadowbrook Avenue	Sunset Street	Baldwin Avenue	AAC	E	2	730	32	23,360	2/29/24	92	100	0	0	Overlay - AC Structural	10/1/08
967	2037	Roxbury Street	Regency Avenue	Springfield Street	AC	E	2	370	32	11,840	12/4/23	92	100	0	0	Surface Treatment - Slurry Seal	8/1/17
967	2038	Roxbury Street	Springfield Street	Hillsborough Avenue	AC	E	2	325	32	11,150	12/4/23	92	85	0	15	Surface Treatment - Slurry Seal	8/1/17
1032	1040	Shattuck Place	Maple Avenue	Chapman Avenue	AAC	E	2	645	34	21,930	2/21/24	92	93	0	7	Overlay - AC Structural	7/1/09
6	3118	Adobe Way	Hewes Street	Big Sky Lane	AC	E	2	196	34	5,034	11/28/23	92	100	0	0	New Construction - Initial	1/1/80
365	1654	Dunas Street	La Veta Avenue	120' S Dixon Avenue	AAC	E	2	625	32	20,000	2/20/24	92	70	0	30	Overlay - AC Structural	6/1/21
497	1725	Granada Drive	Elsinore Avenue	Linda Vista Street	AC	E	2	815	32	26,080	11/2/23	92	57	0	43	Surface Treatment - Slurry Seal	3/21/22
815	1686	Olive Avenue	Orange-Olive Avenue	200' n/o Buena Vista Street	AC	E	2	490	32	15,680	3/19/24	92	100	0	0	Surface Treatment - Slurry Seal	1/1/02
848	800B	Palmyra Avenue	RR Crossing	Lemon Street	AC	E	2	653	38	24,814	3/5/24	92	95	0	5	Surface Treatment - Slurry Seal	1/1/03
1153	1367	Van Owen Avenue	Kathleen Street	East End	AAC	E	2	305	32	11,260	3/4/24	92	79	0	21	Overlay - AC Structural	1/1/04
1262	2108	Yosemite Avenue	Waterton Avenue	Orange Park Boulevard	AAC	E	2	855	32	27,168	11/14/23	92	100	0	0	Overlay - AC Structural	1/1/18
268	2627	Christine Street	Silverleaf Avenue	Sycamore Avenue	AAC	E	2	325	32	10,208	11/27/23	92	69	0	31	Overlay - AC Structural	10/1/08
451	1762	Fort Road	Deerwood Street	White Oak Ridge	AC	E	2	125	32	4,000	10/19/23	92	100	0	0	Surface Treatment - Slurry Seal	3/21/22
720	1034	Maplewood Street	Sycamore Avenue	South End	AAC	E	2	425	32	13,600	2/23/24	92	84	0	16	Overlay - AC Structural	10/1/08
727	2238	Marks Way	Chapman Avenue	Almond Avenue	AC	E	2	605	31	18,755	3/5/24	92	97	0	3	New Construction - Initial	4/3/12
900	3349	Promontory	Norfolk	Chatham	AC	E	2	705	32	24,060	11/21/23	92	94	0	6	Surface Treatment - Slurry Seal	6/1/20
1197	996	Waverly Street	Almond Avenue	Palmyra Avenue	AAC	E	2	600	14	6,900	2/23/24	92	56	0	44	Overlay - AC Structural	10/1/08
856	2237	Park Central Avenue	195' w/o The City Drive	The City Drive	AAC	I	2	195	44	8,220	4/2/24	92	100	0	0	Surface Reconstruction - AC	9/1/08
108	611	Baldwin Avenue	West End	Ramona Street	AAC	E	2	850	32	27,200	2/28/24	92	100	0	0	Overlay - AC Structural	10/1/08
419	968	Fairway Drive	Cypress Street	Fashion Park Street	AAC	E	2	235	34	7,990	3/12/24	92	100	0	0	Overlay - AC Structural	10/11/19
597	2275	Jewell Place	Maple Avenue	Chapman Avenue	AC	E	2	605	32	19,360	3/4/24	92	100	0	0	New Construction - Initial	1/1/80
612	1365	Kathleen Street	Trenton Avenue	Katella Avenue	AAC	E	2	525	32	17,300	3/4/24	92	89	0	11	Overlay - AC Structural	1/1/04
629	1746	Klamath Place	North End	Shoshone Avenue	AAC	E	2	205	32	8,060	11/29/23	92	83	0	17	Overlay - AC Structural	1/1/21
993	2648	San Marcos Court	West End	Sierra Vista Drive	AC	E	2	460	32	16,220	11/20/23	92	100	0	0	Surface Treatment - Slurry Seal	6/1/20
1191	977	Washington Avenue	Harwood Street	Cambridge Street	AC	E	2	625	35	21,875	3/13/24	92	100	0	0	Surface Treatment - Slurry Seal	1/1/03
264	3137	Cheyenne	Stetson	North End	AC	E	2	830	32	28,810	11/28/23	92	93	0	7	New Construction - Initial	1/1/80
371	3278	Eaton	Portico Ter	Hampshire Rd	AC	E	2	572	32	18,304	11/21/23	92	100	0	0	Surface Treatment - Slurry Seal	6/1/20
467	1006	Gardner Street	Palmyra Avenue	Van Bibber Avenue	AAC	E	2	355	31	11,005	2/20/24	92	73	27	0	Overlay - AC Structural	10/1/08
472	1676	Gayle Street	Butterfield Road	Bixby Avenue	AC	E	2	640	32	20,480	1/4/24	92	100	0	0	Surface Treatment - Slurry Seal	10/10/19
843	1747	Pala Place	North End	Shoshone Avenue	AAC	E	2	140	32	5,980	11/29/23	92	100	0	0	Overlay - AC Structural	1/1/21
1140	967	Tularosa Avenue	West End	Fashion Park Street	AAC	E	2	300	34	10,200	3/12/24	92	100	0	0	Overlay - AC Structural	10/11/19
438	1260	First Street	North End	Chapman Avenue	AC	E	2	620	32	19,648	2/20/24	92	41	0	59	Grind Overlay with Dig Outs	10/1/14
500	1043	Grand Street	Trenton Avenue	South End	AAC	E	2	455	32	15,610	2/15/24	92	48	0	52	Surface Reconstruction - AC	9/20/07
555	2171	Highland Street	North End	Van Owen Avenue	AAC	E	2	745	36	26,820	3/1/24	92	87	0	13	Overlay - AC Structural	1/1/02
927	1756	Richard Street	North End	Valencia Drive	AC	E	2	435	32	15,420	11/2/23	92	100	0	0	Surface Treatment - Slurry Seal	1/12/24
963	1018	Rosewood Avenue	Cambridge Street	East End	AAC	E	2	840	31	26,040	2/21/24	92	48	0	52	Surface Reconstruction - AC	1/1/02
974	1862	Sacramento Street	North End	Villa Vista Way	AAC	E	2	185	31	7,235	12/12/23	92	100	0	0	Overlay - AC Structural	1/1/18
1008	2649	Santa Isabel Court	North End	San Marcos Court	AC	E	2	110	50	6,000	11/20/23	92	100	0	0	Surface Treatment - Slurry Seal	6/1/20
147	190	Bond Avenue	120' E Bridle Path	Birchwood Road	AC	E	4	450	40	17,000	11/27/23	92	100	0	0	New Construction - Initial	1/1/80
198	2512	California Street	Wilson Avenue	Adams Avenue	AAC	E	2	260	32	8,320	2/9/24	92	78	0	22	Overlay - AC Structural	1/1/04
470	1914	Gates Avenue	Cleveland Street	East End	AAC	E	2	220	32	7,040	2/27/24	92	100	0	0	Overlay - AC Structural	6/1/19
561	1905	Hillcrest Avenue	Stoneridge Street	East End	AAC	E	2	880	32	28,910	12/13/23	92	100	0	0	Overlay - AC Structural	1/1/21
828	1150	Orange Street	Lomita Avenue	South End	AC	E	2	300	32	10,650	3/11/24	92	100	0	0	Complete Reconstruction - AC	10/1/08
1146	2391	University Avenue	Glassell Street	330' e/o Glassell Street	AC	E	2	330	32	10,560	12/7/17	92	33	35	32	New Construction - Initial	1/1/80
1150	1936	Valley View Drive	Hilltop Drive	Bixby Avenue	AAC	E	2	495	32	15,480	1/4/24	92	100	0	0	Overlay - AC Structural	1/1/19

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1194	2057	Waterford Street	Newgate Way	South End	AC	E	2	825	25	22,410	12/6/23	92	100	0	0	Surface Treatment - Slurry Seal	8/1/17
390	1361	Elmwood Street	North End	Athens Avenue	AAC	E	2	190	32	6,080	3/4/24	92	93	0	7	Overlay - AC Structural	11/13/06
419	1452	Fairway Drive	Tustin Street	La Veta Avenue (Frontage)	AC	E	2	1,490	32	47,680	2/23/24	92	93	0	7	Surface Reconstruction - AC	6/1/08
531	1208	Hartman Street	Rainer Avenue	Ashwood Street	AAC	E	2	940	32	30,080	2/29/24	92	93	0	7	Overlay - AC Structural	3/3/22
785	2056	Newgate Way	Meats Avenue	Waterford Street	AC	E	2	170	36	5,820	4/15/24	92	100	0	0	Surface Treatment - Slurry Seal	8/1/17
881	1202	Pinewood Street	Rainer Avenue	Ashwood Street	AC	E	2	1,060	32	33,920	2/29/24	92	92	0	8	Surface Treatment - Slurry Seal	11/1/08
343	1760	Deerwood Street	North End	Ironwood Avenue	AC	E	2	740	32	25,180	10/17/23	92	100	0	0	Surface Treatment - Slurry Seal	3/21/22
345	1615A	Del Valle Avenue	Gravier Street	Esplanade St	AC	E	2	1,274	32	40,768	11/28/23	92	97	0	3	Surface Treatment - Slurry Seal	1/1/96
474	1968	Glacier Street	Smokey Avenue	Waterton Avenue	AAC	E	2	290	32	10,030	10/31/23	92	100	0	0	Overlay - AC Structural	1/1/18
573	1372	Hoover Avenue	Handy Street	Wanda Road	AAC	E	2	1,485	32	47,520	2/8/24	92	100	0	0	Overlay - AC Structural	7/1/08
874	2187	Pepper Street	North End	La Veta Avenue	AAC	E	2	690	40	27,600	4/10/24	92	100	0	0	Overlay - AC Structural	1/1/97
990	1721	San Juan Drive	Navarro Place	Jamestown Way	AAC	E	2	1,130	32	36,160	11/16/23	92	60	0	40	Overlay - AC Structural	1/1/04
1010	1783	Santa Maria Street	Salinas Court	San Luis Drive	AC	E	2	250	32	8,750	10/24/23	92	100	0	0	Surface Treatment - Slurry Seal	1/1/18
428	1843	Fern Street	Grove Avenue	Taft Avenue	AAC	E	2	1,095	32	35,790	1/3/24	92	94	0	6	Overlay - AC Structural	1/1/21
135	622	Bixby Avenue	Gayle Street	Tustin Street	AAC	E	2	1,230	32	39,360	1/4/24	93	100	0	0	Overlay - AC Structural	1/1/19
489	1542	Glenrose Street	North End	Spring Street	AAC	E	2	205	32	8,060	1/2/24	93	72	0	28	Overlay - AC Structural	10/1/08
568	1937	Hillview Drive	Bolingridge Drive	Sunview Drive	AAC	E	2	280	32	8,960	1/4/24	93	100	0	0	Overlay - AC Structural	1/1/19
792	1074	Nordic Drive	Taft Avenue	Concord Avenue	AAC	E	2	400	32	12,800	2/27/24	93	86	0	14	Surface Treatment - Slurry Seal	5/27/25
1049	1075	Silverwood Street	Candlewood Avenue	Chestnut Avenue	AAC	E	2	555	31	17,205	3/4/24	93	62	0	38	Surface Treatment - Slurry Seal	5/27/25
1054	2651	Skyline Drive	Fairecliff Drive	Andover Drive	AC	E	2	697	32	23,804	11/20/23	93	100	0	0	Surface Treatment - Slurry Seal	3/21/22
1168	1479	Violet Lane	Palmyra Avenue	Craig Drive	AAC	E	2	665	32	21,280	2/14/24	93	96	0	4	Overlay - AC Structural	10/1/07
1203	1193	West Way Avenue	West End	Crestwood Street	AAC	E	2	345	32	11,040	3/1/24	93	84	3	13	Cold Milling	12/14/06
1203	1193	West Way Avenue	West End	Crestwood Street	AAC	E	2	345	32	11,040	3/1/24	93	84	3	13	Overlay - AC Structural	12/14/06
1203	1193	West Way Avenue	West End	Crestwood Street	AAC	E	2	345	32	11,040	3/1/24	93	84	3	13	Patching - AC Leveling	12/14/06
331	970	Cypress Street	Rosewood Avenue	Fairway Drive	AAC	E	2	240	34	8,160	3/12/24	93	100	0	0	Overlay - AC Structural	10/11/19
516	1842	Grove Avenue	Fern Street	Santiago Boulevard	AAC	E	2	335	32	11,470	1/3/24	93	100	0	0	Overlay - AC Structural	1/1/21
847	1080	Palmdale Avenue	Woodside Street	Cambridge Street	AAC	E	2	740	31	22,940	2/27/24	93	91	0	9	Overlay - AC Structural	1/1/02
1076	1719	Stacey Lee Lane	Santiago Boulevard	East End	AAC	E	2	280	32	10,760	3/22/24	93	100	0	0	Overlay - AC Structural	1/1/21
1224	1816	Wildhorse Circle	Saddleback Drive	South End	AAC	E	2	290	21	6,090	10/26/23	93	100	0	0	Overlay - AC Structural	1/1/21
715	2403	Maple Avenue	Lemon Street	Glassell Street	PCC	I	2	665	40	26,600	8/28/24	93	64	36	0	Complete Reconstruction - PCC	10/1/13
426	791	Feldner Road	Chapman Avenue	Almond Aveneue	AAC	E	2	615	32	19,680	3/5/24	93	100	0	0	Overlay - AC Structural	1/13/16
593	1724	Jamestown Way	Valley Forge Drive	San Juan Drive	AAC	E	2	630	32	19,968	11/16/23	93	100	0	0	Overlay - AC Structural	1/31/16
85	828	Arabian Avenue	Stallion Street	East End	AAC	E	2	295	32	9,348	10/25/23	93	58	0	42	Overlay - AC Structural	1/1/04
135	621	Bixby Avenue	Orange Avenue	Gayle Street	AAC	E	2	975	26	25,350	1/4/24	93	100	0	0	Overlay - AC Structural	1/1/19
135	620	Bixby Avenue	Magnolia Avenue	Orange Avenue	AAC	E	2	390	32	12,480	1/4/24	93	100	0	0	Overlay - AC Structural	1/1/19
200	2550	Calle Baja	Calle Grande	South End	AAC	E	2	530	32	18,460	10/24/23	93	100	0	0	Overlay - AC Structural	8/1/17
242	2521	Center Street	Almond Avenue	Washington Avenue	AAC	E	2	290	32	9,280	2/26/24	93	99	0	1	Overlay - AC Structural	8/1/16
317	2269	Crescent Drive	Walnut Avenue	Beverly Drive	AC	E	2	230	31	7,130	3/8/24	93	100	0	0	Surface Reconstruction - AC	7/24/07
394	1729	Encanto Street	Granada Drive	South End	AC	E	2	995	36	39,868	11/2/23	93	100	0	0	Surface Treatment - Slurry Seal	3/21/22
424	1854	Feather Hill Drive	Shady Forest Lane	Meadow Grove Rd	AAC	E	2	230	36	8,024	12/5/23	93	100	0	0	Overlay - AC Structural	11/1/08
454	2656	Foxworth Drive	Crown Parkway	South End	AC	E	2	199	32	7,868	11/20/23	93	100	0	0	Surface Treatment - Slurry Seal	6/1/20
533	1110	Harwood Street	North End	Walnut Avenue	AC	E	2	315	32	10,080	2/9/24	93	100	0	0	Surface Reconstruction - AC	1/1/02
677	1051	Locust Avenue	Lincoln Street	Shattuck Place	AAC	E	2	380	32	12,160	2/9/24	93	100	0	0	Overlay - AC Structural	1/1/02
715	747	Maple Avenue	Donneybrooke Street	Bitterbush Street	AC	E	2	260	36	9,360	8/28/24	93	100	0	0	Surface Treatment - Slurry Seal	1/1/97
721	1008	Mardell Avenue	Gardner Street	East End	AAC	E	2	605	31	19,905	2/20/24	93	84	0	16	Overlay - AC Structural	10/1/08
805	1601	Oak Tree Lane	Canyon View Avenue	Wildflower Avenue	AC	E	2	160	34	5,440	11/1/23	93	100	0	0	Surface Treatment - Slurry Seal	1/1/18
845	3431	Palm Avenue	Bixby Ave	County Limit	AC	E	2	100	38	3,800	1/4/24	93	100	0	0	New Construction - Initial	1/1/80
925	1894	Renee Street	North End	Avendia Palmar	AC	E	2	135	32	4,104	11/1/23	93	100	0	0	Reconstruct with AC	1/31/16
1032	1052	Shattuck Place	North End	Locust Avenue	AAC	E	2	260	32	9,420	2/9/24	93	100	0	0	Reconstruct with AC	1/31/16
1186	540	Walnut Avenue	Swidler Place	Gravier Street	AAC	E	2	155	36	5,580	1/2/24	93	100	0	0	Overlay - AC Structural	10/1/08
1204	1682	Westhaven Street	Bolingridge Drive	Bixby Avenue	AAC	E	2	1,085	32	34,720	1/4/24	93	100	0	0	Overlay - AC Structural	1/1/19
707	2166	Malena Street	Chapman Avenue	Almond Avenue	AAC	I	2	455	32	14,560	1/26/24	93	68	0	32	2 in overlay	8/1/09
344	1840	Del Mar Avenue	Park Lane	Highland Street	AC	E	2	270	36	9,720	3/4/24	93	93	0	7	New Construction - Initial	1/1/80
635	1617	La Nae Street	North End	El Carmen Avenue	AAC	E	2	440	33	16,020	11/28/23	93	88	0	12	2 in overlay	8/31/07
1112	3490	Taft Avenue	Cannon Street	End	AC	E	2	386	27	10,422	11/21/23	93	100	0	0	New Construction - Initial	10/30/12
330	1845	Cunningham Court	West End	Meadow Grove Road	AAC	E	2	605	32	22,360	12/5/23	93	100	0	0	2 in overlay	8/1/09
422	965	Fashion Park Street	La Veta Avenue	Tularosa Avenue	AAC	E	2	265	36	9,540	3/12/24	93	100	0	0	Surface Reconstruction - AC	6/1/08
669	2175	Lincoln Street	Locust Avenue	Collins Avenue	AAC	E	2	665	37	24,605	2/9/24	93	100	0	0	Overlay - AC Structural	1/1/04
850	1737	Palo Alto Place	Muir Drive	South End	AC	E	2	215	32	8,380	11/2/23	93	100	0	0	Surface Treatment - Slurry Seal	3/21/22

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1190	1903	Warbler Place	North End	Blueridge Avenue	AAC	E	2	520	32	19,140	1/3/24	93	100	0	0	Overlay - AC Structural	1/1/21
1213	1555	White Dove Avenue	West End	Swan Street	AAC	E	2	600	32	20,700	11/27/23	93	100	0	0	Overlay - AC Structural	1/1/21
151	2650	Boscana Court	West End	Sierra Vista Drive	AC	E	2	260	32	9,820	11/20/23	93	100	0	0	Surface Treatment - Slurry Seal	6/1/20
1111	757	Sylvan Circle	North End	Crystal View Avenue	AAC	E	2	170	32	5,440	2/29/24	93	100	0	0	Overlay - AC Structural	1/1/19
720	1029	Maplewood Street	Maple Avenue	Maplewood Place	AC	E	2	315	31	9,765	2/21/24	93	100	0	0	Surface Treatment - Slurry Seal	8/1/09
818	1626	Olympia Way	Spring Street	Maple Avenue	AAC	E	2	575	32	18,900	1/2/24	93	67	0	33	Overlay - AC Structural	10/10/19
1242	1657	Woodland Street	Larkstone Drive	Kirkwood Avenue	AAC	E	2	850	31	26,350	1/26/24	93	100	0	0	Overlay - AC Structural	12/14/06
331	2261	Cypress Street	Walnut Avenue	Sycamore Avenue	AC	I	2	635	35	22,015	3/14/24	93	66	0	34	New Construction - Initial	1/1/80
418	3271	Fairport	North End	Paragon Way	AC	E	2	271	32	10,172	12/6/17	93	100	0	0	New Construction - Initial	1/1/80
862	964	Parker Street	Culver Avenue	La Veta Avenue	AAC	E	2	600	32	19,200	3/12/24	93	65	0	35	Overlay - AC Structural	1/13/16
1092	2091	Suffolk Circle	Stallion Street	East End	AAC	E	2	305	32	11,260	10/25/23	93	79	0	21	Overlay - AC Structural	1/1/04
1109	2480	Sycamore Avenue	Clinton Street	East End	AC	E	2	101	30	4,030	2/13/24	93	87	0	13	Surface Treatment - Slurry Seal	1/1/98
516	2183	Grove Avenue	Orange-Olive Road	Shaffer Street	AAC	I	2	695	32	22,240	2/16/24	93	100	0	0	Overlay - AC Structural	1/1/19
144	574	Blueridge Avenue	Fern Street	Hart Street	AAC	E	2	730	32	24,110	1/3/24	94	100	0	0	Overlay - AC Structural	1/1/21
847	1081	Palmdale Avenue	Cambridge Street	Ebonywood Street	AAC	E	2	1,445	31	44,795	2/27/24	94	94	0	6	Overlay - AC Structural	1/1/19
261	3294	Cheshire	Eaton Ct	Kendra Drive	AC	E	2	1,513	32	48,916	11/21/23	94	100	0	0	Surface Treatment - Slurry Seal	6/1/20
544	2131	Heim Avenue	Torres Street	Canal Street	AC	E	2	935	36	33,660	2/28/24	94	100	0	0	New Construction - Initial	8/1/17
885	953	Pixley Street	Culver Avenue	La Veta Avenue	AC	E	2	615	30	18,450	3/12/24	94	62	0	38	Grind Overlay with Dig Outs	10/1/14
566	1992	Hillside Avenue	Sycamore Avenue	East End	AC	E	2	380	32	13,660	11/29/23	94	100	0	0	Surface Treatment - Slurry Seal	1/1/04
584	1758	Ironwood Avenue	Flowerwood Avenue	White Oak Ridge	AC	E	2	755	32	25,160	10/17/23	94	100	0	0	Surface Treatment - Slurry Seal	3/21/22
639	2647	Laguna Court	Sierra Vista Drive	West End	AC	E	2	545	32	18,940	11/20/23	94	100	0	0	Surface Treatment - Slurry Seal	6/1/20
816	958	Olive Street	Culver Avenue	La Veta Avenue	AC	E	2	615	36	22,140	3/5/24	94	30	0	70	Complete Reconstruction - AC	6/1/20
991	2638	San Lorenzo Court	Serrano Avenue	Magdalena Drive	AC	E	2	310	36	11,910	11/20/23	94	100	0	0	New Construction - Initial	1/1/80
1215	1586	White Oak Ridge	Newport Boulevard	Deep Springs Road	AAC	E	2	560	44	24,640	10/19/23	94	100	0	0	Overlay - AC Structural	1/31/16
1230	1094	Wilson Avenue	Glassell Street	Shaffer Street	AAC	E	2	1,255	31	38,905	3/5/24	94	100	0	0	Overlay - AC Structural	6/1/21
1230	1058	Wilson Avenue	California Street	Lincoln Street	AAC	E	2	665	32	21,280	2/9/24	94	100	0	0	Overlay - AC Structural	1/1/04
142	605	Blue Jay Avenue	West End	Red Robin Street	AAC	E	2	950	32	32,650	11/27/23	94	100	0	0	Overlay - AC Structural	1/1/21
217	2543	Capistrano Place	Muir Drive	South End	AC	E	2	195	32	7,740	11/2/23	94	100	0	0	Surface Treatment - Slurry Seal	3/21/22
391	1740	Elsinore Avenue	West End	Linda Vista Street	AC	E	2	925	32	29,600	11/2/23	94	79	0	21	Surface Treatment - Slurry Seal	3/21/22
412	2621	Fairfield Lane	Biscayne Way	Heatherview Lane	AC	E	2	535	32	18,620	10/17/23	94	100	0	0	Surface Treatment - Slurry Seal	3/21/22
561	1902	Hillcrest Avenue	Fern Street	Hart Street	AAC	E	2	815	32	26,830	1/3/24	94	100	0	0	Overlay - AC Structural	1/1/21
669	1056	Lincoln Street	Adams Avenue	Locust Avenue	AAC	E	2	905	32	28,960	2/9/24	94	84	0	16	Overlay - AC Structural	1/1/04
930	1851	Ridge Park Lane	Villa Real Drive	South End	AAC	E	2	655	32	22,760	12/5/23	94	100	0	0	Overlay - AC Structural	10/1/08
960	1118	Rose Avenue	California Street	Lincoln Street	AC	E	2	620	31	19,220	2/2/24	94	100	0	0	Surface Reconstruction - AC	1/1/03
1053	1597	Skylark Place	Newport Boulevard	Presido Way	AC	E	2	1,290	36	46,440	10/24/23	94	100	0	0	Surface Treatment - Slurry Seal	6/1/21
1191	976	Washington Avenue	Center Street	Harwood Street	AC	E	2	950	34	32,300	2/26/24	94	100	0	0	Surface Treatment - Slurry Seal	1/1/03
1215	1769	White Oak Ridge	Deep Spring Road	Royal Oak Drive	AAC	E	2	1,565	36	56,340	10/17/23	94	100	0	0	Overlay - AC Structural	1/31/16
1222	2476	Wilderness Avenue	Stallion Street	East End	AAC	E	2	340	32	12,678	10/25/23	94	100	0	0	Overlay - AC Structural	1/1/04
1254	1931	Wyngate Road	Nohl Ranch Road	South End	AAC	E	2	315	32	11,580	1/4/24	94	100	0	0	Overlay - AC Structural	1/1/21
1029	2194	Shaffer Street	Chapman Avenue	Almond Avenue	AAC	I	2	610	34	20,740	3/14/24	94	100	0	0	Overlay - AC Structural	1/1/93
170	346	Briardale Avenue	Orange-Olive Road	East End	AAC	E	2	815	36	30,690	2/27/24	94	84	0	16	Overlay - AC Structural	10/11/19
344	1916	Del Mar Avenue	Cleveland Street	Chouteau Street	AAC	E	2	940	32	30,080	2/27/24	94	0	0	100	Overlay - AC Structural	6/1/19
356	1759	Dogwood Street	Flowerwood Avenue	Ironwood Avenue	AC	E	2	305	32	9,504	10/17/23	94	100	0	0	Surface Treatment - Slurry Seal	3/21/22
1032	1039	Shattuck Place	Dana Place	Maple Avenue	AAC	E	2	285	32	9,120	2/21/24	94	90	0	10	Overlay - AC Structural	7/1/09
242	2491	Center Street	West End	First Street	AC	E	2	190	28	5,096	3/4/24	94	87	0	13	Grind Overlay with Dig Outs	10/1/14
242	2522	Center Street	Washington Avenue	Palmyra Avenue	AAC	E	2	325	32	10,400	2/26/24	94	100	0	0	Overlay - AC Structural	8/1/16
443	2150	Fletcher Street	Glassell Street	East End	AAC	E	2	1,150	36	41,400	3/1/24	94	100	0	0	Overlay - AC	2/29/16
886	1990	Playano Avenue	Yurok Avenue	East End	AAC	E	2	430	32	15,260	11/29/23	94	100	0	0	Overlay - AC Structural	1/1/21
906	1061	Quincy Avenue	Grand Street	Shaffer Street	AAC	E	2	620	31	19,220	3/5/24	94	100	0	0	Overlay - AC Structural	6/1/21
1327	8019	Ridgeway Road	Meadow Grove Road	End	AC	E	2	569	36	20,484	10/17/17	94	100	0	0	New Construction - Initial	10/4/12
1025	1791	Shadow Pines Road	Sage Hills Road	Woodwind Avenue	AC	E	2	500	32	17,500	10/17/23	94	100	0	0	Surface Treatment - Slurry Seal	3/21/22
259	2430	Cherry Drive	Eckhoff Street	Cedar Street	AAC	E	2	825	32	26,400	3/6/24	94	100	0	0	Overlay - AC Structural	1/1/22
847	1087	Palmdale Avenue	West End	East End	AC	E	2	745	36	26,820	2/27/24	94	100	0	0	Surface Treatment - Slurry Seal	1/1/04
1149	3418	Valley Glen Lane	Nohl Ranch Road	Nohl Canyon Road	AAC	E	2	1,250	26	32,344	1/4/24	94	79	0	21	Overlay - AC Structural	1/1/21
4	837	Adams Avenue	California Street	Tustin Avenue	AAC	E	2	1,590	32	50,880	2/9/24	94	100	0	0	Overlay - AC Structural	1/1/04
193	2486	Butterfield Road	Santa Ana Canyon	Bixby Avenue	AC	E	2	1,580	33	52,140	1/4/24	94	100	0	0	Surface Treatment - Slurry Seal	10/10/19
794	1925	Nordic Street	Meats Avenue	Del Mar Avenue	AAC	E	2	270	36	9,720	3/4/24	94	89	0	11	Overlay - AC Structural	1/1/04
1215	1768	White Oak Ridge	Royal Oak Drive	Fort Road	AAC	E	2	1,335	41	48,060	10/17/23	94	100	0	0	Overlay - AC Structural	1/31/16
1250	1764	Woodwind Avenue	West End	Shadow Pines Road	AC	E	2	1,510	32	61,320	10/17/23	94	100	0	0	Surface Treatment - Slurry Seal	3/21/22

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
277	2463	Cleveland Street	North End	Collins Avenue	AAC	E	2	575	31	18,925	2/9/24	94	100	0	0	Surface Reconstruction - AC	1/1/02
761	1089	Monroe Avenue	West End (near Harwood St)	East End	AAC	E	2	445	32	16,440	2/9/24	94	100	0	0	Overlay - AC Structural	1/1/04
1029	1078	Shaffer Street	Buckeyewood Avenue	Taft Avenue	AAC	E	2	1,370	36	49,320	2/16/24	94	100	0	0	Overlay - AC Structural	6/1/19
1029	1821	Shaffer Street	Meats Avenue	Buckeyewood Avenue	AAC	E	2	1,180	36	42,480	2/16/24	94	100	0	0	Overlay - AC Structural	6/1/19
718	3417	Maple Tree Street	North End	Nohl Ranch Road	AC	E	2	1,135	32	36,320	1/4/24	94	90	0	10	Surface Treatment - Slurry Seal	5/27/24
978	1765	Sage Hills Road	Shadow Pines Road	Woodwind Avenue	AC	E	2	545	32	18,190	10/17/23	94	100	0	0	Surface Treatment - Slurry Seal	3/21/22
1029	916	Shaffer Street	Washington Avenue	Palmyra Avenue	AC	E	2	290	30	8,700	3/13/24	94	92	0	8	Surface Treatment - Slurry Seal	1/1/03
461	1698	Gaff Street	Anchor Street	Buoy Avenue	AAC	E	2	1,155	31	35,805	2/28/24	95	100	0	0	Overlay - AC Structural	12/13/06
523	3309	Hampshire	Eaton Ct	Kendra Drive	AC	E	2	1,681	32	53,408	11/21/23	95	100	0	0	Surface Treatment - Slurry Seal	6/1/20
717	1857	Maple Grove Road	Feather Hill Lane	Shady Forest Lane	AAC	E	2	520	32	18,140	12/5/23	95	100	0	0	Surface Treatment - Slurry Seal	11/1/08
759	1744	Modoc Street	Taft Avenue	Shoshone Avenue	AAC	E	2	1,120	32	35,648	11/29/23	95	90	0	10	Overlay - AC Structural	1/1/21
605	1748	Juaneno Avenue	Chumash Street	East End	AAC	E	2	255	32	9,660	11/29/23	95	100	0	0	Overlay - AC Structural	1/1/21
103	832	Avila Place	North End	Valencia Drive	AAC	E	2	225	32	8,700	11/16/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
643	1991	Lakeside Avenue	Sycamore Street	East End	AAC	E	2	415	32	14,780	11/29/23	95	100	0	0	Overlay - AC Structural	1/1/21
7	855	Agate Street	North End	Meats Avenue	AAC	E	2	415	32	14,780	12/12/23	95	100	0	0	Overlay - AC Structural	8/30/21
133	2622	Biscayne Way	Fairfield Lane	Firenza Way	AC	E	2	310	32	10,420	10/17/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
144	575	Blueridge Avenue	Santiago Boulevard	East End	AAC	E	2	1,060	32	33,728	12/13/23	95	100	0	0	Overlay - AC Structural	1/1/19
168	2552	Briar Creek Road	Woodwind Avenue	Canyon View Avenue	AC	E	2	125	30	3,390	10/17/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
180	557	Brookside Avenue	Fern Street	Santiago Boulevard	AC	E	2	1,140	32	36,480	1/3/24	95	100	0	0	Overlay-Rubber Hot Mix	1/3/23
180	555	Brookside Avenue	Sycamore Street	Modoc Street	AAC	E	2	735	32	23,328	1/3/24	95	100	0	0	Overlay - AC Structural	1/1/21
242	2528	Center Street	North End	Jacaranda Avenue	AC	E	2	315	32	11,180	3/5/24	95	100	0	0	Complete Reconstruction - AC	10/1/08
244	2544	Cerritos Drive	Encanto Street	Cannon Street	AC	E	2	635	36	22,356	11/2/23	95	100	0	0	Surface Treatment - Slurry Seal	1/1/04
269	2471	Chumash Street	Playano Avenue	Shoshone Avenue	AAC	E	2	675	32	21,408	11/29/23	95	100	0	0	Overlay - AC Structural	1/1/21
295	1609	Condor Crest Avenue	Red Robin Street	Rancho Santiago Blvd	AC	E	2	155	32	4,768	11/27/23	95	100	0	0	Surface Treatment - Slurry Seal	6/1/20
302	1727	Corrida Place	Elsinore Avenue	South End	AAC	E	2	240	32	9,180	11/2/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
316	1800	Creekview Drive	North End	Horseshoe Road	AAC	E	2	615	21	12,915	10/26/23	95	100	0	0	Overlay - AC Structural	1/1/21
352	1847	Diamond Street	North End	Meats Avenue	AAC	E	2	410	32	14,620	12/12/23	95	100	0	0	Overlay - AC Structural	8/30/21
365	1629	Dunas Street	North End	Maple Avenue	AAC	E	2	125	33	5,625	1/2/24	95	100	0	0	Overlay - AC Structural	10/10/19
391	1739	Elsinore Avenue	Linda Vista Street	110' E Linda Vista Street	AC	E	2	110	32	3,520	11/2/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
436	2623	Firenza Way	Biscayne Way	Heatherview Lane	AC	E	2	460	32	14,528	10/17/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
497	1728	Granada Drive	Linda Vista Street	Encanto Street	AC	E	2	170	32	6,190	11/2/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
516	1923	Grove Avenue	Lincoln Street	East End	AAC	E	2	310	36	11,160	3/4/24	95	100	0	0	Overlay - AC Structural	1/1/04
529	1910	Hart Street	North End	Hillside Avenue	AC	E	2	215	32	8,380	1/3/24	95	100	0	0	Overlay-Rubber Hot Mix	1/3/23
529	1901	Hart Street	Blueridge Avenue	Hillcrest Avenue	AAC	E	2	255	32	9,660	1/3/24	95	100	0	0	Overlay - AC Structural	1/1/21
533	1088	Harwood Street	Monroe Avenue	Collins Avenue	AAC	E	2	775	31	24,025	2/9/24	95	100	0	0	Overlay - AC Structural	1/1/04
543	2624	Heatherview Lane	Old Camp Road	Fairfield	AC	E	2	112	32	3,584	10/17/23	95	100	0	0	Surface Treatment - Slurry Seal	1/1/18
587	1944	Ivy Hill Lane	West End	Maple Tree Street	AAC	E	2	305	32	11,560	1/4/24	95	100	0	0	Overlay - AC Structural	1/1/21
617	1996	Kennymead Avenue	Santiagon Canyon Road	Randall Street	AAC	E	2	1,520	26	39,520	10/25/23	95	100	0	0	Overlay - AC Structural	1/1/21
670	1735	Linda Vista Street	Elsinore Avenue	Muir Drive	AC	E	2	1,075	32	34,900	11/2/23	95	100	0	0	Mill and Overlay	3/3/22
687	2477	Loredo Avenue	Shadow Pines Road	White Oak Ridge	AC	E	2	120	36	4,064	10/17/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
689	1738	Los Altos Place	Muir Drive	South End	AC	E	2	190	32	7,180	11/2/23	95	100	0	0	Surface Treatment - Slurry Seal	1/1/04
755	703	Mills Drive	Alley Flower Street	Flower Street	AC	E	2	395	30	10,665	3/7/24	95	100	0	0	Surface Treatment - Slurry Seal	1/1/04
768	1849	Mori Lane	North End	Riding Way	AAC	E	2	180	32	7,260	12/12/23	95	100	0	0	Overlay - AC Structural	8/30/21
775	1736	Muir Drive	Linda Vista Street	South End	AC	E	2	745	36	26,995	11/2/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
778	2001	Mustang Avenue	Clydesdale Avenue	Randall Street	AAC	E	2	1,185	32	38,670	10/25/23	95	100	0	0	Overlay - AC Structural	1/1/21
805	1584	Oak Tree Lane	Willow Springs Road	Canyon View Avenue	AC	E	2	155	34	5,270	11/1/23	95	100	0	0	Surface Treatment - Slurry Seal	1/1/18
823	1120	Orangegrove Avenue	Lincoln Street	East End	AC	E	2	305	31	9,455	2/2/24	95	100	0	0	Surface Treatment - Slurry Seal	1/1/04
873	1943	Pepper Hill Lane	Maple Tree	East End	AC	E	2	475	32	16,773	1/4/24	95	100	0	0	Surface Treatment - Slurry Seal	5/27/24
892	3285	Portico Ter	Eaton Ct	Skytop Ct	AC	E	2	768	32	24,384	11/21/23	95	100	0	0	Surface Treatment - Slurry Seal	6/1/20
892	3320	Portico Ter	Skytop Ct	Kendra Dr	AC	E	2	1,450	32	46,400	11/21/23	95	100	0	0	Surface Treatment - Slurry Seal	6/1/20
937	1848	Riding Way	Agate Street	East End	AAC	E	2	480	32	16,860	12/12/23	95	100	0	0	Overlay - AC Structural	8/30/21
975	1815	Saddleback Drive	Orange Park Boulevard	Wildhorse Circle	AAC	E	2	640	21	13,440	10/26/23	95	100	0	0	Overlay - AC Structural	1/1/21
976	1801	Saddlehill Trail	Ranchwood Terrace	East End	AAC	E	2	1,645	20	34,698	10/26/23	95	100	0	0	Overlay - AC Structural	1/1/21
1015	1732	Sarita Place	North End	Valencia Drive	AAC	E	2	200	32	7,900	11/16/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
1028	1941	Shady Glen Lane	Maple Tree Street	Nohl Ranch Road	AAC	E	2	495	32	15,648	1/4/24	95	100	0	0	Overlay - AC Structural	1/1/21
1030	1630	Shasta Street	North End	Maple Avenue	AAC	E	2	125	31	5,375	1/2/24	95	100	0	0	Overlay - AC Structural	10/10/19
1042	1745	Shoshone Avenue	Sycamore Avenue	East End	AAC	E	2	1,625	32	53,500	11/29/23	95	100	0	0	Overlay - AC Structural	1/1/21
1052	3347	Sky Gate	Altaview Dr	East End	AC	E	2	171	30	4,950	11/21/23	95	100	0	0	Surface Treatment - Slurry Seal	6/1/20
1089	1904	Stoneridge Street	Blueridge Avenue	Hillcrest Avenue	AAC	E	2	230	31	7,630	12/13/23	95	100	0	0	Overlay - AC Structural	1/1/19

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1096	1813	Sundance Circle	Turnabout Road	East End	AAC	E	2	345	21	7,245	10/26/23	95	100	0	0	Overlay - AC Structural	1/1/21
1103	1553	Swan Street	Blue Jay Avenue	Bond Avenue	AAC	E	2	550	32	17,600	11/27/23	95	100	0	0	Overlay - AC Structural	1/1/21
1114	1802	Tanglewood Terrace	West End	Ranchwood Terrace	AAC	E	2	315	20	8,098	10/26/23	95	100	0	0	Overlay - AC Structural	1/1/21
1137	1770	Trails End Lane	Chapman Avenue	White Oak Ridge	AAC	E	4	500	58	28,500	10/19/23	95	100	0	0	Overlay - AC Structural	1/31/16
1142	1814	Turnabout Road	Sundance Circle	Wildhorse Circle	AAC	E	2	605	21	12,705	10/26/23	95	100	0	0	Overlay - AC Structural	1/1/21
1147	1755	Valencia Drive	West End	Linda Vista Street	AAC	E	2	1,120	32	37,638	11/2/23	95	100	0	0	Overlay - AC Structural	3/3/22
1161	2642	Villanueva Drive	San Lorenzo Court	East End	AC	E	2	170	32	6,940	11/20/23	95	100	0	0	New Construction - Initial	1/1/80
1166	1628	Vine Avenue	West End	Olympa Way	AAC	E	2	570	32	19,740	1/2/24	95	100	0	0	Overlay - AC Structural	10/10/19
1214	1933	White Lantern Lane	Nohl Canyon Road	Nohl Ranch Road	AAC	E	2	1,005	26	26,130	1/4/24	95	100	0	0	Overlay - AC Structural	1/1/21
1222	2092	Wilderness Avenue	Mustang Avenue	Kennymead Avenue	AAC	E	2	340	32	10,880	10/25/23	95	100	0	0	Overlay - AC Structural	1/1/21
1264	1989	Yurok Street	Taft Avenue	Shohone Avenue	AAC	E	2	935	32	29,728	11/29/23	95	100	0	0	Overlay - AC Structural	1/1/21
863	2655	Parkhurst Drive	Crown Parkway	Serrano Avenue	AC	I	2	336	32	10,752	11/20/23	95	100	0	0	Surface Treatment - Slurry Seal	3/21/22
328	951	Culver Avenue	Parker Street	Pixley Street	AC	E	2	305	30	9,150	3/12/24	95	100	0	0	Grind Overlay with Dig Outs	10/1/14
328	950	Culver Avenue	Clark Street	Parker Street	AC	E	2	335	32	10,720	3/12/24	95	100	0	0	Grind Overlay with Dig Outs	10/1/14
368	762	Dunton Avenue	Batavia Street	Kennedy Street	AAC	E	2	420	32	13,440	2/29/24	95	83	0	17	Overlay - AC Structural	1/1/19
395	609	Ensign Avenue	Bortz Street	East End	AAC	E	2	165	31	5,115	2/28/24	95	100	0	0	Overlay - AC Structural	8/2/21
3	790	Acacia Avenue	Lime Street	Batavia Street	AC	E	2	605	32	19,360	3/4/24	95	100	0	0	Surface Reconstruction - AC	1/1/91
328	952	Culver Avenue	Pixley Street	Montgomery Street	AC	E	2	350	32	11,200	3/12/24	95	100	0	0	Grind Overlay with Dig Outs	10/1/14
500	935	Grand Street	River Avenue	South End	AC	E	2	355	25	8,875	2/26/24	95	100	0	0	Surface Treatment - Slurry Seal	1/1/95
589	1070	Jackson Avenue	Grand Street	East End	AAC	E	2	380	31	12,880	3/5/24	95	100	0	0	Overlay - AC Structural	6/1/21
731	1294	Martha Avenue	West End	Sacramento Street	AAC	E	2	170	32	6,940	2/13/24	95	84	0	16	Overlay - AC Structural	10/10/19
972	1655	Ruth Place	Prospect Street	Olympia Street	AAC	E	2	935	32	29,670	2/20/24	95	83	0	17	Overlay - AC Structural	6/1/21
1029	913	Shaffer Street	La Veta Avenue	South End	AC	E	2	475	36	17,100	2/26/24	95	79	0	21	Complete Reconstruction - AC	6/1/20
332	1303	Dana Avenue	West End	Sacramento Street	AAC	E	2	110	31	4,910	2/13/24	95	85	0	15	Overlay - AC Structural	10/10/19
281	2893	Clinton Street	Clinton Street	West End	AC	E	2	101	30	4,030	2/13/24	95	82	0	18	New Construction - Initial	1/1/80
848	801	Palmyra Avenue	Lemon Street	Glassell Street	AC	E	2	620	38	23,560	3/12/24	95	100	0	0	Surface Treatment - Slurry Seal	1/1/92
179	558	Brookshire Avenue	West End	Kennedy Street	AAC	E	2	435	32	13,920	2/29/24	95	95	0	5	Overlay - AC Structural	1/1/19
368	753	Dunton Avenue	West End	Dell Street	AAC	E	2	325	36	11,700	2/29/24	95	75	0	25	Overlay - AC Structural	1/1/19
1182	1956	Vista Point Drive	Vista Canyon Road	Vista Crest Road	AC	E	2	815	32	26,830	12/13/23	95	0	0	100	Surface Treatment - Slurry Seal	5/27/23
516	1838	Grove Avenue	Tustin Street	Highland Street	AC	E	2	880	32	28,160	3/4/24	96	100	0	0	Surface Treatment - Slurry Seal	1/1/02
1032	2178	Shattuck Place	Collins Avenue	Mayfair Avenue	AAC	I	2	1,115	31	34,565	2/2/24	96	100	0	0	Overlay - AC Structural	6/1/21
281	1299	Clinton Street	Walnut Avenue	Palm Avenue	AC	E	2	1,265	31	39,215	2/13/24	96	76	0	24	Complete Reconstruction - AC	6/1/20
996	1757	San Remo Place	North End	Valencia Drive	AC	E	2	255	32	9,660	11/2/23	96	100	0	0	Surface Treatment - Slurry Seal	3/21/22
715	2201	Maple Avenue	Atchison Street	Lemon Street	AAC	I	2	515	40	20,600	3/14/24	96	100	0	0	Overlay - AC Structural	1/1/21
281	2937	Clinton Street	Clinton Street	West End	AC	E	2	101	30	4,030	2/13/24	96	79	0	21	New Construction - Initial	1/1/80
281	2909	Clinton Street	Clinton Street	West End	AC	E	2	101	30	4,030	2/13/24	96	79	0	21	New Construction - Initial	1/1/80
974	1292	Sacramento Street	Mt. Vernon Avenue	South End	AC	E	2	1,910	32	64,620	2/13/24	96	94	0	6	Complete Reconstruction - AC	6/1/20
165	2629	Brentwood Avenue	Batavia Street	Kennedy Street	AAC	E	2	610	32	19,520	2/29/24	96	81	0	19	Overlay - AC Structural	1/1/19
891	738	Poplar Street	Sycamore Avenue	Spruce Avenue	AAC	E	2	470	32	15,040	3/6/24	96	21	0	79	Overlay - AC Structural	1/1/22
1163	391	Villa Park Road	Tustin Street	East End	AC	E	2	820	33	27,060	12/7/17	96	60	0	40	New Construction - Initial	1/1/80
267	2452A	Choteau Street	Meats Avenue	Del Mar Avenue	AC	E	2	520	31	16,120	2/27/24	96	0	0	100	Surface Treatment - Slurry Seal	1/1/03
347	755	Dell Street	City Limit	Crystal View	AAC	E	2	550	32	17,600	2/29/24	96	85	0	15	Overlay - AC Structural	1/1/19
574	3252	Horizon Drive	Alexandria St	West End	AC	E	2	477	32	16,764	12/6/17	96	100	0	0	New Construction - Initial	1/1/80
1109	1302	Sycamore Avenue	West End	Sacramento Street	AAC	E	2	225	31	8,775	2/13/24	96	100	0	0	Overlay - AC Structural	10/10/19
242	2529	Center Street	North End	Quincy Avenue	AAC	E	2	200	32	7,500	3/5/24	96	100	0	0	Overlay - AC Structural	6/1/21
258	3267	Chelsey	North End	Paragon Way	AC	E	2	214	32	8,348	12/6/17	96	100	0	0	New Construction - Initial	1/1/80
500	1146	Grand Street	Mayfair Avenue	Everett Place	AAC	E	2	290	38	11,020	3/5/24	97	100	0	0	Overlay - AC Structural	6/1/21
659	773A	Lemon Street	Walnut Avenue	Sycamore Avenue	AAC	E	2	656	36	23,616	3/11/24	97	73	0	27	Overlay - AC Structural	6/1/21
192	2433	Butler Street	North End	Dunton Avenue	AAC	E	2	200	32	6,400	2/29/24	97	100	0	0	Overlay - AC Structural	1/1/19
326	761	Crystal View Avenue	West End	Kennedy Street	AAC	E	2	375	32	12,000	2/29/24	97	100	0	0	Overlay - AC Structural	1/1/19
573	1093	Hoover Avenue	Glassell Street	Shaffer Street	AAC	E	2	1,240	31	38,440	3/5/24	97	73	0	27	Overlay - AC Structural	6/1/21
616	763	Kennedy Street	North End	Brentwood Avenue	AAC	E	2	1,070	36	38,520	2/29/24	97	100	0	0	Overlay - AC Structural	1/1/19
691	1899	Los Mequites Street	Los Arboles Street	South End	AAC	E	2	220	33	9,808	3/6/24	97	100	0	0	Overlay - AC Structural	3/3/22
1243	1896	Woodlawn Drive	North End	Almond Avenue	AAC	E	2	420	36	17,620	3/6/24	97	100	0	0	Overlay - AC Structural	3/3/22
720	1083	Maplewood Street	North End	Palmdale Avenue	AAC	E	2	200	32	6,400	2/27/24	97	100	0	0	Overlay - AC Structural	1/1/19
320	793	Crest Road	Palmyra Avenue	Culver Avenue	AC	E	2	620	32	19,840	3/12/24	97	100	0	0	Surface Treatment - Slurry Seal	1/1/02
320	794	Crest Road	Culver Avenue	La Veta Avenue	AC	E	2	325	32	10,400	3/12/24	97	100	0	0	Surface Treatment - Slurry Seal	1/1/04
306	1229	Cottonwood Street	Riverboat Way	Lincoln Avenue	AAC	E	2	865	36	31,140	2/29/24	97	0	0	100	Overlay - AC Structural	3/3/22
445	730	Flower Street	Beverly Drive	Sycamore Avenue	AAC	E	2	410	36	14,760	3/6/24	97	51	0	49	Overlay - AC Structural	1/1/22

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
473	1915	Genesse Street	North End	Del Mar Avenue	AAC	E	2	370	32	11,840	2/27/24	97	0	0	100	Overlay - AC Structural	6/1/19
1221	1086	Widdows Way	Palmdale Avenue	Taft Avenue	AAC	E	2	260	36	9,360	2/27/24	97	100	0	0	Overlay - AC Structural	10/11/19
150	615	Bortz Street	St. James Avenue	Darby Avenue	AAC	E	2	475	32	15,200	2/28/24	97	100	0	0	Overlay - AC Structural	8/2/21
267	2455	Choteau Street	Emerson Avenue	Burton Avenue	AAC	E	2	240	32	7,680	2/27/24	97	59	0	41	Overlay - AC Structural	6/1/19
64	843	Almond Avenue	Solana Drive	Woodlawn Drive	AAC	E	2	515	36	18,252	3/6/24	98	67	0	33	Overlay - AC Structural	3/3/22
163	2479	Brenna Lane	West End	Lemon St	AC	E	2	435	44	19,140	2/15/24	98	100	0	0	New Construction - Initial	1/1/80
179	560	Brookshire Avenue	Hartman Street	East End	AAC	E	2	220	32	7,040	3/1/24	98	100	0	0	Overlay - AC Structural	1/1/19
430	1189	Fernside Circle	North End	West Way Avenue	AAC	E	2	185	32	5,920	2/29/24	98	100	0	0	Overlay - AC Structural	1/1/19
490	1188	Glenside Circle	North End	Westway Avenue	AAC	E	2	205	32	6,560	2/29/24	98	100	0	0	Overlay - AC Structural	1/1/19
500	1069	Grand Street	Hoover Avenue	Wilson Avenue	AAC	E	2	250	37	9,250	3/5/24	98	100	0	0	Overlay - AC Structural	6/1/21
540	1690	Hearthside Street	North End	Crystal View Avenue	AAC	E	2	375	32	12,000	3/1/24	98	100	0	0	Overlay - AC Structural	1/1/19
574	3260	Horizon Drive	Alexandria St	East End	AC	E	2	467	32	16,444	12/6/17	98	100	0	0	New Construction - Initial	1/1/80
624	2632	Kimbark Lane	Lewis Street	South End	AC	E	2	410	36	16,560	11/28/17	98	100	0	0	New Construction - Initial	1/1/80
862	771	Parker Street	North End	Walnut Avenue	AAC	E	2	320	33	10,560	10/18/17	98	100	0	0	Surface Reconstruction - AC	1/1/04
1205	2588	Weston Street	Via Escola	Ashford Avenue	AC	E	2	125	36	4,500	10/25/17	98	100	0	0	Surface Treatment - Slurry Seal	11/1/08
669	2111	Lincoln Street	North End	Briardale Avenue	AAC	E	2	760	31	23,560	2/27/24	98	57	0	43	Overlay - AC Structural	6/1/21
671	2347	Lindenholtz Street	North End	Palmdale Avenue	AAC	E	2	200	32	6,400	2/27/24	98	100	0	0	Overlay - AC Structural	1/1/19
11	841	Alder Grove Circle	Glendora Avenue	East End	AC	E	2	360	32	11,520	8/27/24	98	100	0	0	Surface Treatment - Slurry Seal	1/1/98
1241	937	Woodbury Drive	North End	Fairhaven Avenue	AAC	E	2	580	33	20,240	3/15/24	98	100	0	0	Overlay - AC Structural	3/3/22
393	2128	Emerson Avenue	Pine Street	Chouteau Street	AAC	E	2	400	32	12,800	2/27/24	98	87	0	13	Overlay - AC Structural	6/1/19
484	2112	Glendale Avenue	West End	Lincoln Avenue	AAC	E	2	395	31	12,245	2/27/24	98	62	0	38	Overlay - AC Structural	6/1/21
529	1329	Hart Street	Orange Grove Avenue	Walnut Avenue	AAC	E	2	290	31	8,990	2/13/24	98	0	0	100	Overlay-Rubber Hot Mix	2/1/24
538	2145	Hayford Street	Heim Avenue	Amber Avenue	AAC	E	2	265	33	8,745	2/28/24	98	100	0	0	Overlay - AC Structural	8/2/21
259	2429	Cherry Drive	Stevens Street	Eckhoff Street	AAC	E	2	125	32	4,000	3/6/24	98	69	0	31	Overlay - AC Structural	1/1/22
408	1154	Everett Place	Grand Street	Shaffer Street	AAC	E	2	655	33	21,615	3/5/24	98	100	0	0	Overlay - AC Structural	6/1/21
408	1155	Everett Place	Glassell Street	Grand Street	AAC	E	2	655	33	21,615	3/5/24	98	100	0	0	Overlay - AC Structural	6/1/21
529	1328	Hart Street	Everett Avenue	Orange Grove Avenue	AAC	E	2	985	31	30,535	2/13/24	98	0	0	100	Overlay-Rubber Hot Mix	2/1/24
170	566	Briardale Avenue	Lincoln Avenue	Tustin Avenue	AAC	E	2	885	32	28,320	3/4/24	98	71	0	29	Overlay - AC Structural	6/1/21
974	1377	Sacramento Street	North End	Van Owen Avenue	AAC	E	2	935	32	31,020	3/1/24	98	20	0	80	Overlay - AC Structural	3/3/22
1109	732	Sycamore Avenue	Donneybrooke Street	Eckhoff Street	AAC	E	2	1,085	36	39,060	3/6/24	98	71	0	29	Overlay - AC Structural	7/7/22
1153	1364	Van Owen Avenue	Sacramento Street	Handy Street	AAC	E	2	1,215	32	38,880	3/1/24	98	38	0	62	Overlay - AC Structural	3/3/22
730	1085	Marquart Street	North End	Palmdale Avenue	AAC	E	2	200	32	6,400	2/27/24	98	100	0	0	Overlay - AC Structural	1/1/19
337	2159	Darby Street	Franki Street	Bortz Street	AAC	E	2	425	32	13,600	2/28/24	98	4	0	96	Surface Treatment - Slurry Seal	1/1/04
1138	1363	Trenton Avenue	Sacramento Street	Handy Street	AAC	E	2	1,160	32	37,120	3/1/24	99	37	0	63	Overlay - AC Structural	3/3/22
120	630	Beechwood Street	Riverdale Avenue	Riverview Avenue	AAC	E	2	235	32	7,520	2/29/24	99	100	0	0	Overlay - AC Structural	3/3/22
127	629	Beverly Drive	Poplar Street	East End	AC	E	2	730	32	23,360	3/6/24	99	100	0	0	Surface Treatment - Slurry Seal	1/1/04
239	2514	Cedar Street	Beverly Drive	Sycamore Avenue	AAC	E	2	550	32	17,600	3/6/24	99	100	0	0	Overlay - AC Structural	1/1/22
262	2465	Chestnut Avenue	Sacramento Street	Handy Street	AAC	E	2	1,165	32	37,280	3/1/24	99	38	0	62	Overlay - AC Structural	3/3/22
365	1653	Dunas Street	Ruth Place	La Veta Avenue	AAC	E	2	290	32	9,280	2/20/24	99	67	0	33	Overlay - AC Structural	6/1/21
669	1079	Lincoln Street	Briardale Avenue	Taft Avenue	AAC	E	2	505	31	15,655	2/27/24	99	100	0	0	Overlay - AC Structural	6/1/21
690	1898	Los Arboles Street	Los Timbres Street	Los Mequites Street	AAC	E	2	290	33	10,070	3/6/24	99	100	0	0	Overlay - AC Structural	3/3/22
692	1897	Los Timbres Street	Chapman Avenue	South End	AAC	E	2	585	36	22,858	3/6/24	99	100	0	0	Overlay - AC Structural	3/3/22
734	1156	Mayfair Avenue	Glassell Street	Shaffer Street	AAC	E	2	1,280	32	40,960	3/5/24	99	100	0	0	Overlay - AC Structural	6/1/21
891	739	Poplar Street	Beverly Drive	Cherry Drive	AAC	E	2	370	32	11,840	3/6/24	99	100	0	0	Overlay - AC Structural	1/1/22
1049	1084	Silverwood Street	North End	Palmdale Avenue	AC	E	2	200	32	6,400	2/27/24	99	100	0	0	Surface Treatment - Slurry Seal	1/1/04
1083	743	Stevens Street	Beverly Drive	Cherry Drive	AAC	E	2	270	32	8,640	3/6/24	99	100	0	0	Overlay - AC Structural	1/1/22
1107	1659	Swidler Place	North End	La Veta Avenue	AAC	E	2	320	32	11,740	2/20/24	99	65	0	35	Overlay - AC Structural	6/1/21
94	646	Athens Avenue	Sacramento Street	Handy Street	AAC	E	2	1,160	32	37,120	3/1/24	99	42	0	58	Overlay - AC Structural	3/3/22
526	1375	Handy Street	Chestnut Avenue	Katella Avenue	AC	E	2	1,095	36	39,420	3/1/24	99	70	0	30	Mill and Overlay	3/3/22
628	1450	Kirkwood Avenue	Ponderosa Street	East End	AAC	E	2	560	32	19,020	2/21/24	99	0	0	100	Overlay - AC Structural	2/1/24
801	939	Nubian Lane	Greengrove Street	East End	AAC	E	2	285	33	10,505	3/15/24	99	100	0	0	Overlay - AC Structural	3/3/22
880	2127	Pine Street	Meats Avenue	Emerson Avenue	AAC	E	2	520	32	16,640	2/27/24	99	100	0	0	Overlay - AC Structural	6/1/19
527	1373	Harding Street	Chestnut Avenue	Katella Avenue	AC	E	2	1,080	36	38,880	3/1/24	99	0	0	100	Mill and Overlay	3/3/22
818	1656	Olympia Way	Ruth Place	La Veta Avenue	AAC	E	2	260	32	8,820	2/20/24	99	100	0	0	Overlay - AC Structural	6/1/21
1263	2328	Young Circle	Fairway Drive	South End	AC	E	2	120	31	4,870	2/21/24	99	0	0	100	Mill and Overlay	2/1/24
150	610	Bortz Street	Darby Street	Heim Avenue	AAC	E	2	300	32	9,600	2/28/24	99	54	0	46	Overlay - AC Structural	8/2/21
267	2452B	Choteau Street	Del Mar Avenue	Grove Avenue	AAC	E	2	362	31	11,222	2/27/24	99	0	0	100	Overlay - AC Structural	6/1/21
457	1705	Franki Street	St. James Avenue	Darby Street	AAC	E	2	500	31	15,500	2/28/24	99	100	0	0	Overlay - AC Structural	8/2/21
473	1921	Genesse Street	North End	Grove Avenue	AAC	E	2	170	32	5,440	2/27/24	99	100	0	0	Overlay - AC Structural	6/1/19

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
511	1022	Greenview Drive	Fairway Drive	Fairway Drive	AC	E	2	1,100	31	34,100	2/21/24	99	0	0	100	Mill and Overlay	2/1/24
622	1919	Keokuk Street	North End	Grove Avenue	AAC	E	2	170	33	5,610	2/27/24	99	0	0	100	Overlay - AC Structural	6/1/19
974	1376	Sacramento Street	Van Owen Avenue	Katella Avenue	AC	E	2	115	32	3,680	3/1/24	99	100	0	0	Mill and Overlay	3/3/22
1183	1959	Vista Ridge Drive	Vista Heights Road	South End	AC	E	2	915	32	30,030	12/13/23	99	0	0	100	Surface Treatment - Slurry Seal	5/27/23
277	2454	Cleveland Street	Meats Avenue	Del Mar Avenue	AAC	E	2	470	31	14,570	2/27/24	100	100	0	0	Overlay - AC Structural	6/1/19
344	1917	Del Mar Avenue	Chouteau Street	Cambridge Street	AAC	E	2	240	32	7,680	2/27/24	100	100	0	0	Overlay - AC Structural	6/1/19
520	1340	Hamilton Avenue	Hart Street	East End	AAC	E	2	665	31	21,665	2/13/24	100	0	0	100	Overlay-Rubber Hot Mix	2/1/24
681	1396	Lomita Avenue	Hart Street	East End	AAC	E	2	695	31	21,545	2/13/24	100	0	0	100	Overlay-Rubber Hot Mix	1/3/23
734	1343	Mayfair Avenue	Hart Street	East End	AC	E	2	690	31	22,440	2/13/24	100	0	0	100	Overlay-Rubber Hot Mix	1/3/23
779	1920	Namuria Street	North End	Grove Avenue	AAC	E	2	170	33	5,610	2/27/24	100	100	0	0	Overlay - AC Structural	6/1/19
807	1395	Oakmont Avenue	Hart Street	East End	AC	E	2	690	31	22,440	2/13/24	100	0	0	100	Overlay-Rubber Hot Mix	1/3/23
936	1926	Ridgewood Street	Buckeyewood Avenue	South End	AAC	E	2	170	32	5,440	2/27/24	100	100	0	0	Overlay - AC Structural	6/1/19
960	1341	Rose Avenue	Hart Street	East End	AC	E	2	660	31	21,510	2/13/24	100	0	0	100	Overlay-Rubber Hot Mix	1/3/23
1192	981	Water Street	Chapman Avenue	Almond Avenue	AAC	E	2	615	35	21,525	2/20/24	100	0	0	100	Overlay - AC Structural	1/13/16
1187	1451	Wayfield Circle	North End	Kirkwood Avenue	AAC	E	2	255	32	9,260	2/21/24	100	0	0	100	Overlay - AC Structural	2/1/24
1246	1928	Woodside Street	Buckeyewood Avenue	South End	AAC	E	2	170	32	5,440	2/27/24	100	100	0	0	Overlay - AC Structural	6/1/19
809	2184	Oceanview Street	310' n/o Lincoln Avenue	Lincoln Avenue	AC	I	2	310	36	11,160	3/19/24	100	100	0	0	New Construction - Initial	1/1/80
183	568	Buckeyewood Avenue	Cambridge Street	Glendale Avenue	AC	E	2	1,655	32	52,960	2/27/24	100	0	0	100	Overlay-Rubber Hot Mix	2/1/24
407	1342	Everett Avenue	Hart Street	East End	AC	E	2	665	31	21,665	2/13/24	100	0	0	100	Overlay-Rubber Hot Mix	1/3/23
1049	2116	Silverwood Street	Buckeyewood Avenue	South End	AC	E	2	270	33	8,910	2/27/24	100	0	0	100	Overlay-Rubber Hot Mix	2/1/24
88	752	Ash Street	Sycamore Avenue	South End	AAC	E	2	490	32	15,680	3/11/24	100	100	0	0	Overlay - AC Structural	7/7/22
419	1019	Fairway Drive	Greenview Drive	Tustin Street	AC	E	2	1,590	31	49,290	2/21/24	100	0	0	100	Mill and Overlay	2/1/24
419	1021	Fairway Drive	West End	Cambridge Street	AAC	E	2	615	36	23,290	2/23/24	100	100	0	0	Overlay - AC Structural	3/3/22
419	1020	Fairway Drive	Cambridge Street	Greenview Drive	AC	E	2	1,205	31	37,355	2/21/24	100	0	0	100	Mill and Overlay	2/1/24
372	2113	Ebonywood Street	Buckeyewood Avenue	South End	AC	E	2	240	33	7,920	2/27/24	100	0	0	100	Overlay-Rubber Hot Mix	2/1/24
509	1929	Greengrove Street	Glendale Avenue	Taft Avenue	AC	E	2	980	36	35,280	2/27/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
666	709	Lilac Lane	Orchard Avenue	Culver Avenue	AC	E	2	350	32	11,200	3/5/24	100	100	0	0	Surface Treatment - Slurry Seal	1/1/04
671	2114	Lindenholtz Street	Buckeywood Avenue	South End	AC	E	2	270	33	8,910	2/27/24	100	0	0	100	Overlay-Rubber Hot Mix	2/1/24
719	2115	Maplewood Place	Buckeyewood Avenue	South End	AC	E	2	270	33	8,910	2/27/24	100	0	0	100	Overlay-Rubber Hot Mix	2/1/24
1334	8018	Walnut Ave	Cul-de-sac	East End	AC	E	2	258	32	8,256	10/23/17	100	100	0	0	New Construction - Initial	10/4/12
4	836	Adams Avenue	Cambridge Street	California Street	AC	E	2	975	32	31,200	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
4	840	Adams Avenue	Handy Street	Hart Street	AAC	E	2	1,020	32	32,640	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
10	833	Albion Lane	Greengrove Street	East End	AAC	E	2	290	32	10,380	3/15/24	100	0	0	0	Overlay - AC Structural	3/3/22
64	818	Almond Avenue	Feldner Road	Main Street	AC	E	2	960	38	36,480	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
64	719	Almond Avenue	Flower Street	Poinsettia Drive	AC	E	2	715	36	25,740	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
64	718	Almond Avenue	West End	Flower Street	AC	E	2	520	30	14,040	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
64	720	Almond Avenue	Poinsettia Drive	Feldner Road	AC	E	2	1,295	36	46,620	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
67	852	Altura Avenue	Santiago Boulevard	East End	AC	E	2	640	32	21,980	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
73	854	Amos Street	Denise Avenue	Altura Avenue	AC	E	2	405	32	12,360	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
106	635	Bailey Drive	Denise Avenue	Altura Avenue	AC	E	2	300	32	9,216	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
114	606	Baxter Street	Trenton Avenue	Van Owen Avenue	AC	E	2	235	32	7,520	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
158	2594	Bradford Street	West End	Camden Street	AAC	E	2	585	32	20,220	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
158	2595	Bradford Street	Camden Street	Weston Street	AC	E	2	775	32	24,608	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
185	3426	Buena Vista	150' e/o Orange	100' w/o Palm	AC	E	1	50	17	850	12/8/17	100	0	0	0	New Construction - Initial	1/1/80
198	2507	California Street	Palm Avenue	Maple Avenue	AC	E	2	610	32	19,520	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
204	2592	Camden Street	Hastings Avenue	Via Escola	AC	E	2	720	36	25,920	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
210	2534	Candlewood Avenue	Maplewood Street	East End	AC	E	2	490	32	16,830	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
218	2434	Capri Street	West Way Avenue	South End	AC	E	2	340	32	10,880	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
242	2538	Center Street	Culver Avenue	La Veta Avenue	AC	E	2	620	32	19,840	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
243	2496	Century Avenue	James Street	Thomas Street	AC	E	2	210	31	7,010	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
262	2461	Chestnut Avenue	Cambridge Street	Maplewood Street	AC	E	2	845	31	26,195	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
262	2532	Chestnut Avenue	Glassell Street	Shaffer Street	AAC	E	2	1,175	32	37,600	5/27/25	100	0	0	0	Overlay - AC Structural	5/27/25
262	2481	Chestnut Avenue	Maplewood Street	Tustin Street	AC	E	2	1,970	31	61,070	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
266	2468	Chipwood Street	La Veta Avenue	South End	AC	E	2	1,370	31	42,470	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
268	3167	Christine Street	North End	Valencia Drive	AAC	E	2	455	32	16,060	11/2/23	100	0	0	0	Overlay - AC Structural	3/3/22
276	2441	Clark Street	North End	Palm Avenue	AC	E	2	900	32	30,400	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
288	2633	Colony Street	Grovewood Lane	South End	AAC	E	2	205	32	6,368	11/14/23	100	0	0	0	Overlay - AC Structural	11/14/23
294	947	Concord Avenue	Maplewood Street	East End	AAC	E	2	1,675	31	51,925	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
297	1371	Coolidge Avenue	Handy Street	Wanda Street	AAC	E	2	1,490	31	46,190	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
298	2079	Copper Kettle Road	Meadow Grove Road	Glen Canyon Road	AC	E	2	980	36	35,280	4/15/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
328	990	Culver Avenue	Glassell Street	Shaffer Street	AC	E	2	1,315	30	39,450	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
328	991	Culver Avenue	Shaffer Street	Harwood Street	AC	E	2	650	35	22,750	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
328	992	Culver Avenue	Harwood Street	Cambridge Street	AC	E	2	635	32	20,320	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
334	2596	Danbury Street	North End	Somerton Avenue	AC	E	2	230	32	8,860	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
344	1918	Del Mar Avenue	Cambridge Street	Greengrove Drive	AC	E	2	1,125	32	36,000	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
386	1065	Elizabeth Avenue	Shaffer Street	East End	AAC	E	2	895	31	28,845	2/9/24	100	0	0	0	Overlay - AC Structural	6/1/21
387	1066	Elizabeth Place	Elizabeth Avenue	South End	AAC	E	2	385	31	13,035	2/9/24	100	0	0	0	Overlay - AC Structural	6/1/21
428	1382	Fern Street	Hillside Avenue	South End	AC	E	2	690	32	22,080	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
428	1908	Fern Street	Taft Avenue	Hillside Avenue	AC	E	2	380	32	11,968	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
432	1418	Fernwood Avenue	Esplanade Street	Schug Street	AC	E	2	535	32	17,120	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
452	2080	Fountain Arbor Drive	Copper Kettle Road	South End	AC	E	2	165	32	6,780	12/5/23	100	0	0	0	Overlay-Rubber Hot Mix	12/1/23
468	1368	Garfield Avenue	Handy Street	Wanda Road	AAC	E	2	1,490	33	49,170	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
479	2084	Glen Canyon Road	Copper Kettle Road	Marywood Drive	AC	E	2	655	36	23,580	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
479	2083	Glen Canyon Road	Ridgeway Road	Copper Kettle Road	AC	E	2	500	36	18,000	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
487	2140	Glennwood Street	Vista Del Playa	Glendora Avenue	AC	E	2	645	32	20,640	2/16/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
500	1145	Grand Street	Lomita Avenue	Mayfair Avenue	AC	E	2	495	38	18,810	3/28/24	100	0	0	0	New Construction - Initial	1/1/80
500	1147	Grand Street	Everett Place	Rose Avenue	AC	E	2	520	37	19,240	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
500	1144	Grand Street	Collins Avenue	Lomita Avenue	AC	E	2	610	39	23,790	3/28/24	100	0	0	0	New Construction - Initial	1/1/80
505	2051	Green Clover Circle	Summitridge Lane	South End	AC	E	2	675	32	23,100	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
506	2082	Green Garden Lane	Glen Canyon Road	East End	AC	E	2	145	32	6,435	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
509	938	Greengrove Street	City Limit	Fairhaven Avenue	AAC	E	2	620	33	20,460	3/15/24	100	0	0	0	Overlay - AC Structural	3/3/22
509	1913	Greengrove Street	Meats Avenue	South End	AC	E	2	740	32	23,680	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
509	1050	Greengrove Street	North End	Quincy Avenue	AC	E	2	190	32	7,180	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
513	1634	Greenwood Avenue	Esplanade Street	Wrightwood Street	AC	E	2	450	32	14,900	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
516	1824	Grove Avenue	Cambridge Street	East End	AC	E	2	915	32	29,280	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
517	3466	Grovewood Lane	Windes Drive	East End	AAC	E	2	1,250	32	41,800	11/14/23	100	0	0	0	Overlay - AC Structural	11/14/23
521	2358	Hamlin Street	Chapman Avenue	Washington Avenue	AAC	E	2	615	32	19,488	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
526	3451	Handy Street	Quincy Avenue	Collins Ave	AC	E	2	1,318	31	40,858	2/8/24	100	0	0	0	Mill and Overlay	3/3/22
526	1518	Handy Street	Katella Avenue	Quincy Avenue	AC	E	2	1,540	31	47,740	2/8/24	100	0	0	0	Mill and Overlay	3/3/22
527	1345	Harding Street	Hoover Avenue	South End	AAC	E	2	415	32	14,380	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
529	1327	Hart Street	Collins Avenue	Everett Avenue	AAC	E	2	1,300	31	40,300	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
529	1359	Hart Street	Hoover Avenue	Monroe Avenue	AAC	E	2	1,340	31	41,540	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
529	1358	Hart Street	Coolidge Avenue	Hoover Avenue	AAC	E	2	250	30	7,500	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
529	1357	Hart Street	Garfield Avenue	Coolidge Avenue	AAC	E	2	220	30	6,600	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
533	1161	Harwood Street	Lomita Avenue	Oakmont Avenue	AC	E	2	265	32	8,480	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
534	2540	Hastings Avenue	West End	Camden Street	AC	E	2	555	32	19,260	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
534	2541	Hastings Avenue	Camden Street	East End	AC	E	2	605	32	21,158	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
555	1281	Highland Street	Dana Place	South End	AC	E	2	425	32	13,600	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
555	1282	Highland Street	Sycamore Avenue	Dana Place	AC	E	2	480	32	15,360	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
563	1934	Hillman Circle	West End	Robinhood Place	AC	E	2	235	32	9,020	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
564	2042	Hillsborough Avenue	Meredith Street	Longhurst Street	AC	E	2	470	28	13,160	12/4/23	100	0	0	0	Surface Treatment - Slurry Seal	8/1/17
566	1909	Hillside Avenue	Warbler Place	Santiago Boulevard	AC	E	2	820	32	26,048	1/3/24	100	0	0	0	Overlay-Rubber Hot Mix	1/3/23
571	748	Holly Street	North End	Maple Avenue	AAC	E	2	225	32	7,200	3/12/24	100	0	0	0	Overlay - AC Structural	7/7/22
571	749	Holly Street	Maple Avenue	South End	AAC	E	2	360	32	11,520	3/12/24	100	0	0	0	Overlay - AC Structural	7/7/22
588	1503	Jacaranda Avenue	Handy Street	Hart Street	AAC	E	2	845	32	27,040	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
591	1415	James Street	Chapman Avenue	Palmyra Avenue	AC	E	2	1,300	31	40,300	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
606	1733	Julie Avenue	Hewes Street	Christine Street	AAC	E	2	220	32	6,848	11/2/23	100	0	0	0	Overlay - AC Structural	3/3/22
628	1640	Kirkwood Avenue	West End	Esplanade Street	AAC	E	2	185	32	7,720	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
640	2570	Lake Drive	West End	Cambridge Street	AC	E	2	635	30	19,050	1/31/01	100	0	0	0	New Construction - Initial	1/1/80
647	1636	Larkstone Drive	West End	Schug Street	AC	E	2	340	36	13,340	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
669	983	Lincoln Street	Champman Avenue	Palmyra Avenue	AC	E	2	1,275	32	40,800	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
670	1734	Linda Vista Street	Santiago Canyon Road	Elsinore Avenue	AC	E	2	755	32	23,776	3/22/24	100	0	0	0	Mill and Overlay	3/3/22
671	1825	Lindenholtz Street	Del Mar Avenue	Grove Avenue	AC	E	2	235	32	7,520	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
671	1826	Lindenholtz Street	North End	Del Mar Avenue	AC	E	2	300	32	9,600	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
672	2160	Lisa Place	North End	Heim Avenue	AAC	E	2	80	32	2,560	2/28/24	100	0	0	0	Overlay - AC Structural	8/2/21
677	1502	Locust Avenue	Handy Street	Hart Street	AAC	E	2	840	31	26,040	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
681	1159	Lomita Avenue	Shaffer Street	Cambridge Street	AC	E	2	1,305	32	41,760	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
685	1846	Longridge Drive	Meats Avenue	Meadowridge Road	AC	E	2	440	32	14,080	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
685	2071	Longridge Drive	Westridge Drive	Rockridge Place	AC	E	2	480	32	15,860	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
685	2070	Longridge Drive	Meadowridge Road	Westridge Drive	AC	E	2	1,595	32	51,040	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
698	1632	Lynwood Avenue	Chipwood	East End	AC	E	2	485	32	17,285	1/26/24	100	0	0	0	Overlay-Rubber Hot Mix	1/19/23
707	2678	Malena Street	Larkstone Drive	115' s/o Larkstone Drive	AC	E	2	115	32	3,680	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
715	764	Maple Avenue	Batavia Street	East End	AC	E	2	1,165	36	41,940	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
720	946	Maplewood Street	Taft Avenue	Chestnut Avenue	AC	E	2	710	31	22,010	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
720	1911	Maplewood Street	North End	Del Mar Avenue	AC	E	2	300	32	9,600	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
738	3340	Meadow Grove Road	Ridgeway Road	Marywood Drive	AC	E	2	445	36	16,020	2/1/24	100	0	0	0	Mill and Overlay	2/1/24
740	1389	Meadowlark Place	Brookside Avenue	South End	AC	E	2	160	32	6,620	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
741	2074	Meadowridge Road	Longridge Drive	Summitridge Lane	AC	E	2	1,160	32	38,620	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
758	1391	Mockingbird Place	Brookside Avenue	South End	AC	E	2	170	32	6,940	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
758	1900	Mockingbird Place	North End	Hillside Avenue	AC	E	2	205	32	8,060	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
785	2081	Newgate Way	Glen Canyon Road	Meats Avenue	AC	E	2	610	36	21,960	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
802	1420	Nutwood Street	Lynwood Avenue	Sherwood Avenue	AC	E	2	350	31	10,850	1/26/24	100	0	0	0	Overlay-Rubber Hot Mix	1/26/24
807	1142	Oakmont Avenue	Shaffer Street	Harwood Street	AC	E	2	805	32	25,760	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
825	1873	Orange Hill Road	North End	Orange View Lane	AC	E	2	475	32	16,700	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
828	926	Orange Street	Palmyra Avenue	Culver Avenue	AC	E	2	620	36	22,320	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
830	1875	Orangeview Lane	North End	East End	AC	E	2	2,105	36	79,380	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
835	1390	Oriole Place	Brookside Avenue	South End	AC	E	2	165	32	6,780	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
848	1170	Palmyra Avenue	James Street	Esplanade Street	AC	E	2	1,155	37	42,735	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
848	716	Palmyra Avenue	Flower Street	Feldner Road	AAC	E	2	1,685	36	60,660	3/5/24	100	0	0	0	Overlay - AC Structural	7/7/22
859	1279	Park Lane	Palm Avenue	Dana Place	AC	E	2	300	32	9,600	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
862	768	Parker Street	Maple Avenue	Chapman Avenue	AC	E	2	615	36	22,140	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
871	1000	Penn Drive	Van Bibber Avenue	Culver Avenue	AAC	E	2	245	31	7,595	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
880	1160	Pine Street	Lomita Avenue	South End	AC	E	2	210	32	7,470	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
885	772	Pixley Street	Maple Avenue	Chapman Avenue	AC	E	2	610	36	21,704	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
898	2539	Preston Street	North End	Somerton Avenue	AC	E	2	385	32	14,868	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
905	2052	Queens Gate Way	Rolling Green Lane	Summitridge Lane	AC	E	2	170	32	5,248	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
906	1350	Quincy Avenue	Handy Street	Hart Street	AAC	E	2	1,100	31	34,100	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
924	1353	Rembrandt Circle	North End	Garfield Avenue	AAC	E	2	125	32	4,000	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
926	1355	Reubens Circle	North End	Garfield Avenue	AC	E	2	125	32	4,000	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
931	1874	Ridgecrest Lane	East End	Orange View Lane	AC	E	2	485	32	18,320	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
949	1876	Robinhood Place	North End	Santiago Blvd (North Side)	AC	E	2	575	32	20,124	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
952	2556	Rock Creek Drive	Bridge	Tustin Street	AC	E	2	365	40	14,563	8/28/24	100	0	0	0	New Construction - Initial	1/1/80
955	2073	Rockridge Circle	North End	Summitridge Lane	AC	E	2	485	32	17,020	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
957	2053	Rolling Green Lane	West End	East End	AC	E	2	1,175	32	40,900	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
960	1099	Rose Avenue	Glassell Street	Grand Street	AC	E	2	620	35	21,700	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1017	1639	Schug Street	Jordan Avenue	Fernwood Avenue	AC	E	2	810	32	25,920	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1030	1176	Shasta Street	Almond Avenue	Palmyra Avenue	AC	E	2	825	31	25,450	1/2/24	100	0	0	0	New Construction - Initial	4/3/12
1032	979	Shattuck Place	North End	Washington Avenue	AAC	E	2	575	31	18,875	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1039	1419	Sherwood Avenue	Chipwood Street	East End	AC	E	2	450	31	15,550	1/26/24	100	0	0	0	Overlay-Rubber Hot Mix	1/26/24
1049	1912	Silverwood Street	North End	Del Mar Avenue	AC	E	2	300	32	9,600	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1063	2033	Somerset Street	Via Escola	Wickham Avenue	AC	E	2	130	32	4,660	12/6/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1064	92542	Somerton Avenue	Camden	East End	AC	E	2	757	32	25,724	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
1064	2542	Somerton Avenue	Preston Street	Camden	AC	E	2	444	32	14,708	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1095	2077	Summitridge Lane	Rockridge Place	Cerro Villa Drive	AC	E	2	1,340	36	47,984	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1095	2076	Summitridge Lane	Meats Avenue	Rockridge Place	AC	E	2	920	36	33,120	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1109	2915	Sycamore Avenue	Cypress Street	West End	AC	E	2	78	32	2,304	4/10/24	100	0	0	0	New Construction - Initial	1/1/80
1118	1872	Terrace View Court	Orange View Lane	South End	AC	E	2	155	32	6,760	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1124	1175	Thomas Street	Century Avenue	Palmyra Avenue	AC	E	2	955	31	30,105	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1138	944	Trenton Avenue	Glassell Street	Shaffer Street	AAC	E	2	1,300	32	41,600	5/27/25	100	0	0	0	Overlay - AC Structural	5/27/25
1138	942	Trenton Avenue	Cambridge Street	Baxter Street	AC	E	2	1,025	33	33,825	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1138	941	Trenton Avenue	Baxter Street	East End	AC	E	2	1,545	32	50,590	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1147	1754	Valencia Drive	Linda Vista Street	Cannon Street	AAC	E	2	740	32	23,680	11/16/23	100	0	0	0	Overlay - AC Structural	3/3/22
1151	999	Van Bibber Avenue	Cambridge Street	Penn Drive	AC	E	2	1,125	31	34,875	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1152	1356	Van Gogh Circle	North End	Garfield Avenue	AC	E	2	125	32	4,000	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1153	1046	Van Owen Avenue	Cambridge Street	East End	AC	E	2	1,395	33	47,185	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1170	1954	Vista Bluff Road	Vista Royale Drive	Vista Canyon Road	AC	E	2	630	32	20,910	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1171	1955	Vista Canyon Road	Santiago Boulevard	Vista Bluff Road	AC	E	2	1,635	32	52,320	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1172	1952	Vista Circle	Vista Royale Drive	South End	AC	E	2	205	32	8,060	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1173	1953	Vista Court	Vista Royale Drive	South End	AC	E	2	225	32	8,700	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
1174	1958	Vista Crest Road	Vista Ridge Drive	Vista Point Drive	AC	E	2	780	32	25,460	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1177	1950	Vista Glen Road	Vista Park Avenue	Vista Canyon Road	AC	E	2	575	32	18,208	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1178	1957	Vista Heights Road	Vista Ridge Drive	Vista Point Drive	AC	E	2	685	32	22,670	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1179	2078	Vista Knoll Road	Vista Royale Drive	Vista Mesa Way	AC	E	2	450	32	14,900	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1180	1949	Vista Mesa Way	Vista Glen Road	Vista Knoll Road	AC	E	2	910	32	29,870	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1181	1938	Vista Park Avenue	Santiago Boulevard	Vista Glen Road	AC	E	2	215	34	7,310	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1184	1951	Vista Royale Drive	Vista Park Avenue	Vista Bluff Road	AC	E	2	1,250	32	40,750	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1185	1960	Vista Valley Road	Vista Ridge Drive	South End	AC	E	2	650	32	22,300	12/13/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1190	1392	Warbler Place	Brookside Avenue	South End	AC	E	2	170	32	6,940	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
1190	1393	Warbler Place	North End	Lakeside Avenue	AC	E	2	445	32	15,740	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
1191	2357	Washington Avenue	Hewes Street	East End	AAC	E	2	1,035	36	37,260	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1191	2776	Washington Avenue	Lincoln Avenue	Tustin Avenue	AC	E	2	595	31	18,445	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1203	1194	West Way Avenue	Batavia Street	Capri Street	AC	E	2	255	32	8,160	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1205	2593	Weston Street	North End	Via Escola	AC	E	2	690	32	23,580	2/1/24	100	0	0	0	Overlay-Rubber Hot Mix	2/1/24
1206	2075	Westridge Drive	Meadowridge Road	Longridge Drive	AC	E	2	1,485	32	46,020	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1208	1424	Wheeler Place	Larkstone Drive	115' s/o Larkstone Drive	AAC	E	2	115	32	3,680	5/27/25	100	0	0	0	Overlay - AC Structural	5/27/25
1220	2034	Wickham Avenue	Somerset Street	East End	AC	E	2	450	32	16,948	12/6/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
1230	1344	Wilson Avenue	Hart Street	Adams Avenue	AAC	E	2	900	31	27,900	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1252	1635	Wrightwood Street	Greenwood Avenue	Larkstone Drive	AC	E	2	215	32	6,880	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1253	1354	Wyeth Circle	North End	Garfield Circle	AC	E	2	130	32	4,160	5/27/25	100	0	0	0	Overlay-Rubber Hot Mix	5/27/25
1265	1871	Zenith Point Rd	Orange View Lane	Denise Avenue	AC	E	2	240	36	8,384	12/12/23	100	0	0	0	Surface Treatment - Slurry Seal	5/27/23
198	2176	California Street	Katella Avenue	Wilson Avenue	AC	I	2	575	36	20,700	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
1022	2161	Seranado Street	Chapman Avenue	South End	AC	I	2	365	36	14,940	5/27/26	100	0	0	0	Overlay-Rubber Hot Mix	5/27/26
								222.8		**39,467,321**							
		Alleys															
39	2291	Alley Maple Avenue	Batavia Street	Parker Street	AC	N	1	590	10	4,130	8/26/24	11	37	57	6	New Construction - Initial	1/1/80
44	100300	Alley Oak Street	Oak St	Oak St	AC	N	2	1,235	25	24,740	8/28/24	20	39	48	13	New Construction - Initial	1/1/80
31	2387	Alley Garfield Avenue	Sacramento Street	Handy Street	AC	N	2	860	17	14,620	8/27/24	20	39	45	16	New Construction - Initial	1/1/80
1300	3182	Alley Katella Avenue	Tustin Street	1400' w/o Tustin St	AAC	N	2	1,400	19	18,200	8/27/24	25	41	52	7	2 in Cold Mill & Overlay	8/31/07
42	2341	Alley Meats Avenue	Meats Avenue	Chouteau Street	AC	N	1	690	14	9,660	8/27/24	28	46	54	0	Surface Treatment - Slurry Seal	1/1/98
45	2292	Alley Olive Street	North End	Alley Mayfair Avenue	AC	N	2	310	14	4,340	8/27/24	31	74	11	15	New Construction - Initial	1/1/80
33	2356	Alley Hewes Street	Chapman Avenue	115' N Chapman Avenue	AC	N	1	115	30	3,450	8/28/24	37	52	48	0	New Construction - Initial	1/1/80
42	2369	Alley Meats Avenue	Cambridge Street	Greengrove Street	AC	N	1	1,120	14	15,680	8/27/24	38	32	54	14	New Construction - Initial	1/1/80
37	2375	Alley Lincoln Street	Grove Avenue	Nordic Street	AC	N	1	830	14	11,620	8/27/24	38	24	75	1	New Construction - Initial	1/1/80
47	2469	Alley Palm Avenue	Swidler Street	Seranado Street	AC	N	1	1,170	20	16,380	8/28/24	42	33	67	0	Surface Treatment - Slurry Seal	11/1/08
39	2333	Alley Maple Avenue	Cleveland Street	Pine Street	PCC	N	2	540	15	8,100	8/28/24	45	16	83	1	New Construction - Initial	1/1/80
39	2332	Alley Maple Avenue	Cleveland Street	Pine Street	PCC	N	2	540	15	8,100	8/28/24	45	6	91	3	New Construction - Initial	1/1/80
21	80	Alley California Street	Katella Avenue	400' N Katella Avenue	AAC	N	2	400	24	9,600	8/27/24	46	36	64	0	2 in Cold Mill & Overlay	8/31/07
32	2378	Alley Grove Avenue	Highland Street	Grove Avenue	AC	N	2	720	14	10,080	8/27/24	46	60	33	7	New Construction - Initial	1/1/80
30	2303	Alley Fashion Park	Fashion Park Street	190' E Fashion Park Street	AC	N	2	190	14	2,660	8/28/24	48	74	20	6	Surface Treatment - Slurry Seal	1/1/96
19	2381	Alley Burton Avenue	Pine Street	East End	AC	N	2	490	14	6,860	8/27/24	49	64	36	0	Surface Treatment - Slurry Seal	12/13/06
36	2388	Alley Laurel Drive	Collins Avenue	North End	AAC	N	1	580	14	8,120	8/27/24	49	31	5	64	Overlay - AC Structural	11/14/06
1323	8016	Alley N/O La Veta Avenue	Wellington Street	End	AC	N	2	493	16	7,888	8/28/24	49	59	8	33	New Construction - Initial	10/4/12
27	2279	Alley El Prado Avenue	320' W Fondren Street	Fondren Street	AC	N	1	320	20	4,480	8/28/24	52	34	66	0	New Construction - Initial	4/4/12
52	2351	Alley Shattuck Place	Shattuck Place	Lincoln Avenue	AC	N	2	1,170	20	23,400	8/27/24	53	30	65	5	Reconstruction	2/29/16
39	2280	Alley Maple Avenue	Bitterbush Street	Eckhoff Street	AC	N	2	790	15	11,850	8/28/24	53	41	46	13	New Construction - Initial	1/1/80
44	2370	Alley Oak Street	Palmyra Avenue	North End	AC	N	2	630	14	8,820	8/28/24	54	27	63	10	Surface Reconstruction - AC	2/1/10
23	41	Alley Century Avenue	James Street	East End	AC	N	2	380	20	6,460	8/28/24	55	35	65	0	New Construction - Initial	1/1/80
41	2302	Alley McCoy Road	Almond Avenue	McCoy Road	AC	N	2	580	22	12,760	8/26/24	55	50	37	13	New Construction - Initial	1/1/80
41	2301	Alley McCoy Road	Almond Avenue	McCoy Road	AC	N	2	580	22	12,760	8/26/24	57	49	34	17	New Construction - Initial	1/1/80
45	2293	Alley Olive Street	North End	Alley Mayfair Avenue	AC	N	2	305	14	4,270	8/27/24	57	78	0	22	New Construction - Initial	1/1/80
23	2345	Alley Century Avenue	West End	James Street	AC	N	1	125	16	2,000	8/28/24	58	65	28	7	New Construction - Initial	1/1/80
39	2331	Alley Maple Avenue	Grand Street	Shaffer Street	PCC	N	2	540	20	10,800	8/28/24	59	12	71	17	New Construction - Initial	1/1/80
15	2308	Alley Almond Avenue	Clark Street	Parker Street	PCC	N	1	270	11	2,970	8/26/24	61	23	69	8	New Construction - Initial	1/1/80
50	2380	Alley Park Lane	Del Mar Avenue	Highland Street	AC	N	2	435	14	6,090	8/27/24	61	33	64	3	New Construction - Initial	1/1/80
40	2294	Alley Mayfair Avenue	Lemon Street	Glassell Street	AC	N	2	595	14	8,330	8/27/24	61	35	50	15	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1310	3372	Alley Sail Ave	Sail Avenue	Bourbon St	AC	N	2	474	20	6,636	8/27/24	62	49	51	0	New Construction - Initial	1/1/80
29	2700	Alley Fairway Drive	Fairway Drive	Fairway Drive	AC	N	2	1,910	21	28,650	8/28/24	63	49	50	1	New Construction - Initial	1/1/80
62	13231	Alley Yorba Street	La Veta Avenue	North End	AC	N	2	581	20	11,620	8/28/24	63	72	21	7	New Construction - Initial	1/1/80
62	13286	Alley Yorba Street	Delia Lane	North End	AC	N	1	422	20	8,440	8/28/24	63	59	41	0	New Construction - Initial	1/1/80
16	2384	Alley Amos Street	Denise Avenue	Altura Avenue	AC	N	2	400	20	4,800	8/27/24	63	30	68	2	Surface Treatment - Slurry Seal	1/1/04
60	2285	Alley Wilson St (S)	Lemon Street	Glassell Street	AC	N	2	580	14	8,120	8/27/24	64	57	42	1	New Construction - Initial	1/1/80
62	13654	Alley Yorba Street	Burdie Lane	La Veta Avenue	AC	N	2	765	20	15,300	8/28/24	66	61	39	0	New Construction - Initial	1/1/80
1318	2688	Alley Foundren Street	150' n/o El Rancho Ave	750' n/o El Rancho Ave	AAC	N	1	876	20	12,264	8/28/24	67	43	57	0	New Construction - Initial	4/4/12
49	2339	Alley Palmyra Avenue	Harwood Street	Shaffer Street	PCC	N	1	615	11	6,765	8/26/24	68	16	84	0	New Construction - Initial	1/1/80
49	2335	Alley Palmyra Avenue	Shaffer Street	Harwood Street	PCC	N	1	615	11	6,765	8/26/24	68	16	84	0	New Construction - Initial	1/1/80
21	2334	Alley California Street	Maple Avenue	Chapman Avenue	AAC	N	2	575	11	6,325	8/28/24	68	74	0	26	2 in overlay	8/1/09
15	2310	Alley Almond Avenue	Parker Street	Pixley Street	PCC	N	1	270	11	2,970	8/26/24	69	26	51	23	New Construction - Initial	1/1/80
1350	2336	Alley Glassell Street	Rose Avenue	Walnut Avenue	PCC	N	0	659	10	6,590	8/27/24	69	10	90	0	New Construction - Initial	10/30/12
29	2307	Alley Fairway Drive	Fairway Drive	Alley Fashion Park	AC	N	2	105	14	1,470	8/28/24	70	83	17	0	Surface Treatment - Slurry Seal	1/1/04
1318	2689	Alley Foundren Street	500' n/o El Rancho Ave	750' n/o El Rancho Ave	AAC	N	1	574	20	8,036	8/28/24	70	41	53	6	New Construction - Initial	4/4/12
47	2349	Alley Palm Avenue	Earlham Street	Hewes Street	AC	N	1	455	20	6,370	8/28/24	70	50	50	0	Surface Treatment - Slurry Seal	11/1/08
46	2337	Alley Orange Street	Rose Avenue	Walnut Avenue	PCC	N	2	605	14	8,470	8/27/24	71	20	80	0	New Construction - Initial	1/1/80
51	2386	Alley Riverview Avenue	Hearthside Street	Riverview Avenue	AC	N	2	1,440	20	28,800	8/27/24	71	53	38	9	Surface Treatment - Slurry Seal	11/1/08
56	2304	Alley Tularosa Avenue	Fashion Park Street	Alley Fashion Park Street	AC	N	2	420	14	5,880	8/28/24	71	86	14	0	Surface Treatment - Slurry Seal	1/1/04
35	2390	Alley Kathleen Street	Kathleen Street	165' E Kathleen Street	AAC	N	2	165	20	3,300	8/28/24	72	37	63	0	Grinding (Localized)	12/14/06
35	2390	Alley Kathleen Street	Kathleen Street	165' E Kathleen Street	AAC	N	2	165	20	3,300	8/28/24	72	37	63	0	Overlay - AC Structural	12/14/06
22	2329	Alley Center Street	Culver Avenue	La Veta Avenue	PCC	N	1	600	14	8,400	8/26/24	72	21	79	0	New Construction - Initial	1/1/80
29	2373	Alley Fairway Drive	Alley Cypress Street	Fashion Park Street	AC	N	2	1,835	14	25,690	8/28/24	72	68	30	2	Surface Treatment - Slurry Seal	1/1/04
9004	2350	Alley Shasta Street	Almond Avenue	Palmyra Avenue	AC	N	1	805	20	16,100	8/28/24	72	45	55	0	New Construction - Initial	4/4/12
61	2284	Alley Wilson St (N)	Lemon Street	Glassell Street	AC	N	2	580	16	9,280	8/27/24	73	29	70	1	New Construction - Initial	1/1/80
1302	3127	Alley Collins Ave	Highland	296' e/o Highland	AC	N	2	367	20	5,138	8/27/24	73	80	20	0	New Construction - Initial	1/1/80
29	2374	Alley Fairway Drive	La Veta Frontage	Fairway Drive	AC	N	2	790	16	12,640	8/28/24	73	29	63	8	Surface Treatment - Slurry Seal	1/1/04
43	2376	Alley Nordic Street	Del Mar Avenue	Meats Avenue	AC	N	1	260	14	3,640	8/27/24	74	29	71	0	New Construction - Initial	1/1/80
46	2320	Alley Orange Street	North End	Almond Avenue	AAC	N	1	465	12	5,580	8/28/24	74	26	64	10	Overlay - AC Structural	1/1/96
53	2288	Alley Shelly Court	Main Street	Barkley Street	AC	N	2	670	19	12,730	8/27/24	75	26	74	0	New Construction - Initial	1/1/80
1320	3147	Alley Highland Street	Collins Avenue	Quincy Avenue	AC	N	2	1,000	20	12,426	8/27/24	76	70	19	11	New Construction - Initial	1/1/80
46	2852	Alley Orange Street	Maple Avenue	389' s/o Maple Avenue	AC	N	1	389	17	5,763	8/28/24	77	24	26	50	New Construction - Initial	1/1/80
1306	3128	Alley Locust Street	Highland Street	254' e/o Highland Street	AC	N	2	254	20	3,556	8/27/24	77	100	0	0	New Construction - Initial	1/1/80
22	2330	Alley Center Street	Culver Avenue	South End	PCC	N	1	400	14	5,600	8/26/24	80	19	81	0	New Construction - Initial	1/1/80
15	2318	Alley Almond Avenue	Shaffer Street	Harwood Street	PCC	N	1	600	14	8,400	8/26/24	81	19	81	0	New Construction - Initial	1/1/80
49	2750	Alley Palmyra Avenue	Olive Street	End	AC	N	2	187	15	2,805	8/28/24	81	64	36	0	New Construction - Initial	1/1/80
25	2286	Alley Citrus Street	Struck Avenue	Batavia Street	AC	N	2	1,055	14	14,770	8/27/24	81	46	0	54	New Construction - Initial	1/1/80
26	2306	Alley Cypress Street	Rosewood Avenue	Fairway Drive	AC	N	2	270	20	5,400	8/28/24	82	100	0	0	Surface Treatment - Slurry Seal	1/1/04
1313	3160	Alley Adams Ave	150' w/o Highland	258' e/o Highland Ave	AC	N	2	408	20	5,712	8/27/24	82	97	0	3	New Construction - Initial	1/1/80
1303	2277	Alley Park Central	Park Central Avenue	Park Central Avenue	AC	N	1	849	20	11,480	8/28/24	82	64	36	0	Surface Reconstruction - AC	2/1/10
26	2305	Alley Cypress Street	Cypress Street	Alley Fashion Park	AC	N	2	115	14	1,610	8/28/24	82	100	0	0	Surface Treatment - Slurry Seal	1/1/96
1309	3152	Alley Quincy Ave	Highland Street	236' e/o Highland Street	AC	N	2	236	20	3,304	8/27/24	82	95	0	5	New Construction - Initial	1/1/80
55	2343	Alley Taft Avenue	Widdows Way	East End	AC	N	2	315	16	5,040	8/27/24	83	38	28	34	New Construction - Initial	1/1/80
58	2371	Alley Wayfield Street	Washington Avenue	North End	AAC	N	2	475	14	6,650	8/28/24	83	55	29	16	Surface Reconstruction - AC	2/1/10
22	2327	Alley Center Street	Alley Palmyra Avenue	Culver Avenue	PCC	N	1	460	13	5,980	8/26/24	83	21	79	0	New Construction - Initial	1/1/80
59	2382	Alley Widdows Way	Briardale Avenue	Palmdale Avenue	AC	N	2	280	14	3,920	8/27/24	83	43	46	11	Surface Treatment - Slurry Seal	1/1/98
49	2340	Alley Palmyra Avenue	Grand Street	Shaffer Street	PCC	N	1	530	14	7,420	8/26/24	84	34	66	0	New Construction - Initial	1/1/80
1307	3141	Alley Monroe Avenue	Highland Street	240' e/o Highland Avenue	AC	N	2	240	20	3,360	8/27/24	85	98	0	2	New Construction - Initial	1/1/80
17	2287	Alley Barkley Avenue	Main Street	Collins Avenue	AC	N	2	795	16	12,720	8/27/24	85	74	24	2	Reconstruction	12/12/12
1314	3140	Alley Highland Street	155' n/o Quincy Avenue	Collins Avenue	AC	N	2	1,219	20	17,066	8/27/24	86	100	0	0	New Construction - Initial	1/1/80
15	2314	Alley Almond Avenue	Clark Street	Parker Street	PCC	N	1	270	11	2,970	8/26/24	86	60	0	40	New Construction - Initial	1/1/80
20	2297	Alley Bush Street	Almond Avenue	Palmyra Place	PCC	N	1	460	10	4,600	8/26/24	87	76	24	0	New Construction - Initial	1/1/80
34	2379	Alley Highland Street	Highland Street	Highland Street	AC	N	2	585	14	8,190	8/27/24	87	60	26	14	New Construction - Initial	1/1/80
15	2312	Alley Almond Avenue	Parker Street	Pixley Street	PCC	N	1	270	11	2,970	8/26/24	88	74	0	26	New Construction - Initial	1/1/80
39	2289	Alley Maple Avenue	Parker Street	Pixley Street	PCC	N	1	285	15	4,275	8/26/24	88	68	32	0	New Construction - Initial	1/1/80
50	2372	Alley Park Lane	Washington Avenue	Park Lane	AC	N	2	580	14	8,120	8/28/24	88	100	0	0	Surface Treatment - Slurry Seal	1/1/02
55	2344	Alley Taft Avenue	Palmdale Avenue	Widdows Way	AC	N	2	530	14	7,420	8/27/24	88	59	41	0	Surface Treatment - Slurry Seal	1/1/98
18	2283	Alley Berkeley Street	Berkeley Street	Berkeley Street	AAC	N	2	645	15	9,675	8/27/24	89	100	0	0	2 in overlay	10/1/13
1311	3351	Alley Heim Ave	Bourbon St	140' w/o Bourbon St	AC	N	2	140	20	1,820	8/27/24	89	84	16	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
28	2278	Alley El Rancho Avenue	Lewis Street	East End	AC	N	2	600	20	8,400	8/28/24	89	96	0	4	New Construction - Initial	1/1/80
32	2377	Alley Grove Avenue	Highland Street	Grove Avenue	AC	N	2	720	14	10,080	8/27/24	90	78	11	11	New Construction - Initial	1/1/80
46	2321	Alley Orange Street	Culver Avenue	La Veta Avenue	PCC	N	1	600	12	7,200	8/26/24	90	56	44	0	New Construction - Initial	1/1/80
52	2352	Alley Shattuck Place	Locust Avenue	North End	AC	N	2	300	20	6,000	8/27/24	90	100	0	0	New Construction - Initial	1/1/80
18	2282	Alley Berkeley Street	Dell Street	Berkeley Street	AC	N	2	1,145	14	16,030	8/27/24	90	100	0	0	Surface Treatment - Slurry Seal	1/1/95
38	2296	Alley Main Street	Alley Barkley Avenue	Barkley Avenue	AC	N	2	125	18	2,250	8/27/24	91	100	0	0	New Construction - Initial	1/1/80
48	2342	Alley Palmdale Avenue	Widdows Way	East End	AC	N	2	490	16	7,840	8/27/24	91	79	21	0	New Construction - Initial	1/1/80
24	2295	Alley Chapman Avenue	Cypress Street	Lemon Street	PCC	N	1	132	20	2,640	8/26/24	91	100	0	0	New Construction - Initial	1/1/80
1311	3333	Alley Heim Ave	Bourbon St	140' w/o Bourbon St	AC	N	2	140	20	1,820	8/27/24	91	78	22	0	New Construction - Initial	1/1/80
1304	2385	Alley Lincoln Avenue	Oceanview Avenue	East End	AC	N	1	250	11	2,750	8/27/24	92	87	0	13	New Construction - Initial	1/1/80
15	2316	Alley Almond Avenue	130' W Glassell Street	Glassell Street	PCC	N	1	130	12	1,560	8/26/24	92	100	0	0	New Construction - Initial	1/1/80
1315	3332	Alley Bourbon Street	Sail Ave	Heim Ave	AAC	N	2	1,432	20	20,048	8/27/24	92	85	0	15	New Construction - Initial	4/4/12
22	2325	Alley Center Street	Alley Palmyra Avenue	Culver Avenue	PCC	N	1	460	13	5,980	8/26/24	93	45	55	0	New Construction - Initial	1/1/80
46	2323	Alley Orange Street	Culver Avenue	La Veta Avenue	PCC	N	1	600	12	7,200	8/26/24	94	100	0	0	New Construction - Initial	1/1/80
1305	2671	Alley La Veta Avenue	Flower Circle	Silk Tree Circle	AC	N	2	516	19	9,679	8/26/24	94	100	0	0	New Construction - Initial	1/1/80
49	2338	Alley Palmyra Avenue	Cambridge Street	Waverly Street	PCC	N	2	295	15	4,425	8/26/24	96	100	0	0	New Construction - Initial	1/1/80
54	2276	Alley Sunningdale Circle	Compton Avenue	Chapman Avenue	PCC	N	1	265	18	4,770	8/28/24	96	100	0	0	Surface Reconstruction - PCC	2/1/10
57	2383	Alley Villa Real Drive	Santiago Boulevard	East End	AC	N	1	735	19	13,965	8/27/24	98	69	0	31	Overlay-Rubber Hot Mix	1/4/23
1319	3427	Alley Buena Vista	150' e/o Orange Ave	100' w/o Palm Ave	AC	N	1	50	19	750	8/27/24	100	0	0	0	New Construction - Initial	1/1/80
								11.5		**915,696**							

XIII. APPENDIX C – GIS DIGITAL DATA

Introduction

The OCTA GIS Section maintains a spatial inventory of transportation infrastructure which mostly consists of major arterial streets, roads, and highways. A key component of road information is pavement condition. Maintaining an inventory of pavement condition will enhance OCTA's GIS visualization and analysis capabilities and assist in understanding the transportation investment needs throughout the region. Therefore, a GIS dataset in digital format should be included in this report.

Structure of GIS Data

The GIS dataset must consist of linear geographic features that represent road/street segments. All segments that are part of the report should be included in the GIS dataset. The attribute information of each segment should generally follow the format of the Complete Listing of Current Street Conditions in Appendix B above.

The GIS data requirements are discussed below. Most commercial and open-source GIS software provide industry-standard tools to manage GIS data to meet these requirements.

GIS Digital Data Format

The GIS data must be submitted in either one of the following formats:

- Esri Shapefile, or
- Esri File Geodatabase

Metadata

The GIS data are required to have associated metadata. The minimum metadata items required are:

- Title of Dataset
- Tags (A set of words that can be used by GIS to search for the resource. For example: "pavement", "transportation", "roads")
- Summary (A brief purpose statement of the dataset)
- Description (A brief narrative of the dataset's content)
- Credits (A recognition of those who created or contributed to the resource)

Spatial Geometry Type

The spatial geometry of the segment features must be lines that represent the roadway centerline as accurately as possible.

Projection

The GIS data must have spatial reference information and have its coordinate system identified and embedded in or associated with the data file(s). All GIS data submitted to OCTA should be in the following

projected coordinate system:

- NAD 1983 State Plane California VI FIPS 0406 (US Feet) - More information about this system can be found at: https://spatialreference.org/ref/epsg/nad83-california-zone-6-ftus/

GIS Feature Attributes

The required segment attributes are:

- Street name
- Unique segment identifier (Segment ID from original source if available)
- Name of intersecting road at the beginning of a segment
- Name of intersecting road at the end of the segment
- Current pavement condition index (PCI)
- Current PCI inspection date
- Length of road segment in feet
- Width of road segment in feet
- Paved area of road segment in square feet or square yards
- Projected PCI at end of Seven-Year Road Maintenance and Rehabilitation Plan

Additional attributes such as number of through travel lanes, direction of travel and pavement surface type may be provided.

XIV. APPENDIX D – QUALITY ASSURANCE / QUALITY CONTROL PLAN

Introduction

When performing data collection in any field, the need for quality control is paramount as it is essential for accurate planning, analysis and design. This is particularly true for collecting pavement distress data for a pavement management program.

The Quality Assurance / Quality Control (QA/QC) Plan establishes minimum quality standards for performance and procedures for update of the pavement management program.

Objectives

This document constitutes a formal QA/QC Plan for the City of Orange. It was prepared on March, 2018 and last revised in April, 2026.

Specifically, it is intended for the 2026 Pavement Management Plan Update. The focus is on the collection of network-level pavement distress data (defined by National Cooperative Highway Research Program (NCHRP) Synthesis 401 Quality Management of Pavement Data Collection, as "Network-level data collection involves collection of large quantities of pavement condition data, which is often converted to individual condition indices or aggregated into composite condition indices".

This document also addresses the QA/QC plan requirements of the Orange County Transportation Authority (OCTA)'s "Countywide Pavement Management Plan Guidelines" (Section 2.4), adopted in April, 2026.

Structure of QA/QC Plan

The following components are addressed in this QA/QC Plan:

- Condition survey procedures used;
- Accuracy required for data collection;
- Inspector qualifications and experience; and
- Safety.

Condition Survey Procedures

The governing document in performing condition surveys for the City of Orange is ASTM D6433 "Standard Practice for Roads and Parking Lots Pavement Condition Index (PCI) Surveys." Both asphalt concrete (AC) and Portland cement concrete (PCC) pavements are included in this protocol. The following distresses are collected for each pavement type:

Asphalt Concrete	Portland Cement Concrete (Jointed)
1. Alligator (fatigue) cracking	1. Blow-up/Buckling
2. Bleeding	2. Corner Breaks
3. Block Cracking	3. Divided Slab
4. Bumps and sags	4. Durability ("D") Cracking
5. Corrugation	5. Faulting
6. Depression	6. Joint Seal damage
7. Edge Cracking	7. Lane/Shoulder Drop-off
8. Joint Reflection Cracking	8. Linear Cracking
9. Lane/Shoulder Drop-off	9. Patching (large) and Utility Cuts
10. Longitudinal & Transverse Cracking	10. Patching (small)
11. Patching and Utility Cut Patching	11. Polished Aggregate
12. Polished aggregate	12. Popouts
13. Potholes	13. Pumping
14. Railroad Crossing	14. Punchout
15. Rutting	15. Railroad Crossing
16. Shoving	16. Scaling, map cracking and crazing
17. Slippage Cracking	17. Shrinkage Cracks
18. Swell	18. Spalling (corner)
19. Weathering	19. Spalling (joint)
20. Raveling	

As required by the Orange County Transportation Authority (OCTA), the City of Orange must prepare and implement a quality assurance / quality control (QA/QC) plan regarding pavement management inspection as they pertain to MicroPAVER. For the purposes of this report, Bucknam has demonstrated below how our project team implemented QA/QC procedures during the project.

Our QA/QC plan focuses on the how each pavement inspection is performed, what distresses are collected and ensures that it complies with the OCTA guidelines defined within the "Countywide Pavement Management Plan Guidelines (CPMPG)".

As shown within the OCTA (CPMPG), our staff followed and delivered on the requirements stated within Chapter 2, page 2-5 which require specific QA/QC data (Items A through G). Additionally, Chapter 3 requires numerous data/deliverables from local agencies for OC Go eligibility. All general PCI budgetary report submittals will follow the Chapter 3 guidelines.

In conjunction with the outlined items within the CPMPG Section 2 we have summarized our QA/QC procedures below:

a. **Descriptions of condition survey** - Our staff follows the required Condition Survey Protocols (CPMPG, Chapter 2); our staff assesses each pavement section for the minimum distresses outlined within Chapter 2, page 2-1. Additionally, based on the pavement conditions found, we collect all MicroPAVER/StreetSaver Army Corps of Engineers (ACOE) distresses, if found within the sample sections; for example, if slippage cracking, potholes, etc. are found our survey technicians record the proper information.

b. **How data was collected** - Our surveys follow the OCTA accepted walking requirements. All sections that our staff surveys are performed through the walking method, approximately 10% of all sections surveyed were complemented with windshield surveys based on unique conditions found. Our staff physically measures the width of every section as well as measure for any square footage adjustment that need to be added or taken away from a sections "true area" (i.e. cul-de-sac, bus pads, street width variances, etc.). Samples taken always include a minimum of 2,500 SF coverage unless specific section limits prohibit this. Arterial section samples utilize a 3,500 SF sample size due to the larger section area (this is within the ASTM D6433 sample size calculation. Field crews typically include one individual for residential pavement sections while Arterial (MPAH) routes utilize a two-person crew for safety, traffic control and increases quality control.

c. **Accuracy required for data collection** - We use a statistical sampling approach for measuring the quality of our field technician's work. In this manner, 10 percent of the original surveys are re-surveyed by a different survey crew than the original, supervised by a field supervisor, and the results are compared to the original surveys. Our QC process involves checking the field crews' work in a "blind study" fashion. Quality control checks are performed at the end of each survey week. This ensures that all field personnel are properly collecting section samples, distress types and distress severities for all street segments.

    - When QA/QC issues are found, our staff documents the issues within MicroPAVER's user interface. If distress types found are not within the 97% accuracy our QA/QC is expanded beyond our minimum 10% resurvey to 20% of the original survey

d. **Random and Systematic Re-Inspections** – As described above our staff re-inspects, as a minimum, 10% of the original survey (OCTA only requires 5%). Per the agencies requests, our staff will submit PCI reports to the agency as project status reports for their review. Agencies will typically review specific pavement sections for PCI accuracy based on recent overlay or slurry seal maintenance; this serves as an initial accuracy check on our surveys (outside Bucknam QC efforts). Additionally, our staff performs "ride-a-long" surveys with local agency staff to build consensus on how our MicroPAVER/StreetSaver ACOE surveys are performed, recorded and reported on.

    Random re-inspections will include a representative selection across the following categories:

    - Functional classed (i.e. MPAH, locals);
    - Surface types (e.g. AC or PCC);
    - Pavement conditions (e.g. good, fair, poor);
    - Inspectors;
    - Geographical areas, if applicable.

For systematic re-inspections, this could be due to noticed trends such as specific treatment types (e.g. open-graded mixed), a specific inspector or geographical area. In these cases Bucknam continues to utilize a 10% re-inspection policy.

e. **PCI Comparison with Past Surveys** - if previous inspection data is available, new PCI's calculated through the most recent inspections will be compared to previous PCI's. If the variance in PCI is greater than +/- 10 PCI points, these sections will be flagged for further investigation and/or re-inspection (In the cases that a PCI increases or decreases by 10 points follows the established CPMPG guidelines; Appendix A, page A-18).

f. **Schedule of data submittal** – Pending on the City's last major PMP submittal, Bucknam will assist the agency in submitting the following:

- Master Plan of Arterial Highways (MPAH) routes will be surveyed and reported on at least once every two years
- Local streets will be surveyed and reported on every six years
- Corresponding MPAH and local PCI reporting and budgetary reporting will be submitted every two years

g. **Inspector's Qualification and Experience** – Bucknam staff have been trained on the use of StreetSaver and the segment calibration/verification and inspection practices. Mr. Peter Bucknam (Project Manager) has completed the MicroPAVER Certification of Professional Development courses. All Bucknam field technicians are trained using the ASTM D6433 survey methodologies and have passed OCTA's prequalification testing every year since 2010. Bucknam Infrastructure Group inspectors have attended formal training on pavement condition distress surveys. This training was conducted prior to performing any work using the ASTM D6433 protocols, consistent with OCTA's requirements.

Inspector Name	Role (Field Inspector or QA/QC Reviewer or Both)	Date of ASTM D6433 Training	Training Conducted By:	OCTA Pre-Qualification		
				Active (Y/N	Expiration Date	Certificate Provided with this Report (Y/N)
Cade Bucknam	Both	June, 2025	Bucknam - Internal	Y	6/30/27	Y
Chris Campbell	Field Inspector	February, 2026	Bucknam - Internal	Y	6/30/28	Y
Aaron Cohodas	Both	July, 2024	Bucknam - Internal	Y	7/30/26	Y
Avery Brinkley	Field Inspector	June, 2025	Bucknam - Internal	Y	6/30/27	Y

Attachments – Inspectors Certifications

- Certificate of Prequalification – OCTA Pavement Inspector Prequalification Program (see below):

h. **Safety procedures** – Bucknam field survey techniques utilize the following procedures:

- All vehicles are properly marked or flagged with appropriate sign markings indicating that a "PAVEMENT SURVEY IS IN PROGRESS"
- All vehicles have the proper flashing amber light beacons placed on the top of the vehicle to allow for proper visibility and line-of-site warning
- Large MPAH routes are surveyed using two field technicians to increase traffic control warning and safety
- While parking or stopping along the survey route, vehicles legally park within the right-of-way or use a parking lot
- All field technicians wear ANSI – 105 Class II safety vests

XV. APPENDIX E – PAVEMENT MANAGEMENT DATA FILES

The City of Orange MicroPAVER database (.e70 file) has been enclosed for City and OCTA use. This data and the associated reporting data includes:

- Street names and limits for the City's public streets
- Street identifiers (Branch ID, Section ID)
- Direction
- Begin and end of section
- Length, width and true areas
- Functional Classification (MPAH, Local)
- Number of travel lanes
- Pavement Condition Index (PCI) and date of inspection
- Type of recommended treatment
- Cost of recommended treatment

XVI. APPENDIX F – GIS MAPS / CURRENT CONDITIONS